



(22) Date de dépôt/Filing Date: 2005/09/23

(41) Mise à la disp. pub./Open to Public Insp.: 2007/03/23

(51) Cl.Int./Int.Cl. *B62B 7/10* (2006.01),
B62B 7/14 (2006.01)


(71) Demandeur/Applicant:
LAN, RED, TW

(72) Inventeur/Inventor:
LAN, RED, TW

(74) Agent: BERESKIN & PARR


(54) Titre : POUSSETTE REPLIABLE

(54) Title: FOLDABLE STROLLER

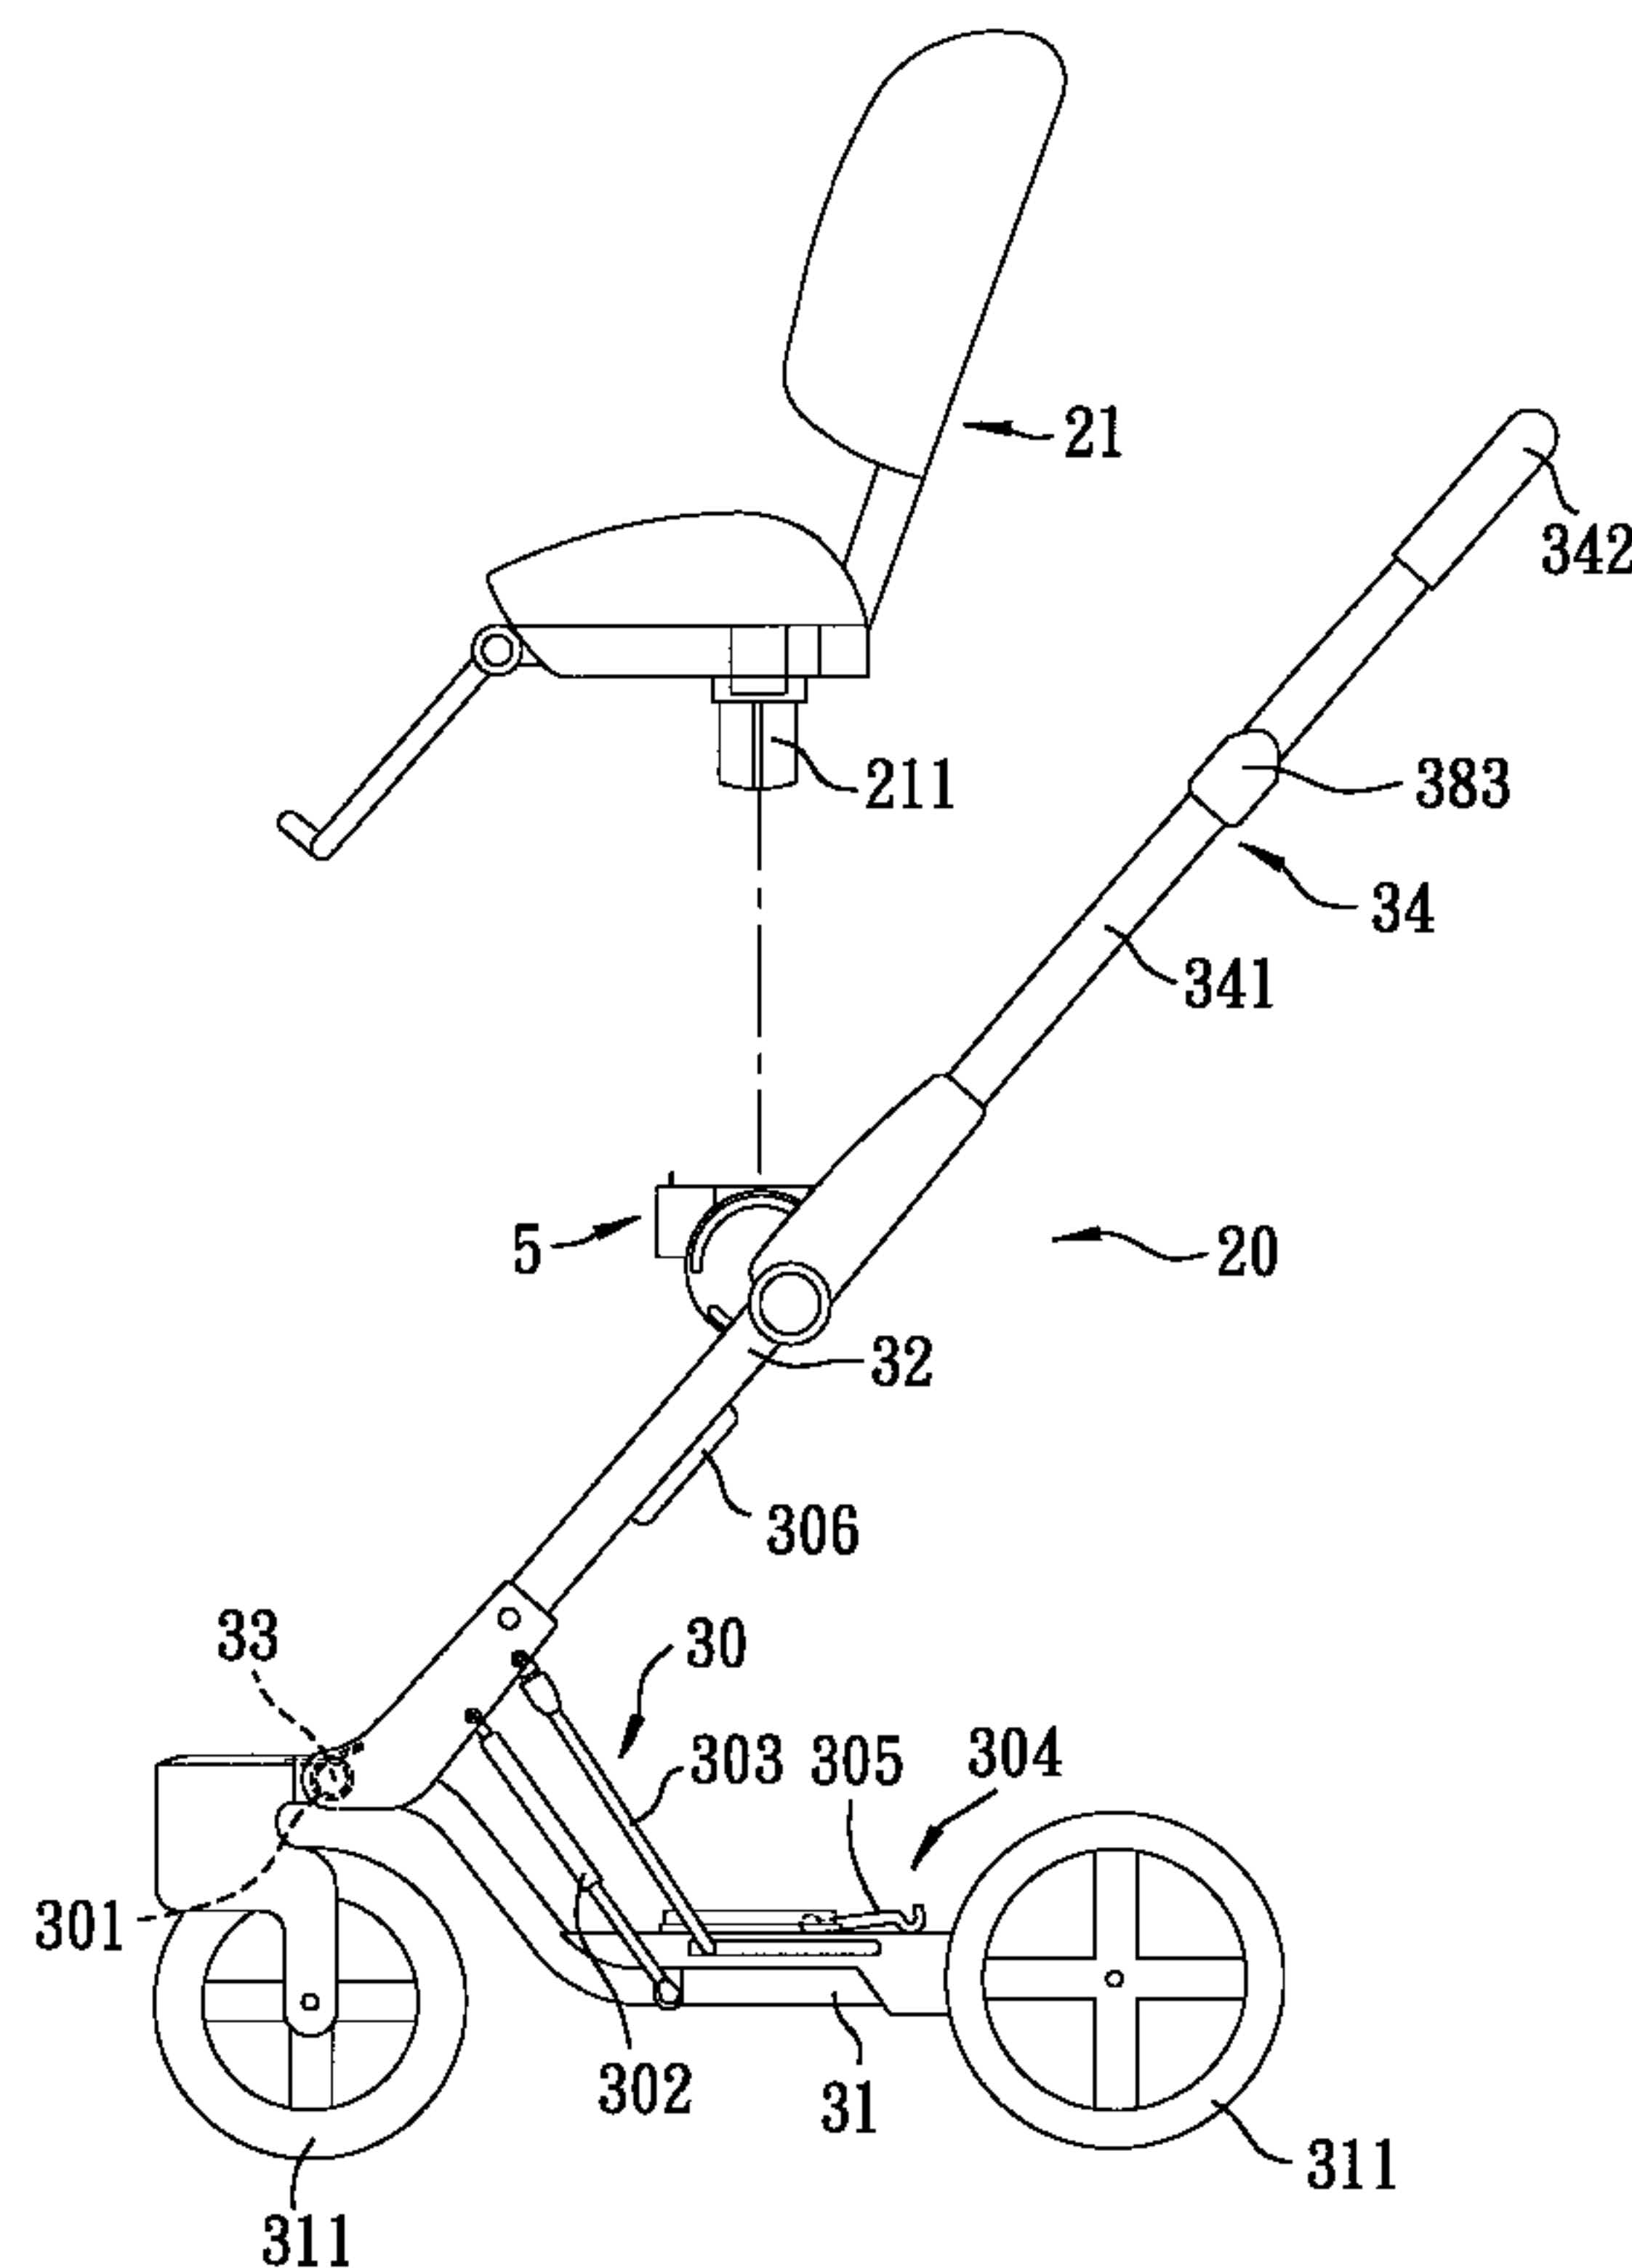

(57) **Abrégé/Abstract:**

A foldable stroller includes : a foldable frame having two pivot axes, two opposite lower rods, and two opposite upper rods pivoted to the lower rods through the pivot axes, respectively; a carrier disposed between the pivot axes and including two opposite connecting parts pivoted to the frame through the pivot axes, respectively, and formed with respective first and second arcuate grooves having a respective curvature center coincident with the respective pivot axle; and two limiting units, each of which includes first and second studs that project respectively from a respective one of the lower rods and a respective one of the upper rods into the first and second arcuate grooves of a respective one of the connecting parts.

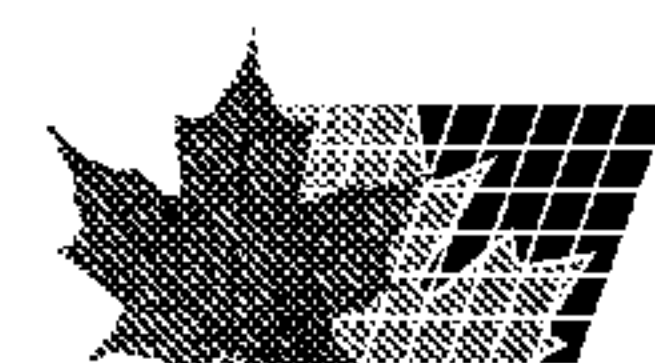

ABSTRACT OF THE DISCLOSURE

A foldable stroller includes: a foldable frame having two pivot axles, two opposite lower rods, and two opposite upper rods pivoted to the lower rods through the pivot axles, respectively; a carrier disposed between the pivot axles and including two opposite connecting parts pivoted to the frame through the pivot axles, respectively, and formed with respective first and second arcuate grooves having a respective curvature center coincident with the respective pivot axle; and two limiting units, each of which includes first and second studs that project respectively from a respective one of the lower rods and a respective one of the upper rods into the first and second arcuate grooves of a respective one of the connecting parts.

Fig. 3

FOLDABLE STROLLER**BACKGROUND OF THE INVENTION****1. Field of the Invention**

The present invention relates to a foldable stroller,
5 more particularly to a foldable stroller with a carrier
that is rotatable relative to a frame of the foldable
stroller.

2. Description of the Related Art

U.S. Patent Number 5,921,574 discloses a
10 perambulator that comprises a foldable frame provided
with wheels, and a carrying element connectable to the
frame for carrying a child. The frame includes a
substantially horizontally extending undercarriage,
and a pushing element connected to the undercarriage
15 and including a pair of opposite rods. The carrying
element has a sub-frame that is secured to the rods of
the pushing element through two fixation constructions
and that can be released from the fixation constructions,
so as to be rotatable relative to the rods through
20 operation of a button provided on one of the rods and
a lever on the other of the rods.

The aforesaid perambulator is disadvantageous in
that the fixation constructions are relatively
complicated, and folding and extending of the frame
25 through operation of the button and the lever are
relatively inconvenient.

SUMMARY OF THE INVENTION

Therefore, the object of the present invention is to provide a foldable stroller that is capable of overcoming the aforesaid drawbacks associated with the prior art.

5 According to this invention, there is provided a foldable stroller that comprises: a wheeled foldable frame having a pair of pivot axles, a pair of opposite lower rods, and a pair of opposite upper rods that are pivoted to the lower rods through the pivot axles,
10 respectively, so as to permit folding of the frame; a pair of locking units, each of which includes first and second interlocking members that are provided on the frame and that are releasably engageable with each other so as to lock the upper rods against rotation relative
15 to the lower rods; a carrier disposed between the pivot axles and including a pair of opposite connecting parts that are pivoted to the frame through the pivot axles, respectively, each of the connecting parts being formed with first and second arcuate grooves having a respective
20 curvature center coincident with a respective one of the pivot axles; and a pair of limiting units, each of which includes first and second studs that project respectively from a respective one of the lower rods and a respective one of the upper rods into the first
25 and second arcuate grooves of a respective one of the connecting parts.

BRIEF DESCRIPTION OF THE DRAWINGS

Other features and advantages of the present invention will become apparent in the following detailed description of the preferred embodiment with reference to the accompanying drawings, of which:

5 Figure 1 is a schematic view of the preferred embodiment of a foldable stroller according to the present invention, illustrating how a seat can be detachably mounted on a carrier of the foldable stroller;

10 Figure 2 is a fragmentary schematic view illustrating a state where upper and lower rods of the preferred embodiment are disposed at an extended position and are locked against relative movement through a locking unit, and where a carrier is limited by two studs against rotation relative to the upper and
15 lower rods in a first direction;

 Figure 3 is a fragmentary perspective view of the preferred embodiment disposed at the state shown in Fig. 2;

20 Figure 4 is a fragmentary schematic view illustrating how the upper rod of the preferred embodiment is folded from the state shown in Fig. 2;

 Figure 5 is a schematic view illustrating how the carrier of the preferred embodiment together with the seat can be moved during folding of the upper rod; and

25 Figure 6 is a fragmentary schematic view illustrating another state where the upper rod is disposed at a folded position, and the carrier is limited by the studs against

rotation in a second direction opposite to the first direction.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

Referring to Figures 1, 2 and 3, the preferred
5 embodiment of a foldable stroller according to the
present invention is shown to include: a wheeled foldable
frame 20 (for the sake of simplicity, only one side of
the frame 20 is shown in Figures 1 to 3) having a plurality
of wheels 311 provided thereon, a pair of pivot axles
10 35, a pair of opposite lower rods 32, and a pair of opposite
upper rods 341 that are pivoted to the lower rods 32
through the pivot axles 35, respectively, so as to permit
folding of the frame 20; a pair of locking units, each
of which includes first and second interlocking members
15 321, 381 that are provided on the frame 20 and that are
releasably engageable with each other so as to lock the
upper rods 341 against rotation relative to the lower
rods 32; a carrier 5 disposed between the pivot axles
35 and including a pair of opposite connecting parts
20 51 that are pivoted to the frame 20 through the pivot
axles 35, respectively, each of the connecting parts
51 being formed with first and second arcuate grooves
513, 514 having a respective curvature center coincident
with a respective one of the pivot axles 35; and a pair
25 of limiting units, each of which includes first and second
studs 36, 37 that project respectively from a respective
one of the lower rods 32 and a respective one of the

upper rods 341 into the first and second arcuate grooves 513, 514 of a respective one of the connecting parts 51.

5 In this embodiment, referring again to Figure 2, each of the first and second arcuate grooves 513, 514 is defined by a groove-defining wall that has opposite first and second ends 515, 516 (517, 518). The first stud 36 contacts the first end 515 of the groove-defining wall of the first arcuate groove 513 so as to limit the carrier 10 5 against rotation relative to the upper and lower rods 341, 32 in a first direction, and the second stud 37 contacts the first end 517 of the groove-defining wall of the second arcuate groove 514 so as to limit the carrier 5 against rotation relative to the upper and lower rods 15 341, 32 in a second direction opposite to the first direction when the frame 20 is disposed at an extended state, as best shown in Figure 1.

On the other hand, referring to Figure 6, the first stud 36 contacts the second end 516 of the groove-defining wall of the first arcuate groove 513 so as to limit the carrier 5 against rotation relative to the upper and lower rods 341, 32 in the second direction, and the second stud 37 contacts the second end 518 of the groove-defining wall of the second arcuate groove 514 so as to limit 25 the carrier 5 against rotation relative to the upper and lower rods 341, 32 in the first direction when the frame 20 is disposed at a folded state, as best shown

in Figure 6.

Referring again to Figures 1 and 3, each of the connecting parts 51 of the carrier 5 is formed with a slot 521 for mounting a carrying element 21 thereon. In this embodiment, the carrying element 21 is in the form of a seat, and is formed with a pair of protrusions 211 (only one side of the carrying element 21 is shown in Fig. 1) that are respectively insertable into the slots 521 in the connecting parts 51.

As for the pivot connection between the upper and lower rods 341, 32, referring again to Figure 3, each of the lower rods 32 is formed with a pair of lug plates 322, and each of the upper rods 341 is formed with a pivot body 343 that is disposed between the lug plates 322 of the respective one of the lower rods 32. Each of the pivot axles 35 extends through the lug plates 322 of the respective one of the lower rods 32 and the pivot body 343 of the respective one of the upper rods 341.

Referring once more to Figure 2, the first interlocking member 321 is provided on an upper portion of a respective one of the lower rods 32, and extends toward a respective one of the upper rods 341. The second interlocking members 381 is formed on a lower portion of a respective one of upper rods 341. Each of the locking units further includes a compression spring 382 abutting against the second interlocking member 381 for providing

an urging force to push the second interlocking member 381 to move toward the first interlocking members 321 for engagement therebetween, a slide 383 (see Fig. 1) mounted on an upper end of a respective one of the upper rods 341, and an operating cable 382 interconnecting the second interlocking member 381 and the slide 383 such that up-pulling of the operating cable 382 results in disengagement of the second interlocking member 381 from the first interlocking member 321 so as to permit the upper rods 341 to be pivotable about the respective one of the pivot axles 35 as to fold the frame 20.

The frame 20 further comprises a pushing lever 342 interconnecting the upper ends of the upper rods 341, and cooperating with the upper rods 341 to form a pushing element 34 for pushing or pulling the stroller.

The frame 20 further includes an undercarriage 31 and a pair of pivot rods 33, each of which pivotally connects a lower end of a respective one of the lower rods 32 to the undercarriage 31. Preferably, in this embodiment, the frame 20 further includes a strut mechanism 30 mounted between the undercarriage 31 and the lower rods 32 so as to permit the lower rods 32 to stay in an extended state as shown in Figure 1. The strut mechanism 30 includes a pair of torsion springs 301, each of which is mounted on a respective one of the pivot rods 33 for providing an urging force to urge the corresponding one of the lower rods 32 to be disposed

in the extended state, a pair of up-pushing cylinders 302 mounted between the lower rods 32 and the undercarriage 31, a strut assembly 303 mounted between the lower rods 32 and the undercarriage 31 for supporting the lower rods 32, and an interlocking unit 304. The interlocking unit 304 includes an engaging hook 305 mounted on the undercarriage 31, and an engaging base 306 mounted on one of the lower rods 32 and engageable with the engaging hook 305 so as to prevent undesired movement of the lower rods 32 relative to the undercarriage 31 when the frame 20 is disposed at the folded state shown in Figure 6.

To move the frame 20 from the extended state shown in Figure 1 to the folded state shown in Figure 3, the slide 383 is pulled upwardly to disengage the second interlocking member 381 from the first interlocking member 321, and the pushing element 34 is subsequently pushed to pivot frontwardly about the pivot axles 35. At the same time, the strut assembly 303 is driven to pivot relative to the lower rods 32 and the undercarriage 31, and the second stud 37 of each limiting unit is moved from the first end 517 of the groove-defining wall of the corresponding second arcuate groove 514 toward the second end 518 of the groove-defining wall of the corresponding second arcuate groove 514. The connecting parts 51 of the carrier 5 remain stationary until the second studs 37 reach the second ends 518 of the

groove-defining walls of the second arcuate grooves 514 (see Fig. 4), are driven by the second studs 37 to pivot about the respective pivot axles 35 when the second studs 37 move further along with the frontward movement of the upper rods 341, and are stopped from moving when the second ends 516 of the groove-defining walls of the first arcuate grooves 513 reach the first studs 36, thereby disposing the frame 20 at the folded position. At the same time, the lower rods 32 are moved from an inclined position toward a horizontal position relative to the undercarriage 31 during frontward movement of the pushing element 34. Note that, in this embodiment, the carrier 5 is disposed parallel to the undercarriage 31 when the frame 20 is disposed at the folded position. However, it can be modified so as to be disposed at a desired angle relative to the undercarriage 31 according to practical requirements. The engaging hook 305 immediately engages the engaging base 306 when the second ends 516 of the groove-defining walls of the first arcuate grooves 513 reach the first studs 36. Moreover, the torsion springs 301 accumulate an urging force for providing an upward force against the lower rods 32 when the frame 20 is disposed at the folded position.

When it is desired to restore the frame 20 to the extended position, the pushing element 34 is pulled upwardly, and the engaging hook 305 is disengaged from the engaging base 306. At this time, the second studs

37 are moved from the second ends 518 of the groove-defining walls of the second arcuate grooves 514 toward the first ends 517 of the groove-defining walls of the second arcuate grooves 514. The carrier 5 is then driven by the second studs 37 to pivot about the pivot axles 35 when the second studs 37 reach the first ends 517 of the groove-defining walls of the second arcuate grooves 514, and is stopped from moving by the first studs 36 when the first ends 515 of the groove-defining walls of the first arcuate grooves 513 reach the first studs 36, thereby disposing the frame 20 at the extended position. At the same time, the lower rods 32 are urged by the torsion springs 301 to move to the inclined position relative to the undercarriage 31.

With the inclusion of the limiting units (36, 37) and the first and second arcuate grooves 513, 514 in the foldable stroller of this invention, the aforesaid drawbacks associated with the conventional stroller can be eliminated.

While the present invention has been described in connection with what is considered the most practical and preferred embodiment, it is understood that this invention is not limited to the disclosed embodiments but is intended to cover various arrangement included within the spirit and scope of the broadest interpretation so as to encompass all such modifications and equivalent arrangements.

WHAT IS CLAIMED IS:

1. A foldable stroller comprising:

a wheeled foldable frame having a pair of pivot axles,
a pair of opposite lower rods, and a pair of opposite
5 upper rods that are pivoted to said lower rods through
said pivot axles, respectively, so as to permit folding
of said frame;

a pair of locking units, each of which includes first
and second interlocking members that are provided on
10 said frame and that are releasably engageable with each
other so as to lock said upper rods against rotation
relative to said lower rods;

a carrier disposed between said pivot axles and
including a pair of opposite connecting parts that are
15 pivoted to said frame through said pivot axles,
respectively, each of said connecting parts being formed
with first and second arcuate grooves having a respective
curvature center coincident with a respective one of
said pivot axles; and

20 a pair of limiting units, each of which includes first
and second studs that project respectively from a
respective one of said lower rods and a respective one
of said upper rods into said first and second arcuate
grooves of a respective one of said connecting parts.

25 2. The foldable stroller as claimed in claim 1, wherein
each of said first and second arcuate grooves is defined
by a groove-defining wall that has opposite first and

second ends, said first stud contacting said first end of said groove-defining wall of said first arcuate groove so as to limit said carrier against rotation relative to said upper and lower rods in a first direction, and
5 said second stud contacting said first end of said groove-defining wall of said second arcuate groove so as to limit said carrier against rotation relative to said upper and lower rods in a second direction opposite to the first direction when said frame is disposed at
10 an extended state.

3. The foldable stroller as claimed in claim 2, wherein said first stud contacts said second end of said groove-defining wall of said first arcuate groove so as to limit said carrier against rotation relative to
15 said upper and lower rods in the second direction, and said second stud contacts said second end of said groove-defining wall of said second arcuate groove so as to limit said carrier against rotation relative to said upper and lower rods in the first direction when
20 said frame is disposed at a folded state.

4. The foldable stroller as claimed in claim 3, wherein each of said connecting parts of said carrier is formed with a slot, said carrier further including a carrying element that is formed with a pair of protrusions that
25 are respectively insertable into said slots in said connecting parts.

5. The foldable stroller as claimed in claim 3, wherein

each of said lower rods is formed with a pair of lug
plates, each of said upper rods being formed with a pivot
body that is disposed between said lug plates of the
respective one of said lower rods, each of said pivot
5 axles extending through said lug plates of the respective
one of said lower rods and said pivot body of the
respective one of said upper rods.

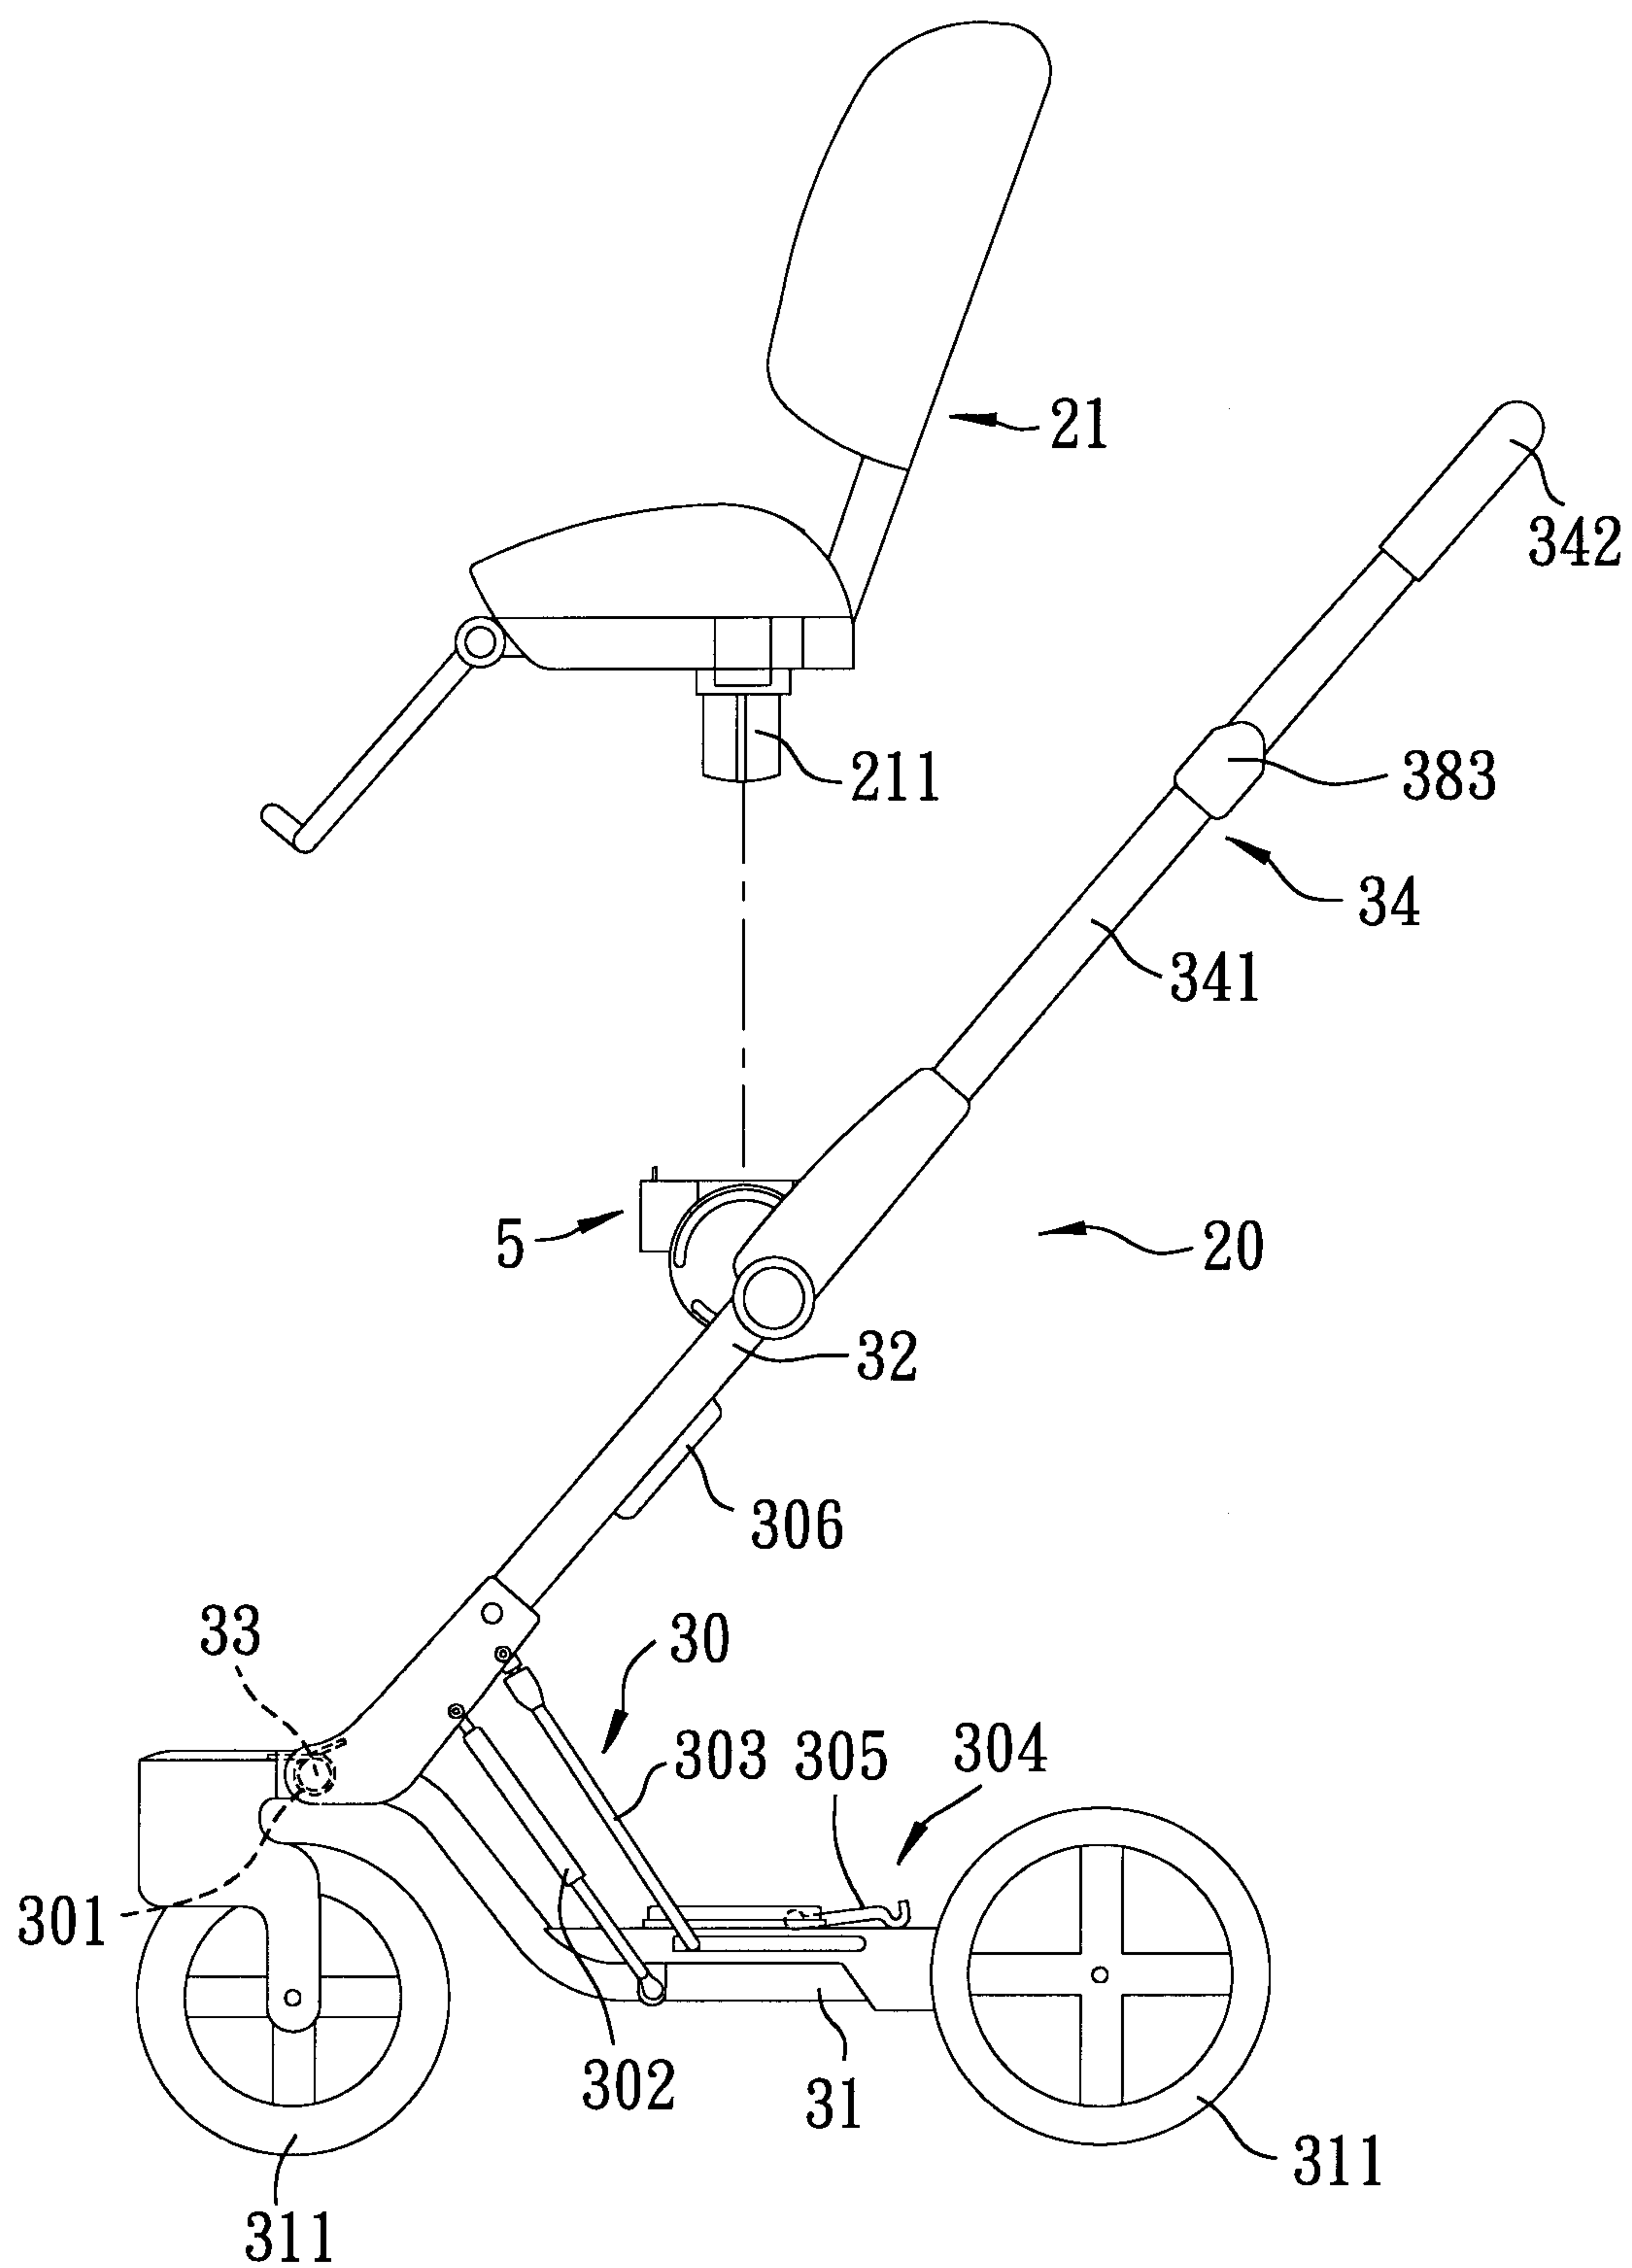


FIG. 1

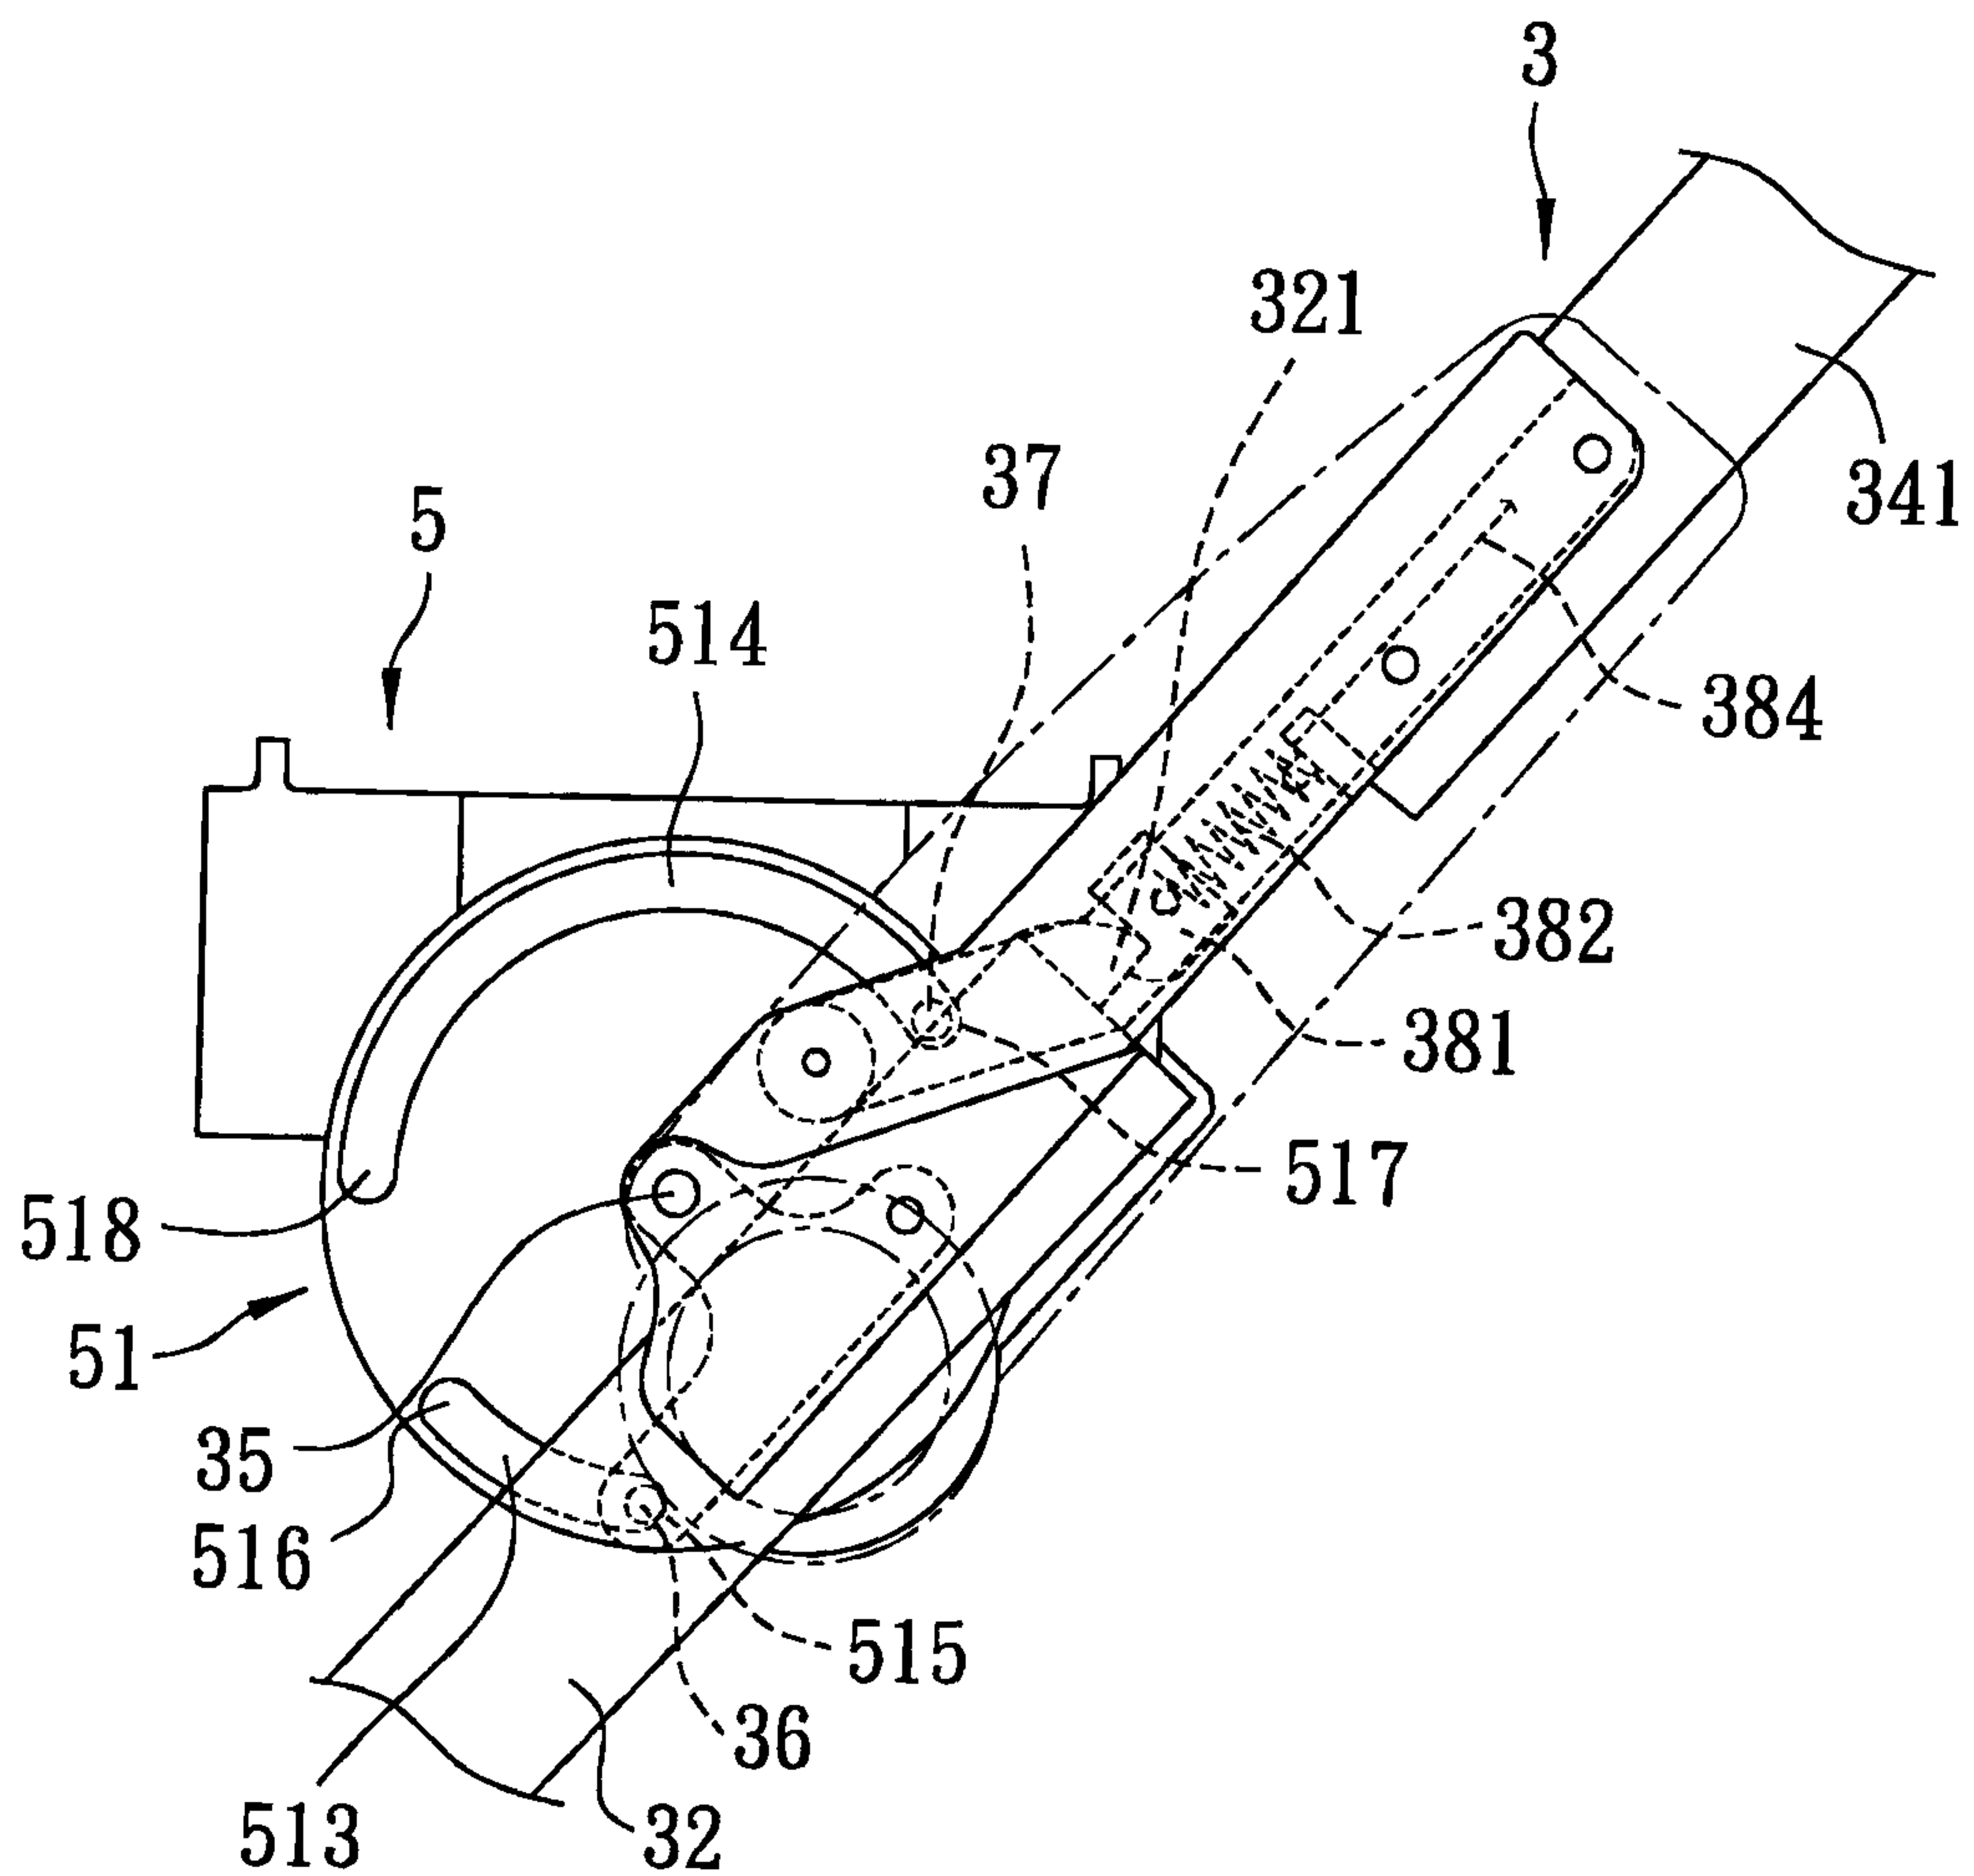


FIG. 2

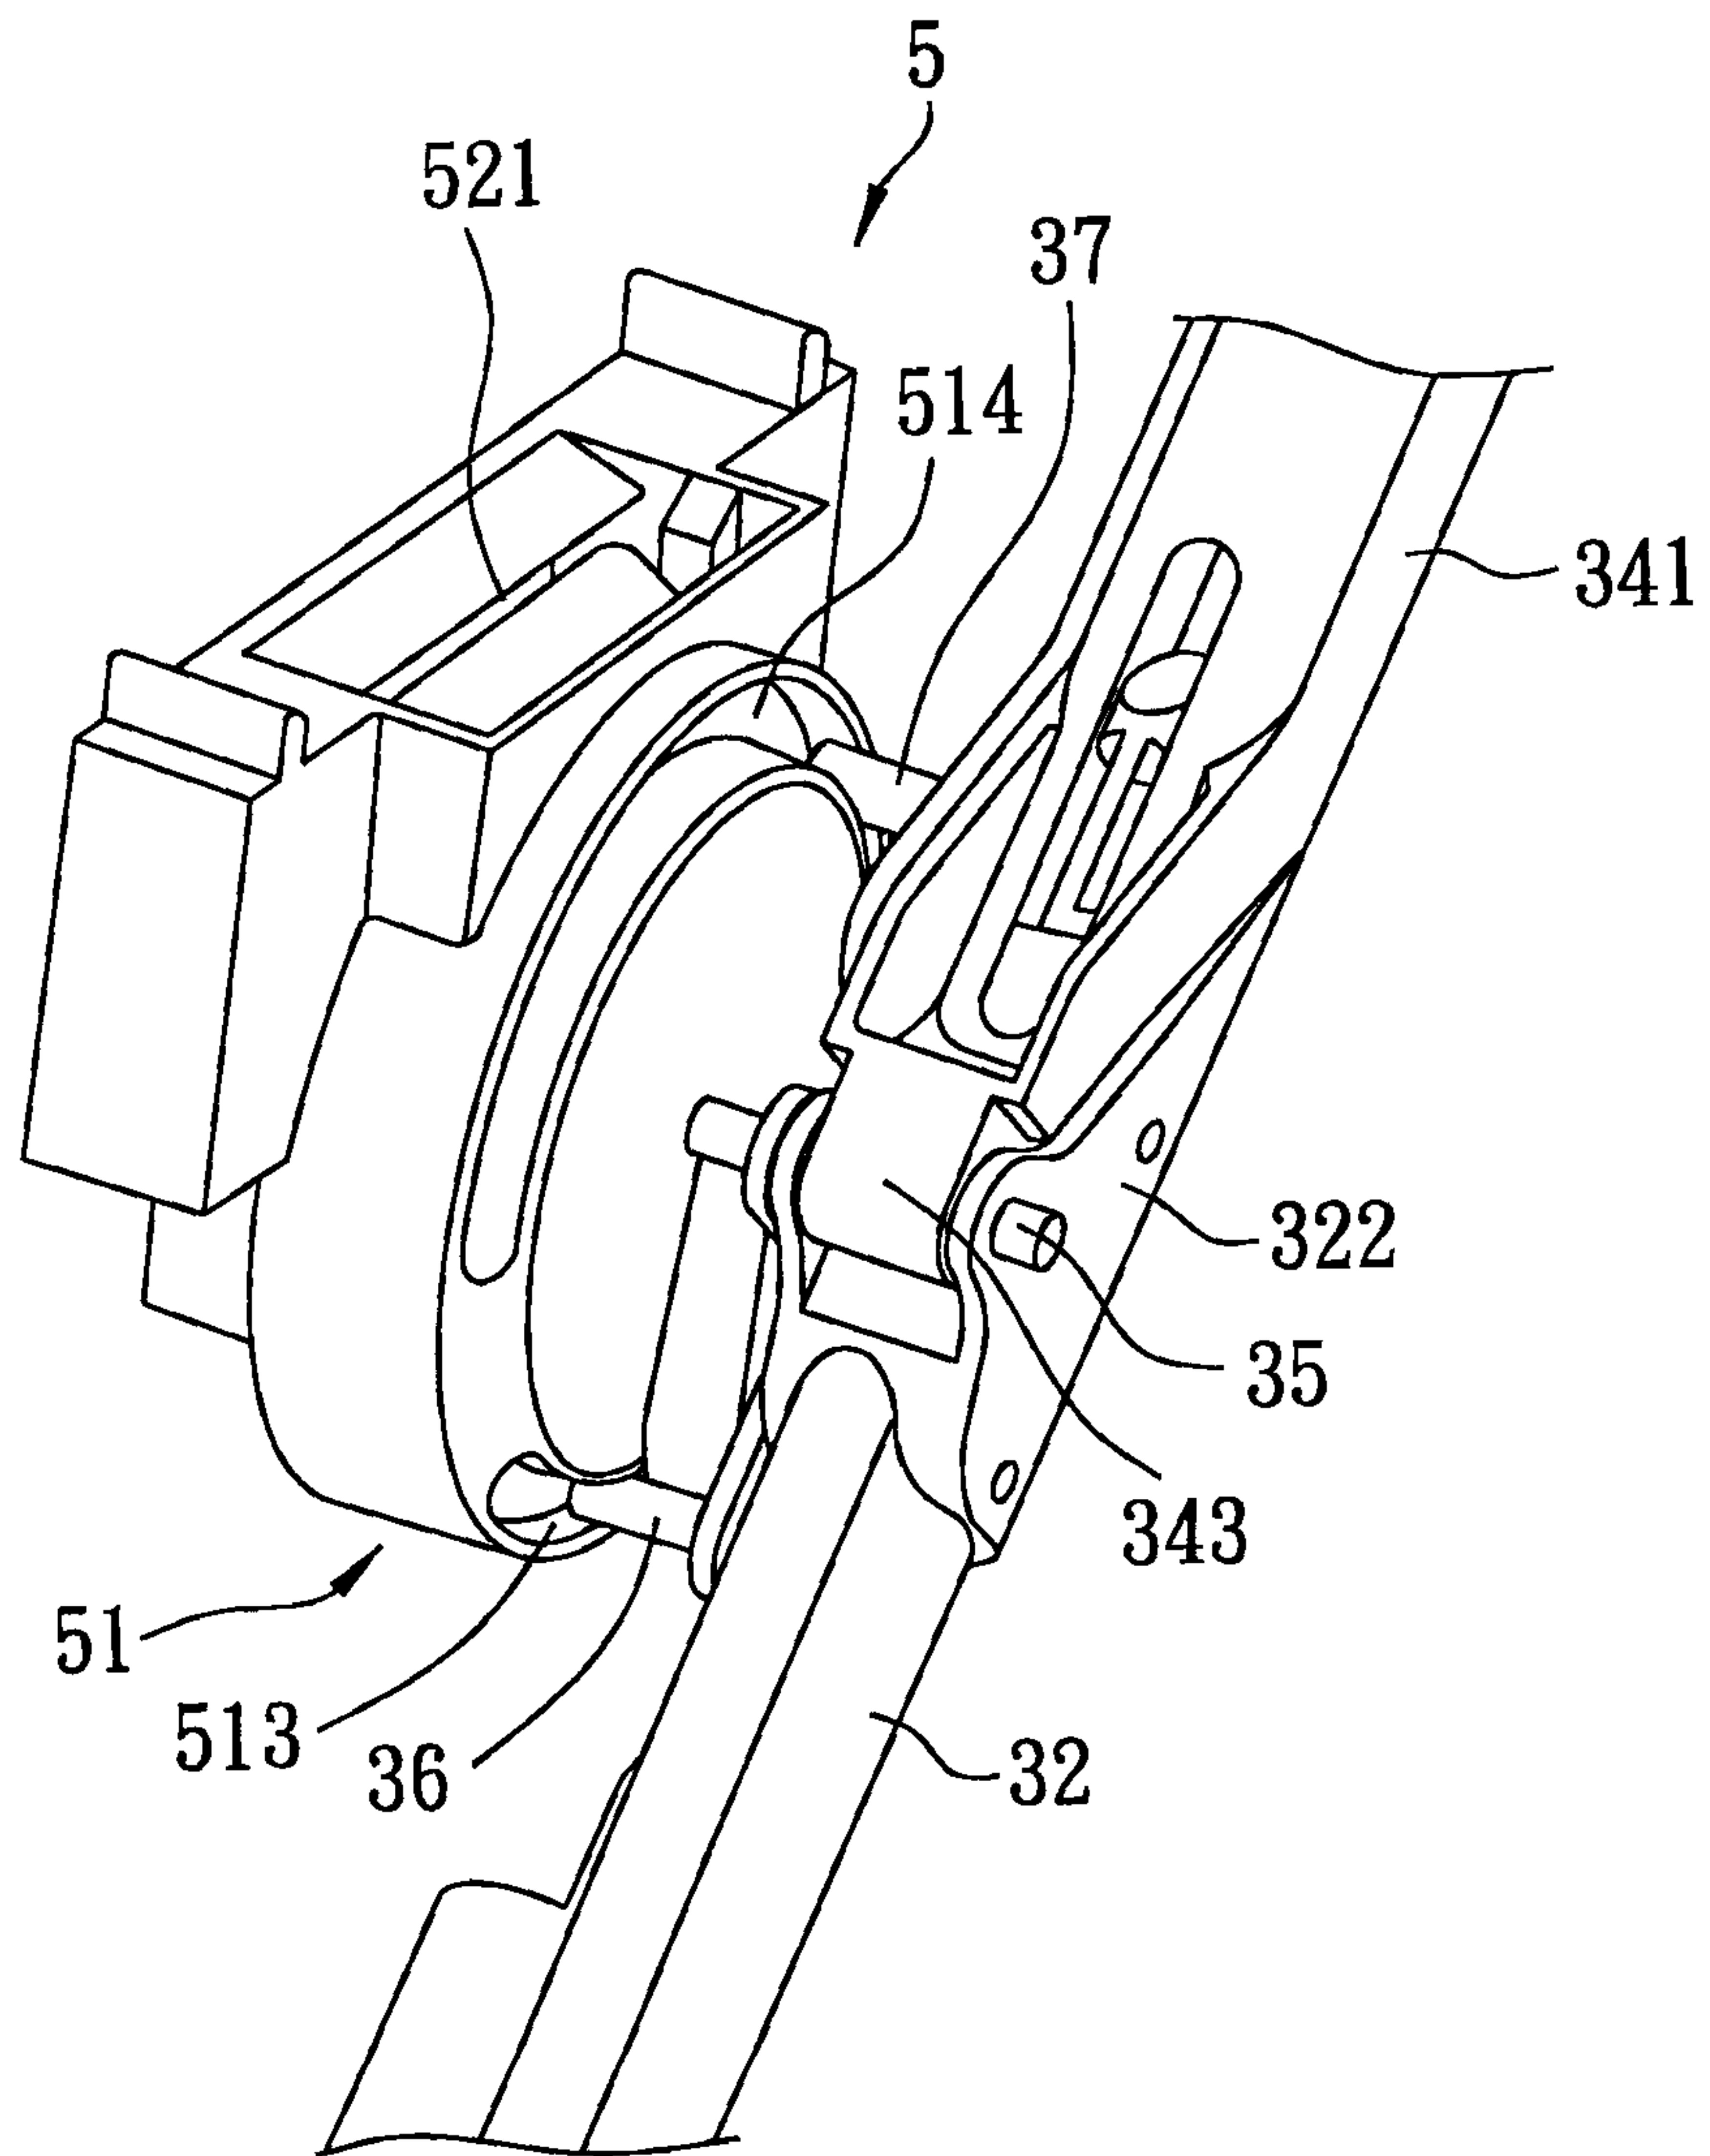


FIG. 3

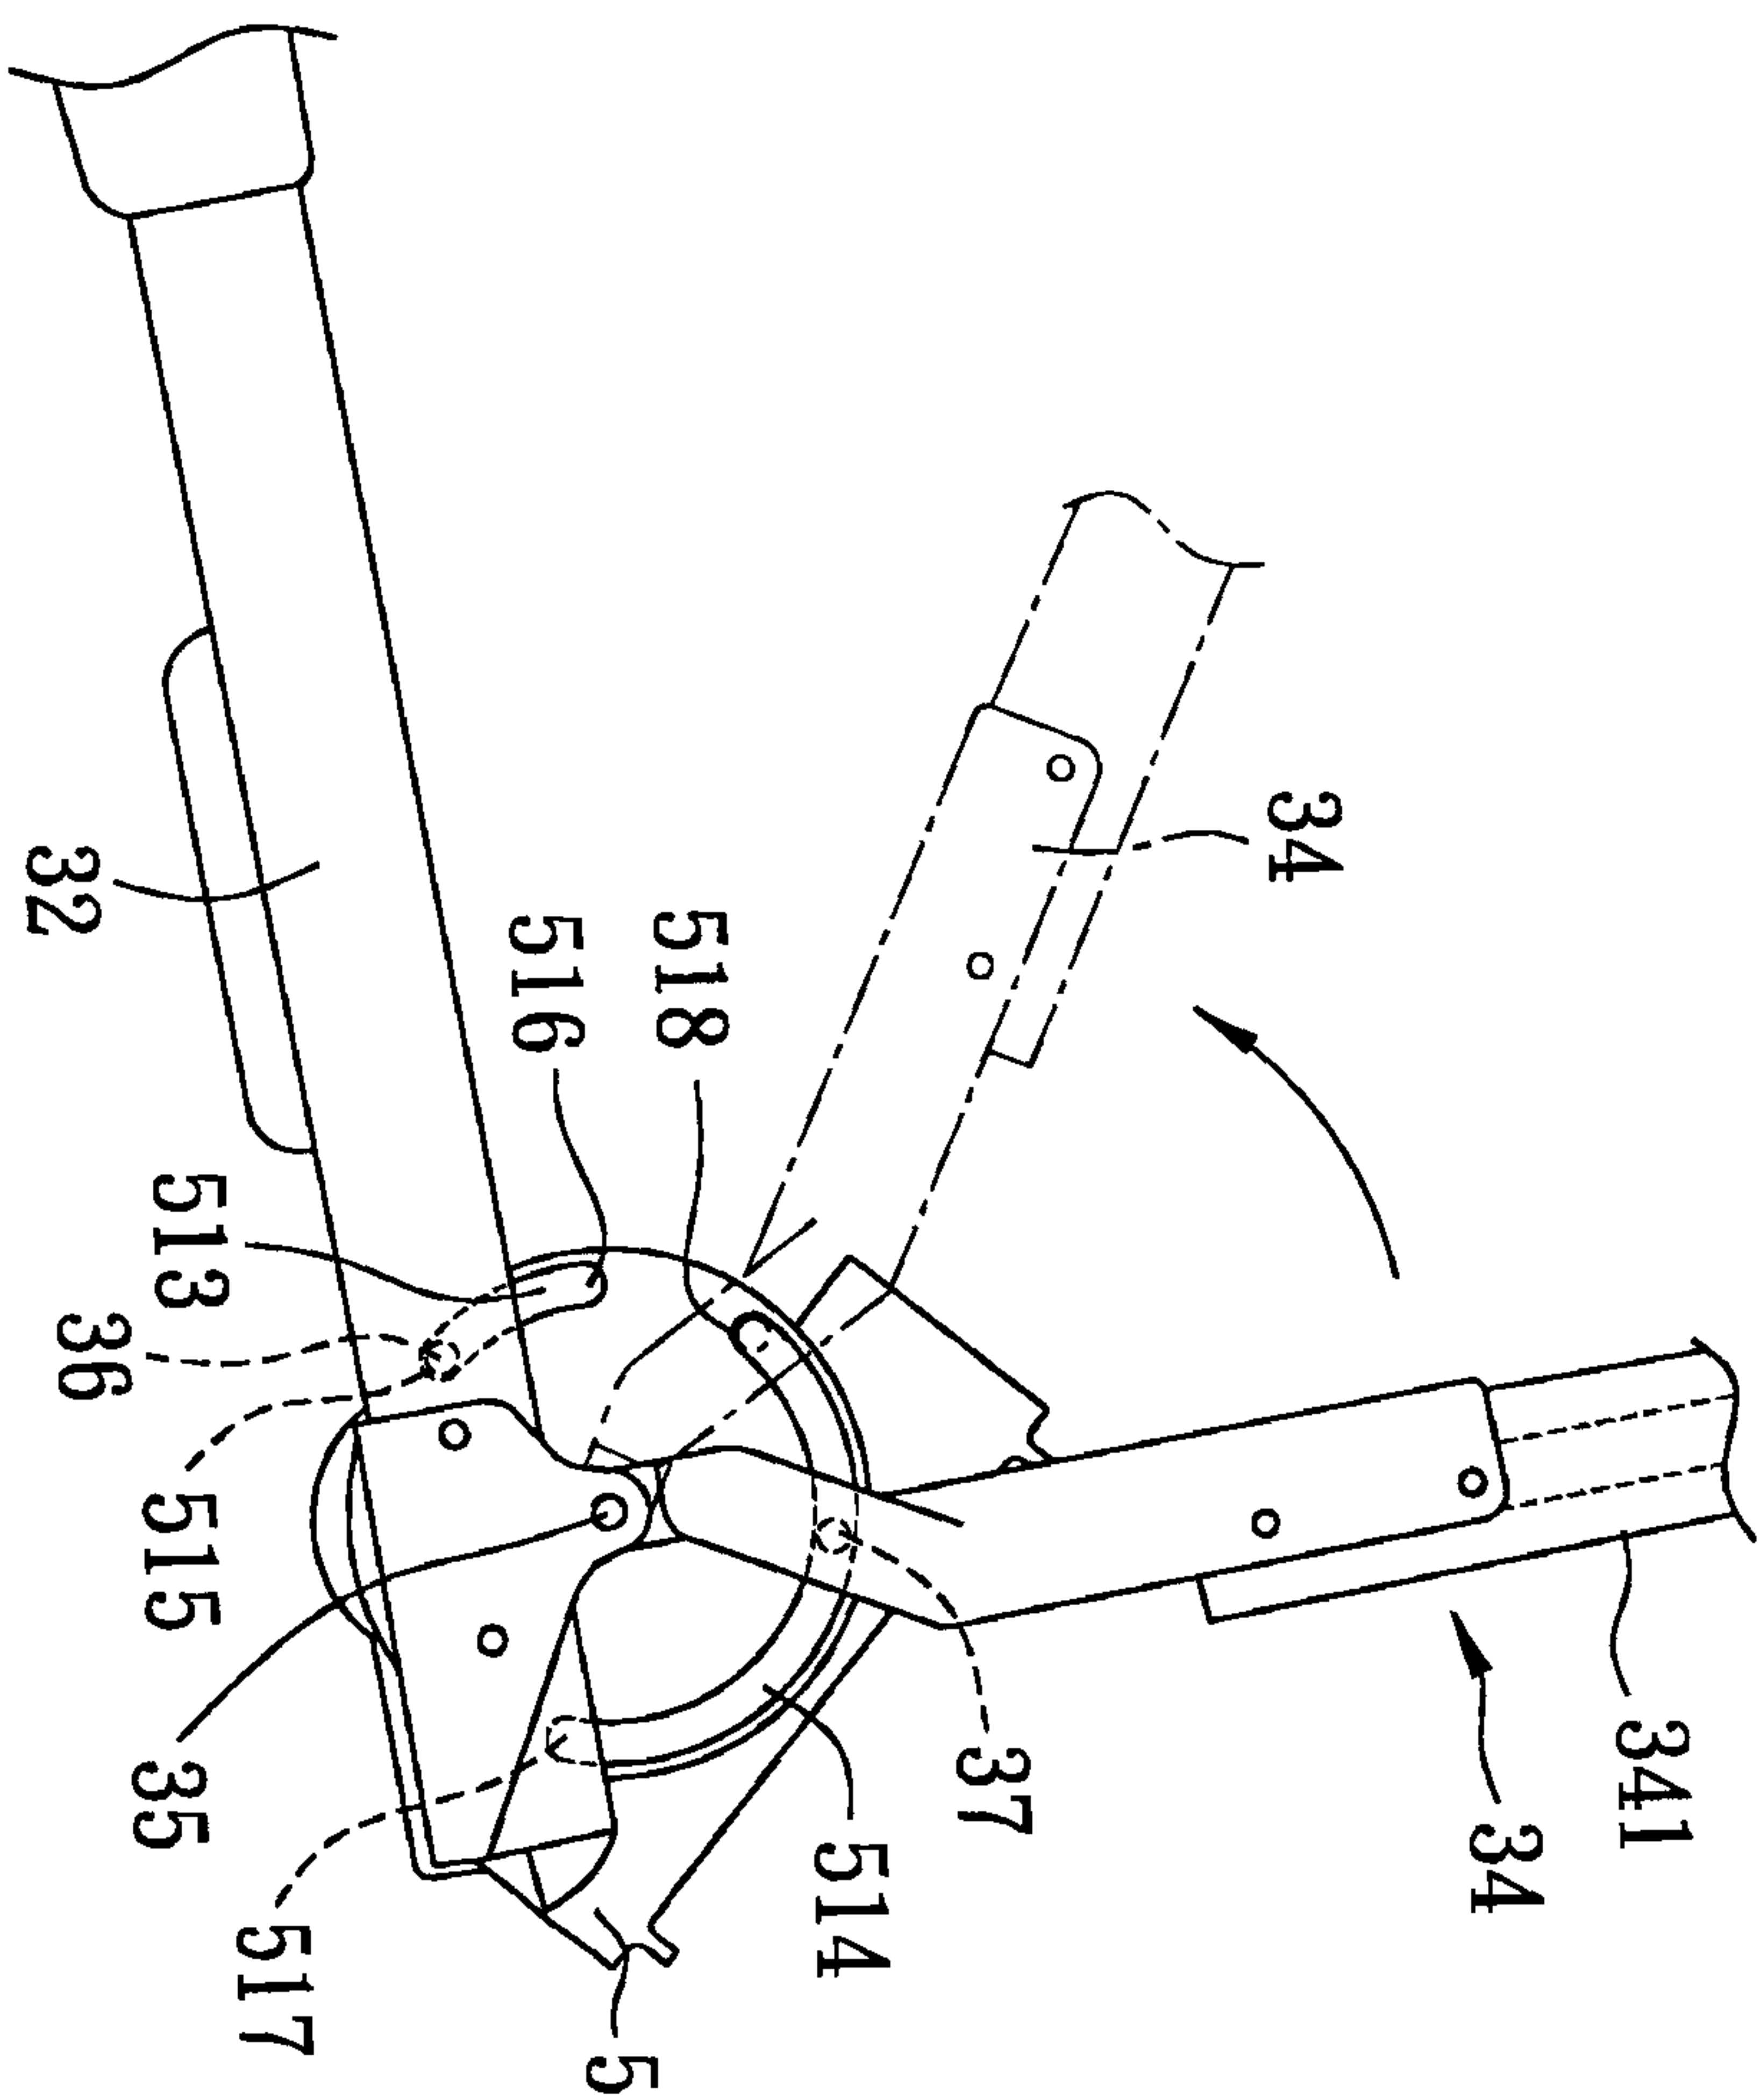


FIG. 4

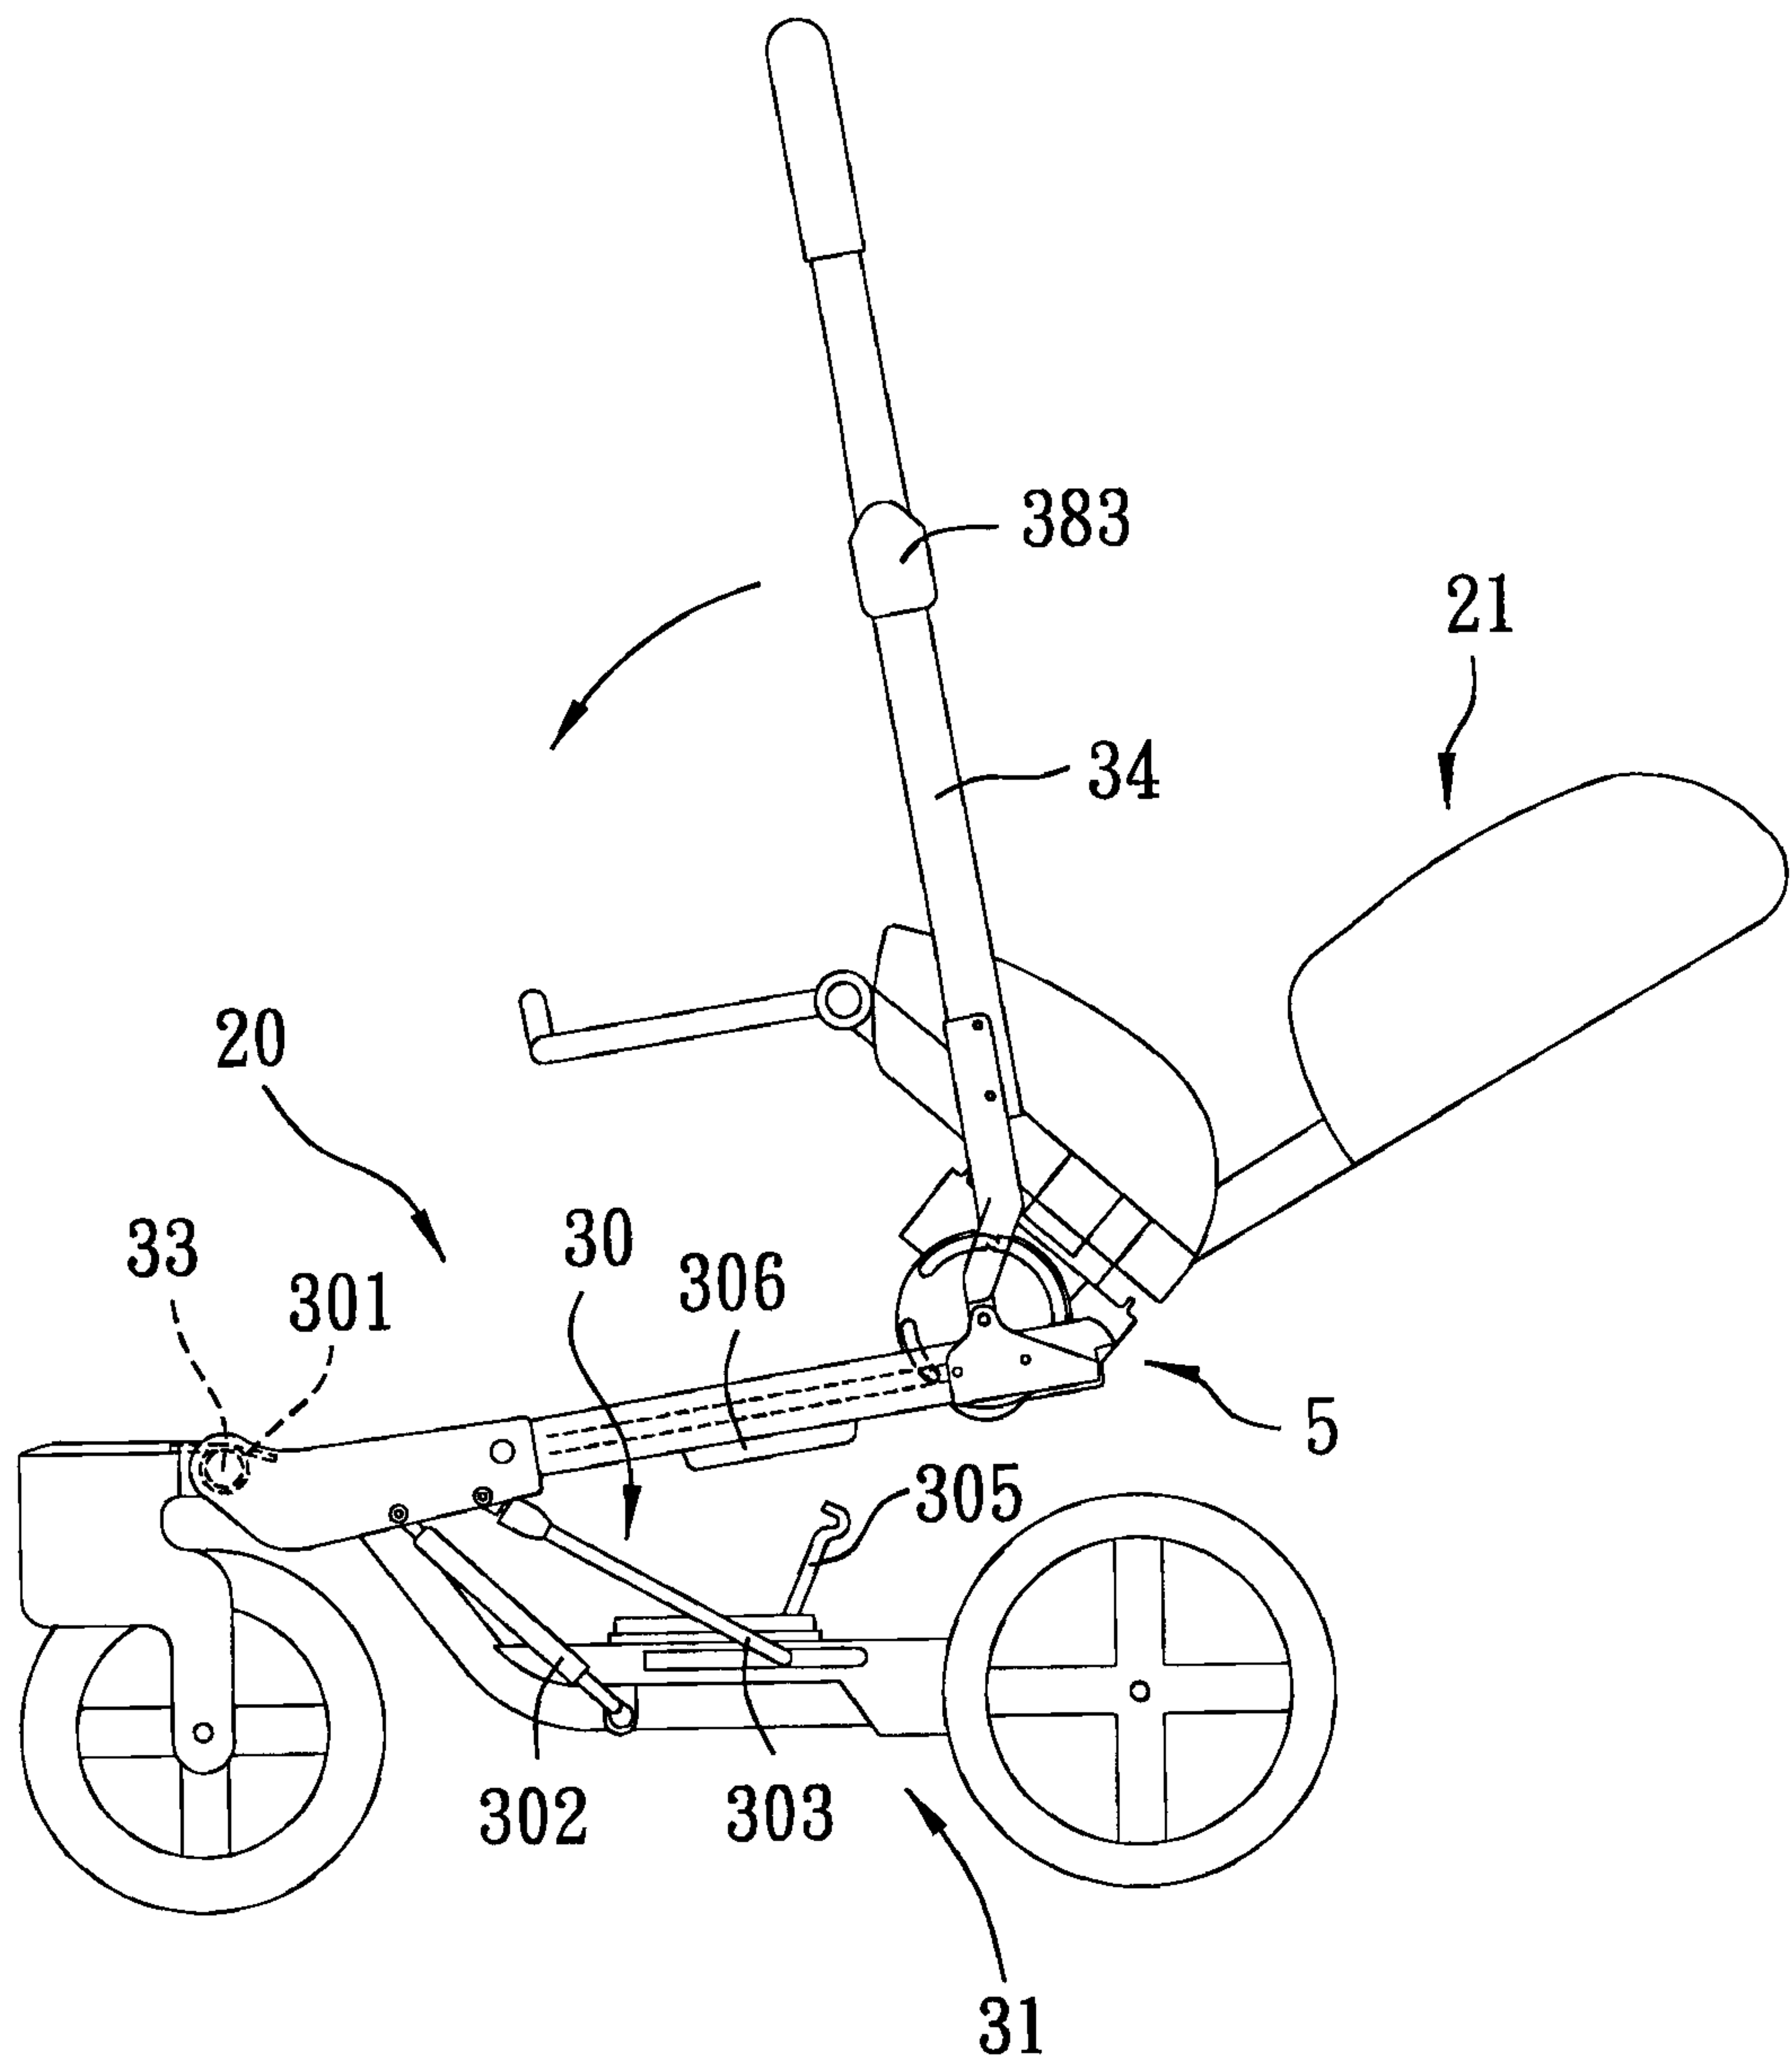


FIG. 5

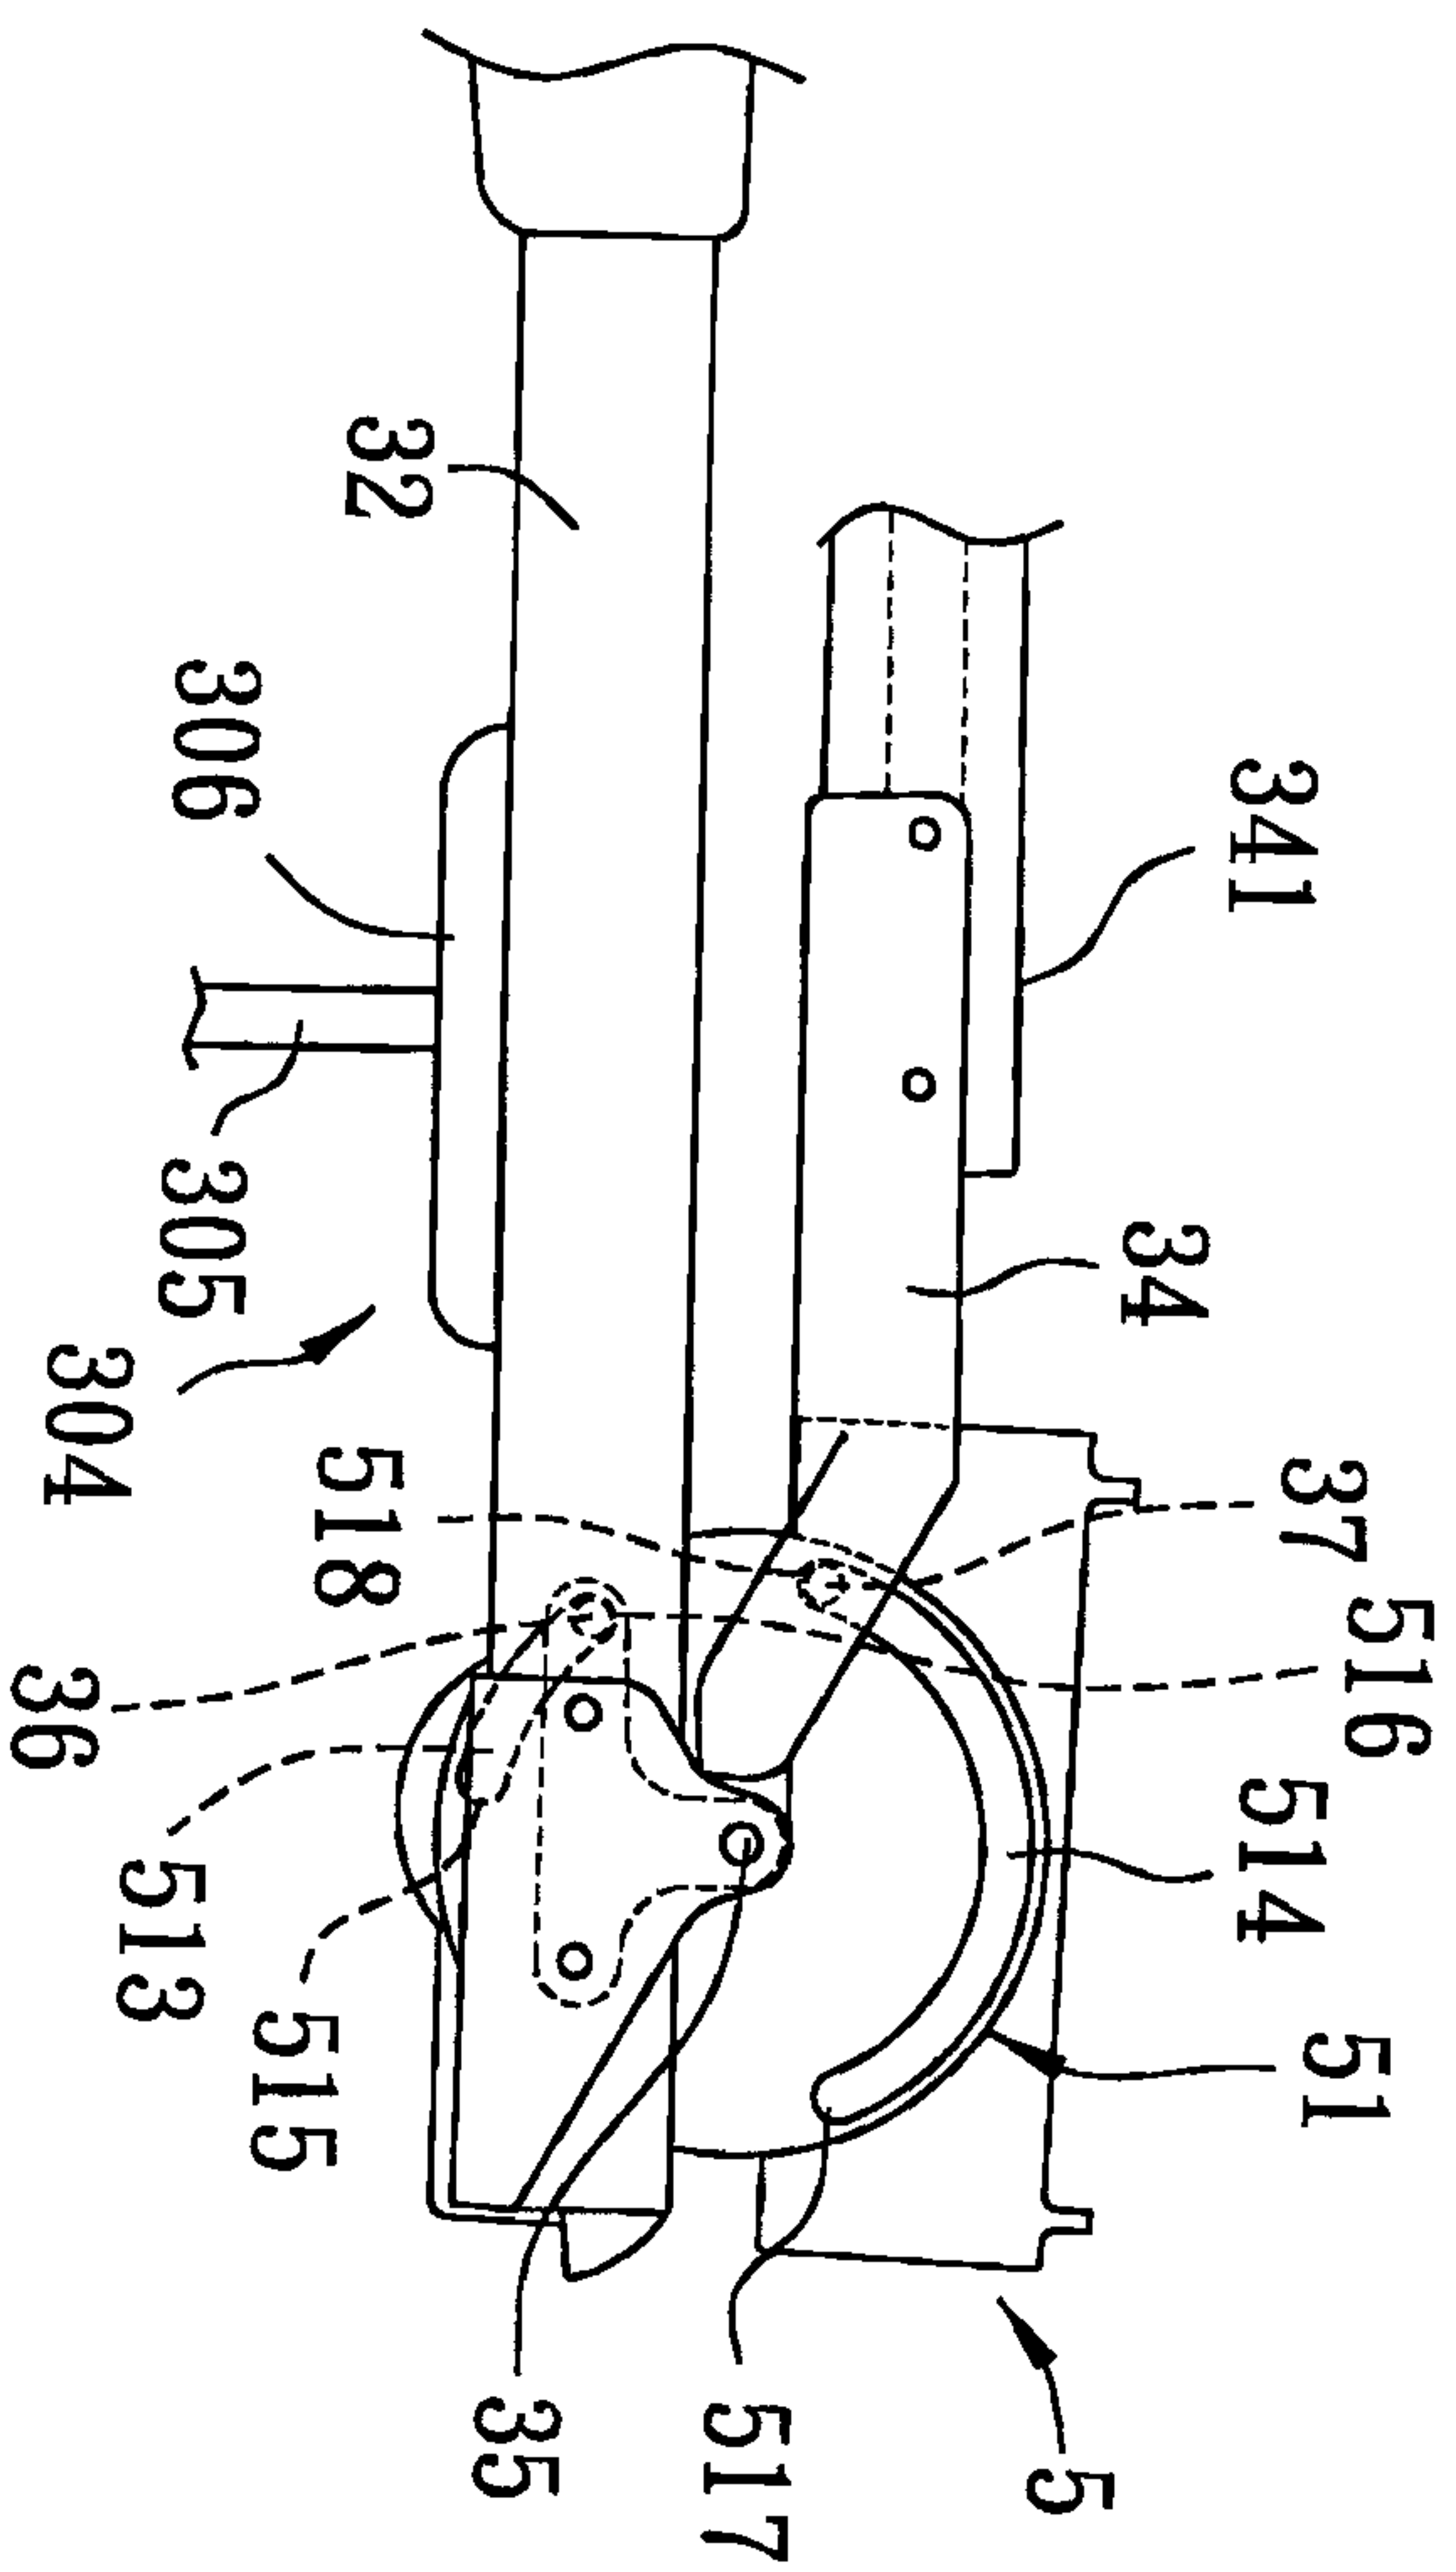


FIG. 6

