

(19)



(11)

EP 3 322 852 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:

29.05.2019 Bulletin 2019/22

(51) Int Cl.:

D21F 5/18 (2006.01)

(86) International application number:

PCT/EP2016/065969

(21) Application number: **16736124.5**

(22) Date of filing: **06.07.2016**

(87) International publication number:

WO 2017/009133 (19.01.2017 Gazette 2017/03)

(54) NOZZLE BOX FOR AIR-BORNE CONTINUOUS PAPER SHEET DRYING

DÜSENKASTEN FÜR LUFTGETRAGENE KONTINUIERLICHE PAPIERBAHNTROCKNUNG

**BOÎTE DE BUSE POUR SÉCHAGE D'UNE FEUILLE DE PAPIER CONTINUE EN SUSPENSION
DANS L'AIR**

(84) Designated Contracting States:

**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(72) Inventors:

- **EVEN, Nicolas**
59116 Houplines (FR)
- **FARINHA, James**
59270 Strazeele (FR)

(30) Priority: **16.07.2015 EP 15290187**

(43) Date of publication of application:

23.05.2018 Bulletin 2018/21

(74) Representative: **Cabinet Beau de Loménie**

**Immeuble Eurocentre
179 Boulevard de Turin
59777 Lille (FR)**

(73) Proprietor: **Solaronics S.A.**

59280 Armentières (FR)

(56) References cited:

WO-A1-2012/067573 DE-A1- 2 935 866
US-A- 3 823 488 US-B1- 6 598 315

EP 3 322 852 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

Technical Field

[0001] The invention relates to the technical field of nozzle boxes for continuous air-borne (or suspension) paper sheet drying equipment. The invention further relates to equipment for continuous air-borne drying of a paper or paper board sheet comprising such nozzle boxes; and to a method of operation of such equipment.

Background Art

[0002] Air-borne or (suspension) paper or paper board sheet drying by means of convective drying or via combined radiant and convective drying is known. The paper sheet, e.g. a coated paper sheet, is borne or suspended by hot air used for drying, without the lateral selvages of the paper sheet being mechanically held in the drying chamber. Such drying systems have to provide efficient drying and correct air-borne suspension of the paper sheet being transported through the drying system.

[0003] US3823488 discloses a suspension drier. The apparatus for full-width suspension guidance of a web of material on a fluid cushion includes a plurality of nozzle boxes located adjacent one another in a direction parallel to a plane in which a web of material is disposed. The nozzle boxes are formed with respective jet nozzles inclined transversely to the direction of travel of the web. Return flow channels are provided for removing fluid blown onto the web from the jet nozzles. The return flow channels are disposed alternately with the nozzle boxes in travel direction of the web. The return flow channels are open gaps defined by respective adjacent nozzle boxes. The inclined jet nozzles are disposed respectively at both sides of each of the return flow channels. The inclined nozzles can be slot nozzles or hole nozzles. The drying performance can be further increased if, in addition to the inclined jets, jets are also directed perpendicularly to the web of material and/or the opposing nozzle boxes.

[0004] US6598315B1 discloses a nozzle arrangement in an airborne web-drying apparatus for drying a coated paper web or the like. The nozzle arrangement comprises at least one overpressure nozzle, which is arranged to blow drying air both in the web's travel direction and against the web's travel direction. The nozzle arrangement comprises further a direct impingement nozzle combined with the exit side and/or the entrance side of the overpressure nozzle. In the direct impingement nozzle a plurality of nozzle slots or nozzle orifices are formed in order to blow drying air perpendicularly towards the web. The perpendicular distance from the nozzle surface of the direct impingement nozzle to the web is larger than the perpendicular distance from the supporting surface of the overpressure nozzle. Between successive nozzle arrangements in the direction of travel of the paper web, discharge passages are provided for the evacuation of

wet air. A succession of nozzle arrangements with in between discharge passages are provided both above and below the air-borne paper web. Because of the generated air flows, the paper web undulates in the direction of transport of the paper web.

Disclosure of Invention

[0005] It is an objective of the invention to disclose a nozzle box for use in continuous paper sheet or paper board drying equipment that results in more efficient paper drying. It is an objective of the invention to disclose convective drying equipment comprising such nozzle box or nozzle boxes, resulting in more efficient paper drying.

[0006] The first aspect of the invention is a nozzle box for blowing hot gas in the convective drying zone of equipment for the continuous drying of air-borne paper sheets, e.g. for the continuous drying of air-borne coated paper sheets. For the invention, the term "paper sheets" has to be understood as including paper board. Preferably the nozzle box is provided for installation across the width of the continuous drying equipment. The nozzle box comprises at least one direct impingement nozzle for ejecting a jet of hot gas perpendicular to the average plane of the paper sheet to be dried. The nozzle box comprises a plurality of inclined jet nozzles for ejecting jets of hot gas under an inclined angle with respect to the average plane of the paper sheet to be dried. With a plurality is meant at least two. The nozzle box comprises at least two inclined jet nozzles for which the plane comprising the vector representations of the jet directions of the at least two inclined jet nozzles does not comprise the vector representing the jet direction of a direct impingement nozzle. For this document, a vector indicates the direction in the three-dimensional space of the average jet of hot gas ejected by a nozzle. Where relevant, the magnitude of the vector equals the jet impulse of a nozzle when the nozzle is in use. The vector is to be considered independent from its origin, in the sense that vectors can be put at other origin points while maintaining their direction in the three-dimensional space. To evaluate whether or not three vectors (e.g. a vector representing the jet direction of an impingement nozzle and two vectors each representing the jet direction of one of two inclined jet nozzles) are within one plane, the three vectors are put in a same origin point and it is observed whether or not the three vectors when put in a same origin point are lying within one plane in the three-dimensional space.

[0007] Preferably, the nozzle box comprises a plurality of direct impingement nozzles for ejecting jets of hot gas perpendicular to the average plane of the paper sheet to be dried.

[0008] The nozzle box of the invention, when used in the convective drying zones in dryers for the continuous drying of air-borne paper sheets, has shown to result in more efficient drying compared to prior art nozzle boxes. The nozzle box provides the required combination of efficient drying, with correct suspension of the paper sheet

by the hot gasses ejected by the nozzles of the nozzle box, without the paper sheet being held nor guided at its lateral edges by mechanical systems such as chain or pin systems. The nozzle box provides high convective power density. Although the successful results with the inventive nozzle box are not fully understood, it is believed that the existence of turbulences in several directions increases the drying efficiency. Furthermore, more uniform drying of the air-borne paper sheets can be obtained.

[0009] Nozzles, whether direct impingement nozzles or inclined jet nozzles can e.g. be provided as circular holes (or orifices) in plate material or in cast metal, or as slots in plate material or in cast metal, or as frustoconical jet nozzles.

[0010] Preferably, the angles of the jet direction of the inclined jet nozzles with respect to the jet direction of the direct impingement nozzle or nozzles are between 20 and 75°, e.g. 30°.

[0011] In a preferred embodiment, inclined jet nozzles are provided as through holes or through slits in inclined surfaces in the nozzles box, wherein the through holes or through slits are perpendicular to the inclined surface.

[0012] Preferably, the nozzle box comprises a hot gas chamber. The hot gas chamber is provided for supplying the at least one direct impingement nozzle and the plurality of inclined jet nozzles with hot gas to be ejected by the impingement nozzles and by the inclined jet nozzles.

[0013] In a preferred embodiment, inclined jet nozzles are provided in nozzle heads that are mounted in the nozzle box. Preferably, the nozzle heads are mechanically mounted, e.g. by means of bolts or rivets in the nozzle box. More preferably, the nozzle heads are mechanically replaceably mounted in the nozzle box, so that the nozzle heads can be replaced in the nozzle box. Nozzle heads can e.g. comprise cast metal parts, with the nozzles provided in the nozzle heads e.g. by means of drilling or machining holes and/or slots.

[0014] Preferably, the nozzle box comprises at least 3 (and preferably at least 4, more preferably at least 5, more preferably at least 6, more preferably at least 7, more preferably at least 8, more preferably at least 9, more preferably at least 10, more preferably at least 11, more preferably at least 12 - e.g. 12) inclined jet nozzles, wherein each of the at least 3 (and preferably at least 4, more preferably at least 5, more preferably at least 6, more preferably at least 7, more preferably at least 8, more preferably at least 9, more preferably at least 10, more preferably at least 11, more preferably at least 12 - e.g. 12) inclined jet nozzles has a vector representing its jet direction when in use; wherein each of the vectors of the at least 3 (and preferably at least 4, more preferably at least 5, more preferably at least 6, more preferably at least 7, more preferably at least 8, more preferably at least 9, more preferably at least 10, more preferably at least 11, more preferably at least 12 - e.g. 12) inclined nozzles have a different direction in the three-dimensional space.

[0015] In a preferred embodiment, the inclined jet nozzles comprise or consist out of a first set of inclined jet nozzles and a second set of inclined jet nozzles. The first set of inclined jet nozzles are provided for blowing in a first direction; and the second set of inclined jet nozzles are provided for blowing in a second direction. The first direction is perpendicular to the second direction. Preferably, the first direction is - when the nozzle box is installed in the convective drying zone of equipment for the continuous drying of air-borne paper sheets - in the direction of transport of the paper sheet. And preferably the second direction is - when the nozzle box is installed in the convective drying zone of equipment for the continuous drying of air-borne paper sheets - in the direction transverse to the direction of transport of the paper sheet to be dried.

[0016] More preferably, the inclined jet nozzles comprise a third set of inclined jet nozzles and a fourth set of inclined jet nozzles. The third set of inclined jet nozzles are provided for blowing in a third direction and the fourth set of inclined jet nozzles are provided for blowing in a fourth direction. Preferably, the included angle between the first direction and the third direction is 180°; and the included angle between the second direction and the fourth direction is 180°.

[0017] Preferably, the nozzle box comprises suction openings for the evacuation of gas. The nozzle box can e.g. comprise round suction openings and/or slit-shaped suction openings for the evacuation of gas.

[0018] A preferred nozzle box comprises a plurality of nozzle units over the nozzle box. Each of the units comprise

- at least one - and preferably a plurality of - direct impingement nozzle for ejecting a jet of hot gas perpendicular to the average plane of the paper sheet to be dried; and
- a plurality of inclined jet nozzles, wherein inclined jet nozzles are provided for ejecting jets of hot gas under an inclined angle with respect to the average plane of the paper sheet to be dried.

[0019] At least two inclined jet nozzles of the nozzle unit are provided for which the plane comprising the vector representation of the jet directions of the at least two inclined jet nozzles does not comprise the vector representing the jet direction of a direct impingement nozzle of the nozzle unit. Preferably, nozzle units are provided as nozzle heads mounted in the nozzle box. Preferably, nozzle heads are mechanically mounted in the nozzle box, e.g. using bolts or rivets. Even more preferably, nozzle heads are mounted in a mechanically replaceable manner in the nozzle box, e.g. by means of bolts. Preferably, suction openings for the evacuation of gas are provided in the nozzle box between nozzle units. More preferably, round suction openings and/or slit-shaped suction openings for the evacuation of gas can be provided in the nozzle box between nozzle units; wherein

nozzle units can be present as nozzle heads.

[0020] Preferably, when nozzle units and/or nozzle heads are used, the nozzle units or the nozzle heads comprise a hot gas chamber. The hot gas chamber is provided for supplying the at least one direct impingement nozzle and the plurality of inclined jet nozzles with hot gas to be ejected by the direct impingement nozzles and by the inclined jet nozzles. Means, e.g. tubes or pipes, are provided in the nozzle box to supply hot gas to the hot gas chambers. More preferably a hot gas chamber in the nozzle box is arranged to provide hot gas to the hot gas chambers of each of the multiple of nozzle units. The nozzle units can be present as nozzle heads. Nozzle heads can e.g. comprise cast metal parts, with the nozzles provided in the nozzle heads e.g. by means of drilling or machining holes and/or slots.

[0021] Preferably, the nozzle units of the nozzle box have identical nozzle configurations. The nozzle units can be present as nozzle heads.

[0022] In preferred embodiments, sharp angles of nozzle units or nozzle heads are avoided in order to prevent the risk of damaging the paper in case of unplanned contacts.

[0023] In a preferred embodiment, nozzle units are linearly aligned on the nozzle box, preferably such that when installed in a drying apparatus, the nozzle units are provided linearly aligned over the width of the drying equipment.

[0024] In a preferred embodiment, nozzle units are provided staggered over the nozzle box, preferably such that when installed in a drying apparatus, the nozzle units are provided staggered over the width of the drying apparatus. In an exemplary embodiment, the first, third, fifth nozzle unit in a nozzle box are linearly aligned; and the second nozzle unit is staggered between the first and third nozzle unit; the fourth nozzle unit is staggered between the third and the fifth nozzle unit. The even numbered nozzle units are linearly aligned; and the odd numbered nozzle units are linearly aligned, but each in a staggered position compared to the even numbered nozzle units. Preferably, at least part of the nozzle units comprise inclined jet nozzles for which the jet direction is oriented towards spaces in between the nozzle units. Preferably in such an embodiment, the even numbered nozzle units comprise inclined jet nozzles for blowing into the direction of the space between the even numbered nozzles. And preferably in such an embodiment, the odd numbered nozzle units comprise inclined jet nozzles for blowing into the direction of the space between the odd numbered nozzles.

[0025] In a preferred embodiment, the nozzle unit comprises at least 3 (and preferably at least 4, more preferably at least 5, more preferably at least 6, more preferably at least 7, more preferably at least 8, more preferably at least 9, more preferably at least 10; more preferably at least 11, more preferably at least 12 - e.g. 12) inclined jet nozzles, wherein each of the at least 3 (and preferably at least 4, more preferably at least 5, more preferably at

least 6, more preferably at least 7, more preferably at least 8, more preferably at least 9, more preferably at least 10, more preferably at least 11, more preferably at least 12 - e.g. 12) inclined jet nozzles has a vector representing its jet direction when in use; wherein each of the vectors of the at least 3 (and preferably at least 4, more preferably at least 5, more preferably at least 6, more preferably at least 7, more preferably at least 8, more preferably at least 9, more preferably at least 10, more preferably at least 11, more preferably at least 12 - e.g. 12) inclined jet nozzles have a different direction in the three-dimensional space.

[0026] When nozzle units are present as nozzle heads, preferably, the nozzle head comprises a hot gas chamber. The hot gas chamber is provided for supplying the at least one direct impingement nozzle and the plurality of inclined jet nozzles with hot gas to be ejected by the impingement nozzles and by the inclined jet nozzles. Means, e.g. tubes or pipes, are provided in the nozzle box to supply hot gas to the hot gas chambers of the nozzle heads. More preferably, the nozzle head comprises a metal body, wherein the metal body at least partly encompasses the hot gas chamber. Even more preferably, the nozzle head is fully made out of metal.

[0027] When nozzle units are present as nozzle heads, preferably, the nozzle head comprises a body out of cast metal. Preferably the impingement nozzles and/or the inclined jet nozzles are provided as drilled or machined holes and/or slots in the body. Preferably the body at least partly encompasses a hot gas chamber in the nozzle head.

[0028] In a preferred nozzle box comprising nozzle units (and possibly wherein the nozzle units are present as nozzle heads), the at least one direct impingement nozzles are provided in the central section of the nozzle unit; and the inclined jet nozzles surround the at least one direct impingement nozzles.

[0029] In a preferred embodiment, at least part of - and more preferably all - the inclined jet nozzles surrounding the at least one direct impingement nozzles are provided for blowing inwards towards the at least one direct impingement nozzle.

[0030] In a preferred embodiment, a first part of the inclined jet nozzles surrounding the at least one direct impingement nozzles are provided for blowing inwards towards the at least one direct impingement nozzle. A second part of the inclined jet nozzles surrounding the at least one direct impingement nozzles are provided for blowing in the direction away from the at least one direct impingement nozzle.

[0031] In a preferred embodiment, the inclined jet nozzles within a nozzle unit are provided so that when the inclined jet nozzles are in operation, the hot gas jets of the inclined jet nozzles are present in equi-angularly distributed planes perpendicular to the nozzle box.

[0032] In a preferred embodiment the nozzle box comprises suction openings for the evacuation of gas and the nozzle box comprises a plurality of nozzle units over

the nozzle box. Preferably, suction openings for the evacuation of gas are provided in the nozzle box between nozzle units.

[0033] In a preferred embodiment, where nozzle units are provided staggered over the nozzle box, such that when installed in a drying apparatus, the nozzle units are provided staggered over the width of the drying apparatus, suction openings or groups of suction openings are also staggered over the nozzle box, alternating with nozzle units.

[0034] In a preferred embodiment, the nozzle box comprises a plurality of nozzle heads. Each of the nozzle heads comprises a plurality of, e.g. four, direct impingement nozzles for ejecting a jet of hot gas perpendicular to the average plane of the paper sheet to be dried. The direct impingement nozzles are preferably provided such that some lines in the direction of the nozzle box that coincide with the width direction of the paper sheet to be dried cross only one direct impingement nozzle of a nozzle head, while other lines in the direction of the nozzle box that coincide with the width direction of the paper sheet to be dried cross two direct impingement nozzles of that same nozzle head, and while other lines in the direction of the nozzle box that coincide with the width direction of the paper sheet to be dried cross no direct impingement nozzles of that same nozzle head. Such arrangement of the direct impingement nozzles has shown to provide better uniformity of heat transfer by the direct impingement nozzles to the paper sheet to be dried.

[0035] Preferably, each of the nozzle heads comprises one or more than one series of inclined jet nozzles, wherein each of the series of inclined jet nozzles comprises a number of inclined jet nozzles provided on a straight line. More preferably, at least one series of inclined jet nozzles, and e.g. two series inclined jet nozzles are aligned on a line in the direction of the nozzle box that coincides with the width direction of the paper to be dried. In a more preferred embodiment, two series of inclined jet nozzles are aligned on a line in the direction of the nozzle box that coincides with the width direction of the paper to be dried; of which one series of inclined jet nozzles is provided for blowing in the direction of movement of the paper sheet to be dried; and the other series of inclined jet nozzles is provided for blowing in the direction opposite to the direction of movement of the paper sheet to be dried. More preferably, the nozzle head comprises in addition at least one series, and e.g. two series, of inclined jet nozzles that are aligned on lines that make an angle between 10 and 80 degrees with the direction of the nozzle box that coincides with the width direction of the paper sheet to be dried.

[0036] The second aspect of the invention is an equipment for continuous air-borne drying of a paper sheet, e.g. of a coated paper sheet, e.g. of paper board, e.g. of coated paper board. The equipment comprises a nozzle box as in the first aspect of the invention. The nozzle box spans the width available in the equipment for the trans-

port of the paper sheet. Preferably, nozzle units are provided in the nozzle box across the width available in the equipment for the transport of the paper sheet, so that the nozzles in nozzle units, e.g. in nozzle heads, in the nozzle box can address the full width of paper sheet to be dried.

[0037] Preferably, the equipment comprises more than one nozzle box as in the first aspect of the invention. Preferably, a first set of nozzle boxes as in the first aspect of the invention is provided above the plane available for transport of the paper sheet; and a second set of nozzle boxes according to the first aspect of the invention is provided below the plane available for the transport of the paper sheet.

[0038] Preferred equipment comprises rows of infrared emitters, e.g. premix gas fired infrared emitters, and nozzle boxes as in the first aspect of the invention in between rows or combinations of rows of infrared emitters.

[0039] Preferred equipment comprises one or a plurality of nozzle boxes. Means are provided for suction of hot gas through suction openings - e.g. round suction openings or slit shaped suction openings - in the nozzle boxes (e.g. between nozzle units or between nozzle heads) and/or between nozzle boxes. Means are provided to collect the sucked gas into piping. Preferably, piping is provided to evacuate part of the sucked gas out of the equipment. Means are provided for the supply of fresh air into the equipment, wherein the freshly supplied air is mixed with sucked gas. Piping is provided to recirculate at least part of the sucked gas back, together with the freshly supplied air, to the one or to the plurality of nozzle boxes for being blown onto the paper sheet to be dried by the direct impingement nozzles and by the inclined jet nozzles of the nozzles boxes. Means are provided to heat the mixture of sucked gas and freshly supplied air before it is supplied to the nozzle box(es). Such means can e.g. be a heat exchanger or a gas burner. Such gas burner can be provided such that the combustion gas of the gas burner is added to the mixture of sucked gas and freshly supplied air. Means (e.g. dampers) are provided in the piping to control the flows of the gases.

[0040] In a preferred embodiment, the equipment comprises suction openings for the evacuation of gas. In a preferred embodiment, the equipment comprises in the direction of movement of the paper sheet, a number of nozzle boxes; and between nozzle boxes, gas fired infrared emitters. Suction openings are preferably positioned between a nozzle box and gas fired infrared emitters.

[0041] In preferred equipment, one or more than one nozzle boxes are provided such that the vector sum of the vectors representing the jet direction and having as magnitude the jet impulse of the inclined jet nozzles of the nozzle box points in the opposite direction of the direction of transport of the paper sheet through the drying equipment.

[0042] Preferred equipment comprises a multiple number of nozzle boxes as in the first aspect of the in-

vention. At least two consecutive nozzle boxes comprise nozzle units that are staggered when comparing the positions of the nozzle units in the first nozzle box of the two consecutive nozzle boxes with the positions of the nozzle units in the second nozzle box of the two consecutive nozzle boxes. Preferably, a range of infrared emitters - more preferably gas fired infrared emitters - is positioned between the two consecutive nozzle boxes. Even more preferred is when between a nozzle box and a range of infrared emitters, suction openings are provided for the evacuation of gas.

[0043] The third aspect of the invention is a method for continuous drying of a paper sheet (e.g. a coated paper sheet, e.g. a paper board, wherein equipment for continuous drying is used as in the second aspect of the invention. The method comprises the step of transporting a paper sheet, e.g. a coated paper sheet, through the equipment in order to dry the paper sheet in the equipment for continuous drying. The paper sheet is air-borne in the equipment without the selvedge of the paper sheet being held by mechanical means. The paper sheet undulates in the direction of transport of the paper sheet through the drying equipment. And the paper sheet undulates in the direction perpendicular to the direction of transport of the paper sheet through the drying equipment. Preferably, the speed of the paper sheet transported through the drying equipment is at least 50 m/min, more preferably at least 150 m/min, more preferably is at least 300 m/min, and preferably more than 500 m/min. Preferred ranges are between 300 and 2500 m/min, more preferred ranges are between 500 and 1500 m/min.

[0044] In a preferred method, the vector sum of the vectors representing the jet direction and having as magnitude the jet impulse of the inclined jet nozzles of the nozzle box, points in the opposite direction of the direction of transport of the paper sheet through the drying equipment.

[0045] Preferably, the mass per unit of time of hot gas ejected by the inclined jet nozzles of a flow box in the direction opposite to the movement of the paper sheet is more than 10% higher than the mass per unit of time of hot gas ejected by the inclined jet nozzles of the flow box in the direction of the movement of the paper sheet; and more preferably more than 20% higher, more preferably more than 50% higher, more preferably more than 75% higher, even more preferably more than 100% higher. Preferably, the mass per unit of time of hot gas ejected by the inclined jet nozzles of a nozzle box in the direction opposite to the movement of the paper sheet is less than 150% higher than the mass per unit of time of hot gas ejected by the inclined jet nozzles of the nozzle box in the direction of the movement of the paper sheet.

Brief Description of Figures in the Drawings

[0046]

Figure 1 shows an example of a nozzle box as in the

first aspect of the invention.

Figures 2 and 3 respectively show the front and back view of a nozzle head that can be used in the invention.

Figure 4 shows an example of a nozzle box as in the first aspect of the invention.

Figure 5 shows yet another example of a nozzle box as in the first aspect of the invention.

Figure 6 shows the section in paper transport direction; and figure 7 shows a cross section in the traverse direction of an example of equipment for the continuous air-borne drying of a paper sheet comprising nozzle boxes as in the first aspect of the invention.

Figure 8 shows the vectors representing the jets of the inclined jet nozzles of one of the nozzle boxes of the equipment of figure 6 and 7.

Figure 9 shows another example of a nozzle box as in the first aspect of the invention.

Figure 10 shows an embodiment of equipment for continuous air-borne drying of a paper sheet according to the second aspect of the invention.

Figure 11 shows an embodiment of a nozzle box as in the first aspect of the invention.

Figure 12 shows air dryer equipment according to the second aspect of the invention.

Mode(s) for Carrying Out the Invention

[0047] Figure 1 shows an example of a nozzle box 100 as in the first aspect of the invention. The nozzle box 100 is provided for blowing hot gas in the convective drying zone of equipment for the continuous drying of air-borne paper sheets (including paper board), e.g. for the continuous drying of air-borne coated paper sheets; and is provided for installation across the width of the continuous drying equipment. The nozzle box 100 comprises a plurality of nozzle units 105 over the nozzle box. In the example, the nozzle units 105 are nozzle heads 105, that are removably mounted by means of a bolt 107 and nut onto the nozzle box 100. It is also possible that the nozzle units are integrally formed out of the material of the nozzle box. In the example - although not necessarily for the invention, all nozzle heads of the nozzle box have identical nozzle configurations. The nozzle heads 105 are provided staggered over the nozzle box, such that when installed in a drying apparatus, the nozzle units are provided staggered over the width of the drying apparatus. In the example, the first, third, fifth nozzle unit in the nozzle box are linearly aligned; and the second nozzle unit is staggered between the first and third nozzle unit; the fourth nozzle unit is staggered between the third and the fifth nozzle unit. The even numbered nozzle units are linearly aligned; and the odd numbered nozzle units are linearly aligned, but each in a staggered position compared to the even numbered nozzle units. The nozzle units comprise inclined jet nozzles for which the jet direction is oriented towards spaces in between the nozzle

units. The even numbered nozzle units comprise inclined jets for blowing into the direction of the space between the even numbered nozzles. The odd numbered nozzle units comprise inclined jets for blowing into the direction of the space between the odd numbered nozzles.

[0048] Other arrangements of the nozzle units or nozzle heads in the nozzle box are possible however, e.g. the nozzle units or nozzle heads can be linearly aligned on the nozzle box, e.g. such that when installed in a drying apparatus, the nozzle units are provided linearly aligned over the width of the drying apparatus.

[0049] Figures 2 and 3 respectively show the front (figure 2) and back (figure 3) view of a nozzle head 105 used in the exemplary nozzle box 100 of figure 1. The nozzle head 105 comprises a drilled hole 103 that allows mounting the nozzle head by means of a bolt and nut replaceably into a nozzle box. The nozzle head 105 comprises four direct impingement nozzles 108 for ejecting a jet of hot gas perpendicular to the average plane of the paper sheet to be dried. The nozzle head 105 comprises twelve inclined jet nozzles 109, 110, 111, 112, provided for ejecting jets of hot gas under an inclined angle with respect to the average plane of the paper sheet to be dried. Inclined jet nozzles 109 and 111 are provided for which the plane comprising the vector representation of the jet directions of the inclined jet nozzles 109 and 111 does not comprise the vector representing the jet direction of the direct impingement nozzles 108 of the nozzle unit. On the other hand, the plane formed by the vector representations of the jet directions of the inclined jet nozzles 111 and 112 comprises the vector representing the jet direction of the direct impingement nozzles 108 of the nozzle unit. In the nozzle box head 105, although not necessary for the invention, the direct impingement nozzles 108 are provided in the central section of the nozzle head 105. The inclined jet nozzles 109, 110, 111, 112 surround the direct impingement nozzles 108. Inclined jet nozzles 109 and 110 are provided for blowing inwards towards the direct impingement nozzles 108. The inclined jet nozzles 109, 110, 111, 112 surround the direct impingement nozzles 108. Inclined jet nozzles 111 and 112 are provided for blowing in the direction away from the direct impingement nozzles 108.

[0050] At the inside of the nozzle head 105, a hot gas chamber 122 is provided (see figure 3). The hot gas chamber is provided for supplying the at least one direct impingement nozzle and the plurality of inclined jet nozzles with hot gas to be ejected by the impingement nozzles and by the inclined jet nozzles. A hot gas chamber in the nozzle box is arranged to provide hot gas to the air chambers of each of the multiple of nozzle heads.

[0051] Optionally, suction openings 125 for the evacuation of gas can be provided in the nozzle box 100 between nozzle heads 105 (see figure 1).

[0052] Figure 4 shows another example of a nozzle box 100 as in the first aspect of the invention. The nozzle box 100 is provided for blowing hot gas in the convective drying zone of equipment for the continuous drying of air-

borne paper sheets, e.g. for the continuous drying of air-borne coated paper sheets; and is provided for installation across the width of the continuous drying equipment. The nozzle box 100 comprises a plurality of nozzle units 105 over the nozzle box. In the example, the nozzle units 106 are nozzle heads 106, that are removably mounted by means of a bolt 107 and nut onto the nozzle box 100. It is also possible that the nozzle units are integrally formed out of the material of the nozzle box. In the example - although not necessarily for the invention, all nozzle heads of the nozzle box have identical nozzle configurations. The nozzle heads 106 are provided staggered over the nozzle box, such that when installed in a drying apparatus, the nozzle units are provided staggered over the width of the drying apparatus. Other arrangements of the nozzle units or nozzle heads in the nozzle box are possible however, e.g. the nozzle units or nozzle heads can be linearly aligned on the nozzle box, e.g. such that when installed in a drying apparatus, the nozzle units are provided linearly aligned over the width of the drying apparatus.

[0053] The nozzle heads 106 comprise direct impingement nozzles 108 for ejecting a jet of hot gas perpendicular to the average plane of the paper sheet to be dried. Each nozzle head 106 comprises twelve inclined jet nozzles 114, provided for ejecting jets of hot gas under an inclined angle with respect to the average plane of the paper sheet to be dried. In the nozzle box head 106, although not necessary for the invention, the direct impingement nozzles 108 are provided in the central section of the nozzle head 106. The inclined jet nozzles 114 surround the direct impingement nozzles 108. The inclined jet nozzles 114 are provided so that when the inclined jet nozzles 114 are in operation, the jets of the inclined jet nozzles 114 are present in equi-angularly distributed planes perpendicular to the nozzle box 100. Each of the twelve inclined jet nozzles 114 has a vector representing its jet direction when in use; wherein each of the vectors of the twelve inclined jet nozzles 114 has a different direction in the three-dimensional space.

[0054] At the inside of the nozzle head 106, a hot gas chamber is provided. The hot gas chamber is provided for supplying the at least one direct impingement nozzle and the plurality of inclined jet nozzles with hot gas to be ejected by the impingement nozzles and by the inclined jet nozzles. A hot gas chamber in the nozzle box is arranged to provide hot gas to the air chambers of each of the multiple of nozzle heads.

[0055] Optionally, suction openings for the evacuation of gas can be provided in the nozzle box 100 between nozzle heads 106. Alternatively, in the drying equipment specific suction boxes can be mounted aligned with the nozzle box or nozzle boxes.

[0056] Figure 5 shows yet another example of a nozzle box 100 as in the first aspect of the invention. The nozzle box 100 comprises nozzle units 105 that are linearly aligned on the nozzle box, such that when installed in a drying apparatus, the nozzle units 105 are provided lin-

early aligned over the width of drying apparatus. Optionally, the nozzle box is provided with suction units 125 in between nozzle units.

[0057] Figure 6 shows the section 600 in paper transport direction; and figure 7 shows a cross section 700 in the traverse direction of an example of equipment for the continuous air-borne drying of a paper sheet (e.g. a coated paper sheet) comprising a plurality of nozzle boxes 670, 770 as in the first aspect of the invention (e.g. as shown in the examples of figures 1 or figure 4). The nozzle boxes 670 span the width available in the equipment for the transport of the paper sheet 650, 750. The nozzle boxes 770 are mounted laterally in support structures 772. In the example, a first set of nozzle boxes as in the first aspect of the invention is provided above the plane available for transport of the paper sheet; and a second set of nozzle boxes according to the first aspect of the invention is provided below the plane available for the transport of the paper sheet. The coated paper sheet 650 moves through the equipment in the direction indicated by arrow 660. Although not necessary, the equipment comprises rows of infrared emitters 680, e.g. premix gas fired infrared emitters, in between nozzle boxes 670.

[0058] The paper sheet 650, 750 is air-borne in the equipment without the selvedge of the paper sheet being held by mechanical means. The paper sheet 650, 750 undulates in the direction of transport of the paper sheet through the drying equipment. And the paper sheet 650, 750 undulates in the direction perpendicular to the direction of transport of the paper sheet through the drying equipment.

[0059] Figure 8 shows the vectors representing the jets of the inclined jet nozzles of one of the nozzle boxes of the equipment of figure 6 and 7. Arrow 860 shows the direction of transport of the paper sheet through the drying equipment. Vector V_1 represents the sum of the vectors of the inclined jet nozzles of one nozzle box that have a jet component in the direction of transport of the paper sheet through the equipment; vector V_2 represents the sum of the vectors of the inclined jet nozzles of the same nozzle box that have a jet component in the direction opposite to the direction of transport of the paper sheet through the equipment. Vector V_s is the sum of vectors V_1 and V_2 and has a component in the direction opposite to the direction of transport of the paper sheet through the drying equipment.

[0060] Figure 9 shows another example of a nozzle box 900 according to the first aspect of the invention. The nozzle box 900 is provided for blowing hot gas in the convective drying zone of equipment for the continuous drying of air-borne paper sheets, the direction of movement of the paper sheet with respect to the nozzle box 900 is indicated by arrow 960. The nozzle box 900 comprises a plurality of nozzle units 905 over the nozzle box. The nozzle units 905 are nozzle heads 905 which are removably mounted by means of a bolt 907 and nut onto the nozzle box 900. The nozzle heads 905 are provided staggered over the nozzle box, such that when installed

in a drying apparatus, the nozzle units are provided staggered over the width of the drying apparatus. Each nozzle head 905 comprises two direct impingement nozzles 908 for ejecting hot gas perpendicular to the average plane of the paper sheet to be dried. The nozzle head 905 comprises inclined jet nozzles 909, 911, 912, provided for ejecting jets of hot gas under an inclined angle with respect to the average plane of the paper sheet to be dried. Inclined jet nozzles 909 are provided for ejecting hot gas jets in the transverse direction of the direction of movement of the paper sheet; vectors 995 and 997 show the direction of the ejection of the jets by the inclined jet nozzles 909. Four inclined jet nozzles 911 are provided for ejecting jets in the direction indicated by arrows 991; which is a direction opposite to the direction of movement of the paper. Two inclined jet nozzles 912 blow in the direction indicated respectively by arrow 993 and 994, which make acute angles with the direction of movement of the paper sheet; the two inclined jet nozzles 912 blow away from each other. The provision of inclined jet nozzles 912 of which the jets make an acute angle with the direction of movement of the paper sheet; and wherein the two inclined jet nozzles 912 blow away from each other has shown to result in improved drying efficiency of paper sheet.

[0061] The inclined jet nozzles 912 are provided in the cast nozzle head 905 by drilling a skew orifice. All of the inclined jet nozzles in the nozzle head 905 are provided in the cast nozzle head via drilling orifices of the same diameter. All of the inclined jet nozzles 909, 911, 912 are supplied with hot gas from the hot gas chamber inside the nozzle head 905. Therefore, the mass of hot gas ejected per unit of time is the same for each of the inclined jet nozzles 909, 911, 912. The result is that the mass of hot gas ejected per unit of time in the direction opposite to the movement of the paper sheet is larger than the mass of hot gas ejected per unit of time in the direction of the movement of the paper sheet; such arrangement has shown to provide higher efficiency of the drying equipment.

[0062] Figure 10 shows an embodiment 1000 of equipment for continuous air-borne drying of a paper sheet according to the second aspect of the invention. The equipment 1000 comprises a multiple number of nozzle boxes 1070, 1071 as in the first aspect of the invention. Two consecutive nozzle boxes 1070, 1071 comprise nozzle units 1006 that are staggered when comparing the positions of the nozzle units in the first nozzle box of the two consecutive nozzle boxes with the positions of the nozzle units in the second nozzle box of the two consecutive nozzle boxes. A range of infrared emitters 1080 - preferably gas fired infrared emitters - is positioned between the two consecutive nozzle boxes 1070, 1071. Between a nozzle box and a range of infrared emitters, suction openings 1090 are provided for the evacuation of gas.

[0063] Figure 11 shows another embodiment of a nozzle box as in the first aspect of the invention. The nozzle

box 1100 is provided for blowing hot gas in the convective drying zone of equipment for the continuous drying of air-borne paper sheets, the direction of movement of the paper sheet with respect to the nozzle box 1100 is indicated by arrow 1160. The nozzle box 1100 comprises a plurality of nozzle units 1105 over the nozzle box. The nozzle units 1105 are nozzle heads 1105 which are removably mounted onto the nozzle box 1100. The nozzle heads 1105 are devoid of sharp angles in order to prevent the risk of damaging the paper in case of unplanned contacts between the paper to be dried and the nozzle head. The nozzle heads 1105 are provided staggered over the nozzle box, such that when installed in a drying apparatus, the nozzle units are provided staggered over the width of the drying apparatus. Each of the nozzle heads comprises four direct impingement nozzles 1108 each for ejecting a jet of hot gas perpendicular to the average plane of the paper sheet to be dried. The direct impingement nozzles are provided such that some lines in the direction of the nozzle box that coincide with the width direction of the paper sheet to be dried cross only one direct impingement nozzle of a nozzle head, while other lines in the direction of the nozzle box that coincide with the width direction of the paper sheet to be dried cross two direct impingement nozzles of that same nozzle head, and while other lines in the direction of the nozzle box that coincide with the width direction of the paper sheet to be dried cross no direct impingement nozzles of that same nozzle head. Such arrangement of the direct impingement nozzles has proven to provide better uniformity of heat transfer by the direct impingement nozzles to the paper sheet to be dried.

[0064] Each of the nozzle heads comprises four series of inclined jet nozzles, wherein each of the series of inclined jet nozzles comprises a number of inclined jet nozzles provided on a straight line. Two series of inclined jet nozzles 1110 are each aligned on a line in the direction of the nozzle box that coincides with the width direction of the paper to be dried; of which one series is provided for blowing in the direction of movement of the paper sheet to be dried; and the other series is provided for blowing in the direction opposite to the direction of movement of the paper sheet to be dried.

[0065] The nozzle head comprises in addition two series of inclined jet nozzles 1111, 1112 that are each aligned on a line that makes an angle of e.g. 60° with the direction of the nozzle box that coincides with the width direction of the paper to be dried.

[0066] Each of the nozzles - direct impingement nozzles as well as inclined jet nozzles - are provided in the nozzle head as drilled round openings perpendicular to the surface of the nozzle head where the round opening has been drilled.

[0067] Between the nozzle heads, the nozzle box is provided with suction openings 1125 for the evacuation of gas.

[0068] The nozzle box arrangement of figure 11 has shown particularly beneficial results in terms of drying

efficiency of coated paper sheets, thanks to the particular arrangement of the direct impingement nozzles and of the inclined jet nozzles.

[0069] Figure 12 shows hot air dryer 1200 equipment according to the second aspect of the invention. The hot air dryer equipment 1200 comprises a housing 1201 and a plurality of nozzle boxes 1270 according to the first aspect of the invention. Means are provided for suction of hot gas through suction openings - e.g. round suction openings or slit shaped suction openings - in the nozzle boxes (e.g. between nozzle units or between nozzle heads) and/or between nozzle boxes. Means are provided to collect the sucked gas into piping 1202. Preferably, piping 1204 is provided to exhaust part of the sucked gas out of the equipment. Means are provided for the supply of fresh air into the equipment, wherein the freshly supplied air - introduced via piping 1216 - is mixed with sucked gas. Piping 1224 is provided to recirculate - e.g. by means of a fan 1218 - at least part of the sucked gas back, together with the freshly supplied air, to the one or to the plurality of nozzle boxes for being blown onto the paper sheet to be dried by the direct impingement nozzles and by the inclined jet nozzles of the nozzles boxes. Means 1220 are provided to heat the mixture of sucked gas and freshly supplied air before it is supplied to the nozzle box(es). Such means can e.g. be a heat exchanger or a gas burner. Such gas burner can be provided such that the combustion gas of the gas burner is added to the mixture of sucked gas and freshly supplied air. Means - not shown in figure 12 - e.g. dampers are provided in the piping to control the flows of the gases in the different pipes or tubes.

Claims

1. Nozzle box (100) for blowing hot gas in the convective drying zone of equipment for the continuous drying of air-borne paper sheets, the nozzle box comprises

- at least one direct impingement nozzle (108) for ejecting a jet of hot gas perpendicular to the average plane of the paper sheet to be dried; and
- a plurality of inclined jet nozzles (109, 110, 111, 112), wherein inclined jet nozzles are provided for ejecting jets of hot gas under an inclined angle with respect to the average plane of the paper sheet to be dried;

characterized in that at least two inclined jet nozzles (109, 111) are provided for which the plane comprising the vector representations of the jet directions of the at least two inclined jet nozzles does not comprise the vector representing the jet direction of a direct impingement nozzle.

2. Nozzle box as in claim 1, wherein the nozzle box

comprises at least three inclined jet nozzles, wherein each of the at least three inclined jet nozzles has a vector representing its jet direction when in use; wherein each of the vectors of the at least three inclined jet nozzles has a different direction in the three-dimensional space.

3. Nozzle box as in claims 1 or 2, wherein the inclined jet nozzles comprise or consist out of a first set of inclined jet nozzles and a second set of inclined jet nozzles; wherein the first set of inclined jet nozzles are provided for blowing in a first direction; and wherein the second set of inclined jet nozzles are provided for blowing in a second direction; and wherein the first direction is perpendicular to the second direction.
4. Nozzle box as in any of the preceding claims, wherein the nozzle box comprises suction openings for the evacuation of gas.
5. Nozzle box as in any of the preceding claims, wherein the nozzle box comprises a plurality of nozzle units over the nozzle box, wherein each of the units comprises
 - at least one direct impingement nozzle for ejecting a jet of hot gas perpendicular to the average plane of the paper sheet to be dried; and
 - a plurality of inclined jet nozzles, wherein inclined jet nozzles are provided for ejecting jets of hot gas under an inclined angle with respect to the average plane of the paper sheet to be dried;
 wherein at least two inclined jet nozzles of the nozzle unit are provided for which the plane comprising the vector representation of the jet directions of the at least two inclined jet nozzles does not comprise the vector representing the jet direction of a direct impingement nozzle of the nozzle unit.
6. Nozzle box as in claim 5, wherein suction openings for the evacuation of gas are provided in the nozzle box between nozzle units.
7. Nozzle box as in any of the claims 5 or 6, wherein nozzle units are provided as nozzle heads mounted in the nozzle box.
8. Nozzle box as in any of the claims 5 - 7, wherein the at least one direct impingement nozzles are provided in the central section of the nozzle unit; and wherein the inclined jet nozzles surround the at least one direct impingement nozzles.
9. Nozzle box as in claim 8, wherein a first part of said inclined jet nozzles are

provided for blowing inwards towards the at least one direct impingement nozzle;
and wherein a second part of said inclined jet nozzles are provided for blowing in the direction away from the at least one direct impingement nozzle.

10. Nozzle box as in any of the claims 5 - 9, wherein the inclined jet nozzles within a nozzle unit are provided so that when the inclined jet nozzles are in operation, the jets of the inclined jet nozzles are present in equi-angularly distributed planes perpendicular to the nozzle box
11. Equipment for continuous air-borne drying of a paper sheet, comprising a nozzle box as in any of the claims 1 - 10, wherein said nozzle box spans the width available in the equipment for the transport of the paper sheet.
12. Equipment as in claim 11, wherein one or more than one nozzle box as in claims 1 - 10 is provided such that the vector sum of the vectors representing the jet direction and having as magnitude the jet impulse of the inclined jet nozzles of the nozzle box points in the opposite direction of the direction of transport of the paper sheet through the drying equipment.
13. Equipment as in claims 11 or 12, wherein the equipment comprises a multiple number of nozzle boxes as in any of the claims 1 to 10; and wherein at least two consecutive nozzle boxes comprise nozzle units that are staggered when comparing the positions of the nozzle units in the first nozzle box of the two consecutive nozzle boxes with the positions of the nozzle units in the second nozzle box of the two consecutive nozzle boxes.
14. A method for continuous drying of a paper sheet, wherein an equipment for continuous drying is used as in any of the claims 11 to 13; wherein a paper sheet is transported through the equipment in order to dry the paper sheet in the equipment for continuous drying; wherein the paper sheet is air-borne in the equipment without the selvedge of the paper sheet being held by mechanical means; wherein the paper sheet undulates in the direction of transport of the paper sheet through the drying equipment; and wherein the paper sheet undulates in the direction perpendicular to the direction of transport of the paper sheet through the drying equipment.
15. Method as in claim 14, wherein the vector sum of the vectors representing the jet direction and having as size the jet impulse of the inclined jet nozzles of the nozzle box, points in the opposite direction of the direction of transport of the paper sheet through the

drying equipment.

Patentansprüche

1. Düsenkasten (100)
zum Einblasen von Heißgas in die konvektive Trocknungszone einer Anlage zum kontinuierlichen Trocknen von schwebenden Papierbögen, wobei der Düsenkasten umfasst:

 - mindestens eine Direktaufpralldüse (108) zum Ausstoßen eines Heißgasstrahls senkrecht zu der Durchschnittsebene des zu trocknenden Papierbogens und
 - mehrere geneigte Strahldüsen (109, 110, 111, 112), wobei geneigte Strahldüsen zum Ausstoßen von Heißgasstrahlen unter einem Neigungswinkel in Bezug auf die Durchschnittsebene des zu trocknenden Papierbogens vorgesehen sind,

 - mindestens zwei geneigte Strahldüsen der Düseneinheit vorgesehen sind, für welche die Ebene, die die Vektordarstellung der Strahlrichtungen der mindestens zwei geneigten Strahldüsen umfasst, nicht den Vektor umfasst, der die Strahlrichtung einer Direktaufpralldüse der Düseneinheit darstellt.

dadurch gekennzeichnet, dass mindestens zwei geneigte Strahldüsen (109, 111) vorgesehen sind, für welche die Ebene, die die Vektordarstellungen der Strahlrichtungen der mindestens zwei geneigten Strahldüsen umfasst, nicht den Vektor umfasst, der die Strahlrichtung einer Direktaufpralldüse darstellt.
2. Düsenkasten nach Anspruch 1, wobei der Düsenkasten mindestens drei geneigte Strahldüsen umfasst, wobei jede der mindestens drei geneigten Strahldüsen einen Vektor aufweist, der im Betrieb ihre Strahlrichtung darstellt, wobei jeder der Vektoren der mindestens drei geneigten Strahldüsen eine unterschiedliche Richtung im dreidimensionalen Raum aufweist.
3. Düsenkasten nach Anspruch 1 oder 2, wobei die geneigten Strahldüsen einen ersten Satz geneigter Strahldüsen und einen zweiten Satz geneigter Strahldüsen umfassen oder daraus bestehen, wobei der erste Satz geneigter Strahldüsen zum Blasen in einer ersten Richtung vorgesehen ist und wobei der zweite Satz geneigter Strahldüsen zum Blasen in einer zweiten Richtung vorgesehen ist und wobei die erste Richtung senkrecht zur zweiten Richtung ist.
4. Düsenkasten nach einem der vorhergehenden Ansprüche, wobei der Düsenkasten Absaugöffnungen für die Entgasung umfasst.
5. Düsenkasten nach einem der vorhergehenden Ansprüche, wobei der Düsenkasten mehrere Düsen-einheiten über dem Düsenkasten umfasst, wobei jede der Einheiten umfasst:

 - mindestens eine Direktaufpralldüse zum Ausstoßen eines Heißgasstrahls senkrecht zu der Durchschnittsebene des zu trocknenden Papierbogens und
 - mehrere geneigte Strahldüsen, wobei geneigte Strahldüsen zum Ausstoßen von Heißgasstrahlen unter einem Neigungswinkel in Bezug auf die Durchschnittsebene des zu trocknenden Papierbogens vorgesehen sind,

 wobei mindestens zwei geneigte Strahldüsen der Düseneinheit vorgesehen sind, für welche die Ebene, die die Vektordarstellung der Strahlrichtungen der mindestens zwei geneigten Strahldüsen umfasst, nicht den Vektor umfasst, der die Strahlrichtung einer Direktaufpralldüse der Düseneinheit darstellt.
6. Düsenkasten nach Anspruch 5, wobei Absaugöffnungen zur Entgasung in dem Düsenkasten zwischen Düsen-einheiten vorgesehen sind.
7. Düsenkasten nach einem der Ansprüche 5 oder 6, wobei Düsen-einheiten als Düsenköpfe vorgesehen sind, die im Düsenkasten montiert sind.
8. Düsenkasten nach einem der Ansprüche 5 - 7, wobei die mindestens eine Direktaufpralldüse im Mittelabschnitt der Düseneinheit vorgesehen ist, und wobei die geneigten Strahldüsen die mindestens eine Direktaufpralldüse umgeben.
9. Düsenkasten nach Anspruch 8, wobei ein erster Teil der geneigten Strahldüsen zum Einblasen in Richtung der mindestens einen Direktaufpralldüse vorgesehen ist und wobei ein zweiter Teil der geneigten Strahldüsen zum Blasen in der Richtung weg von der mindestens einen Direktaufpralldüse vorgesehen ist.
10. Düsenkasten nach einem der Ansprüche 5 - 9, wobei die geneigten Strahldüsen innerhalb einer Düsen-einheit vorgesehen sind, so dass, wenn die geneigten Strahldüsen in Betrieb sind, die Strahlen der geneigten Strahldüsen in gleichwinklig verteilten Ebenen senkrecht zum Düsenkasten vorliegen.
11. Anlage zum kontinuierlichen Schwebetrocknen eines Papierbogens, umfassend einen Düsenkasten nach einem der Ansprüche 1 - 10, wobei sich der Düsenkasten über die Breite erstreckt, die in der Anlage für den Transport des Papierbogens verfügbar ist.
12. Anlage nach Anspruch 11, wobei ein oder mehr als ein Düsenkasten nach den Ansprüchen 1 - 10 vorgesehen ist, so dass die Vektorsumme der Vektoren, die die Strahlrichtung darstellen und als Betrag den

Strahlimpuls der geneigten Strahldüsen des Düsenkastens aufweisen, in die zur Transportrichtung des Papierbogens durch die Trocknungsanlage entgegengesetzte Richtung zeigt.

13. Anlage nach Anspruch 11 oder 12, wobei die Anlage mehrere Düsenkästen nach einem der Ansprüche 1 bis 10 umfasst und wobei mindestens zwei aufeinanderfolgende Düsenkästen Düseneinheiten umfassen, die beim Vergleich der Positionen der Düseneinheiten im ersten Düsenkasten der zwei aufeinanderfolgenden Düsenkästen mit den Positionen der Düseneinheiten im zweiten Düsenkasten der zwei aufeinanderfolgenden Düsenkästen versetzt angeordnet sind.

14. Verfahren zum kontinuierlichen Trocknen eines Papierbogens, wobei eine Anlage zum kontinuierlichen Trocknen nach einem der Ansprüche 11 bis 13 verwendet wird, wobei ein Papierbogen durch die Anlage transportiert wird, um den Papierbogen in der Anlage zum kontinuierlichen Trocknen zu trocknen, wobei der Papierbogen in der Anlage schwebt, ohne dass die Kante des Papierbogens durch mechanische Mittel gehalten wird, wobei sich der Papierbogen in der Transportrichtung des Papierbogens durch die Trocknungsanlage wellenförmig bewegt und wobei sich der Papierbogen in der Richtung senkrecht zur Transportrichtung des Papierbogens durch die Trocknungsanlage wellenförmig bewegt.

15. Verfahren nach Anspruch 14, wobei die Vektorsumme der Vektoren, die die Strahlrichtung darstellen und als Größe den Strahlimpuls der geneigten Strahldüsen des Düsenkastens aufweisen, in die zur Transportrichtung des Papierbogens durch die Trocknungsanlage entgegengesetzte Richtung zeigt.

Revendications

1. Boîte à buses (100) pour souffler un gaz chaud dans la zone de séchage par convection d'un équipement pour le séchage continu en suspension dans l'air de feuilles de papier, la boîte à buses comprenant :

au moins une buse à contact direct (108) pour éjecter un jet de gaz chaud perpendiculaire au plan moyen de la feuille de papier à sécher ; et une pluralité de buses à jet incliné (109, 110, 111, 112), dans laquelle les buses à jet incliné sont prévues pour éjecter des jets de gaz chaud sous un angle incliné par rapport au plan moyen de la feuille de papier à sécher ;

caractérisée en ce qu'au moins deux buses à

jet incliné (109, 111) sont prévues, pour lesquelles le plan comprenant les représentations vectorielles des directions de jet des au moins deux buses à jet incliné, ne comprend pas le vecteur représentant la direction de jet d'une buse à contact direct.

2. Boîte à buses selon la revendication 1, dans laquelle la boîte à buses comprend au moins trois buses à jet incliné, dans laquelle chacune des au moins trois buses à jet incliné a un vecteur représentant sa direction de jet, à l'usage ; dans laquelle chacun des vecteurs des au moins trois buses de jet incliné a une direction différente dans l'espace tridimensionnel.

3. Boîte à buses selon les revendications 1 ou 2, dans laquelle les buses à jet incliné comprennent ou se composent d'un premier ensemble de buses à jet incliné et d'un second ensemble de buses à jet incliné ; dans laquelle le premier ensemble de buses à jet incliné est prévu pour souffler dans une première direction ; et dans laquelle le second ensemble de buses à jet incliné est prévu pour souffler dans une seconde direction ; et dans laquelle la première direction est perpendiculaire à la seconde direction.

4. Boîte à buses selon l'une quelconque des revendications précédentes, dans laquelle la boîte à buses comprend des ouvertures d'aspiration pour l'évacuation du gaz.

5. Boîte à buses selon l'une quelconque des revendications précédentes, dans laquelle la boîte à buses comprend une pluralité d'unités de buses sur la boîte à buses, dans laquelle chacune des unités comprend :

au moins une buse à contact direct pour éjecter un jet de gaz chaud perpendiculaire au plan moyen de la feuille de papier à sécher ; et une pluralité de buses à jet incliné, dans laquelle les buses à jet incliné sont prévues pour éjecter des jets de gaz chaud sous un angle incliné par rapport au plan moyen de la feuille de papier à sécher ;

dans laquelle au moins deux buses à jet incliné de l'unité de buses sont prévues, pour lesquelles le plan comprenant la représentation vectorielle des directions de jet des au moins deux buses à jet incliné, ne comprend pas le vecteur représentant la direction de jet d'une buse à contact direct de l'unité de buses.

6. Boîte à buses selon la revendication 5, dans laquelle

des ouvertures d'aspiration pour l'évacuation du gaz sont prévues dans la boîte à buses entre les unités de buses.

7. Boîte à buses selon l'une quelconque des revendications 5 ou 6, dans laquelle les unités de buses sont prévues sous la forme de têtes de buses montées dans la boîte à buses.
8. Boîte à buses selon l'une quelconque des revendications 5 à 7, dans laquelle la au moins une buse à contact direct est prévue dans la section centrale de l'unité de buses ; et dans laquelle les buses à jet incliné entourent la au moins une buse à contact direct.
9. Boîte à buses selon la revendication 8, dans laquelle une première partie desdites buses à jet incliné est prévue pour souffler vers l'intérieur vers la au moins une buse à contact direct ; et dans laquelle une seconde partie desdites buses à jet incliné est prévue pour souffler dans la direction orientée à l'opposé de la au moins une buse à contact direct.
10. Boîte à buses selon l'une quelconque des revendications 5 à 9, dans laquelle les buses à jet incliné à l'intérieur d'une unité de buses sont prévues de sorte que lorsque les buses à jet incliné fonctionnent, les jets des buses à jet incliné sont présents dans des plans répartis à égale distance angulaire, perpendiculaires à la boîte à buses.
11. Equipement pour le séchage continu en suspension dans l'air d'une feuille de papier, comprenant une boîte à buses selon l'une quelconque des revendications 1 à 10, dans lequel ladite boîte à buses couvre la largeur disponible dans l'équipement pour le transport de la feuille de papier.
12. Equipement selon la revendication 11, dans lequel une ou plus d'une boîte à buses selon les revendications 1 à 10 est prévue de sorte que la somme vectorielle des vecteurs représentant la direction de jet et ayant, en tant que grandeur, l'impulsion de jet des buses à jet incliné de la boîte à buses, est orientée dans la direction opposée de la direction de transport de la feuille de papier dans l'équipement de séchage.
13. Equipement selon les revendications 11 ou 12, dans lequel l'équipement comprend un grand nombre de boîtes à buses selon l'une quelconque des revendications 1 à 10 ; et dans lequel au moins deux boîtes à buses consécutives comprennent des unités de buses qui sont disposées en quinconce lorsque l'on compare les positions des unités de buses dans la première boîte à buses des deux boîtes à buses con-

sécutives avec les positions des unités de buses dans la seconde boîte à buses des deux boîtes à buses consécutives.

14. Procédé pour le séchage continu d'une feuille de papier, dans lequel un équipement pour le séchage continu est utilisé selon l'une quelconque des revendications 11 à 13 ; dans lequel une feuille de papier est transportée à travers l'équipement afin de sécher la feuille de papier dans l'équipement pour le séchage continu ; dans lequel la feuille de papier est en suspension dans l'air dans l'équipement sans que le bord de la feuille de papier ne soit maintenu par un moyen mécanique ; dans lequel la feuille de papier ondule dans la direction de transport de la feuille de papier à travers l'équipement de séchage ; et dans lequel la feuille de papier ondule dans la direction perpendiculaire à la direction de transport de la feuille de papier à travers l'équipement de séchage.
15. Procédé selon la revendication 14, dans lequel la somme vectorielle des vecteurs représentant la direction de jet et ayant, en tant que dimension, l'impulsion de jet des buses à jet incliné de la boîte à buses, est orientée dans la direction opposée de la direction de transport de la feuille de papier à travers l'équipement de séchage.

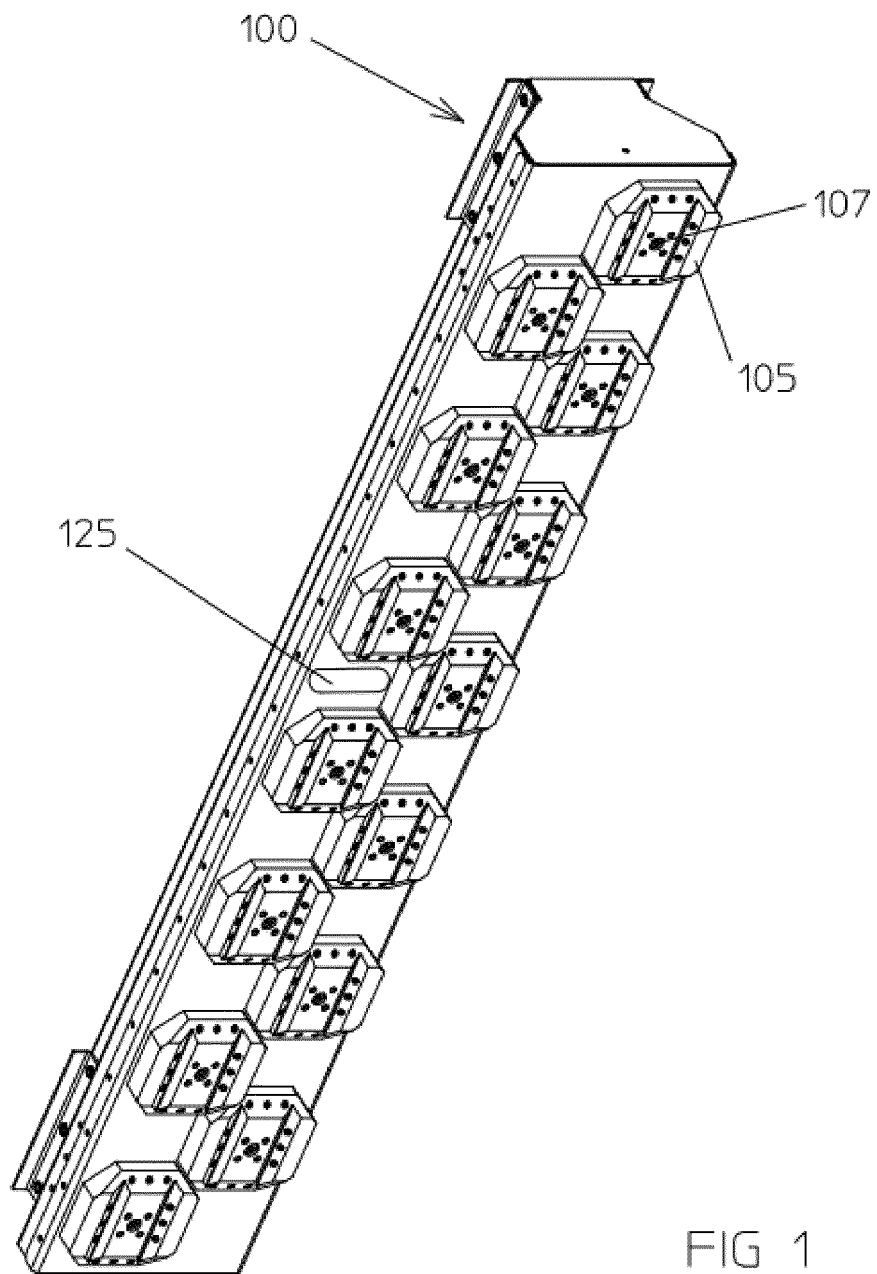


FIG 1

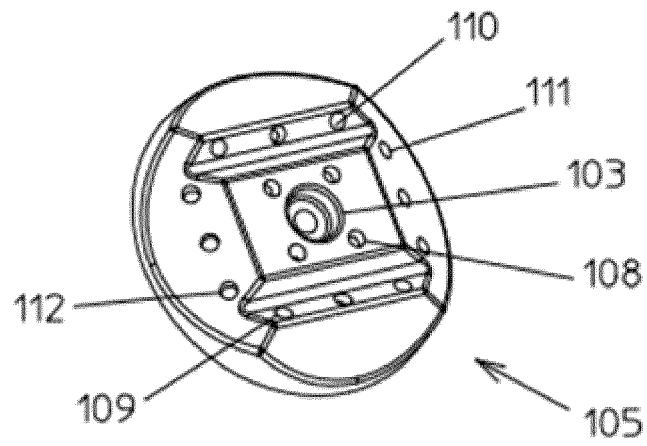


FIG 2

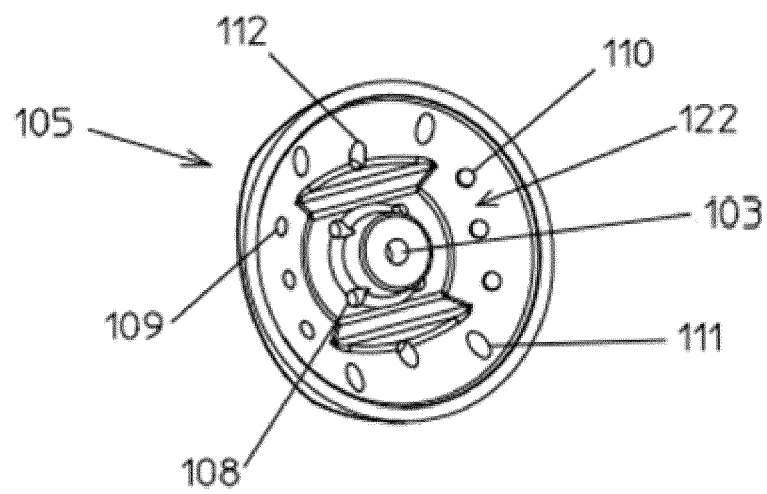


FIG 3

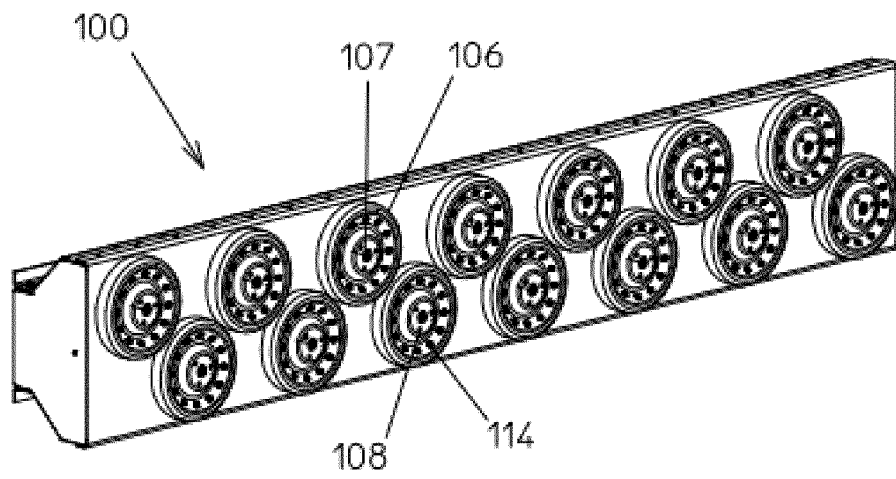


FIG 4

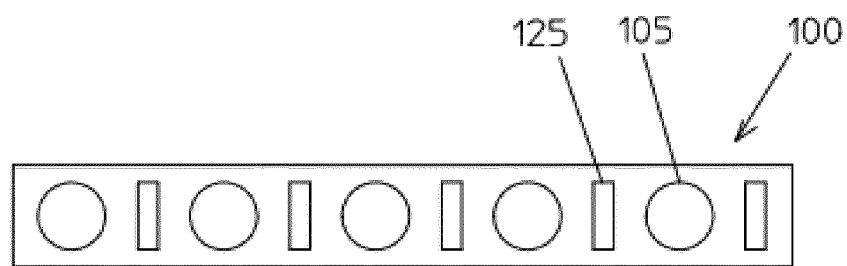
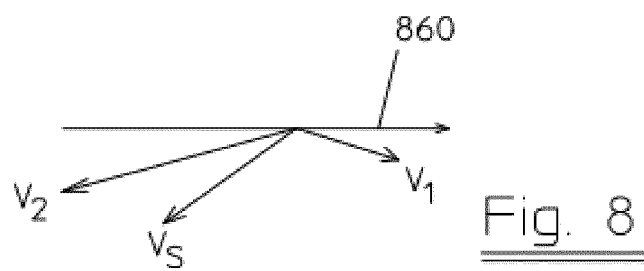
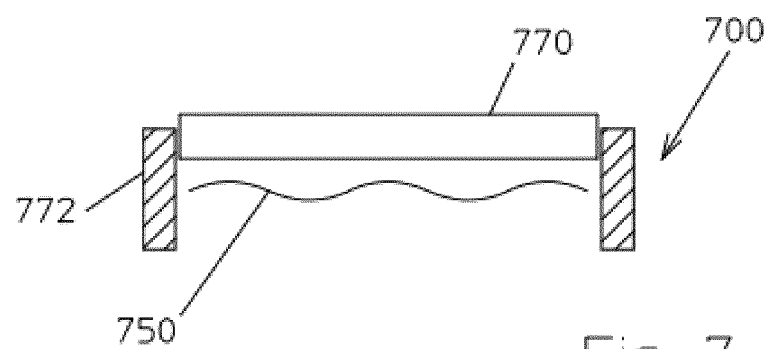
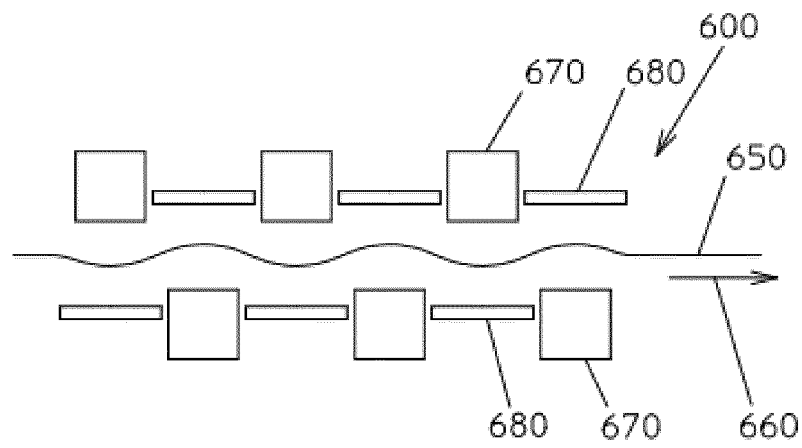


FIG 5



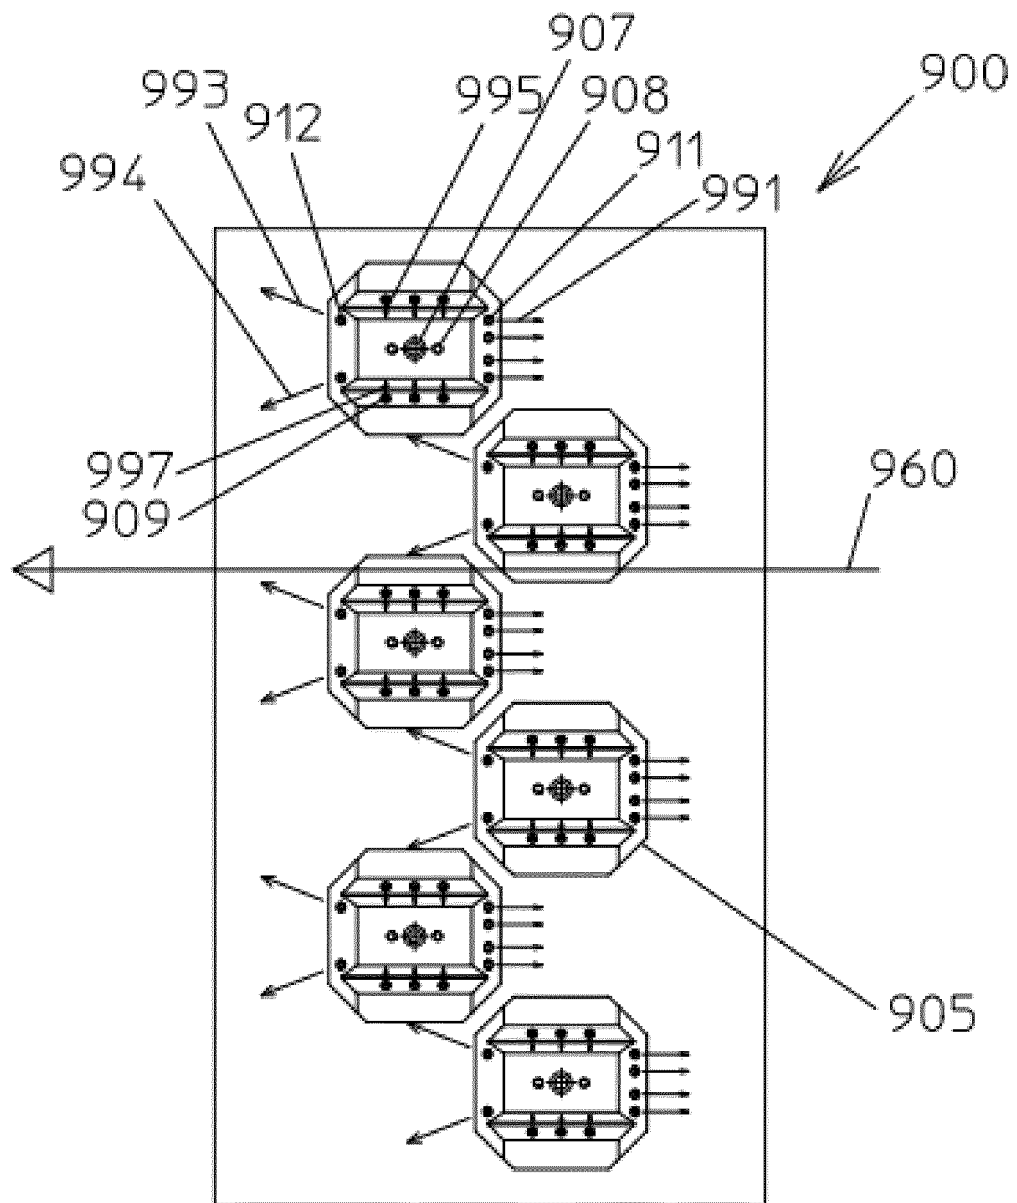


FIG 9

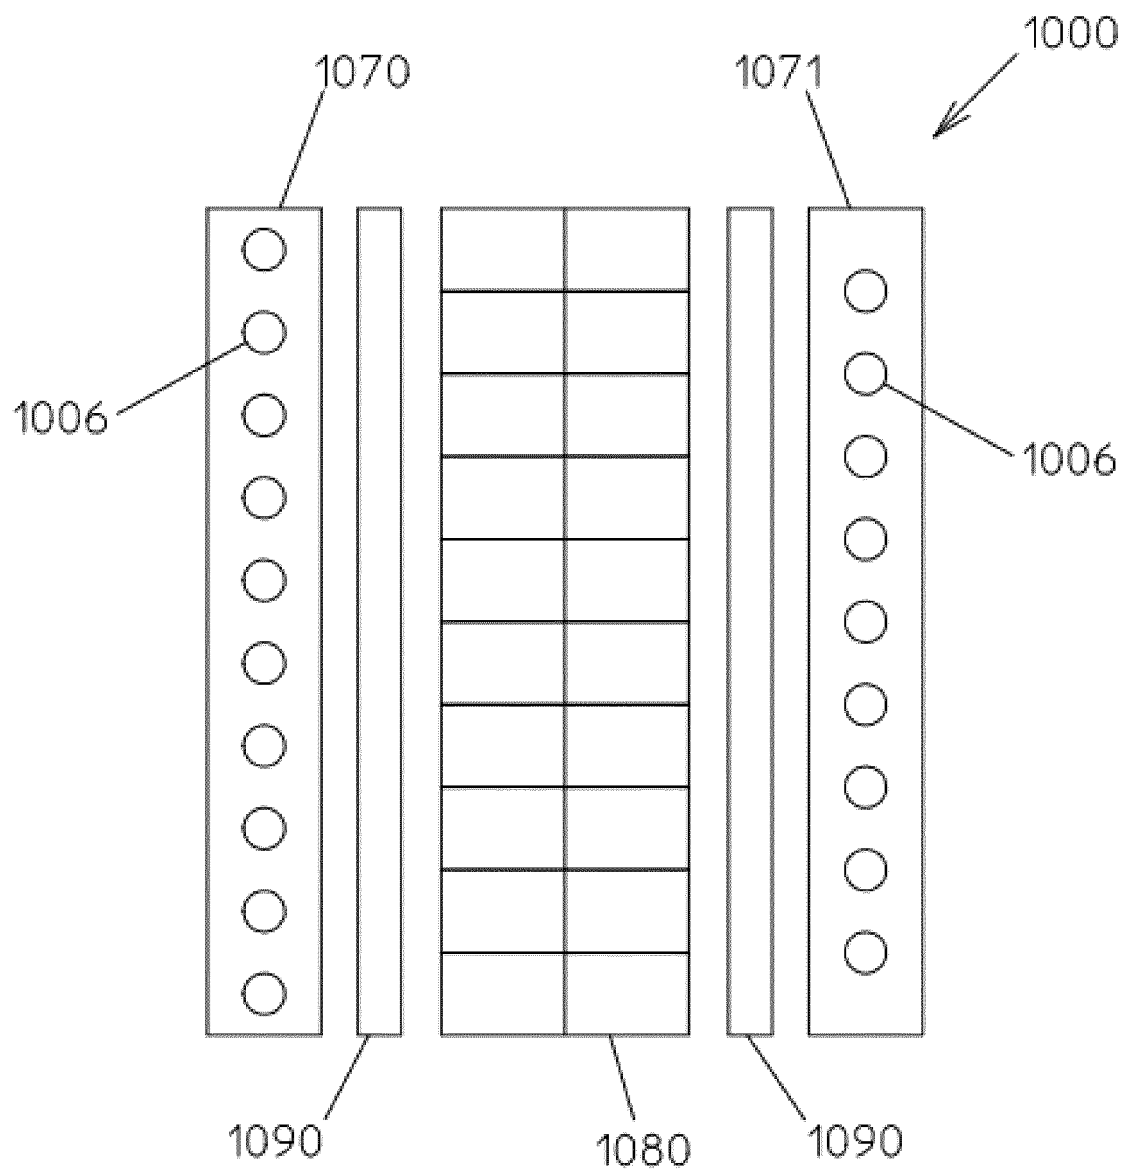


Fig. 10

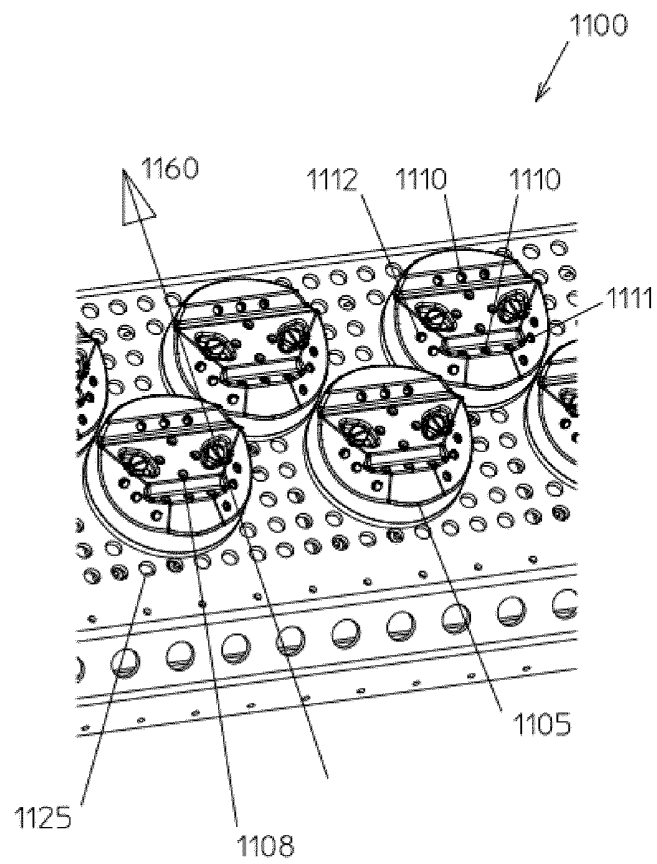


Fig. 11

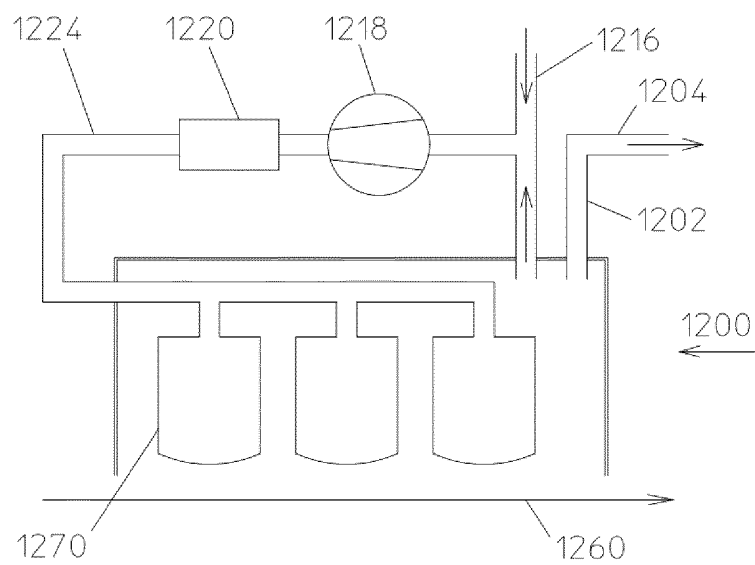


Fig. 12

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 3823488 A [0003]
- US 6598315 B1 [0004]