Feb. 12, 1974 D. M. MONTGUIRE Re. 27,918

MULTIPLE-HEAD SLITTING APPARATUS

Original Filed Aug. 21, 1967 3 Sheets-Sheet 1

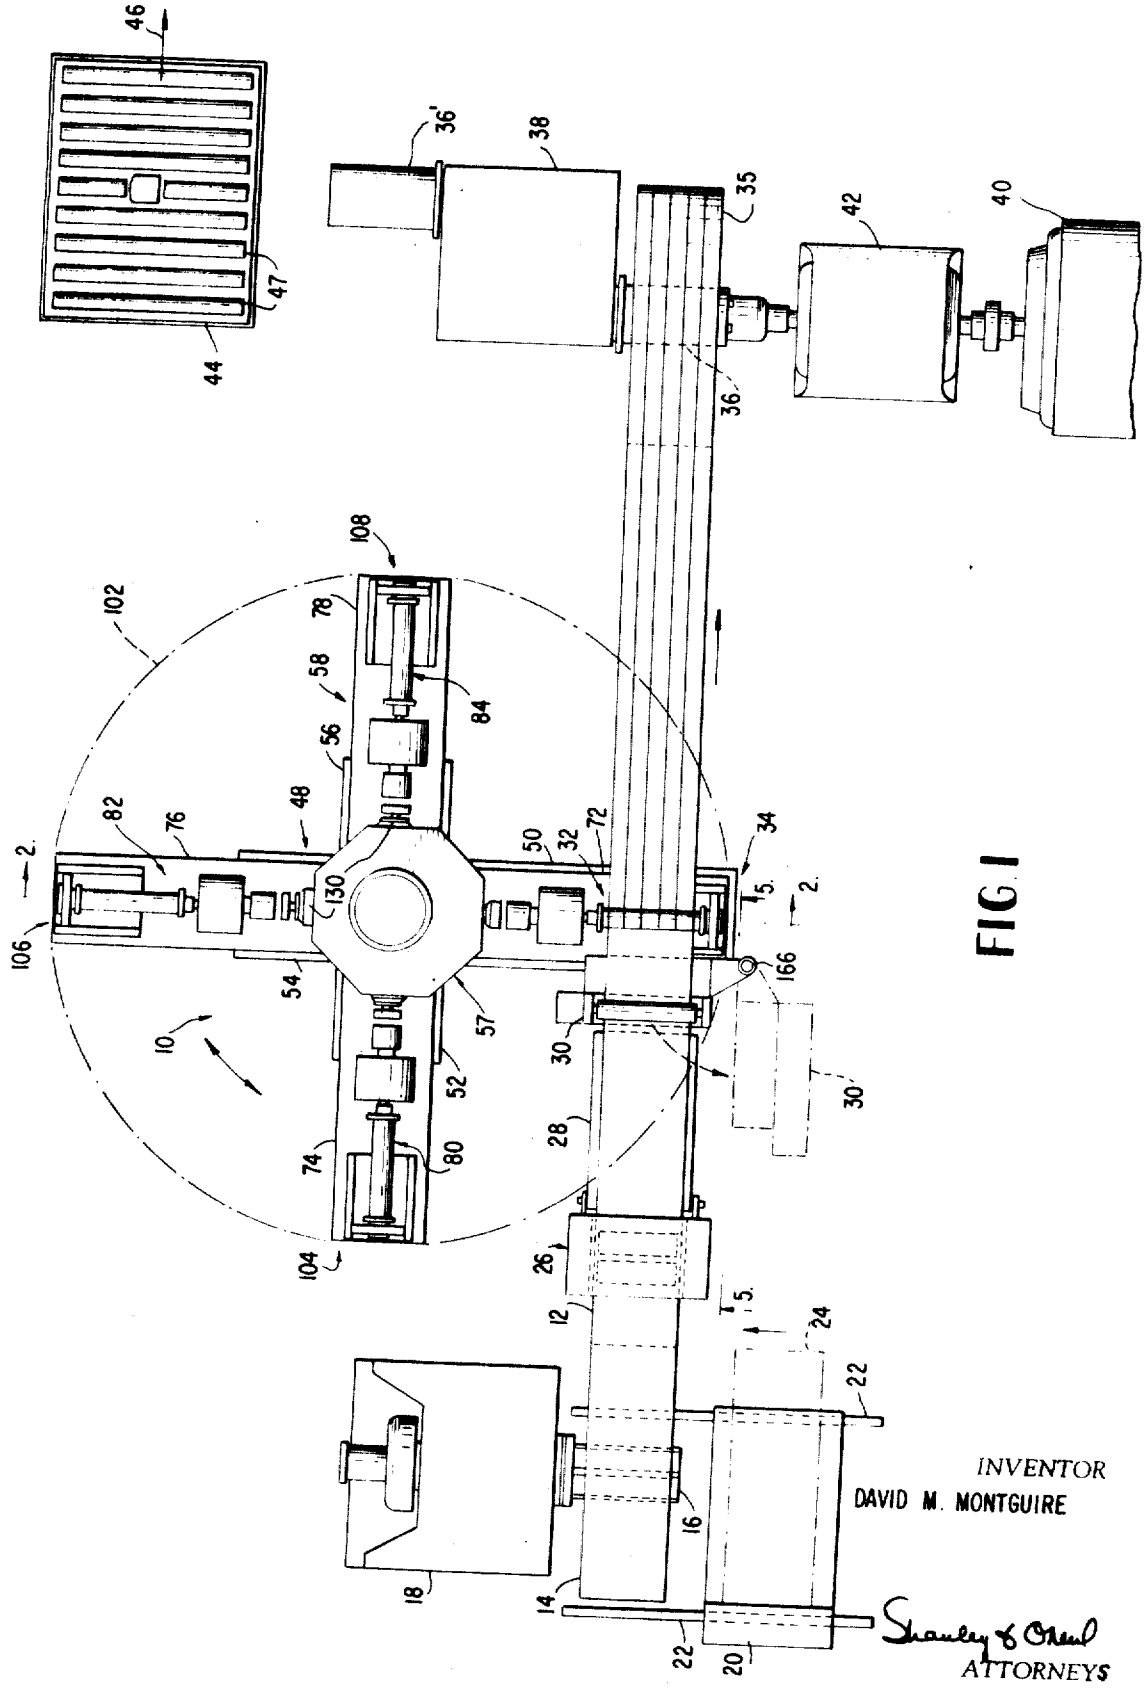


FIG. 1

INVENTOR
DAVID M. MONTGUIRE

Shanley & O'Neil
ATTORNEYS

Feb. 12, 1974 D. M. MONTGUIRE Re. 27,918

MULTIPLE-HEAD SLITTING APPARATUS

Original Filed Aug. 21, 1967 3 Sheets-Sheet 2

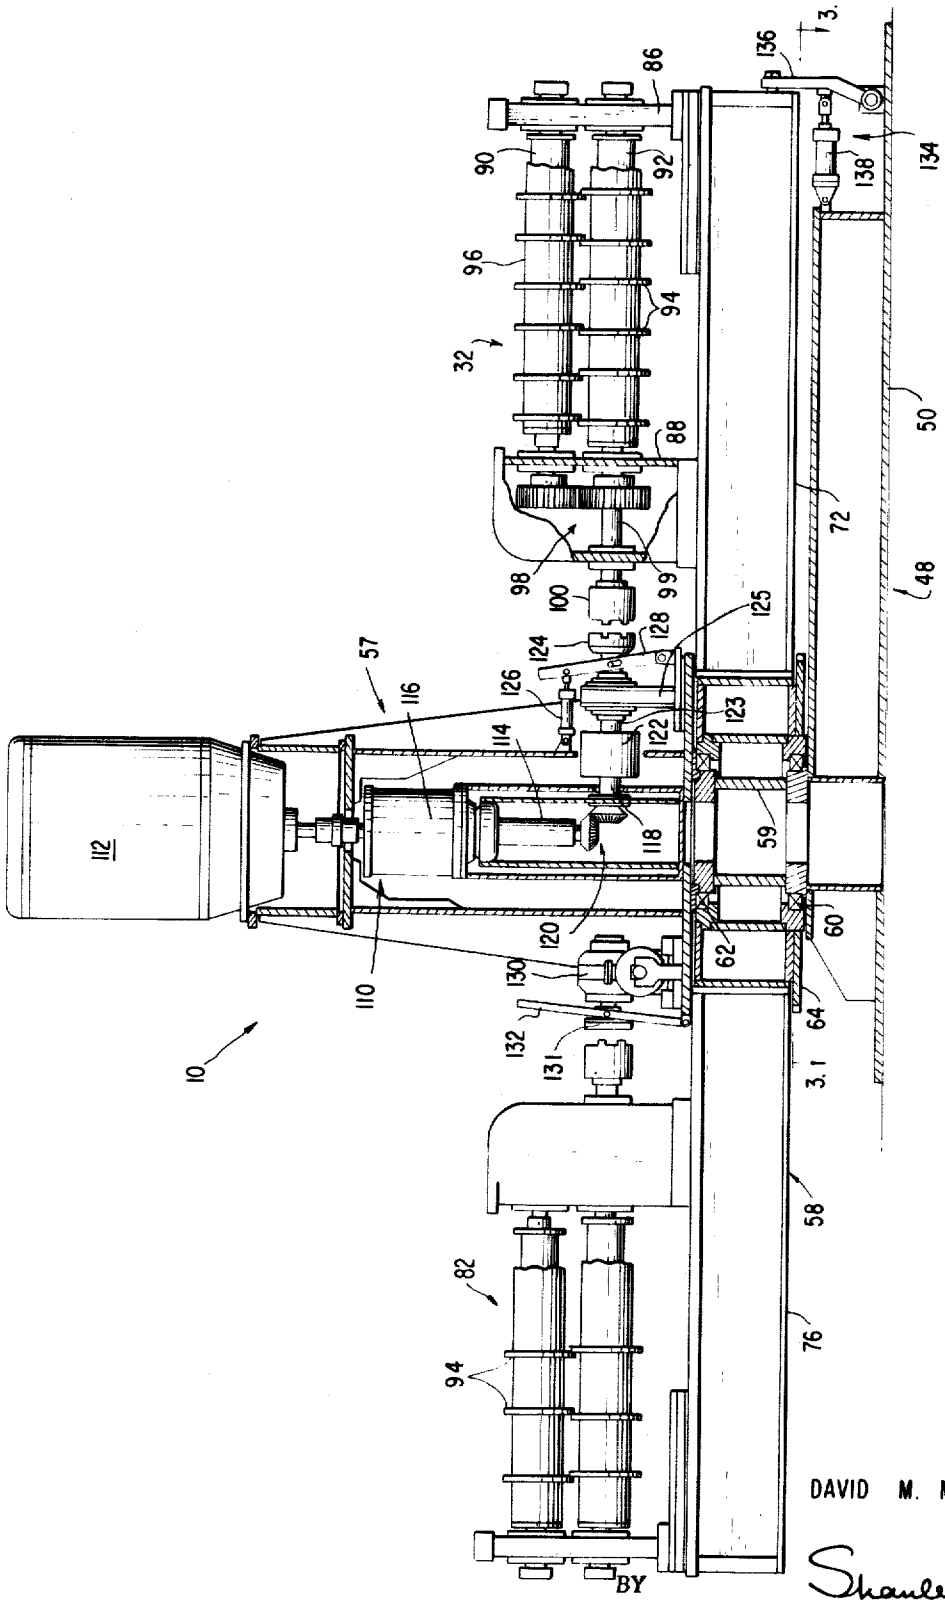


FIG. 2

INVENTOR
DAVID M. MONTGUIRE
BY Shanley & O'Neil
ATTORNEYS

Feb. 12, 1974 D. M. MONTGUIRE Re. 27,918

MULTIPLE-HEAD SLITTING APPARATUS

Original Filed Aug. 21, 1967 3 Sheets-Sheet 3

FIG. 3

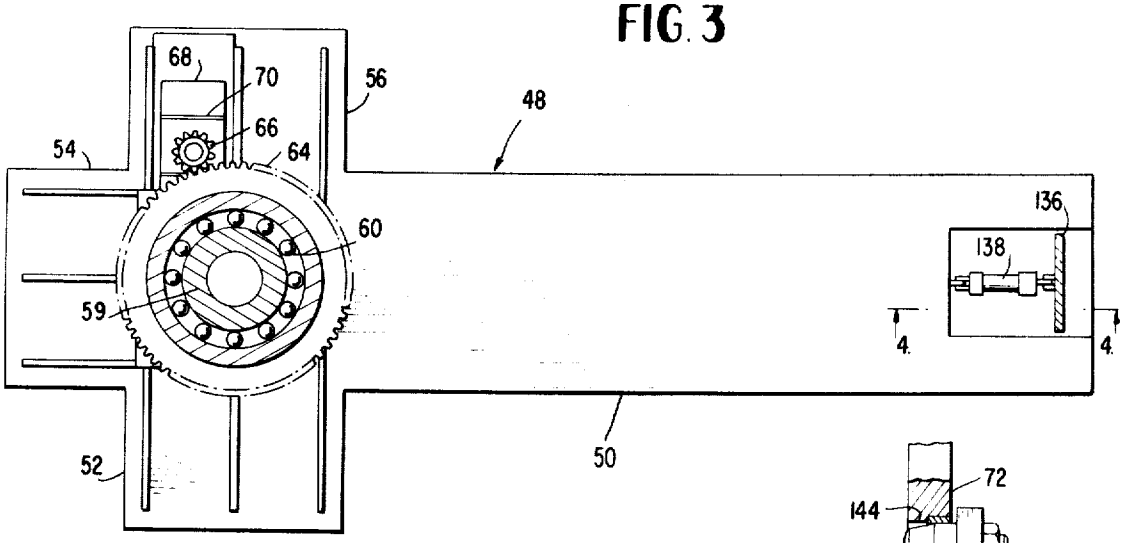


FIG. 4


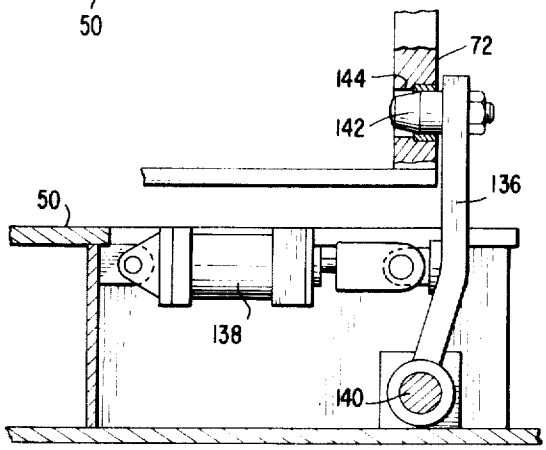


FIG. 5

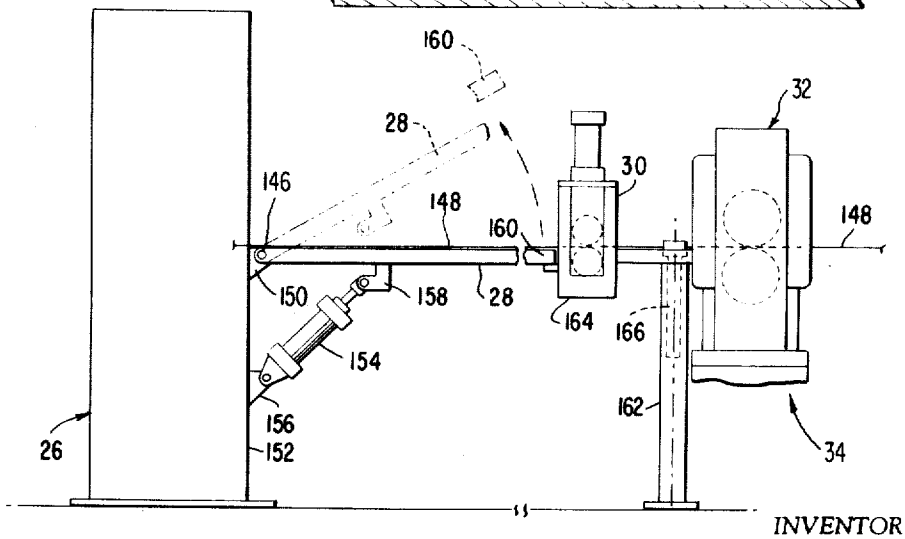

INVENTOR

DAVID M. MONTGUIRE

BY Shanley & O'Neil

ATTORNEYS

United States Patent Office

Re. 27,918
Reissued Feb. 12, 1974

27,918

MULTIPLE-HEAD SLITTING APPARATUS

David M. Montguire, Elm Grove, Wis., assignor to National Steel Corporation

Original No. 3,513,743, dated May 26, 1970, Ser. No. 662,061, Aug. 21, 1967. Application for reissue May 23, 1972, Ser. No. 256,187

Int. Cl. B23d *19/06*; B26d *1/16*

U.S. Cl. 83—433 22 Claims

Matter enclosed in heavy brackets [ ] appears in the original patent but forms no part of this reissue specification; matter printed in italics indicates the additions made by reissue.

ABSTRACT OF THE DISCLOSURE

Slitting apparatus includes a plurality of slitter heads carried by a turntable. The turntable is mounted for rotation about a stationary column which carries a drive unit. While one slitter head is operated by the drive unit to slit material at a slitting station, the other slitter heads are at servicing stations. Rotation of the turntable positions any selected slitter head at the slitting station. A feed table and an entry pinch roll assembly are provided along a pass line to the slitting station. The feed table and pinch roll assembly are movable out of the path of rotation of the turntable and slitter heads to avoid interference with rotation of the turntable. An aligning mechanism assures accurate alignment of a slitter head at the slitting station.

BACKGROUND OF THE INVENTION

Thin, flat products of steel and other metallic and nonmetallic materials are often mass-produced in the form of strip of relatively great width. Frequently, customers require strip of relatively narrower width, and the as-produced strip must be slit into narrower strips. This is usually accomplished by passing the wide strip through a slitter head including arbors carrying rotary slitting knives spaced along the length of the arbors a distance corresponding to the width of the desired product.

The slitting knives can be placed on the arbors at any desired location, but setting up the arbors (i.e., positioning the knives on the arbors to slit strip into particular desired widths) is time-consuming and requires that the slitting apparatus be shut down. Loss of production caused by downtime for setting-up is disadvantageous in any event, and can become a serious handicap when a multiplicity of small orders for different widths is to be processed.

Accordingly, a main object of the invention is the provision of improved slitting apparatus which minimizes downtime for setting-up or other servicing.

Another object of the invention is the provision of novel, multiple-head, slitting apparatus in which one slitter head is operating at a slitting station while another is serviced at a servicing station, and the preserviced slitter head then moved to the slitting station.

Still another object of the invention is the provision of novel, multiple-head slitting apparatus in which a plurality of slitter heads are carried by a rotatable member which positions a selected slitter head at a slitting station, and another slitter head at a servicing station.

A further object of the invention is the provision of novel multiple-head slitting apparatus including apparatus for delivering strip to be slit to the slitting station.

Other objects of the invention, its features and advantages, will appear from the following detailed description which, when considered in connection with the accompanying drawings, discloses a preferred embodiment of the invention for purposes of illustration only. For determining the scope of the invention, reference will be made to the appended claims.

BRIEF DESCRIPTION OF THE DRAWINGS

In the drawings, wherein similar reference characters denote similar elements throughout the several views:

FIG. 1 is a plan view of apparatus forming a preferred embodiment of the invention;

FIG. 2 is a cross-sectional view taken on line 2—2 of FIG. 1;

FIG. 3 is a view taken on section line 3—3 of FIG. 2;

FIG. 4 is a cross-sectional view taken on line 4—4 of FIG. 3; and

FIG. 5 is a cross-sectional view taken on line 5—5 of FIG. 1.

DESCRIPTION OF THE PREFERRED EMBODIMENT

In FIG. 1, multiple-head slitting apparatus generally indicated at **10** is shown slitting a wide strip **12** into a plurality of segments of relatively narrower width. Strip **12** is uncoiled from a coil **14** mounted on mandrel **16**, which is driven by motor **18** in a conventional manner. Coil car **20**, movable along rails **22**, is disposed to supply another coil **24**, shown in dotted lines, to mandrel **16** upon exhaustion of coil **14**, in a fashion well known in the art. Strip **12** passes sequentially through a conventional pinch roll-shear-straightening unit generally indicated at **26**, over a feed table **28** and through entry pinch roll assembly **30**. Strip **12** is slit into a plurality of narrow segments by a slitter head, generally indicated at **32**, which is positioned at a slitting station generally indicated at **34**. The slit strip is recoiled into a coil **35** on mandrel **36** of conventional double-head recoiler **38**, which is driven by motor **40** through speed reducer and clutch assembly **42** in a conventional manner. When all of strip **12** is recoiled, recoiler **38** is rotated to position mandrel **36** in the position occupied by mandrel **36'** in FIG. 1. Mandrel **36** is extended in a conventional manner to deposit coil **35** on the usual downender **44**, for discharge across rollers **47** in the direction of arrow **46**.

Multiple-head slitting apparatus **10** is mounted on a generally cross-shaped base generally indicated at **48** (see also FIGS. 2, 3). Base **48** includes a long leg **50**, which extends in a direction towards slitting station **34**, and three shorter legs **52**, **54**, **56**. A stationary member or column, generally indicated at **57** and including a shaft portion **59**, projects upwardly from base **48**. A generally X-shaped rotatable member or turntable generally indicated at **58** is carried by base **48**. Turntable **58** is mounted for rotational movement in a generally horizontal plane on the shaft **59** by annular ball bearings **60**, **62**. Turntable **58** includes a ring gear **64** which meshes with a drive pinion **66** (FIG. 3) which is driven by motor **68** through speed reducer **70** to rotate turntable **58** about column **57**.

Turntable **58** includes four arms **72**, **74**, **76**, **78**, each carrying a slitter head. The slitter heads are generally indicated at **32**, **80**, **82**, and **84**, respectively. The arms extend radially relative to column **57**, and each arm extends

generally perpendicularly relative to adjacent arms. For example, arm **72** extends generally perpendicularly with respect to arms **74, 78**. The slitter heads are identical except as to the number and positioning of slitting knives, as will be discussed hereinafter, and a description of one slitter head will impart understanding of all. For example, slitter head **32** includes a pair of opposed, spaced-apart upstanding frame members **86, 88** (see FIG. 2) mounted on arm **72**. A pair of rotary slitting arbors **90, 92** are journaled in the frame members. The arbors carry rotary knives **94** which are spaced axially along the arbors. The knives **94** coact in a conventional manner to shear material passed between the arbors. The knives on each arbor are separated from one another by spacers **96**, as is conventional. Arbors **90, 92** are driven in rotational movement through a power transmission including gearing **98**, shaft **99**, and a driven dog **100**, when dog **100** is engaged with a drive unit described hereinafter.

The number and location of knives on a slitter head vary in accordance with the width to which product is desired to be slit. In FIG. 2, slitter head **32** is set up to slit incoming strip into five segments of given width. Six pairs of coacting knives are employed for this purpose, with the two pairs of knives at the ends of the arbors functioning to trim the edges of the strip. Slitter head **82** is set up to slit strip into two segments of another given width, employing three pairs of coacting knives. As indicated above, the changing of a slitter head from one set-up to another is a time-consuming task having adverse effects which are minimized in apparatus according to the invention.

Turntable **58** and slitter heads **32, 80, 82, 84** define a path of rotation **102** upon rotation of turntable **58** by motor **68**. Slitting station **34**, and three servicing stations **104, 106, 108** are located at regular intervals around path **102**, so that each station is equidistant from adjacent stations along path **102**. For example, station **34**, is equidistant from stations **104, 108**. The slitter heads are located at regular intervals on turntable **58**, each slitter head being spaced from adjacent slitter heads a distance around the path of rotation equal to the spacing between stations. Hence, rotation of turntable **58** to position any slitter head at slitting station **34** simultaneously positions the other three slitter heads at the servicing stations. Thus, while one slitter head is in operation at slitting station **34**, set-up or maintenance work can be performed on the other three slitter heads so that downtime on the slitting apparatus for such purposes is minimized.

In the preferred embodiment, four stations and four slitter heads are provided with regular intervals between stations and slitter heads. However, more or fewer stations and slitter heads can be provided, and intervals between stations and between slitter heads may be other than regular, so long as distances between slitter heads correspond to distances between stations along the path of rotation.

The four slitter heads share a common drive unit, generally indicated at **110**, which is carried by column **57**. Drive unit **110** includes an electric motor **112** which drives shaft **114** through speed reducer **116**. In the drive unit, rotary motion is translated from shaft **14** to drive shaft **118** through bevel gearing generally indicated at **120**. An overrunning clutch **122**, which may be of any suitable type of conventional design, is mounted on column **57** and operatively connected to shaft **118**. Clutch **122** is also operatively connected to a drive dog **124** through a shaft **123**, which is carried in bearing mount **125**. Extension of a hydraulic cylinder **126** moves shifter lever **128** to engage drive dog **124** with the driven dog of the slitter head which is positioned at the slitting station to drive that slitter head. With the parts in the position illustrated in FIG. 2, drive dog **124** engages driven dog **100** of slitter head **32**. Disengagement of the drive and driven dogs is effected by retraction of cylinder **126**, when it is desired to rotate turntable **58** to position another slitter head at the slitting station.

A plurality of small hydraulic motors **130** are positioned on column **57** so that the slitter heads at the servicing stations can be operated for test purposes. Each motor **130** includes a drive dog **131** which is engaged with a driven dog on the slitter head at the respective servicing station by manual operation of a shift lever **132**, when it is desired to rotate the arbors for purposes of testing the slitter head. In the preferred embodiment, the test motors **130** are fixed in position on column **57**, but other arrangements could be utilized.

Multiple-head slitting apparatus **10** includes an aligning mechanism generally indicated at **134** (see FIGS. 2, 4) which accurately aligns the rotatable member with a selected slitter head in position at the slitting station. Aligner **134** includes a swingable member or plate **136** which is pivotally connected to leg **50** of base **48** at slitting station **34**. A hydraulic cylinder **138**, pivotally connected at its ends to leg **50** and plate **136**, respectively, pivots plate **136** about pivot pin **140** which is journaled in leg **50**. A projection or pin **142** is secured to plate **136** at the upper central portion of the plate. Pin **142** has a generally circular cross-sectional configuration closely conformed to the configuration of a recess **144**, which is formed in arm **72** of turntable **58** adjacent slitter head **32**. When turntable **58** is rotating, hydraulic cylinder **138** is extended so that pin **142** is spaced away from the path of rotation. When the slitter head **32** is positioned at the slitting station, the turntable is operated to bring projection **142** and recess **144** roughly into opposition. Hydraulic cylinder **138** is retracted to draw pin **142** into the recess to accurately align the slitter head **32** at the slitting station. A tapered head portion on pin **142** facilitates insertion of the pin into the recess.

Recesses similar to recess **144** are formed in turntable arms **74, 76, 78**, adjacent the respective slitter heads. Pin **142** is positioned on the base, and the recesses are positioned on the turntable at locations such that, when the projection is received in a recess, the corresponding slitter head is accurately positioned at the slitting station.

Feed table **28** (see FIGS. 1, 5) delivers material to be slit along a pass line **148** to slitting station **34**. Feed table **28** is mounted for movement about a generally horizontal pivot axis **146** by a pair of brackets **150** which are carried by frame **152** of pinch roll-shear-straightening unit **26**. Axis **146** is spaced along pass line **148** from slitting station **34**, out of the path of rotation **102** of the turntable and slitter heads. A hydraulic cylinder **154** is pivotally mounted at one end by a bracket **156** on frame **152**, and at the other end by a bracket **158** on feed table **28**. With table **28** in the solid line position of FIG. 5, free end **160** of table **28** is adjacent slitting station **34** and the surface of the table is on a level with pass line **148**, so that strip is fed from unit **26** to entry pinch roll assembly **30** and slitter head **32**. However, in such position, a portion of the table **28** is in the path of rotation **102**, and the turntable cannot be rotated. Extension of hydraulic cylinder **154** pivots table **28** about axis **146** to the dotted line position of FIG. 5, in which all portions of table **28** are out of the path of rotation **102**, and end **160** is spaced away from slitting station **34** and elevated above pass line **148**. With feed table **28** in the elevated position, turntable **58** can be rotated without interference from the feed table.

Entry pinch roll assembly **30**, located at the entry side of slitting station **34**, is mounted on an upstanding cylindrical stand **162** which is positioned out of the path of rotation **102**. Roll assembly **30** is carried on a base **164**. Base **164** is pivotally mounted on a pin **166** in stand **162** for swinging movement in a horizontal plane between the solid and dotted line positions of FIG. 1. In the solid line position, the nip of the rolls of pinch roll assembly **30** is in the pass line **148** (see FIG. 5), but the

assembly **30** is in the path of rotation **102** and the turntable cannot be rotated. However, by manually swinging the roll assembly to the dotted line position of FIG. **1**, the assembly **30** is moved out of the path of rotation **102** and the turntable **58** can be rotated without interference by the pinch roll assembly. Except for the pivotal mounting arrangement just described, entry pinch roll assembly **30** is completely conventional.

In operation, a selected slitter head is set up at one of the servicing stations **104, 106, 108** while another is in operation slitting material at slitting station **34**. Dog **124** is disengaged from the operating slitting head and cylinder **138** extended to withdraw pin **142** from the recess adjacent the operating slitting head. Cylinder **154** is extended to elevate feed table **28**, and pinch roll assembly **30** is moved aside. The turntable is rotated to position, the selected slitter head at slitting station **34**, and cylinder **138** retracted to insert pin **142** into the recess adjacent the selected slitter head. Entry pinch roll assembly **30** is moved into position, and cylinder **154** is retracted to lower feed table **28**. Dog **124** is engaged to drive the selected slitter, and slitting is resumed. Since clutch **122** is an overrunning clutch, if desired, slitter drive motor **112** may be deenergized after threading of the strip through the slitter head and onto mandrel **36**, and the strip then pulled through the slitter head by recoiler drive motor **40**. In this mode of operation, which does not provide so fine an edge as when slitter drive motor **112** is operating, the knives are rotated by action of the strip being pulled therethrough. The overrunning clutch permits the arbors to rotate while shaft **118** is stationary, without necessity for disengaging dog **124**.

Apparatus according to the invention is highly advantageous. With the provision of a multiplicity of slitter heads on a rotatable turntable which carries the slitter heads between servicing and slitting stations, downtime and loss of production are minimized because setting-up and maintenance work can be performed on one slitter head while another is operating, and interchanging of slitter heads is effected in a short time. Provision of an arrangement whereby a common drive unit is used to operate any slitter head is highly advantageous in reducing the cost of the apparatus, since the drive unit need only be of a size sufficient to power one slitter head and only one drive unit need be employed. Provision of a movable feed table and a movable entry pinch roll assembly permits the advantageous use of such devices with multiple-head slitter apparatus without interference with its operation. The apparatus is highly flexible since slitter heads with particular setups can be stored at a servicing station, then quickly moved into position when desired.

Although the invention has been described in connection with a preferred embodiment, modifications of the preferred embodiment can be made without departing from the invention. Such modifications are within the scope of the appended claims.

I claim:

1. Multiple-head slitting apparatus, comprising

a base,

a plurality of power-drivable slitter heads,

mounting means for mounting the slitter heads on the base for movement about a common axis in a path of rotation in a generally horizonta plane,

a slitting station and a servicing station spaced from one another a distance along the path of rotation,

means for transporting material to be slit along a pass line having opposite sides and extending through the slitting station,

each slitter head including a plurality of elongated slitting arbors supported at opposite end portions and extending across the pass line from a location contiguous to one side of the pass line to a location contiguous to the other side of the pass line,

means for rotating the slitter heads about the common axis in the path of rotation in the generally horizontal plane to position a selected slitter head at the slitting station and another slitter head at the servicing station,

driving means for power driving the selected slitter head at the slitting station.

2. The multiple-head slitting apparatus of claim **1**, including

a stationary member projecting upwardly from the base,

the mounting means including a rotatable member mounted for rotational movement about the stationary member,

the driving means being carried by the stationary member and the slitter heads being carried by the rotatable member.

3. The multiple-head slitting apparatus of claim **2**, the rotatable member including a plurality of arms extending radially relative to the stationary member, each of the slitter heads being carried by an arm.

4. The multiple-head slitting apparatus of claim **3**, including

one slitting station and three servicing stations, each station being equidistantly spaced from adjacent stations around the path of rotation,

the rotatable member having four arms, each arm carrying a slitter head and extending generally perpendicularly relative to adjacent arms,

each slitter head being spaced from adjacent slitter heads a distance around the path of rotation equal to the distance between stations.

5. The multiple-head slitting apparatus of claim **2**, each slitting arbor being mounted for rotational movement,

each slitter head including power transmission means for transmitting power from the driving means on the stationary member to the arbors to rotate the arbors, and

the multiple-head slitting apparatus including means carried by the stationary member for engaging the driving means with the power transmission means of the selected slitter head, and for disengaging the driving means from the power transmission means of the selected slitter head.

6. The multiple-head slitting apparatus of claim **5**, the driving means including overruning clutch means for permitting operation of the power transmission means of the selected slitter head with the driving means inoperative to drive the selected slitter head and with the driving means engaging the power transmission means of the selected slitter head.

7. The multiple-head slitting apparatus of claim **2**, including

motor means carried by the stationary member for test-driving the other slitter head at the servicing station.

8. The multiple-head slitting apparatus of claim **1**, including

table means for delivering material to be slit along the pass line to the slitting station,

the table having an upper surface,

second mounting means for movably mounting the table means, and

means for moving the table means between

a first position in which the upper surface of the table means is on a level with the pass line with at least a portion of the table means in the path of rotation and one end portion of the table means adjacent the slitting station, and

a second position in which all portions of the table means are out of the path of rotation and the one end portion of the table means is spaced away from the slitting station.

9. The multiple-head slitting apparatus of claim **8**, the second mounting means including means mount-

ing the table means for movement about a generally horizontal pivot axis spaced along the pass line from the slitting station and out of the path of rotation,

the one end portion of the table means being elevated above the pass line in the second position of the table means.

10. The multiple-head slitting apparatus of claim **1**,

the slitting station having an entry side,

the multiple-head slitting apparatus including

a pinch roll assembly disposed on the entry side of the slitting station, and

means mounting the pinch roll assembly for movement between

a first position in which the pinch roll assembly is in the path of rotation and in the pass line, and

a second position in which the pinch roll assembly is out of the path of rotation and out of the pass line.

11. Multiple-head slitting apparatus, comprising

a base,

a plurality of power-drivable slitter heads,

mounting means for mounting the slitter heads on the base for movement in a path of rotation in a generally horizontal plane,

a slitting station and a servicing station spaced from one another a distance along the path of rotation,

means for rotating the slitter heads in the generally horizontal plane to position a selected slitter head at the slitting station and another slitter head at the servicing station,

driving means for power driving the selected slitter head at the slitting station, and

aligning means for aligning the selected slitter head in position at the slitting station,

the aligning means including

means forming a recess in the mounting means,

a projecting member movably mounted on the base and having a configuration conformed to the configuration of the recess, and

motive means for moving the projecting member into the recess when the selected slitter head is positioned at the slitting station.

12. The multiple-head slitting apparatus of claim **11**,

the recess being located adjacent the selected slitter head,

the projecting member being carried by a swingable member pivotally connected to the base adjacent the slitting station,

the motive means including means associated with the base for pivotally moving the swingable member between a first position in which the projecting member is received in the recess, and a second position in which the projecting member is withdrawn from the recess.

13. Multiple-head slitting apparatus, comprising

a base,

a plurality of power-drivable slitter heads,

mounting means for mounting the slitter heads on the base for movement about a common axis in a path of rotation in a generally horizontal plane,

a slitting station and a servicing station spaced from one another a distance along the path of rotation,

means for transporting material to be slit along a pass line having opposite sides and extending through the slitting station,

each slitter head including a plurality of elongated slitting arbors,

each slitting arbor having opposite end portions,

means for supporting the slitting arbors of each slitter head at opposite end portions at the slitting station,

the slitting arbors at the slitting station extending across the pass line from a location contiguous to one side of the pass line to a location contiguous to the other side of the pass line,

means for rotating the slitter heads about the common axis in the path of rotation in the generally horizontal plane to position a selected slitter head at the slitting station and another slitter head at the servicing station, and

driving means for power driving the selected slitter head at the slitting station.

14. The multiple-head slitting apparatus of claim 13, including

a stationary member carried by the base,

the mounting means including a rotatable member mounted for rotational movement,

the driving means being carried by the stationary member and the sliter heads being carried by the rotatable member.

15. The multiple-head slitting apparatus of claim 14,

the rotatable member including a plurality of arms extending radially relative to the stationary member,

each of the slitter heads being carried by an arm.

16. The multiple-head slitting apparatus of claim 15, including

one slitting station and three servicing stations, each station being equidistantly spaced from adjacent stations around the path of rotation,

the rotatable member having four arms, each arm carrying a slitter head and extending generally perpendicularly relative to adjacent arms,

each slitter head being spaced from adjacent slitter heads a distance around the path of rotation equal to the distance between stations.

17. The multiple-head slitting apparatus of claim 14,

each slitting arbor being mounted for rotational movement,

each slitter head including power transmission means for transmitting power from the driving means on the stationary member to the arbors to rotate the arbors, and

the multiple-head slitting apparatus including means carried by the stationary member for engaging the driving means with the power transmission means of the selected slitter head, and for disengaging the driving means from the power transmission means of the selected slitter head.

18. The multiple-head slitting apparatus of claim 17,

the driving means including overrunning clutch means for permitting operation of the power transmission means of the selected slitter head with the driving means inoperative to drive the selected slitter head and with the driving means engaging the power transmission means of the selected slitter head.

19. The multiple-head slitting apparatus of claim 14, including

motor means carried by the stationary member for test-driving the other slitter head at the servicing station.

20. The multiple-head slitting apparatus of claim 13, including

table means for delivering material to be slit along the pass line to the slitting station,

second mounting means for movably mounting the table means, and

means for moving the table means between a first position in which at least a portion of the table means is in the path of rotation and one end portion of the table means is adjacent the slitting station, and

a second position in which all portions of the table means are out of the path of rotation.

21. The multiple-head slitting apparatus of claim 20,

the second mounting means including means mounting the table means for movement about a generally horizontal pivot axis out of the path of rotation.

22. The multiple-head slitting apparatus of claim 13,

the slitting station having an entry side,

the multiple-head slitting apparatus including

a pinch roll assembly disposed on the entry side of the slitting station, and

means mounting the pinch roll assembly for movement between

a first position in which the pinch roll assembly is in the path of rotation and in the pass line, and

a second position in which the pinch roll assembly is out of the path of rotation and out of the pass line.

References Cited

The following references, cited by the Examiner, are of record in the patented file of this patent or the original patent.

UNITED STATES PATENTS

2,958,248	11/1960	Renard	83—433 X
1,424,309	8/1922	Johnson	83—492 X
3,260,146	7/1966	Child	83—479
3,478,654	11/1969	Willard	83—479 X
3,503,293	3/1970	Sander	83—564 X
1,959,424	5/1934	Hawkins	83—492 X
3,727,503	4/1973	Braner et al.	83—479

ROY LAKE, Primary Examiner

J. F. COAN, Assistant Examiner

U.S. Cl. X.R.

83—479, 500, 552

UNITED STATES PATENT OFFICE

CERTIFICATE OF CORRECTION

Patent No. Re. 27,918 Dated February 12, 1974

Inventor(s) David M. Montguire

It is certified that error appears in the above-identified patent and that said Letters Patent are hereby corrected as shown below:

Column 3, line 61, "shaft 14" should be --shaft 114--.

Column 5, line 63, "horizonta" should be --horizontal--.

Column 8, line 16, "sliter" should be --slitter--.

Signed and sealed this 16th day of July 1974.

(SEAL)
Attest:

McCOY M. GIBSON, JR.
Attesting Officer

C. MARSHALL DANN
Commissioner of Patents

FORM PO-1050 (10-69)

55

USCOMM-DC 60376-P69
* U.S. GOVERNMENT PRINTING OFFICE : 1969 O—366-334