

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
22 December 2005 (22.12.2005)

PCT

(10) International Publication Number
WO 2005/120942 A1

(51) International Patent Classification⁷: **B63G 8/42**,
B63B 21/66, B63G 7/00

(21) International Application Number:
PCT/EP2005/052545

(22) International Filing Date: 2 June 2005 (02.06.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0412677.7 7 June 2004 (07.06.2004) GB

(71) Applicant (for all designated States except US): **THALES UK PLC** [GB/GB]; Richmond Court, 309 Fleet Road, Fleet GB GU51 3NY (GB).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **AXFORD, Nigel** [GB/FR]; Thales, Intellectual Property, 31-33, avenue Aristide Briand, F-94117 CX Arcueil (FR).

(74) Agents: **LUCAS, Laurent** et al.; Thales, Intellectual Property, 31-33, avenue Aristide Briand, F-94117 CX Arcueil (FR).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: TOWING DEVICE

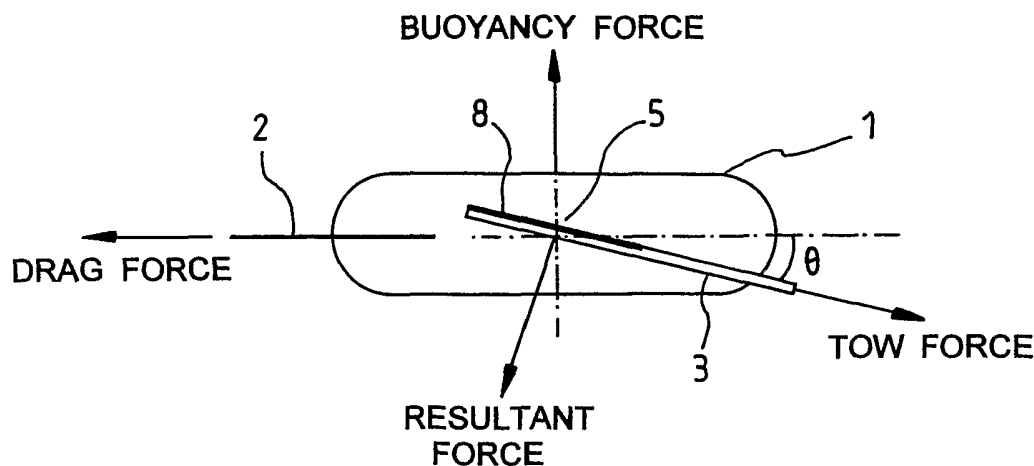

(57) Abstract: An apparatus for towing behind an underwater vehicle has a body (1) and a yoke (3) pivotally connected to the body at a pivot point (5) and having a tether (4) remote from the pivot point (5) by which the apparatus is towed. The yoke (3) has wings (8) which generate a resultant force on the body (1) when the apparatus is towed. By varying the orientation of the yoke (3) relative to the body (1), the magnitude of the resultant force may be varied. The resultant force tends to reduce the displacement of the tether (4) relative to the pivot point (5) in at least one plane, thereby generating a force to counter the buoyancy of the apparatus, and so stabilise the apparatus when it is being towed.

WO 2005/120942 A1

TOWING DEVICE

The present invention relates to an apparatus for towing
behind an underwater vehicle, providing improved diving
5 and towing stability.

It is known to diving and stability of a buoyant
underwater body using a yoke, which is attached to the
body approximately at its centre. This helps to provide
10 stable towing.

However, the known towing devices do not counteract
forces on the towed body that tend to destabilise the
towing operation. In particular, they are not designed
15 to counteract positive buoyancy of towed objects.

The present invention relates to an apparatus which has
improved stability during underwater towing, and in
particular which has means which help to oppose
20 destabilising forces acting on the towed body. At its
most general the present invention proposes that the
connection of the towing cable or other link is via a
pivotal device with a wing generating a force on the
body.

25

In a first aspect of the invention, there may be provided
an apparatus for towing behind an underwater vehicle,
comprising

30 a device pivotably connectable to the body at least
one pivot point, having a towing point remote from said
pivot point,

wherein the device comprises at least one wing which
is adapted to generate a resultant force on the body, the

magnitude of which is variable in dependence on the orientation of the device relative to the body.

When the apparatus is being towed by a vehicle, the
5 relative water flow causes the wing to generate a force (the resultant force). In use this force tends to reduce the displacement of the tow point from the pivot point, in at least one plane. The resultant force on the body has two components, a force perpendicular to the
10 direction of movement of the body and a drag force due to the wing parallel to the direction of movement of the body. As the angle of the wing changes relative to the body, these components change, varying both the direction and magnitude of the resultant force.

15 The displacement may be vertical and/or lateral displacement. The wing may reduce the vertical and/or lateral element of this displacement. In other words, the forces acting on the wing tend to improve the
20 alignment of the pivot point with the vehicle and/or the tow point in the direction of movement, but they need not act to bring them into perfect alignment.

Since the orientation magnitude of the resultant force is
25 variable depending of the orientation of the device relative to the body, the stabilisation is self-regulating. Altering the orientation of the device relative to the body alters the angle of attack of the lift-providing surface on the wing. For instance, where
30 the displacement of the pivot point from the axis of vehicle movement (and hence from the tow point) is high, the wing will present a high angle of attack which will cause a resultant force tending to oppose this displacement. However, as the pivot point is brought

into line behind the tow point the angle of attack will be reduced (i.e., the surface of the wing will be presented to the water flow at a reduced angle) and the lift force will also be reduced.

5

The size of the lift force will also be affected by the area of the lift surface. Preferably, the wing has a substantially planar surface which acts as the lift surface. More preferably, the wing is a plane.

10

The direction of the lift force may also be switchable in dependence on the orientation of the device relative to the body. The direction in which the lift force is applied will depend on whether the angle of attack of the

15 wing's lift surface is positive or negative.

For example, and in respect of preferred embodiments of the invention, if the body is raised relative to the axis of movement of the vehicle and hence to the tow point,

20 then the towing device and the wing will be orientated relative to the body such that the lift force tends to depress the body. However, if the pivot point is lower than the tow point, then the towing device and the wing will be orientated relative to the body such that the
25 lift force tends to raise the body.

Preferably, the wing is adapted to generate a force which tends to control vertical displacement of the pivot point from the tow point at any particular speed.

30

For example, the wings may be arranged such that if the towing device is orientated with first and second connection means located on a horizontal axis, then the wings extend substantially horizontally.

This arrangement is particularly desirable when the towed body tends to rise or sink relative to the direction of movement. Hence, the arrangement is particularly
5 suitable for towed bodies with positive or negative buoyancy, and most preferably positive buoyancy.

Alternatively, the wings may be adapted to generate a lift force which tends to reduce lateral displacement of
10 the pivot point from the axis of movement of the towing vehicle. For example, the wings may be arranged such that if the towing device is orientated with first and second connection means located on a horizontal axis, then the wings extend substantially vertically.

15 In a preferred embodiment, the towing device has two arms which are adapted to extend on either side of the towed body, wherein each arm is connectable to the body at a pivot point. One such arrangement is a yoke. It may be
20 preferred that the two arms of the towing device or yoke are connected to a shaft, which is adapted to pass through a corresponding aperture in the towed body so as to allow the towing device or yoke to pivot about the axis of the shaft. Alternatively, each arm may be
25 connected to a separate region of the towed body.

Preferably, the pivot points lie on an axis which passes through the body's centre of gravity or centre of buoyancy. This helps to stabilise the body, since a lift
30 force applied to the pivot point acts in direct opposition to the negative or positive buoyancy of the body, and does not tend to tilt the body about the pivot point.

The term "pivot point" is intended to refer to any or all points of connection between the towing device and the towed body, where said connection allows the towed body to pivot relative to the device. For example, if
5 the towing device comprises a shaft extending between two arms, which shaft passes through a corresponding aperture in the towed body, then all parts of the body in contact with the shaft are considered to be a pivot point.

10 Where the towing device comprises two arms, then it may be preferred that each arm bears a wing or wings. This may help to avoid rotational forces on the towed body.

The provision of an apparatus according to the present
15 invention may result in some embodiments in improved stability, reduced drag and/or improved diving characteristics of the towed body.

In some embodiments the apparatus of the present
20 invention is to allow a buoyant body to be depressed sufficiently to allow it to be towed to a depth underwater with good stability, and at high speeds. The vertical displacement of the buoyant body relative to the dive angle of the vehicle results in the wing presenting
25 an oblique angle to the relative water flow, and this results in a lift force which tends to push the body downwards, opposing its buoyancy. The lift force will increase with the speed of movement.

30 It may be preferred that the towed body has a stabilising tail, for example a tail which is arranged to resist pivoting of the body about its pivot point. Preferably the tail extends rearwardly.

The design can in addition incorporate a control system such as means for actuating the wings. However, in preferred embodiments the apparatus does not require an additional control system (e.g., a system which is
5 electronically or externally controlled). Therefore, in preferred embodiments, the apparatus does not have such a system.

An embodiment of the invention will now be described by
10 way of example, with reference to the accompanying drawings, which are intended to illustrate but not to limit the invention, and in which ;

Figure 1 shows a side view of a towed body and towing
15 device of the embodiment.

Figure 2 shows a front view of a towed body and towing device of the embodiment.

20 Figures 1 and 2 show a buoyant body 1 having a stabilising tail 2 which extends from the rear of the body. The body 1 is a sealed watertight body, which may, for example contain electrical components for permitting signalling to or from the body 1.

25

The buoyant body 1 is pivotally mounted to a U shaped yoke 3 having a tether point 4 at the bottom of the U. The yoke 3 is freely pivotable about its connection point
5 at the approximate centre of the body 1. A cable or
30 other link (not shown) is connected to the tether point and extends to a powered underwater vehicle (not shown) which is driven to tow the body 1 in the water.

The yoke has two arms 6 and 7. Each arm has a dive plane 8 extending laterally relative to the buoy. When the yoke is horizontal, then the dive planes 8 also extend horizontally.

5

In use, the apparatus will be towed from its tether point 4. Figure 1 shows the forces which will be acting on the dive plane when the direction of tow is forwards (i.e., from left to right in figure 1) The buoyancy of the body 10 1 caused it to be raised relative to the vehicle, and as a result the yoke 3 has pivoted about the connection point 5 to the body 1 and about its tether 4. The yoke defines an angle θ relative to the direction of movement of the vehicle and hence to the relative water flow. The 15 dive planes 8 are presented to the water flow at the same angle θ . This results in a resultant force exerted on the dive plane 8, which tends to depress the body.

As the forward tow speed increases the buoyant body is 20 depressed by the resultant force. The size of the force is dependent on the area of the dive planes 8, the angle of inclination θ to water flow and the speed of the flow over them.

25 The resultant force on the buoyant body is the vector summation of all of the forces acting thereon (shown in figure 1). In particular, the forces are the tow force, the buoyancy force due to the inherent buoyancy of the body 1, the drag force due to the drag of the body 1 in 30 the water, and the resultant force due to the dive planes. Since the yoke 3 is attached to the body at its centre of buoyancy, all these forces act at a common point. As a result, the tow force and the resultant force

do not exert a pivoting force on the body 1, and the body 1 is kept stable by the action of the stabilising tail 2.

As the body 1 descends closer to the depth as the tether
5 point 4, the angle of inclination of the dive planes 8 to the water flow decreases and the lift force is reduced. At any given speed of the buoyant body 1 an equilibrium point is reached for all the forces in the system.

CLAIMS

1. An apparatus for towing behind an underwater
5 vehicle, comprising
a device pivotably connectable to the body at at
least one pivot point, having a towing point remote from
said pivot point,
wherein the device comprises at least one wing which
10 is adapted to generate a resultant force on the body, the
orientation and magnitude of which is variable in
dependence on the orientation of the device relative to
the body.
- 15 2. The apparatus of claim 1, wherein the towed body has
positive buoyancy.
3. The apparatus of claim 1 or claim 2, wherein the
wing is adapted to generate a resultant force which tends
20 to oppose vertical displacement of the pivot point from
the towing point.
4. The towing device of any of the preceding claims,
wherein the towing device has two arms which are adapted
25 to extend on either side of the towed body, wherein the
arms have connecting means for pivotably connecting the
towing device to the body.
5. The towing device of claim 3, wherein the device
30 comprises a wing extending from each arm.
6. The apparatus according to claim 4 or claim 5,
wherein the connecting means for pivotably connecting the
towing device to the body lie on an axis which runs

through the centre of gravity or centre of buoyancy of the body.

7. The towing device according to any one of the
5 preceding claims, wherein the wing has a planar surface.

8. The apparatus of any one of claims 6-10, wherein the towed body has a stabilising tail.

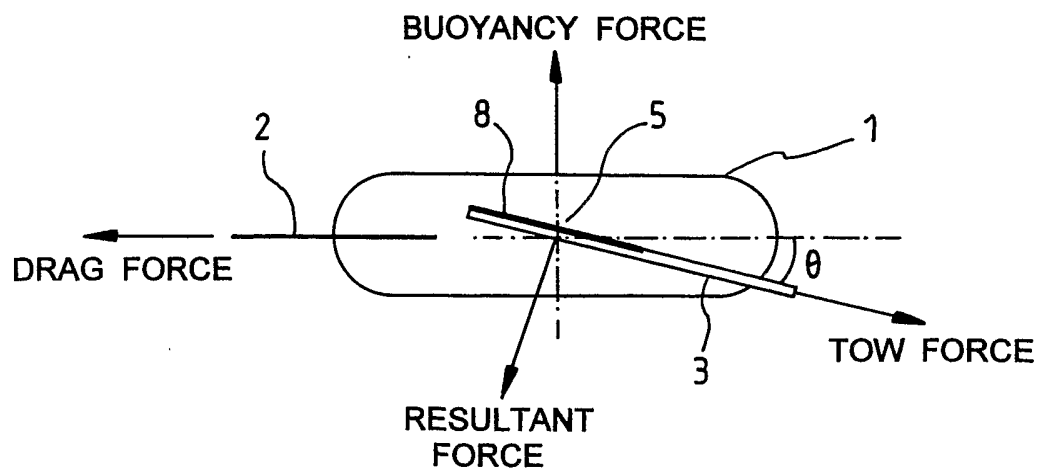


FIG.1

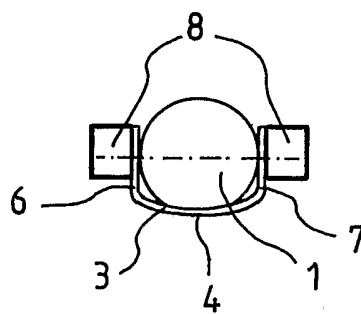


FIG.2

INTERNATIONAL SEARCH REPORT

International Application No
PCT/EP2005/052545

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 B63G8/42 B63B21/66 B63G7/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B63B B63G A01K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EP0-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	GB 2 309 952 A (* CLEVIS FULCRUM LIMITED) 13 August 1997 (1997-08-13)	1-7
Y	figures	8
A	US 4 463 701 A (PICKETT ET AL) 7 August 1984 (1984-08-07)	1
Y	figures	8
A	US 4 220 109 A (CHOLET, JACQUES) 2 September 1980 (1980-09-02)	1
A	US 3 089 453 A (BUCK FRANCIS E ET AL) 14 May 1963 (1963-05-14)	1
	figures	
	----- -/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

27 September 2005

Date of mailing of the international search report

05/10/2005

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

van Rooij, M

INTERNATIONAL SEARCH REPORT

International Application No
PCT/EP2005/052545

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 000 110 A (MOORE ET AL) 19 March 1991 (1991-03-19) figures -----	1
A	GB 2 244 249 A (* SOCIETE ECA) 27 November 1991 (1991-11-27) figures -----	1

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP2005/052545

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
GB 2309952	A	13-08-1997	NONE	
US 4463701	A	07-08-1984	NONE	
US 4220109	A	02-09-1980	AU 522532 B2	10-06-1982
			AU 4009478 A	27-03-1980
			BE 870541 A1	19-03-1979
			CA 1108482 A1	08-09-1981
			DE 2841093 A1	05-04-1979
			DK 419878 A	24-03-1979
			ES 473558 A1	01-04-1979
			FR 2404254 A1	20-04-1979
			GB 2005209 A	19-04-1979
			IT 1099138 B	18-09-1985
			JP 1367878 C	11-03-1987
			JP 54057780 A	09-05-1979
			JP 61035036 B	11-08-1986
			MX 4194 E	25-01-1982
			NL 7809618 A	27-03-1979
			NO 783229 A	26-03-1979
			SE 427222 B	14-03-1983
			SE 7809936 A	24-03-1979
			SU 938755 A3	23-06-1982
US 3089453	A	14-05-1963	NONE	
US 5000110	A	19-03-1991	NONE	
GB 2244249	A	27-11-1991	DE 3203456 C1	23-04-1992
			FR 2655940 A1	21-06-1991