



(86) **Date de dépôt PCT/PCT Filing Date:** 2012/06/11
(87) **Date publication PCT/PCT Publication Date:** 2013/12/19
(45) **Date de délivrance/Issue Date:** 2018/01/09
(85) **Entrée phase nationale/National Entry:** 2014/12/02
(86) **N° demande PCT/PCT Application No.:** EP 2012/061010
(87) **N° publication PCT/PCT Publication No.:** 2013/185800

(51) **Cl.Int./Int.Cl. A61F 13/475** (2006.01)


(72) **Inventeurs/Inventors:**
FREDRIKSON, SUSANNE, SE;
JOHANSSON, CHARLOTTE, SE

(73) **Propriétaire/Owner:**
SCA HYGIENE PRODUCTS AB, SE

(74) **Agent:** RIDOUT & MAYBEE LLP

(54) **Titre : ARTICLE ABSORBANT**

(54) **Title: ABSORBENT ARTICLE**

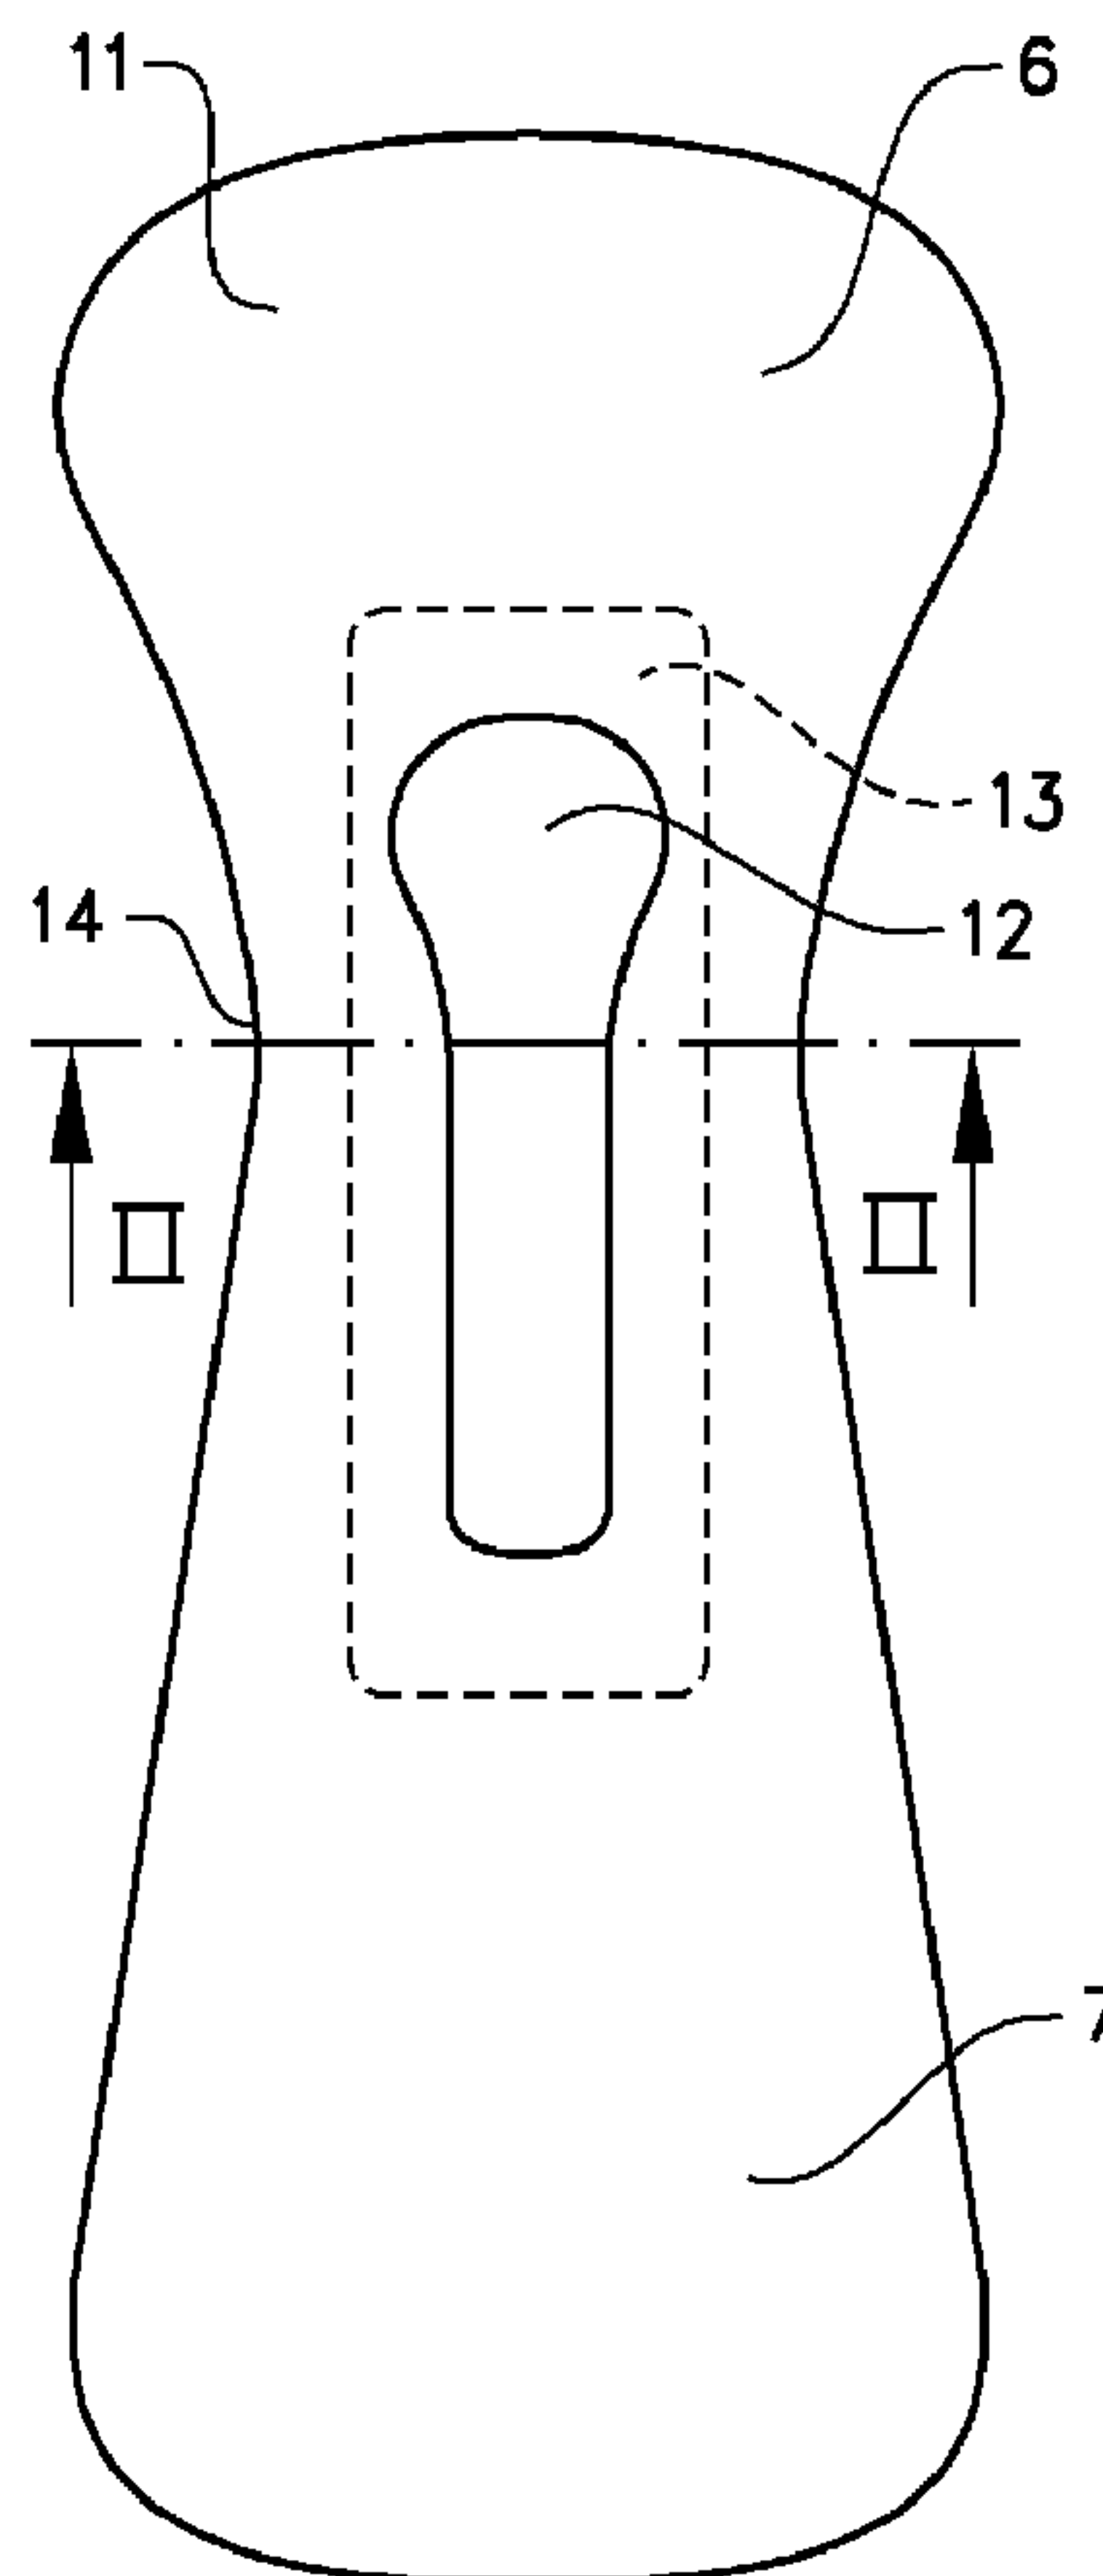


(57) **Abrégé/Abstract:**

The invention concerns an absorbent article (1) such as a sanitary napkin or incontinence pad having longitudinal side edges and transversal end edges and comprising a fluid permeable topsheet (8), a fluid impermeable backsheet (9) and an absorbent core

(57) Abrégé(suite)/Abstract(continued):

(10) located between the topsheet (8) and the backsheet (9). The absorbent core (10) comprises a first absorbent layer (11) having an opening (12) extending there through and a fluid flow control structure (13) located between said first absorbent layer (11) and said backsheet (9). The first absorbent layer (11) has a longitudinal front portion (6) and a longitudinal back portion (7) and a narrow transversal transition (14) located between said front portion (6) and said back portion (7). The width of the narrow transversal transition (14) is 50-75% of the widest transversal width of the front portion (6) of the first absorbent layer (11) and 20-50% of the longitudinal length of the opening (12) is located in the front portion (6) of the first absorbent layer (11).

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

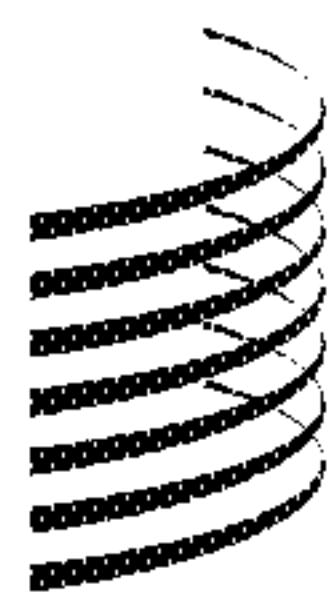(19) World Intellectual Property
Organization
International Bureau

WIPO | PCT

(10) International Publication Number
WO 2013/185800 A1(43) International Publication Date
19 December 2013 (19.12.2013)(51) International Patent Classification:
A61F 13/475 (2006.01)

(21) International Application Number:

PCT/EP2012/061010

(22) International Filing Date:

11 June 2012 (11.06.2012)

(25) Filing Language:

English

(26) Publication Language:

English

(71) Applicant (for all designated States except US): **SCA HYGIENE PRODUCTS AB** [SE/SE]; S-405 03 Göteborg (SE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **FREDRIKSON, Susanne** [SE/SE]; Eklanda Skog 127, S-431 49 Mölndal (SE). **JOHANSSON, Charlotte** [SE/SE]; Karl Staaffsgatan 20 C, S-417 27 Göteborg (SE).(74) Agents: **LÖWENADLER, Jenny** et al.; SCA Hygiene Products, SCA Patent Department, S-405 03 Göteborg (SE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,

[Continued on next page]

(54) Title: ABSORBENT ARTICLE

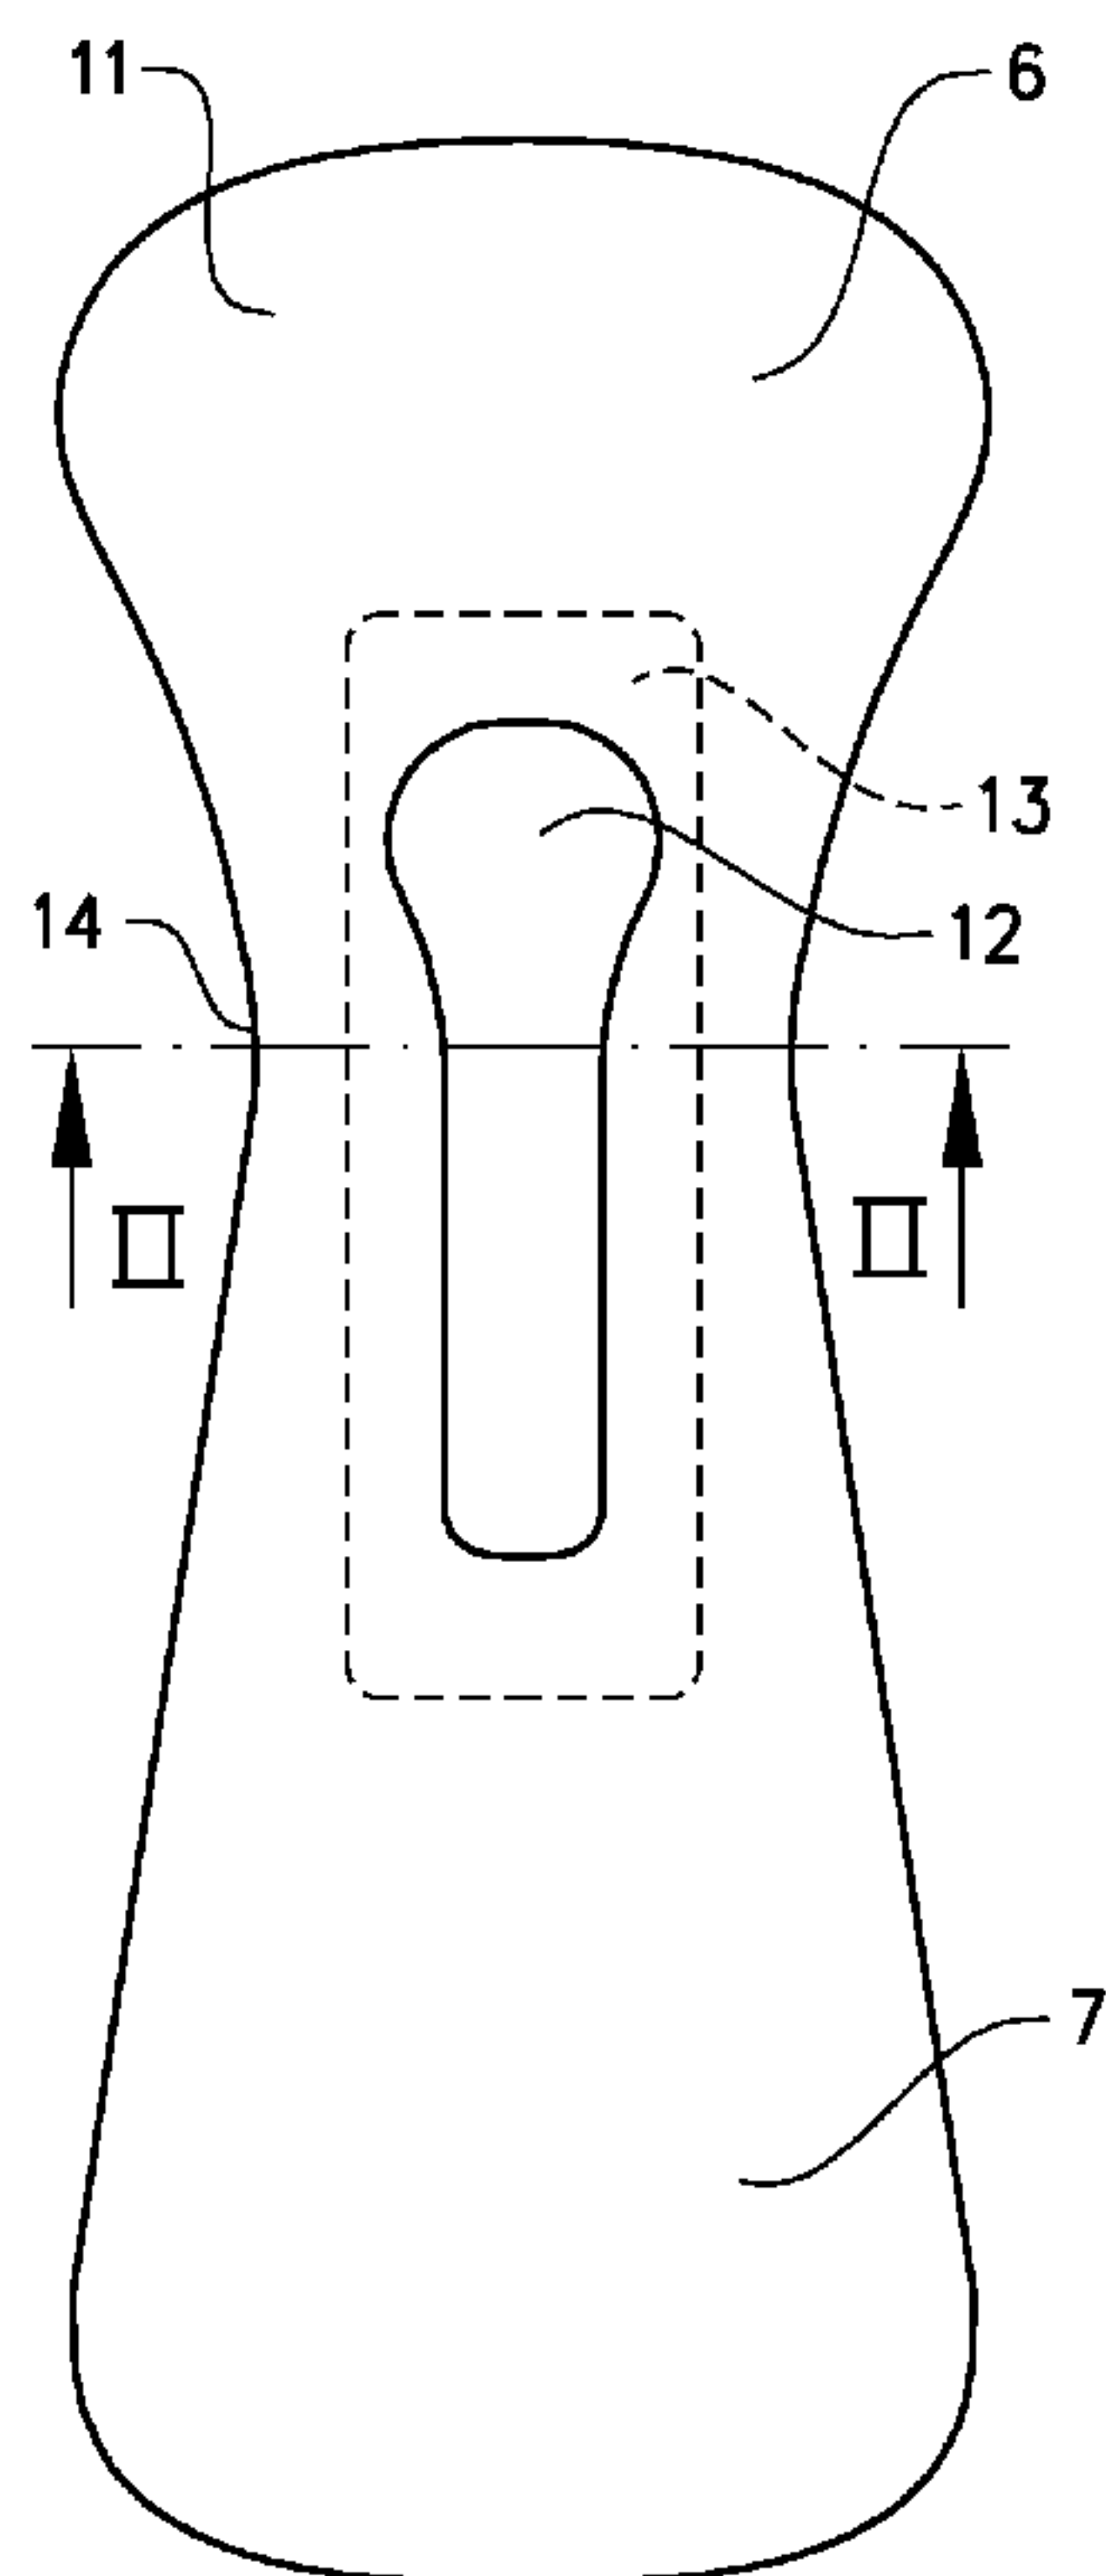


FIG. 1

(57) Abstract: The invention concerns an absorbent article (1) such as a sanitary napkin or incontinence pad having longitudinal side edges and transversal end edges and comprising a fluid permeable topsheet (8), a fluid impermeable backsheet (9) and an absorbent core (10) located between the topsheet (8) and the backsheet (9). The absorbent core (10) comprises a first absorbent layer (11) having an opening (12) extending there through and a fluid flow control structure (13) located between said first absorbent layer (11) and said backsheet (9). The first absorbent layer (11) has a longitudinal front portion (6) and a longitudinal back portion (7) and a narrow transversal transition (14) located between said front portion (6) and said back portion (7). The width of the narrow transversal transition (14) is 50-75% of the widest transversal width of the front portion (6) of the first absorbent layer (11) and 20-50% of the longitudinal length of the opening (12) is located in the front portion (6) of the first absorbent layer (11).

WO 2013/185800 A1



TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG). **Published:**

— *with international search report (Art. 21(3))*

Declarations under Rule 4.17:

— *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*

ABSORBENT ARTICLE

TECHNICAL FIELD

5 The present invention concerns an absorbent article such as a sanitary napkin or incontinence pad comprising an absorbent core having an opening extending there through.

BACKGROUND OF THE INVENTION

10 Absorbent articles of the kind that is worn inside ordinary underpants include absorbent napkins or pads for adult incontinence or feminine use.

The napkins or pads are generally provided with an absorbent core to receive and retain body liquids. In order for such absorbent articles to function
15 efficiently, the absorbent core must quickly acquire body liquids into the structure from the point of application and subsequently distribute the body liquids within and throughout the absorbent core to provide maximum leakage containment. An acquisition/distribution layer in connection to the core and an
20 opening of the core aids when subsequent insults are directed to the same local area as previous insults, as the local area tends to be already filled with liquid from the previous insult.

As these types of articles have to be sized and configured to fit in the limited space available in the crotch portion of the underwear, a particular problem is
25 that they may leak at the side edges, before the full absorption capacity of the article has been utilized. The fluid will instead flow on the topsheet and out over the side edges of the article where it can leak out and soil the wearer's clothing. A further drawback when fluid flows on the outside of the topsheet is that a large portion of the body-contacting topsheet will be wet. This is of course
30 highly undesirable as it makes the article unhygienic and unpleasant to wear.

Great efforts have been made in the past in order to overcome the side leakage problem in relation to napkins and pads for incontinence or feminine use.

WO 2009067059 A1 discloses an absorbent article comprising an absorbent core having fold indications and a forming element in order to obtain a desired shape of the article. Although prior art designs may alleviate the side leakage problem to some extent, there is still a great need for further improvements of the side leakage security for the kind of absorbent article that is worn in the crotch portion of an undergarment.

SUMMARY OF THE INVENTION

It is an object of the present invention to provide an improved solution that alleviates the mentioned drawback with present articles.

The invention concerns an absorbent article, comprising an article such as a sanitary napkin or incontinence pad having longitudinal side edges and transversal end edges and comprising a fluid permeable topsheet, a fluid impermeable backsheet and an absorbent core located between the topsheet and the backsheet. The absorbent core comprises a first absorbent layer having an opening extending there through and a fluid flow control structure located between said first absorbent layer and said backsheet. The first absorbent layer has a longitudinal front portion and a longitudinal back portion and a narrow transversal transition located between said front portion and said back portion. The width of the narrow transversal transition is 50-75% of the widest transversal width of the front portion of the first absorbent layer and 20-50% of the longitudinal length of the opening is located in the front portion of the first absorbent layer. Thereby an absorbent article is achieved which will stay in place during use and which ensures that liquid will be directed to the opening and pass into the fluid flow control structure and the core.

The width of the narrow transversal transition is preferably 55-70% of the widest transversal width of the front portion of the first absorbent layer in order to obtain a good hook behind the tendons of the wearer. The width of the narrow transversal transition may be 50-75%, preferably 55-70% of the widest transversal width of the back portion of the first absorbent layer in order to ensure an improved fit of the article. The widest transversal width of the front

portion and the back portion may be about 75-170 mm. The longitudinal extension of the narrow transversal transition may be 5-20% of the longitudinal length of the first absorbent layer to further ensure that the article has a proper fit and stays in place during use. The width of the narrow transversal transition of the first absorbent layer may be less than 130 mm and larger than 30 mm, preferably less than 90 mm and larger than 50 mm for an improved fit of the article between the tendons of the wearer. The longitudinal length of the first absorbent layer may be about 230-400 mm.

The front portion of the first absorbent layer may constitute 20-40% of the total longitudinal length of the first absorbent layer. An asymmetric shape of the article resulting from a shorter longitudinal length of the front portion of the first absorbent layer in relation to the back portion further improves the fit and the leakage security of the article.

The first absorbent layer has at least one opening extending completely through the layer, thereby forming a cavity in the article. 20-50%, preferably 20-40% of the longitudinal length of the opening may be located in the front portion of the first absorbent layer in order to ensure a proper placement of the hole in relation to the tendons of the wearer of the article. The longitudinal length of the opening in the first absorbent layer may be 10-60%, preferably 20-40% of the longitudinal length of the first absorbent layer in order to ensure fluid flow into the opening and not on the outside of the topsheet. The transverse dimension of the opening may be larger in the front portion of the first absorbent layer than the transverse dimension of the opening in the back portion of the first absorbent layer in order to improve the intake of fluid through the hole and further into the fluid flow control structure. The first absorbent layer may have one opening only for both leakage security and improved feeling of safety for the user.

A second absorbent layer may be located between the fluid flow control structure and the backsheet in order to further increase the absorption capacity of the article. The second absorbent layer may have a smaller surface area than the first absorbent layer in order to enhance a bowl shape of the article

with increased capacity. The first absorbent layer may extend further forward and rearward in the absorbent article than the second absorbent layer. The article may comprise one or more further absorbent layers.

5 The fluid flow control member is arranged between the first absorbent layer and the backsheet, but may also be arranged between the first absorbent layer and a second absorbent layer. The first absorbent layer may be placed beneath and in direct contact with the topsheet, or may alternatively be placed in indirect contact with the topsheet through one or more intervening components such as
10 tissue layers, acquisition layers or further absorbent layers. Similarly, the second absorbent layer may be placed directly beneath the fluid flow control member and in direct contact with the fluid flow control member and the backsheet, or may be in indirect contact with one or both of those components by intervening components. By arranging the fluid flow control member
15 between the first and second absorbent layers, it forms a channel in the absorbent article and leads the fluid to the back and front of the article. The contact area between the fluid flow control member and the absorbent core increases which facilitates distribution and rapid absorption of liquid in the article.

20

The absorbent article is in the form of an incontinence pad or a sanitary napkin, and may be for feminine or incontinence use, and may have an elongate, generally rectangular shape when fully extended in all directions. In this context, a generally rectangular shape is intended to encompass also that, for
25 instance, the corners of the absorbent article may be rounded, or that the edges of the absorbent article may not be completely linear. The absorbent article may have two longitudinal side edges having equal length and extending generally in the same direction.

30 The topsheet and the backsheet of the absorbent article may extend together laterally outside the first absorbent layer along the whole circumference of the article and be connected to each other in an edge joint around the periphery of the absorbent core for leakage security. The topsheet may preferably cover part of the backsheet to form an edge barrier.

The topsheet may consist of any material which is suitable for the purpose, i.e. be soft and liquid pervious. Examples of topsheet materials are nonwoven materials, perforated plastic films, plastic or textile mesh, and fluid permeable
5 foam layers. Laminates consisting of two or more topsheet materials may also be employed, as are top sheets consisting of different materials within different parts of the fluid permeable wearer-facing surface.

The backsheet is fluid impermeable. However, backsheet materials that are
10 only fluid repellant may be used particularly in instances where relatively small amounts of urine are expected to be taken up. The backsheet may be a thin, flexible, fluid-impermeable plastic film, such as of polyethylene or polypropylene, but fluid-impermeable nonwoven materials, fluid impermeable foams and fluid impermeable laminates are also contemplated within the scope
15 of the invention. The backsheet may preferably be breathable, implying that air and vapor may pass through the backsheet. Furthermore, the backsheet may have an outer, garment-facing surface of a textile material such as nonwoven.

The absorbent core comprises a first absorbent layer. It may comprise one
20 absorbent layer only, but may comprise a second or further absorbent layer. The absorbent core may be made up of any suitable absorbent or fluid uptake material, such as one or more layers of cellulose fluff pulp, foam, highloft, etc. The absorbent core may contain fibers or particles of highly absorbent polymer material, commonly known as superabsorbents, which are materials having the
25 ability to absorb and retain large quantities of fluid upon formation of a hydrogel. The superabsorbents may be mixed with cellulose fluff pulp and/or may be arranged in pockets or layers in the absorbent core. The fibres may be pulp fibres and the superabsorbent material may be polyacrylate-based particles. The absorbent structure may comprise 40-80% superabsorbents and
30 60-20% pulp fibres. The absorbent core may further incorporate components for improving the properties of the absorbent core. Some examples of such components are binder fibers, fluid-dispersing materials, wetness indicators, fluid acquisition materials, etc.

The absorbent layers may be homogeneous structures or may in themselves be layered structures such as absorbent laminates of the same or different materials. The absorbent layers may have uniform thickness or may vary in thickness in different parts of the layers. Similarly, the basis weight and composition may vary within the absorbent layers. By way of example, an absorbent layer may comprise a mixture of absorbent and/or non-absorbent fibres and superabsorbent material, wherein the ratio of superabsorbent material to fibres may vary in the layer. One or more compressed lines, acting as hinges, may advantageously be arranged in the first absorbent layer, which may be relatively stiff, to facilitate folding of the absorbent article.

The topsheet preferably extends down into the cavity that is defined by the opening in the first absorbent layer and the surface of the fluid flow control structure that is facing the topsheet. Thereby, the cavity will be lined with topsheet material and will be accessible from the outer body facing surface of the absorbent article. A part of the fluid that is collected in the cavity may be absorbed by the first absorbent layer through the walls of the cavity. However, the major part of the fluid will continue downward in the absorbent article, through the bottom of the cavity and into the fluid flow control member where it is distributed longitudinally and laterally along the flow control member.

The fluid flow control member may be of rectangular shape and may be surrounded in the longitudinal and lateral directions by portions of the absorbent core. Other shapes and configurations for the fluid flow control structure may also be used. However, it is generally advantageous if the fluid flow control member has smaller width and is shorter than the absorbent core, as this facilitates distribution to a large area of the absorbent core.

Elastic members may be arranged along each longitudinal side edge of the sanitary napkin, at least laterally outside the narrow transversal transition between the front portion and the back portion of the first absorbent layer, to further improve the shape of the article. The elastic members are preferably located there between the topsheet and the backsheet. The absorbent article has preferably an interspace, located along each side edge of the first

absorbent layer, substantially free from absorbent material in order to obtain a slim shape and improved fit of the article on the wearer. The interspace may be located adjacent the narrow transversal transition of the first absorbent layer in an area between the elastics, located at the periphery of the article, and the periphery of the first absorbent layer.

The absorbent article may further include fastening means for fastening of the absorbent article inside a supporting pant garment, such as a pair of underpants. The fastening means may be covered by a releasable protective layer.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention will be more closely described with reference to the enclosed Figures, in which:

Figure 1 is a plan view of the first absorbent layer and the fluid flow control structure of an absorbent article according to the invention.

Figure 2 is a cross-sectional view along the line II-II in Figure 1.

Figure 3 is a plan view of an embodiment of an absorbent article according to the invention.

Figure 4 is a cross-sectional view along the line II-II in Figure 3.

Figure 5 is an exploded 3-D view of the absorbent article of Figure 3.

Figure 6 is a side elevation view of an embodiment of an absorbent article according to the invention.

DETAILED DESCRIPTION OF DRAWINGS

The invention will be described more closely below by an exemplary embodiment. The invention may however be embodied in many different forms and should not be construed as limited to the embodiments set forth in the drawings and the description thereto.

Figure 3 schematically discloses an absorbent article 1 in the form of an incontinence pad seen from the side that is intended to be facing towards a wearer's body when the article 1 is being worn. The article 1 has two longitudinal side edges 2, 3 having equal length and extending generally in the

same direction. Front and rear end edges 4, 5 extend transversely at the ends of the article 1. The rear end edge 5 is intended to be orientated rearwards during use of the article 1, and the front end edge 4 is intended to be facing forwards towards the abdomen of the wearer. The article 1 comprises a fluid permeable topsheet 8, a fluid impermeable backsheet 9 and an absorbent core 10 having a first absorbent layer 11 and a fluid flow control structure 13, enclosed between the topsheet 8 and the backsheet 9 as seen in figure 4. The core in figures 3-5 comprises a second absorbent layer 15 located between the fluid flow control structure 13 and the backsheet 9. The topsheet 8 and the backsheet 9 of the article 1 are shown to extend together laterally outside of the first absorbent layer 11 along the whole circumference and are connected to each other in an edge join around the periphery of the article 1. The edge joint may be formed in any suitable manner as known in the art such as by means of adhesive, ultrasonic bonding, thermo-bonding, stitching, etc. The topsheet 8 and the backsheet 9 may consist of any material suitable, such as a non-woven or film material, for the particular purpose, as disclosed herein.

Elastic members 16, such as bands of elastic material, e.g. foam elastics, is arranged between the topsheet 8 and the backsheet 9 and along the longitudinal side edges of the first absorbent layer 1. The elastics are located in the area outside the narrow transversal transition 14, which is located between the front part 6 and the back part 7 of the first absorbent layer 11. An interspace 17 is located in an area between the elastic member 16 and the narrow transversal transition 14, i.e. laterally outside the narrow transversal transition of the first absorbent layer 11. The interspace 17 is substantially free from absorbent material. The interspace provides a slim shape of the article and improves the fit of the article on the wearer leading to reduced side leakage.

Figures 1 and 2 show a first absorbent layer 11 having an opening 12 extending there through. A fluid flow control structure 13 is located beneath the first absorbent layer 11. The first absorbent layer 11 has a longitudinal front portion 6 and a longitudinal back portion 7 and a narrow transversal transition 14 located between the front portion 6 and the back portion 7 as seen in figure

1. The width of the narrow transversal transition 14 is 50-75% of the widest transversal width of the front portion 6 of the first absorbent layer 11 and 50-75% of the widest transversal width of the back portion 7 of the first absorbent layer, such as 65 mm. The widest transversal width of the front portion 6 and the back portion 7 may be about 75-170 mm, such as 100 mm. The longitudinal extension of the narrow transversal transition 14 is 5-20% of the longitudinal length of the first absorbent layer 11. The front portion of the first absorbent layer is 20-40% of the longitudinal length of the first absorbent layer. The longitudinal length of the first absorbent layer 11 may be about 230-400 mm, such as 300 mm.

The absorbent article 1 as shown in Figure 3 has an elongate, generally rectangular shape when fully extended in all directions. The word “generally” in this context means that, for instance, the corners of the incontinence protector 1 may be rounded, or the edges of the incontinence protector 1 may not be completely linear.

The absorbent article 1 may further have fastening means (not shown in the figures) for fastening of the article 1 inside a supporting pant garment, such as a pair of underpants. The fastening means may be in the form of two longitudinally extending bands of pressure sensitive adhesive arranged on the garment-facing surface of the backsheet 9. The fastening means may be covered by a releasable protective layer. The protective layer may be a siliconized paper, a nonwoven or any other releasable material as is known in the art. Before placing the incontinence protector in the supporting pant garment, the protective layer is removed from the fastening means to expose the adhesive and make it available for fastening to the pant garment.

The fastening means is optional to the invention and may be omitted, if desired. When using an adhesive fastening means, any suitable adhesive pattern may be used such as full coating of the backsheet, one or more longitudinal adhesive band, transverse bands, dots, circles, curves, stars, etc. Furthermore, the fastening means may be a mechanical fastener such as hook-type fasteners, clips, press studs, etc. or may be a frictional fastener such as a

frictional coating or open-celled foam. Combinations of different types of fasteners are also conceivable.

The absorbent core 10 of the absorbent article 1 shown in Figure 3 comprises a first absorbent layer 11 and a second absorbent layer 15. The absorbent layers may comprise a mixture of absorbent and/or non-absorbent fibres and superabsorbent material. A fluid flow control structure 13 is arranged between the first absorbent layer 11 and the second absorbent layer 15. In the absorbent article 1 in Figure 3 the first absorbent layer 11 is placed beneath and in direct contact with the topsheet 8.

The second absorbent layer 15 is shown to have a generally rectangular shape. The second absorbent layer 15 is placed beneath the first absorbent layer 11. The second absorbent layer 15 is somewhat smaller than the first absorbent layer 11 so that the first absorbent layer 11 extends beyond the second absorbent layer 15 forward and rearward in the absorbent article 1. The size and shape of the absorbent layers may be different from those shown in the figures without departing from the invention. Moreover, the second absorbent layer 15 may be omitted in the absorbent article 1 according to the invention or the article 1 may comprise one or more further absorbent layers.

The first absorbent layer 11 has an opening 12 extending completely through the layer 1. The first absorbent layer 11 may have one or more openings 12 of different shapes and configurations. One elongated opening 12 is however preferred. The longitudinal length of the opening 12 is 10-60% of the longitudinal length of the first absorbent layer. The length of the opening may be e.g. about 100 mm. The opening 12 is located with 20-50% of its longitudinal length in the front portion 6 of the first absorbent layer 11. The transverse dimension of the opening 12 is larger in the front portion 6 of the first absorbent layer 11 than the transverse dimension of the opening 12 in the back portion 7 of the first absorbent layer 11. The opening 12 will in use of the article be placed directly beneath the urethra and the vaginal opening of a female wearer. Any body fluid that is released to the absorbent article 1 will directly be

collected in the opening 12 and be temporarily contained therein until it is distributed further into and throughout the absorbent core 10.

5 In figure 4 the topsheet 8 does not extend down into the cavity that is defined by the opening 12 in the first absorbent layer 11 and the topsheet-facing surface of the fluid flow control structure 13, but may preferably do so. A portion of the fluid that is collected in the opening 12 may be absorbed by the first absorbent layer through the walls of the first absorbent layer in the opening 12. However, the majority of the fluid will continue downward in the absorbent
10 article 1 and into the fluid flow control structure 13 where it is distributed longitudinally and laterally along the flow control structure 13.

The fluid flow control structure 13 is shown in Figures 1-5 to be of rectangular shape and to be surrounded in the longitudinal and lateral directions by
15 portions of the absorbent layers 11, 15. It is generally advantageous if the fluid flow control structure 13 has smaller width and preferably also is shorter than the absorbent layers 11, 15.

The fluid flow control structure 13 may be a three-layer structure consisting of a
20 non-perforated fibrous polymeric layer that is sandwiched between a first perforated polymeric layer and a second perforated polymeric layer.

The components in the absorbent article 1 may be connected to each other by conventional means such as construction adhesive, heat bonding, ultrasonic
25 bonding, etc. It may not be necessary to bond internal components of the incontinence protector to each other by special bonding means. Hence, it may suffice that such components are held together by frictional forces.

Figure 6 is a side elevation view of an exemplary embodiment of the article 1
30 according to the invention. The narrow transversal transition 14 between the front 6 and back 7 portion of the first absorbent layer provides an improved fit of the article on the wearer and which is further enhanced by the interspace 17 and the elastic members 16.

CLAIMS

1. An absorbent article having longitudinal side edges (2,3) and transversal end edges (4,5), and comprising a fluid permeable topsheet (8), a fluid impermeable backsheet (9) and an absorbent core (10) being located between said topsheet (8) and said backsheet (9), said absorbent core (10) comprising a first absorbent layer (11) having an opening (12) extending therethrough and a fluid flow control structure (13) being located between said first absorbent layer (11) and said backsheet (9),
wherein the first absorbent layer (11) has a longitudinal front portion (6) and a longitudinal back portion (7), and a narrow transversal transition (14) is located between said front portion (6) and said back portion (7), wherein a width of the narrow transversal transition (14) is 50-75% of a widest transversal width of the front portion (6) of the first absorbent layer (11), and 20-50% of a longitudinal length of the opening (12) is located in the front portion (6) of the first absorbent layer (11), and wherein a transverse dimension of the opening (12) is larger in the front portion (6) of the first absorbent layer (11) than a transverse dimension of the opening (12) in the back portion (7) of the first absorbent layer (11).
2. The absorbent article according to claim 1, wherein the width of the narrow transversal transition (14) is 50-75%, of a widest transversal width of the back portion (7) of the first absorbent layer (11).
3. The absorbent article according to claim 1 or 2, wherein the width of the narrow transversal transition (14) is 55-70% of the widest transversal width of the front portion (6) of the first absorbent layer (11).
4. The absorbent article according to any one of claims 1-3, wherein a longitudinal extension of the narrow transversal transition (14) is 5-20% of a longitudinal length of the first absorbent layer (11).

5. The absorbent article according to any one of claims 1-4, wherein 20-40% of the longitudinal length of the opening (12) is located in the front portion (6) of the first absorbent layer (11).
6. The absorbent article according to any one of claims 1-5, wherein the longitudinal length of the opening (12) in the first absorbent layer (11) is 10-60% of a longitudinal length of the first absorbent layer (11).
7. The absorbent article according to claim 6, wherein the longitudinal length of the opening (12) in the first absorbent layer (11) is 20-40% of the longitudinal length of the first absorbent layer (11).
8. The absorbent article according to any one of claims 1-7, wherein the front portion (6) of the first absorbent layer (11) constitutes 20-40% of a total longitudinal length of the first absorbent layer (11),
9. The absorbent article according to any one of claims 1-8, wherein the width of the narrow transversal transition (14) of the first absorbent layer (11) is less than 130 mm and larger than 30 mm.
10. The absorbent article according to any one of claims 1-9, wherein the first absorbent layer (11) contains only one said opening (12).
11. The absorbent article according to any one of claims 1-10, wherein a second absorbent layer (15) is located between the fluid flow control structure (13) and the backsheet (9).
12. The absorbent article according to claim 11, wherein the second absorbent layer (15) has a smaller surface area than the first absorbent layer (11).

13. The absorbent article according to any one of claims 1-12, wherein the topsheet (8) and the backsheet (9) extend together laterally outside of the first absorbent layer (11).

14. The absorbent article according to any one of claims 1-13, wherein the absorbent article is a sanitary napkin or an incontinence pad (1).

15. The absorbent article according to any one of claims 1-14, wherein the width of the narrow transversal transition (14) is 55-70% of a widest transversal width of the back portion (7) of the first absorbent layer (11).

16. The absorbent article according to any one of claims 1-15, wherein the width of the narrow transversal transition (14) of the first absorbent layer (11) is less than 90 mm and larger than 50 mm.

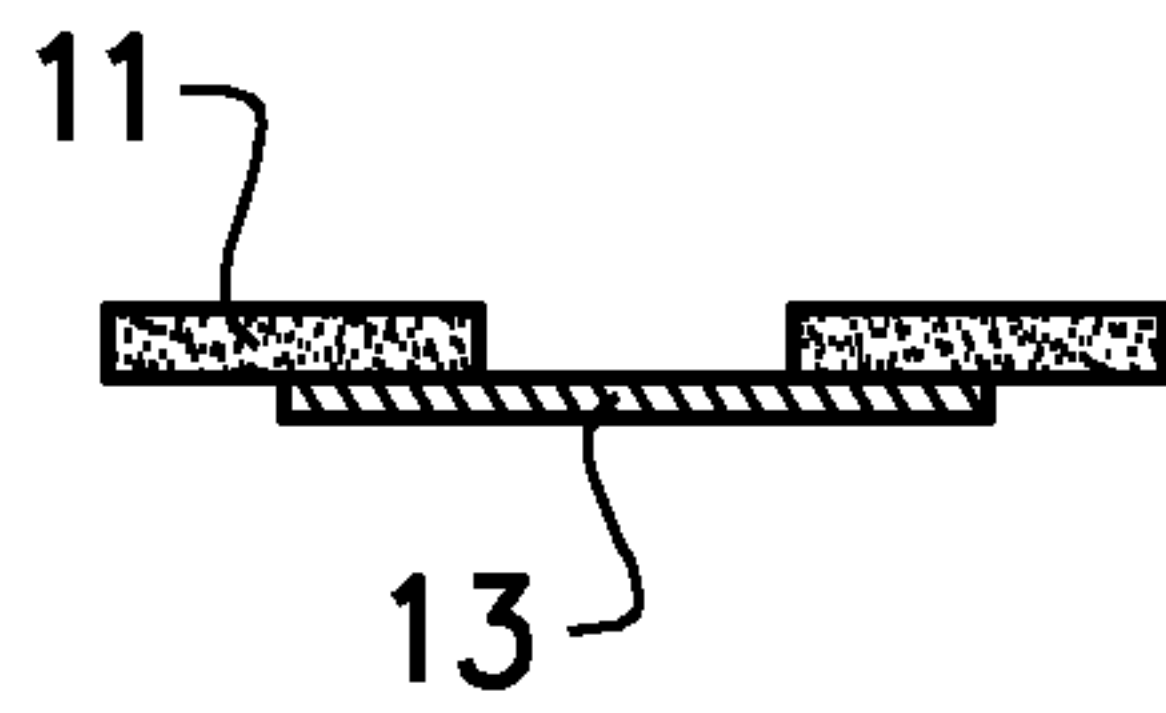


FIG. 2

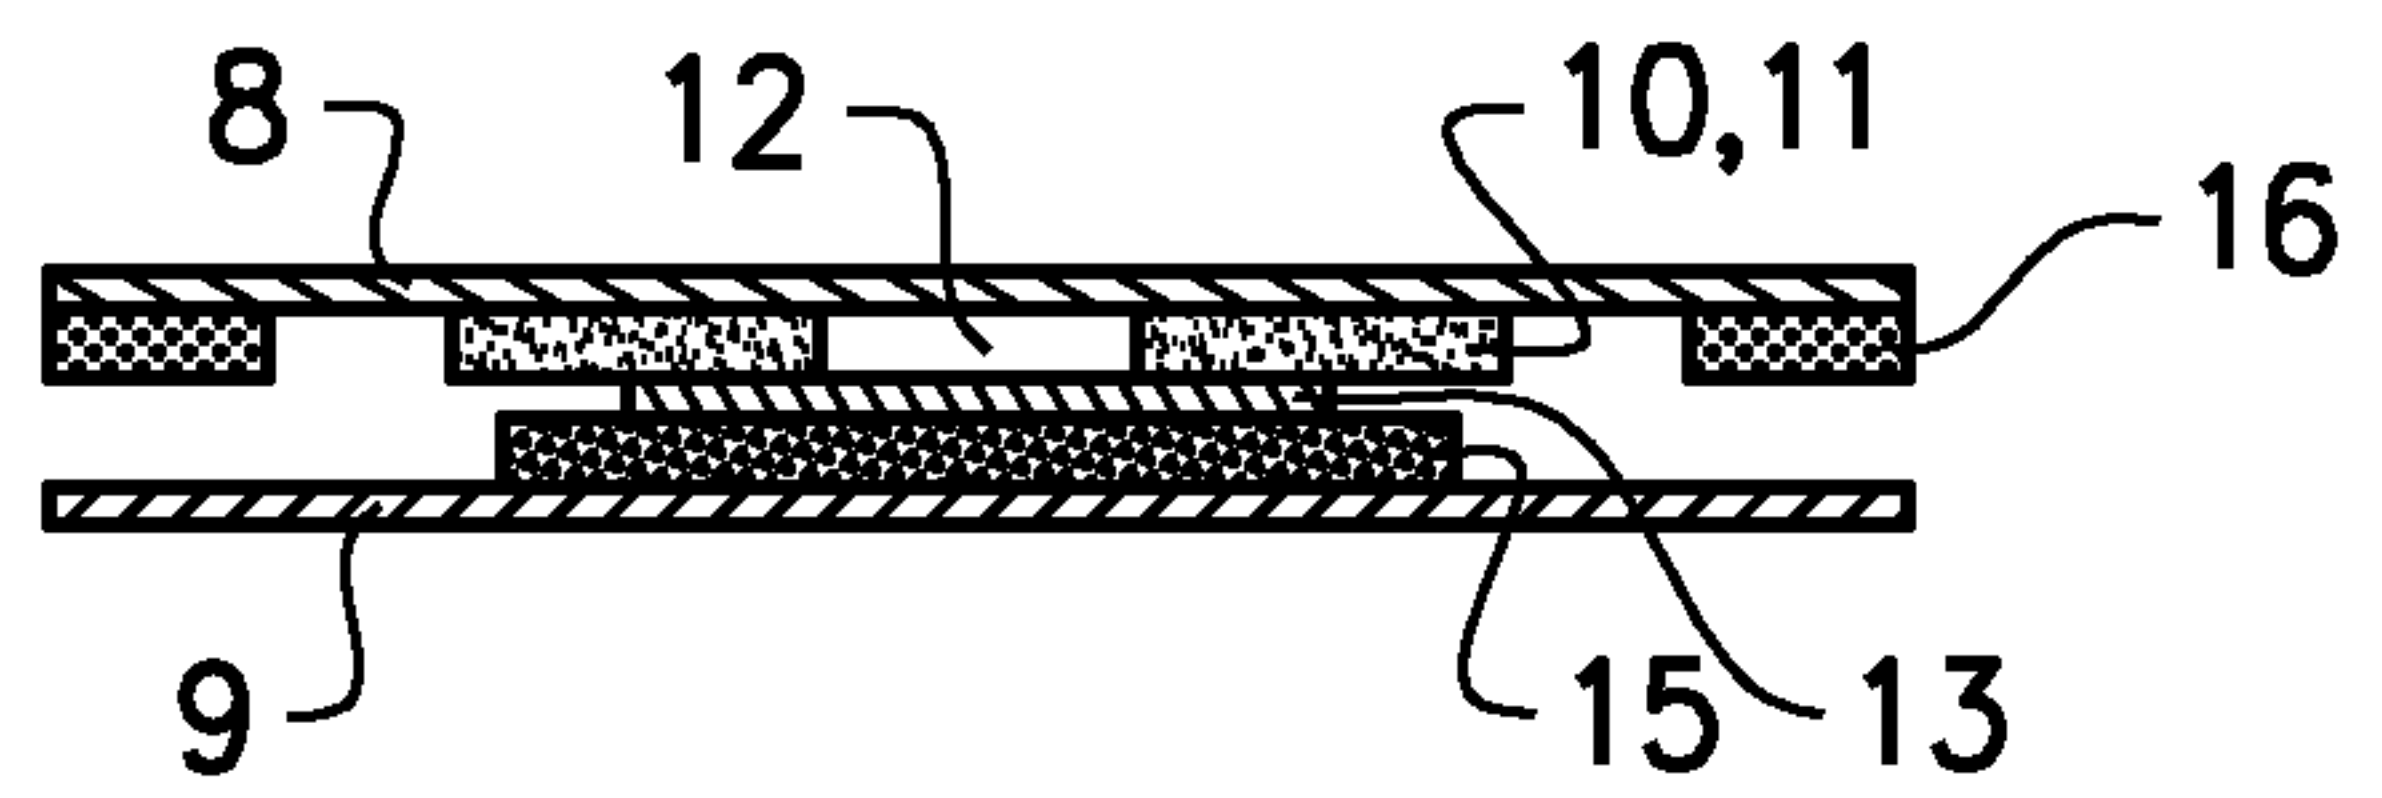


FIG. 4

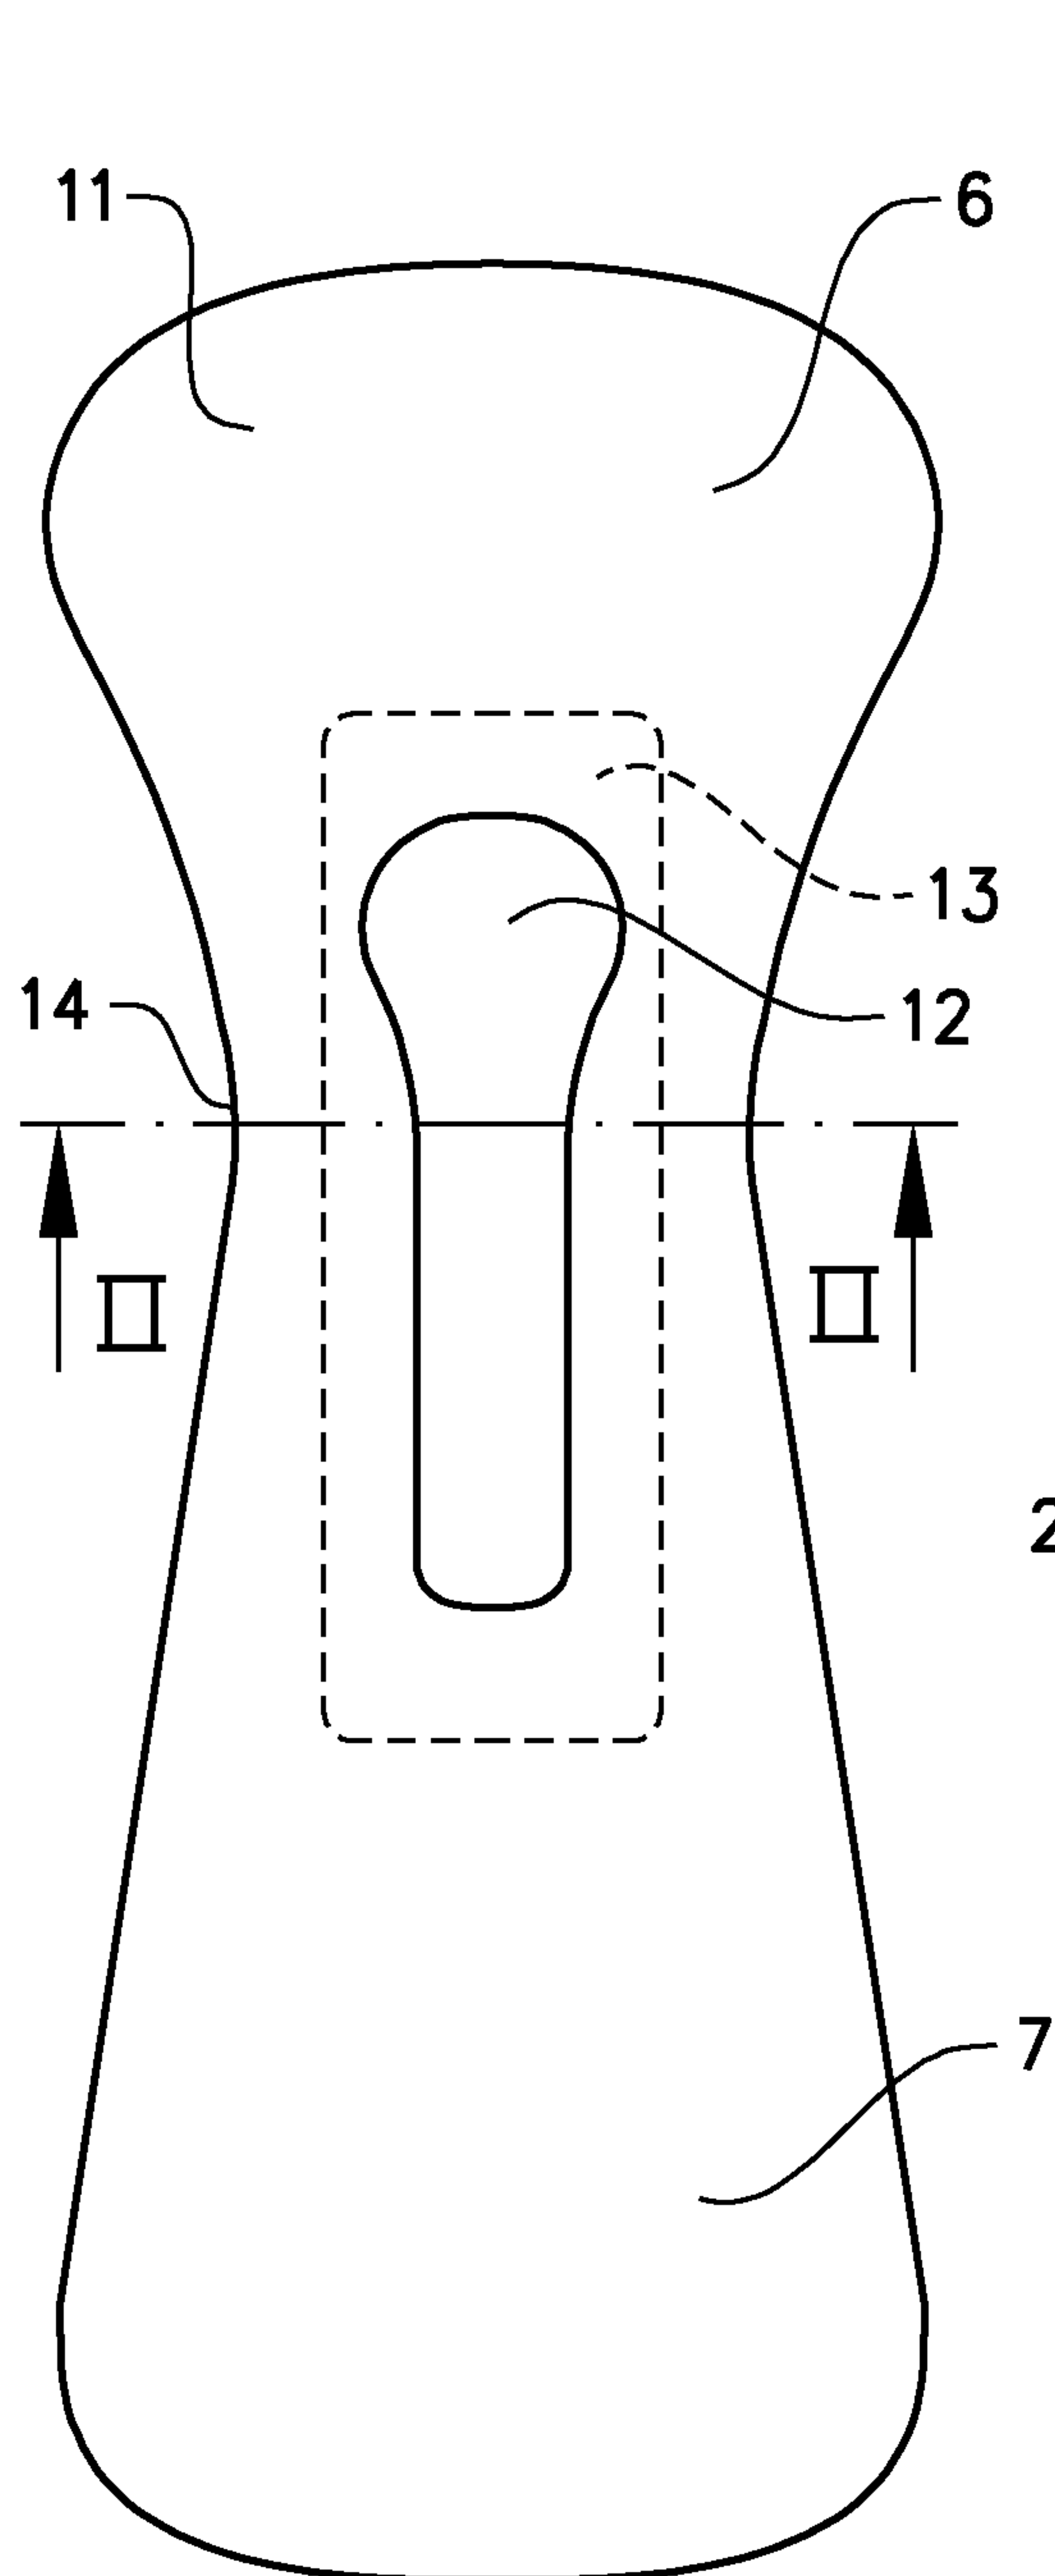


FIG. 1

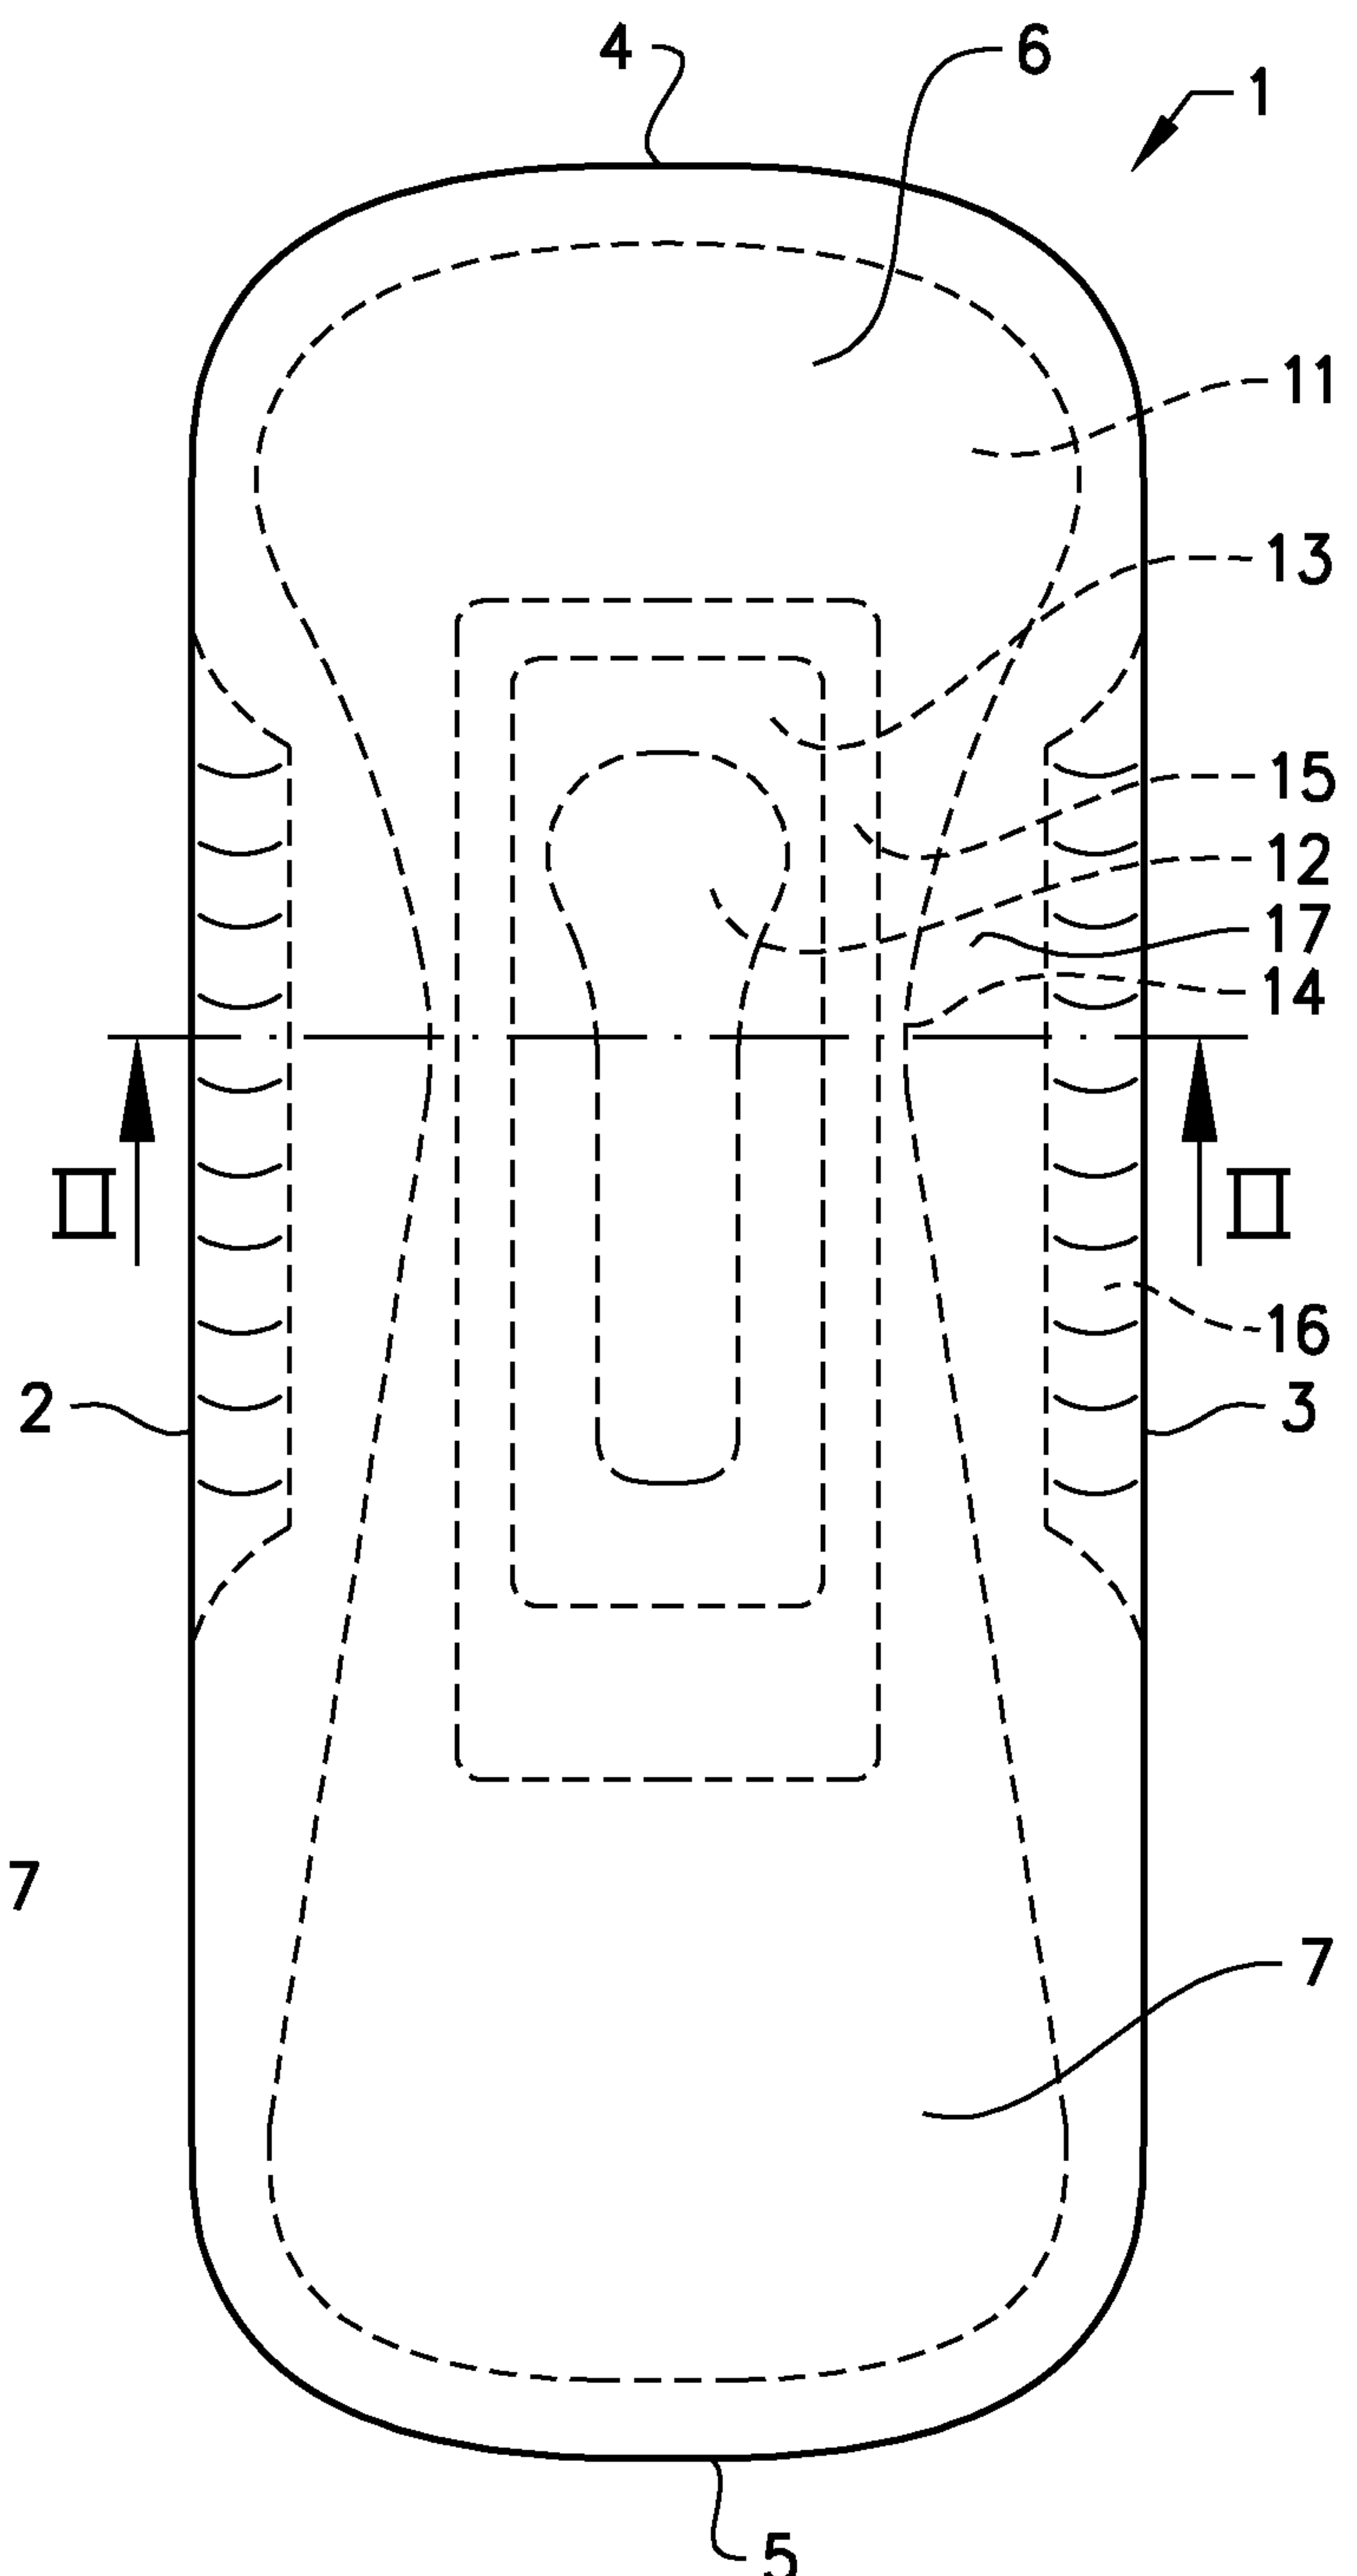


FIG. 3

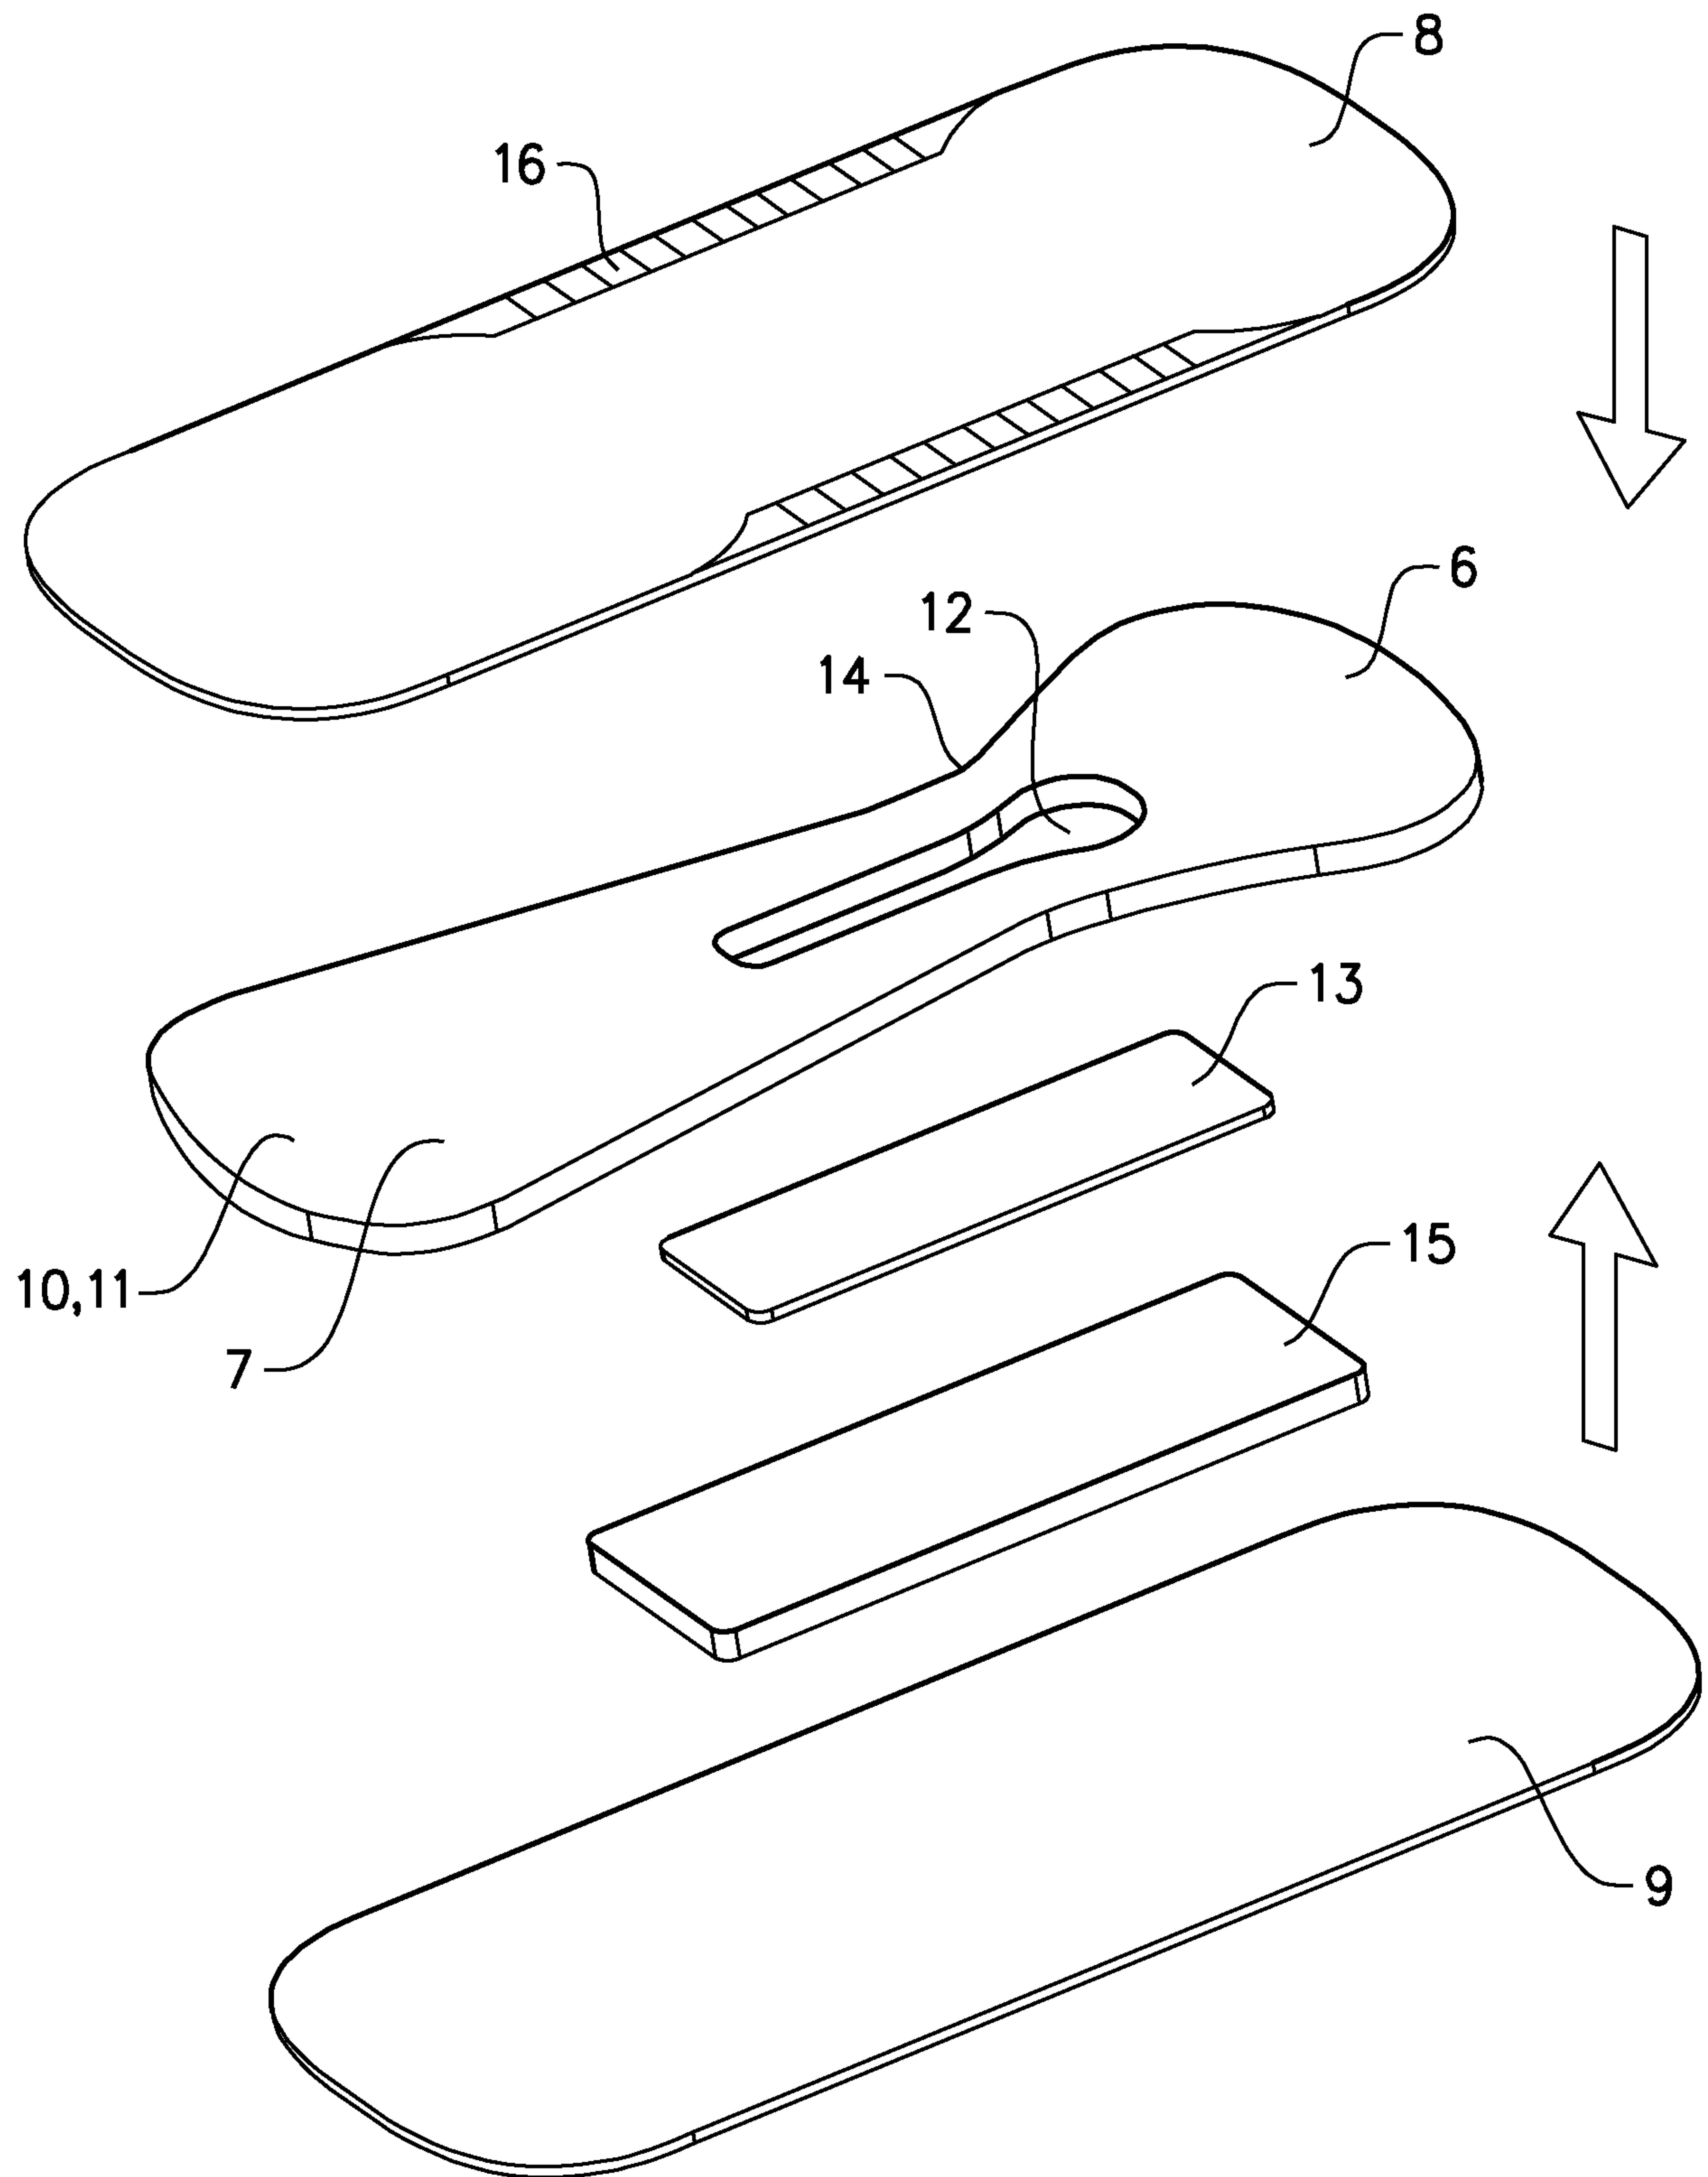


FIG. 5

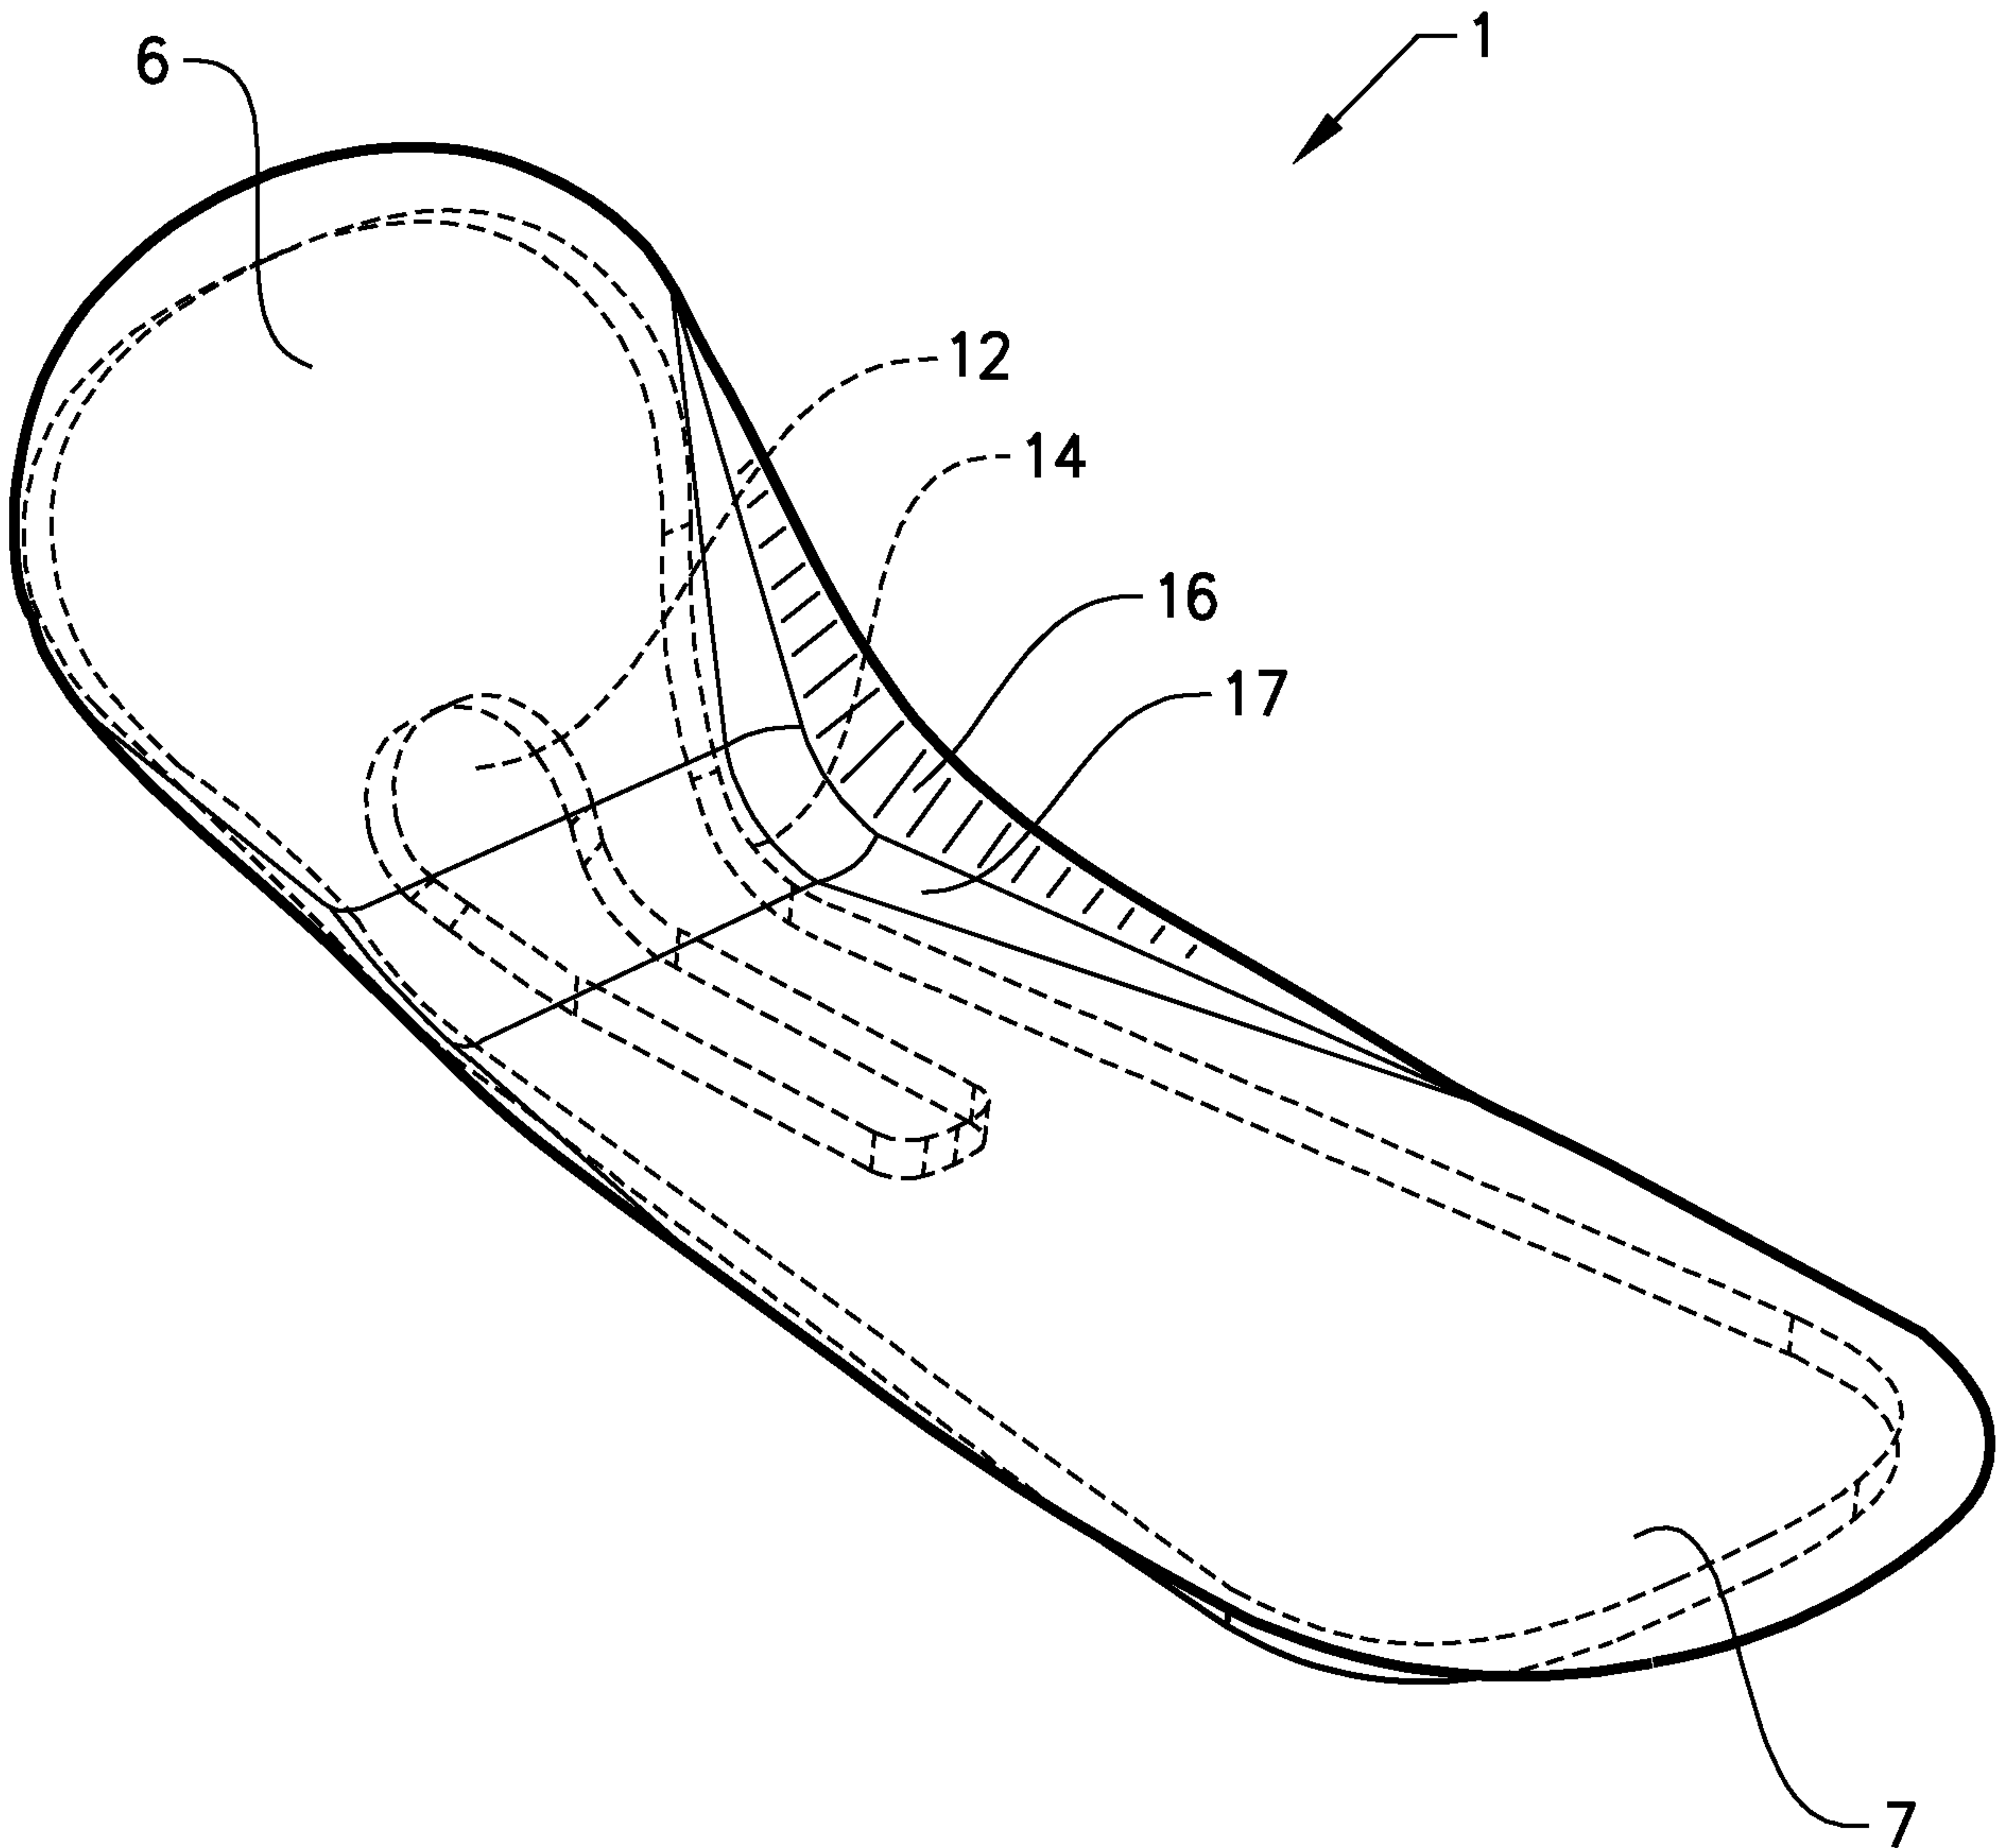


FIG. 6

