



(51) International Patent Classification:
H02N 2/06 (2006.01)

(21) International Application Number:
PCT/US2013/078124

(22) International Filing Date:
27 December 2013 (27.12.2013)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant: INTEL CORPORATION [US/US]; 2200
Mission College Boulevard, Santa Clara, California 95054
(US).

(72) Inventor; and

(71) Applicant (for US only): MILLETT, Howard [US/US];
723 N. 28th Ave., Cornelius, Oregon 97113 (US).

(74) Agent: OREN, David C.; Ked & Associates, c/o CPA
Global, P.O. Box 52050, Minneapolis, MN 55402 (US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,

BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM,
ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: METHOD AND APPARATUS TO CHANGE RESONANCE FREQUENCY OF AN ELECTRONIC DEVICE

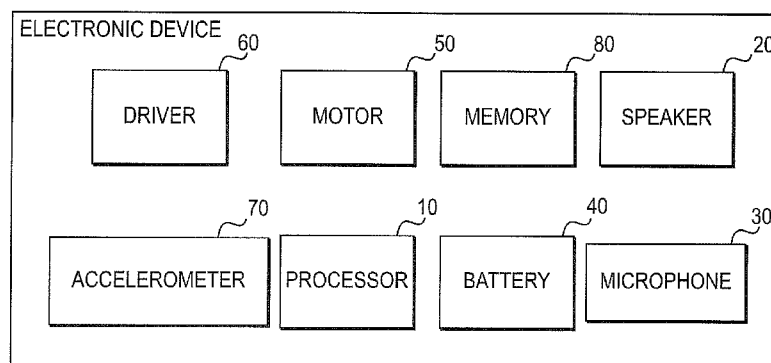


FIG. 1

(57) Abstract: An electronic device may include a motor to operate at a first frequency during a first time period and to operate at a second frequency during a second time period, and an accelerometer to obtain first data relating to operation of the motor at the first frequency and to obtain second data relating to operation of the motor at the second frequency. The electronic device may also include a processor to determine a desired resonant frequency of the motor based on the first data and the second data.

METHOD AND APPARATUS TO CHANGE RESONANCE FREQUENCY OF AN ELECTRONIC DEVICE

BACKGROUND

1. Field

Embodiments may relate to a resonance of an electronic device.

2. Background

An electronic device may include a haptic device. Haptics may enhance a user experience by relating to touch by a user. Haptics may refer to a sense of touch of the electronic device.

BRIEF DESCRIPTION OF THE DRAWINGS

Arrangements and embodiments may be described in detail with reference to the following drawings in which like reference numerals refer to like elements and wherein:

FIG. 1 is a diagram of an electronic device according to an example arrangement;

FIG. 2 is a graph showing frequency versus acceleration according to an example arrangement;

FIG. 3 is a graph showing time versus system vibration according to an example embodiment; and

FIG. 4 is a flowchart showing a methodology of determining a desired (or optimal) resonant frequency of an electronic device.

DETAILED DESCRIPTION

In the following detailed description, like numerals and characters may be used to designate identical, corresponding and/or similar components in differing figure drawings. Further, in the detailed description to follow, example sizes/models/values/ ranges may be given although embodiments are not limited to the same. Where specific details are set forth in order to describe example embodiments, it should be apparent to one skilled in the art that embodiments may be practiced without these specific details.

Embodiments may relate to changing a resonance (or resonant frequency) of an electronic device.

The electronic device may be any one of a mobile terminal, a mobile device, a mobile computing platform, a mobile platform, a laptop computer, a tablet, an ultra-mobile personal computer, a mobile Internet device, a smartphone, a personal digital assistant, a display device, a

television (TV), and/or etc. For ease of description, the following may relate to an electronic device such as a mobile terminal.

FIG. 1 is diagram of an electronic device according to an example arrangement. Other arrangements may also be provided.

5 An electronic device may include many electronic components. FIG. 1 shows a processor 10, a speaker 20, a microphone 30, a battery 40 (such as in a battery port), a motor 50 (or haptic device), a driver 60, an accelerometer 70 (or accelerometer device), and a memory 80. Other components may also be provided.

10 As one example, the motor 50 may be a linear resonance actuator (LRA) (or linear resonance actuator device) or a linear resonance motor. The LRA may be a spring mass system that oscillates in a linear motion.

The motor 50 may be controlled by the driver 60, which may receive signals from the processor 10. The motor 50, such as the LRA, may be used for haptic feedback in the electronic device. The motor 50 may provide a haptic event, such as a vibration at a resonant frequency, for
15 example. The motor 50 may operate in a narrow frequency band. The motor 50, or LRA, may have a narrow operating bandwidth centered on a resonant frequency. However, a resonant frequency of the motor 50 may change (or drift) over time due to any of a number of factors such as age, angle, or process variation. As one example, the LRA resonant frequency may vary due to any of a number of external factors including mounting position and acceleration.

20 Embodiments may utilize an accelerometer (or accelerometer device) and a process (or algorithm) to determine the motor's desired (or optimal) resonant frequency as the frequency changes to above an ideal frequency and/or below an ideal frequency. As a resonant frequency changes (either above or below the ideal frequency), then the process may identify a new optimal (or desired) resonant frequency to operate the motor 50. As used hereinafter, the optimal
25 resonant frequency may be a desired resonant frequency.

The accelerometer 70 may measure or determine acceleration forces. For example, the accelerometer 70 may detect (or determine) magnitude and/or a direction of acceleration (or g-force). The accelerometer 70 may measure or monitor vibrations and/or a vibration frequency at the electronic device. In at least one embodiment, the accelerometer 70 may measure or monitor
30 vibrations and/or a vibration frequency of the motor 50, such as the LRA.

The accelerometer 70 along with the processor 10 may operate to determine and monitor the resonant frequency of the motor 50. For example, the operating resonant frequency of the motor 50 (or the electronic device) may increase over time or may decrease over time. The

accelerometer 70 and the processor 10 may determine a new operating resonant frequency (or desired resonant frequency) of the motor 50 by monitoring the different resonant frequencies.

The accelerometer 70 may monitor a resonant frequency at a specific frequency.

In at least one embodiment, the accelerometer may obtain first data relating to operation of the motor at the first frequency (e.g. first resonant frequency data) and obtain second data relating to operation of the motor at the second frequency (e.g. second resonant frequency data). The accelerometer may also obtain third resonant frequency data of the motor at the third frequency. Additional data may also be obtained.

FIG. 2 is a graph showing frequency versus acceleration according to an example arrangement. Other graphs, data and arrangements may also be provided.

FIG. 2 is a graph showing a resonance frequency (Hz) along an X-axis and acceleration (g) along a Y-axis. The graph may represent data that is determined, obtained and/or monitored by the accelerometer 70 and/or the processor 10.

As one example, line 102 of the graph may represent an ideal (or desired optimal) resonant frequency (or first resonant frequency) at approximate 175 Hz, which is the operating frequency of the motor 50. As another example, line 104 of the graph may represent an ideal (or desired optimal) resonant frequency of the same motor but has shifted due to age, temperature, change in mass, or some other factor. In this example, the difference between the first resonant frequency and the second resonant frequency may be an 80% loss in acceleration of the motor 50.

The difference between the line 102 and the line 104 may represent a resonance frequency drift. The resonance frequency drift may cause a loss in vibration performance of the motor 50 (such as the LRA).

The processor 10 may receive data, from the accelerometer 70, regarding the resonant frequency. The data may be stored in the memory 80, for example. The processor 10 may store different resonant frequency data over time.

The motor 50 may be controlled by the driver 60. As one example, a speed (or frequency) of the motor 50 may be controlled to operate at different frequencies. Resonant frequency data may be collected and stored at that time (i.e., in real time). For example, the processor 10 may operate to store data regarding frequency and acceleration magnitude of the motor 50.

The processor may determine a desired resonant frequency of the motor based on the first data and the second data.

FIG. 3 is a graph showing time versus system vibration according to an example arrangement. Other graphs, data and arrangements may also be provided.

FIG. 3 is a graph showing a time along an X-axis and a system vibration (from the accelerometer 70) along a Y-axis. The graph may represent data that is determined or monitored by the accelerometer 70 and/or the processor 10.

FIG. 3 shows system vibration over different time periods, namely a first time period 130, a second time period 140 and a third time period 150.

As shown in FIG. 3, during the first time period 130, the motor 50 may operate at a 170 Hz frequency. The FIG. 3 graph shows the system vibration during the first time period 130.

During the second time period 140, the motor 50 may operate at a 175 Hz frequency. The FIG. 3 graph shows the system vibration during the second time period 140.

During the third time period 150, the motor 50 may operate at a 180 Hz frequency. The FIG. 3 graph shows the system vibration during the third time period 150.

The motor may operate at a first frequency during a first time period, operate at a second frequency during a second time period and operate at a third frequency during a third time period.

The FIG. 3 graph may represent data that is obtained and stored. Based on this stored data, a determination may be made regarding the ideal or desired resonant frequency of the motor 50. For example, in the FIG. 3 graph, a resonant frequency during the time period 140 may represent the ideal (or desired/optimal) resonant frequency. The determination of the ideal or desired resonance may be a selection of a resonance that yields a best acceleration as a next resonant frequency.

FIG. 4 is a flowchart showing a methodology of determining a desired (or optimal) resonant frequency of an electronic device according to an example embodiment. Other operations, orders of operations and embodiments may also be provided.

More specifically, FIG. 4 shows that a motor may operate at a first frequency in operation 202. For example, the motor 50 (or LRA) may operate at a 170 Hz frequency. In operation 204, the electronic device may obtain and store first data relating to operation of the motor while the motor 50 is operating at the first frequency (i.e., first resonant frequency data).

In operation 206, the motor may operate at a second frequency. In operation 208, the electronic device may obtain and store second data relating to operation of the motor while the motor 50 is operating at the second frequency (i.e., second resonant frequency data).

After the second data (while operating at the second frequency) has been obtained and stored, a frequency of the motor 50 may change. The change may be made by the driver 60 (and/or the processor 10). The motor 50 may therefore operate at a third frequency in operation 210. For example, the motor 50 (or LRA) may operate at a 180 Hz frequency. In operation 212,

the electronic device may obtain and store third data relating to operation of the motor while the motor 50 is operating at the third frequency (i.e., third resonant frequency data).

In operation 214, the desired (or optimal) resonant frequency may be determined, by the processor 10, based on the stored data (i.e., the first data, the second data and the third data).

5 Based on the stored data, the processor 10 may determine the ideal (or desired) resonant frequency.

After determining a desired resonant frequency of the motor based on frequency data, the motor may operate at the desired resonant frequency. This may include controlling a driver of the motor based on the determined desired resonant frequency. This may include providing a
10 haptic event, such as providing a vibration at the electronic device.

In at least one embodiment, a computer-readable medium may store a program for controlling circuitry to provide the methodology shown in FIG. 4. The circuitry may be controlled to control the motor (e.g. the LRA) based on the determined (desired/optimal) resonant frequency. The program may be stored in a system memory, which for example, may be
15 internal or external to the electronic device. In at least one embodiment, the program may be part of a control algorithm for controlling operations of the electronic device.

Instructions or code executed by the processor may be provided to a memory from a machine-readable medium, or an external storage device accessible via a remote connection (e.g. over a network via an antenna and/or network interface) providing access to one or more
20 electronically-accessible media, etc. A machine-readable medium may include any mechanism that provides (i.e., stores and/or transmits) information in a form readable by a machine (e.g., a computer). For example, a machine-readable medium may include random access memory (RAM), read only memory (ROM), magnetic or optical storage medium, flash memory devices, electrical, optical, acoustical or other form of propagated signals (e.g., carrier waves, infrared
25 signals, digital signals), etc. In alternative embodiments, hard-wired circuitry may be used in place of or in combination with the instructions or code, and thus the embodiments are not limited to any specific combination of hardware circuitry and software instructions.

The program may include code or instructions to perform any of the operations or functions performed in embodiments previously discussed above.

30 Elements of the above described embodiments may be provided in code segments or instructions to perform tasks. The code segments or tasks may be stored in a processor readable medium or transmitted by a computing data signal in a carrier wave over a transmission medium or communication link. The processor readable medium, machine readable medium or computer readable medium may include any medium that can store or transfer information. Examples of

the processor readable medium, machine readable medium or computer readable medium include an electronic circuit, a semiconductor memory device, a ROM, a flash memory, an erasable ROM (EROM), a floppy diskette, a CD-ROM, an optical disk, a hard disk, a fiber optic medium, a radio frequency (RF) link, etc. The data signal may include any signal that can propagate over a transmission medium such as electronic network channels, optical fibers, air, electromagnetic, radio frequency (RF) links, etc. The code segments or instructions may be downloaded via computer networks such as the Internet, Intranet, etc.

The following examples pertain to further embodiments.

Example 1 is an electronic device comprising: a motor to operate at a first frequency during a first time period and to operate at a second frequency during a second time period, an accelerometer to obtain first data relating to operation of the motor at the first frequency and to obtain second data relating to operation of the motor at the second frequency, and a processor to determine a desired resonant frequency of the motor based on the first data and the second data.

In Example 2, the subject matter of Example 1 can optionally include a driver to control the motor.

In Example 3, the subject matter of Example 1 and Example 2 can optionally include that the driver to control the motor to operate the motor at the desired resonant frequency.

In Example 4, the subject matter of Example 1 can optionally include that the motor to provide a vibration at the electronic device.

In Example 5, the subject matter of Example 1 can optionally include that the accelerometer to obtain third data relating to operation of the motor at a third frequency.

In Example 6, the subject matter of Example 1 and Example 5 can optionally include that the processor to determine the desired resonant frequency based on the first data, the second data and the third data, and the processor to control the motor to operate at the determined desired resonant frequency.

In Example 7, the subject matter of Example 1 can optionally include that the motor is a linear resonant actuator device.

Example 8 is an electronic device comprising: means for providing a haptic event at a first frequency during a first time period and at a second frequency during a second time period, means for obtaining first data relating to operation of the means for providing at the first frequency and for obtaining second data relating to operation of the means for providing at the second frequency, and means for determining a desired resonant frequency of the means for providing based on the first data and the second data.

In Example 9, the subject matter of Example 8 can optionally include means for controlling the means for providing the haptic event.

In Example 10, the subject matter of Example 8 and Example 9 can optionally include that the means for controlling the means for providing to operate the means for providing at the
5 desired resonant frequency.

In Example 11, the subject matter of Example 8 can optionally include that the haptic event is a vibration at the electronic device.

In Example 12, the subject matter of Example 8 can optionally include that the means for obtaining to further obtain third data relating to operation of the means for providing at a third
10 frequency.

In Example 13, the subject matter of Example 8 and Example 12 can optionally include that the means for determining to determine the desired resonant frequency based on the first data, the second data and the third data.

In Example 14, the subject matter of Example 8 can optionally include that the means for
15 providing is a linear resonant actuator device.

Example 15 is a method of an electronic device comprising: operating a motor of the electronic device at a first frequency, obtaining first data relating to operation of the motor operating at the first frequency, operating the motor at a second frequency, obtaining second data relating to operation of the motor operating at the second frequency, and determining a desired
20 resonant frequency of the motor based on the first data and the second data.

In Example 16, the subject matter of Example 15 can optionally include operating the motor at the desired resonant frequency.

In Example 17, the subject matter of Example 15 and Example 16 can optionally include that operating the motor at the desired resonant frequency includes controlling a driver of the
25 motor based on the determined desired resonant frequency.

In Example 18, the subject matter of Example 15 and Example 17 can optionally include that operating the motor at the desired resonant frequency includes providing a haptic event.

In Example 19, the subject matter of Example 15 and Example 18 can optionally include that providing the haptic event includes providing a vibration at the electronic device.

In Example 20, the subject matter of Example 15 can optionally include operating the
30 motor at a third frequency, and obtaining third data relating to operation of the motor operating at the third frequency.

In Example 21, the subject matter of Example 15 and Example 20 can optionally include determining the desired resonant frequency of the motor based on the first data, the second data and the third data, and operating the motor at the determined desired resonant frequency.

5 In Example 22, the subject matter of Example 15 can optionally include that the motor is a linear resonant actuator device.

Example 23 is a non-transitory machine-readable medium comprising one or more instructions that when executed by a processor enable an electronic device to: operate a motor of an electronic device at a first frequency, obtain first data relating to operation of the motor operating at the first frequency, operate the motor at a second frequency, obtain second data
10 relating to operation of the motor operating at the second frequency, and determine a desired resonant frequency of the motor based on the first data and the second data.

In Example 24, the subject matter of Example 23 can optionally include that further instructions that operate the motor at the desired resonant frequency.

15 In Example 25, the subject matter of Example 23 and Example 24 can optionally include that the further instructions that operate the motor at the desired resonant frequency includes instructions to control a driver of the motor based on the determined desired resonant frequency.

In Example 26, the subject matter of Example 23 and Example 25 can optionally include that the further instructions that operate the motor at the desired resonant frequency includes instructions to provide a haptic event.

20 In Example 27, the subject matter of Example 23 and Example 26 can optionally include that the haptic event is a vibration at the electronic device.

In Example 28, the subject matter of Example 23 can optionally include that further instructions that: operate the motor at a third frequency, obtain third data relating to operation of the motor operating at the third frequency.

25 In Example 29, the subject matter of Example 23 and Example 29 can optionally include that the instructions to determine the desired resonant frequency includes instructions to determine the resonant frequency of the motor based on the first data, the second data and the third data.

30 In Example 30, the subject matter of Example 23 and Example 29 can optionally include that further instructions that: operate the motor at the desired resonant frequency.

In Example 31, the subject matter of Example 23 can optionally include that the motor is a linear resonant actuator device.

Any reference in this specification to “one embodiment,” “an embodiment,” “example embodiment,” etc., means that a particular feature, structure, or characteristic described in

connection with the embodiment is included in at least one embodiment. The appearances of such phrases in various places in the specification are not necessarily all referring to the same embodiment. Further, when a particular feature, structure, or characteristic is described in connection with any embodiment, it is submitted that it is within the purview of one skilled in the art to affect such feature, structure, or characteristic in connection with other ones of the embodiments.

Although embodiments have been described with reference to a number of illustrative embodiments thereof, it should be understood that numerous other modifications and embodiments can be devised by those skilled in the art that will fall within the spirit and scope of the principles of this disclosure. More particularly, various variations and modifications are possible in the component parts and/or arrangements of the subject combination arrangement within the scope of the disclosure, the drawings and the appended claims. In addition to variations and modifications in the component parts and/or arrangements, alternative uses will also be apparent to those skilled in the art.

WHAT IS CLAIMED IS:

1. An electronic device comprising:
a motor to operate at a first frequency during a first time period and to operate at a
5 second frequency during a second time period;
an accelerometer to obtain first data relating to operation of the motor at the first
frequency and to obtain second data relating to operation of the motor at the second frequency;
and
a processor to determine a desired resonant frequency of the motor based on the first
10 data and the second data.
2. The electronic device of claim 1, further comprising a driver to control the motor.
3. The electronic device of claim 2, wherein the driver to control the motor to operate
15 the motor at the desired resonant frequency.
4. The electronic device of claim 1, wherein the motor to provide a vibration at the
electronic device.
- 20 5. The electronic device of claim 1, wherein the accelerometer to obtain third data
relating to operation of the motor at a third frequency.
6. The electronic device of claim 5, wherein the processor to determine the desired
resonant frequency based on the first data, the second data and the third data, and the processor
25 to control the motor to operate at the determined desired resonant frequency.
7. The electronic device of claim 1, wherein the motor is a linear resonant actuator
device.
- 30 8. An electronic device comprising:
means for providing a haptic event at a first frequency during a first time period and
at a second frequency during a second time period;

means for obtaining first data relating to operation of the means for providing at the first frequency and for obtaining second data relating to operation of the means for providing at the second frequency; and

5 means for determining a desired resonant frequency of the means for providing based on the first data and the second data.

9. The electronic device of claim 8, further comprising means for controlling the means for providing the haptic event.

10 10. The electronic device of claim 9, wherein the means for controlling the means for providing to operate the means for providing at the desired resonant frequency.

11. The electronic device of claim 8, wherein the haptic event is a vibration at the electronic device.

15

12. A method of an electronic device comprising:

operating a motor of the electronic device at a first frequency;

obtaining first data relating to operation of the motor operating at the first frequency;

operating the motor at a second frequency;

20 obtaining second data relating to operation of the motor operating at the second frequency; and

determining a desired resonant frequency of the motor based on the first data and the second data.

25 13. The method of claim 12, further comprising:

operating the motor at the desired resonant frequency.

14. The method of claim 13, wherein operating the motor at the desired resonant frequency includes controlling a driver of the motor based on the determined desired resonant frequency.

30

15. The method of claim 14, wherein operating the motor at the desired resonant frequency includes providing a haptic event.

16. The method of claim 12, further comprising:
operating the motor at a third frequency; and
obtaining third data relating to operation of the motor operating at the third
frequency.

5

17. The method of claim 16, further comprising:
determining the desired resonant frequency of the motor based on the first data, the
second data and the third data; and
operating the motor at the determined desired resonant frequency.

10

18. A non-transitory machine-readable medium comprising one or more instructions that
when executed by a processor enable an electronic device to:

operate a motor of an electronic device at a first frequency;

obtain first data relating to operation of the motor operating at the first frequency;

15

operate the motor at a second frequency;

obtain second data relating to operation of the motor operating at the second
frequency; and

determine a desired resonant frequency of the motor based on the first data and the
second data.

20

19. The machine-readable medium of claim 18, wherein further instructions that operate
the motor at the desired resonant frequency.

20. The machine-readable medium of claim 19, wherein the further instructions that
operate the motor at the desired resonant frequency includes instructions to control a driver of
the motor based on the determined desired resonant frequency.

25

21. The machine-readable medium of claim 20, wherein the further instructions that
operate the motor at the desired resonant frequency includes instructions to provide a haptic
event.

30

22. The machine-readable medium of claim 21, wherein the haptic event is a vibration at
the electronic device.

23. The machine-readable medium of claim 18, wherein further instructions that:
operate the motor at a third frequency;
obtain third data relating to operation of the motor operating at the third frequency.

- 5 24. The machine-readable medium of claim 23, wherein the instructions to determine the
desired resonant frequency includes instructions to determine the resonant frequency of the
motor based on the first data, the second data and the third data.

- 10 25. The machine-readable medium of claim 24, wherein further instructions that:
operate the motor at the desired resonant frequency.

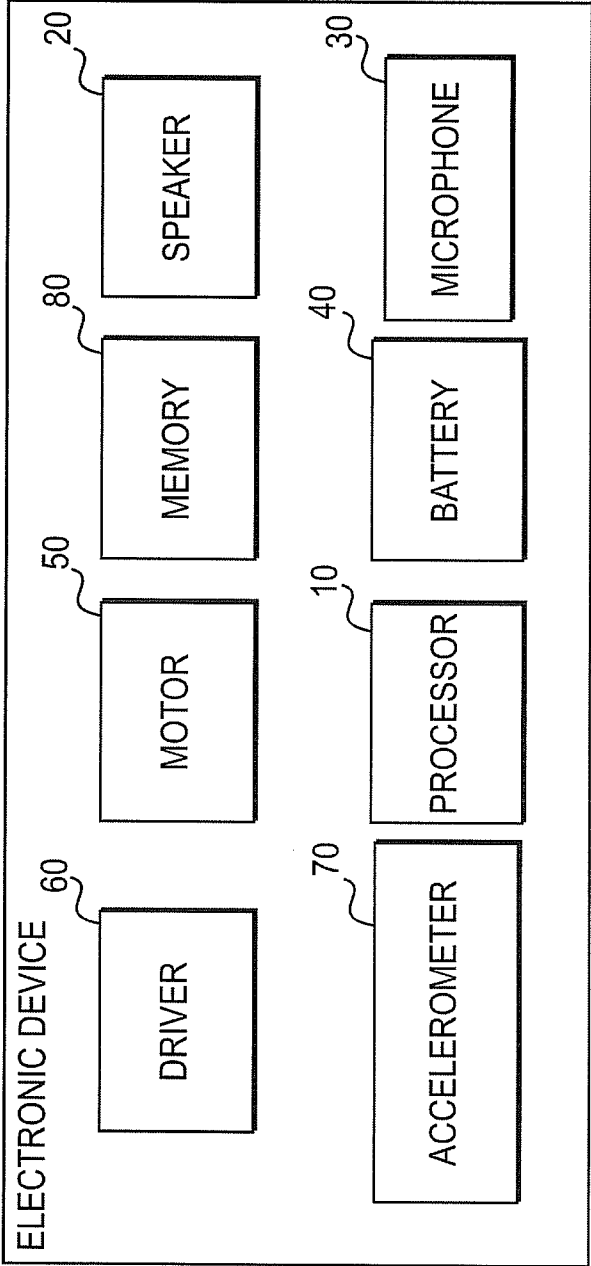


FIG. 1

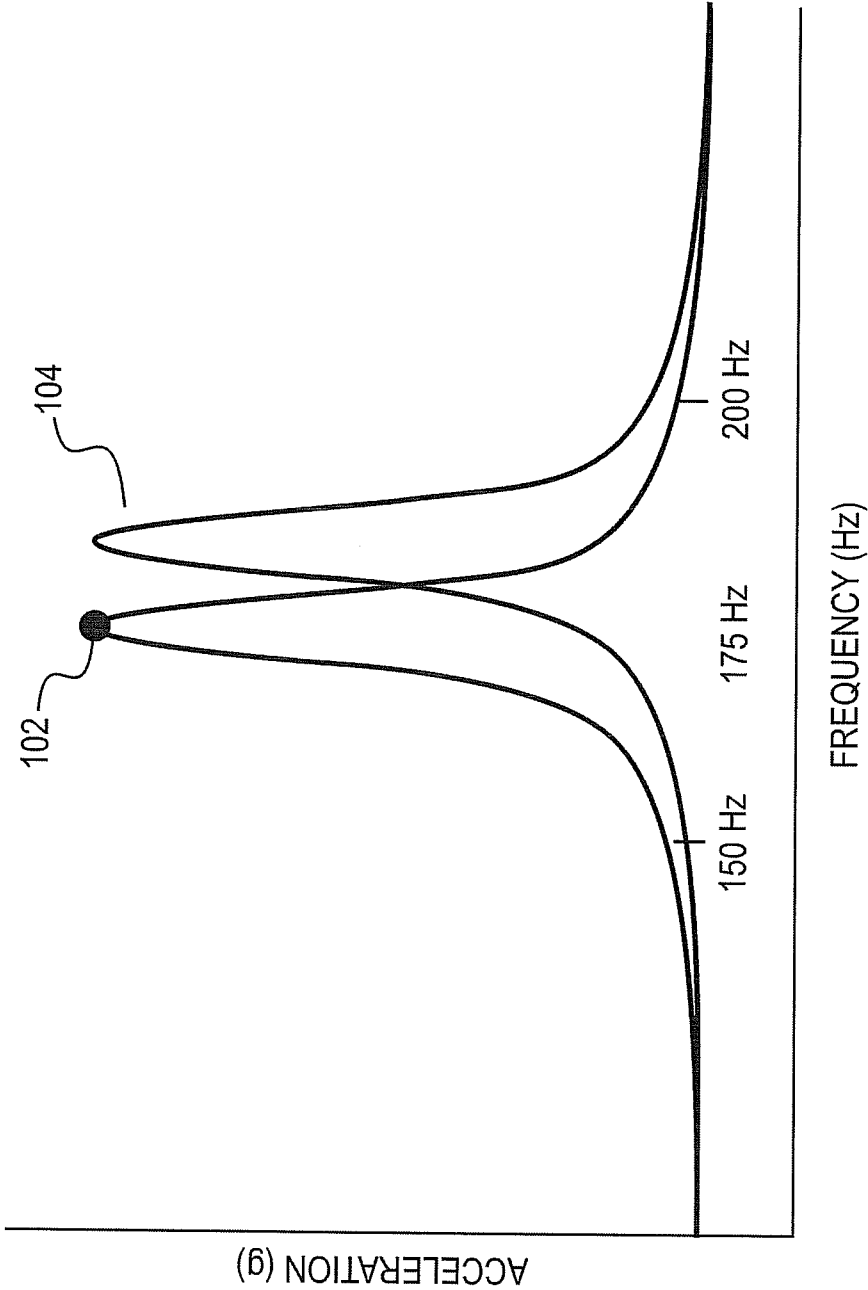


FIG. 2

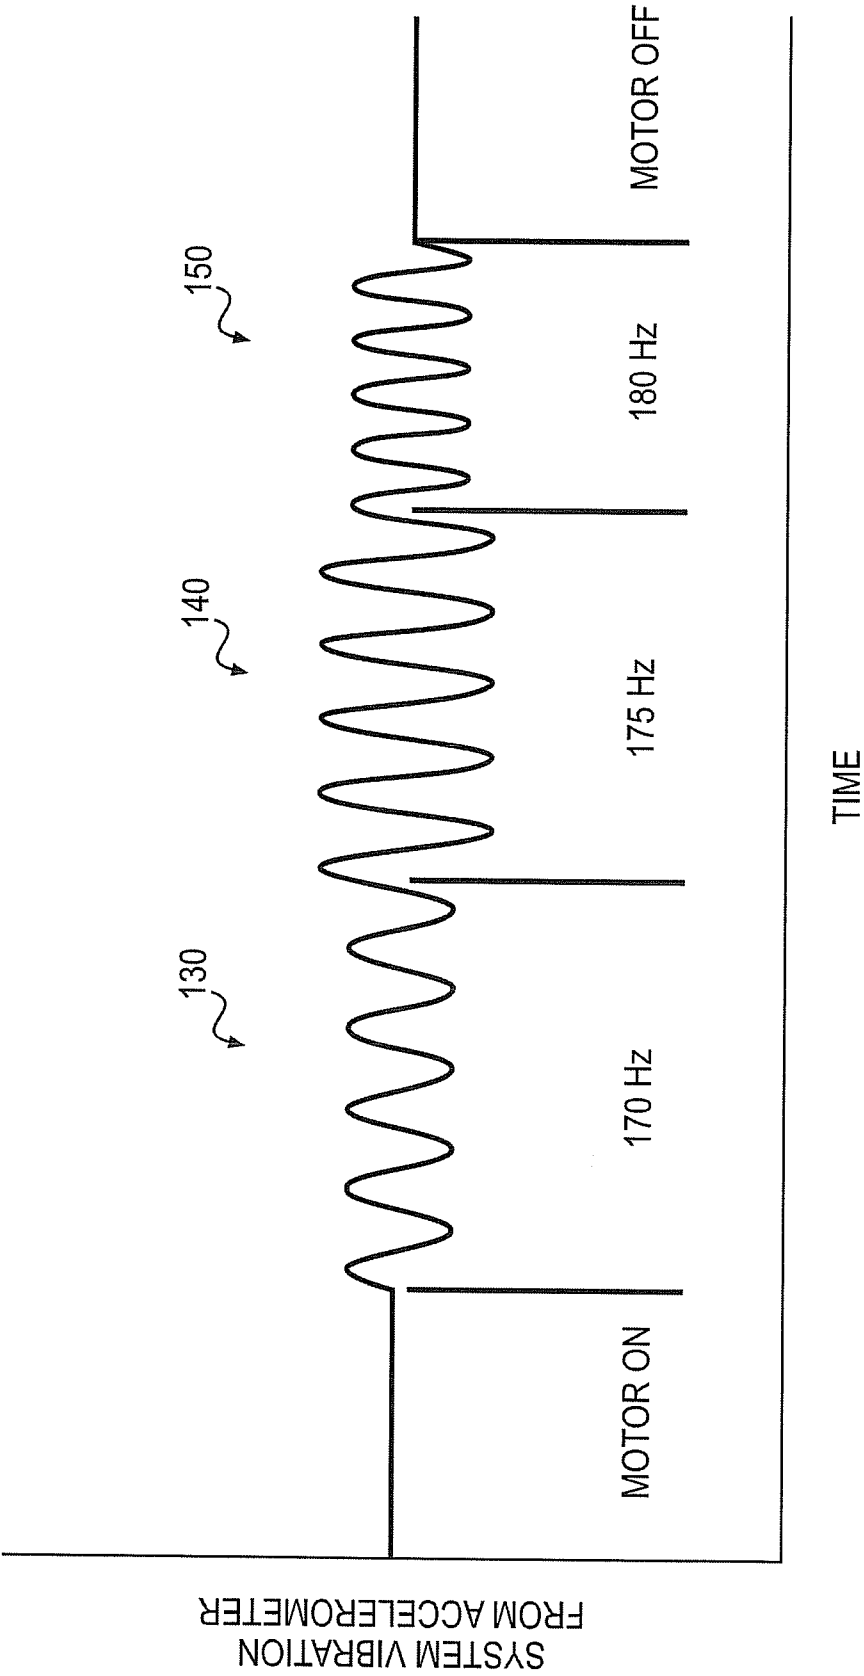
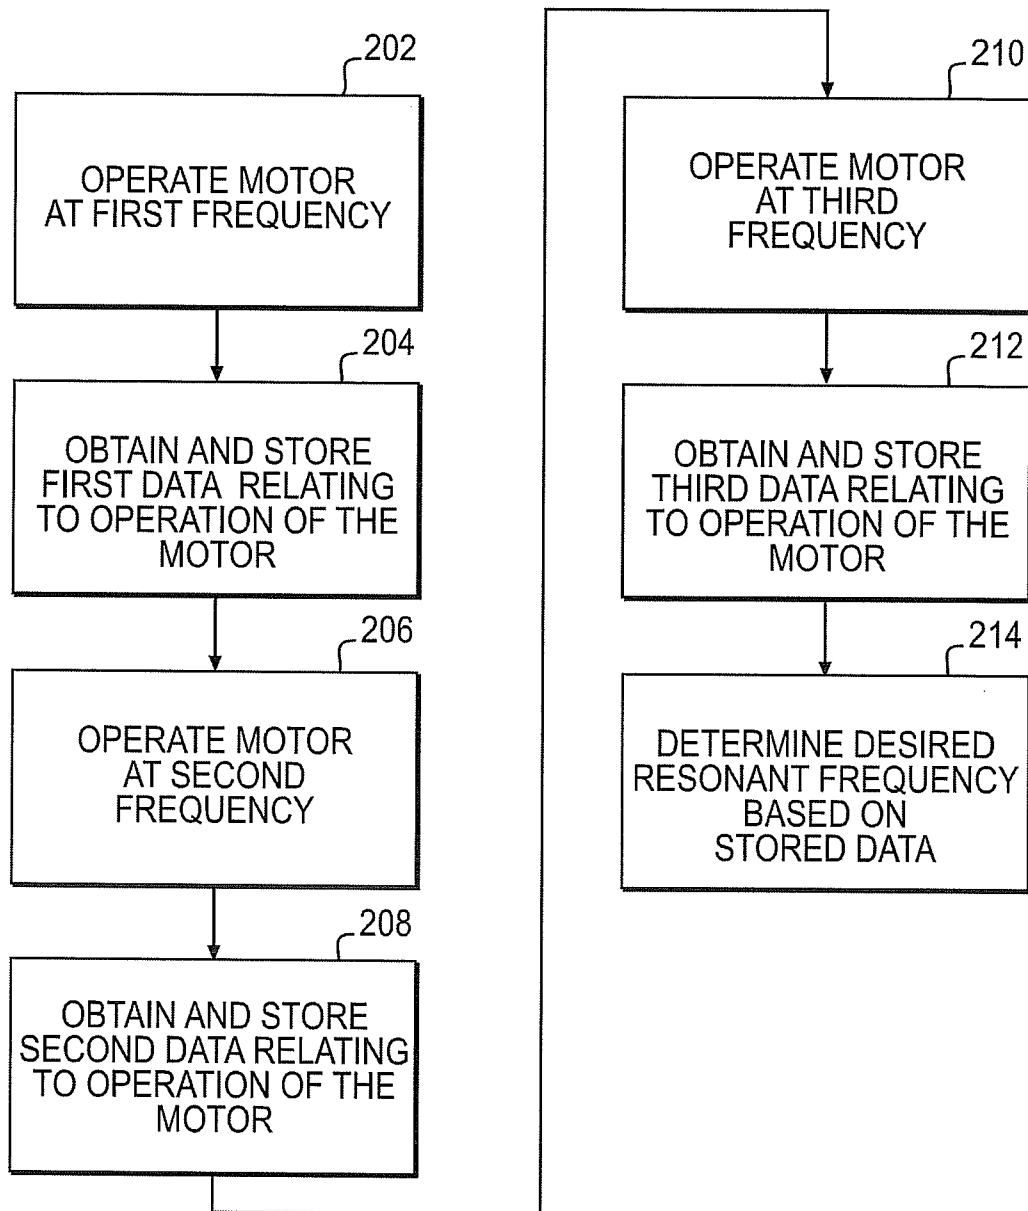


FIG. 3

**FIG. 4**

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2013/078124**A. CLASSIFICATION OF SUBJECT MATTER****H02N 2/06(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H02N 2/06; H02K 33/00; G06F 3/033; H02P 31/00; G06F 3/041; G06F 3/01; H02P 25/02; G08B 6/00

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords: device, haptic, touch, aging, temperature, resonant frequency, vibration, motor, actuator

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	JP 2013-109429 A (NISSHA PRINTING CO., LTD.) 06 June 2013 See abstract, paragraphs [0017]-[0061] and figures 1-13.	1-25
Y	US 2013-0264973 A1 (MAYANK GARG et al.) 10 October 2013 See abstract, paragraphs [0001]-[0002], [0035]-[0039] and figures 1-11.	1-25
A	EP 2216899 A2 (ANALOG DEVICES, INC.) 11 August 2010 See abstract, paragraphs [0010]-[0032] and figures 5-16.	1-25
A	US 2011-0102162 A1 (PEDRO GREGORIO et al.) 05 May 2011 See paragraphs [0013]-[0028], claims 2-5 and figures 1-3.	1-25
A	US 2011-0204830 A1 (JEONG CHEOL KIM et al.) 25 August 2011 See abstract, paragraphs [0030]-[0061] and figures 2-5.	1-25



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

24 September 2014 (24.09.2014)

Date of mailing of the international search report

24 September 2014 (24.09.2014)

Name and mailing address of the ISA/KR

International Application Division
Korean Intellectual Property Office
189 Cheongsu-ro, Seo-gu, Daejeon Metropolitan City, 302-701,
Republic of Korea

Facsimile No. +82-42-472-7140

Authorized officer

PARK, Hye Lyun

Telephone No. +82-42-481-3463



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2013/078124

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
JP 2013-109429 A	06/06/2013	TW 201337675 A WO 2013-073321 A1	16/09/2013 23/05/2013
US 2013-0264973 A1	10/10/2013	None	
EP 2216899 A2	11/08/2010	CN 101820239 A CN 101820239 B CN 101820248 A CN 101820248 B CN 101902191 A CN 101902191 B EP 2216897 A2 EP 2216897 A3 EP 2216898 A2 EP 2216898 A3 EP 2216899 A3 JP 2010-183832 A JP 2010-183833 A JP 2010-183834 A KR 10-2010-0091129 A TW 201036320 A TW 201037959 A TW 201037960 A US 2010-0201300 A1 US 2010-0201301 A1 US 2010-0201302 A1 US 2010-0202069 A1 US 8228017 B2 US 8299744 B2 US 8766565 B2 WO 2010-090904 A2 WO 2010-090904 A3 WO 2010-090909 A2 WO 2010-090909 A3 WO 2010-090910 A2 WO 2010-090910 A3	01/09/2010 13/11/2013 01/09/2010 12/06/2013 01/12/2010 30/10/2013 11/08/2010 30/05/2012 11/08/2010 23/01/2013 11/01/2012 19/08/2010 19/08/2010 19/08/2010 18/08/2010 01/10/2010 16/10/2010 16/10/2010 12/08/2010 12/08/2010 12/08/2010 12/08/2010 24/07/2012 30/10/2012 01/07/2014 12/08/2010 22/09/2011 12/08/2010 20/12/2012 12/08/2010 19/01/2012
US 2011-0102162 A1	05/05/2011	KR 10-2010-0069626 A US 2010-0153845 A1 US 7843277 B2	24/06/2010 17/06/2010 30/11/2010
US 2011-0204830 A1	25/08/2011	CN 102177653 A CN 102177653 B KR 10-0902354 B1 US 8581529 B2 WO 2010-047547 A2 WO 2010-047547 A3	07/09/2011 04/12/2013 12/06/2009 12/11/2013 29/04/2010 05/08/2010