

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
22 May 2008 (22.05.2008)

PCT

(10) International Publication Number  
**WO 2008/060463 A1**

- (51) **International Patent Classification:**  
C08F 14/18 (2006.01)
- (21) **International Application Number:**  
PCT/US2007/023642
- (22) **International Filing Date:**  
9 November 2007 (09.11.2007)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**  
60/858,008 9 November 2006 (09.11.2006) US
- (71) **Applicant (for all designated States except US):** E. I. DU PONT DE NEMOURS AND COMPANY [US/US]; 1007 Market Street, Wilmington, Delaware 19898 (US).
- (72) **Inventors; and**
- (75) **Inventors/Applicants (for US only):** BROTHERS, Paul, Douglas [US/US]; 112 Millbrook Drive, Chadds Ford, Pennsylvania 19317 (US). GANGAL, Subash, Vishnu [US/US]; 134 South Colts Neck Way, Hockessin, Delaware 19707 (US).
- (74) **Agent:** HENDRICKSON, John, S.; E. I. du Pont de Nemours and Company, Legal Patent Records Center, 4417 Lancaster Pike, Wilmington, Delaware 19805 (US).
- (81) **Designated States (unless otherwise indicated, for every kind of national protection available):** AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States (unless otherwise indicated, for every kind of regional protection available):** ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:**
- with international search report
  - before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments



WO 2008/060463 A1

(54) **Title:** AQUEOUS POLYMERIZATION OF FLUORINATED MONOMERS USING POLYMERIZATION AGENT COMPRISING FLUOROPOLYETHER ACID OR SALT AND HYDROCARBON SURFACTANT

(57) **Abstract:** A process for polymerizing at least one fluorinated monomer in an aqueous medium in the presence of initiator and polymerization agent to form an aqueous dispersion of particles of fluoropolymer having a fluoropolymers solids content of at least about 10% by weight. The polymerization agent is a combination of fluoropolyether acid or salt thereof and hydrocarbon surfactant. The aqueous medium contains less than about 300 ppm of perfluoroalkane carboxylic acid or salt fluorosurfactants. The process is preferably performed without adding polymer seed prior to polymerization kick-off.

**TITLE OF INVENTION**

AQUEOUS POLYMERIZATION OF FLUORINATED MONOMERS USING  
POLYMERIZATION AGENT COMPRISING  
5 FLUOROPOLYETHER ACID OR SALT AND  
HYDROCARBON SURFACTANT

**FIELD OF THE INVENTION**

This invention relates to a process for the dispersion  
10 polymerization of fluorinated monomers in an aqueous polymerization  
medium.

**BACKGROUND OF THE INVENTION**

A typical process for the aqueous dispersion polymerization of  
15 fluorinated monomers includes feeding fluorinated monomer to a heated  
reactor containing a fluorosurfactant and deionized water. Paraffin wax is  
employed in the reactor as a stabilizer for some polymerizations, e.g.,  
polytetrafluoroethylene (PTFE) homopolymers. A free-radical initiator  
solution is employed and, as the polymerization proceeds, additional  
20 fluorinated monomer is added to maintain the pressure. A chain transfer  
agent is employed in the polymerization of some polymers, e.g., melt-  
processable TFE copolymers to control melt viscosity. After several hours,  
the feeds are stopped, the reactor is vented and purged with nitrogen, and  
the raw dispersion in the vessel is transferred to a cooling or holding  
25 vessel.

For use in fluoropolymer coating applications, polymer  
dispersion is typically transferred to a dispersion concentration operation  
which produces stabilized dispersions used as coatings for metals, glass  
and fabric. Certain grades of PTFE dispersion are made for the  
30 production of fine powder. For this use, the dispersion is coagulated, the  
aqueous medium is removed and the PTFE is dried to produce fine  
powder. Melt-processible fluoropolymers for molding resin use are also  
coagulated and dried and then processed into a convenient form such as  
flake, chip or pellet for use in subsequent melt-processing operations.

As described in U.S. Patent 3,391,099 to Punderson, dispersion polymerization involves two generally distinct periods or phases. The initial period of the reaction is a nucleation phase in which a given number of polymerization sites or nuclei are established. Subsequently, there occurs a growth phase in which polymerization of fluorinated monomer on established particles occurs with little or no formation of new particles. Successful production of the high solids fluoropolymer dispersion generally requires the presence of the fluorosurfactant, especially in the later growth phase of polymerization in order to stabilize the dispersion preventing coagulation of the fluoropolymer particles.

Fluorosurfactants used in the polymerization are usually anionic, non-telogenic, soluble in water and stable to reaction conditions. The most widely used fluorosurfactants are perfluoroalkane carboxylic acids and salts as disclosed in U.S. Patent 2,559,752 to Berry. Because of recent environmental concerns with regard to perfluoroalkane carboxylic acids and salts, there is interest in reducing or eliminating perfluoroalkane carboxylic acid surfactants in fluoropolymer polymerization processes.

Perfluoroether carboxylic acids and salts are disclosed in U.S. Patent 3,271,341 to Garrison, U.S. Patent 3,391,099 to Punderson and US 2005/0090613 to Maruya for use in the aqueous polymerization of fluorinated monomers. U.S. Patent 4,864,006 to Gianetti et al. discloses the polymerization of fluorinated monomers in the presence of a perfluoropolyether having neutral end groups, a perfluoropolyether oil, in the form of an aqueous microemulsion. The aqueous microemulsion can be prepared using a perfluoropolyether having carboxylic end groups or cationic end groups. Examples in US 2005/00906 to Maruya et al. demonstrate the use of perfluoroether carboxylic acids and salts in producing TFE copolymers by producing polymer seed particles and subsequently completing the polymerization. In U.S. 6,395,848 to Morgan et al., aqueous dispersion polymerization of fluorinated monomers is improved by using a combination of fluorosurfactants, one of which is a perfluoropolyether carboxylic acid or sulfonic acid or salt of either.

35

**BRIEF SUMMARY OF INVENTION**

It has been discovered that a polymerization agent comprising a fluoropolyether acid or salt and hydrocarbon surfactant provides an effective polymerization agent for use in the manufacture of fluoropolymers. The process of the present invention, even when using limited quantities of polymerization agent, unexpectedly produces aqueous fluoropolymer dispersion with good solids content with low amounts of undispersed polymer without the use of perfluoroalkane carboxylic acid surfactants.

The present invention provides a process for polymerizing at least one fluorinated monomer in an aqueous medium in the presence of initiator and polymerization agent comprising fluoropolyether acid or salt thereof and hydrocarbon surfactant to form an aqueous dispersion of particles of fluoropolymer having a fluoropolymers solids content of at least about 10% by weight. The aqueous medium contains less than about 300 ppm of perfluoroalkane carboxylic acid or salt fluorosurfactants. In a preferred embodiment, the process is performed such that the polymerization medium is substantially free of fluoropolymer seed at polymerization kick-off.

The process preferably includes a polymerization agent which comprises a major amount by weight of fluoropolyether acid or salt thereof and a minor amount by weight of hydrocarbon surfactant. In preferred embodiments, the fluoropolyether acid or salt thereof is a perfluoroether acid or salt thereof, the acid groups are selected from carboxylic acid, sulfonic acid, and phosphonic acid, and the number average molecular weight of the fluoropolyether acid or salt thereof is about 800 to about 3500 g/mol, more preferably about 1000 to about 2500.

In one preferred embodiment of the present invention, substantially all of the polymerization agent is added to the aqueous medium prior to polymerization, for example, charging the reactor with a single addition of polymerization agent. In another preferred embodiment of the invention, the aqueous medium is substantially free of perfluoropolyether oils.

35

**DETAILED DESCRIPTION OF THE INVENTION****Fluoropolymer**

5 Fluoropolymer dispersions formed by this invention are comprised of particles of fluoropolymer made from at least one fluorinated monomer, i.e., wherein at least one of the monomers contains fluorine, preferably an olefinic monomer with at least one fluorine or a perfluoroalkyl group attached to a doubly-bonded carbon. The fluoropolymers can be

10 homopolymers of one fluorinated monomer or copolymers of two or more monomers, at least one of which is fluorinated. The fluorinated monomer used in the process of this invention is preferably independently selected from the group consisting of tetrafluoroethylene (TFE), hexafluoropropylene (HFP), chlorotrifluoroethylene (CTFE),

15 trifluoroethylene, hexafluoroisobutylene, perfluoroalkyl ethylene, fluorovinyl ethers, vinyl fluoride (VF), vinylidene fluoride (VF<sub>2</sub>), perfluoro-2,2-dimethyl-1,3-dioxole (PDD) and perfluoro-2-methylene-4-methyl-1,3-dioxolane (PMD). A preferred perfluoroalkyl ethylene monomer is perfluorobutyl ethylene (PFBE). Preferred fluorovinyl ethers include

20 perfluoro(alkyl vinyl ether) monomers (PAVE) such as perfluoro(propyl vinyl ether) (PPVE), perfluoro(ethyl vinyl ether) (PEVE), and perfluoro(methyl vinyl ether) (PMVE). Non-fluorinated olefinic comonomers such as ethylene and propylene can be copolymerized with fluorinated monomers.

25 Fluorovinyl ethers also include those useful for introducing functionality into fluoropolymers. These include  $\text{CF}_2=\text{CF}-(\text{O}-\text{CF}_2\text{CFR}_f)_a-\text{O}-\text{CF}_2\text{CFR}'_f\text{SO}_2\text{F}$ , wherein  $R_f$  and  $R'_f$  are independently selected from F, Cl or a perfluorinated alkyl group having 1 to 10 carbon atoms;  $a = 0, 1$  or  $2$ . Polymers of this type are disclosed in U.S. Patent No. 3,282,875

30  $(\text{CF}_2=\text{CF}-\text{O}-\text{CF}_2\text{CF}(\text{CF}_3)-\text{O}-\text{CF}_2\text{CF}_2\text{SO}_2\text{F}$ , perfluoro(3,6-dioxa-4-methyl-7-octenesulfonyl fluoride)), and in U.S. Patent Nos. 4,358,545 and 4,940,525  $(\text{CF}_2=\text{CF}-\text{O}-\text{CF}_2\text{CF}_2\text{SO}_2\text{F})$ . Another example is  $\text{CF}_2=\text{CF}-\text{O}-\text{CF}_2-\text{CF}(\text{CF}_3)-\text{O}-\text{CF}_2\text{CF}_2\text{CO}_2\text{CH}_3$ , methyl ester of perfluoro(4,7-dioxa-5-methyl-8-nonenecarboxylic acid), disclosed in U.S. Patent No. 4,552,631.

35 Similar fluorovinyl ethers with functionality of nitrile, hydroxyl, cyanate,

carbamate, and phosphonic acid are disclosed in U.S. Patent Nos. 5,637,748; 6,300,445; and 6,177,196.

The invention is especially useful when producing dispersions  
5 of melt-processible fluoropolymers. By melt-processible, it is meant that the polymer can be processed in the molten state (i.e., fabricated from the melt into shaped articles such as films, fibers, and tubes etc. that exhibit sufficient strength and toughness to be useful for their intended purpose). Examples of such melt-processible fluoropolymers include homopolymers  
10 such as polychlorotrifluoroethylene or copolymers of tetrafluoroethylene (TFE) and at least one fluorinated copolymerizable monomer (comonomer) present in the polymer usually in sufficient amount to reduce the melting point of the copolymer substantially below that of TFE homopolymer, polytetrafluoroethylene (PTFE), e.g., to a melting  
15 temperature no greater than 315°C.

A melt-processible TFE copolymer typically incorporate an amount of comonomer into the copolymer in order to provide a copolymer which has a melt flow rate (MFR) of about 1-100 g/10 min as measured according to ASTM D-1238 at the temperature which is standard for the  
20 specific copolymer. Preferably, the melt viscosity is at least about  $10^2$  Pa·s, more preferably, will range from about  $10^2$  Pa·s to about  $10^6$  Pa·s, most preferably about  $10^3$  to about  $10^5$  Pa·s measured at 372°C by the method of ASTM D-1238 modified as described in U.S. Patent 4,380,618. Additional melt-processible fluoropolymers are the copolymers of ethylene  
25 or propylene with TFE or CTFE, notably ETFE, ECTFE and PCTFE.

A preferred melt-processible copolymer for use in the practice of the present invention comprises at least about 40-98 mol% tetrafluoroethylene units and about 2-60 mol% of at least one other monomer. Preferred comonomers with TFE are perfluoroolefin having 3 to  
30 8 carbon atoms, such as hexafluoropropylene (HFP), and/or perfluoro(alkyl vinyl ether) (PAVE) in which the linear or branched alkyl group contains 1 to 5 carbon atoms. Preferred PAVE monomers are those in which the alkyl group contains 1, 2, 3 or 4 carbon atoms, and the copolymer can be made using several PAVE monomers. Preferred TFE  
35 copolymers include FEP (TFE/HFP copolymer), PFA (TFE/PAVE

copolymer), TFE/HFP/PAVE wherein PAVE is PEVE and/or PPVE, MFA (TFE/PMVE/PAVE wherein the alkyl group of PAVE has at least two carbon atoms) and THV (TFE/HFP/VF<sub>2</sub>).

5           The invention is also useful when producing dispersions of polytetrafluoroethylene (PTFE) including modified PTFE. PTFE and modified PTFE typically have a melt creep viscosity of at least  $1 \times 10^8$  Pa•s and, with such high melt viscosity, the polymer does not flow significantly in the molten state and therefore is not a melt-processible  
10           polymer. Polytetrafluoroethylene (PTFE) refers to the polymerized tetrafluoroethylene by itself without any significant comonomer present. Modified PTFE refers to copolymers of TFE with such small concentrations of comonomer that the melting point of the resultant polymer is not substantially reduced below that of PTFE. The  
15           concentration of such comonomer is preferably less than 1 weight %, more preferably less than 0.5 weight %. A minimum amount of at least about 0.05 wt% is preferably used to have significant effect. The modified PTFE containing a small amount of comonomer modifier has improved film forming capability during baking (fusing). Suitable comonomers  
20           include perfluoroolefin, notably hexafluoropropylene (HFP) or perfluoro(alkyl vinyl ether) (PAVE), where the alkyl group contains 1 to 5 carbon atoms, with perfluoro(ethyl vinyl ether) (PEVE) and perfluoro(propyl vinyl ether) (PPVE) being preferred. Chlorotrifluoroethylene (CTFE), perfluorobutyl ethylene (PFBE), or other  
25           monomer that introduces bulky side groups into the molecule may also be used.

          Further useful polymers are film forming polymers of polyvinylidene fluoride (PVDF) and copolymers of vinylidene fluoride as well as polyvinyl fluoride (PVF) and copolymers of vinyl fluoride.


30

#### **Fluoropolyether Acid or Salt**

          One component of the polymerization agent combination used in the practice of the present invention is a fluoropolyether acid or salt thereof. Preferably, the fluoropolyether is a perfluoropolyether acid or salt  
35           thereof. The acid groups of the fluoropolyether acid or salt thereof

preferably are acid groups selected from carboxylic acid, sulfonic acid, phosphonic acid. In preferred embodiments, the acid group of the fluoropolyether acid or salt there is carboxylic acid. Preferably, the fluoropolyether acid is employed as a salt, most preferably, an ammonium salt.

Preferred perfluoropolyether (PFPE) acids or salts thereof for use in accordance with the present invention can have any chain structure in which oxygen atoms in the backbone of the molecule are separated by saturated fluorocarbon groups having 1-3 carbon atoms. More than one type of fluorocarbon group may be present in the molecule. Representative structures have the repeat unit

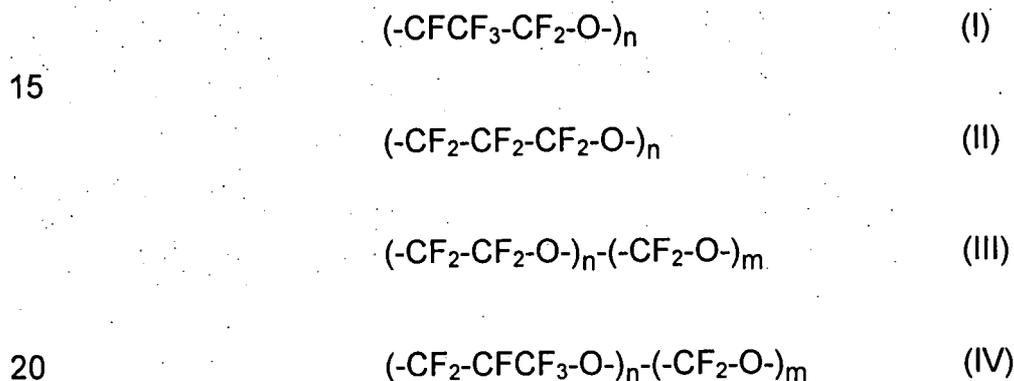

These structures are discussed by Kasai in J. Appl. Polymer Sci. 57, 797 (1995). As disclosed therein, such PFPE can have a carboxylic acid group or salt thereof at one end or at both ends. Similarly, such PFPE may have a sulfonic acid or phosphonic acid group or salt thereof at one end or both ends. In addition, PFPE with acid functionality at both ends may have a different group at each end. For monofunctional PFPE, the other end of the molecule is usually perfluorinated but may contain a hydrogen or chlorine atom. PFPE having an acid group at one or both ends for use in the present invention has at least 2 ether oxygens, preferably at least 4 ether oxygens, and even more preferably at least 6 ether oxygens. Preferably, at least one of the fluorocarbon groups separating ether oxygens, and more preferably at least two of such fluorocarbon groups, has 2 or 3 carbon atoms. Even more preferably, at least 50% of the fluorocarbon groups separating ether oxygens have 2 or

3 carbon atoms. Also, preferably, the PFPE has a total of at least 9 carbon atoms, e.g., the minimum value of  $n$  or  $n+m$  in the above repeat unit structures is at least 3. More than one PFPE having an acid group at one or both ends can be used in a process in accordance with the invention. Typically, unless extraordinary care is employed to manufacture a single specific PFPE compound, the PFPE may contain multiple compounds in varying proportions within a molecular weight range about the average molecular weight.

The fluoropolyether acid or salt thereof has an average molecular weight which enables it to function in combination with hydrocarbon surfactant as a polymerization agent in a process in accordance with the present invention. The number average molecular weight of the fluoropolyether acid or salt preferably is greater than about 500 g/mol but less than about 6000 g/mol because fluoropolyether acids or salt with very high molecular weights generally are difficult to dissolve/disperse in the aqueous polymerization medium. More preferably, the fluoropolyether acid or salt thereof employed in accordance with the invention has a number average molecular weight of about 800 to about 3500 g/mol, more preferably about 1000 to about 2500, most preferably about 1200 to about 2000.

### **Hydrocarbon Surfactant**

The other component of the polymerization agent combination used in the process of this invention is a hydrocarbon surfactant. Suitable hydrocarbon surfactants may be nonionic, cationic, or anionic.

In one preferred embodiment the hydrocarbon surfactant is a nonionic hydrocarbon surfactant. Nonionic surfactants include polyoxyethylene alkyl ethers, polyoxyethylene alkyl phenyl ethers, polyoxyethylene alkyl esters, sorbitan alkyl esters, polyoxyethylene sorbitan alkyl esters, glycerol esters, their derivatives and the like. More specifically examples of polyoxyethylene alkyl ethers are polyoxyethylene lauryl ether, polyoxyethylene cetyl ether, polyoxyethylene stearyl ether, polyoxyethylene oleyl ether, polyoxyethylene behenyl ether and the like; examples of polyoxyethylene alkyl phenyl ethers are polyoxyethylene

nonyl phenyl ether, polyoxyethylene octyl phenyl ether and the like; examples of polyoxyethylene alkyl esters are polyethylene glycol monolaurylate, polyethylene glycol monooleate, polyethylene glycol monostearate and the like; examples of sorbitan alkyl esters are polyoxyethylene sorbitan monolaurylate, polyoxyethylene sorbitan monopalmitate, polyoxyethylene sorbitan monostearate, polyoxyethylene sorbitan monooleate and the like; examples of polyoxyethylene sorbitan alkyl esters are polyoxyethylene sorbitan monolaurylate, polyoxyethylene sorbitan monopalmitate, polyoxyethylene sorbitan monostearate and the like; and examples of glycerol esters are glycerol monomyristate, glycerol monostearate, glycerol monooleate and the like. Also examples of their derivatives are polyoxyethylene alkyl amine, polyoxyethylene alkyl phenyl-formaldehyde condensate, polyoxyethylene alkyl ether phosphate and the like. Particularly preferable are polyoxyethylene alkyl ethers and polyoxyethylene alkyl esters which have an HLB value of 10 to 18. More particularly there are polyoxyethylene lauryl ether (EO: 5 to 20. EO stands for an ethylene oxide unit.), polyethylene glycol monostearate (EO: 10 to 55) and polyethylene glycol monooleate (EO: 6 to 10).


Suitable nonionic hydrocarbon surfactants include octyl phenol ethoxylates such as the Triton® X series supplied by Dow Chemical Company:

Triton®

X15 (n~1.5)

X45 (n~4.5)

X100 (n~10)

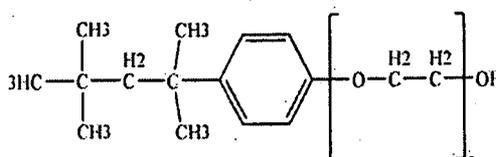

25


Preferred nonionic hydrocarbon surfactants are branched alcohol ethoxylates such as the Tergitol® 15-S series supplied by Dow Chemical Company and branched secondary alcohol ethoxylates such as the Tergitol® TMN series also supplied by Dow Chemical Company.:

Tergitol®

TMN-6 (n~8)

TMN-10 (n~11)

35 TMN-100 (n~10)

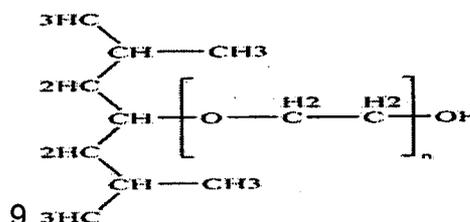

Ethyleneoxide/propylene oxide copolymers such as the Tergitol® L series surfactant supplied by Dow Chemical Company are also useful in this invention.

Another group of suitable nonionic hydrocarbon surfactants are tridecyl alcohol alkoxyates supplied as Iconol® TDA series from BASF Corporation.


10

Iconol®

TDA-6 (n=6)

TDA-9 (n=9)

TDA-10 (n=10)

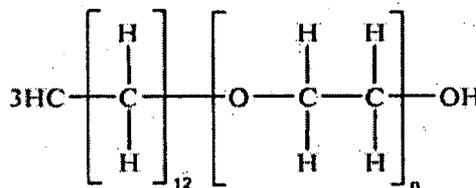

15

Yet another useful group of suitable nonionic hydrocarbon surfactants are difunctional block copolymers supplied as Pluronic® R series from BASF, such as:


20

Pluronic® R

31R1 (m~26, n~8)

17R2 (m~14, n~9)

10R5 (m~8, n~22)

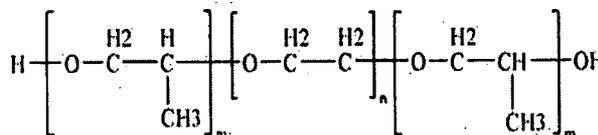


25

In another embodiment the hydrocarbon surfactant is an anionic hydrocarbon surfactant. One such example is the highly branched C10 tertiary carboxylic acid supplied as Versatic® 10 by Resolution Performance Products.

30


Versatic® 10

Neodecanoic acid (n+m=7)



Another useful anionic hydrocarbon surfactant is the sodium linear alkyl polyether sulfonates supplied as the Avel S series by BASF. The ethylene oxide chain provides nonionic characteristics to the surfactant and the sulfonate groups provide certain anionic characteristics.

Avel®

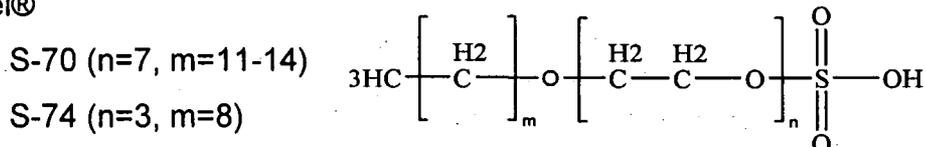

## 10 Process

In the practice of a preferred embodiment of the invention, the process is carried out as a batch process in a pressurized reactor.

Suitable vertical or horizontal reactors for carrying out the process of the invention are equipped with stirrers for the aqueous medium to provide sufficient contact of gas phase monomers such as TFE for desirable reaction rates and uniform incorporation of comonomers if employed. The reactor preferably includes a jacket surrounding the reactor so that the reaction temperature may be conveniently controlled by circulation of a controlled temperature heat exchange medium.

In a typical process, the reactor is first charged with deionized and deaerated water to which the fluoropolyether acid or salt thereof and polymerization agent combination is added. The addition of the fluoropolyether acid or salt thereof and hydrocarbon surfactant combination is discussed in more detail hereinafter. A suitable procedure for TFE copolymers such as FEP or PFA includes first pressurizing the reactor with TFE. Some or all of the comonomer such as HFP or perfluoro(alkyl vinyl ether) is then added and normally a chain transfer agent such as ethane is also added to reduce the molecular weight and increase melt flow of the copolymer as desired for use. A free-radical initiator solution such as ammonium persulfate solution is then added. The temperature is increased and, once polymerization begins, additional TFE is added to maintain the pressure. The beginning of polymerization is referred to as kick-off and is defined as the point at which gaseous monomer feed pressure is observed to drop substantially, for example, about 10 psi (about 70 kPa). Moreover, in a preferred process, the

polymerization medium is substantially free of fluoropolymer seed at polymerization kick-off. In this preferred form of the invention, fluoropolymer seed, i.e., separately polymerized small fluoropolymer particles in dispersion form, is not added prior to the start of  
5 polymerization. Comonomer and/or chain transfer agent can also be added as the polymerization proceeds. For some polymerizations, additional initiator and or polymerization agent may be added during the polymerization.

10 Batch dispersion polymerizations can be described as proceeding in two phases. The initial period of the reaction can be said to be a nucleation phase during which a given number particles are established. Subsequently, it can be said that a growth phase occurs in which the predominant action is polymerization of monomer on  
15 established particles with little or no formation of new particles. The transition from the nucleation to the growth phase of polymerization occurs smoothly, typically between about the 4 and about the 10 percent solids for the polymerization of TFE.

20 After batch completion (typically several hours) when the desired amount of polymer or solids content has been achieved, the feeds are stopped, the reactor is vented, and the raw dispersion in the vessel is transferred to a cooling or holding vessel.

The solids content of fluoropolymer dispersion produced by the process of the invention is at least about 10% by weight. Preferably, the  
25 fluoropolymers solids content is at least about 20% by weight. A preferred range for fluoropolymer solids content produced by the process is about 20% to about 65% by weight, more preferably about 20% to about 55% by weight.

30 In a preferred process of the invention, polymerizing produces less than about 10 wt%, more preferably less than about 3 wt%, even more preferably less than about 1 wt%, most preferably less than about 0.5 wt% undispersed fluoropolymer (sometimes referred to in the art as coagulum) based on the total weight of fluoropolymer produced.

35 The as-polymerized dispersion can be transferred to a dispersion concentration operation which produces concentrated

dispersions stabilized typically with nonionic surfactants by known methods. Solids contents of concentrated dispersion is typically about 35 to about 70% by weight. Alternatively, for use as a molding resin, the dispersion is coagulated and the aqueous medium is removed. The fluoropolymer is dried then processed into a convenient form such as flake, chip or pellet for use in subsequent melt-processing operations.

The dispersion polymerization of homopolymer PTFE or modified PTFE is similar except that no comonomer or much less comonomer is added to the batch initially and/or introduced during polymerization. Chain transfer agents may be used but typically in lower amounts. Paraffin wax is typically employed as a stabilizer during the polymerization. The same dispersion concentration operation can be used to produce stabilized concentrated dispersions. Certain grades of PTFE dispersion are made for the production of fine powder. For this use, the dispersion is coagulated, the aqueous medium is removed and the PTFE is dried to produce fine powder.

### Initiators

Polymerization in accordance with the invention employs free radical initiators capable of generating radicals under the conditions of polymerization. As is well known in the art, initiators for use in accordance with the invention are selected based on the type of fluoropolymer and the desired properties to be obtained, e.g., end group type, molecular weight, etc. For some fluoropolymers such as melt-processible TFE copolymers, water-soluble salts of inorganic peracids are employed which produce anionic end groups in the polymer. Preferred initiators of this type have a relatively long half-life, preferably persulfate salts, e.g., ammonium persulfate or potassium persulfate. To shorten the half-life of persulfate initiators, reducing agents such as ammonium bisulfite or sodium metabisulfite, with or without metal catalyst salts such as Fe, can be used. Preferred persulfate initiators are substantially free of metal ions and most preferably are ammonium salts.

For the production of PTFE or modified PTFE dispersions for dispersion end uses, small amounts of short chain dicarboxylic acids such

as succinic acid or initiators that produce succinic acid such as disuccinic acid peroxide (DSP) are preferably also added in addition to the relatively long half-life initiators such as persulfate salts. Such short chain dicarboxylic acids are typically beneficial in reducing undispersed polymer (coagulum). For the production of PTFE dispersion for the manufacture of fine powder, a redox initiator system such as potassium permanganate/oxalic acid is often used.

The initiator is added to the aqueous polymerization medium in an amount sufficient to initiate and maintain the polymerization reaction at a desired reaction rate. At least a portion of the initiator is added at the beginning of the polymerization. A variety of modes of addition may be used including continuously throughout the polymerization, or in doses or intervals at predetermined times during the polymerization. A particularly preferred mode of operation is for initiator to be precharged to the reactor and additional initiator to be continuously fed into the reactor as the polymerization proceeds. Preferably, total amounts of ammonium persulfate or potassium persulfate employed during the course of polymerization for melt-processible copolymers are about 25 ppm to about 250 ppm based on the weight of the aqueous medium. Other types of initiators, for example, potassium permanganate/oxalic acid initiators, can be employed in amounts and in accordance with procedures as known in the art.

### **Chain Transfer Agents**

Chain-transfer agents may be used in a process in accordance with the invention for the polymerization of some types of polymers, e.g.,  
5 for melt-processible TFE copolymers to decrease molecular weight for the purposes of controlling melt viscosity. Chain transfer agents useful for this purpose are well-known for use in the polymerization of fluorinated monomers. Preferred chain transfer agents include hydrogen, aliphatic hydrocarbons, halocarbons, hydrohalocarbons or alcohol having 1 to 20  
10 carbon atoms, more preferably 1 to 8 carbon atoms. Representative examples of such chain transfer agents are alkanes such as ethane, chloroform and methanol.

The amount of a chain transfer agent and the mode of addition depend on the activity of the particular chain transfer agent and on the  
15 desired molecular weight of the polymer product. A variety of modes of addition may be used including a single addition before the start of polymerization, continuously throughout the polymerization, or in doses or intervals at predetermined times during the polymerization. The amount of chain transfer agent supplied to the polymerization reactor is  
20 preferably about 0.005 to about 5 wt%, more preferably from about 0.01 to about 2 wt% based upon the weight of the resulting fluoropolymer.

### **Polymerization Agent**

In accordance with the invention, the fluoropolyether acid or  
25 salt thereof is preferably dispersed adequately in aqueous medium for it to function effectively in combination with the hydrocarbon surfactant as a polymerization agent. Preferably, the fluoropolyether acid salt is dispersed sufficiently so that the polymerization medium containing fluoropolyether acid salt appears water clear or nearly water clear. More preferably, an  
30 aqueous concentrate of the dispersed fluoropolyether acid salt (and dispersing aid, if used) adjusted to contain 1500 ppm  $\pm$  100 ppm of the fluoropolyether acid salt has a haze in the test method described hereinafter of less than about 55%, preferably less than about 15%, more preferably less than about 13%, even more preferably less than about  
35 10%, and most preferably less than about 7%. A preferred range for the

haze of the aqueous concentrate of the dispersed fluoropolyether acid salt is from about 0 to about 55%. Low haze values at 1500 ppm  $\pm$  100 ppm correlate well with performance of the fluoropolyether salt as a nucleating agent in the aqueous polymerization process, e.g., polymerizations employing lower haze concentrates produce less undispersed polymer (coagulum) than concentrates with higher haze values. Haze values of the aqueous polymerization medium itself containing the dispersed fluoropolyether salt are less sensitive to the contribution of haze by the fluoropolyether salt because of the low fluoropolyether salt content and may be affected by other components in the aqueous polymerization medium.

In one suitable procedure, the polymerization agent can be made directly in the aqueous polymerization medium. In this procedure, the fluoropolyether acid or salt is supplied in acid form and subsequently converted to salt form. This is accomplished by first adding ammonia or alkali metal hydroxide to the aqueous polymerization medium in a quantity sufficient to substantially completely convert to salt form the subsequently added fluoropolyether acid. The fluoropolyether acid can then be added to the ammonia or alkali metal hydroxide solution and, if desired, pH measurements can be made to determine if insufficient or excess base has been used. In addition, as known in the art, the amount ammonia or alkali metal hydroxide used, together with other materials added to the polymerization medium, should provide a pH in the aqueous polymerization medium which promotes the desired level of activity for the particular initiator system used and provides an operable pH range for the polymerization agent. The hydrocarbon surfactant can be added to the aqueous polymerization medium prior to, simultaneously with or subsequently to the addition of the fluoropolyether acid.

Another suitable procedure for making the polymerization agent employs making an aqueous concentrate of the dispersed fluoropolyether acid or salt which is added to a larger volume of aqueous polymerization medium. The concentrate can be made by similarly reacting the fluoropolyether acid with a small volume of aqueous ammonia or alkali metal hydroxide to produce the concentrate containing the salt form of the

fluoropolyether acid. This concentrate can then be mixed into the aqueous polymerization medium to supply the already dispersed fluoropolyether acid or salt in the desired quantity. In addition, as stated above, the amount ammonia or alkali metal hydroxide used to make the concentrate, should provide a pH in the aqueous polymerization medium which promotes the desired level of activity for the particular initiator system used and provides an operable pH range for the polymerization agent. The hydrocarbon surfactant can be added to the aqueous polymerization medium prior to, simultaneously with or subsequently to the addition of the fluoropolyether acid. If the same proportions of fluoropolyether acid or salt to hydrocarbon surfactant are to be used for multiple polymerizations, it may be convenient for the hydrocarbon surfactant to be present in the aqueous fluoropolyether acid or salt concentrate.

In a preferred form of the invention, dispersing aids are used to assist with dissolving/dispersing of the fluoropolyether acid or salt by contacting the acid or salt with the dispersing aid. A dispersing aid is especially useful for dissolving/dispersing higher molecular weight fluoropolyether acid or salt thereof, e.g., above about 1200 g/mol. Dispersing aids are useful in either procedure discussed above for dispersing the fluoropolyether acid or salt.

Any of a variety of dispersing aids may be used to aid in dissolving/dispersing the fluoropolyether acid or salt for use in accordance with the present invention. A surfactant, preferably the hydrocarbon surfactant to be used in polymerization, is useful to disperse fluoropolyether acid or salt. In general, and particularly when polymerizing a high molecular weight fluoropolymer, a low telogenic or non-telogenic dispersing aid is preferred. With some dispersing aids, it is desirable to mix the dispersing aid with fluoropolyether acid or salt prior to addition to the aqueous polymerization medium or to the aqueous medium that forms the concentrate.

One suitable class of dispersing aids includes C3 to C8 alcohols with a particularly suitable dispersing aid being t-butanol. When the fluoropolyether acid or salt is supplied in acid form and the ammonium

salt is to be used in the polymerization agent, concentrates can be formed by simultaneously mixing fluoropolyether acid, t-butanol, and an aqueous ammonia solution and stirring. Hydrocarbon surfactant can be added subsequently. t-butanol is preferably added in an amount of about 0.5X to about 3X the weight of the fluoropolyether acid although the lowest amount which is effective is preferably employed to decrease telogenic effects. C3 to C8 alcohols such as t-butanol would generally not be used for polymerization of PTFE or modified PTFE because their telogenic activity may interfere with achieving the high molecular weight usually desired. In some cases, it is desirable for water to be present with the C3 to C8 alcohol, i.e., an alcohol/water mixture is used, to effectively disperse the fluoropolyether acid or salt.

Another particularly suitable class of dispersing aids are fluorinated organic acids or salts, preferably having a molecular weight of less than 500 g/mol, e.g., low molecular weight fluoromonoether acids or salts, low molecular weight fluoropolyether acids or salts, and low molecular weight perfluoroalkane carboxylic acids. Such dispersing aids have low telogenic activity and generally do not interfere with the use of wax. Suitable fluorinated organic acids or salt are low molecular weight fluoromonoether acids or salts, i.e., having a molecular weight of less than 500 g/mol, for example,  $\text{CF}_3\text{CF}_2\text{CF}_2\text{OCF}(\text{CF}_3)\text{COOH}$ . Fluoropolyether acids or salts with a molecular weight of less than 500 g/mol can also be used. When the fluoropolyether acid or salt is supplied in acid form, it is preferable for the fluorinated organic acid or salt to also be supplied in acid form. Preferably, the fluoropolyether acid and fluorinated organic acid are mixed together prior to addition to the aqueous polymerization medium or the aqueous medium used to make the concentrate. This mixture is preferably contacted with an aqueous ammonia solution to form dispersed fluoropolyether salt. Fluoromonoether acids or salts and fluoropolyether acids or salts, each having a molecular weight of less than 500 g/mol, are preferably added in an amount of at least about 0.5X times the weight of the fluoropolyether acid. Typically, amounts greater than about 20X are not necessary and preferably the lowest amount which is effective is employed. A particularly preferred range is about 0.5X to about 3X.

Perfluoroalkane carboxylic acids having a molecular weight of less than 500 g/mol can function as dispersing aids but are not preferred for use in accordance with the present invention. If used, they are used in amounts  
5 less than about 300 ppm based on the weight of water in the aqueous medium.

In a preferred form of the invention, the polymerization agent employed in accordance with the present invention comprises a major amount by weight of fluoropolyether acid or salt thereof and a minor  
10 amount by weight of hydrocarbon surfactant. More preferably, the hydrocarbon surfactant comprises about 1% to about 45% by weight of the polymerization agent. Even more preferably, the hydrocarbon surfactant comprises about 1% to about 35% by weight of the polymerization agent. In a preferred embodiment of the present invention, the hydrocarbon  
15 surfactant comprises about 10% to about 30% by weight of the polymerization agent.

Preferably, the amount of fluoropolyether acid or salt used in the aqueous polymerization medium is about 5 to about 2000 ppm based on the weight of water in the aqueous polymerization medium, more  
20 preferably about 50 to about 1000 ppm, and most preferably about 100 to about 350 ppm. The total amount of polymerization agent combination used in a preferred process in accordance with the invention is about 5 to about 3000 ppm based on the weight of water in the aqueous medium. Preferably, the total amount of polymerization agent combination used is  
25 about 50 ppm to about 2000 ppm based on the weight of water in the aqueous medium, more preferably, about 150 ppm to about 500 ppm.

As described above, the hydrocarbon surfactant is preferably employed in minor amounts and with preferred amounts of hydrocarbon surfactant being based on the amount of fluoropolyether acid or salt  
30 employed. However, because the hydrocarbon surfactant can react with the initiator and is telogenic, i.e., acts to prematurely stop chain growth, the amount of hydrocarbon used in relation to the amount of initiator should be limited so polymerization will start and proceed at a desirable rate. For example, in the preferred form of the invention in which 100 ppm  
35 to about 350 ppm fluoropolyether acid or salt based on the weight of water

are employed and all of the polymerization agent is added prior to polymerization, an especially preferred range for the hydrocarbon surfactant is about 10 to about 110 ppm. Higher quantities of hydrocarbon  
5 surfactant may be used if the polymerization agent, or at least the hydrocarbon component of the polymerization agent, is supplied during the course of polymerization as discussed below.

At least a portion of the polymerization agent is preferably added to the polymerization medium prior to the start of the  
10 polymerization. If added subsequently, a variety of modes of addition for the polymerization agent may be used including continuously throughout the polymerization, or in doses or intervals at predetermined times during the polymerization. In accordance with one embodiment of the invention, substantially all of the polymerization agent is added to the aqueous  
15 medium prior to the start of polymerization.

In accordance with the invention, the aqueous polymerization medium comprises less than about 300 ppm of perfluoroalkane carboxylic acid or salt fluorosurfactants, based on the weight of water in the aqueous medium. Perfluoroalkane carboxylic acid or salt fluorosurfactants include  
20 perfluoroalkane, e.g., ammonium perfluorooctanoate. Preferably, the aqueous polymerization medium comprises less than about 100 ppm of perfluoroalkane carboxylic acid or salt fluorosurfactants, more preferably less than 50 ppm. In a preferred embodiment of the invention, the aqueous polymerization medium is substantially free of perfluoroalkane  
25 carboxylic acid or salt fluorosurfactants. Substantially free of perfluoroalkane carboxylic acid or salt fluorosurfactants means that aqueous polymerization medium contains no more than about 10 ppm of such fluorosurfactants.

In accordance with a preferred form of the invention the  
30 polymerization agent combination used in the practice of this invention is preferably substantially free of perfluoropolyether oils (i.e., perfluoropolyethers having neutral end groups). Substantially free of perfluoropolyether oils means that aqueous polymerization medium contains no more than about 10 ppm of such oils based on water. This  
35 form of the invention is unlike the aqueous microemulsion system as

disclosed in U.S. Patent 4,864,006 to Gianetti et al. which employs such perfluoropolyether oils.

5

## EXAMPLES

### Test Methods

The fluoropolymer melting point (T<sub>m</sub>) is measured by  
10 Differential Scanning Calorimeter according to the procedure of ASTM  
D 4591.

Comonomer content (PPVE or HFP) is measured by FTIR  
according to the method disclosed in U.S. Patent No. 4,743,658, col. 5,  
lines 9-23.

15 Melt flow rate (MFR) is measured according to ASTM D-1238  
at the temperature which is standard for the specific copolymer.

Haze is measured on an aqueous concentrate of the dispersed  
fluoropolyether acid salt (and dispersing aid, if used) which is adjusted to  
contain 1500 ppm  $\pm$  100 ppm of the fluoropolyether acid salt. The haze is  
20 measured in transmission mode on a Hunter® ColorQuest XE  
spectrophotometer with sphere geometry using HunterLab Universal  
Software v 4.0. The sample cell is a 50 mm transmission cell. The  
transmission haze measurement is the ratio of diffuse light to the total light  
transmitted by a specimen multiplied by 100 to express a percentage of  
25 transmission.

### Polymerization Agent Components

Two fluoropolyether acids are employed which are  
perfluoropolyether acids having carboxylic acid group (PFPEA) each  
30 having the repeat unit of Formula 1 above and are converted to  
ammonium salts in the examples which follow. PFPEA 1 has a number  
average molecular weight of about 1165 (n=about 6 in Formula 1).  
PFPEA 2 has a number average molecular weight of about 2100 (n=about  
12 in Formula 1). PFPEA 2 is available commercially available as Krytox®  
35 157 FSL from DuPont.

The hydrocarbon surfactants used in the Examples are the following:

- 5 Triton X100 – Dow Chemical
- Triton X45 – Dow Chemical
- Tergitol TMN 100– Dow Chemical
- Pluronic 31 R1 – BASF
- Pluronic 17R2 – BASF
- Pluronic 10R5 – BASF
- 10 Avanel S-74 – BASF
- Avanel S-70 – BASF
- Iconol TDA-10 – BASF
- Versatic 10 – Resolution Performance Products

15 The ammonium hydroxide is a 30 wt% aqueous solution (wt% calculated as  $\text{NH}_3$ ).

For the Examples of the invention containing PFPEA 1 (Examples 1-19, Comparative 1), polymerization agent concentrates containing PFPEA 1 are made by first adding 900 g of deionized water to a 1 liter  
20 glass container. The amount of 30 wt% ammonium hydroxide indicated in Table 1 is added to the 900 g of deionized water. Then, the amount of PFPEA 1 indicated in Table 1 is added. The contents of the container are mixed either mechanically or with ultrasound to produce a slightly cloudy mixture (haze less than about 7%). The amount and type of hydrocarbon  
25 surfactant (HC) as indicated in the Table 1 below is added. Upon additional mixing, the mixture typically becomes water clear. Comparative 1 is made similarly without hydrocarbon surfactant.

**Table 1**

Example	PFPEA (g)	HC	HC (g)	NH <sub>4</sub> OH (g)
Ex 1	0.76	TritonX100	0.317	0.069
Ex 2	0.76	TritonX100	0.317	0.069
Ex 3	0.76	Triton X100	0.317	0.069
Ex 4	1.3	Triton X100	0.317	1.11
Ex 5	0.78	TritonX45	0.318	
Ex 6	0.191	TMN-100	0.317	1.0
Ex 7	1.3	TMN-100	0.317	1.11
Ex 8	1.305	Plur331R1	0.317	1.11
Ex 9	1.305	Plur331R1	0.317	1.11
Ex 10	1.3	Plur331R1	0.317	1.11
Ex 11	1.3	Plur171R2	0.317	1.11
Ex 12	1.3	Plur10R5	0.317	1.11
Ex 13	1.3	AvanelS74	0.317	1.11
Ex 14	1.3	AvanelS70	0.317	1.11
Ex 15	0.078	TDA-10	0.317	0.067
Ex 16	0.633	TDA-10	0.156	0.544
Ex 17	1.3	TDA-10	0.317	1.11
Ex 18	0.078	Vers 10	0.317	0.21
Ex 19	1.3	Vers 10	0.317	1.25
Ex 20	1.3	Triton X100	0.17	0.29
Ex 21	1.27	Avanel S74	0.167	0.29
Comp 1	1.3		-	1.96

Examples 1 – 19 use PFPEA-1

Examples 20 and 21 and Comparative Example 1 use PFPEA-2.

5

For Examples 20 and 21, polymerization agent concentrates containing PFPEA 2 are made by adding 1.30 g and 1.27 g PFPEA2, 2.60 g and 2.54 g t-butanol (dispersing aid), 2.60 g and 2.54 g deionized water, and 0.29 g and 0.29 g 30 wt% ammonium hydroxide to a vial which is sealed and shaken under cold running water to remove the heat of reaction. A colorless, single phase liquid results. This liquid is added dropwise with agitation to deionized water to make a clear mixture 274 ml in volume (haze less than about 3%). 1.3 g and 1.27 g hydrocarbon

10

surfactant is added with stirring. The final mixture is water clear with a pH of 9.5.

### **Examples 1-21 and Comparative 1**

5           The process of the invention is illustrated in the polymerization of melt-processible copolymers of tetrafluoroethylene (TFE) with perfluoro(alkyl vinyl ether), i.e., perfluoro(propyl vinyl ether) (PPVE).

          Deaerated water is used in the polymerizations. It is prepared by pumping deionized water into a large stainless steel vessel and  
10 vigorously bubbling nitrogen gas for approximately 30 minutes through the water to remove oxygen.

          In a 12 liter, horizontal autoclave equipped with a paddle agitator, 7.57 kg of deaerated water is added. The PFPEA 1 or PFPEA 2 concentrates described above charged to the autoclave to provide the  
15 polymerization medium for the Examples. 510 ml is charged for Examples 1-21 and Comparative 1. Based on the amounts employed to make the concentrates, Table 2A shows the amounts of polymerization agent components in the polymerization medium (ppm based on weight of water in the aqueous medium).

20           A vacuum of approximately 28 inches of water column (7 kPa) is applied to the reactor. The reactor is then raised to 30 psig (310 kPa) with gaseous TFE while agitating at 70 rpm. The agitator is stopped and the TFE pressure reduced to approximately 10 psig (100 kPa) by venting. This pressure/vent cycle is conducted two more times, further insuring that  
25 the contents of the autoclave are free of oxygen. Ethane (0.3-0.5 g) and PPVE (100 g) is then added to the reactor.

          The reactor is then heated to 75°C with agitation at 100 rpm. When at temperature, the reactor pressure is raised to a nominal 300 psig (2.17 MPa) by adding TFE (270-330 g). Initiator solution, containing 6.2  
30 grams of ammonium persulfate in 1 liter of deionized water, is charged to the autoclave at a rate of 100 ml/min to provide a precharge of 0.45-2.66 g ammonium persulfate. Total initiator added is indicated in Table 2A. The same Initiator solution is pumped continuously to the autoclave during polymerization at a rate of 0.54 ml/min. At kickoff [10 psig (70 kPa)  
35 pressure drop is observed] the polymerization is deemed to have been

started. Reactor pressure is allowed to cycle between 285 psig (2.1 MPa) and 315 psig (2.28 MPa) by intermittently making up monomers composed of 96 wt% TFE and 4 wt% PPVE. After the total monomers (including

5 precharged PPVE and TFE) stated in Table 2A is reached, the agitator is stopped and the reactor vented to atmospheric pressure. The fluoropolymer dispersion thus produced has a solids content of greater than 10%. Polymer is isolated from the dispersion by freezing, thawing and filtration. Using a high speed agitator, the polymer is washed in

10 deionized water and filtered several times before being dried overnight in a vacuum oven at 100 to 110°C and a vacuum of 6 to 10 mm Hg (0.8 – 1.3 kPa). Results are reported in Table 2B.

**Table 2A**  
TFE/PPVE Polymerization

Example	PFPEA (g)	PFPEA (ppm)	Surfactant	Surfactant (g) (ppm)	APS (g)	Ethane (g)	Total Monomer
Ex 1	0.076	9	Triton X100	0.317 38	2.93	0.5	2590
Ex 2	0.076	9	Triton X100	0.317 38	3.00	0.5	3091
Ex 3	0.076	9	Triton X100	0.317 38	3.00	0.5	3107
Ex 4 (1)	1.3	159	Triton X100	0.317 39	0.94	0.5	2012
Ex 5	0.78	96	Triton X45	0.318 39	2.86	0.5	2093
Ex 6	0.191	23	TMN-100	0.317 39	2.68	0.5	2080
Ex 7	1.3	159	TMN-100	0.317 39	0.94	0.5	2019
Ex 8	1.305	159	Plur 31R1	0.317 39	3.06	0.3	3643
Ex 9	1.305	159	Plur 31R1	0.317 39	3.06	0.3	3642
Ex 10	1.3	159	Plur 31R1	0.317 39	2.86	0.3	2068
Ex 11 (1)	1.3	159	Plur 17R2	0.317 39	0.94	0.5	1998
Ex 12 (1)	1.3	159	Plur 10R5	0.317 39	0.94	0.5	2004
Ex 13 (1)	1.3	159	Avanel S74	0.317 39	0.94	0.5	2023
Ex 14 (1)	1.3	159	Avanel S70	0.317 39	2.86	0.5	2035
Ex 15	0.078	10	TDA-10	0.317 39	2.86	0.3	2040
Ex 16	0.633	77	TDA-10	0.156 19	2.86	0.3	2051
Ex 17 (1)	1.3	159	TDA-10	0.317 39	0.94	0.3	2032
Ex 18	0.078	10	Vers 10	0.317 39	2.86	0.3	2047
Ex 19 (1)	1.3	159	Vers 10	0.317 39	0.94	0.3	2029
Ex 20	1.3	166	Triton X100	0.17 22	0.50	0.3	1991
Ex 21	1.27	162	Avanel S74	0.167 21	3.27	0.3	1994
Comp 1	1.3	159	--	-- --	0.61	0	2085

5 Examples 1 – 19 use PFPEA-1

Examples 20 and 21 and Comparative Example 1 use PFPEA-2.

**Table 2B**

## TFE/PPVE Polymerization

Example	Kick-off (min)	Completion Time (min)	Solids wt%	MPT. (°C)	PPVE wt%	MFR	Undispersed Polymer (g) wt%	
Ex 1	11	135	16.1	309	4.75	39	3	0.2%
Ex 2	16	171	16.4	308	5.63	46	0	0.0%
Ex 3	10	191	16.4	309	6.2	17	107	6.4%
Ex 4 (1)	77	95	15.7	309	4.74	26	16	1.0%
Ex 5	13	135	15.9	311	4.78	17	0	0.0%
Ex 6	16	78	15.5	312	4.23	158	0	0.0%
Ex 7	35	92	15.8	311	4.38	38	0	0.0%
Ex 8	2	111	17	302	6.83	25	3	0.2%
Ex 9	2	200	27	307	5.8	43	182	5.7%
Ex 10	2	112	16.3	306	5.46	25	0	0.0%
Ex 11 (1)	62	137	16.1	306	5.58	34	0	0.0%
Ex 12 (1)	65	178	15.5	308	5.79	26	0	0.0%
Ex 13 (1)	7	94	16.3	312	3.97	43	0	0.0%
Ex 14 (1)	6	86	15.8	314	3.11	22	0	0.0%
Ex 15	1	121	17.4	308	5.72	20	14	0.8%
Ex 16	1	106	16.9	308	5.62	23	0	0.0%
Ex 17 (1)	45	93	16.2	309	4.62	25	0	0.0%
Ex 18	7	115	16.8	309	5.61	24	13	0.8%
Ex 19 (1)	76	145	14.8	309	5.14	30	0	0.0%
Ex 20	50	144	17.3	309.4	4.77	95	19.77	1.2%
Ex 21	5	139	18.1	312.1	4.05	74	26.98	1.5%
Comp 1	3	98	Gel	295, 322	4.1	No Flow	-	-

5

**Example 22**

The process of the invention is illustrated in the polymerization of melt-processible copolymers of tetrafluoroethylene (TFE) with hexafluoropropylene (HFP).

TFE-HFP copolymerization is run like that of Examples 1-19 for TFE-PPVE copolymers with the following differences:

Total water (initial charge plus water added with initiator and surfactant) 6610 g. Initiator precharge is 2.2 g added as 22 g/liter aqueous solution.

Initial HFP is charged as a 70:30 mixture with TFE: 579g HFP, 244 g TFE

for Example 22; 701 g HFP and 301 g TFE. Continuous monomer feed is TFE only. No ethane is added.

Quantities of materials employed are indicated in Table 3 and 4A.

5 Table 4B reports the results.

**Table 3**

TFE/HFP Polymerization

Example	PFPEA1 (g)	HC	HC (g)	NH <sub>4</sub> OH (g)
Ex 22	1.305	Plur 30R1	0.317	1.11

10

**Table 4A**

TFE/HFP Polymerization

Example	PFPEA (g)	PFPEA (ppm)	HC (g)	HC (ppm)	APS (g)	Ethane (g)	Total Monomers
Ex 22	1.305	197	0.317	48	7.390	0	2323

15

**Table 4B**

TFE/HFP Polymerization

Example	Kick-off (min)	Completion Time (min)	Solids wt%	MpT. (°C)	HFP wt%	MFR	Undispersed Polymer (g) wt%	
Ex 22	61	206	22.6	227	16.44	>100	70	3.2%

**What is claimed is:**

1. A process comprising polymerizing at least one fluorinated monomer in an aqueous polymerization medium comprising initiator and  
5 polymerization agent to form an aqueous dispersion of particles of fluoropolymer, said aqueous dispersion of particles of fluoropolymer formed by said process having a fluoropolymers solids content of at least about 10% by weight, said polymerization agent comprising fluoropolyether acid or salt thereof and hydrocarbon surfactant, said  
10 aqueous polymerization medium comprising less than about 300 ppm of perfluoroalkane carboxylic acid or salt fluorosurfactants.
2. The process of claim 1 wherein said polymerization medium is substantially free of fluoropolymer seed at polymerization kick-off.
3. The process of claim 1 wherein said dispersing agent  
15 comprises a major amount by weight of fluoropolyether acid or salt thereof and a minor amount by weight of hydrocarbon surfactant.
4. The process of claim 1 wherein said aqueous polymerization medium is substantially free of perfluoroalkane carboxylic acid or salt fluorosurfactants.
- 20 5. The process of claim 1 wherein said fluoropolyether acid or salt thereof is a perfluoropolyether acid or salt thereof.
6. The process of claim 1 wherein the acid groups of said fluoropolyether acid or salt thereof comprise acid groups selected from carboxylic acid, sulfonic acid, phosphonic acid.
- 25 7. The process of claim 6 wherein said acid groups of said fluoropolyether acid or salt thereof comprise carboxylic acid.
8. The process of claim 1 wherein said fluoropolyether acid or salt thereof is an ammonium salt.
9. The process of claim 1 wherein the molecular weight of said  
30 fluoropolyether acid or salt thereof has an average molecular weight of about 800 to about 3500 g/mol.
10. The process of claim 3 wherein said hydrocarbon surfactant comprises about 1% to about 45% by weight of said polymerization agent.

11. The process of claim 3 wherein said hydrocarbon surfactant comprises about 1% to about 35% by weight of said polymerization agent.

5           12. The process of claim 3 wherein said fluoropolyether said or salt thereof is present in said aqueous polymerization medium in an amount of about 5 ppm to about 2000 ppm based on the weight of water in said aqueous polymerization medium .

10           13. The process of claim 3 wherein said fluoropolyether acid or salt thereof is present in said aqueous polymerization medium in an amount of about 50 ppm to about 1000 ppm based on the weight of water in said aqueous polymerization medium .

15           14. The process of claim 3 wherein said fluoropolyether acid or salt thereof is present in said aqueous polymerization medium in an amount of about 100 ppm to about 350 ppm based on the weight of water in said aqueous polymerization medium .

          15. The process of claim 1 wherein said aqueous dispersion of particles of fluoropolymer formed by said process has a fluoropolymers solids content of at least about 20% by weight.

20           16. The process of claim 1 wherein said polymerizing produces particles of fluoropolymer having a melt viscosity of at least  $10^2$  Pa·s.

          17. The process of claim 1 wherein said at least one fluorinated monomer is selected from the group consisting of tetrafluoroethylene (TFE), hexafluoropropylene (HFP), chlorotrifluoroethylene (CTFE), trifluoroethylene, hexafluoroisobutylene, perfluoroalkyl ethylenes, fluorovinyl ethers, vinyl fluoride (VF), vinylidene fluoride (VF<sub>2</sub>), perfluoro-2,2-dimethyl-1,3-dioxole (PDD) and perfluoro-2-methylene-4-methyl-1,3-dioxolane (PMD).

30           18. The process of claim 1 wherein said particles of fluoropolymer produced by said process comprise a melt-processible copolymer comprising at least about 40-98 % tetrafluoroethylene units and about 2-60 mol% of at least one other monomer.

35           19. The process of claim 18 wherein said at least one other monomer comprises at least one perfluorinated monomer.

20. The process of claim 18 wherein said fluoropolymer produced by said process is a perfluorinated melt-processible copolymer.

5 21. The process of claim 1 wherein said hydrocarbon surfactant is a nonionic hydrocarbon surfactant.

22. The process of claim 1 wherein substantially all of said polymerization agent is added to the aqueous medium prior to the start of polymerization.

10 23. The process of claim 1 wherein said polymerizing produces less than about 10 wt% undispersed fluoropolymer based on the total weight of fluoropolymer produced.

24. The process of claim 1 wherein said aqueous polymerization medium is substantially free of perfluoropolyether oils.

**INTERNATIONAL SEARCH REPORT**

International application No  
PCT/US2007/023642

**A. CLASSIFICATION OF SUBJECT MATTER**  
INV. C08F14/18

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
C08F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 816 397 A (AUSIMONT SPA [IT]) 7 January 1998 (1998-01-07) claims 1,6,9	1-24
X	EP 1 679 352 A (SOLVAY SOLEXIS SPA [IT]) 12 July 2006 (2006-07-12) paragraph [0024]; claims 1,3,8,9	1-24
X	EP 0 712 882 A (AUSIMONT SPA [IT]) 22 May 1996 (1996-05-22) example 1	1-24
X	EP 0 625 526 A (AUSIMONT SPA [IT]) 23 November 1994 (1994-11-23) page 4, line 54 - page 5, line 13; claims ----- -/--	1-24

Further documents are listed in the continuation of Box C.

See patent family annex.

\* Special categories of cited documents :

- 'A' document defining the general state of the art which is not considered to be of particular relevance
- 'E' earlier document but published on or after the international filing date
- 'L' document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- 'O' document referring to an oral disclosure, use, exhibition or other means
- 'P' document published prior to the international filing date but later than the priority date claimed

- 'T' later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- 'X' document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- 'Y' document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- '&' document member of the same patent family

Date of the actual completion of the international search

Date of mailing of the international search report

29 February 2008

10/03/2008

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Baekelmans, Didier

## INTERNATIONAL SEARCH REPORT

International application No  
PCT/US2007/023642

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 672 691 A (DAIKIN IND LTD [JP]) 20 September 1995 (1995-09-20) example 2 -----	1-24
A	WO 00/71590 A (DU PONT [US]) 30 November 2000 (2000-11-30) the whole document -----	1-24

## INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2007/023642

Patent document cited in search report		Publication date	Patent family member(s)	Publication date			
EP 0816397	A	07-01-1998	CA 2209324 A1	01-01-1998			
			CN 1172122 A	04-02-1998			
			DE 69704040 D1	15-03-2001			
			DE 69704040 T2	20-09-2001			
			IT MI961342 A1	02-01-1998			
			JP 10060054 A	03-03-1998			
			RU 2184744 C2	10-07-2002			
			US 7122608 B1	17-10-2006			
			EP 1679352	A	12-07-2006	CN 1847333 A	18-10-2006
JP 2006188702 A	20-07-2006						
US 2006166007 A1	27-07-2006						
EP 0712882	A	22-05-1996	AT 192175 T	15-05-2000			
			CA 2161734 A1	18-05-1996			
			DE 69516485 D1	31-05-2000			
			DE 69516485 T2	14-12-2000			
			IT 1270703 B	07-05-1997			
			JP 8208974 A	13-08-1996			
			EP 0625526	A	23-11-1994	AT 149035 T	15-03-1997
AT 183525 T	15-09-1999						
CA 2123528 A1	19-11-1994						
DE 69401762 D1	27-03-1997						
DE 69401762 T2	03-07-1997						
DE 69420153 D1	23-09-1999						
DE 69420153 T2	16-12-1999						
DK 625526 T3	10-03-1997						
ES 2136923 T3	01-12-1999						
IT 1265067 B1	30-10-1996						
JP 3544561 B2	21-07-2004						
JP 6329706 A	29-11-1994						
EP 0672691	A	20-09-1995				CN 1088224 A	22-06-1994
						DE 69317300 D1	09-04-1998
			DE 69317300 T2	23-07-1998			
			WO 9412548 A1	09-06-1994			
			JP 3275402 B2	15-04-2002			
			JP 6166705 A	14-06-1994			
			US 5639820 A	17-06-1997			
			WO 0071590	A	30-11-2000	CN 1351616 A	29-05-2002
DE 60012176 D1	19-08-2004						
DE 60012176 T2	28-07-2005						
EP 1189953 A1	27-03-2002						
JP 2003500495 T	07-01-2003						