




(86) Date de dépôt PCT/PCT Filing Date: 2011/04/21
 (87) Date publication PCT/PCT Publication Date: 2011/10/27
 (45) Date de délivrance/Issue Date: 2017/05/30
 (85) Entrée phase nationale/National Entry: 2012/10/15
 (86) N° demande PCT/PCT Application No.: AT 2011/000200
 (87) N° publication PCT/PCT Publication No.: 2011/130766
 (30) Priorité/Priority: 2010/04/23 (ATA 669/2010)

(51) Cl.Int./Int.Cl. *A47K 10/36* (2006.01)
 (72) Inventeur/Inventor:
 HAGLEITNER, HANS GEORG, AT
 (73) Propriétaire/Owner:
 HAGLEITNER, HANS GEORG, AT
 (74) Agent: FETHERSTONHAUGH & CO.

(54) Titre : PROCÉDE DE DISTRIBUTION FEUILLE PAR FEUILLE DE PAPIER A PARTIR D'UN STOCK
 (54) Title: METHOD OF DISPENSING PAPER SHEET BY SHEET FROM A SUPPLY

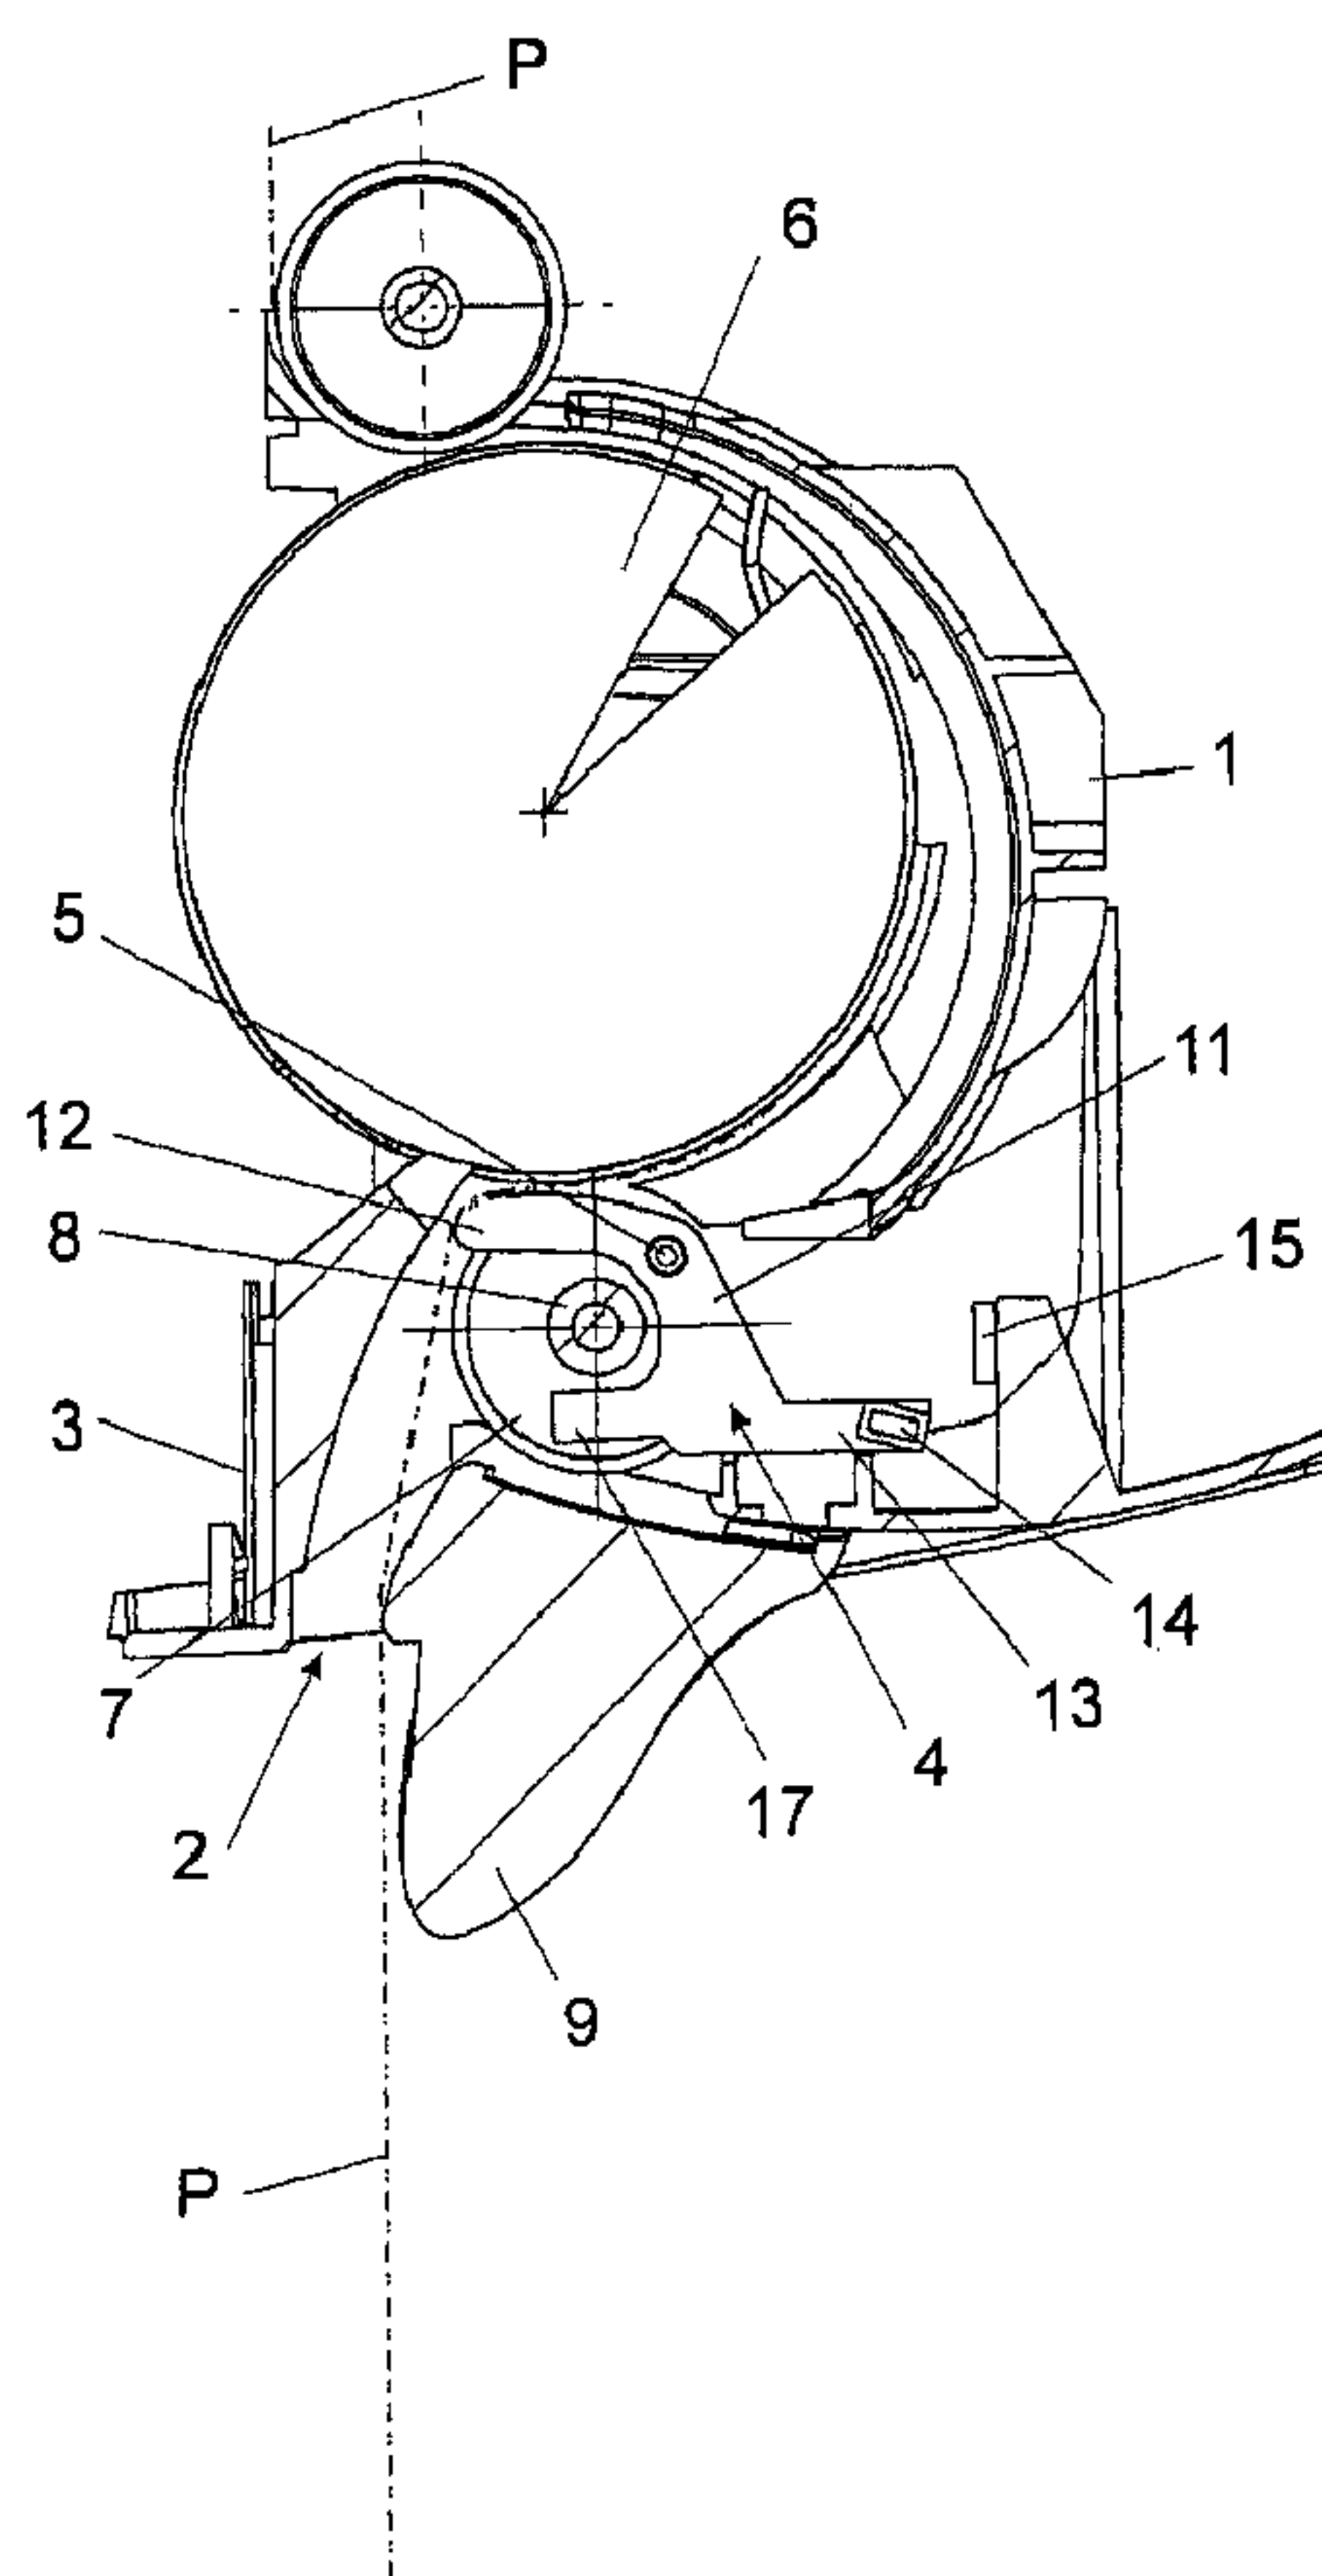

(57) Abrégé/Abstract:

The invention relates to a method and a dispenser for dispensing a sheet of paper through a bottom outlet gap (2) from a stock. A sensor (3) activates, upon detection of a person, an electric drive which delivers a portion of paper from the outlet gap (2) so that the sheet of paper can be torn off by hand. When the delivered sheet of paper is torn off, a switch (4) is actuated. Actuation of said switch puts the dispenser in an operational readiness for delivery of another portion of paper (P).

Abstract

The invention relates to a method and a dispenser for dispensing a sheet of paper through a bottom outlet gap (2) from a stock. A sensor (3) activates, upon detection of a person, an electric drive which delivers a portion of paper from the outlet gap (2) so that the sheet of paper can be torn off by hand. When the delivered sheet of paper is torn off, a switch (4) is actuated. Actuation of said switch puts the dispenser in an operational readiness for delivery of another portion of paper (P).

Method of dispensing paper sheet by sheet from a supply

The invention relates to a method of dispensing paper sheet by sheet from a dispenser set to operational-standby mode, and to a dispenser for dispensing a sheet of paper from a roll, wherein the dispenser has a discharging gap on the underside, an electric drive and a sensor, which, upon sensing a person, causes the electric drive to feed a length of paper out of the discharging gap, and therefore the paper sheet can be torn off by hand.

Paper dispensers which automatically discharge paper in a contactless manner as soon as a person is at the correct distance from the sensor have the disadvantage that the next length of paper is fed even when the previous sheet has not (yet) been torn off and a person moves into the sensing region of the sensor purely by chance. This means that the paper can become dirty before it has been used, and this increases the consumption.

The invention, then, has the object of finding a solution to this, and proposes that, once the length of paper has been fed, the operational-standby mode is interrupted until the paper sheet supplied has been removed, and therefore each following length of paper is fed only once the previously fed paper sheet has been removed. This means that the drive cannot be activated as long as the sheet which is hanging out has not been removed. A dispenser which is suitable for this purpose provides, according to the invention, a switch which is actuated by virtue of the paper sheet being torn off and the actuation of which sets the dispenser into operational-standby mode in order to feed a further length of paper.

In order for the projecting sheet of paper to be torn off by hand, the person grips the free end thereof and

subjects it to a pulling force of which the magnitude is dependent essentially on whether the dispenser contains a roll with a paper web which has tear-off perforations or with a paper web which, with the exception of at least one narrow crosspiece, is severed by a blade device. The sheet which is hanging out loosely always has to be tensioned at least to a slight extent, and the tensioning in the paper is detected and used for re-establishing the operational-standby mode.

10

The switch provided here may be of any desired type; it is preferably mechanical and is provided in the region of a discharging roller of the dispenser, at a location along the course taken by the paper in the vicinity of the discharging gap from the housing, at which the length of paper is pushed out freely. The switch here is coordinated such that the weight of the length of paper which is hanging down is not itself sufficient to actuate the switch.

20

The switch preferably comprises a more or less balanced two-armed lever, of which the end in the final circumferential portion of the discharging roller, before the length of paper hangs down freely, projects beyond the circumference of the discharging roller, and therefore the non-loaded length of paper is raised off from the circumference of the roller. As soon as, then, a person pulls by hand the length of paper which is hanging down, the lever is pivoted, and therefore the projecting end thereof is lowered into the circumferential surface of the discharging roller. The movement of its other end is transmitted, in particular in a contactless manner, to a component which then reactivates the operational-standby mode.

35

The switch may be, as mentioned, of any desired type and the effect triggered thereby consists exclusively in re-establishing the operational-standby mode, which

23739-613

- 3 -

has been interrupted by the drive motor being at a standstill.

It would be conceivable, for example, for the drive motor, at the end of its feeding phase, to actuate an interrupter for the power supply of the dispenser as a whole, or of the motor
5 alone, and for the switch on the discharging roller to switch on this power supply again.

In another embodiment, it is also possible for the operational-standby mode to be interrupted in that the sensor for sensing a person is deactivated by the sensing operation and is
10 reactivated by the switch on the discharging roller.

If, for the case of a paper jam or of some other problem, the dispenser is provided with an emergency-actuation lever, which bypasses the motor drive and feeds at least one length of paper, then it is preferably provided that the switch can also
15 be actuated by means of the emergency-operation lever in order to have the dispenser in operational-standby mode once the problem has been eliminated.

According to an aspect of the present invention, there is provided a dispenser for dispensing a sheet of paper from a
20 supply of paper, the dispenser comprising: an electric drive; a dispenser body having an underside with a discharging gap formed therein; a sensor, which, upon sensing a person, causing said electric drive to feed a length of paper out of said discharging gap, and therefore a paper sheet can be torn off by
25 hand; a switch actuated by virtue of the paper sheet being torn off, and an actuation of said switch setting the dispenser into an operational-standby mode to feed a further length of paper; a discharging roller disposed in a vicinity of said discharging

23739-613

- 3a -

gap, said switch assigned to said charging roller, wherein said switch projects in a lowerable manner out of a circumferential surface of said discharging roller; a reed switch; and a permanent magnet interacting in a contactless manner with said reed switch, said switch having a two-armed lever, said two-armed lever having a first end projecting into a path taken by the paper sheet on said discharging roller and a second end disposed on said permanent magnet.

The invention will now be described in more detail hereinbelow with reference to the figures of the accompanying drawing, without being restricted thereto.

In the drawing:

- figure 1 shows a schematic oblique view of a paper dispenser,
- 15 figures 2 and 3 show details of the discharging unit of the paper dispenser at the end of the paper-feeding operation and as a sheet is being torn off, and
- figure 4 shows the discharging unit in the event of emergency actuation.
- 20

A paper dispenser according to figure 1, for example for paper handtowels or the like, has a housing 1 which can be closed by an openable covering and on the underside of which is provided a discharging gap 2, through which paper P is dispensed out of the dispenser. The paper dispenser operates in a contactless manner, since a sensor 3 (indicated only schematically) is arranged, in particular, in the vicinity of the discharging gap 2 and, when it senses a person in its vicinity, causes an electric motor, via a corresponding electronic control means, to feed a length of paper P out of the discharging gap 2. The motor is brought to a standstill again at the end of the feeding operation. The paper P is pulled off from a roll inserted in the housing 1, the paper either being provided with transverse perforations or running through a cutting device, for example a blade roller 6, which is shown in simplified form in figures 2 to 4, which cuts along most of the width of the paper. At least one uncut region remains, and therefore the sheet still hangs on the paper web when a length has been fed (figures 1 and 2); this therefore likewise constitutes a kind of transverse-perforation formation, albeit one which is produced initially in the dispenser.

In the final section of the course taken by the paper upstream of the discharging gap, the paper web runs over a driven discharging roller 7, wherein it is pushed in the conveying direction downstream of the gap 16 between the rollers 6, 7 and drops down freely, and is therefore free of tensioning in this final section.

It is not possible to avoid the situation where a person moves into the sensing region of the sensor 3 and therefore causes the feed of a length of paper which is not removed. If the dispenser is installed at an unfavorable location, it is also possible for this

to happen a number of times in succession, and therefore one or more sheets of paper hang out of the dispenser and are wasted. In order to stem this unintended consumption, the dispenser is controlled
5 such that, at the end of the feeding operation, that is to say upon completion of a paper-dispensing cycle, the operational-standby mode is also brought to an end, i.e. as long as the length of paper P according to figures 1 and 2 is hanging out of the dispenser it is
10 not possible for any further feeding operation to take place. A switch 4 is provided in the final, tensioning-free section of the course taken by the paper, it being possible for this switch to be lowered, in particular, into the surface of the discharging roller 7. Figure 2
15 shows that the paper web runs in a tensioning-free manner over the switch 4 and is raised off from the circumference of the discharging roller 7 in the process.

20 In order to re-establish the operational-standby mode, it is necessary for a sheet to be torn off, this being done, according to figure 3, by the end of the length which is hanging down being pulled by hand. The paper P is subjected to tensioning as it is being torn off, and
25 the switch 4, which is designed as a two-armed lever 11, pivots about a pin 5, wherein its first end 12 lowers into the discharging roller 7. The second end 13 bears a permanent magnet 14, which interacts in a contactless manner with a reed switch 15 in the
30 housing. The lever 11 is more or less balanced, and therefore even just small tensile forces are sufficient to pivot it and thus re-establish an interrupted power supply via the reed switch 15, or interact in some other way with the at-rest control means and activate
35 the same. It is thus the case that the dispenser is ready for the following dispensing cycle only once the switch 4 has been actuated.

If there is a problem with the electronic or electrical part of the dispenser, or if there is a paper jam, then the dispenser has been provided with an emergency-actuation lever 9, which can be pivoted about the axis 10. The pivoting movement separates the motor drive, via the discharging roller 7, from the discharging unit and rotates the blade roller 6 directly. It is also possible for the switch 4 to be reset if its lever 11 has a protrusion 17 and the discharging roller 7 is lowered during the pivoting movement of the emergency-actuation lever 9. In this case, a part 8 of the discharging roller 7 comes into contact with the protrusion 17 of the lever 11 and the switch 4 is likewise actuated, as can be seen from figure 4.

23739-613

- 7 -

CLAIMS:

1. A dispenser for dispensing a sheet of paper from a supply of paper, the dispenser comprising:
 - an electric drive;
- 5 a dispenser body having an underside with a discharging gap formed therein;
 - a sensor, which, upon sensing a person, causing said electric drive to feed a length of paper out of said discharging gap, and therefore a paper sheet can be torn off by
- 10 hand;
 - a switch actuated by virtue of the paper sheet being torn off, and an actuation of said switch setting the dispenser into an operational-standby mode to feed a further length of paper;
- 15 a discharging roller disposed in a vicinity of said discharging gap, said switch assigned to said discharging roller,
 - wherein said switch projects in a lowerable manner out of a circumferential surface of said discharging roller;
 - a reed switch; and
- 20 a permanent magnet interacting in a contactless manner with said reed switch, said switch having a two-armed lever, said two-armed lever having a first end projecting into a path taken by the paper sheet on said discharging roller and a second end disposed on said permanent magnet.

23739-613

- 8 -

2. The dispenser according to claim 1, further comprising an emergency-actuation lever, which can bypass a motor drive mechanically, wherein said switch can be actuated by means of said emergency-operation lever.

Fig. 1

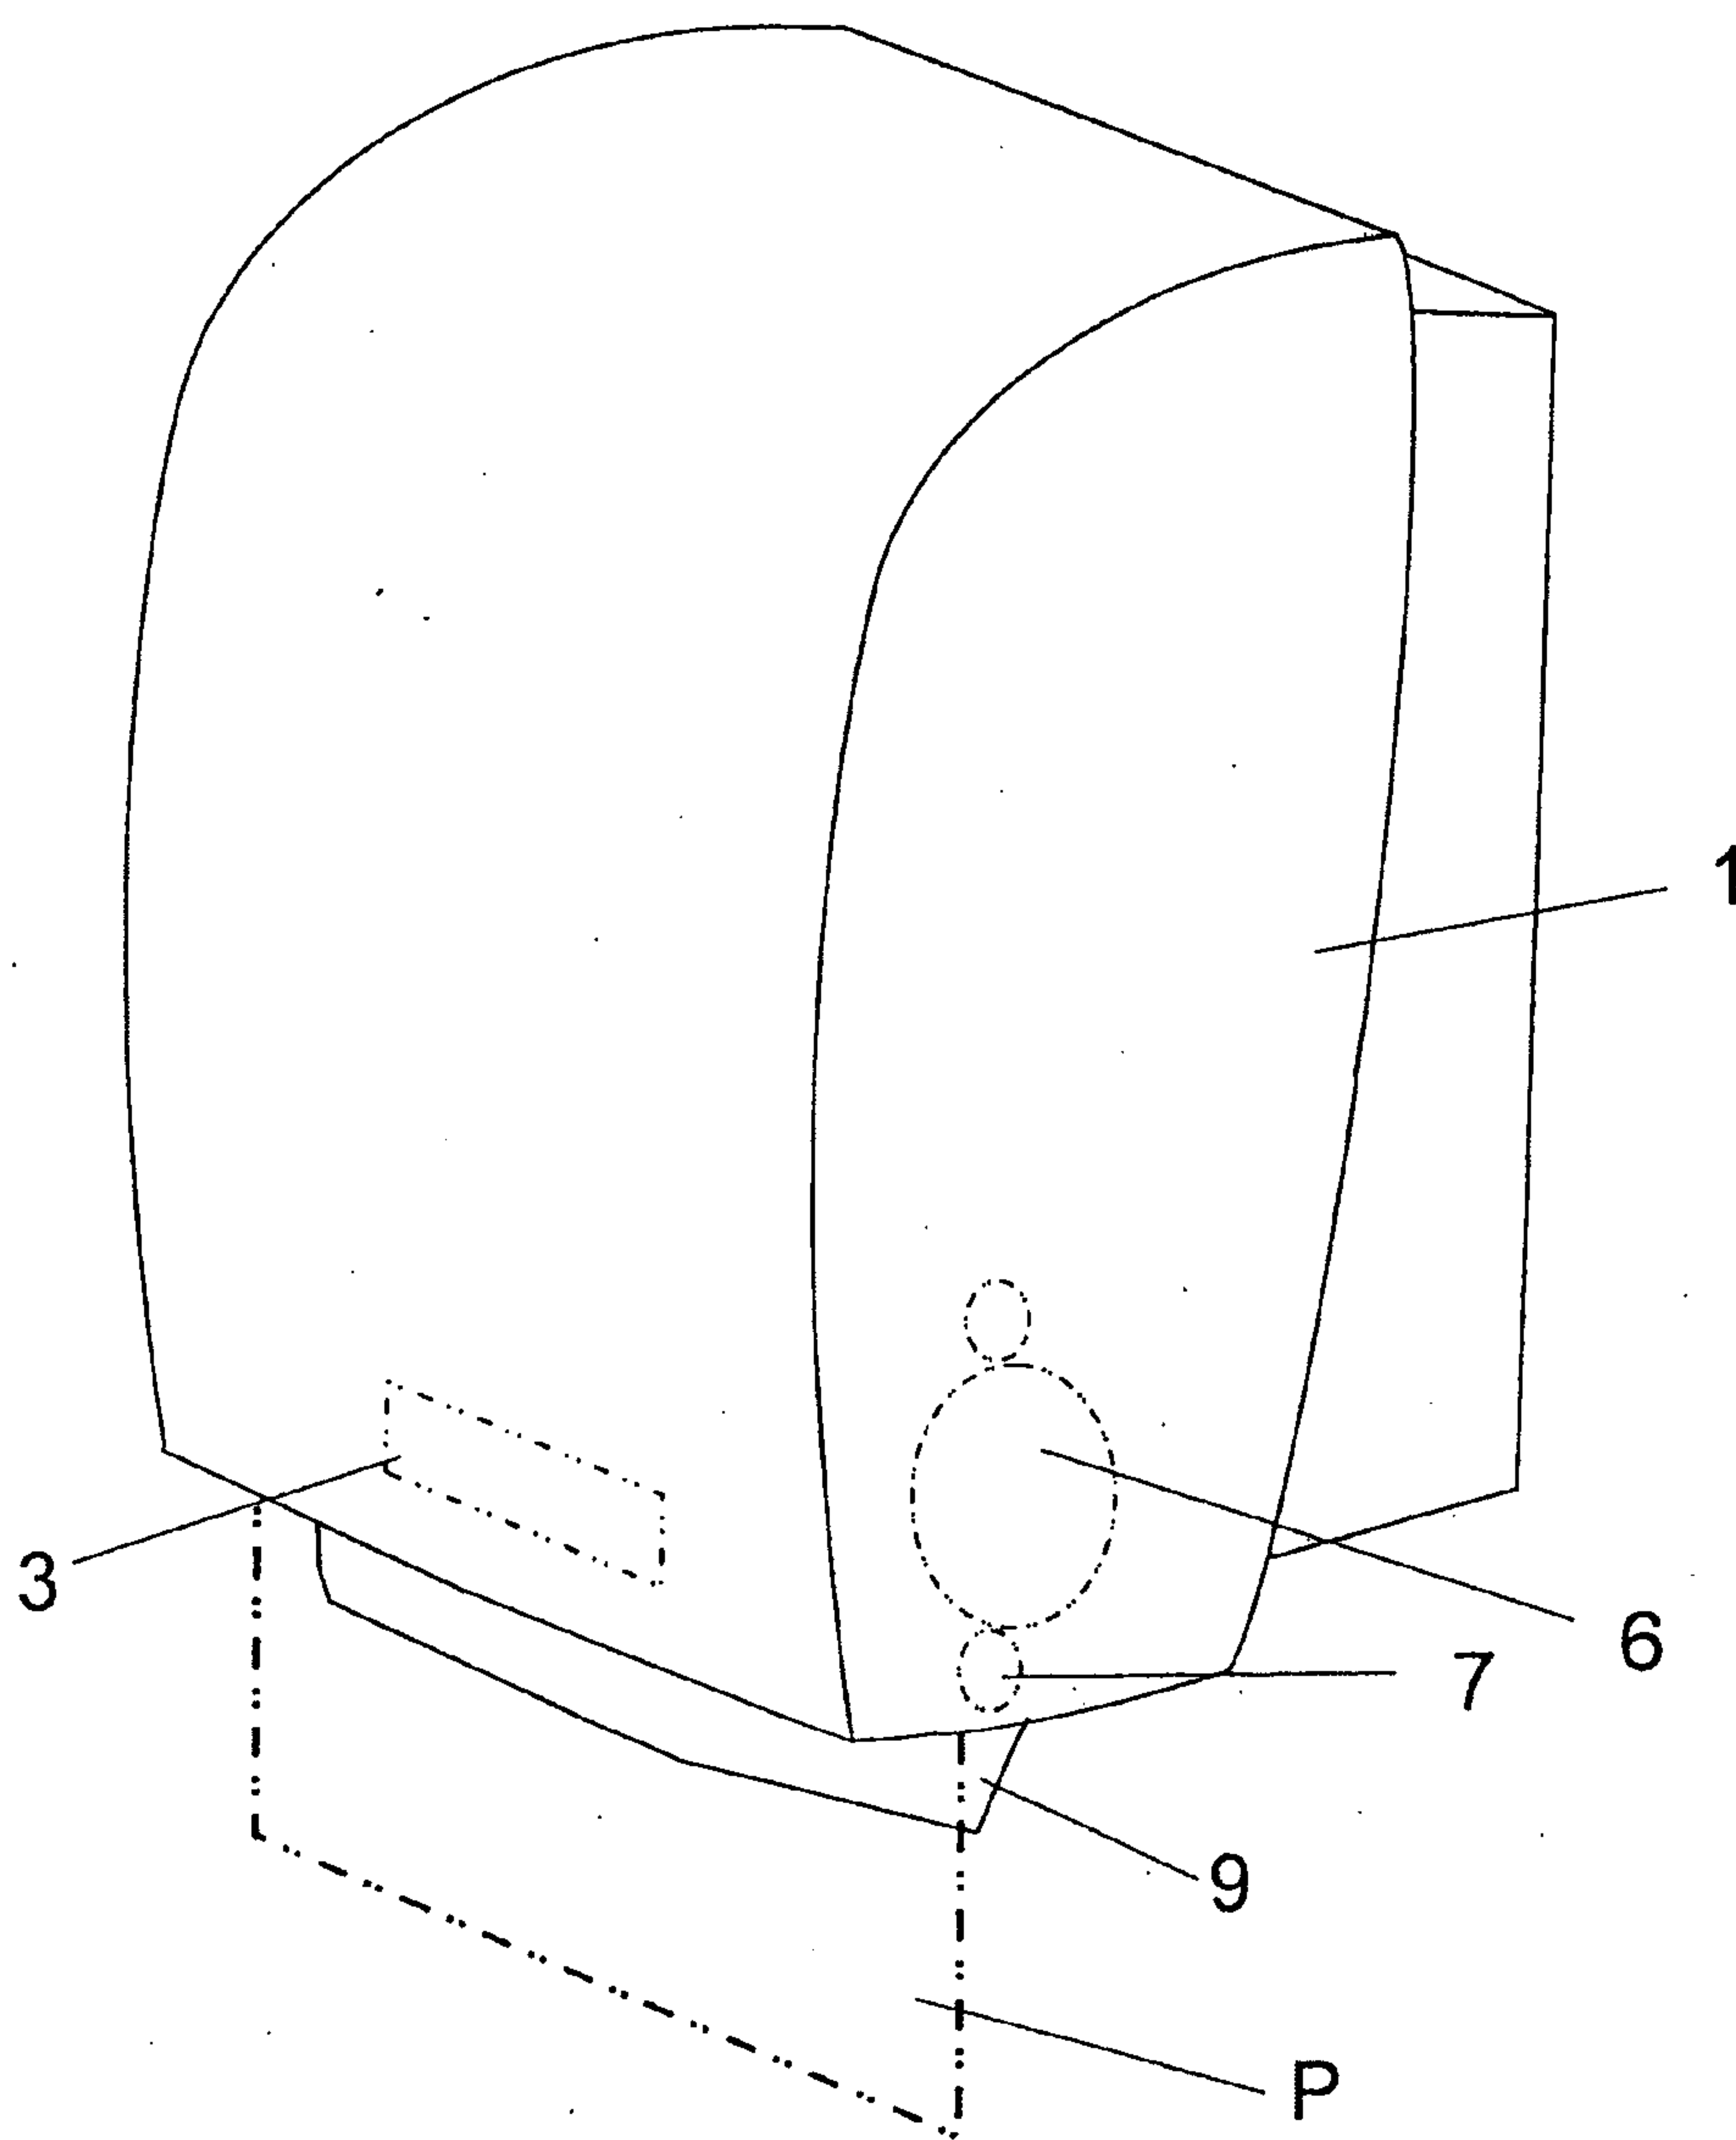


Fig. 2

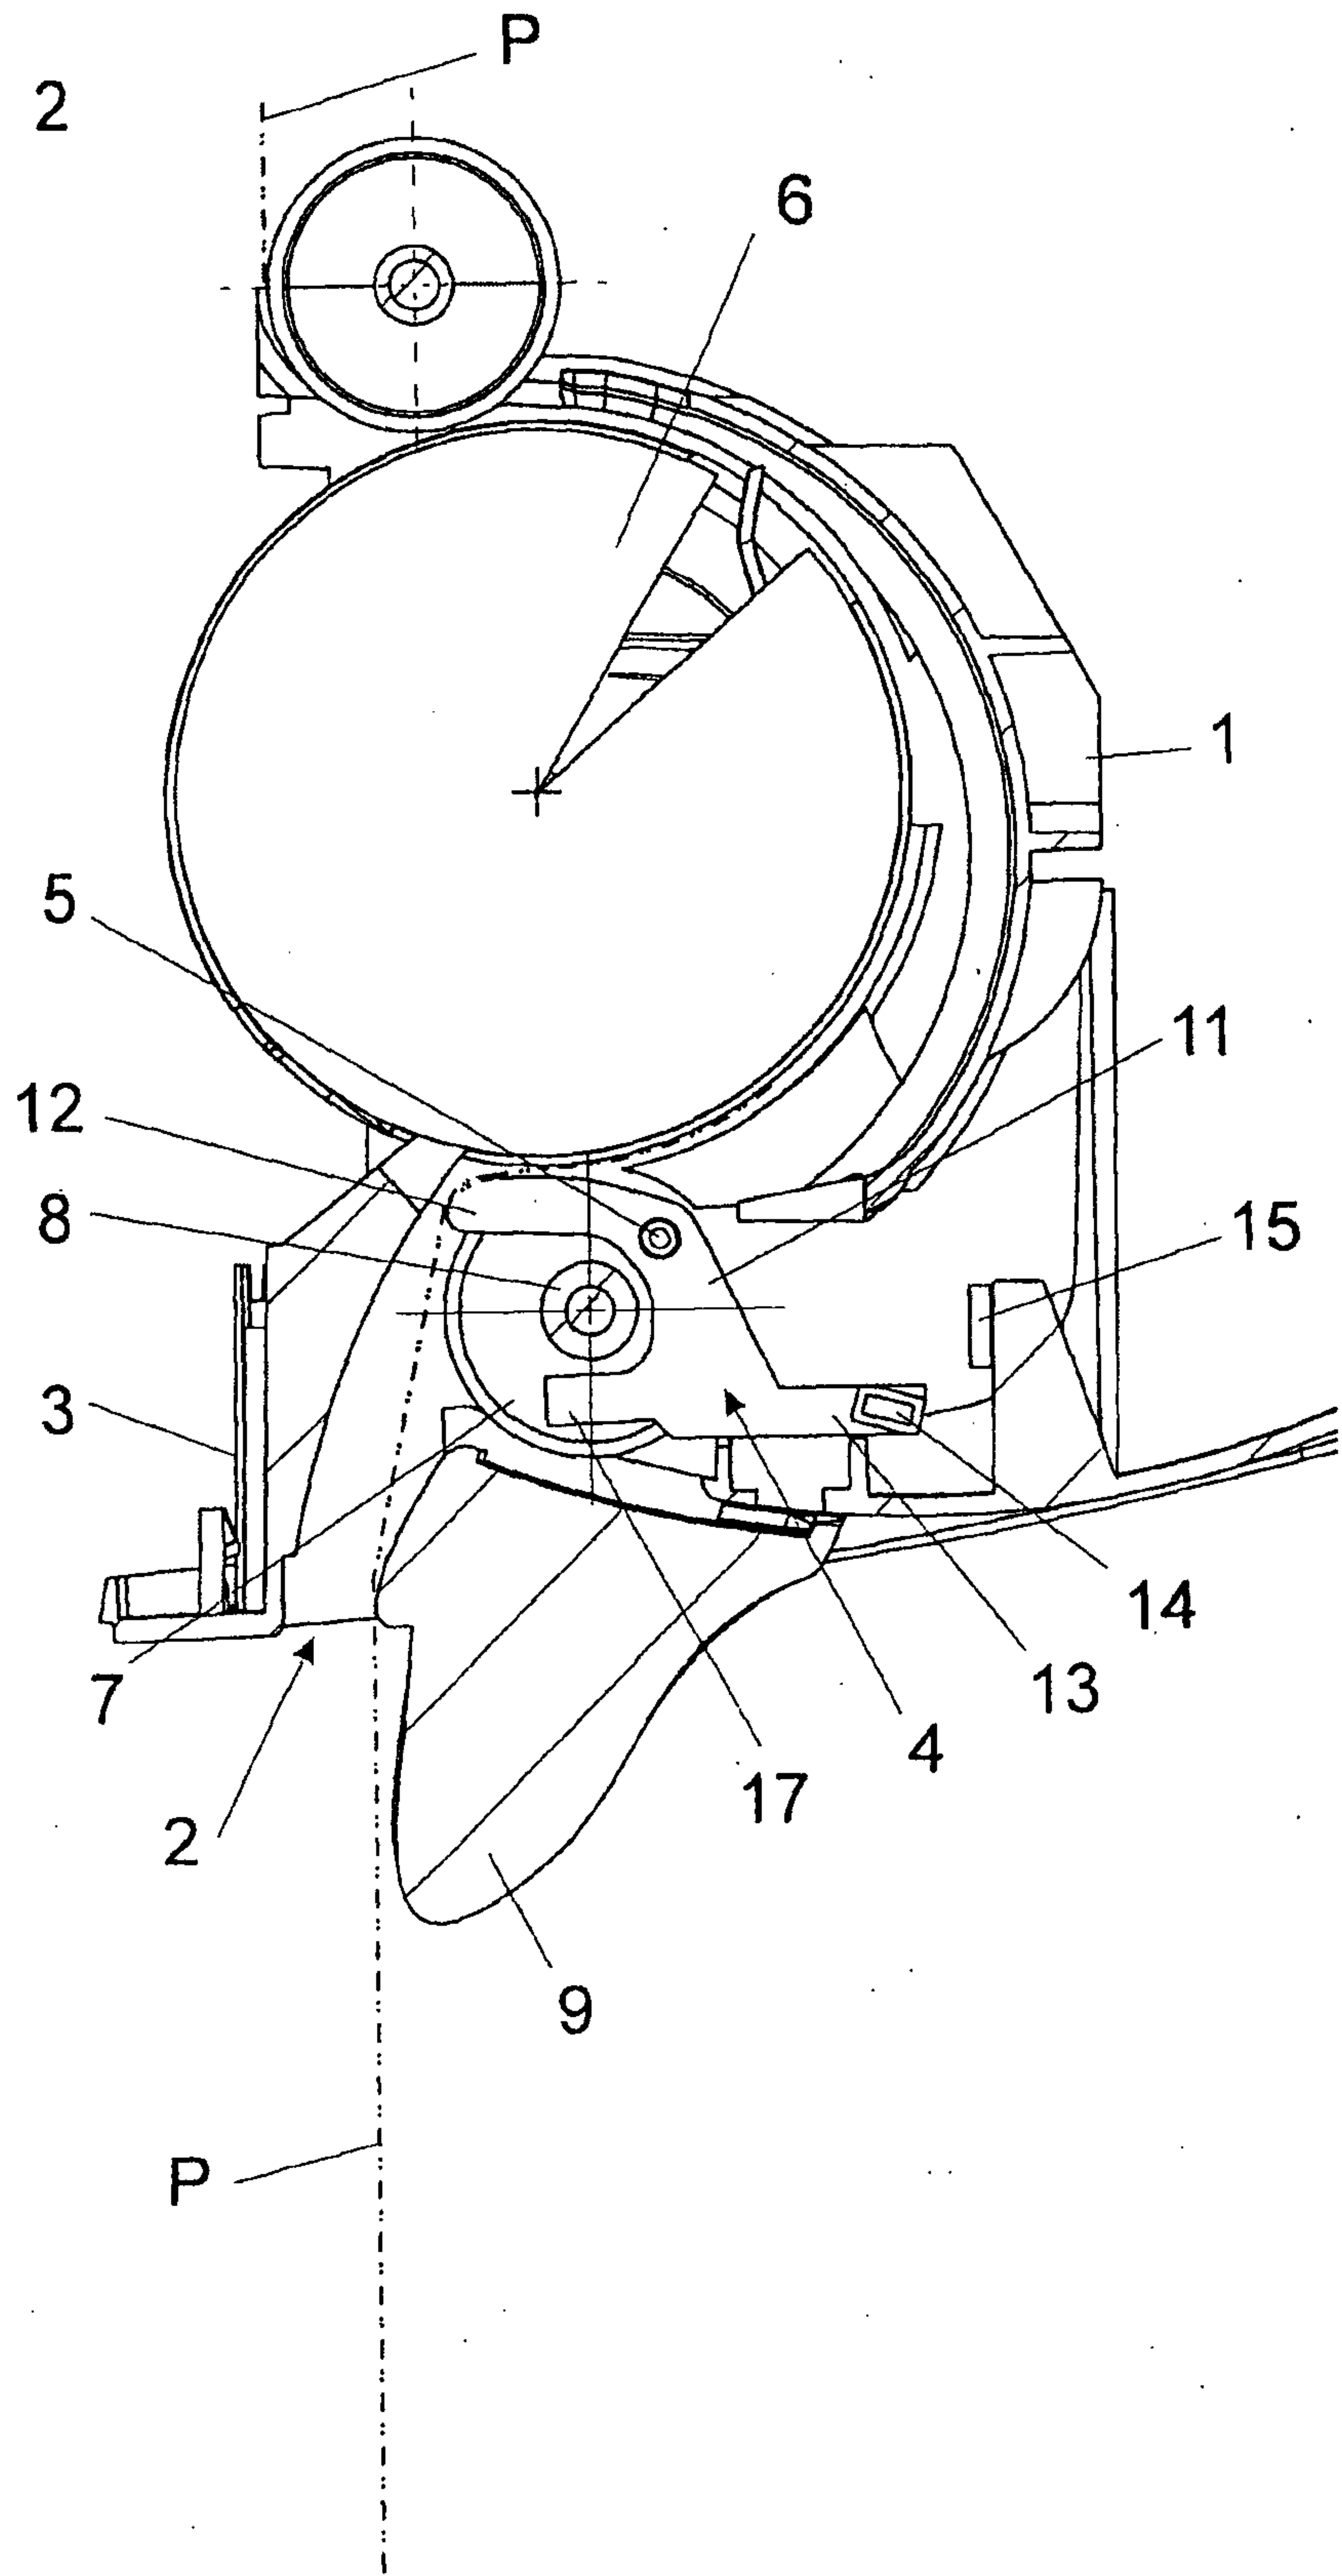


Fig. 3

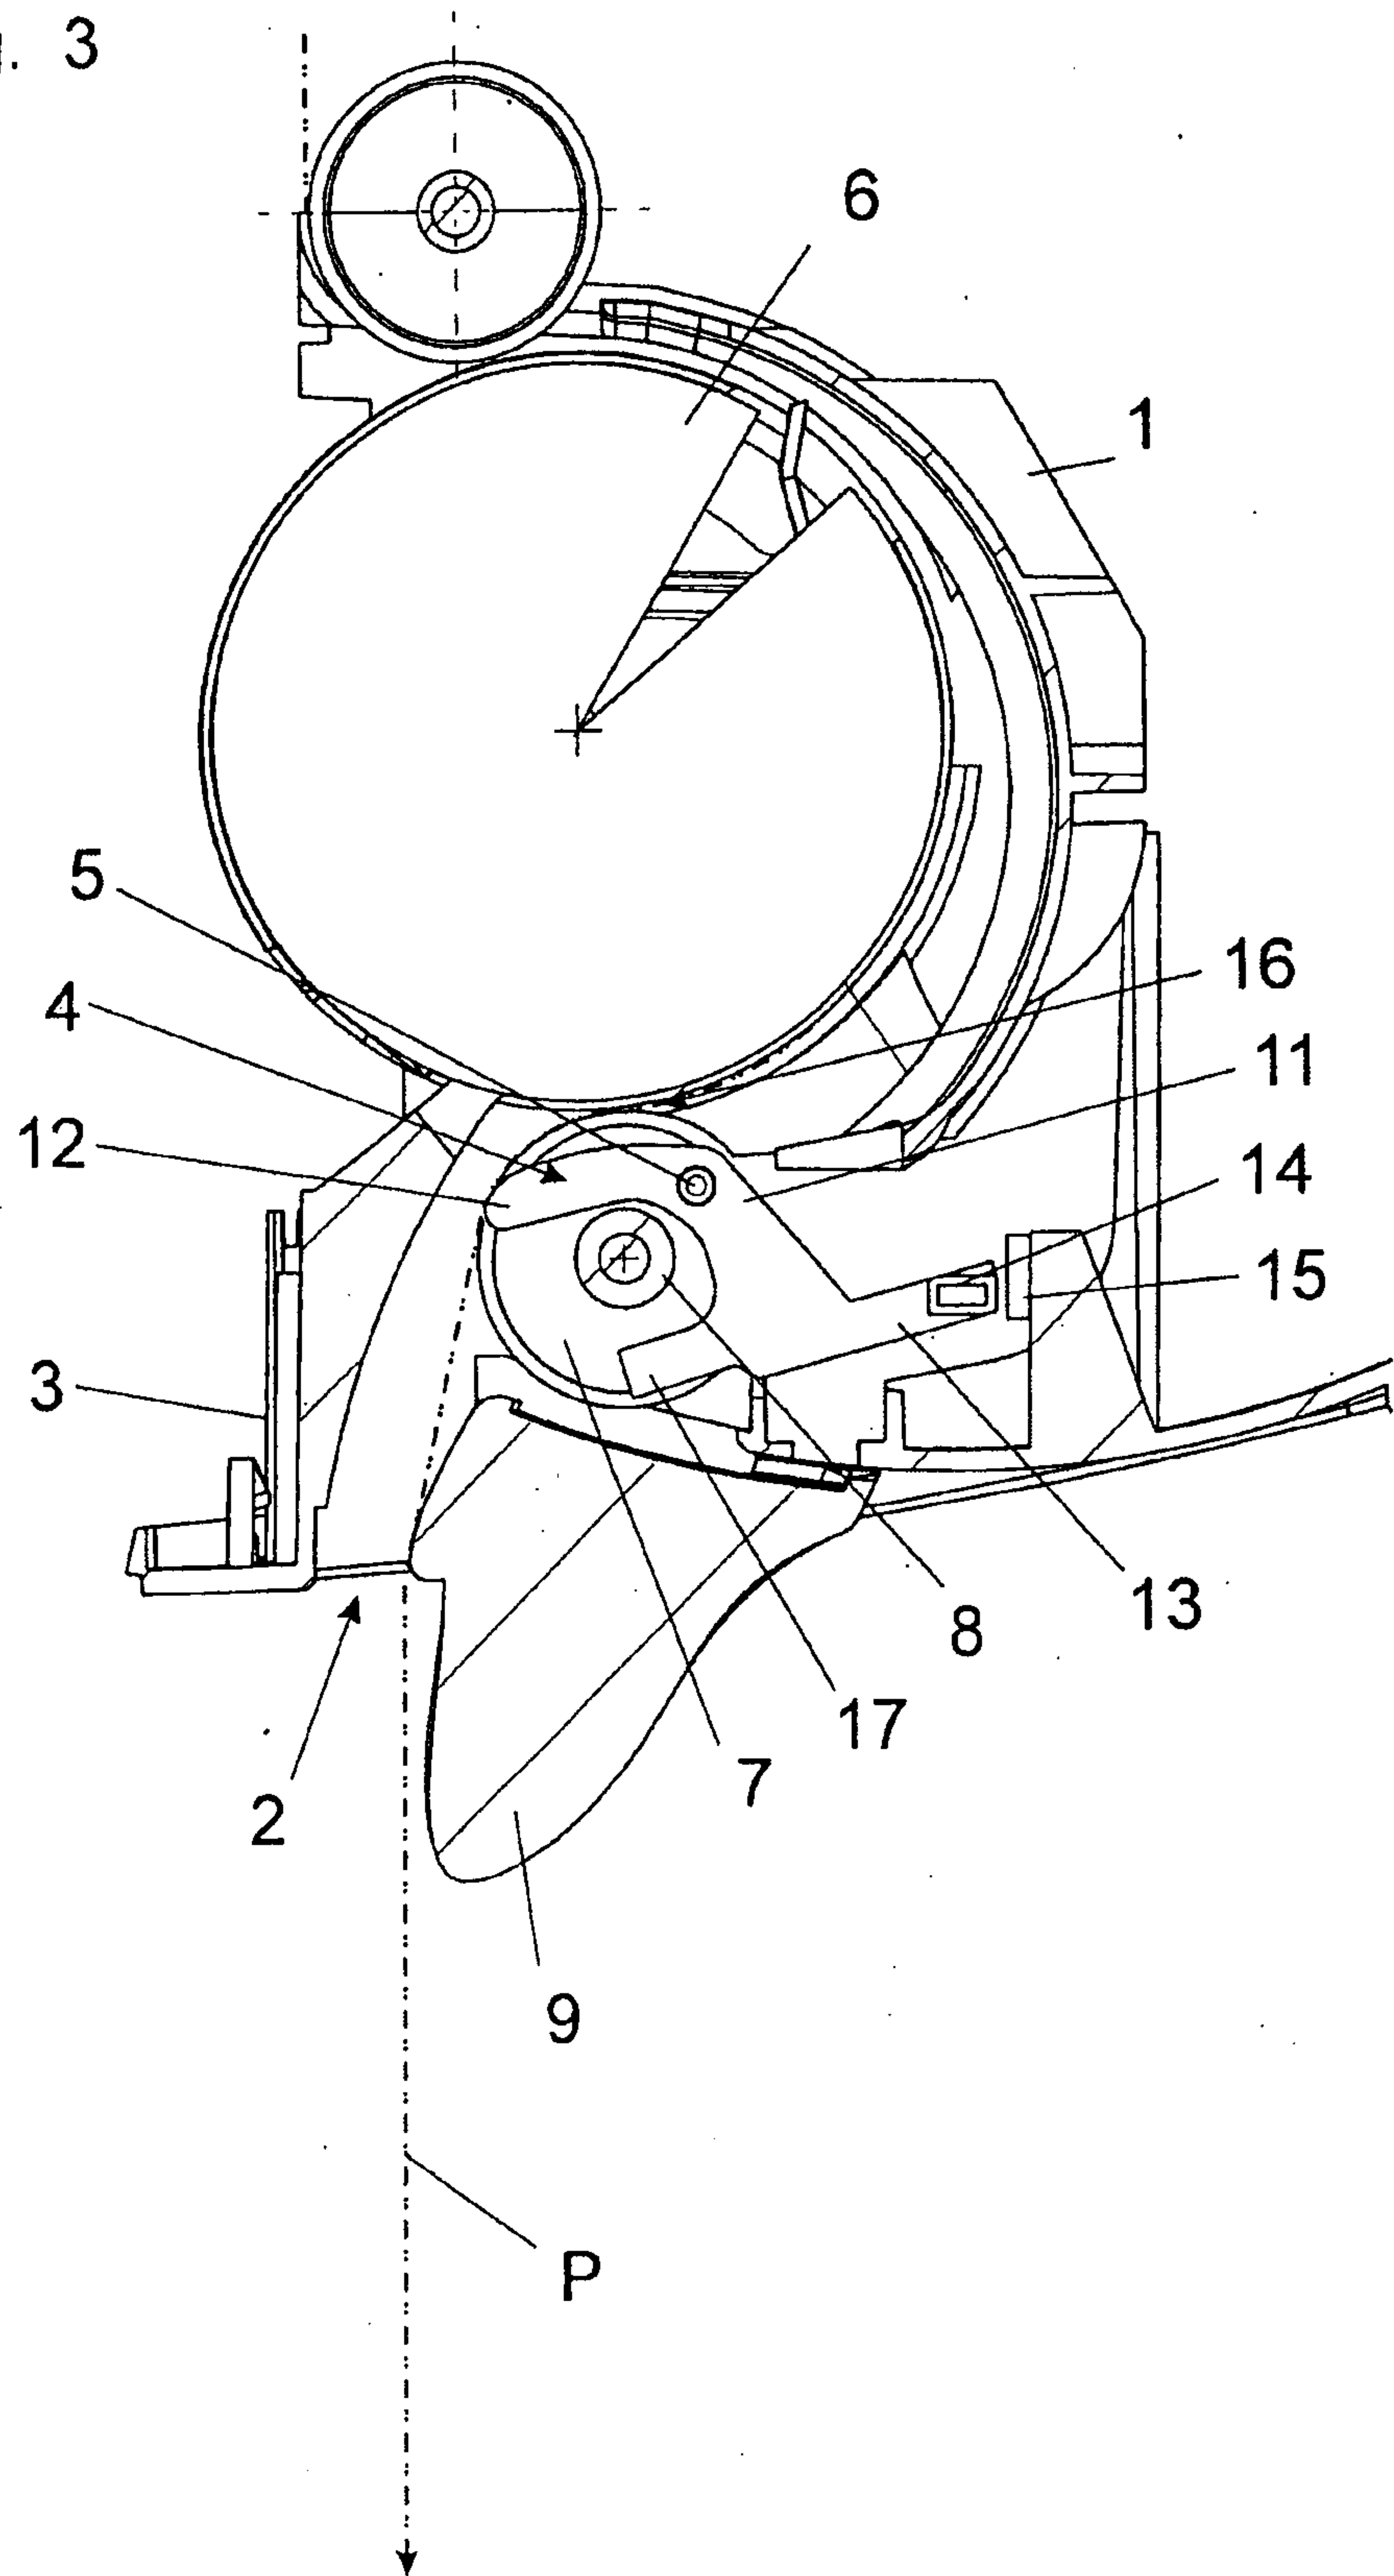


Fig. 4

