




(86) Date de dépôt PCT/PCT Filing Date: 2000/01/28
(87) Date publication PCT/PCT Publication Date: 2001/08/02
(45) Date de délivrance/Issue Date: 2005/05/24
(85) Entrée phase nationale/National Entry: 2001/07/25
(86) N° demande PCT/PCT Application No.: JP 2000/000474
(87) N° publication PCT/PCT Publication No.: 2001/056223

(51) Cl.Int.⁷/Int.Cl.⁷ H04L 9/08, H04L 29/02
(72) Inventeurs/Inventors:
TAKEDA, NORIKO, JP;
SASAMOTO, AKIHIKO, JP;
ADACHI, KAZUYUKI, JP;
SHINODA, SEIICHI, JP
(73) Propriétaire/Owner:
MITSUBISHI DENKI KABUSHIKI KAISHA, JP
(74) Agent: KIRBY EADES GALE BAKER

(54) Titre : SYSTEME DE TRANSFERT DE TABLEAU DE GESTION DE COMMUNICATIONS ET DISPOSITIF DE GESTION, DISPOSITIF DE CHIFFRAGE, ET PROCEDURE DE TRANSFERT DE TABLE DE GESTION DE COMMUNICATIONS

(54) Title: COMMUNICATION MANAGEMENT TABLE TRANSFER SYSTEM, MANAGER, ENCRYPTOR, AND COMMUNICATION MANAGEMENT TABLE TRANSFER METHOD

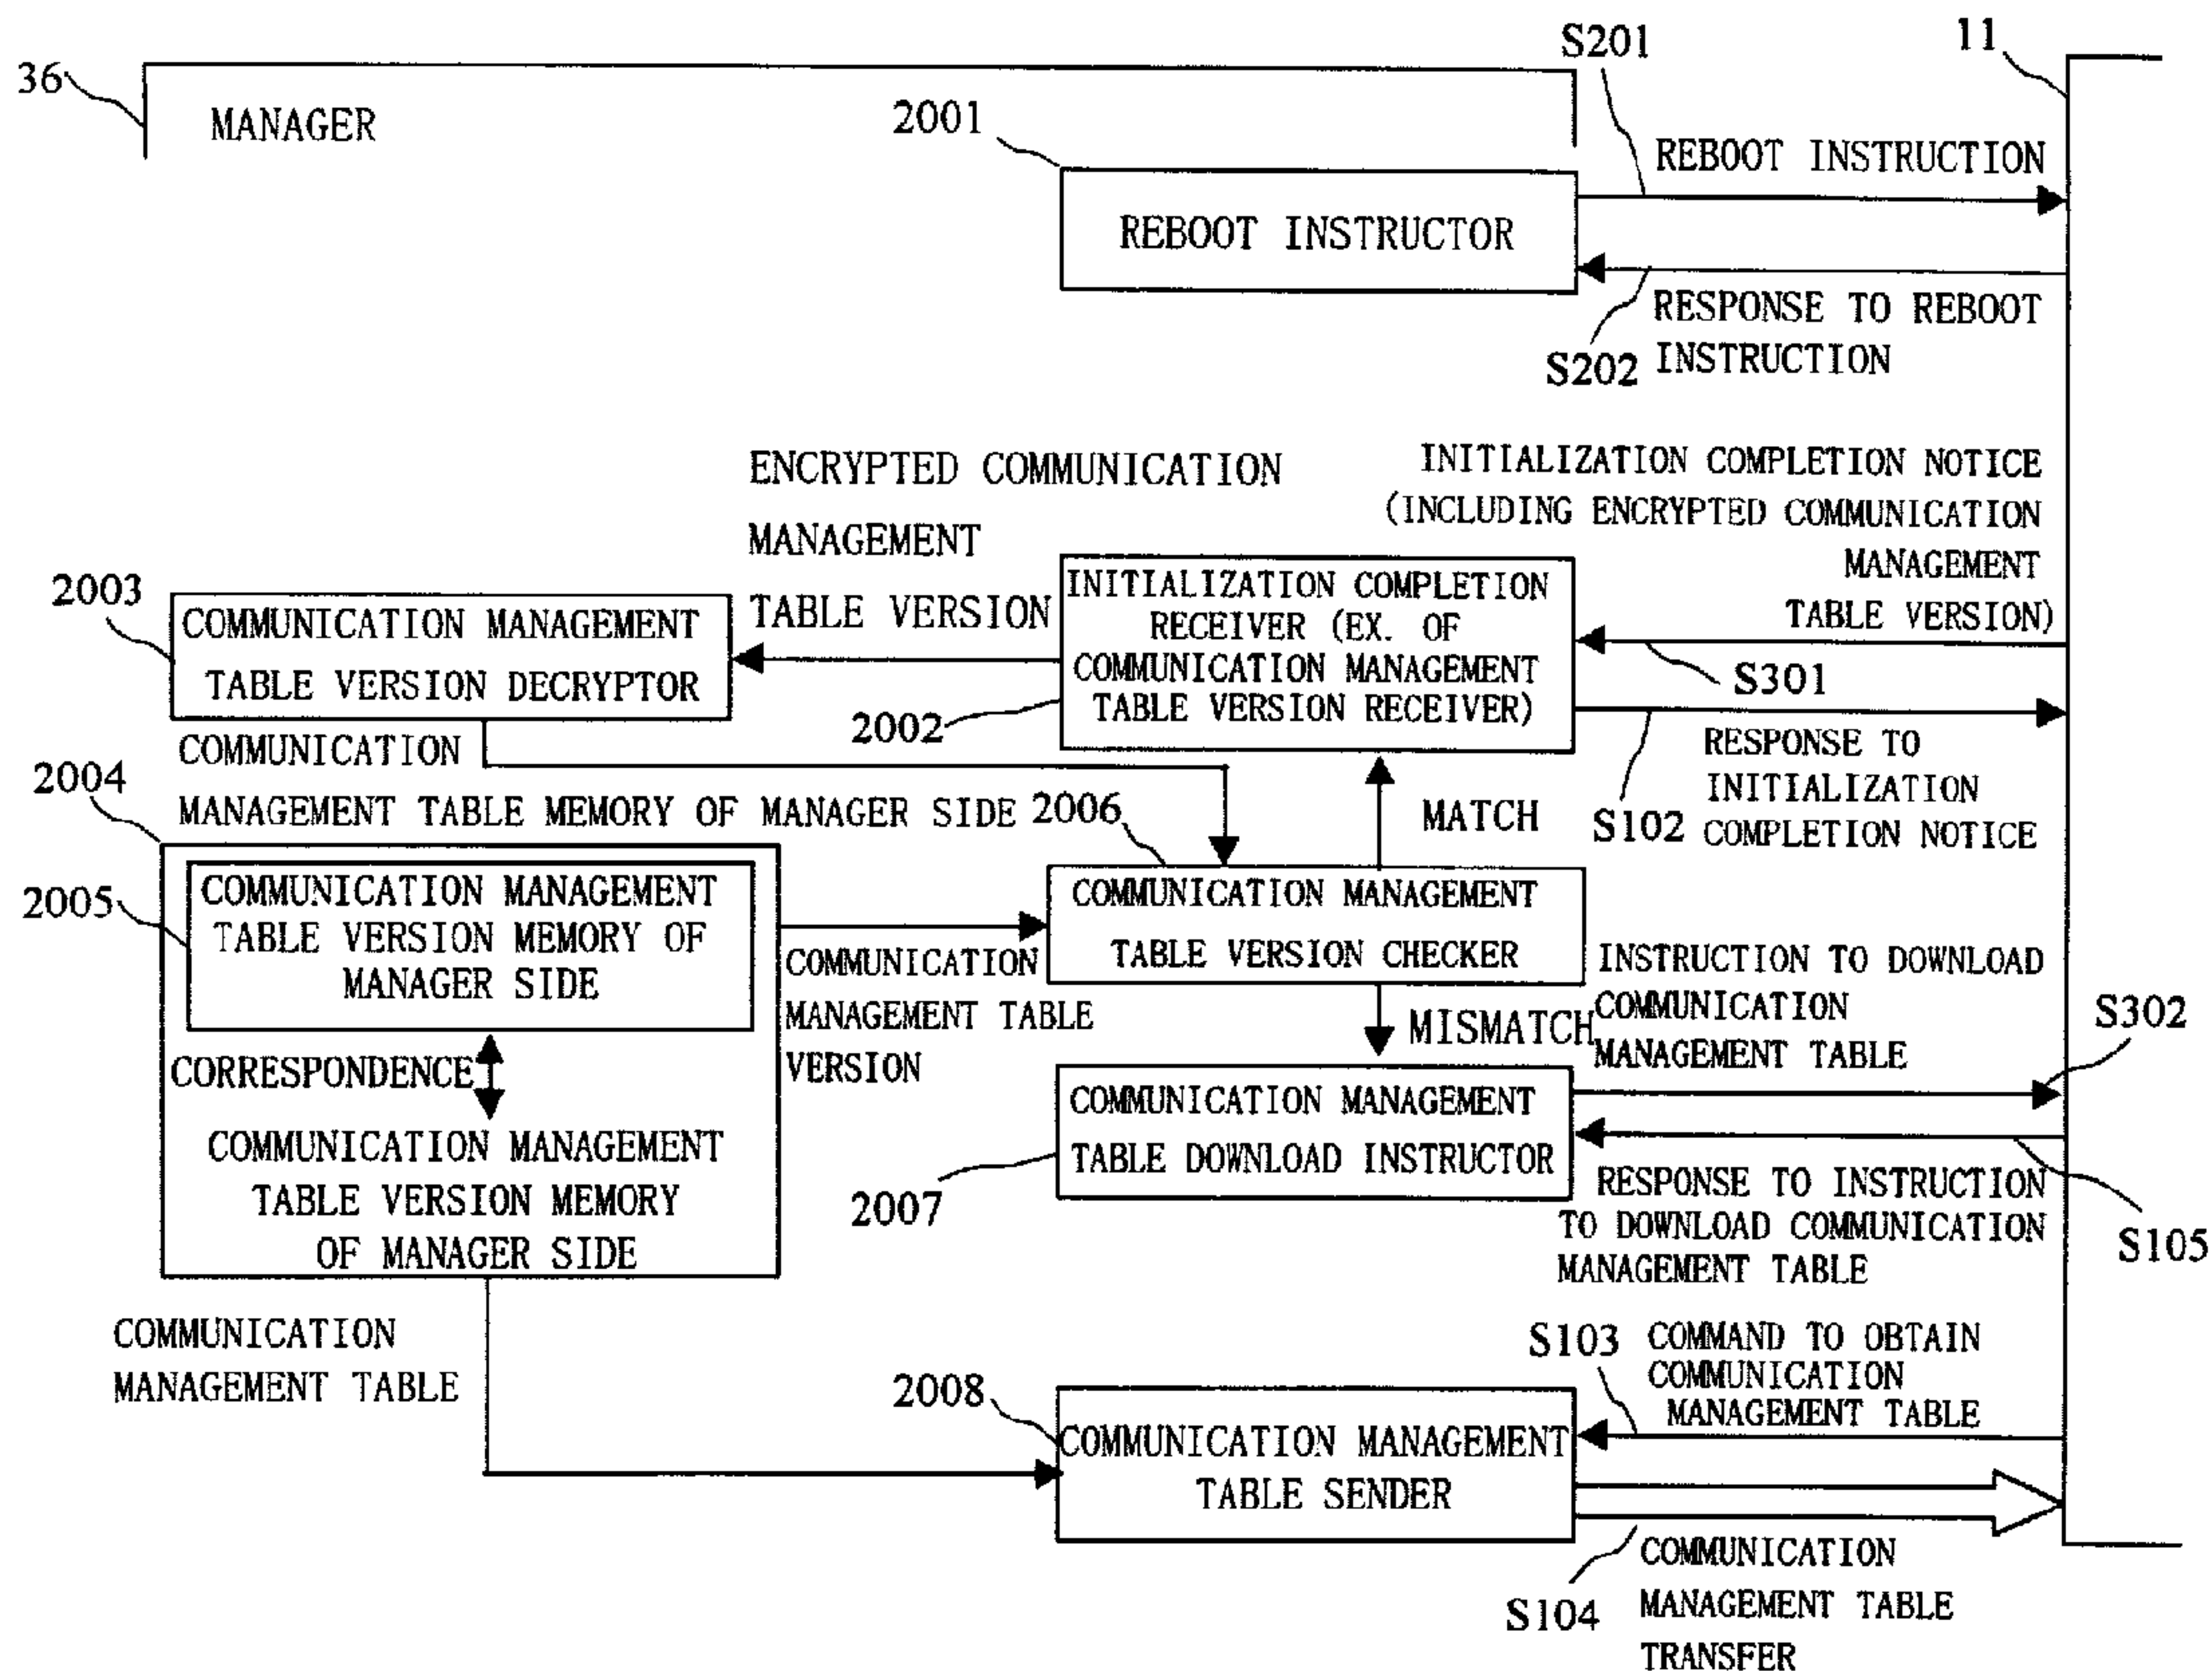

(57) Abrégé/Abstract:

The present invention relates to a communication management table transfer system including plural encryptors mutually connected through the Internet and a manager which manages the communication management table used for the



(57) Abrégé(suite)/Abstract(continued):

communication among the plural encryptors. The invention aims to improve security and performance of the communication. On receiving a communication management table version from an encryptor 11 (S301), a manager 36 compares the received communication management table version with the communication management table version stored in a communication management table version memory 2005 of the manager side by using a communication management table checker 2006. The manager 36 transfers the communication management table to the encryptor 11 only when the mismatch is found (S104).

Abstract

The present invention relates to a communication management table transfer system including plural encryptors mutually connected through the Internet and a manager which manages the communication management table used for the communication among the plural encryptors. The invention aims to improve security and performance of the communication.

On receiving a communication management table version from an encryptor 11 (S301), a manager 36 compares the received communication management table version with the communication management table version stored in a communication management table version memory 2005 of the manager side by using a communication management table checker 2006. The manager 36 transfers the communication management table to the encryptor 11 only when the mismatch is found (S104).

ENGLISH TRANSLATION FOR PCT/JP00/00474

SPECIFICATION

Communication Management Table Transfer System, Manager, Encryptor,
and Communication Management Table Transfer Method

5

Technical Field

The present invention relates to a communication management table transfer system including plural encryptors mutually connected through the Internet and a manager managing communication management table used
10 by the plural encryptors for communication, and further relates to improvement of the security and the performance of the communication.

Background Art

Recently, system employing Virtual Private Network (VPN) has
15 become popular. The VPN is a network in which a public network such as the Internet is virtually utilized as a private network using security technique such as encryption of data or authentication of a user. The virtual private network system enables to connect plural organizations through the public network as if they use exclusive communication lines like
20 their internal network.

Fig. 13 shows an example of the virtual private network system. A reference numeral 1 shows the Internet, 11, 21, and 31 are encryptors, 12, 22, and 32 are routers, 13, 23, and 33 are firewalls, 14, 24, and 34 are subnets (internal networks), 15, 25, and 35 show communication terminals, and 36
25 shows a manager. These elements are connected as shown in the figure.

On transferring data via the Internet, IP security compliant system is used for preventing an attack from the outside. Here, IP security means security securing system at IP packet level, defined by the IETF (Internet Engineering Task Force) which is a standardization organization for the Internet communication rules.

In the IP security system, data transfer is performed after relation so-called SA (Security Association) is established between the encryptors of each internal network. By doing this, secret communication becomes possible. However, to establish SA requires to share a public key among the encryptors as a premise.

Further, in order to transfer data to the communication terminal of the internal network, it is necessary to know information of configuration of each internal network.

Accordingly, a communication management table including the public key and the configuration information of the internal network is generated, and the communication management tables are exchanged between the encryptors before establishing SA. The manager 36 is provided for generating, updating, and distributing the communication management table.

Conventionally, upon request from the encryptor, the manager 36 distributes the communication management table to the encryptor unconditionally.

Fig. 14 shows a transfer process of the communication management table on turning electric power on according to the related art. When an encryptor A11 is powered on, the encryptor A11 sends an encryptor

initialization notice (S101). When the manager 36 receives the encryptor initialization notice (S101), the manager 36 sends a response to the encryptor initialization notice (S102). On receiving the response to the encryptor initialization notice (S102), the encryptor A11 issues a command to
5 obtain the communication management table (S103) unconditionally, and the communication management table is thus transferred (S104).

Fig. 15 shows a transfer process of the communication management table on rebooting according to the related art. The manager 36 sends a reboot instruction (S201), and the encryptor A11 is rebooted after the
10 encryptor A11 sends a response to the reboot instruction (S202). Hereinafter, the operation will be the same as one shown in Fig. 14.

In the above-described system, the number of transferring the communication management table is large, which decreases the performance of data transfer.

15 Further, there is another problem with respect to the security of the communication, that is, the number of chances may be increased that the communication management table is stolen by an improper user. Namely, the public key or the configuration information of the internal network may be stolen, and the secrecy of the data transfer between the encryptors cannot
20 be secured.

The present invention is provided to eliminate the above conventional problems. The invention aims to reduce the number of transferring the communication management table, improve the performance of data transfer, reduce the chances of improper use of the
25 communication management table, and thus the security of the

communication can be increased.

Disclosure of the Invention

According to the present invention, a communication management
5 table transfer system includes:

plural encryptors connected to each other through Internet; and

a manager which manages the communication management table
used for communication among the plural encryptors,

wherein each of the plural encryptors includes:

10 a communication management table memory of an encryptor side for
storing a communication management table of the encryptor side which is
the communication management table to be stored in the each of the plural
encryptors;

a communication management table version memory of the
15 encryptor side for storing a communication management table version of the
encryptor side which is a version of the communication management table of
the encryptor side; and

a communication management table version sender for sending the
communication management table version of the encryptor side to the
20 manager,

wherein the manager includes:

a communication management table memory of a manger side for
storing a communication management table of the manager side which is the
communication management table to be stored in the manager;

25 a communication management table version memory of the manager

side for storing a communication management table version of the manager side which is a version of the communication management table of the manager side;

5 a communication management table version receiver for receiving the communication management table version of the encryptor side from the encryptor;

a communication management table version checker for checking and finding mismatch of the communication management table version of the encryptor side received and the communication management table version of the manager side; and

10 a communication management table sender for sending the communication management table of the manager side when the mismatch is found by the communication management table version checker,

wherein the encryptor further includes a communication management table receiver for receiving the communication management table of the manager side from the manager, and

wherein the communication management table memory of the encryptor side stores the communication management table of the manager side received by the communication management table receiver as the communication management table of the encryptor side.

20 The communication management table transfer system of the invention,

wherein the communication management table sender further sends the communication management table version of the manager side when the mismatch is found by the communication management table version checker,

wherein the communication management table receiver further receives the communication management table version of the manager side from the manager, and

5 wherein the communication management table version memory of the encryptor side stores the communication management table version of the manager side received by the communication management table receiver as the communication management table version of the encryptor side.

According to the present invention, a manager managing a communication management table used for communication among plural
10 encryptors connected to each other through Internet includes:

a communication management table memory of a manger side for storing a communication management table of the manager side which is the communication management table to be stored in the manager;

a communication management table version memory of the manager
15 side for storing a communication management table version of the manager side which is a version of the communication management table of the manager;

a communication management table version receiver for receiving a communication management table version of an encryptor side which is a
20 version of the communication management table of the encryptor side to be store in the encryptor from each of the plural encryptors;

a communication management table version checker for checking and finding mismatch of the communication management table version of the encryptor side received and the communication management table
25 version of the manager side; and

a communication management table sender for sending the communication management table of the manager side when the mismatch is found by the communication management table version checker.

The manager of the invention, wherein the communication
5 management table sender further sends the communication management table version of the manager side when the mismatch is found by the communication management table version checker.

The manager of the invention further includes a communication management table updater of the manager side for updating the
10 communication management table of the manager side and the communication management table version of the manager side correspondingly.

The manager of the invention further includes a communication management table update information receiver for receiving communication
15 management table update information which is information to be updated within the communication management table of the manager side.

According to the present invention, an encryptor connected to another encryptor through Internet and of which a communication management table used for communication is managed by a manager, the
20 encryptor includes:

a communication management table memory of an encryptor side for storing a communication management table of the encryptor side which is the communication management table to be stored in the encryptor;

a communication management table version memory of the
25 encryptor side for storing a communication management table version of the

encryptor side which is a version of the communication management table of the encryptor side;

a communication management table version sender for sending the communication management table version of the encryptor side to the
5 manager; and

a communication management table receiver for receiving a communication management table of a manager side which is the communication management table to be stored in the manager from the manager, and

10 wherein the communication management table memory of the encryptor side stores the communication management table of the manager side received by the communication management table receiver as the communication management table of the encryptor side.

The encryptor of the invention, wherein:

15 the communication management table receiver further receives a communication management table version of the manager side which is a version of the communication management table of the manager side from the manager; and

the communication management table version memory of the
20 encryptor side stores the communication management table version of the manager side received by the communication management table receiver as the communication management table version of the encryptor side.

The encryptor of the invention, wherein the communication management table includes a public key, and

25 the encryptor further comprising:

a secret key for secret key communication exchanger for sharing a
secret key for secret communication used for secret communication with the
other encryptor through the Internet, with the other encryptor by using the
public key included in the communication management table of the
5 encryptor side.

The encryptor of the invention, wherein the communication
management table includes a public key, and

the encryptor further includes:

an certification key for secret key communication exchanger for
10 sharing an certification key for secret communication used for secret
communication with the other encryptor through the Internet, with the other
encryptor by using the public key included in the communication
management table of the encryptor side.

The encryptor of the invention, wherein:

15 the other encryptor is connected to a subnet; and

the communication management table includes subnet configuration
information which is information related to a configuration of the subnet,
and

the encryptor further includes:

20 an Internet communicating unit for communicating with the other
encryptor through the Internet based on the subnet configuration
information included in the communication management table of the
encryptor side.

According to the present invention, a method for transferring a
25 communication management table used for a communication management

table transfer system including:

plural encryptors connected to each other through Internet, each of which has a communication management table memory of an encryptor side for storing a communication management table of the encryptor side and a
5 communication management table version memory for storing a communication management table version of the encryptor side; and

a manager managing the communication management table used for communication among the plural encryptors, which has a communication management table memory of a manager side for storing a communication
10 management table of the manager side and a communication management table version memory for storing a communication management table version of the manager side,

the method includes:

sending the communication management table version of the
15 encryptor side to the manager by the encryptor;

receiving the communication management table version of the encryptor side from the encryptor by the manager;

checking and finding mismatch of the communication management table version of the encryptor side received and the communication
20 management table version of the manager side by the manager;

sending the communication management table of the manager side by the manager when the mismatch is found by the checking and finding;

receiving the communication management table of the manager side from the manager by the encryptor; and

25 storing the communication management table of the manager side

received as the communication management table of the encryptor side by the encryptor.

Brief Explanation of the Drawings

5 Fig. 1 shows a configuration of an encryptor according to the present embodiment.

 Fig. 2 shows a configuration of a manager according to the embodiment.

 Fig. 3 shows a transfer procedure of the communication management
10 table on turning electric power on according to the embodiment.

 Fig. 4 shows a procedure for omitting the transfer of the communication management table on turning electric power on according to the embodiment.

 Fig. 5 shows a transfer procedure of the communication management
15 table on rebooting according to the embodiment.

 Fig. 6 shows a procedure for omitting the transfer of the communication management table on rebooting according to the embodiment.

 Fig. 7 shows a configuration of the communication management
20 table according to the embodiment.

 Fig. 8 shows a configuration of the communication management table according to the embodiment.

 Fig. 9 shows a configuration of the communication management table according to the embodiment.

25 Fig. 10 shows data flow on establishing SA.

Fig. 11 shows data flow on secret communication.

Fig. 12 shows a case in which subnet configuration information is used.

Fig. 13 shows a system in which virtual private network is employed.

5 Fig. 14 shows a transfer procedure of the communication management table on turning electric power on according to the related art.

Fig. 15 shows a transfer procedure of the communication management table on rebooting according to the related art.

10 Best Mode for Carrying out the Invention

Embodiment 1.

In the following, the present invention will be explained referring to the figures showing an embodiment.

Fig. 1 shows a configuration of an encryptor according the
 15 embodiment. A reference numeral 1001 shows a power controller, 1002 shows a reboot controller, 1003 shows an initializer, 1004 shows a communication management table memory of the encryptor side, 1005 shows a communication management table version memory of the encryptor side, 1006 shows a communication management table version encryptor, 1007
 20 shows an initialization completion notifier, 1008 shows a communication management table download controller, and 1009 shows a communication management table receiver.

Fig. 2 shows a configuration of a manager according to the
 embodiment. A reference numeral 2001 shows a reboot instructor, 2002
 25 shows an initialization completion receiver, 2003 shows a communication

management table version decryptor, 2004 shows a communication management table memory of the manager side, 2005 shows a communication management table version memory of the manager side, 2006 shows a communication management table version checker, 2007
5 shows a communication management table download instructor, and 2008 shows a communication management table sender.

Fig. 3 shows a procedure of transferring the communication management table on turning an electric power on according to the embodiment. Hereinafter, this procedure will be described referring to the
10 configurations shown in Figs. 1 and 2.

At an encryptor A11 side, on turning electric power on, the power controller 1001 instructs initialization to the initializer 1003. When the initialization is completed, the initializer 1003 notifies the initialization completion notifier 1007 of completion of initialization. The initialization
15 completion notifier 1007 sends an encryptor initialization completion notice (S301) to the initialization completion receiver 2002 of a manager 36. At this time, the encryptor initialization completion notice (S301) includes communication management table version encrypted by a public key of the manager 36.

20 The communication management table version is stored in the communication management table version memory 1005 of the encryptor side. The communication management table version stored in the communication management table version memory 1005 of the encryptor side is made correspondence to the communication management table of the
25 communication management table memory 1004 of the encryptor side. In

this example, the communication management table version memory 1005 of the encryptor side is included in the communication management table memory 1004 of the encryptor side, however, the communication management table version memory 1005 can be separated from the communication management table memory 1004 of the encryptor side.

The communication management table version encryptor 1006 is configured to read the communication management table version from the communication management table version memory 1005 of the encryptor side, encrypt the communication management table version, and send the encrypted communication management table version to the initialization completion notifier 1007.

At the manager 36 side, the initialization completion receiver 2002 receives the encryptor initialization completion notice (S301), and the communication management table version decryptor 2003 decrypts the encrypted communication management table version. On the other hand, the communication management table checker 2006 reads the communication management table version stored at the manager 36 side from the communication management table version memory 2005 of the manager side. And then, the communication management table version checker 2006 compares these communication management table versions. Here, the communication management table version memory 2005 of the manager side is included in the communication management table memory 2004 of the manager side, however, they can be separated as long as the communication management table is made correspondence to the communication management table version.

As a result of comparison, when two communication management table versions mismatch, the communication management table version checker 2006 notifies the mismatch to the communication management table download instructor 2007.

5 On receiving the notice of the mismatch, the communication management table download instructor 2007 sends a communication management table download instruction (S302) to the communication management table download controller 1008 of the encryptor A11.

10 At the encryptor A11 side, on receiving the communication management table download instruction (S302), the communication management table download controller 1008 instructs the communication management table receiver 1009 to obtain the communication management table to receive the communication management table according to the procedure of file transfer.

15 On receiving the instruction to obtain the communication management table, the communication management table receiver 1009 sends a command to obtain the communication management table (S103) to the communication management table sender 2008 of the manager 36.

20 At the manager 36 side, on receiving the command to obtain the communication management table (S103), the communication management table sender 2008 reads the communication management table from the communication management table memory 2004 of the manager side, and transfers the file of the communication management table to the communication management table receiver 1009 of the encryptor A11 (S104).

25 At the encryptor A11 side, on finishing receiving the communication

management table, the communication management table receiver 1009 notifies the communication management table download controller 1008 of the completion of obtaining the communication management table. The communication management table download controller 1008 sends response
5 to the communication management table download instruction (S105) to the communication management table download instructor 2007 of the manager 36. Further, the communication management table receiver 1009 stores the received communication management table in the communication management table memory 1004 of the encryptor side.

10 In the above example, the file of the communication management table including the communication management table version is transferred and stored in the communication management table memory 1004 of the encryptor side. However, the communication management table version can be separated from the communication management table. Namely, the
15 file of the communication management table without the communication management table version and the file of the communication management table version can be transferred separately.

In this way, when the communication management table versions mismatch, the communication management table is transferred from the
20 manager 36 to the encryptor A11. Further, the communication management table version is also transferred.

Fig. 4 shows a procedure of omitting the transfer of communication management table on turning an electric power on. Hereinafter, this procedure will be explained referring to the configuration shown in Figs. 1
25 and 2.

The procedure up to the step where the communication management table version checker 2006 compares the communication management table versions is the same as described above.

As a result of comparison, when the communication management
5 table versions match, the communication management table version checker 2006 notifies the match to the initialization completion receiver 2002.

The initialization completion receiver 2002 sends response to the encryptor initialization completion notice (S102) to the initialization completion notifier 1007. When the initialization completion notifier 1007
10 receives the encryptor initialization completion notice (S102), the procedure terminates. Namely, the communication management table is not transferred in case that the communication management table versions match.

The timing at which the encryptor A11 sends the communication
15 management table version and the manager 36 checks the communication management table version is not limited to the timing of initialization. It can be another timing, for example, the timing of reboot, or a certain periodical timing.

Fig. 5 shows a procedure of transferring the communication
20 management table on rebooting according to the embodiment. Further, Fig. 6 shows a procedure of omitting the transfer of the communication management table on rebooting according to the embodiment. The procedures are the same as ones shown in Figs. 3 and 4 except that the procedures start at rebooting based on a reboot instruction (S201) and a
25 reboot instruction response (S202).

In the following, the configuration of the communication management table will be explained. Figs. 7, 8, and 9 show the configuration of the communication management table according to the present embodiment.

5 As well as a communication management table version 90, the communication management table includes Internet communication information such as Internet communication information A50, Internet communication information B60, and so on and subnet configuration information such as subnet configuration information A70, subnet
10 configuration information B80, and so on.

 The Internet communication information A50 is necessary for the encryptor A11 on communicating with another encryptor through the Internet 1. The Internet communication information B60 is also necessary for the encryptor B21 on communicating with another encryptor through the
15 Internet 1.

 Reference numerals 51, 61 show Internet addresses, 52, 62 show identifiers for the encryptors, 53, 63 show certificates, and 54, 64 show effective dates. The certificate includes the public key for SA.

 The subnet configuration information A70 is information related to
20 the configuration of a subnet 14. The figure shows information for one record, however, another record may be added when many communication terminals are included in the configuration of the subnet 14. This is the same as for the subnet configuration information B80.

 Reference numerals 71, 81 show identifiers of the encryptors, 72, 82
25 show network addresses, and 73, 83 show net masks.

In case of an example shown in Fig. 7, the communication management table version 90 includes one version, corresponding to the updated status of the whole communication management table.

In case of an example shown in Fig. 8, the communication
5 management table version 90 includes plural versions such as encryptor A information version 91, encryptor B information version 92, and so on. The encryptor A information version 91 corresponds to the updated status of the Internet communication information A50 and the subnet configuration information A70, and so on (including another subnet configuration
10 information, if there exists any).

In case of an example shown in Fig. 9, the communication management table version 90 is subdivided and includes versions of encryptor A Internet communication information version 93, encryptor A subnet configuration information version 94, encryptor B Internet
15 communication information version 95, encryptor B subnet configuration information version 96, and so on. The encryptor A Internet communication information version 93 corresponds to the updated status of the Internet communication information A50. The encryptor A subnet configuration information version 94 corresponds to the updated status of the subnet
20 configuration information A70, and so on (including another subnet configuration information, if there exists any).

In cases of Figs. 8 and 9, it is possible to correspond the version to each information by storing a device identifier or an information identifier corresponding to each version.

25 The manager 36 includes a communication management table

update information receiver (not shown in the figure) receiving communication management table update information, which is information to be updated within the communication management table, and a communication management table updater of the manager side (not shown
5 in the figure) updating the communication management table of the manager side and the communication management table version of the manager side correspondingly.

In case shown in Fig. 7, the communication management table update information receiver updates the communication management table
10 version 90 on receiving the communication management table update information from any of the encryptors. In case shown in Fig. 8, the communication management table update information receiver updates either of or both of the Internet communication information A50 and the subnet configuration information A70, and further updates the information
15 version 91 for the encryptor A. In case shown in Fig. 9, on receiving the communication management table update information from the encryptor A11, the communication management table update information receiver checks whether it is required to update either of or both of the communication management table update information related to the
20 Internet communication information A50 and the communication management table update information related to the subnet configuration information A70 and updates the communication management table update information. Further, the communication management table update information receiver updates either of or both of the Internet communication
25 information version 93 for the encryptor A and the subnet configuration

information version 94 for the encryptor A corresponding to the communication management table update information.

In case of subdividing the communication management table version as shown in Figs. 8 and 9, it is also effective that the communication management table version checker 2006 compares the communication management table version for each subdivided version, and only part of the mismatched version of the communication management table can be transferred by communication management table transfer (S104). In such a case, information indicating the transferred part is added to the communication management table download instruction (S302). The communication management table receiver 1009 updates only the indicated part of the communication management table memory 1004 of the encryptor side and also updates only the indicated part of the communication management table version memory 1005 of the encryptor side.

Next, an operation of establishing SA using the public key for SA included in the communication management table will be explained. Fig. 10 shows data flow on establishing SA. In this example, the encryptor A11 requests to establish SA, and the encryptor B21 responds to the request for establishing SA. Each encryptor has a secret key memory 1013 for SA storing a secret key for SA of its own encryptor and a certification key and secret key for secret communication exchanger 1010 for sharing a secret key 1011 for secret communication and a certification key 1012 for secret communication. The certification key and secret key for secret communication exchanger 1010 is configured so as to input the secret key for SA of its own encryptor and the public key for SA of the partner's encryptor.

The certification key and secret key for secret communication exchanger 1010 of the encryptor A11 generates a random number X_a , signatures, encrypts, and sends to the encryptor B21 (S501). The certification key and secret key for secret communication exchanger 1010 of
5 the encryptor B21 generates a random number X_b . The certification key and secret key for secret communication exchanger 1010 of the encryptor B21 generates the secret key 1011 for secret communication and the certification key 1012 for secret communication by combining the random number X_b with the random number X_a . Further, the certification key and
10 secret key for secret communication exchanger 1010 of the encryptor B21 signatures and encrypts hashed values of X_b and X_a , and sends them to the encryptor A11 (S502). The certification key and secret key for secret communication exchanger 1010 of the encryptor A11 generates the secret key 1011 for secret communication and the certification key 1012 for secret
15 communication by combining the random numbers X_a and X_b , and checks the received hashed values. Further, the certification key and secret key for secret communication exchanger 1010 of the encryptor A11 sends the hashed value of the random number X_b to the encryptor B21 (S503). The certification key and secret key for secret communication exchanger 1010 of
20 the encryptor B21 checks the received hashed value. Through the above procedure, SA is established. Consequently, both partners obtain the secret key 1011 for secret communication and the certification key 1012 for secret communication shared with each other.

In the following, an operation of the secret communication performed
25 after establishing SA will be explained. Fig. 11 shows data flow of the secret

communication. In this example, the encryptor A11 sends data, and the encryptor B21 receives the data. The illustrated communication is only one of examples, since the communication can be bidirectional between the encryptors which have already established SA.

5 Each encryptor includes an Internet communication unit 1014 and a subnet communication unit 1015. The Internet communication unit 1014 controls the communication through the Internet 1, and the subnet communication unit 1015 controls the communication through the subnet.

10 In the Internet communication unit 1014 at the sender side, an encryption unit 1016, a certification unit 1017, and an encapsulation unit 1018 operate. In the Internet communication unit 1014 at the receiver side, a certification unit 1019, a decryption unit 1020, and a decapsulation unit 1021 operate. Within these operations, the secret key 1011 for secret communication is used for encryption algorithm, and the certification key 15 1012 for secret communication is used for authentication algorithm.

20 Further, the subnet configuration information included in the communication management table is used for communication to the subnet connected to another encryptor. As shown in Fig. 12, the subnet configuration information is used within the Internet communication unit 1014.

Industrial Applicability

25 According to the present invention, the communication management table version is managed between the manager and the encryptor. When the communication management tables are judged as identical between the

manager and the encryptor, the transfer of the communication management table is omitted. Therefore, the number of transferring the communication management table is reduced, which enormously improves performance and security of data communication.

Claims

1. A communication management table transfer system comprising:
plural encryptors connected to each other through Internet; and
a manager which manages the communication management table
5 used for communication among the plural encryptors,
wherein each of the plural encryptors includes:
a communication management table memory of an encryptor side for
storing a communication management table of the encryptor side which is
the communication management table to be stored in the each of the plural
10 encryptors;
a communication management table version memory of the
encryptor side for storing a communication management table version of the
encryptor side which is a version of the communication management table of
the encryptor side; and
15 a communication management table version sender for sending the
communication management table version of the encryptor side to the
manager,
wherein the manager includes:
a communication management table memory of a manger side for
20 storing a communication management table of the manager side which is the
communication management table to be stored in the manager;
a communication management table version memory of the manager
side for storing a communication management table version of the manager
side which is a version of the communication management table of the
25 manager side;

a communication management table version receiver for receiving the communication management table version of the encryptor side from the encryptor;

a communication management table version checker for checking
5 and finding mismatch of the communication management table version of the encryptor side received and the communication management table version of the manager side; and

a communication management table sender for sending the communication management table of the manager side when the mismatch
10 is found by the communication management table version checker,

wherein the encryptor further includes a communication management table receiver for receiving the communication management table of the manager side from the manager, and

wherein the communication management table memory of the
15 encryptor side stores the communication management table of the manager side received by the communication management table receiver as the communication management table of the encryptor side.

2. The communication management table transfer system of claim 1,

wherein the communication management table sender further sends
20 the communication management table version of the manager side when the mismatch is found by the communication management table version checker,

wherein the communication management table receiver further receives the communication management table version of the manager side from the manager, and

25 wherein the communication management table version memory of

the encryptor side stores the communication management table version of the manager side received by the communication management table receiver as the communication management table version of the encryptor side.

3. A manager managing a communication management table used for communication among plural encryptors connected to each other through Internet comprising:

a communication management table memory of a manger side for storing a communication management table of the manager side which is the communication management table to be stored in the manager;

10 a communication management table version memory of the manager side for storing a communication management table version of the manager side which is a version of the communication management table of the manager;

15 a communication management table version receiver for receiving a communication management table version of an encryptor side which is a version of the communication management table of the encryptor side to be store in the encryptor from each of the plural encryptors;

20 a communication management table version checker for checking and finding mismatch of the communication management table version of the encryptor side received and the communication management table version of the manager side; and

a communication management table sender for sending the communication management table of the manager side when the mismatch is found by the communication management table version checker.

25 4. The manager of claim 3, wherein the communication management

table sender further sends the communication management table version of the manager side when the mismatch is found by the communication management table version checker.

5. The manager of claim 3 further comprising a communication
5 management table updater of the manager side for updating the communication management table of the manager side and the communication management table version of the manager side correspondingly.

6. The manager of claim 5 further comprising a communication
10 management table update information receiver for receiving communication management table update information which is information to be updated within the communication management table of the manager side.

7. An encryptor connected to another encryptor through Internet and of which a communication management table used for communication is
15 managed by a manager, the encryptor comprising:

a communication management table memory of an encryptor side for storing a communication management table of the encryptor side which is the communication management table to be stored in the encryptor;

a communication management table version memory of the
20 encryptor side for storing a communication management table version of the encryptor side which is a version of the communication management table of the encryptor side;

a communication management table version sender for sending the communication management table version of the encryptor side to the
25 manager; and

a communication management table receiver for receiving a communication management table of a manager side which is the communication management table to be stored in the manager from the manager, and

5 wherein the communication management table memory of the encryptor side stores the communication management table of the manager side received by the communication management table receiver as the communication management table of the encryptor side.

8. The encryptor of claim 7, wherein:

10 the communication management table receiver further receives a communication management table version of the manager side which is a version of the communication management table of the manager side from the manager; and

 the communication management table version memory of the
15 encryptor side stores the communication management table version of the manager side received by the communication management table receiver as the communication management table version of the encryptor side.

9. The encryptor of claim 7, wherein the communication management table includes a public key, and

20 the encryptor further comprising:

 a secret key for secret communication exchanger for sharing a secret key for secret communication used for secret communication with the other encryptor through the Internet, with the other encryptor by using the public key included in the communication management table of the
25 encryptor side.

10. The encryptor of claim 7, wherein the communication management table includes a public key, and

the encryptor further comprising:

5 a certification key for secret communication exchanger for sharing an certification key for secret communication used for secret communication with the other encryptor through the Internet, with the other encryptor by using the public key included in the communication management table of the encryptor side.

11. The encryptor of claim 7, wherein:

10 the other encryptor is connected to a subnet; and

the communication management table includes subnet configuration information which is information related to a configuration of the subnet, and

the encryptor further comprising:

15 an Internet communicating unit for communicating with the other encryptor through the Internet based on the subnet configuration information included in the communication management table of the encryptor side.

12. A method for transferring a communication management table used for a communication management table transfer system including:

20 plural encryptors connected to each other through Internet, each of which has a communication management table memory of an encryptor side for storing a communication management table of the encryptor side and a communication management table version memory for storing a communication management table version of the encryptor side; and

25

a manager managing the communication management table used for communication among the plural encryptors, which has a communication management table memory of a manager side for storing a communication management table of the manager side and a communication management
5 table version memory for storing a communication management table version of the manager side,

the method comprising:

sending the communication management table version of the encryptor side to the manager by the encryptor;

10 receiving the communication management table version of the encryptor side from the encryptor by the manager;


checking and finding mismatch of the communication management table version of the encryptor side received and the communication management table version of the manager side by the manager;

15 sending the communication management table of the manager side by the manager when the mismatch is found by the checking and finding;

receiving the communication management table of the manager side from the manager by the encryptor; and

storing the communication management table of the manager side
20 received as the communication management table of the encryptor side by the encryptor.

Fig. 1

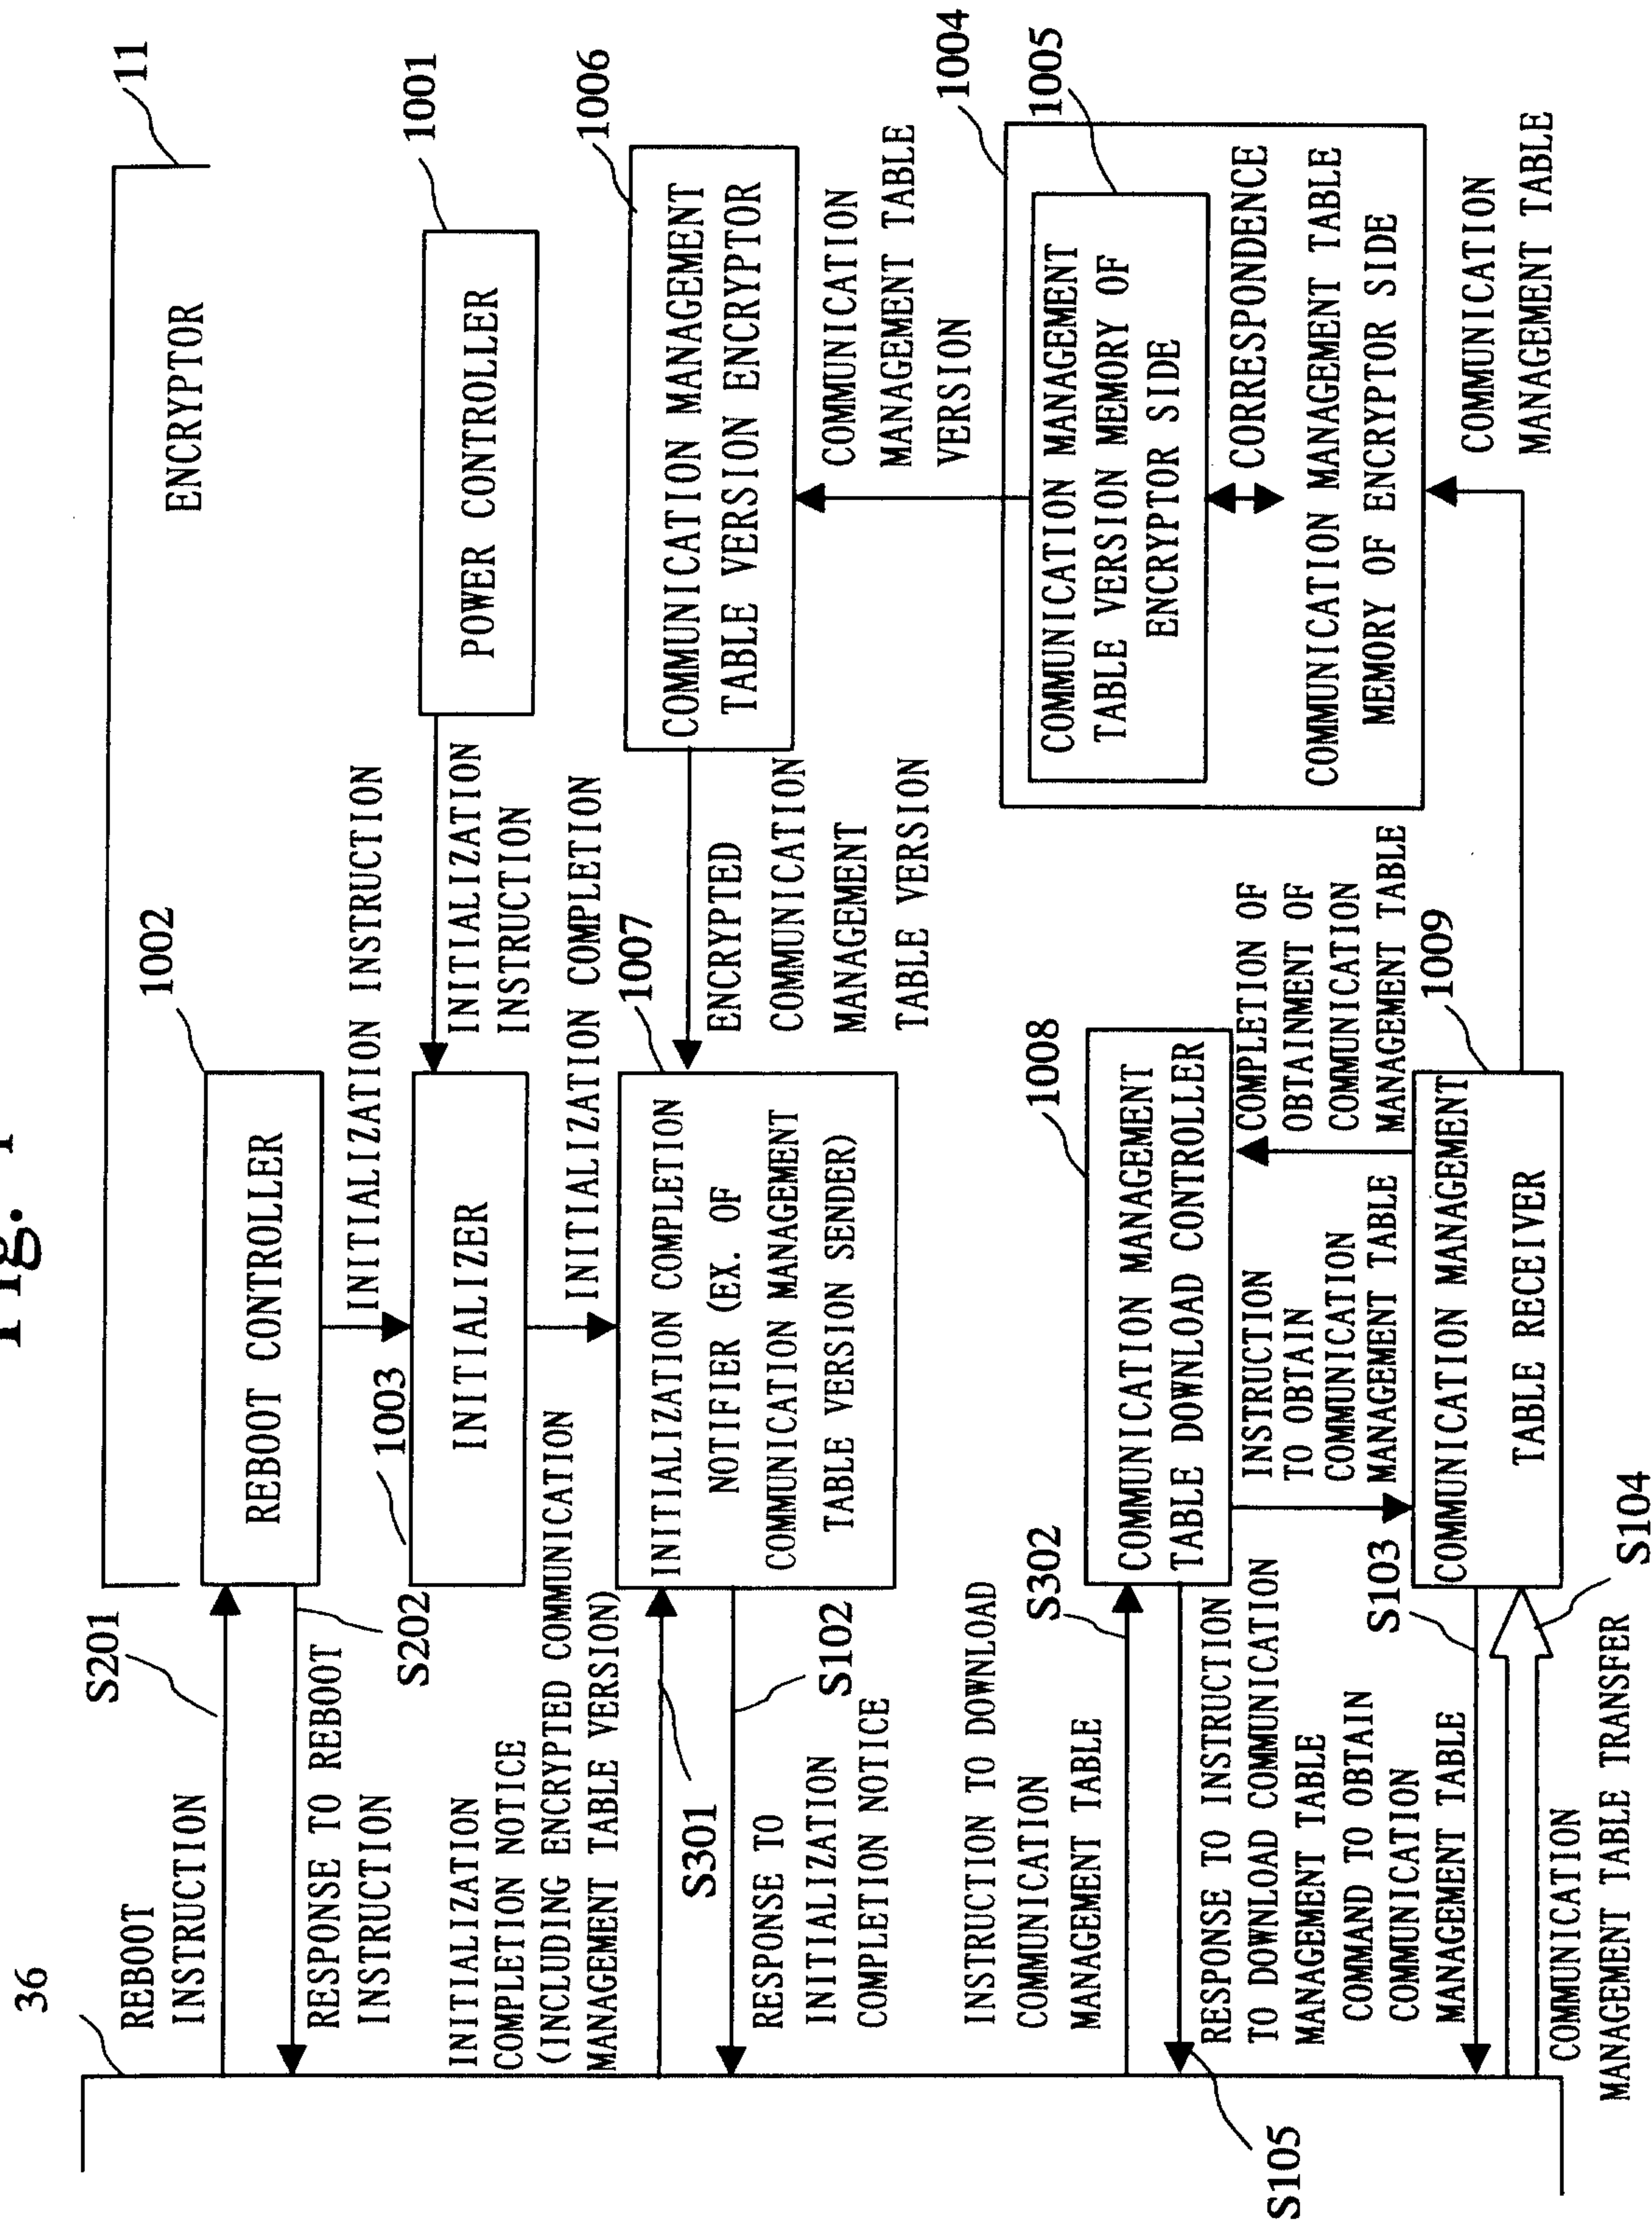

2/15

Fig. 2

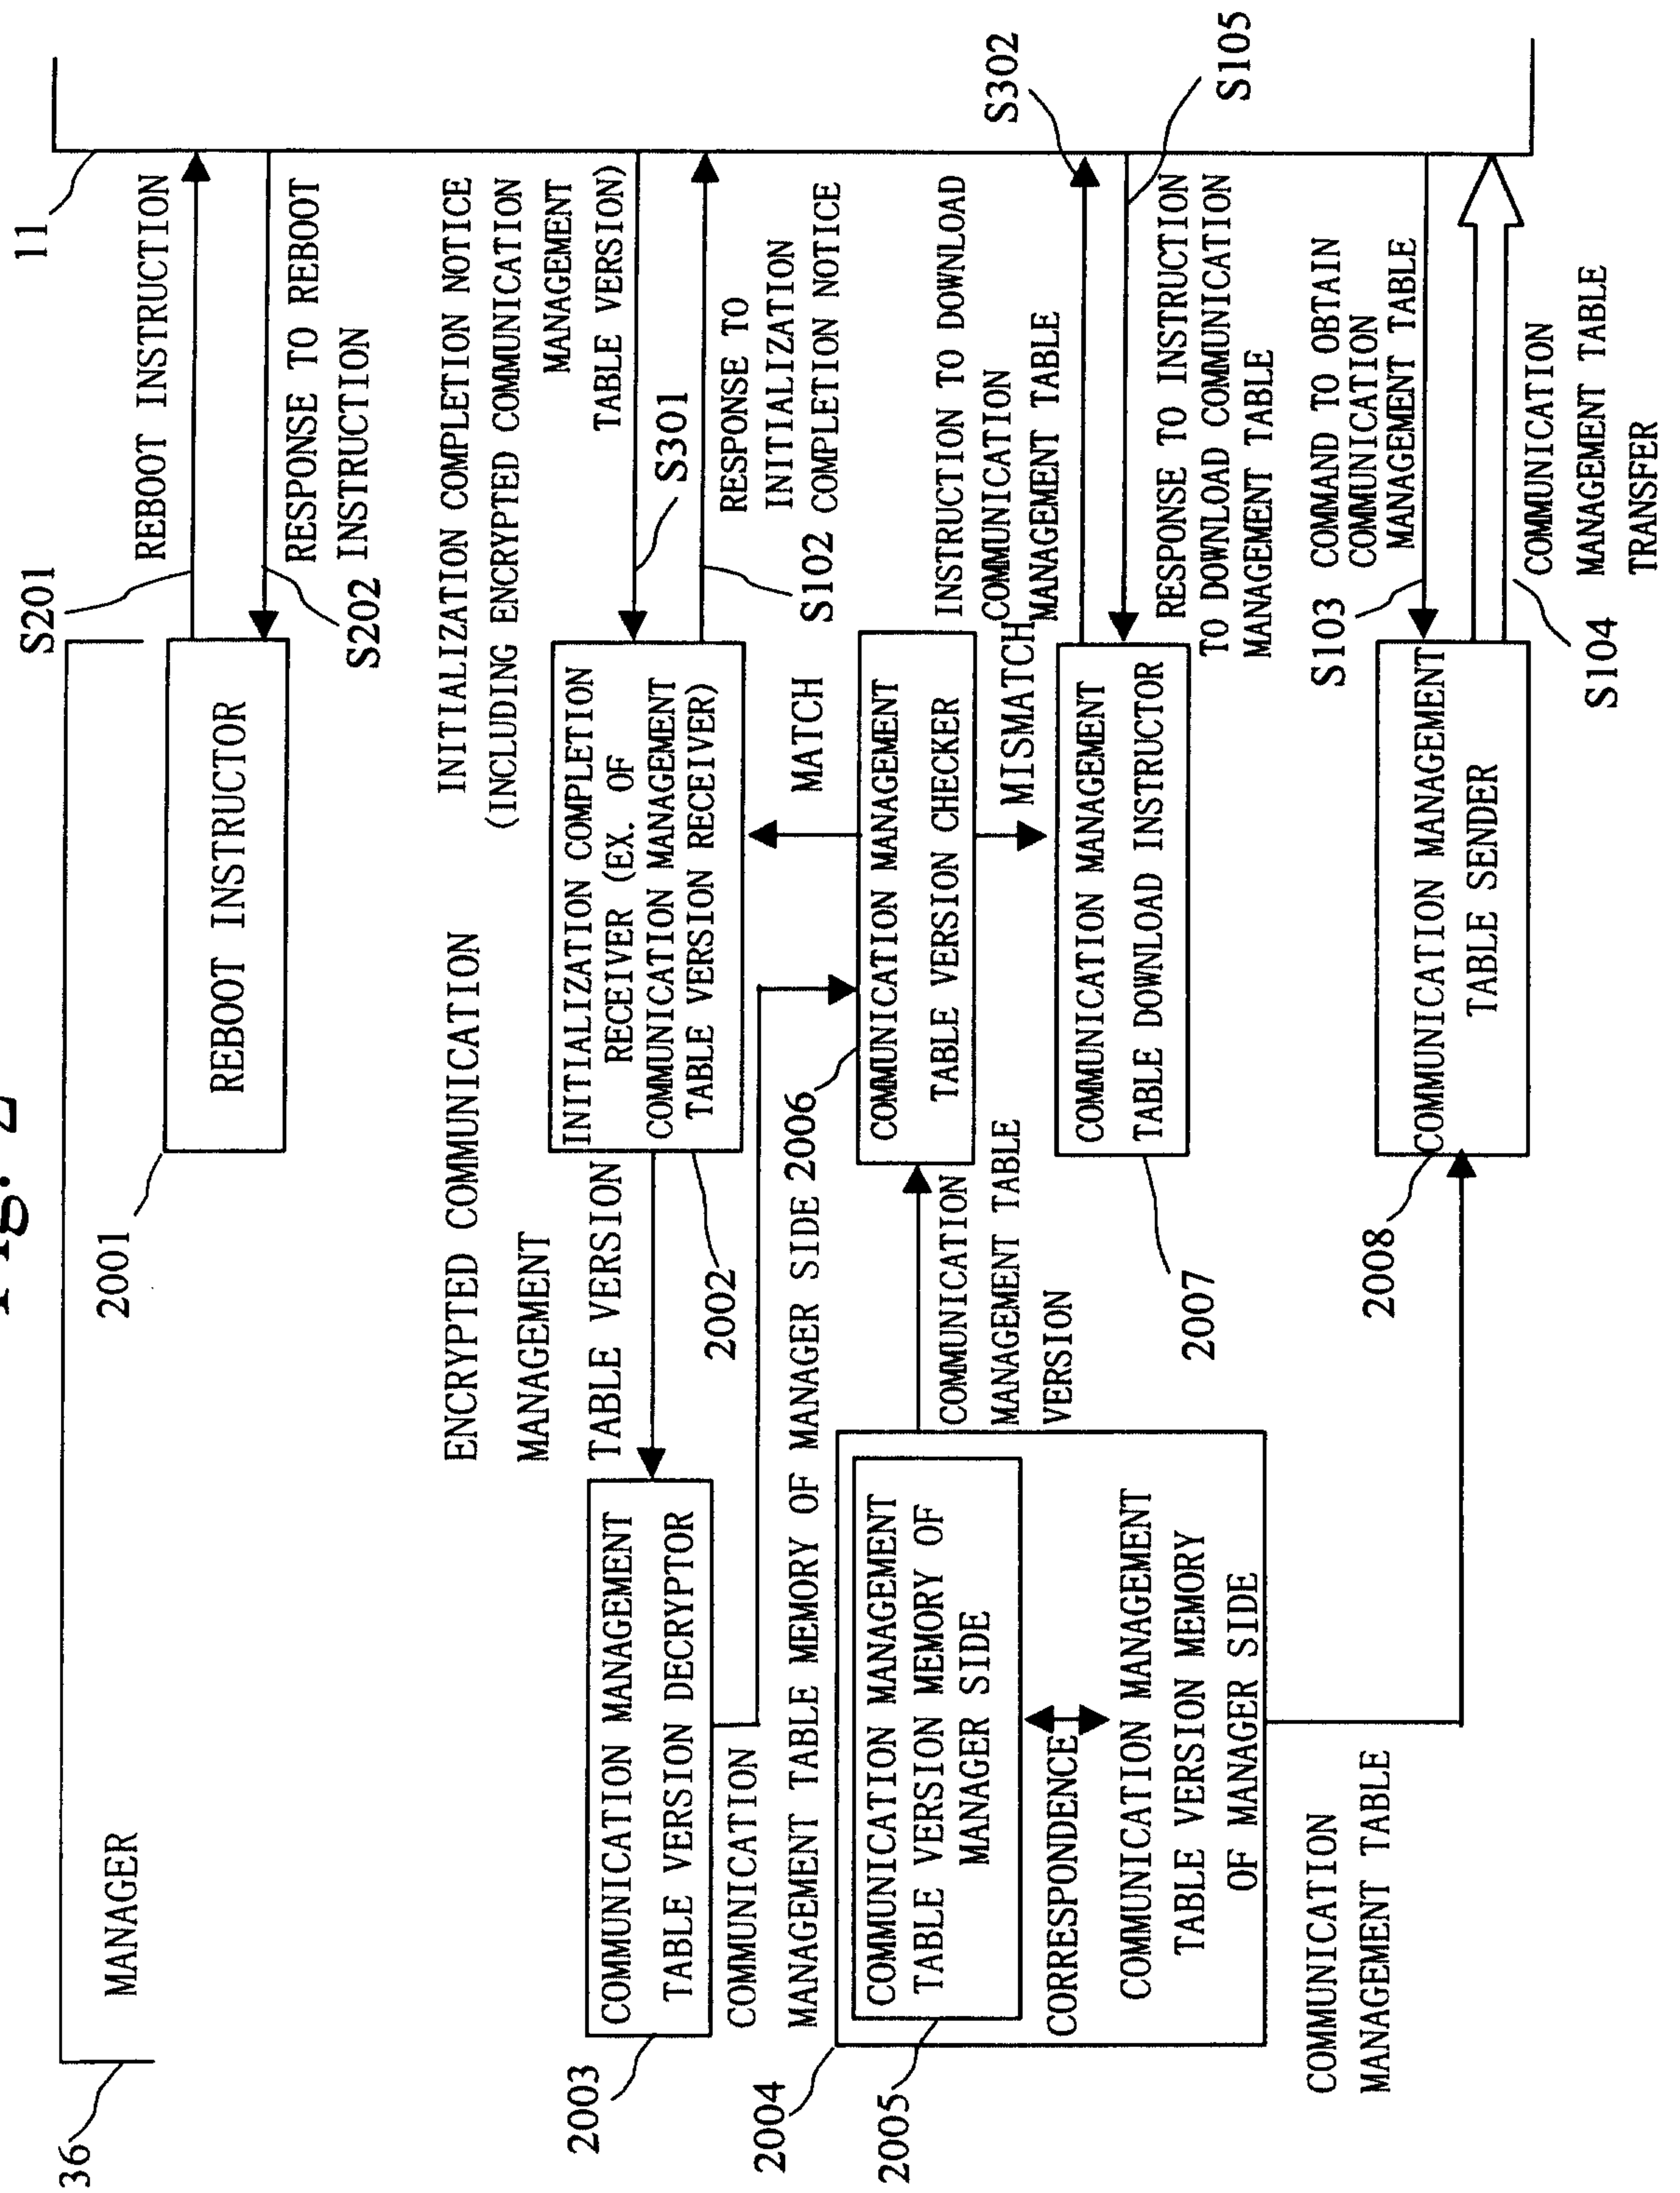


Fig. 3



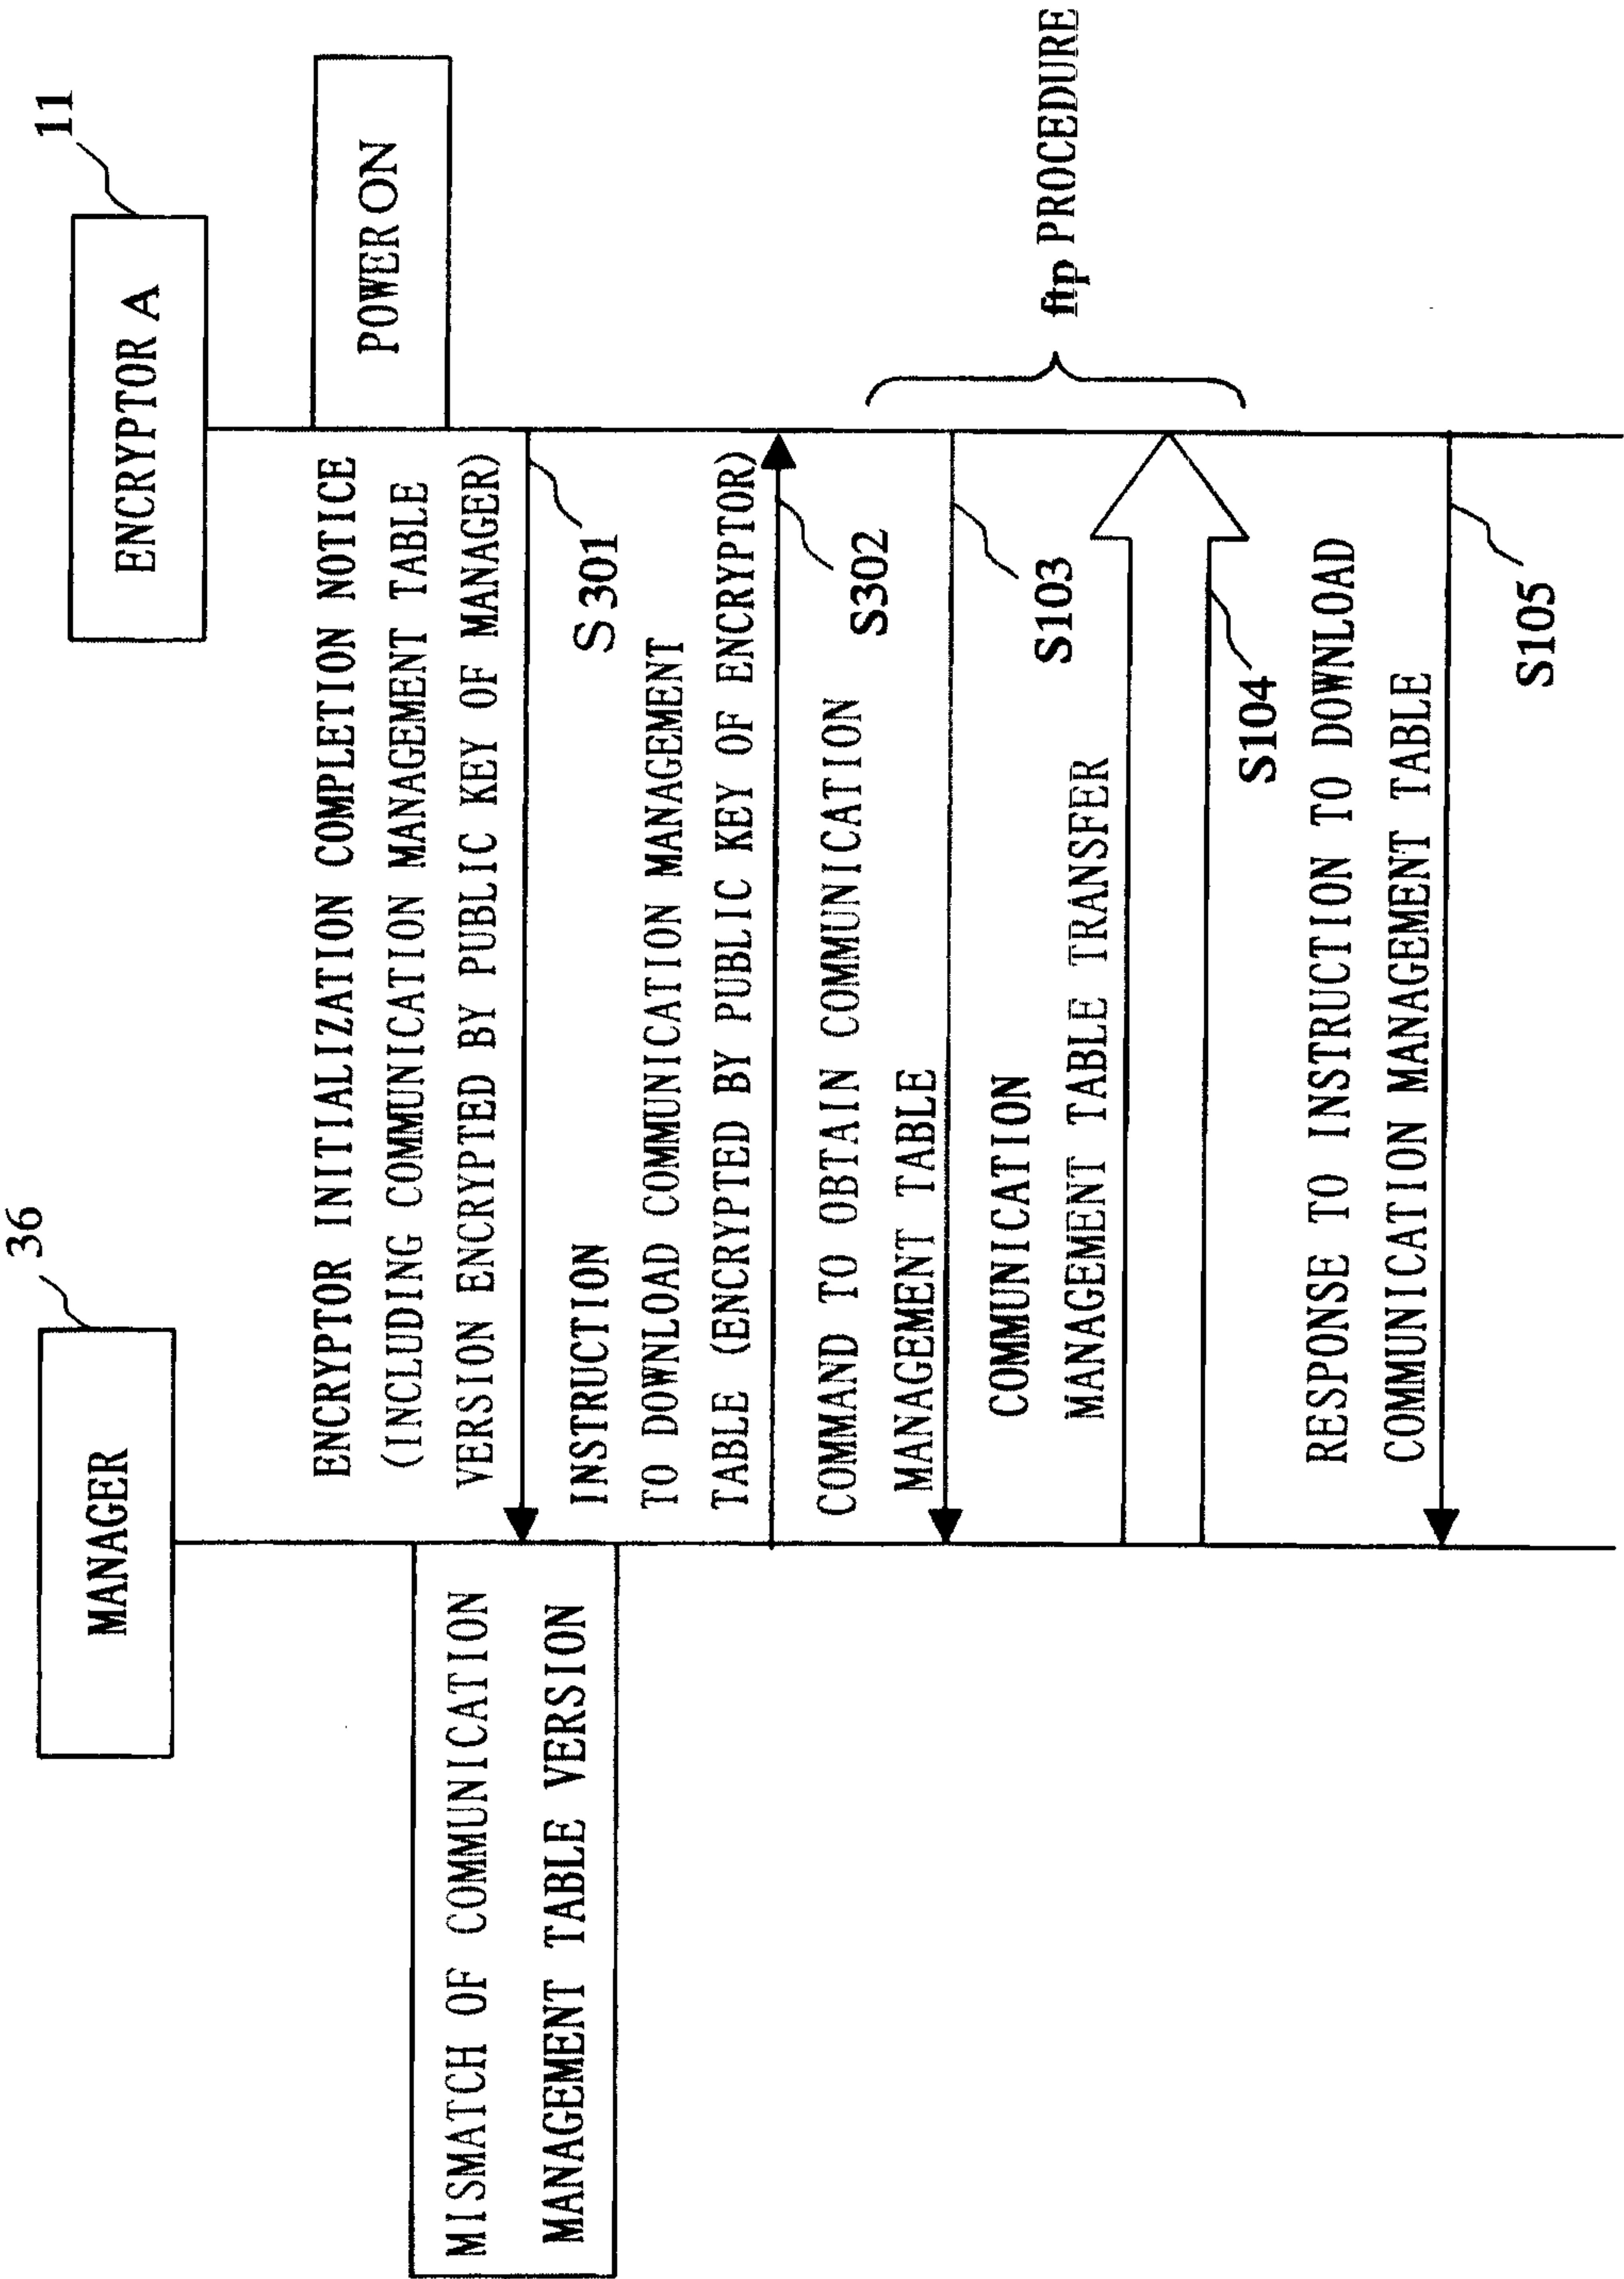


Fig. 4

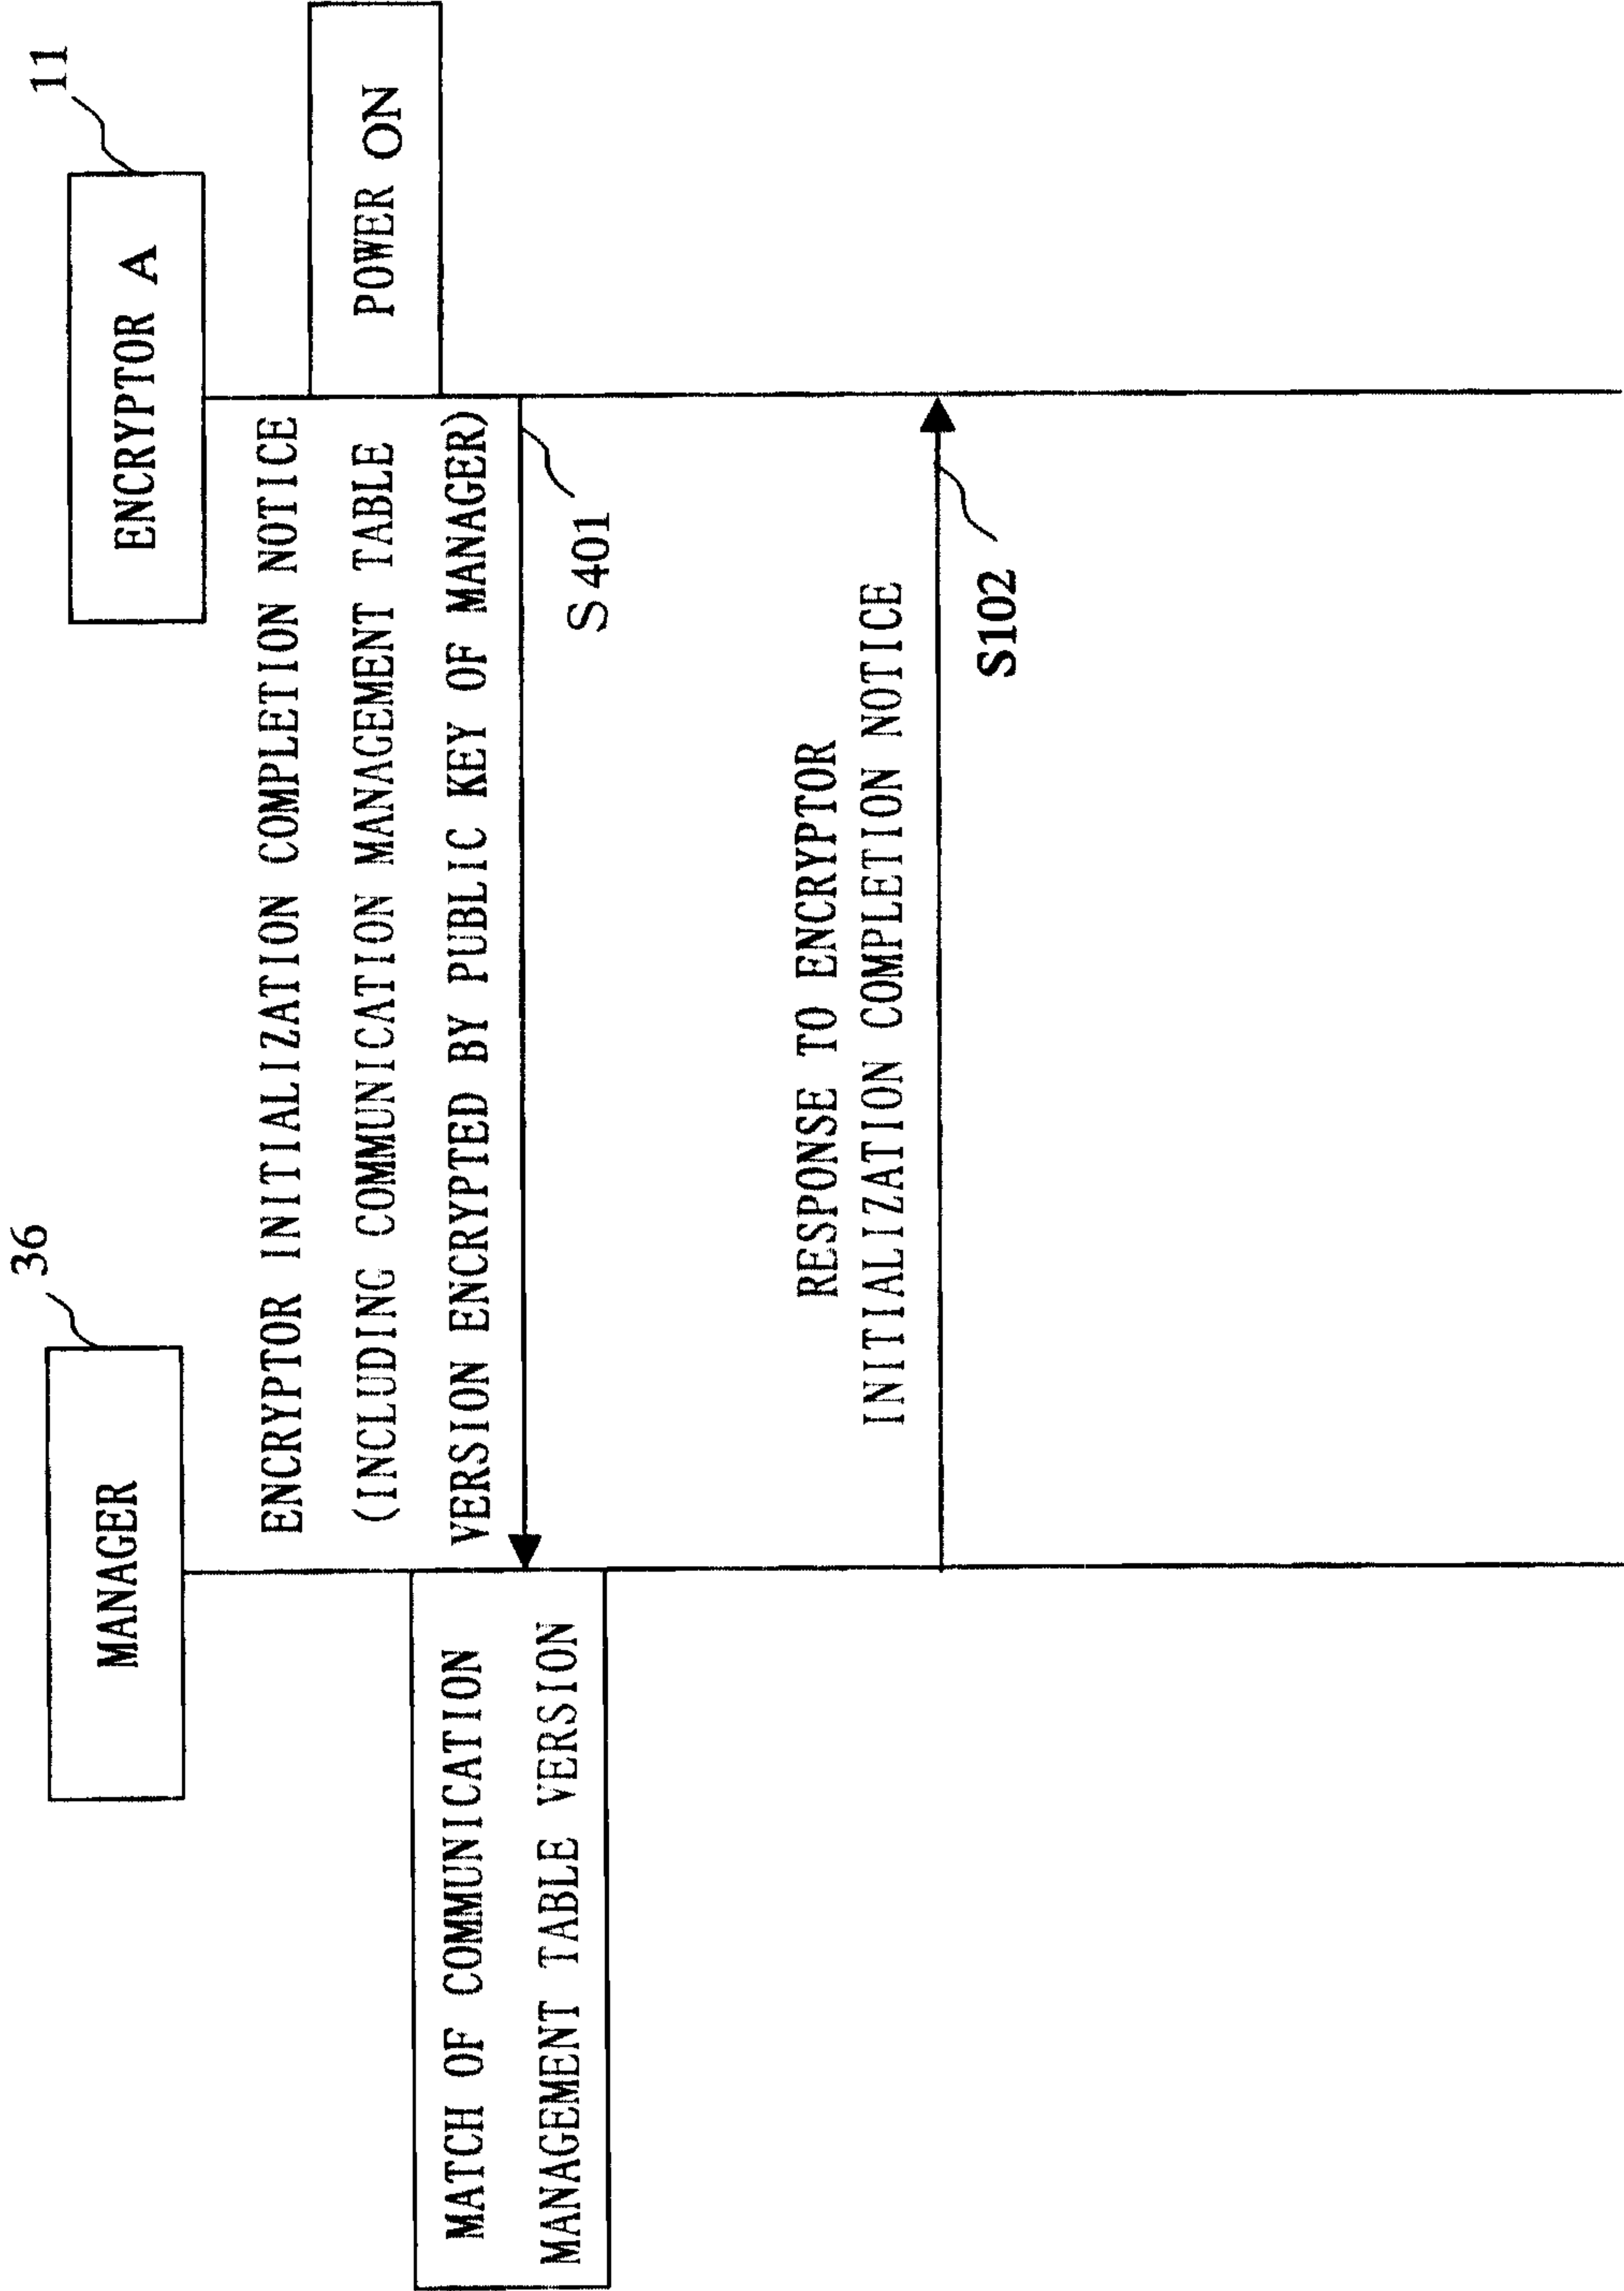


5/15

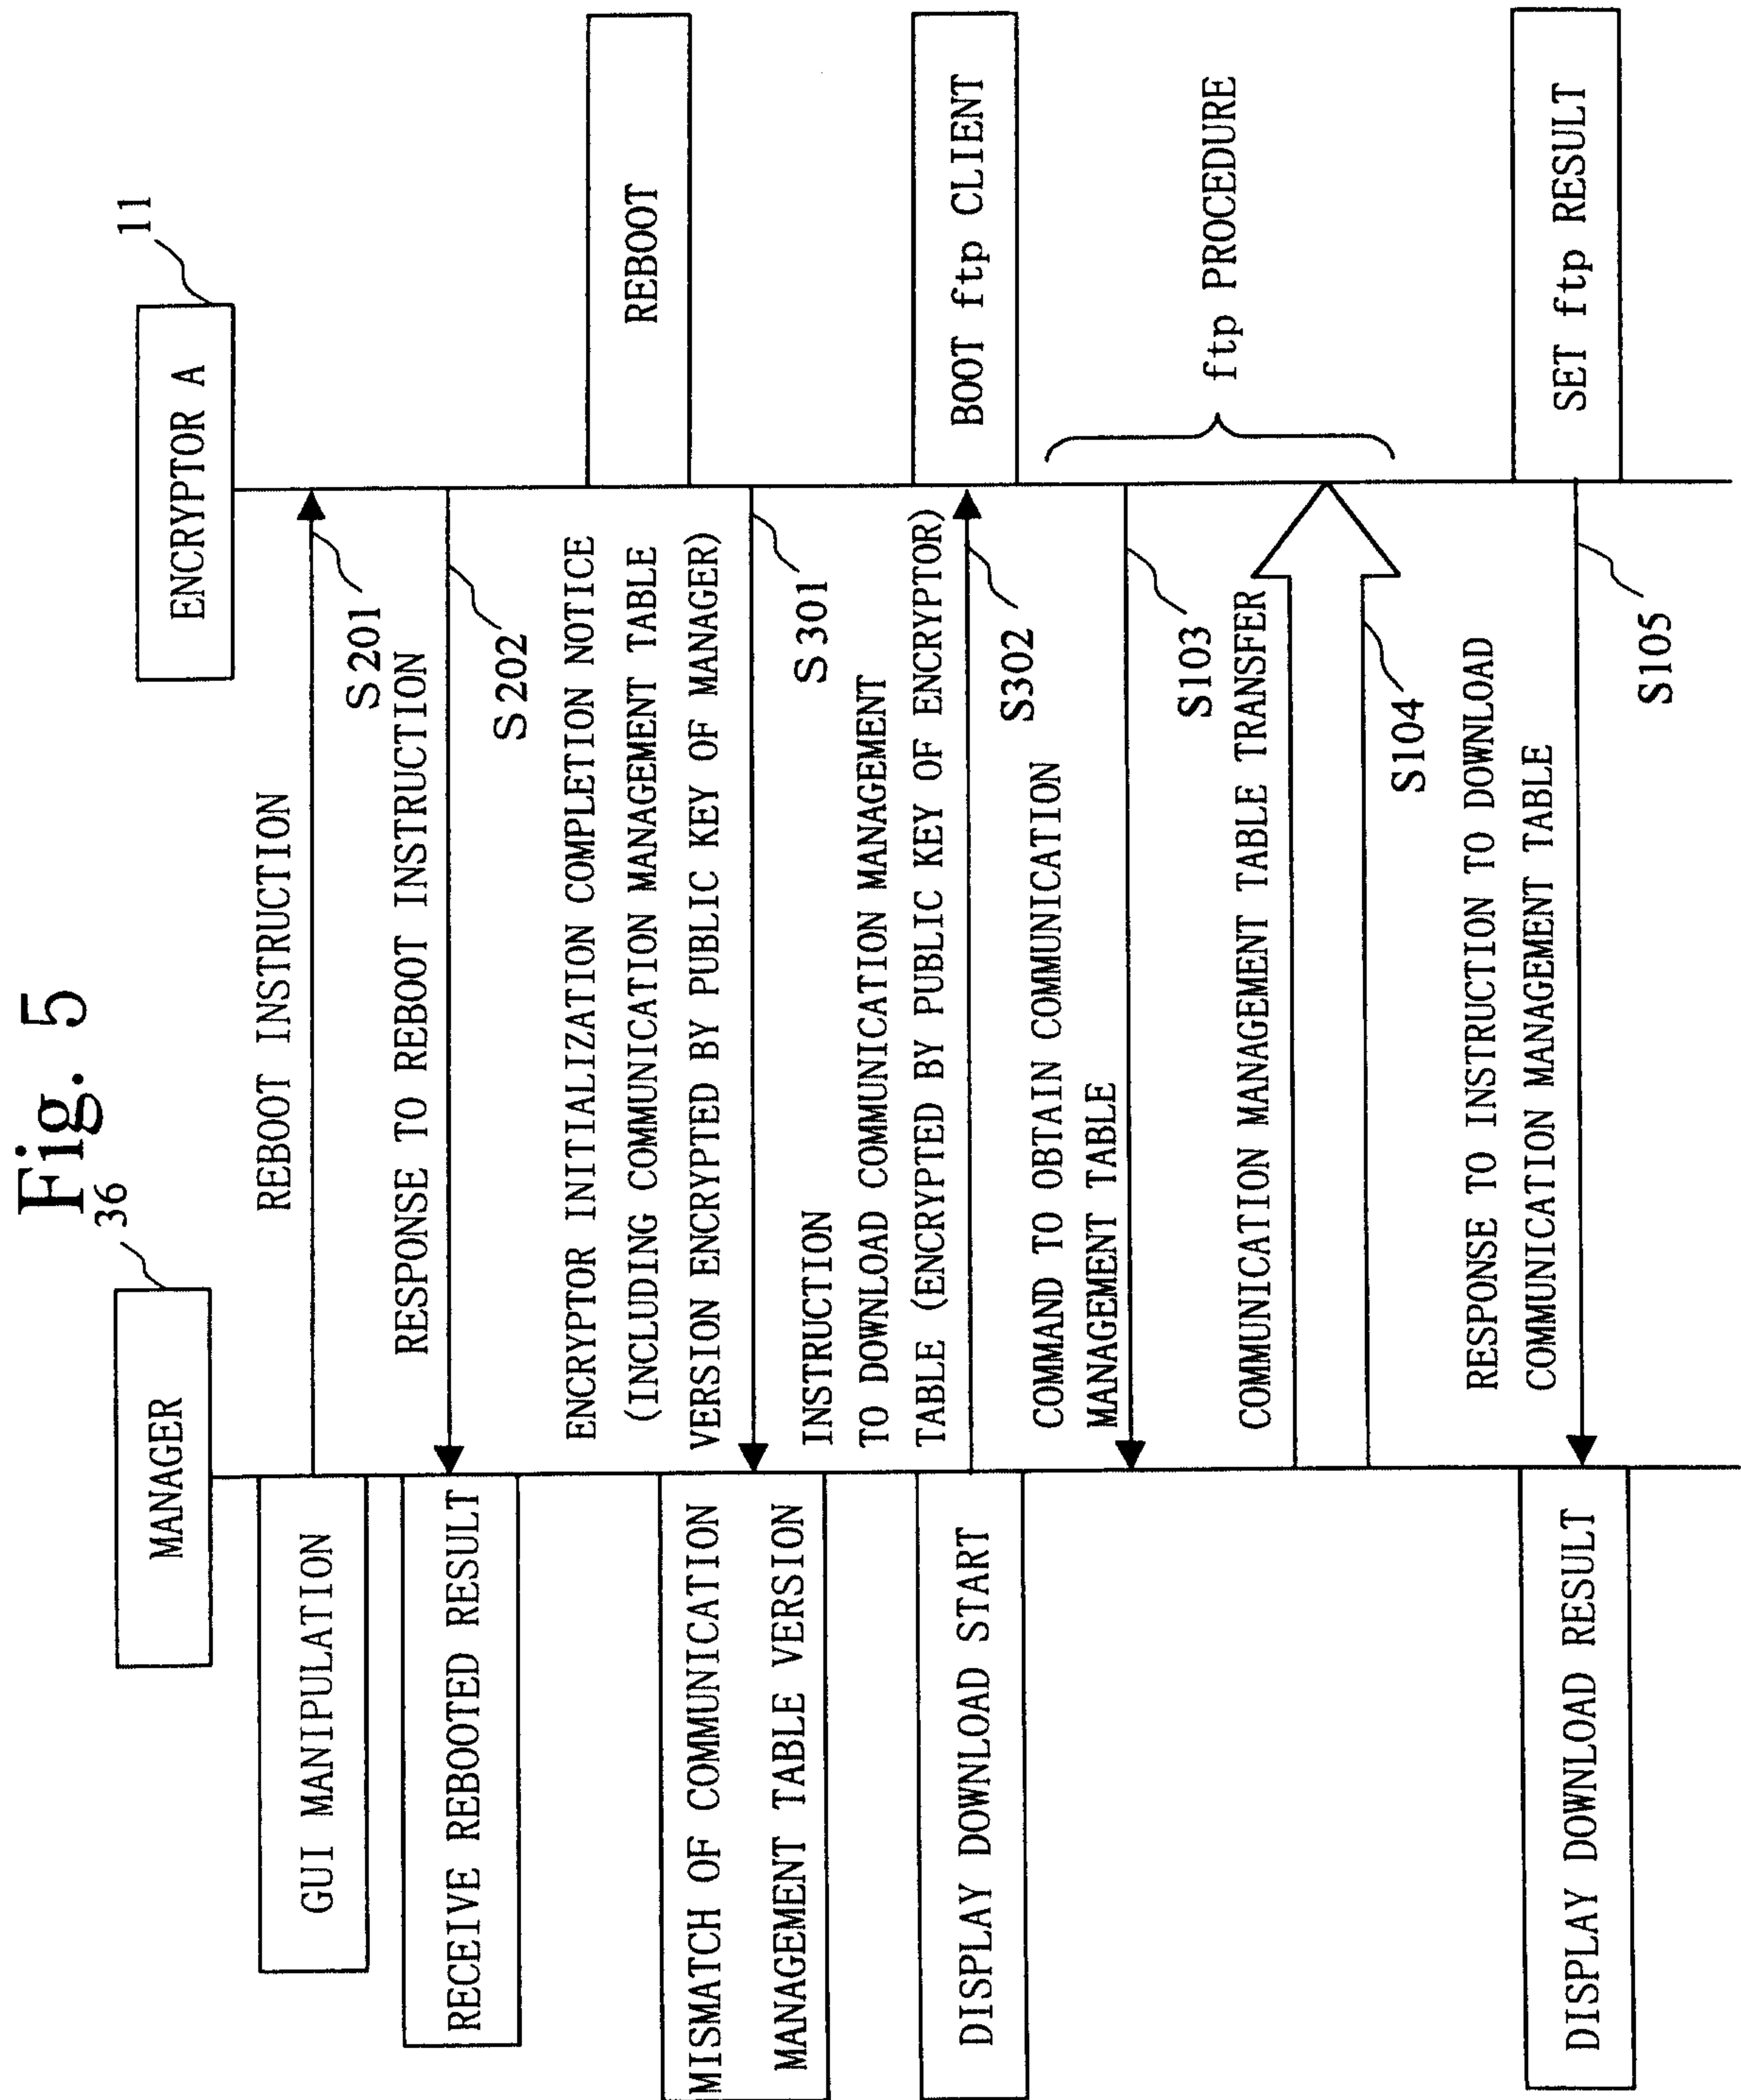

6/15

Fig. 6

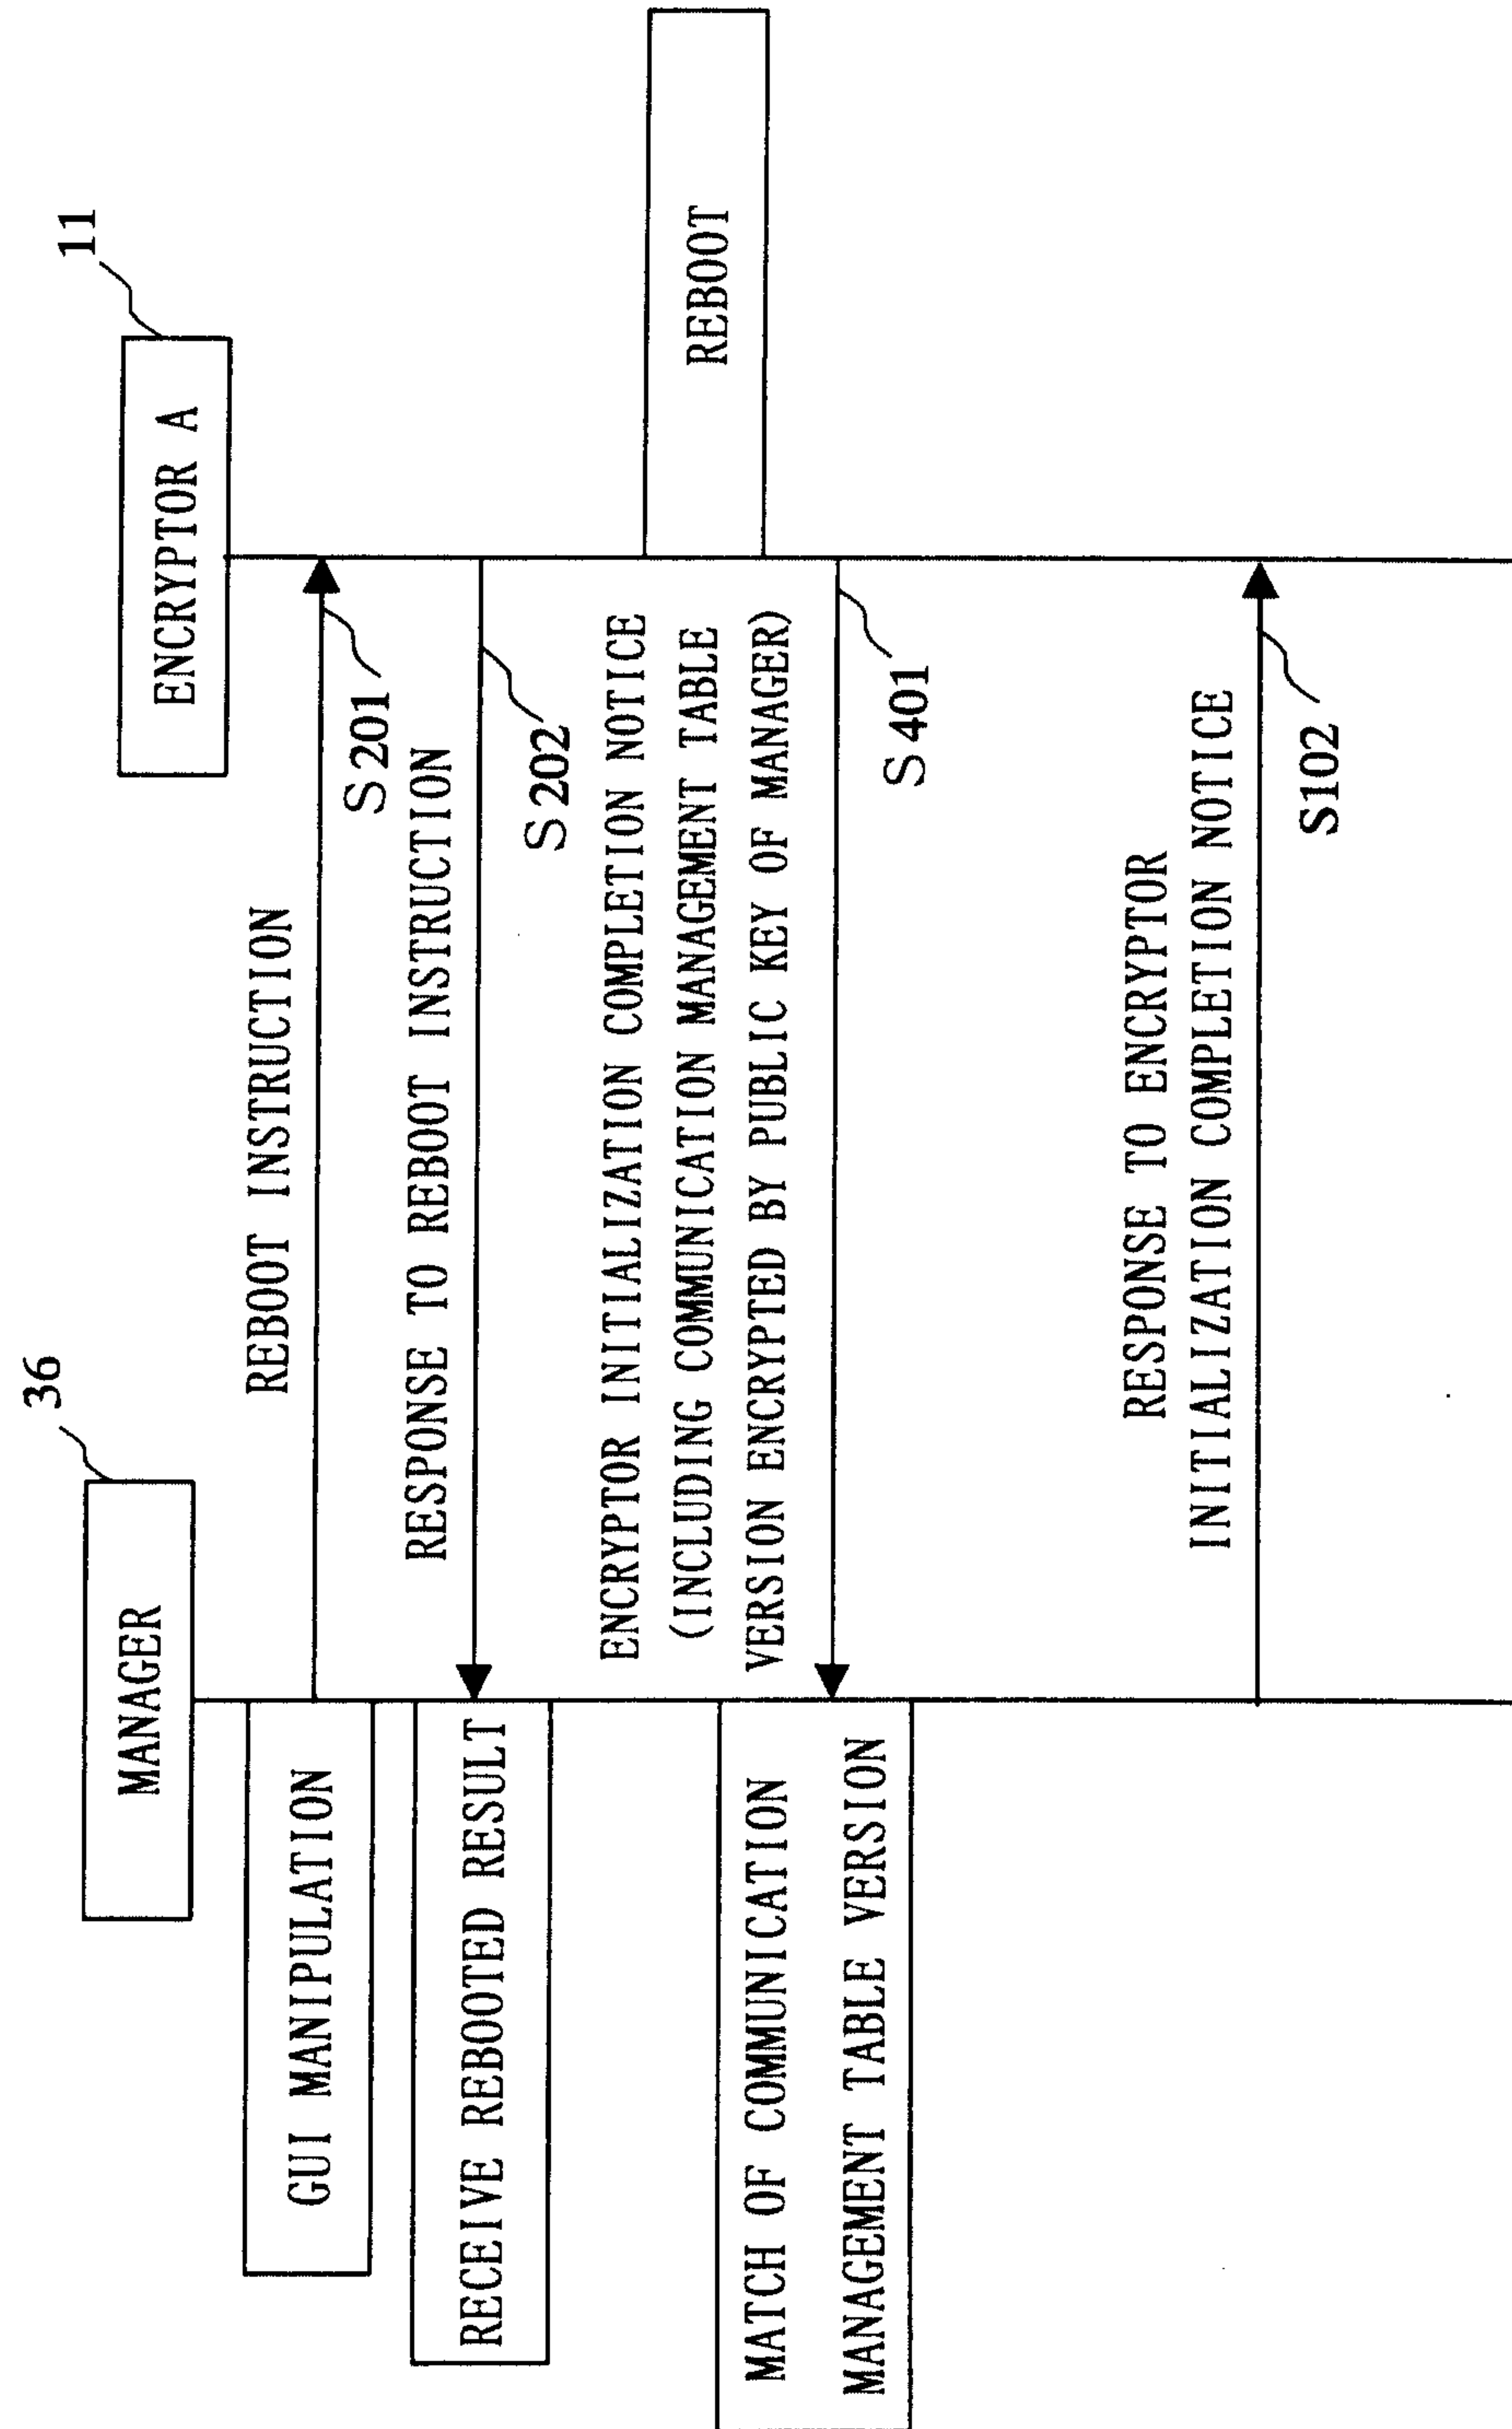

7/15
Fig. 7

90	COMMUNICATION MANAGEMENT TABLE VERSION		
			51
50	INTERNET COMMUNICATION INFORMATION A	INTERNET ADDRESS A	52
		IDENTIFIER FOR ENCRYPTOR A	53
		CERTIFICATE A (INCLUDING PUBLIC KEY A FOR SA)	54
		EFFECTIVE DATE	61
60	INTERNET COMMUNICATION INFORMATION B	INTERNET ADDRESS B	62
		IDENTIFIER FOR ENCRYPTOR B	63
		CERTIFICATE B (INCLUDING PUBLIC KEY B FOR SA)	64
		EFFECTIVE DATE	
	--		71
70	SUBNET CONFIGURATION INFORMATION A	IDENTIFIER FOR ENCRYPTOR A	72
		NETWORK ADDRESS	73
		NET MASK	
			81
80	SUBNET CONFIGURATION INFORMATION B	IDENTIFIER FOR ENCRYPTOR B	82
		NETWORK ADDRESS	
		NET MASK	83
	--		

8/15
Fig. 8


90	COMMUNICATION MANAGEMENT TABLE VERSION	INFORMATION VERSION FOR ENCRYPTOR A	91
		INFORMATION VERSION FOR ENCRYPTOR B	92
		⋮	
50	INTERNET COMMUNICATION INFORMATION A	INTERNET ADDRESS A	51
		IDENTIFIER FOR ENCRYPTOR A	52
		CERTIFICATE A (INCLUDING PUBLIC KEY A FOR SA)	53
		EFFECTIVE DATE	54
60	INTERNET COMMUNICATION INFORMATION B	INTERNET ADDRESS B	61
		IDENTIFIER FOR ENCRYPTOR B	62
		CERTIFICATE B (INCLUDING PUBLIC KEY B FOR SA)	63
		EFFECTIVE DATE	64
70	SUBNET CONFIGURATION INFORMATION A	IDENTIFIER FOR ENCRYPTOR A	71
		NETWORK ADDRESS	72
		NET MASK	73
		⋮	
80	SUBNET CONFIGURATION INFORMATION B	IDENTIFIER FOR ENCRYPTOR B	81
		NETWORK ADDRESS	82
		NET MASK	83
		⋮	
	⋮	⋮	

9/15
Fig. 9

90	COMMUNICATION MANAGEMENT TABLE VERSION	INTERNET COMMUNICATION INFORMATION VERSION FOR ENCRYPTOR A	93
		SUBNET CONFIGURATION INFORMATION VERSION FOR ENCRYPTOR A	94
		INTERNET COMMUNICATION INFORMATION VERSION FOR ENCRYPTOR B	95
		SUBNET CONFIGURATION INFORMATION VERSION FOR ENCRYPTOR B	96
		⋮	
50	INTERNET COMMUNICATION INFORMATION A	INTERNET ADDRESS A	51
		IDENTIFIER FOR ENCRYPTOR A	52
		CERTIFICATE A (INCLUDING PUBLIC KEY A FOR SA)	53
		EFFECTIVE DATE	54
60	INTERNET COMMUNICATION INFORMATION B	INTERNET ADDRESS B	61
		IDENTIFIER FOR ENCRYPTOR B	62
		CERTIFICATE B (INCLUDING PUBLIC KEY B FOR SA)	63
		EFFECTIVE DATE	64
	--	⋮	
70	SUBNET CONFIGURATION INFORMATION A	IDENTIFIER FOR ENCRYPTOR A	71
		NETWORK ADDRESS	72
		NET MASK	73
		⋮	
80	SUBNET CONFIGURATION INFORMATION B	IDENTIFIER FOR ENCRYPTOR B	81
		NETWORK ADDRESS	82
		NET MASK	83
		⋮	
	--	⋮	

10/15

Fig. 10

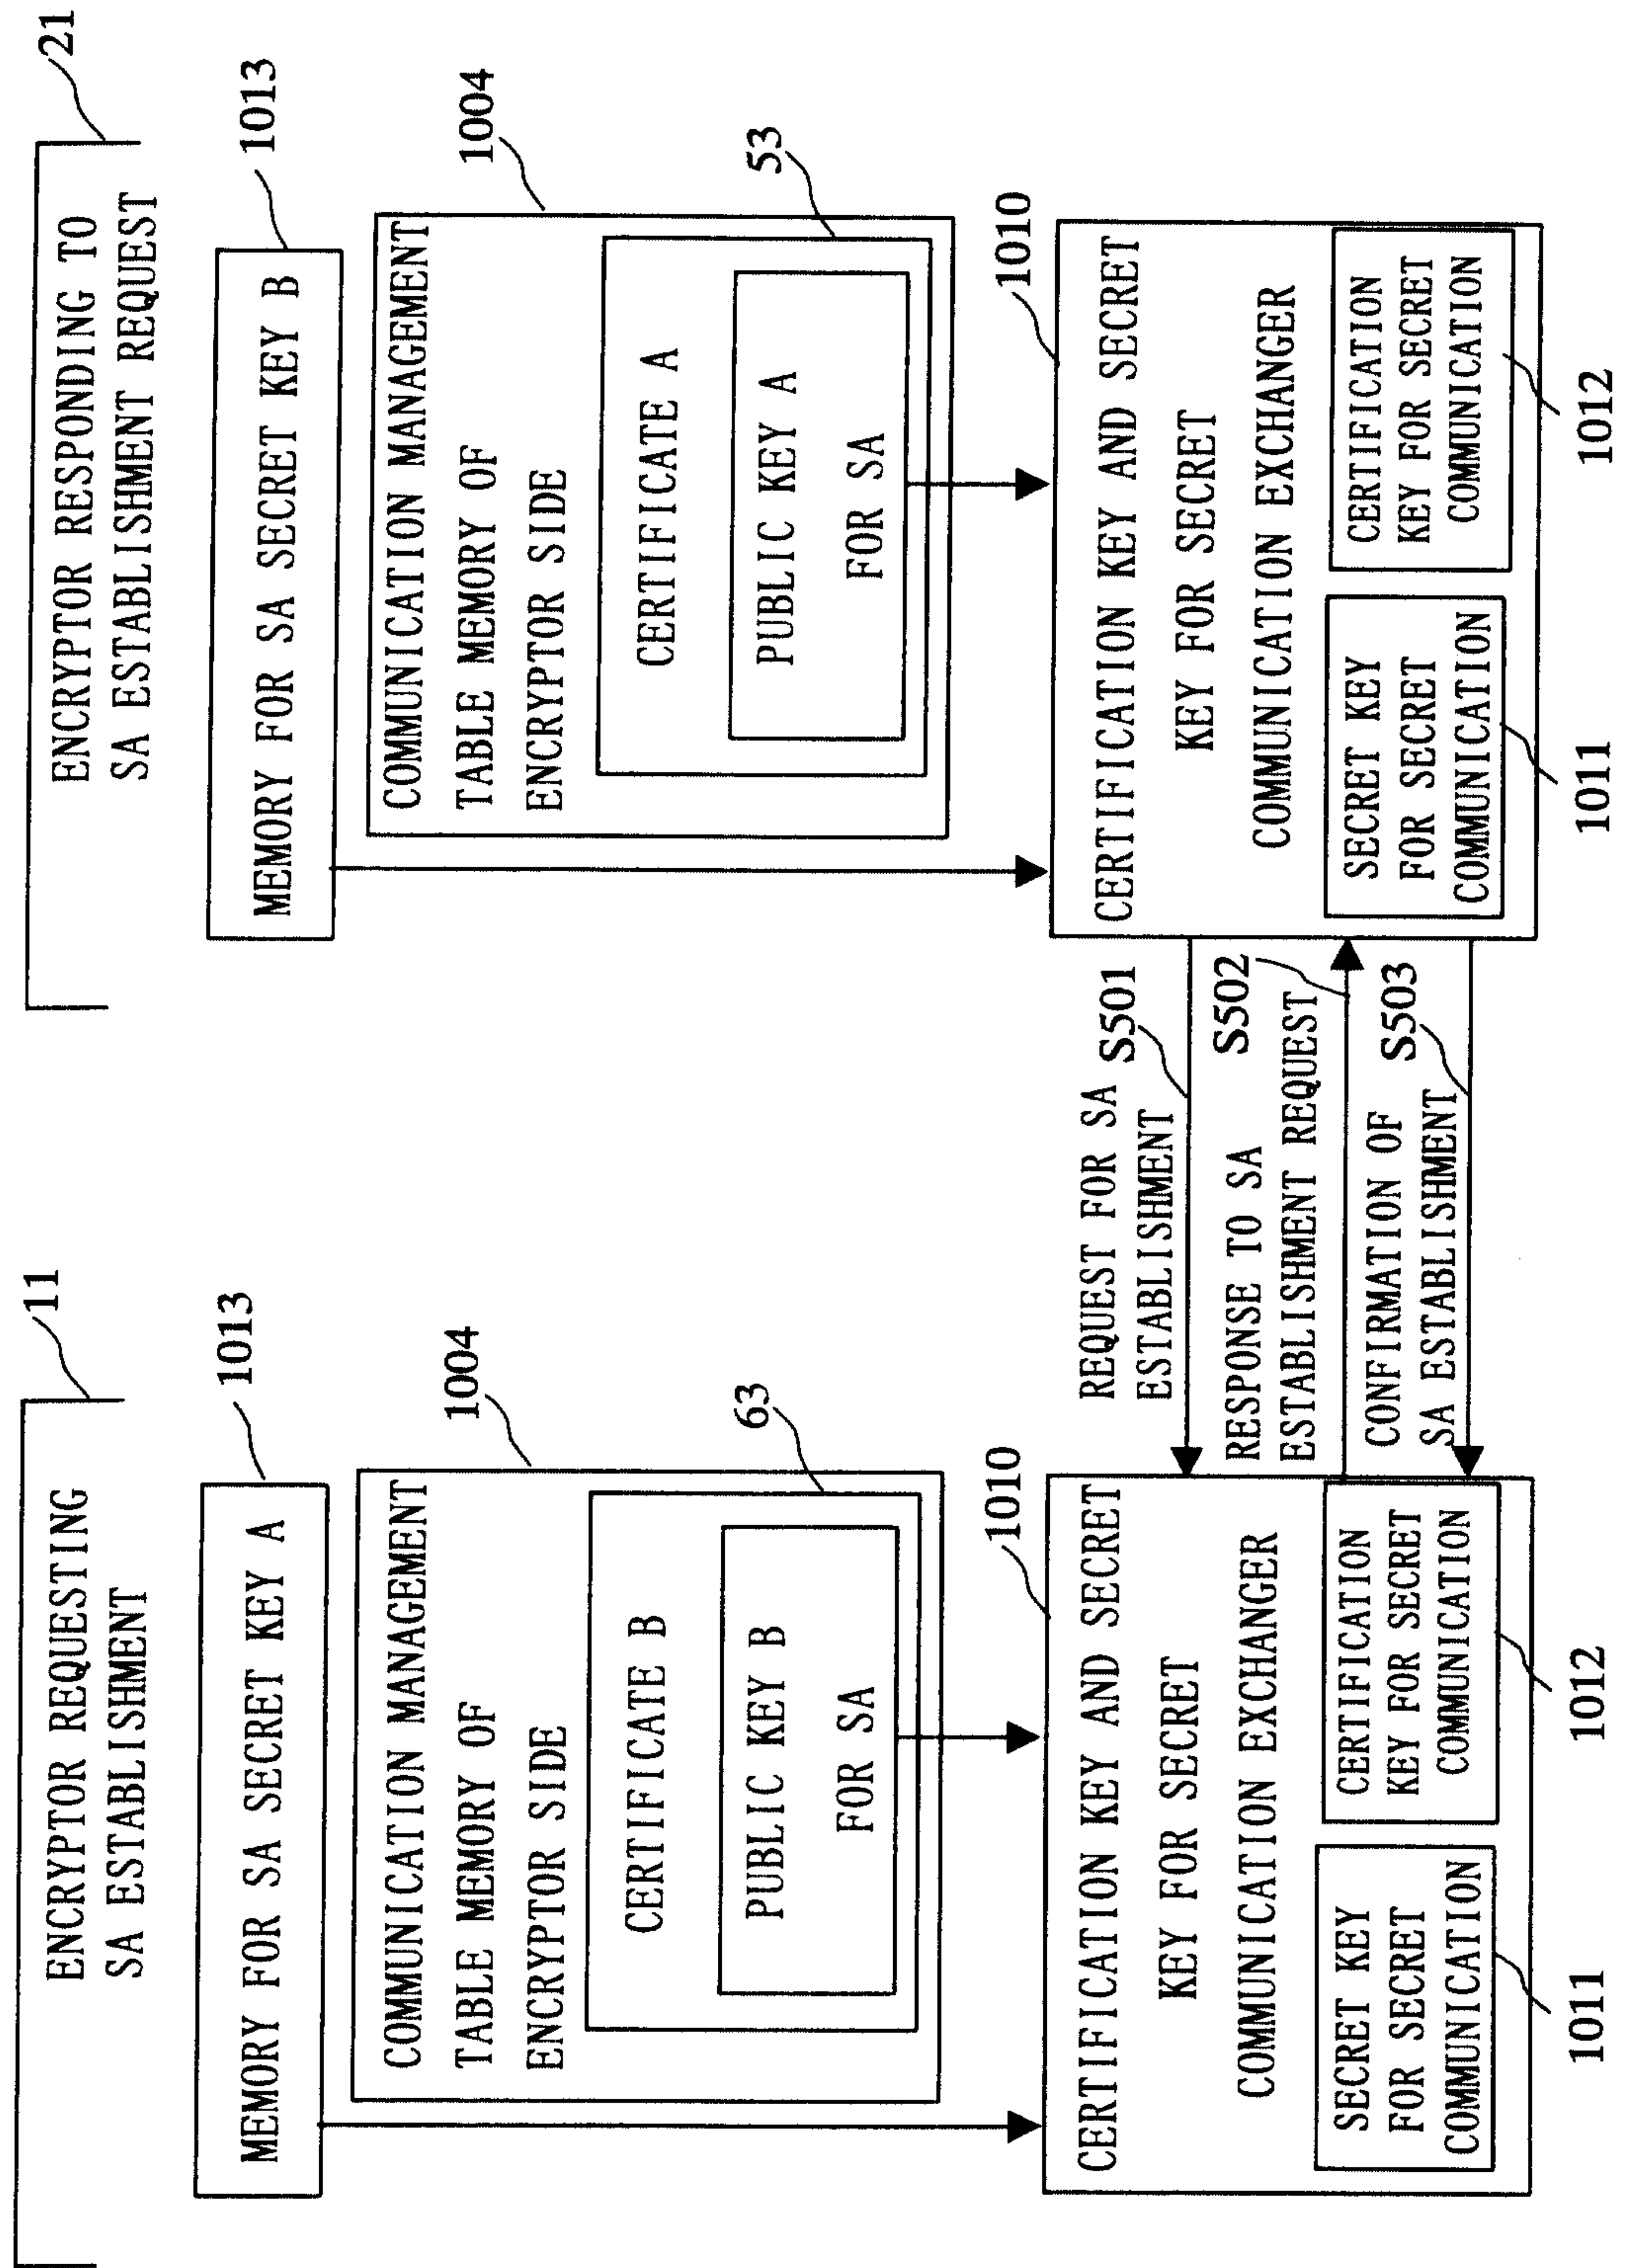

11/15

Fig. 11


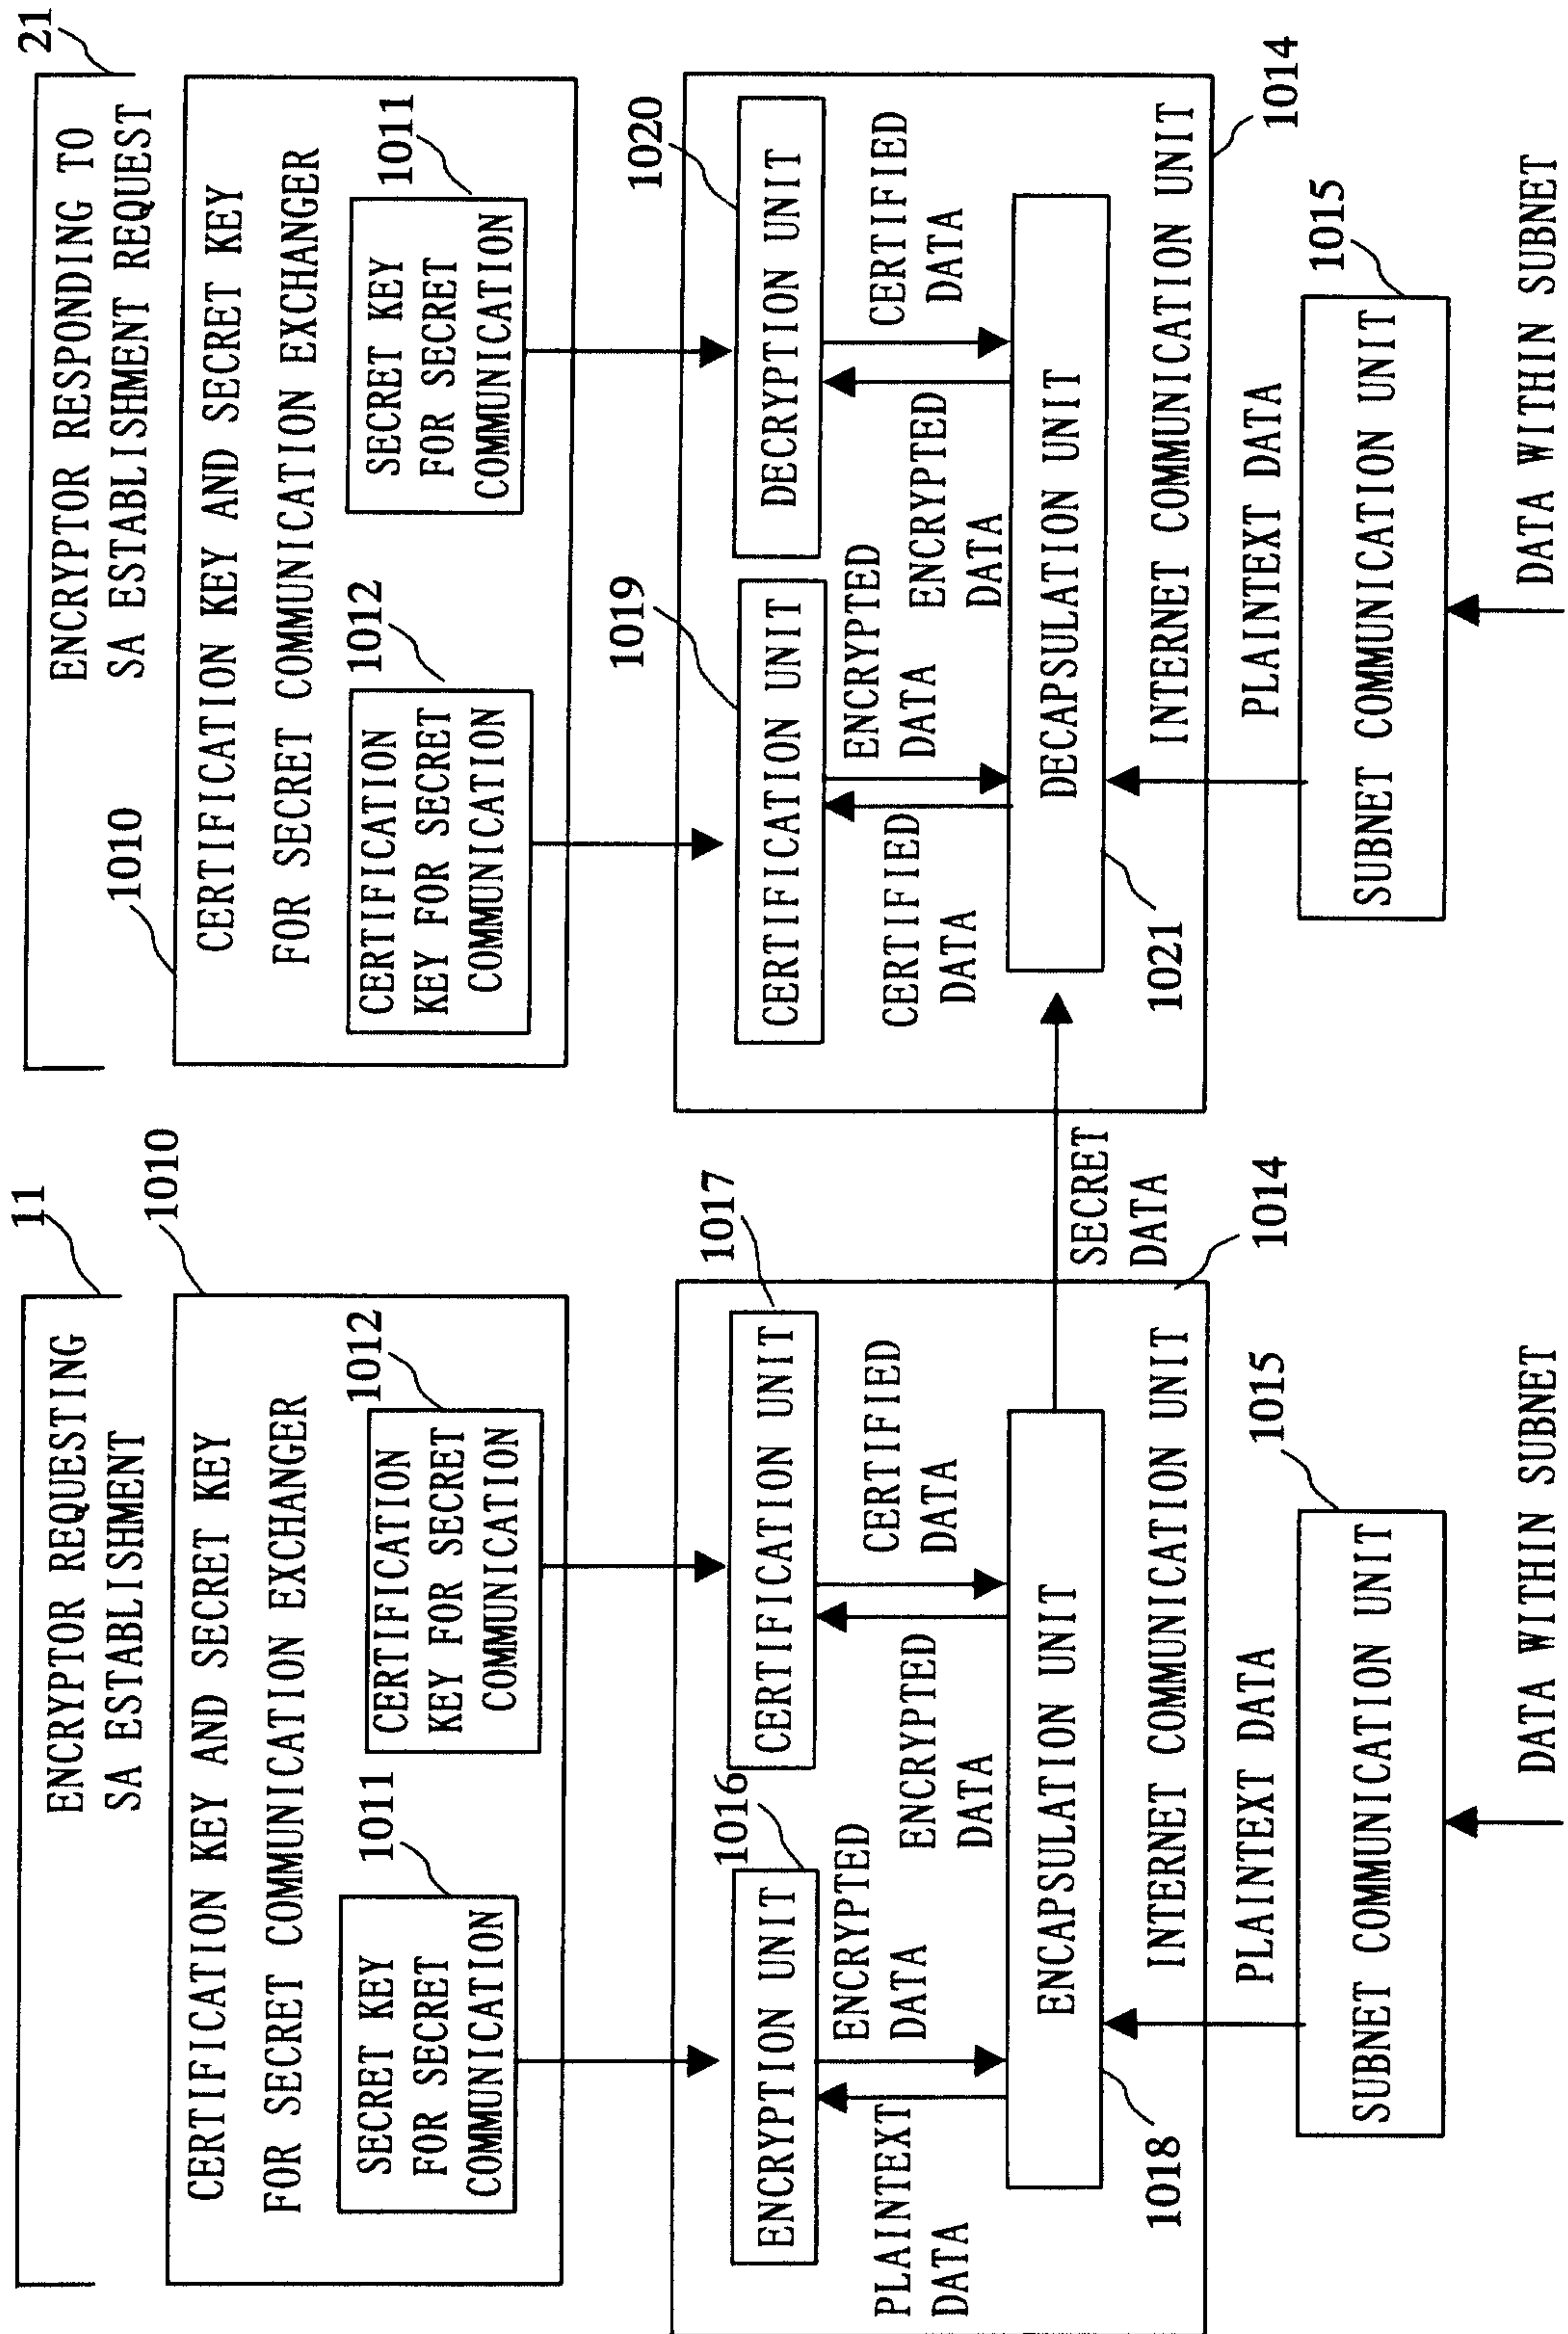


Fig. 12

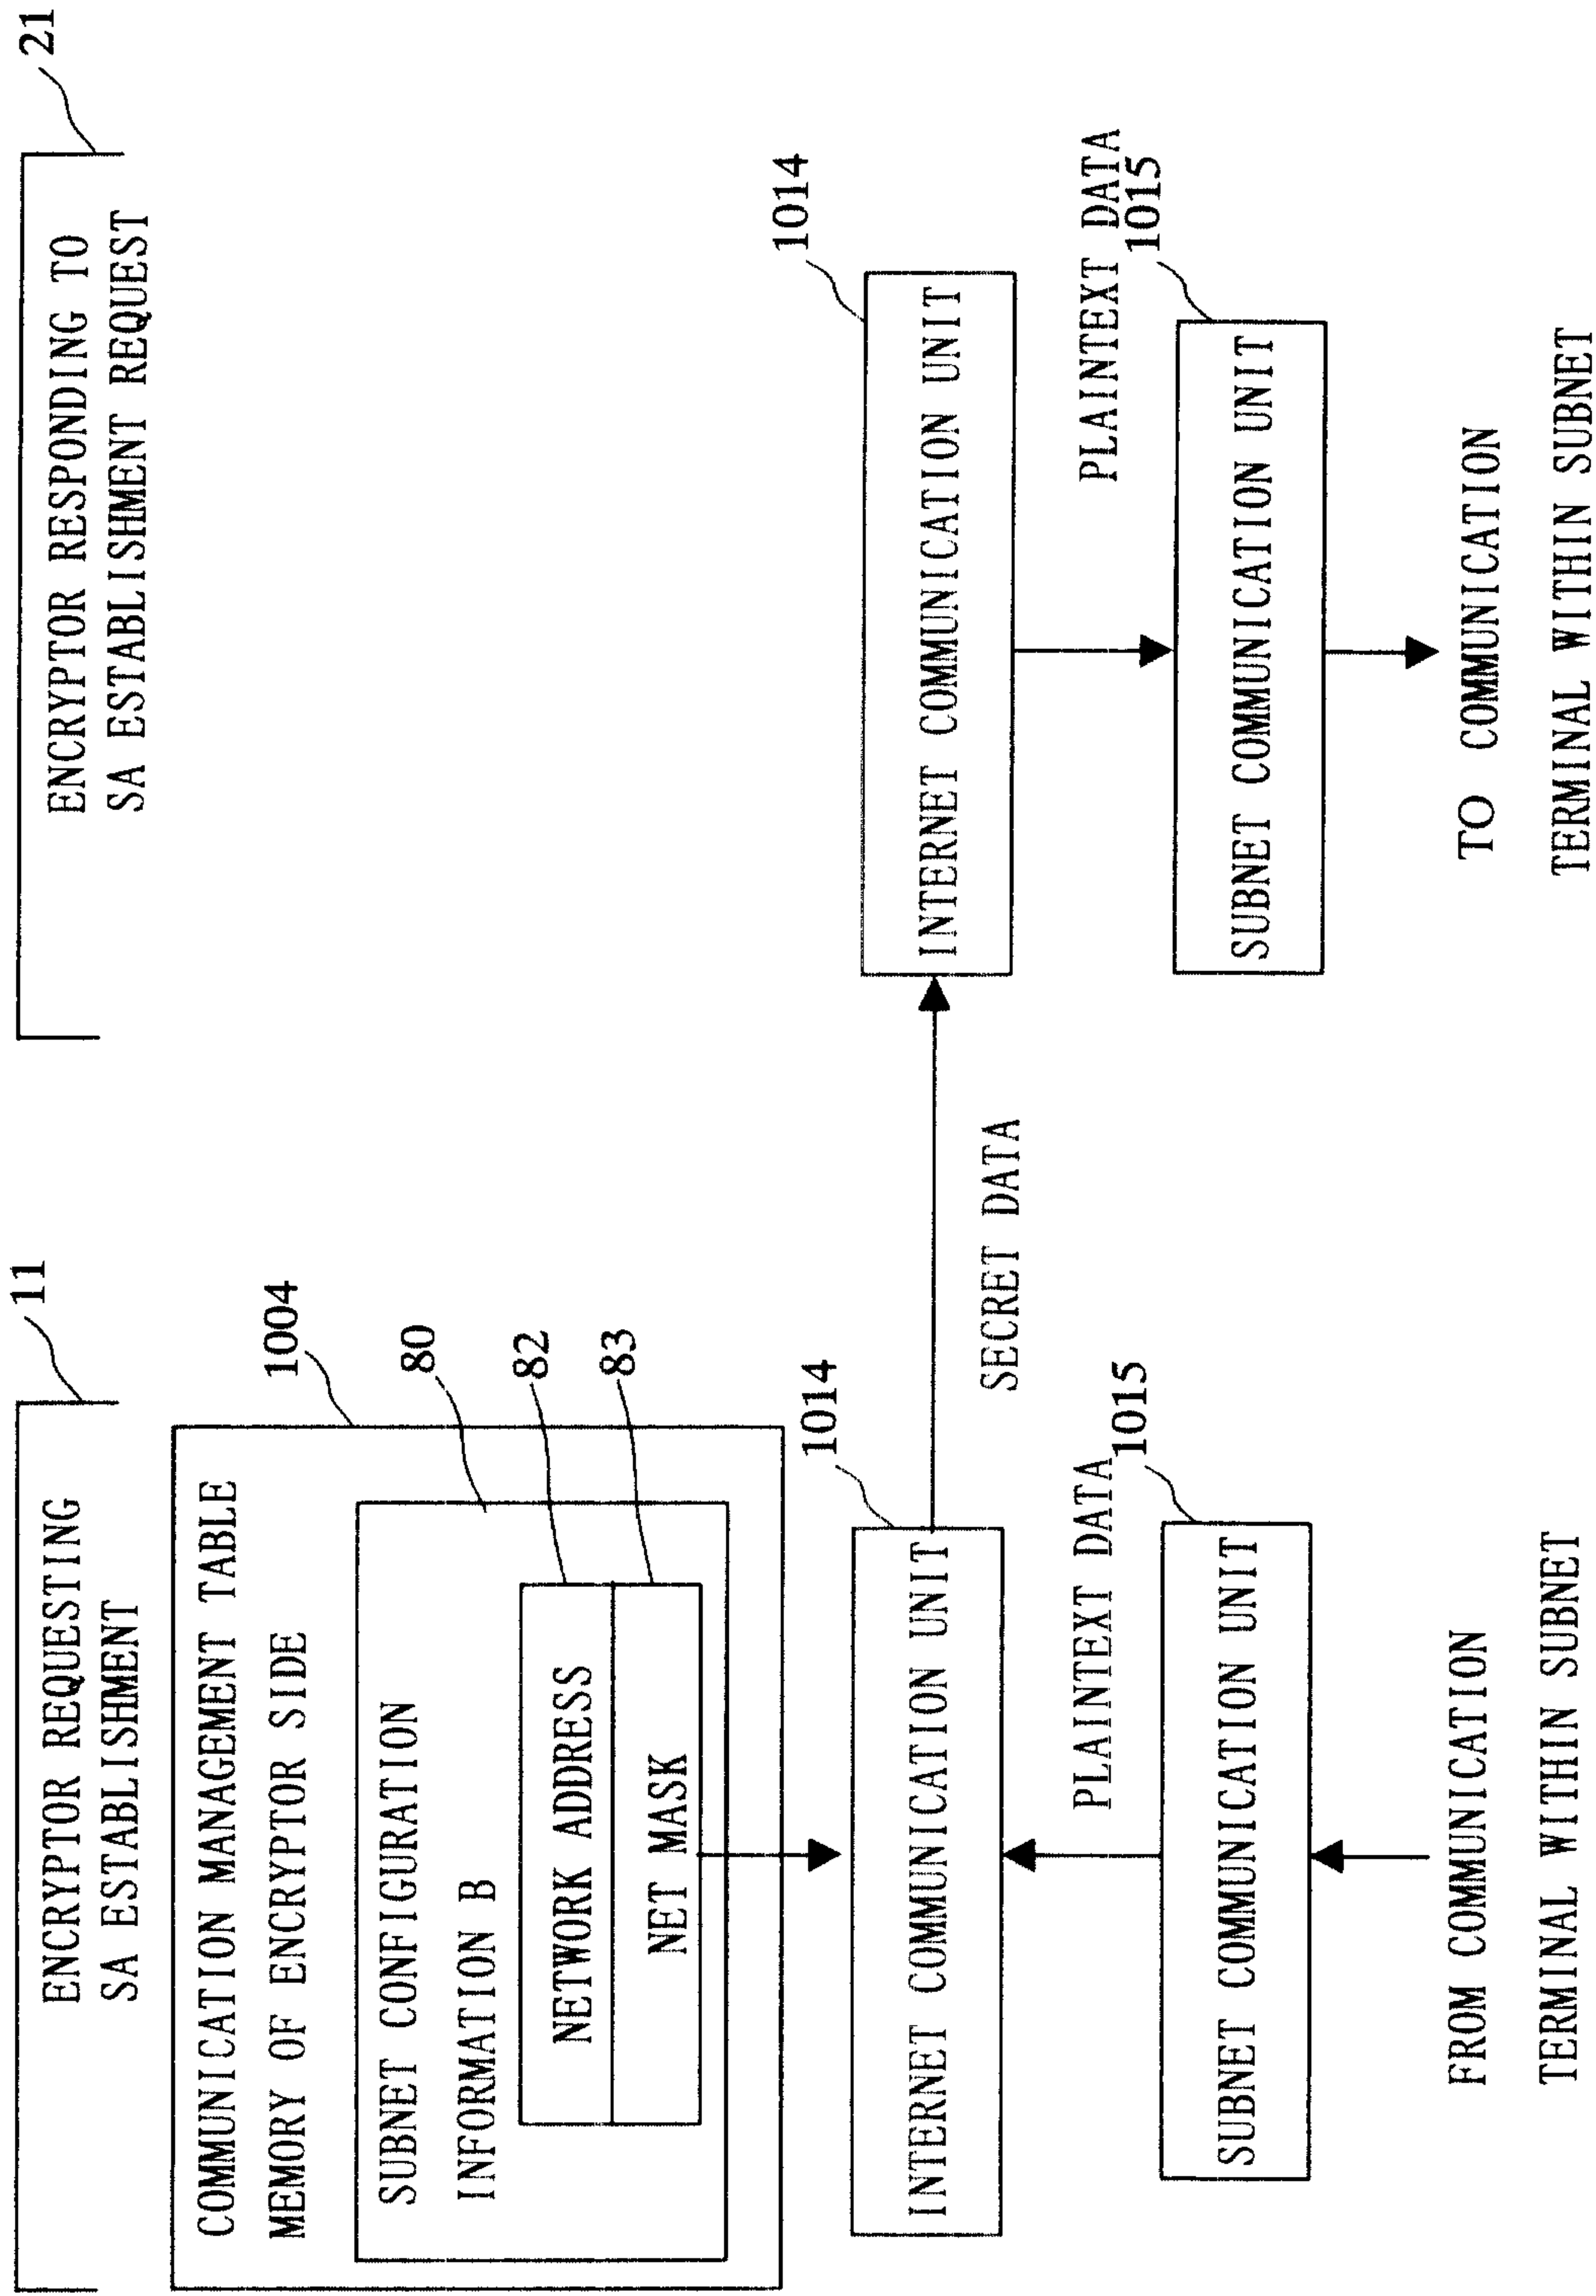

13/15

Fig. 13

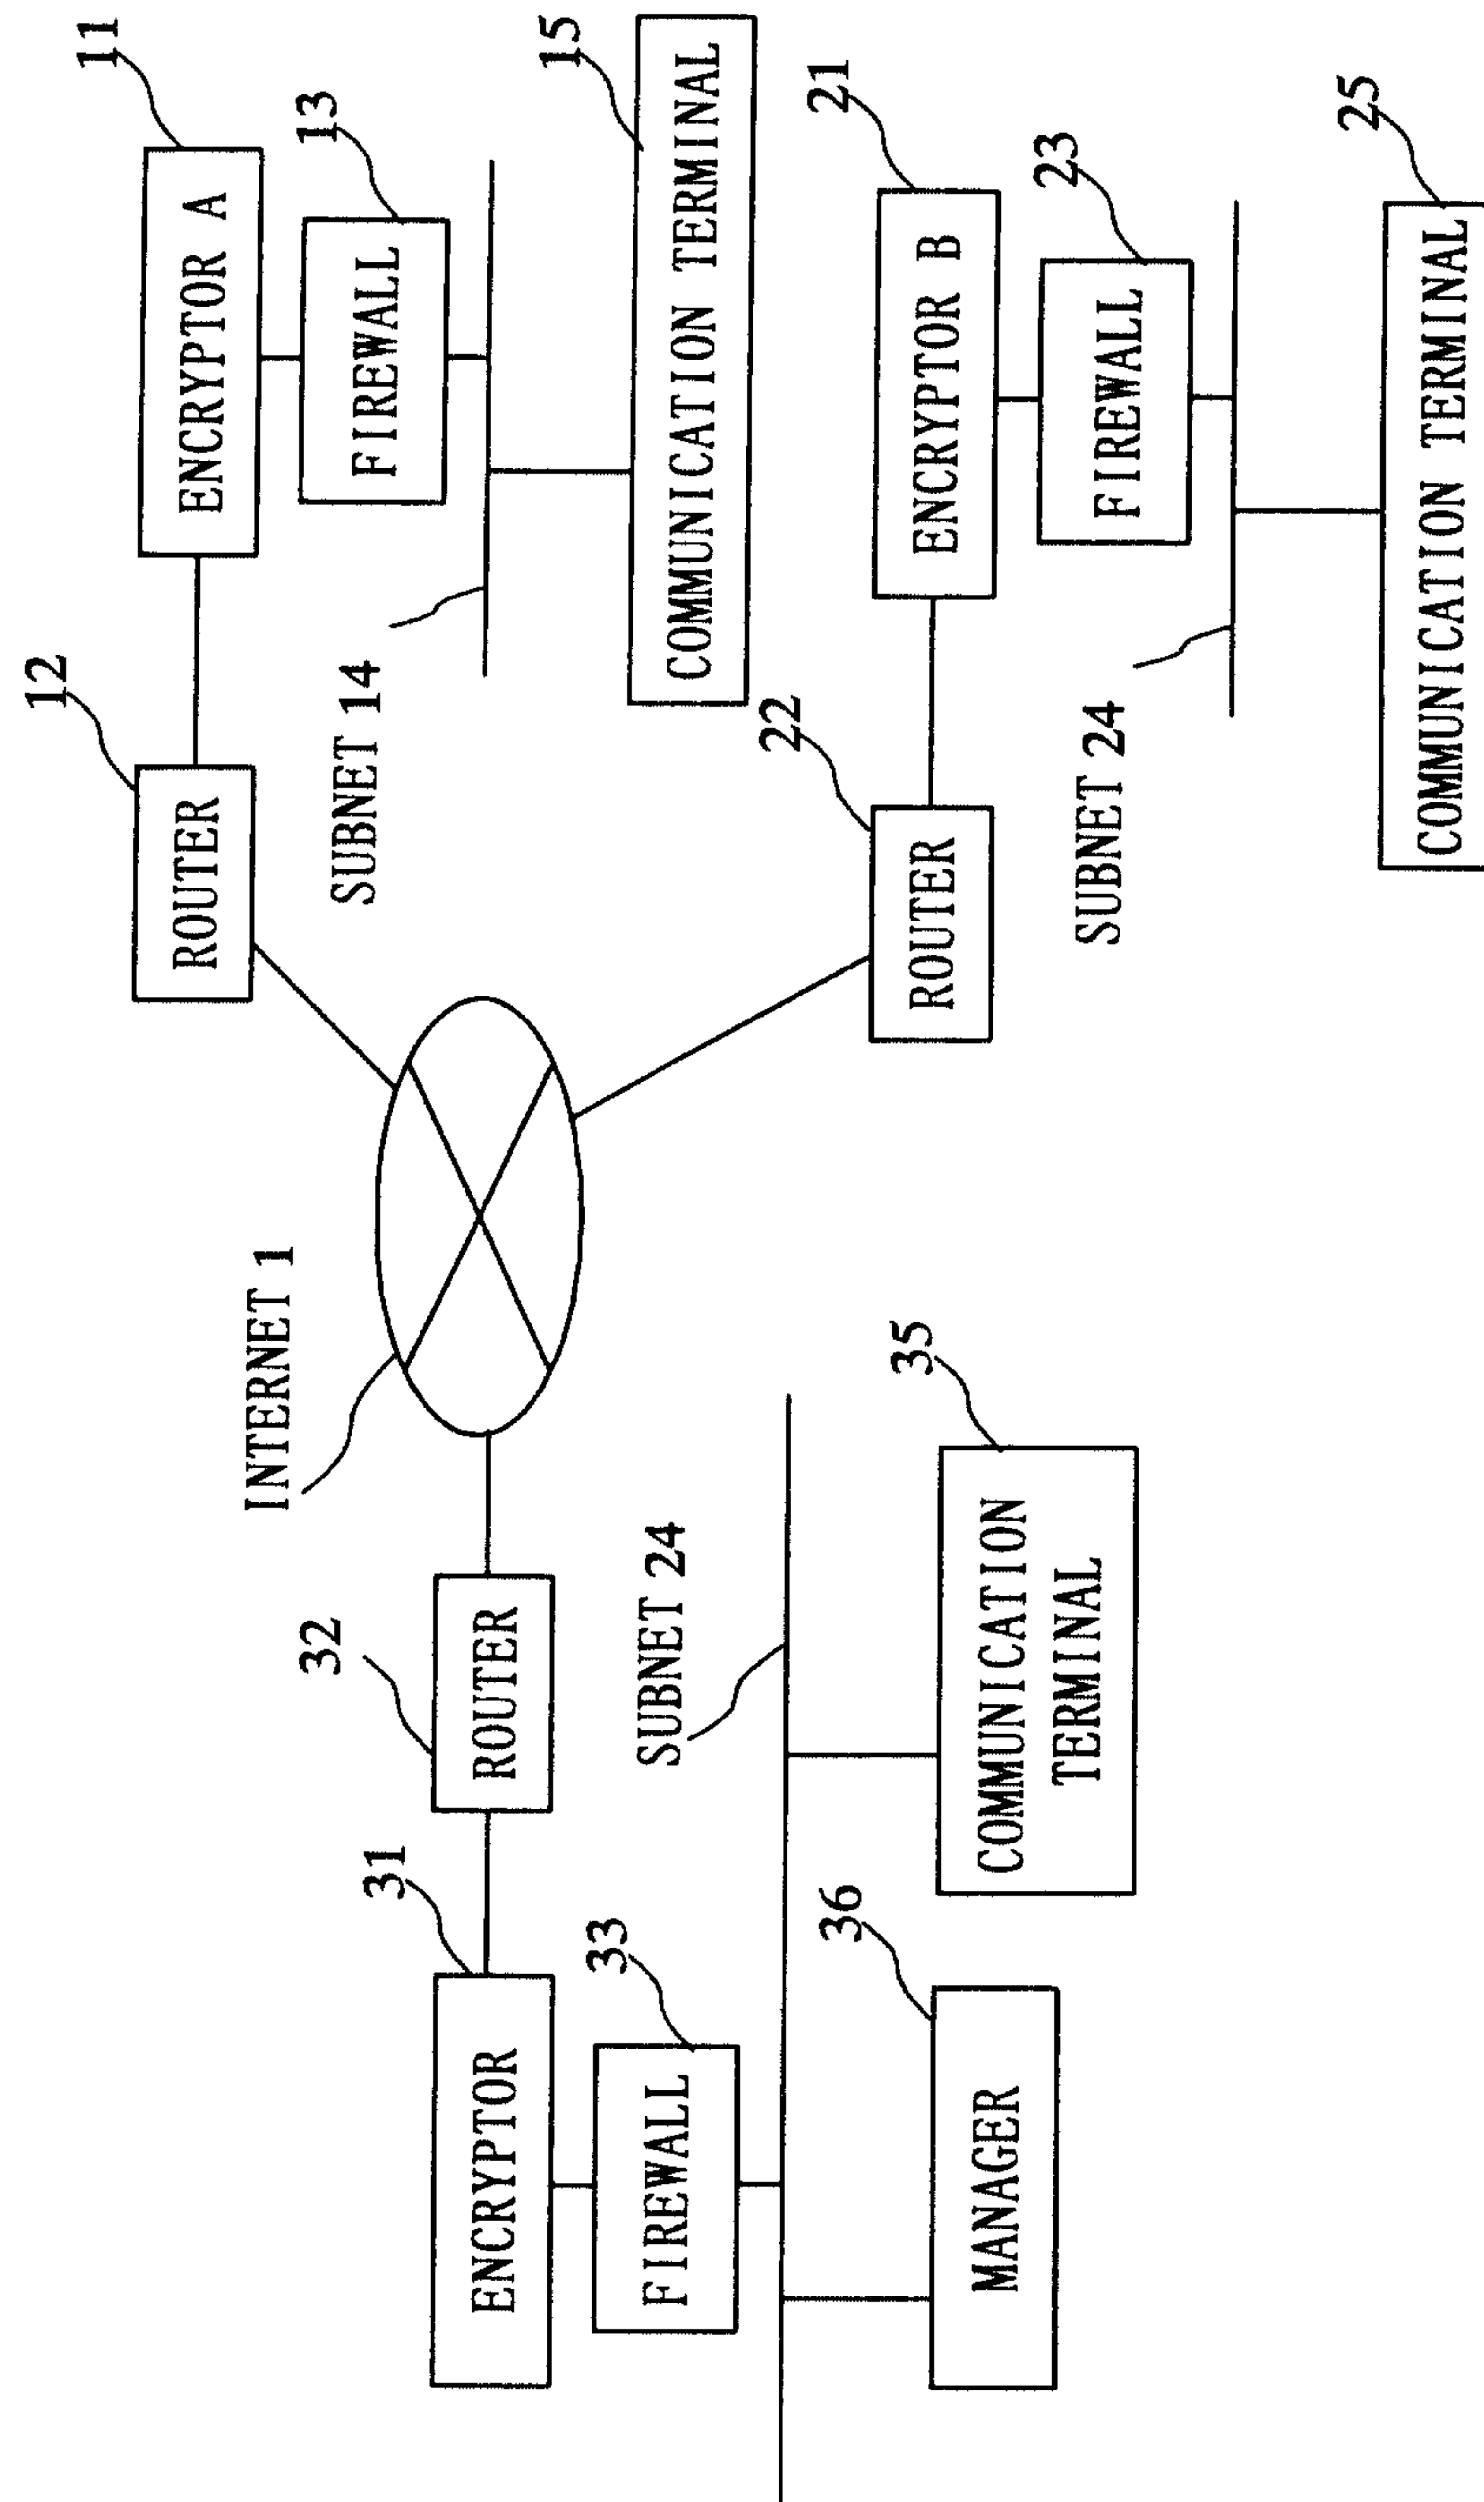


Fig. 14

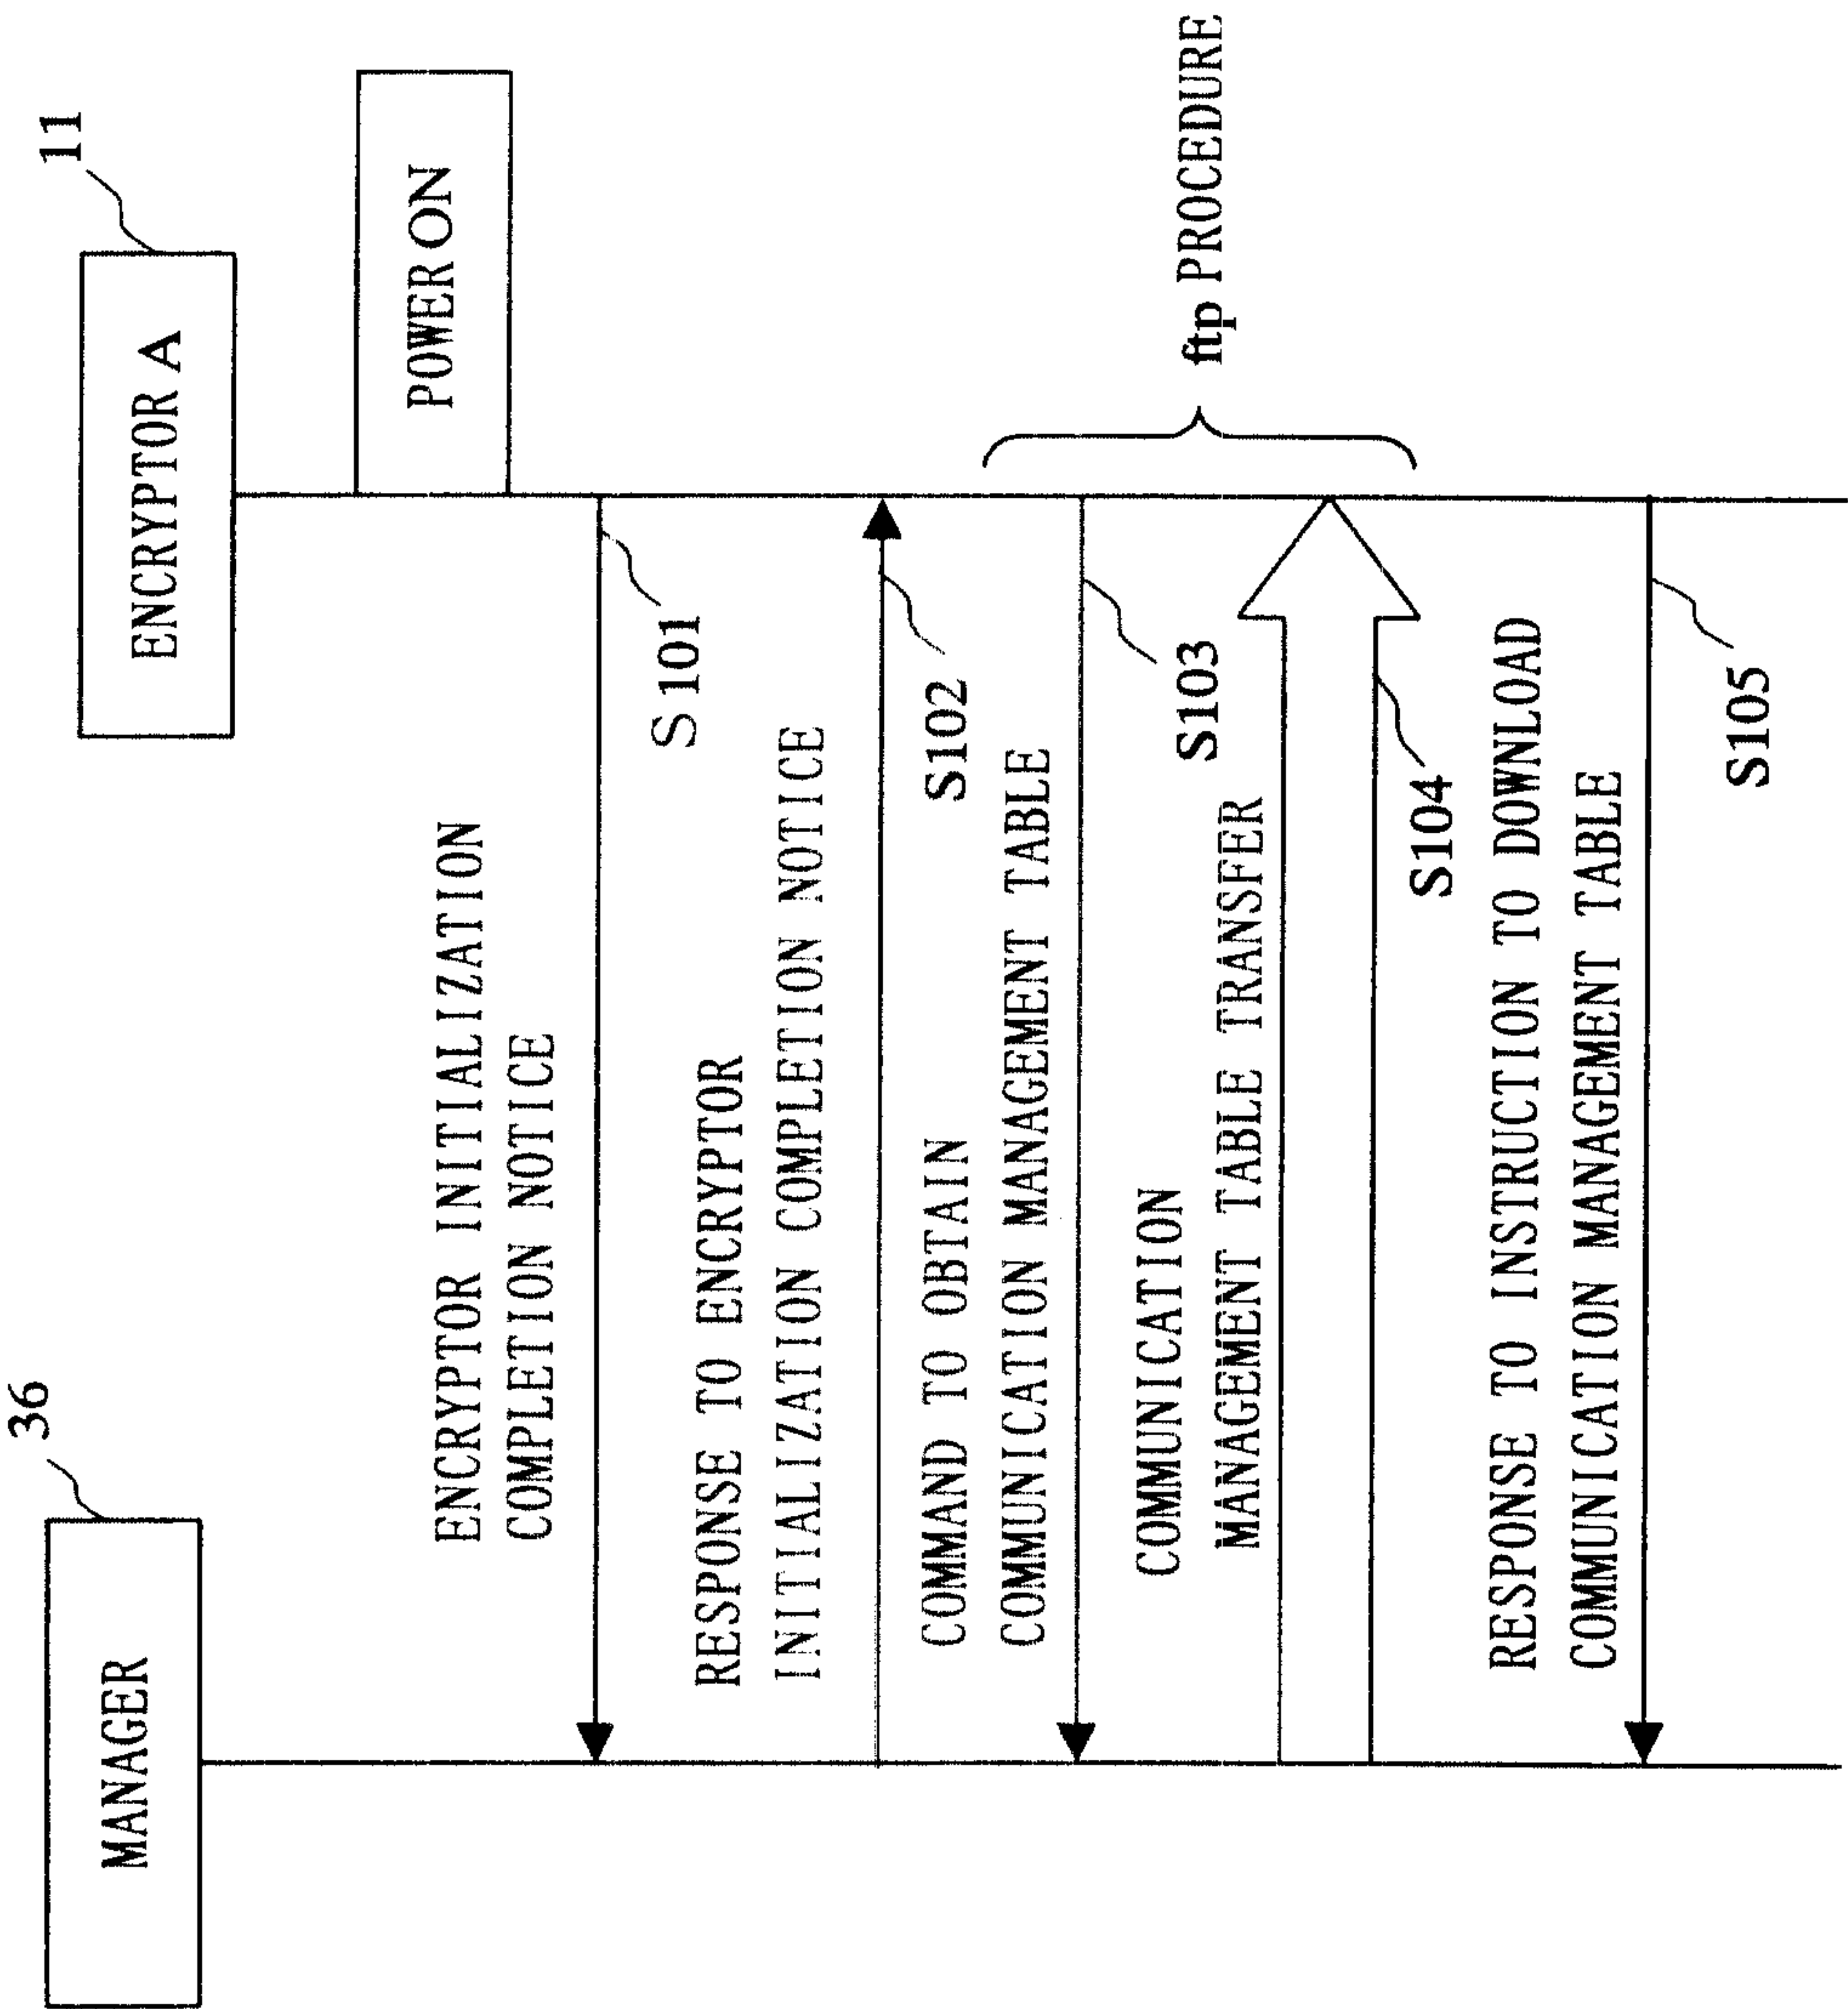


Fig. 15

