

19



Octrooi centrum
Nederland

11

2024023

12 B1 OCTROOI

21

Aanvraagnummer: 2024023

51

Int. Cl.:
A24F 40/10 (2020.01) A24F 40/46 (2020.01)

22

Aanvraag ingediend: 15 oktober 2019

30

Voorrang:
15 oktober 2018 US 62/745,589
17 oktober 2018 US 62/747,099
28 februari 2019 US 62/812,161
9 oktober 2019 US 62/913,135

41

Aanvraag ingeschreven:
7 mei 2020

43

Aanvraag gepubliceerd:
11 mei 2020

47

Octrooi verleend:
25 september 2020

45

Octrooischrift uitgegeven:
14 oktober 2020

73

Octrooihouder(s):
JUUL Labs, Inc. te San Francisco, California,
Verenigde Staten van Amerika, US

72

Uitvinder(s):
Ariel Atkins te San Francisco, California (US)
Steven Christensen
te San Francisco, California (US)
Alexander M. Hoopai
te San Francisco, California (US)
Eric Joseph Johnson
te San Francisco, California (US)
Jason King te San Francisco, California (US)
Esteban Leon Duque
te San Francisco, California (US)
Christopher J. Rosser
te San Francisco, California (US)
Andrew J. Stratton
te San Francisco, California (US)
Alim Thawer te San Francisco, California (US)
James P. Westley
te San Francisco, California (US)
christopher L. Belisle
te San Francisco, California (US)
Matthew Rios
te San Francisco, California (US)

74

Gemachtigde:
J.M.H. Duyver lic. te Diegem

54

HEATING ELEMENT

57

A heating element for a vaporizer cartridge is provided. The vaporizer cartridge may include a reservoir containing vaporizable material and a wicking element in fluid communication with the reservoir. The heating element may include a heating portion, a cartridge contact, and a leg. The heating portion includes at least two tines spaced apart from one another. The cartridge contact may be in in electrical communication with a power source. The leg extends between the heating portion and the cartridge contact. The heating portion may be crimped around the wicking element such that the heating portion secures the wicking element to the heating element and contacts at least two surfaces of the wicking element.

HEATING ELEMENT

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application claims priority to U.S. Provisional Application No. 62/913,135, filed on October 9, 2019, and titled "HEATING ELEMENT," U.S. Provisional Application No. 62/745,589, filed on October 15, 2018, and titled "HEATING ELEMENT," U.S. Provisional Application No. 62/812,161, filed on February 28, 2019, and titled "CARTRIDGE FOR A VAPORIZER DEVICE," and U.S. Provisional Application No. 62/747,099, filed on October 17, 2018, and titled "WICK FEED AND HEATING ELEMENTS IN A VAPORIZER DEVICE," the entirety of each of which is incorporated by reference herein.

TECHNICAL FIELD

[0002] The subject matter described herein relates to vaporizer devices, including heating elements for vaporizer devices.

BACKGROUND

[0003] Vaporizing devices, which can be referred to as vaporizers, electronic vaporizer devices or e-vaporizer devices, can be used for delivery of an aerosol (or "vapor") containing one or more active ingredients by inhalation of the aerosol by a user of the vaporizer device. For example, electronic nicotine delivery systems (ENDS) include a class of vaporizer devices that are battery powered and that may be used to simulate the experience of smoking, but without burning of tobacco or other substances.

[0004] In use of a vaporizer device, the user inhales an aerosol, commonly called vapor, which may be generated by a heating element that vaporizes (e.g., causing a liquid or solid to at least partially transition to the gas phase) a vaporizable material, which may be liquid, a solution, a solid, a wax, or any other form as may be compatible with use of a specific vaporizer device. The vaporizable material used with a vaporizer can be provided within a cartridge (e.g., a separable part of the vaporizer that contains the vaporizable material in a reservoir) that includes a mouthpiece (e.g., for inhalation by a user).

[0005] To receive the inhalable aerosol generated by a vaporizer device, a user may, in certain examples, activate the vaporizer device by taking a puff, by pressing a button, or by some other approach. A puff, as the term is generally used (and also used herein), refers to inhalation by the user in a manner that causes a volume of air to be drawn into the vaporizer device such that the inhalable aerosol is generated by a combination of vaporized vaporizable material with the air.

[0006] A typical approach by which a vaporizer device generates an inhalable aerosol from a vaporizable material involves heating the vaporizable material in a vaporization chamber (or a heater chamber) to cause the vaporizable material to be converted to the gas (or vapor) phase. A vaporization chamber generally refers to an area or volume in the vaporizer device within which a heat source (e.g., conductive, convective, and/or radiative) causes heating of a vaporizable material to produce a mixture of air and vaporized vaporizable material to form a vapor for inhalation by a user of the vaporization device.

[0007] The term vaporizer device, as used herein consistent with the current subject matter, generally refers to portable, self-contained devices that are convenient for personal use. Typically, such devices are controlled by one or more switches, buttons, touch sensitive devices, or other user input functionality or the like (which can be referred to generally as controls) on the vaporizer, although a number of devices that may wirelessly communicate with an external controller (e.g., a smartphone, a smart watch, other wearable electronic devices, etc.) have recently become available. Control, in this context, refers generally to an ability to influence one or more of a variety of operating parameters, which may include without limitation any of causing the heater to be turned on and/or off, adjusting a minimum and/or maximum temperature to which the heater is heated during operation, various games or other interactive features that a user might access on a device, and/or other operations.

[0008] Various vaporizable materials having a variety of contents and proportions of such contents can be contained in the cartridge. Some vaporizable materials, for example, may have a smaller percentage of active

ingredients per total volume of vaporizable material, such as due to regulations requiring certain active ingredient percentages. As a result, a user may need to vaporize a large amount of vaporizable material (e.g., compared to the overall volume of vaporizable material that can be stored in a cartridge) to achieve a desired effect.

SUMMARY

[0009] Aspects of the current subject matter relate to a heating element for use in a vaporizer device.

[0010] A heating element may include a heating portion and at least two legs. The heating portion may include at least two tines spaced apart from one another. The heating portion may be preformed to define an interior volume configured to receive the wicking element such that the heating portion secures at least a portion of the wicking element to the heating element. The heating portion may be configured to contact at least two separate surfaces of the wicking element. The at least two legs may be coupled to the at least two tines and spaced apart from the heating portion. The at least two legs may be configured to electrically communicate with a power source. Power is configured to be supplied to the heating portion from the power source to generate heat, thereby vaporizing the vaporizable material stored within the wicking element.

[0011] In some implementations, the at least two legs includes four legs. In some implementations, the heating portion is configured to contact at least three separate surfaces of the wicking element.

[0012] In some implementations, the at least two tines includes a first side tine portion, a second side tine portion opposing the first side tine portion, and a platform tine portion connecting the first side tine portion with the second side tine portion. The platform tine portion may be positioned approximately perpendicular to a portion of the first side tine portion and the second side tine portion. The first side tine portion, the second side tine portion, and the platform tine portion defines the interior volume in which the wicking element is

positioned. In some implementations, the at least two legs are located away from the heating portion by a bridge.

[0013] In some implementations, each of the at least two legs includes a cartridge contact positioned at an end of each of the at least two legs. The cartridge contact may electrically communicate with the power source. The cartridge contact may be angled and extend away from the heating portion.

[0014] In some implementations, the at least two tines includes a first pair of tines and a second pair of tines. In some implementations, the tines of the first pair of tines are evenly spaced from one another. In some implementations, the tines of the first pair of tines are spaced apart by a width. In some implementations, the width is greater at an inner region of the heating element adjacent the platform tine portion than the width at an outer region of the heating element adjacent an outer edge of the first side tine portion opposite the inner region.

[0015] In some implementations, the vaporizer device is configured to measure a resistance of the heating element at each of the four legs to control a temperature of the heating element. In some implementations, the heating element includes a heat shield configured to insulate the heating portion from a body of the vaporizer device.

[0016] In some implementations, the vaporizer device further includes a heat shield configured to surround at least a portion of the heating element and insulate the heating portion from a body of a wick housing configured to surround at least a portion of the wicking element and the heating element.

[0017] In some implementations, the heating portion is folded between the heating portion and the at least two legs to isolate the heating portion from the at least two legs. In some implementations, the heating portion further includes at least one tab that extends from a side of the at least two tines to allow for easier entry of the wicking element to the interior volume of the heating portion. In some implementations, the at least one tab extends away from the interior volume at an angle.

[0018] In some implementations, the at least two legs includes a capillary feature. The capillary feature may cause an abrupt change in capillary pressure

to thereby prevent the vaporizable material from flowing beyond the capillary feature. In some implementations, the capillary feature comprises one or more bends in the at least two legs. In some implementations, the at least two legs extend at an angle towards the interior volume of the heating portion, the angled at least two legs defining the capillary feature.

[0019] In some implementations, a vaporizer device includes a reservoir containing vaporizable material, a wicking element in fluid communication with the reservoir, and a heating element. The heating element includes a heating portion and at least two legs. The heating portion may include at least two times spaced apart from one another. The heating portion may be preformed to define an interior volume configured to receive the wicking element such that the heating portion secures at least a portion of the wicking element to the heating element. The heating portion may be configured to contact at least two separate surfaces of the wicking element. At least two legs may be coupled to the at least two times and spaced apart from the heating portion. The at least two legs may be configured to electrically communicate with a power source. Power is configured to be supplied to the heating portion from the power source to generate heat, thereby vaporizing the vaporizable material stored within the wicking element.

[0020] A method of forming an atomizer assembly for a vaporizer device may include securing a wicking element to an interior volume of a heating element. The heating element may include a heating portion comprising at least two times spaced apart from one another, and at least two legs spaced from the heating portion. The legs may be configured to electrically communicate with a power source of the vaporizer device. The heating portion is configured to contact at least two surfaces of the wicking element. The method may also include coupling the heating element to a wick housing configured to surround at least a portion of the wicking element and the heating element. The securing may also include sliding the wicking element into the interior volume of the heating element.

[0021] In some implementations, a vaporizer device includes a heating portion comprising one or more heater traces integrally formed and spaced

apart from one another, the one or more heater traces configured to contact at least a portion of a wicking element of the vaporizer device, a connecting portion configured to receive power from a power source and direct the power to the heating portion, and a plating layer having a plating material that is different from a material of the heating portion. The plating layer may be configured to reduce contact resistance between the heating element and the power source, thereby localizing heating of the heating element to the heating portion.

BRIEF DESCRIPTION OF THE DRAWINGS

[0022] The accompanying drawings, which are incorporated in and constitute a part of this specification, show certain aspects of the subject matter disclosed herein and, together with the description, help explain some of the principles associated with the disclosed implementations. In the drawings:

[0023] FIG. 1A shows a block diagram of a vaporizer consistent with implementations of the current subject matter;

[0024] FIG. 1B illustrates a top view of an embodiment of the vaporizer of FIG. 1A, showing a cartridge separated from a vaporizer device body;

[0025] FIG. 1C illustrates a top view of an embodiment of the vaporizer of FIG. 1A, showing the cartridge coupled to the vaporizer device body;

[0026] FIG. 1D illustrates a perspective exploded view of an embodiment of a cartridge, consistent with implementations of the current subject matter;

[0027] FIG. 1E illustrates a top perspective view of an embodiment of a cartridge consistent with implementations of the current subject matter;

[0028] FIG. 1F illustrates a bottom perspective view of an embodiment of a cartridge consistent with implementations of the current subject matter;

[0029] FIG. 2 shows a schematic view of a heating element for use in a vaporizer device consistent with implementations of the current subject matter;

[0030] FIG. 3 shows a schematic view of a heating element for use in a vaporizer device consistent with implementations of the current subject matter;

[0031] FIG. 4 shows a schematic view of a heating element for use in a vaporizer device consistent with implementations of the current subject matter;

[0032] FIG. 5 shows a schematic view of a heating element positioned in a vaporizer cartridge for use in a vaporizer device consistent with implementations of the current subject matter;

5 [0033] FIG. 6 shows a heating element and a wicking element consistent with implementations of the current subject matter;

[0034] FIG. 7 shows a heating element and a wicking element consistent with implementations of the current subject matter;

10 [0035] FIG. 8 shows a heating element and a wicking element positioned within a vaporizer cartridge consistent with implementations of the current subject matter;

[0036] FIG. 9 shows a heating element and a wicking element positioned within a vaporizer cartridge consistent with implementations of the current subject matter;

15 [0037] FIG. 10 shows a heating element positioned within a vaporizer cartridge consistent with implementations of the current subject matter;

[0038] FIG. 11 shows a heating element in an unbent position consistent with implementations of the current subject matter;

[0039] FIG. 12 shows a heating element in a bent position consistent with implementations of the current subject matter;

20 [0040] FIG. 13 shows a heating element in a bent position consistent with implementations of the current subject matter;

[0041] FIG. 14 shows a heating element in an unbent position consistent with implementations of the current subject matter;

25 [0042] FIG. 15 shows a heating element in a partially bent position consistent with implementations of the current subject matter;

[0043] FIG. 16 shows a heating element in a partially bent position consistent with implementations of the current subject matter;

[0044] FIG. 17 shows a heating element in a partially bent position consistent with implementations of the current subject matter;

30 [0045] FIG. 18 shows a heating element in a partially bent position consistent with implementations of the current subject matter;

[0046] FIG. 19 shows a heating element in a partially bent position consistent with implementations of the current subject matter;

[0047] FIG. 20 shows a heating element in an unbent position consistent with implementations of the current subject matter;

5 [0048] FIG. 21 shows a heating element in a bent position consistent with implementations of the current subject matter;

[0049] FIG. 22 shows a heating element in a partially bent position consistent with implementations of the current subject matter;

10 [0050] FIG. 23 shows a heating element in a partially bent position consistent with implementations of the current subject matter;

[0051] FIG. 24 shows a heating element in a partially bent position consistent with implementations of the current subject matter;

[0052] FIG. 25 shows a heating element in a partially bent position and a wicking element consistent with implementations of the current subject matter;

15 [0053] FIG. 26 shows a heating element in a bent position and a wicking element consistent with implementations of the current subject matter;

[0054] FIG. 27 shows a heating element in a bent position and a wicking element consistent with implementations of the current subject matter;

20 [0055] FIG. 28 shows a heating element in an unbent position consistent with implementations of the current subject matter;

[0056] FIG. 29 shows a heating element in an unbent position consistent with implementations of the current subject matter;

[0057] FIG. 30 shows a heating element in an unbent position consistent with implementations of the current subject matter;

25 [0058] FIG. 31 shows a heating element in an unbent position consistent with implementations of the current subject matter;

[0059] FIG. 32 shows a heating element coupled with a portion of a vaporizer cartridge consistent with implementations of the current subject matter;

30 [0060] FIG. 33 shows a heating element and a wicking element positioned within a vaporizer cartridge consistent with implementations of the current subject matter;

[0061] FIG. 34 shows a heating element in a partially bent position consistent with implementations of the current subject matter;

[0062] FIG. 35 shows a heating element in a partially bent position and a wicking element consistent with implementations of the current subject matter;

5 [0063] FIG. 36 shows a heating element having a plated portion, in an unbent position consistent with implementations of the current subject matter;

[0064] FIG. 37 shows a heating element having a plated portion, in a bent position consistent with implementations of the current subject matter;

10 [0065] FIG. 38 shows a heating element having a plated portion positioned within a vaporizer cartridge consistent with implementations of the current subject matter;

[0066] FIG. 39 shows a perspective view of a heating element in a bent position consistent with implementations of the current subject matter;

15 [0067] FIG. 40 shows a side view of a heating element in a bent position consistent with implementations of the current subject matter;

[0068] FIG. 41 shows a front view of a heating element in a bent position consistent with implementations of the current subject matter;

20 [0069] FIG. 42 shows a perspective view of a heating element in a bent position and a wicking element consistent with implementations of the current subject matter;

[0070] FIG. 43 shows a heating element positioned within a vaporizer cartridge consistent with implementations of the current subject matter;

[0071] FIG. 44A shows a perspective view of a heating element in a bent position consistent with implementations of the current subject matter;

25 [0072] FIG. 45 shows a side view of a heating element in a bent position consistent with implementations of the current subject matter;

[0073] FIG. 46 shows a top view of a heating element in a bent position consistent with implementations of the current subject matter;

30 [0074] FIG. 47 shows a front view of a heating element in a bent position consistent with implementations of the current subject matter;

[0075] FIG. 48 shows a perspective view of a heating element in an unbent position consistent with implementations of the current subject matter;

[0076] FIG. 49 shows a top view of a heating element in an unbent position consistent with implementations of the current subject matter;

[0077] FIG. 50A shows a perspective view of a heating element in a bent position consistent with implementations of the current subject matter;

5 [0078] FIG. 50B shows a perspective view of a heating element in a bent position consistent with implementations of the current subject matter;

[0079] FIG. 51 shows a side view of a heating element in a bent position consistent with implementations of the current subject matter;

10 [0080] FIG. 52 shows a top view of a heating element in a bent position consistent with implementations of the current subject matter;

[0081] FIG. 53 shows a front view of a heating element in a bent position consistent with implementations of the current subject matter;

[0082] FIG. 54A shows a perspective view of a heating element in an unbent position consistent with implementations of the current subject matter;

15 [0083] FIG. 54B shows a perspective view of a heating element in an unbent position consistent with implementations of the current subject matter;

[0084] FIG. 55A shows a top view of a heating element in an unbent position consistent with implementations of the current subject matter;

20 [0085] FIG. 55B shows a top view of a heating element in an unbent position consistent with implementations of the current subject matter;

[0086] FIG. 56 shows a top perspective view of an atomizer assembly consistent with implementations of the current subject matter;

[0087] FIG. 57 shows a bottom perspective view of an atomizer assembly consistent with implementations of the current subject matter;

25 [0088] FIG. 58 shows an exploded perspective view of an atomizer assembly consistent with implementations of the current subject matter;

[0089] FIG. 59 shows a perspective view of a heat shield consistent with implementations of the current subject matter;

30 [0090] FIG. 60A shows a side cross-sectional view of an atomizer assembly consistent with implementations of the current subject matter;

[0091] FIG. 60B shows another side cross-sectional view of an atomizer assembly consistent with implementations of the current subject matter;

[0092] FIG. 61 schematically shows a heating element consistent with implementations of the current subject matter;

[0093] FIG. 62 shows a perspective view of a heating element in a bent position consistent with implementations of the current subject matter;

5 [0094] FIG. 63 shows a side view of a heating element in a bent position consistent with implementations of the current subject matter;

[0095] FIG. 64 shows a perspective view of a heating element in a bent position consistent with implementations of the current subject matter;

10 [0096] FIG. 65 shows a side view of a heating element in a bent position consistent with implementations of the current subject matter;

[0097] FIG. 66 shows a top view of a substrate material with a heating element consistent with implementations of the current subject matter;

[0098] FIG. 67 shows a top view of a heating element in an unbent position consistent with implementations of the current subject matter;

15 [0099] FIG. 68A shows a top perspective view of an atomizer assembly consistent with implementations of the current subject matter;

[0100] FIG. 68B shows a close-up view of a portion of a wick housing of an atomizer assembly consistent with implementations of the current subject matter;

20 [0101] FIG. 69 shows a bottom perspective view of an atomizer assembly consistent with implementations of the current subject matter;

[0102] FIG. 70 shows an exploded perspective view of an atomizer assembly consistent with implementations of the current subject matter;

25 [0103] FIGS. 71A-71C show a process of assembling an atomizer consistent with implementations of the current subject matter;

[0104] FIGS. 72A-72C show a process of assembling an atomizer consistent with implementations of the current subject matter; and

30 [0105] FIG. 73 shows a process flow chart illustrating features of a method of forming and implementing a heating element consistent with implementations of the current subject matter.

DETAILED DESCRIPTION

[0106] Implementations of the current subject matter include devices relating to vaporizing of one or more materials for inhalation by a user. Examples of vaporizers consistent with implementations of the current subject matter include electronic vaporizers, electronic cigarettes, e-cigarettes, or the like.

[0107] The vaporizable material used with a vaporizer may optionally be provided within a cartridge (e.g., a part of the vaporizer that contains the vaporizable material in a reservoir or other container and that can be refillable when empty or disposable in favor of a new cartridge containing additional vaporizable material of a same or different type). A vaporizer may be a cartridge-using vaporizer, a cartridge-less vaporizer, or a multi-use vaporizer capable of use with or without a cartridge. For example, a multi-use vaporizer may include a heating chamber (e.g., an oven) configured to receive a vaporizable material directly in the heating chamber and also to receive a cartridge or other replaceable device having a reservoir, a volume, or the like for at least partially containing a usable amount of vaporizable material. In various implementations, a vaporizer may be configured for use with liquid vaporizable material (e.g., a carrier solution in which an active and/or inactive ingredient(s) are suspended or held in solution or a neat liquid form of the vaporizable material itself) or a solid vaporizable material. Some vaporizers consistent with this disclosure may be capable of use with both solid and liquid vaporizable material. A solid vaporizable material may include a plant material that emits some part of the plant material as the vaporizable material (e.g., such that some part of the plant material remains as waste after the vaporizable material is emitted for inhalation by a user) or optionally can be a solid form of the vaporizable material itself (e.g., a "wax") such that all of the solid material can eventually be vaporized for inhalation. A liquid vaporizable material can likewise be capable of being completely vaporized or can include some part of the liquid material that remains after all of the material suitable for inhalation has been consumed.

[0108] Referring to the block diagram of FIG. 1A, a vaporizer 10 typically includes a power source 8 (such as a battery which may be a rechargeable

battery), and a controller 19 (e.g., a processor, circuitry, etc. capable of executing logic) for controlling delivery of heat to an atomizer 19 to cause a vaporizable material to be converted from a condensed form (e.g., a solid, a liquid, a solution, a suspension, a part of an at least partially unprocessed plant material, etc.) to the gas phase. The controller 19 may be part of one or more printed circuit boards (PCBs) consistent with certain implementations of the current subject matter. After conversion of the vaporizable material to the gas phase, and depending on the type of vaporizer, the physical and chemical properties of the vaporizable material, and/or other factors, at least some of the gas-phase vaporizable material may condense to form particulate matter in at least a partial local equilibrium with the gas phase as part of an aerosol, which can form some or all of an inhalable dose provided by the vaporizer 10 for a given puff or draw on the vaporizer. It will be understood that the interplay between gas and condensed phases in an aerosol generated by a vaporizer can be complex and dynamic, as factors such as ambient temperature, relative humidity, chemistry, flow conditions in airflow paths (both inside the vaporizer and in the airways of a human or other animal), mixing of the gas-phase or aerosol-phase vaporizable material with other air streams, etc., may affect one or more physical parameters of an aerosol. In some vaporizers, and particularly for vaporizers for delivery of more volatile vaporizable materials, the inhalable dose may exist predominantly in the gas phase (i.e., formation of condensed phase particles may be very limited). In other examples, the converse may be true.

[0109] Vaporizers for use with liquid vaporizable materials (e.g., neat liquids, suspensions, solutions, mixtures, etc.) typically include an atomizer 26 in which a wicking element (also referred to herein as a wick (not shown in FIG. 1A), which can include any component (e.g., a fibrous wick, a sintered material, a structure having a narrow gap or channel between surfaces wettable by a liquid vaporizable material) capable of drawing liquid from a reservoir or fluid storage component under capillary pressure), conveys an amount of a liquid vaporizable material to a part of the atomizer that includes a heating element (also not shown in FIG. 1A). The wicking element is generally configured to draw liquid

vaporizable material from a reservoir configured to contain (and that may in use contain) the liquid vaporizable material such that the liquid vaporizable material may be vaporized by heat delivered from a heating element. The wicking element may also optionally allow air to enter the reservoir to replace the volume of liquid removed. In other words, capillary action pulls liquid vaporizable material into the wick for vaporization by the heating element (described below), and air may, in some implementations of the current subject matter, return to the reservoir through the wick to at least partially equalize pressure in the reservoir. However, as vaporizable material is drawn out of the reservoir, the pressure inside the reservoir is reduced, thereby creating a vacuum and acting against the capillary action. This can reduce the effectiveness of the wick to draw the vaporizable material into the atomizer, thereby reducing the effectiveness of the vaporization device to vaporize a desired amount of vaporizable material, such as when a user takes a puff on the vaporizer device. Furthermore, the vacuum created in the reservoir can ultimately result in the inability to draw all of the vaporizable material into the atomizer, thereby wasting vaporizable material. As such, improved vaporization devices and/or vaporization cartridges that improve upon or overcome these issues is desired. Other approaches to allowing air back into the reservoir to equalize pressure are also within the scope of the current subject matter.

[0110] The heating element can be or include one or more of a conductive heater, a radiative heater, and a convective heater. One type of heating element is a resistive heating element, which can be constructed of or at least include a material (e.g., a metal or alloy, for example a nickel-chromium alloy, or a non-metallic resistor) configured to dissipate electrical power in the form of heat when electrical current is passed through one or more resistive segments of the heating element. In some implementations of the current subject matter, an atomizer can include a heating element that includes a resistive coil or other heating element wrapped around, positioned within, integrated into a bulk shape of, pressed into thermal contact with, or otherwise arranged to deliver heat to a wicking element to cause a liquid vaporizable material drawn by the wicking element from a reservoir to be vaporized for subsequent inhalation by a user in

a gas and/or a condensed (e.g., aerosol particles or droplets) phase. Other wicking element, heating element, and/or atomizer assembly configurations are also possible, as discussed further below. For example, a heating element consistent with implementations of the current subject matter may desirably be shaped to receive a wicking element and/or crimped or pressed at least partially around the wicking element. The heating element may be bent such that the heating element is configured to secure the wicking element between at least two or three portions of the heating element. The heating element may be bent to conform to a shape of at least a portion of the wicking element. The heating element may be more easily manufacturable than typical heating elements. The heating element consistent with implementations of the current subject matter may also be made of an electrically conductive metal suitable for resistive heating and in some implementations, the heating element may include selective plating of another material to allow the heating element (and thus, the vaporizable material) to be more efficiently heated.

[0111] Certain vaporizers may also or alternatively be configured to create an inhalable dose of gas-phase and/or aerosol-phase vaporizable material via heating of a non-liquid vaporizable material, such as for example a solid-phase vaporizable material (e.g., a wax or the like) or plant material (e.g., tobacco leaves and/or parts of tobacco leaves) containing the vaporizable material. In such vaporizers, a resistive heating element may be part of or otherwise incorporated into or in thermal contact with the walls of an oven or other heating chamber into which the non-liquid vaporizable material is placed. Alternatively, a resistive heating element or elements may be used to heat air passing through or past the non-liquid vaporizable material to cause convective heating of the non-liquid vaporizable material. In still other examples, a resistive heating element or elements may be disposed in intimate contact with plant material such that direct conductive heating of the plant material occurs from within a mass of the plant material (e.g., as opposed to only by conduction inward from walls of an oven).

[0112] The heating element may be activated (e.g., a controller, which is optionally part of a vaporizer body as discussed below, may cause current to

pass from the power source through a circuit including the resistive heating element, which is optionally part of a vaporizer cartridge as discussed below), in association with a user puffing (e.g., drawing, inhaling, etc.) on a mouthpiece 21 of the vaporizer to cause air to flow from an air inlet, along an airflow path that passes an atomizer (e.g., one or more wicking elements and one or more heating elements in combination), optionally through one or more condensation areas or chambers, to an air outlet in the mouthpiece. Incoming air passing along the airflow path passes over, around, through, etc., the atomizer, where gas phase vaporizable material is entrained into the air. As noted above, the entrained gas-phase vaporizable material may condense as it passes through the remainder of the airflow path such that an inhalable dose of the vaporizable material in an aerosol form can be delivered from the air outlet (e.g., in a mouthpiece 21 for inhalation by a user).

[0113] Activation of the heating element may be caused by automatic detection of the puff based on one or more of signals generated by one or more sensors 29, such as for example a pressure sensor or sensors disposed to detect pressure along the airflow path relative to ambient pressure (or optionally to measure changes in absolute pressure), one or more motion sensors of the vaporizer, one or more flow sensors of the vaporizer, and/or a capacitive lip sensor of the vaporizer; in response to detection of interaction of a user with one or more input devices 41 (e.g., buttons or other tactile control devices of the vaporizer 10), receipt of one or more signals from a computing device in communication with the vaporizer; and/or via other approaches for determining that a puff is occurring or imminent.

[0114] As alluded to in the previous paragraph, a vaporizer consistent with implementations of the current subject matter may be configured to connect (e.g., wirelessly or via a wired connection) to a computing device (or optionally two or more devices) in communication with the vaporizer. To this end, the controller 19 may include communication hardware 49. The controller may also include a memory 41. A computing device can be a component of a vaporizer system that also includes the vaporizer 10, and can include its own communication hardware, which can establish a wireless communication

channel with the communication hardware 49 of the vaporizer 10. For example, a computing device used as part of a vaporizer system may include a general purpose computing device (e.g., a smartphone, a tablet, a personal computer, some other portable device such as a smartwatch, or the like) that executes software to produce a user interface for enabling a user of the device to interact with a vaporizer. In other implementations of the current subject matter, such a device used as part of a vaporizer system can be a dedicated piece of hardware such as a remote control or other wireless or wired device having one or more physical or soft (e.g., configurable on a screen or other display device and selectable via user interaction with a touch-sensitive screen or some other input device like a mouse, pointer, trackball, cursor buttons, or the like) interface controls. The vaporizer can also include one or more output 37 features or devices for providing information to the user.

[0115] A computing device that is part of a vaporizer system as defined above can be used for any of one or more functions, such as controlling dosing (e.g., dose monitoring, dose setting, dose limiting, user tracking, etc.), controlling sessioning (e.g., session monitoring, session setting, session limiting, user tracking, etc.), controlling nicotine delivery (e.g., switching between nicotine and non-nicotine vaporizable material, adjusting an amount of nicotine delivered, etc.), obtaining locational information (e.g., location of other users, retailer/commercial venue locations, vaping locations, relative or absolute location of the vaporizer itself, etc.), vaporizer personalization (e.g., naming the vaporizer, locking/password protecting the vaporizer, adjusting one or more parental controls, associating the vaporizer with a user group, registering the vaporizer with a manufacturer or warranty maintenance organization, etc.), engaging in social activities (e.g., games, social media communications, interacting with one or more groups, etc.) with other users, or the like. The terms “sessioning”, “session”, “vaporizer session,” or “vapor session,” are used generically to refer to a period devoted to the use of the vaporizer. The period can include a time period, a number of doses, an amount of vaporizable material, and/or the like.

[0116] In the example in which a computing device provides signals related to activation of the resistive heating element, or in other examples of coupling of a computing device with a vaporizer for implementation of various control or other functions, the computing device executes one or more computer instructions sets to provide a user interface and underlying data handling. In one example, detection by the computing device of user interaction with one or more user interface elements can cause the computing device to signal the vaporizer 10 to activate the heating element, either to a full operating temperature for creation of an inhalable dose of vapor/aerosol or to a lower temperature to begin heating the heating element. Other functions of the vaporizer may be controlled by interaction of a user with a user interface on a computing device in communication with the vaporizer.

[0117] The temperature of a resistive heating element of a vaporizer may depend on a number of factors, including a material of the heating element, an amount of electrical power delivered to the resistive heating element and/or a duty cycle at which the electrical power is delivered, conductive heat transfer to other parts of the electronic vaporizer and/or to the environment, latent heat losses due to vaporization of a vaporizable material from the wicking element and/or the atomizer as a whole, and convective heat losses due to airflow (e.g., air moving across the heating element or the atomizer as a whole when a user inhales on the electronic vaporizer). As noted above, to reliably activate the heating element or heat the heating element to a desired temperature, a vaporizer may, in some implementations of the current subject matter, make use of signals from a pressure sensor to determine when a user is inhaling. The pressure sensor can be positioned in the airflow path and/or can be connected (e.g., by a passageway or other path) to an airflow path connecting an inlet for air to enter the device and an outlet via which the user inhales the resulting vapor and/or aerosol such that the sensor experiences pressure changes concurrently with air passing through the vaporizer device from the air inlet to the air outlet. In some implementations of the current subject matter, the heating element may be activated in association with a user's puff, for example by automatic detection of the puff, for example by the pressure sensor detecting

a pressure change in the airflow path. As noted above, the heating element may be entirely and/or selectively plated with one or more other materials to enhance heating performance of the heating element.

[0118] Typically, the pressure sensor (and/or any other sensors 29) can be positioned on or coupled (e.g., electrically or electronically connected, either physically or via a wireless connection) to the controller 19 (e.g., a printed circuit board assembly or other type of circuit board). To take measurements accurately and maintain durability of the vaporizer, it can be beneficial to provide a resilient seal 60 to separate an airflow path from other parts of the vaporizer. The seal 60, which can be a gasket, may be configured to at least partially surround the pressure sensor such that connections of the pressure sensor to internal circuitry of the vaporizer are separated from a part of the pressure sensor exposed to the airflow path.

[0119] In an example of a cartridge-based vaporizer, the seal or gasket 60 may also separate parts of one or more electrical connections between a vaporizer body 50 and a vaporizer cartridge 52. Such arrangements of a gasket or seal 60 in a vaporizer 10 can be helpful in mitigating against potentially disruptive impacts on vaporizer components resulting from interactions with environmental factors such as water in the vapor or liquid phases, other fluids such as the vaporizable material, etc., and/or to reduce escape of air from the designed airflow path in the vaporizer. Unwanted air, liquid or other fluid passing over and/or contacting circuitry of the vaporizer can cause various unwanted effects, such as altered pressure readings, and/or can result in the buildup of unwanted material, such as moisture, the vaporizable material, etc., in parts of the vaporizer where they may result in poor pressure signal, degradation of the pressure sensor or other components, and/or a shorter life of the vaporizer. Leaks in the seal or gasket 60 can also result in a user inhaling air that has passed over parts of the vaporizer device containing or constructed of materials that may not be desirable to be inhaled.

[0120] A general class of vaporizers that have recently gained popularity includes a vaporizer body 50 that includes a controller 19, a power source 8 (e.g., battery), one or more sensors, charging contacts, a gasket or seal 60, and

a cartridge receptacle 69 configured to receive a vaporizer cartridge 52 for coupling with the vaporizer body 50 through one or more of a variety of attachment structures. In some examples, vaporizer cartridge 52 includes a reservoir 55 for containing a liquid vaporizable material and a mouthpiece 21 for delivering an inhalable dose to a user. The vaporizer cartridge can include an atomizer 26 having a wicking element and a heating element, or alternatively, one or both of the wicking element and the heating element can be part of the vaporizer body 50. In implementations in which any part of the atomizer 26 (e.g., heating element and/or wicking element) is part of the vaporizer body 50, the vaporizer can be configured to supply liquid vaporizable material from a reservoir in the vaporizer cartridge to the atomizer part(s) included in the vaporizer body.

[0121] Cartridge-based configurations for vaporizers that generate an inhalable dose of a non-liquid vaporizable material via heating of a non-liquid vaporizable material are also within the scope of the current subject matter. For example, a vaporizer cartridge may include a mass of a plant material that is processed and formed to have direct contact with parts of one or more resistive heating elements, and such a vaporizer cartridge may be configured to be coupled mechanically and electrically to a vaporizer body that includes a processor, a power source, and electrical contacts for connecting to corresponding cartridge contacts for completing a circuit with the one or more resistive heating elements.

[0122] In vaporizers in which the power source 8 is part of a vaporizer body 50 and a heating element is disposed in a vaporizer cartridge 52 configured to couple with the vaporizer body 50, the vaporizer 10 may include electrical connection features (e.g., means for completing a circuit) for completing a circuit that includes the controller (e.g., a printed circuit board, a microcontroller, or the like), the power source, and the heating element. These features may include at least two, four, or more contacts on a bottom, side, internal, external, or other surface of the vaporizer cartridge 52 (referred to herein as cartridge contacts 65) and at least two, four, or more contacts disposed near a base of the cartridge receptacle (referred to herein as receptacle contacts 62) of the

vaporizer 10 such that the cartridge contacts 65 and the receptacle contacts 62 make electrical connections when the vaporizer cartridge 52 is inserted into and coupled with the cartridge receptacle 69.

[0123] In some implementations, at least a portion of the cartridge contacts 65 may face a direction that is approximately perpendicular to the bottom surface of the vaporizer cartridge. For example, at least a portion of the cartridge contacts 65 may be approximately parallel to sides of the vaporizer cartridge and/or may face outwardly towards lateral sides of the vaporizer cartridge. In such configurations, the cartridge contacts 65 may either be exposed and accessible external to an outer shell of the vaporizer cartridge and/or be positioned within a portion of the vaporizer cartridge, such as within an outer shell of the vaporizer cartridge. For example, the cartridge contacts 65 may face an interior wall of the outer shell of the vaporizer cartridge or another portion of the vaporizer cartridge. The receptacle contacts 62 of the vaporizer 10 may pass into a portion of the vaporizer cartridge, such as the outer shell of the vaporizer cartridge to electrically connect with the cartridge contacts 65 when the vaporizer cartridge 52 is inserted into and coupled with the cartridge receptacle 69. In some implementation, when the vaporizer cartridge 52 is inserted into and coupled with the cartridge receptacle 69, the receptacle contacts 65 may be positioned between a portion of the vaporizer cartridge 52 (e.g., the outer shell of the vaporizer cartridge) and the cartridge contacts 65. Thus, at least a portion of the vaporizer cartridge 52, such as near a base of the cartridge 52, may include a female portion that receives at least a portion of the cartridge receptacle 69 that includes the receptacle contacts 62 such that the cartridge contacts 65 and the receptacle contacts 62 mate within at least a portion of the vaporizer cartridge 52.

[0124] The cartridge contacts 65 and/or the receptacle contacts 62 may include one or more wiping or brush-type contacts that are configured to clean the connection between the contacts 65, 62 and other contacts or power source. For example, the wiping and/or brush type contacts may include two parallel, but offset, bosses that frictionally engage and slide against one another in a direction that is parallel or perpendicular to the insertion direction. The

cartridge contacts 65, as explained below, may form a portion of the heating element of the vaporizer cartridge. The circuit completed by these electrical connections between the cartridge contacts 65 and the receptacle contacts 62 can allow delivery of electrical current to the resistive heating element and may further be used for additional functions, such as for example for measuring a resistance of the resistive heating element for use in determining and/or controlling a temperature of the resistive heating element based on a thermal coefficient of resistivity of the resistive heating element, for identifying a cartridge based on one or more electrical characteristics of a resistive heating element or the other circuitry of the vaporizer cartridge, etc.

[0125] In some examples of the current subject matter, the cartridge contacts and the receptacle contacts can be configured to electrically connect in either of at least two orientations. In other words, one or more circuits necessary for operation of the vaporizer can be completed by insertion of a vaporizer cartridge 52 in the cartridge receptacle 69 in a first rotational orientation (around an axis along which the end of the vaporizer cartridge 52 having the cartridge contacts 60 is inserted into the cartridge receptacle 69 of the vaporizer body 50 and/or at least a portion of the cartridge receptacle 69 having the receptacle contacts 62 is inserted into at least a portion of the vaporizer cartridge 52 having the cartridge contacts 65) such that a first cartridge contact of the cartridge contacts 65 is electrically connected to a first receptacle contact of the receptacle contacts 62, a second cartridge contact opposite the first cartridge contact of the cartridge contacts 65 is electrically connected to a second receptacle contact of the receptacle contacts 62, and so on. Furthermore, the one or more circuits necessary for operation of the vaporizer can be completed by insertion of a vaporizer cartridge 52 in the cartridge receptacle 69 in a second rotational orientation such that the first cartridge contact is electrically connected to the second receptacle contact and the second cartridge contact is electrically connected to the first receptacle contact. This feature of a vaporizer cartridge 52 being reversibly insertable into a cartridge receptacle 69 of the vaporizer body 50 is described further below. For example, the cartridge contacts 65 and the receptacle contacts 62 may

mate, such as face-to-face, or as interlocking, with one another. In some implementations, the one or more cartridge and/or receptacle contacts 65, 62 can include angled or shaped surfaces, which are symmetrical, so as to be able to mate with one another in any one of two reversible orientations.

5 [0126] In one example of an attachment structure for coupling a vaporizer cartridge 52 to a vaporizer body, the vaporizer body 50 includes a detent (e.g., a dimple, protrusion, spring, etc.) protruding inwardly from an inner surface the cartridge receptacle 69. One or more exterior surfaces (e.g., surfaces
10 positioned along an exterior of the vaporizer cartridge or an externally accessible surface positioned within the vaporizer cartridge) of the vaporizer cartridge 52 can include corresponding recesses (not shown in FIG. 1A) that can fit, receive, and/or otherwise snap over such detents when an end of the vaporizer cartridge 52 is inserted into the cartridge receptacle 69 on the vaporizer body 50. When the vaporizer cartridge 52 and the vaporizer body 50
15 are coupled (e.g., by insertion of an end of the vaporizer cartridge 52 into the cartridge receptacle 69 of the vaporizer body 50), the detent in the vaporizer body 50 may fit within and/or otherwise be held within the recesses of the vaporizer cartridge 52 to hold the vaporizer cartridge 52 in place when assembled. Such a detent-recess assembly can provide enough support to
20 hold the vaporizer cartridge 52 in place to ensure good contact between the at least two cartridge contacts 65 and the at least two receptacle contacts 62, while allowing release of the vaporizer cartridge 52 from the vaporizer body 50 when a user pulls with reasonable force on the vaporizer cartridge 52 to disengage the vaporizer cartridge 52 from the cartridge receptacle 69.

25 [0127] Further to the discussion above about the electrical connections between a vaporizer cartridge and a vaporizer body 50 being reversible such that at least two rotational orientations of the vaporizer cartridge 52 in the cartridge receptacle 69 are possible, in some vaporizers the shape of the vaporizer cartridge 52, or at least a shape of the end of the vaporizer cartridge
30 that is configured for insertion into the cartridge receptacle 69 may have rotational symmetry of at least order two. In other words, the vaporizer cartridge 52 or at least the insertable end of the vaporizer cartridge 52 may be

symmetric upon a rotation of 180° around an axis along which the vaporizer cartridge 52 is inserted into the cartridge receptacle 69. In such a configuration, the circuitry of the vaporizer may support identical operation regardless of which symmetrical orientation of the vaporizer cartridge 52 occurs.

5 [0128] In some examples, the vaporizer cartridge 52, or at least an end of the vaporizer cartridge 52 configured for insertion in the cartridge receptacle 69 may have a non-circular cross-section transverse to the axis along which the vaporizer cartridge 52 is inserted into the cartridge receptacle 69. For example, the non-circular cross-section may be approximately rectangular, approximately
10 elliptical (e.g., have an approximately oval shape), non-rectangular but with two sets of parallel or approximately parallel opposing sides (e.g., having a parallelogram-like shape), or other shapes having rotational symmetry of at least order two. In this context, approximately having a shape indicates that a basic likeness to the described shape is apparent, but that sides of the shape in
15 question need not be completely linear and vertices need not be completely sharp. Rounding of both or either of edges or vertices of the cross-sectional shape is contemplated in the description of any non-circular cross-section referred to herein.

[0129] The at least two cartridge contacts 65 and the at least two receptacle
20 contacts 62 can take various forms. For example, one or both sets of contacts may include conductive pins, tabs, posts, receiving holes for pins or posts, or the like. Some types of contacts may include springs or other urging features to cause better physical and electrical contact between the contacts on the vaporizer cartridge and the vaporizer body. The electrical contacts may
25 optionally be gold-plated, and/or can include other materials.

[0130] FIG. 1B illustrates an embodiment of the vaporizer device body 50 having a cartridge receptacle 69 into which the cartridge 52 may be releasably inserted. FIG. 1B shows a top view of the vaporization device 10 illustrating the cartridge being positioned for insertion into the vaporizer device body 50. When
30 a user puffs on the vaporization device 10, air may pass between an outer surface of the cartridge 52 and an inner surface of a cartridge receptacle 69 on the vaporizer device body 50. Air can then be drawn into an insertable end 3 of

the cartridge, through the vaporization chamber that includes or contains the heating element and wick, and out through an outlet of the mouthpiece 21 for delivery of the inhalable aerosol to a user. The reservoir 55 of the cartridge 52 may be formed in whole or in part from translucent material such that a level of vaporizable material 2 is visible along the cartridge 52. FIG. 1C illustrates example features that can be included in embodiments of the vaporizer device 10 consistent with implementations of the current subject matter. For example, FIG. 1C shows a top view of an example of the vaporizer device 10 after connecting the vaporizer cartridge 120 to the vaporizer device body 50. FIG. 1D illustrates an exploded view of an embodiment of the vaporizer cartridge 52, FIG. 1E illustrates a perspective view of an embodiment of the vaporizer cartridge 52, and FIG. 1F illustrates a bottom perspective view of an embodiment of the vaporizer cartridge 52. As shown in FIGS. 1D-1F, the vaporizer cartridge 52 includes a housing 7 and an atomizer assembly (or the atomizer) 26.

[0131] The atomizer assembly 26 (see FIGS. 56-58) may include a wicking element 70, a heating element 100, and a wick housing 98. As explained in more detail below, at least a portion of the heating element 100 is positioned between the housing 7 and the wick housing 98 and is exposed to be coupled with a portion of the vaporizer device body 10 (e.g., electrically coupled with the receptacle contacts 62). The wick housing 98 may include four sides. For example, the wick housing 98 may include two opposing short sides and two opposing long sides. The two opposing long sides may each include at least one (two or more) recess 87 (see FIGS. 56, 68A). The recesses 87 may be positioned along the long side of the wick housing 98 and adjacent to respective intersections between the long sides and the short sides of the wick housing 98. The recesses 87 may be shaped to releasably couple with a corresponding feature (e.g., a spring) on the vaporizer body 50 to secure the vaporizer cartridge 52 to the vaporizer body 50 within the cartridge receptacle 69. The recesses 87 provides a mechanically stable securement means to couple the vaporizer cartridge 52 to the vaporizer body 50.

[0132] In some implementations, the wick housing 98 also includes an identification chip 95, which may be configured to communicate with a corresponding chip reader located on the vaporizer. The identification chip 95 may be glued and/or otherwise adhered to the wick housing 98, such as on a short side of the wick housing 98. The wick housing 98 may additionally or alternatively include a chip recess 83 (see FIG. 57) that is configured to receive the identification chip 95. The chip recess 83 may be surrounded by two, four, or more walls. The chip recess 83 may be shaped to secure the identification chip 95 to the wick housing 98.

[0133] As noted above, the vaporizer cartridge 52 may generally include a reservoir, an air path, and an atomizer 26. In some configurations, the heating element and/or atomizer described in accordance with implementations of the current subject matter can be implemented directly into a vaporizer body and/or may not be removable from the vaporizer body. In some implementations, the vaporizer body may not include a removable cartridge.

[0134] Various advantages and benefits of the current subject matter may relate to improvements relative to current vaporizer configurations, methods of manufacture, and the like. For example, a heating element of a vaporizer device consistent with implementations of the current subject matter may desirably be made (e.g., stamped) from a sheet of material and either crimped around at least a portion of a wicking element or bent to provide a preformed element configured to receive the wicking element (e.g., the wicking element is pushed into the heating element and/or the heating element is held in tension and is pulled over the wicking element). The heating element may be bent such that the heating element secures the wicking element between at least two or three portions of the heating element. The heating element may be bent to conform to a shape of at least a portion of the wicking element. Configurations of the heating element allows for more consistent and enhanced quality manufacturing of the heating element. Consistency of manufacturing quality of the heating element may be especially important during scaled and/or automated manufacturing processes. For example, the heating element consistent with implementations of the current subject matter helps to reduce tolerance issues

that may arise during manufacturing processes when assembling a heating element having multiple components.

[0135] In some implementations, accuracy of measurements taken from the heating element (e.g., a resistance, a current, a temperature, etc.) may be improved due at least in part to the improved consistency in manufacturability of the heating element having reduced tolerance issues. Greater accuracy in measurements can provide an enhanced user experience when using the vaporizer device. For example, as mentioned above, the vaporizer 10 may receive a signal to activate the heating element, either to a full operating temperature for creation of an inhalable dose of vapor/aerosol or to a lower temperature to begin heating the heating element. The temperature of the heating element of the vaporizer may depend on a number of factors, as noted above, and several of these factors can be made more predictable by elimination of potential variations in fabrication and assembly of atomizer components. A heating element made (e.g., stamped) from a sheet of material and either crimped around at least a portion of a wicking element or bent to provide a preformed element desirably helps to minimize heat losses and helps to ensure that the heating element behaves predictably to be heated to the appropriate temperature.

[0136] Additionally, as noted above, the heating element may be entirely and/or selectively plated with one or more materials to enhance heating performance of the heating element. Plating all or a portion of the heating element may help to minimize heat losses. Plating may also help in concentrating the heated portion of the heating element in the proper location, providing a more efficiently heated heating element and further reducing heat losses. Selective plating may help to direct the current provided to the heating element to the proper location. Selective plating may also help to reduce the amount of plating material and/or costs associated with manufacturing the heating element.

[0137] Once the heating element is formed into the appropriate shape via one or more processes discussed below, the heating element may be crimped around the wicking element and/or bent into the proper position to receive the

wicking element. The wicking element may, in some implementations, be a fibrous wick, formed as an at least approximately flat pad or with other cross-sectional shapes such as circles, ovals, etc. A flat pad can allow for the rate that the vaporizable material is drawn into the wicking element to be controlled more precisely and/or accurately. For example, a length, width, and/or thickness can be adjusted for optimal performance. A wicking element forming a flat pad may also provide a greater transfer surface area, which may allow for increased flow of the vaporizable material from the reservoir into the wicking element for vaporization by the heating element (in other words, larger mass transfer of vaporizable material), and from the wicking element to air flowing past it. In such configurations, the heating element may contact the wicking element in multiple directions (e.g., on at least two sides of the wicking element) to increase efficiency of the process of drawing vaporizable material into the wicking element and vaporizing the vaporizable material. The flat pad may also be more easily shaped and/or cut, and thus may be more easily assembled with the heating element. In some implementations, as discussed in more detail below, the heating element may be configured to contact the wicking element on only one side of the wicking element.

[0138] The wicking element may include one or more rigid or compressible materials, such as cotton, silica, ceramic, and/or the like. Relative to some other materials, a cotton wicking element may allow for an increased and/or more controllable flow rate of vaporizable material from the reservoir of the vaporizer cartridge into the wicking element to be vaporized. In some implementations, the wicking element forms an at least approximately flat pad that is configured to contact the heating element and/or be secured between at least two portions of the heating element. For example, the at least approximately flat pad may have at least a first pair of opposing sides that are approximately parallel to one another. In some implementations, the at least approximately flat pad may also have at least a second pair of opposing sides that are approximately parallel to one another, and approximately perpendicular to the first pair of opposing sides.

[0139] FIGS. 2-5 illustrate schematic views of a heating element 100 consistent with implementations of the current subject matter. For example, FIG. 2 illustrates a schematic view of a heating element 100 in an unfolded position. As shown, in the unfolded position, the heating element 100 forms a planar heating element. The heating element 100 may be initially formed of a substrate material. The substrate material is then cut and/or stamped into the proper shape via various mechanical processes, including but not limited to stamping, laser cutting, photo-etching, chemical etching, and/or the like.

[0140] The substrate material may be made of an electrically conductive metal suitable for resistive heating. In some implementations, the heating element 100 includes a nickel-chromium alloy, a nickel alloy, stainless steel, and/or the like. As discussed below, the heating element 100 may be plated with a coating in one or more locations on a surface of the substrate material to enhance, limit, or otherwise alter the resistivity of the heating element in the one or more locations of the substrate material (which can be all or a portion of the heating element 100).

[0141] The heating element 100 includes one or more tines 102 (e.g., heating segments) located in a heating portion 104, one or more legs or connecting portions 106 (e.g., one, two, or more) located in a transition region 108, and a cartridge contact 65 located in an electrical contact region 110 and formed at an end portion of each of the one or more legs 106. The tines 102, the legs 106, and the cartridge contacts 65 may be integrally formed. For example, the tines 102, the legs 106, and the cartridge contacts 65 form portions of the heating element 100 that is stamped and/or cut from the substrate material. In some implementations, the heating element 100 also includes a heat shield 118 that extends from one or more of the legs 106 and also may be integrally formed with the tines 102, the legs 106, and the cartridge contacts 65.

[0142] In some implementations, at least a portion of the heating portion 104 of the heating element 100 is configured to interface with the vaporizable material drawn into the wicking element from the reservoir 55 of the vaporizer cartridge 52. The heating portion 104 of the heating element 100 may be

shaped, sized, and/or otherwise treated to create a desired resistance. For example, the tines 102 located in the heating portion 104 may be designed so that the resistance of the tines 102 matches the appropriate amount of resistance to influence localized heating in the heating portion 104 to more efficiently and effectively heat the vaporizable material from the wicking element. The tines 102 form thin path heating segments or traces in series and/or in parallel to provide the desired amount of resistance.

[0143] The tines 102 (e.g., traces) may include various shapes, sizes, and configurations. In some configurations, one or more of the tines 102 may be spaced to allow the vaporizable material to be wicked out of the wicking element and from there, vaporized off side edges of each of the tines 102. The shape, length, width, composition, etc., among other properties of the tines 102 may be optimized to maximize the efficiency of generating an aerosol by vaporizing vaporizable material from within the heating portion of the heating element 100 and to maximize electrical efficiency. The shape, length, width, composition, etc., among other properties of the tines 102 may additionally or alternatively be optimized to uniformly distribute heat across the length of the tines 102 (or a portion of the tines 102, such as at the heating portion 104). For example, the width of the tines 102 may be uniform or variable along a length of the tines 102 to control the temperature profile across at least the heating portion 104 of the heating element 100. In some examples, the length of the tines 102 may be controlled to achieve a desired resistance along at least a portion of the heating element 100, such as at the heating portion 104. As shown in FIGS. 2-5, the tines 102 each have the same size and shape. For example, the tines 102 include an outer edge 103 that is approximately aligned and have a generally rectangular shape, with flat or squared outer edges 103 (see also FIGS. 6-10, and) or rounded outer edges 103 (see FIGS. 11 and 12). In some implementations, one or more of the tines 102 may include outer edges 103 that are not aligned and/or may be differently sized or shaped (see FIGS. 14-19). In some implementations, the tines 102 may be evenly spaced or have variable spacing between adjacent tines 102 (see FIGS. 44A-49). The particular geometry of the tines 102 may be desirably selected to produce a particular

localized resistance for heating the heating portion 104, and to maximize performance of the heating element 100 to heat the vaporizable material and generate an aerosol.

[0144] The heating element 100 may include portions of wider and/or thicker geometry, and/or differing composition relative to the tines 102. These portions may form electrical contact areas and/or more conductive parts, and/or may include features for mounting the heating element 100 within the vaporizer cartridge. The legs 106 of the heating element 100 extend from an end of each outermost tine 102A. The legs 106 form a portion of the heating element 100 that has a width and/or thickness that is typically wider than a width of each of the tines 102. Though, in some implementations, the legs 106 have a width and/or thickness that is the same as or narrower than the width of each of the tines 102. The legs 106 couple the heating element 100 to the wick housing 98 or another portion of the cartridge 52, so that the heating element 100 is at least partially or fully enclosed by the housing 7. The legs 106 provide rigidity to encourage the heating element 100 to be mechanically stable during and after manufacturing. The legs 106 also connect the cartridge contacts 65 with the tines 102 located in the heating portion 104. The legs 106 are shaped and sized to allow the heating element 100 to maintain the electrical requirements of the heating portion 104. As shown in FIG. 5, the legs 106 space the heating portion 104 from an end of the vaporizer cartridge 52 when the heating element 100 is assembled with the vaporizer cartridge 52. As discussed in more detail below, with respect to at least FIGS. 39-55 and 60-61, the legs 106 may also include a capillary feature 198, which limits or prevents fluid from flowing out of the heating portion 104 to other portions of the heating element 100.

[0145] In some implementations, one or more of the legs 106 includes one or more locating features 116. The locating features 116 may be used for relative locating of the heating element 100 or portions thereof during and/or after assembly by interfacing with other (e.g., adjacent) components of the vaporizer cartridge 52. In some implementations, the locating features 116 may be used during or after manufacturing to properly position the substrate material for cutting and/or stamping the substrate material to form the heating element

100 or post-processing of the heating element 100. The locating features 116 may be sheared off and/or cut off before crimping or otherwise bending the heating element 100.

[0146] In some implementations, the heating element 100 includes one or more heat shields 118. The heat shields 118 form a portion of the heating element 100 that extends laterally from the legs 106. When folded and/or crimped, the heat shields 118 are positioned offset in a first direction and/or a second direction opposite the first direction in the same plane from the tines 102. When the heating element 100 is assembled in the vaporizer cartridge 52, the heat shields 118 are configured to be positioned between the tines 102 (and the heating portion 104) and the body (e.g., plastic body) of the vaporizer cartridge 52. The heat shields 118 can help to insulate the heating portion 104 from the body of the vaporizer cartridge 52. The heat shields 118 help to minimize the effects of the heat emanating from the heating portion 104 on the body of the vaporizer cartridge 52 to protect the structural integrity of the body of the vaporizer cartridge 52 and to prevent melting or other deformation of the vaporizer cartridge 52. The heat shields 118 may also help to maintain a consistent temperature at the heating portion 104 by retaining heat within the heating portion 104, thereby preventing or limiting heat losses while vaporization is occurring. In some implementations, the cartridge 52 may also or alternatively include a heat shield 118A that is separate from the heating element 100 (see FIG. 59).

[0147] As noted above, the heating element 100 includes at least two cartridge contacts 65 that form an end portion of each of the legs 106. For example, as shown in FIGS. 2-5, the cartridge contacts 65 may form the portion of the legs 106 that is folded along a fold line 107. The cartridge contacts 65 may be folded at an angle of approximately 90 degrees relative to the legs 106. In some implementations, the cartridge contacts 65 may be folded at other angles, such as at an angle of approximately 15 degrees, 25 degrees, 35 degrees, 45 degrees, 55 degrees, 65 degrees, 75 degrees or other ranges therebetween, relative to the legs 106. The cartridge contacts 65 may be folded towards or away from the heating portion 104, depending on the

implementation. The cartridge contacts 65 may also be formed on another portion of the heating element 100, such as along a length of at least one of the legs 106. The cartridge contacts 65 are configured to be exposed to the environment when assembled in the vaporizer cartridge 52 (see FIG. 10).

5 [0148] The cartridge contacts 65 may form conductive pins, tabs, posts, receiving holes, or surfaces for pins or posts, or other contact configurations. Some types of cartridge contacts 65 may include springs or other urging features to cause better physical and electrical contact between the cartridge contacts 65 on the vaporizer cartridge and receptacle contacts 62 on the
10 vaporizer body 50. In some implementations, the cartridge contacts 65 include wiping contacts that are configured to clean the connection between the cartridge contacts 65 and other contacts or power source. For example, the wiping contacts would include two parallel, but offset, bosses that frictionally engage and slide against one another in a direction that is parallel or
15 perpendicular to the insertion direction.

[0149] The cartridge contacts 65 are configured to interface with the receptacle contacts 62 disposed near a base of the cartridge receptacle of the vaporizer 10 such that the cartridge contacts 65 and the receptacle contacts 62 make electrical connections when the vaporizer cartridge 52 is inserted into and
20 coupled with the cartridge receptacle 69. The cartridge contacts 65 may electrically communicate with the power source 8 of the vaporizer device (such as via the receptacle contacts 62, etc.). The circuit completed by these electrical connections can allow delivery of electrical current to the resistive heating element to heat at least a portion of the heating element 100 and may further be
25 used for additional functions, such as for example for measuring a resistance of the resistive heating element for use in determining and/or controlling a temperature of the resistive heating element based on a thermal coefficient of resistivity of the resistive heating element, for identifying a cartridge based on one or more electrical characteristics of a resistive heating element or the other
30 circuitry of the vaporizer cartridge, etc. The cartridge contacts 65 may be treated, as explained in more detail below, to provide improved electrical

properties (e.g., contact resistance) using, for example, conductive plating, surface treatment, and/or deposited materials.

[0150] In some implementations, the heating element 100 may be processed through a series of crimping and/or bending operations to shape the heating element 100 into a desired three-dimensional shape. For example, the heating element 100 may be preformed to receive or crimped about a wicking element 70 to secure the wicking element between at least two portions (e.g., approximately parallel portions) of the heating element 100 (such as between opposing portions of the heating portion 104). To crimp the heating element 100, the heating element 100 may be bent along fold lines 120 towards one another. Folding the heating element 100 along fold lines 120 forms a platform tine portion 124 defined by the region between the fold lines 120 and side tine portions 126 defined by the region between the fold lines 120 and the outer edges 103 of the tines 102. The platform tine portion 124 is configured to contact one end of the wicking element 70. The side tine portions 126 are configured to contact opposite sides of the wicking element 70. The platform tine portion 124 and the side tine portions 126 form a pocket that is shaped to receive the wicking element 70 and/or conform to the shape of at least a portion of the wicking element 70. The pocket allows the wicking element 70 to be secured and retained by the heating element 100 within the pocket. The platform tine portion 124 and the side tine portions 126 contact the wicking element 70 to provide a multi-dimensional contact between the heating element 100 and the wicking element 70. Multi-dimensional contact between the heating element 100 and the wicking element 70 provides for a more efficient and/or faster transfer of the vaporizable material from the reservoir 55 of the vaporizer cartridge 52 to the heating portion 104 (via the wicking element 70) to be vaporized.

[0151] In some implementations, portions of the legs 106 of the heating element 100 may also be bent along fold lines 122 away from one another. Folding the portions of the legs 106 of the heating element 100 along fold lines 122 away from one another locates the legs 106 at a position spaced away from the heating portion 104 (and tines 102) of the heating element 100 in a first

and/or second direction opposite the first direction (e.g., in the same plane). Thus, folding the portions of the legs 106 of the heating element 100 along fold lines 122 away from one another spaces the heating portion 104 from the body of the vaporizer cartridge 52. FIG. 3 illustrates a schematic of the heating element 100 that has been folded along the fold lines 120 and fold lines 122 about the wicking element 70. As shown in FIG. 3, the wicking element is positioned within the pocket formed by folding the heating element 100 along fold lines 120 and 122.

[0152] In some implementations, the heating element 100 may also be bent along fold lines 123. For example, the cartridge contacts 65 may be bent towards one another (into and out of the page shown in FIG. 4) along the fold lines 123. The cartridge contacts 65 may be exposed to the environment to contact the receptacle contacts, while the remaining portions of the heating element 100 are positioned within the vaporizer cartridge 52 (see FIGS. 5 and 10).

[0153] In use, when a user puffs on the mouthpiece 21 of the vaporizer cartridge 52 when the heating element 100 is assembled into the vaporizer cartridge 52, air flows into the vaporizer cartridge and along an air path. In association with the user puff, the heating element 100 may be activated, e.g., by automatic detection of the puff via a pressure sensor, by detection of a pushing of a button by the user, by signals generated from a motion sensor, a flow sensor, a capacitive lip sensor, and/or another approach capable of detecting that a user is taking or about to be taking a puff or otherwise inhaling to cause air to enter the vaporizer device 10 and travel at least along the air path. Power can be supplied from the vaporizer device to the heating element 100 at the cartridge contacts 65, when the heating element 100 is activated.

[0154] When the heating element 100 is activated, a temperature increase results due to current flowing through the heating element 100 to generate heat. The heat is transferred to some amount of the vaporizable material through conductive, convective, and/or radiative heat transfer such that at least a portion of the vaporizable material vaporizes. The heat transfer can occur to vaporizable material in the reservoir and/or to vaporizable material drawn into

the wicking element 70 retained by the heating element 100. In some implementations, the vaporizable material can vaporize along one or more edges of the tines 102, as mentioned above. The air passing into the vaporizer device flows along the air path across the heating element 100, stripping away the vaporized vaporizable material from the heating element 100. The vaporized vaporizable material can be condensed due to cooling, pressure changes, etc., such that it exits the mouthpiece 21 as an aerosol for inhalation by a user.

[0155] As noted above, the heating element 100 may be made of various materials, such as nichrome, stainless steel, or other resistive heater materials. Combinations of two or more materials may be included in the heating element 100, and such combinations can include both homogeneous distributions of the two or more materials throughout the heating element or other configurations in which relative amounts of the two or more materials are spatially heterogeneous. For example, the tines 102 may have portions that are more resistive and thereby be designed to grow hotter than other sections of the tines or heating element 100. In some implementations, at least the tines 102 (such as within the heating portion 104) may include a material that has high conductivity and heat resistance.

[0156] The heating element 100 may be entirely or selectively plated with one or more materials. Since the heating element 100 is made of a thermally and/or electrically conductive material, such as stainless steel, nichrome, or other thermally and/or electrically conductive alloy, the heating element 100 may experience electrical or heating losses in the path between the cartridge contacts 65 and the tines 102 in the heating portion 104 of the heating element 100. To help to reduce heating and/or electrical losses, at least a portion of the heating element 100 may be plated with one or more materials to reduce resistance in the electrical path leading to the heating portion 104. In some implementations consistent with the current subject matter, it is beneficial for the heating portion 104 (e.g., the tines 102) to remain unplated, with at least a portion of the legs 106 and/or cartridge contacts 65 being plated with a plating material that reduces resistance (e.g., either or both of bulk and contact resistance) in those portions.

[0157] For example, the heating element 100 may include various portions that are plated with different materials. In another example, the heating element 100 may be plated with layered materials. Plating at least a portion of the heating element 100 helps to concentrate current flowing to the heating portion 104 to reduce electrical and/or heat losses in other portions of the heating element 100. In some implementations, it is desirable to maintain a low resistance in the electrical path between the cartridge contacts 65 and the tines 102 of the heating element 100 to reduce electrical and/or heat losses in the electrical path and to compensate for the voltage drop that is concentrated across the heating portion 104.

[0158] In some implementations, the cartridge contacts 65 may be selectively plated. Selectively plating the cartridge contacts 65 with certain materials may minimize or eliminate contact resistance at the point where the measurements are taken and the electrical contact is made between the cartridge contacts 65 and the receptacle contacts. Providing a low resistance at the cartridge contacts 65 can provide more accurate voltage, current, and/or resistance measurements and readings, which can be beneficial for accurately determining the current actual temperature of the heating portion 104 of the heating element 100.

[0159] In some implementations, at least a portion of the cartridge contacts 65 and/or at least a portion of the legs 106 may be plated with one or more outer plating materials 150. For example, at least a portion of the cartridge contacts 65 and/or at least a portion of the legs 106 may be plated with at least gold, or another material that provides low contact resistance, such as platinum, palladium, silver, copper, or the like.

[0160] In some implementations, in order for the low resistance outer plating material to be secured to the heating element 100, a surface of the heating element 100 may be plated with an adhering plating material. In such configurations, the adhering plating material may be deposited onto the surface of the heating element 100 and the outer plating material may be deposited onto the adhering plating material, defining first and second plating layers, respectively. The adhering plating material includes a material with adhesive

properties when the outer plating material is deposited onto the adhering plating material. For example, the adhering plating material may include nickel, zinc, aluminum, iron, alloys thereof, or the like. FIGS. 36-38 illustrate examples of the heating element 100 in which the cartridge contacts 65 have been selectively
5 plated with the adhering plating material and/or the outer plating material.

[0161] In some implementations, the surface of the heating element 100 may be primed for the outer plating material to be deposited onto the heating element 100 using non-plating priming, rather than by plating the surface of the heating element 100 with the adhering plating material. For example, the
10 surface of the heating element 100 may be primed using etching rather than by depositing the adhering plating material.

[0162] In some implementations, all or a portion of the legs 106 and the cartridge contacts 65 may be plated with the adhering plating material and/or the outer plating material. In some examples, the cartridge contacts 65 may
15 include at least a portion that has an outer plating material having a greater thickness relative to the remaining portions of the cartridge contacts 65 and/or the legs 106 of the heating element 100. In some implementations, the cartridge contacts 65 and/or the legs 106 may have a greater thickness relative to the tines 102 and/or the heating portion 104.

[0163] In some implementations, rather than forming the heating element 100 of a single substrate material and plating the substrate material, the heating element 100 may be formed of various materials that are coupled together (e.g., via laser welding, diffusion processes, etc.). The materials of each portion of the heating element 100 that is coupled together may be selected to provide a low
20 or no resistance at the cartridge contacts 65 and a high resistance at the tines 102 or heating portion 104 relative to the other portions of the heating element 100.

[0164] In some implementations, the heating element 100 may be electroplated with silver ink and/or spray coated with one or more plating materials, such as the adhering plating material and the outer plating material.
30

[0165] As mentioned above, the heating element 100 may include various shapes, sizes, and geometries to more efficiently heat the heating portion 104

of the heating element 100 and more efficiently vaporize the vaporizable material.

[0166] FIGS. 6-10 illustrate an example of a heating element 100 consistent with implementations of the current subject matter. As shown, the heating element 100 includes the one or more tines 102 located in the heating portion 104, the one or more legs 106 extending from the tines 102, the cartridge contacts 65 formed at the end portion of each of the one or more legs 106, and the heat shields 118 extending from the one or more legs 106. In this example, each of the tines 102 have the same or similar shape and size. The tines 102 have a squared and/or flat outer edge 103. In FIGS. 6-9, the tines 102 have been crimped about a wicking element 70 (e.g., a flat pad) to secure the wicking element 70 within the pocket of the tines 102.

[0167] FIGS. 11-12 illustrate another example of a heating element 100 consistent with implementations of the current subject matter in an unbent position (FIG. 11) and a bent position (FIG. 12). As shown, the heating element 100 includes the one or more tines 102 located in the heating portion 104, the one or more legs 106 extending from the tines 102, the cartridge contacts 65 formed at the end portion of each of the one or more legs 106, and the heat shields 118 extending from the one or more legs 106. In this example, each of the tines 102 have the same or similar shape and size and the tines 102 have a rounded and/or semi-circular outer edge 103.

[0168] FIG. 13 illustrates another example of a heating element 100 in a bent position consistent with implementations of the current subject matter that is similar to the example heating element 100 shown in FIGS. 11-12, but in this example, each of the tines 102 have the same or similar shape and size and the tines 102 have a squared and/or flat outer edge 103.

[0169] FIGS. 14-19 illustrate other examples of the heating element 100 in which at least one of the tines 102 has a size, shape, or position that is different from the remaining tines 102. For example, as shown in FIGS. 14-15, the heating element 100 includes the one or more tines 102 located in the heating portion 104, the one or more legs 106 extending from the tines 102, and the cartridge contacts 65 formed at the end portion of each of the one or more legs

106. In this example, the tines 102 include a first set of tines 105A and a second set of tines 105B. The first and second sets of tines 105A, 105B are offset from one another. For example, the outer edges 103 of the first and second sets of tines 105A, 105B are not aligned with one another. As shown in FIG. 15, when the heating portion 104 is in the bent position, the first set of tines 105A appear to be shorter than the second set of tines 105B in the first portion of the heating element 100, and the first set of tines 105A appear to be longer than the second set of tines 105B in the second portion of the heating element 100.

[0170] As shown in FIGS. 16-17, the heating element 100 includes the one or more tines 102 located in the heating portion 104, the one or more legs 106 extending from the tines 102, and the cartridge contacts 65 formed at the end portion of each of the one or more legs 106. In this example, the tines 102 include a first set of tines 109A and a second set of tines 109B. The first and second sets of tines 109A, 109B are offset from one another. For example, the outer edges 103 of the first and second sets of tines 109A, 109B are not aligned with one another. Here, the second set of tines 109B includes a single outermost tine 102A. As shown in FIGS. 16-17, when the heating portion 104 is in the bent position, the first set of tines 109A appear to be longer than the second set of tines 109B. In addition, in FIGS. 16-17, the tines 102 are not bent. Rather, the tines 102 are located on a first portion and a second portion of the heating element 100 that is positioned approximately parallel to and opposite the first portion. The first set of tines positioned on the first portion of the heating element 100 are separated from the second set of tines positioned on the second portion of the heating element 100 by a platform portion 130 that is positioned between and spaced from both of the first and second set of tines. The platform portion 130 is configured to contact an end of the wicking element 70. The platform portion 130 includes a cutout portion 132. The cutout portion 132 may provide additional edges along which the vaporizable material can vaporize from when the heating element 100 is activated.

[0171] As shown in FIGS. 18-19, the heating element 100 includes the one or more tines 102 located in the heating portion 104, the one or more legs 106 extending from the tines 102, and the cartridge contacts 65 formed at the end

portion of each of the one or more legs 106. In this example, the tines 102 include a first set of tines 109A and a second set of tines 109B. The first and second sets of tines 109A, 109B are offset from one another. For example, the outer edges 103 of the first and second sets of tines 109A, 109B are not aligned with one another. Here, each of the first and the second set of tines 109A, 109B includes two tines 102. As shown in FIGS. 18-19, when the heating portion 104 is in the bent position, the first set of tines 109A appear to be shorter than the second set of tines 109B. In addition, in FIGS. 18-19, the tines 102 are not bent. Rather, the tines 102 are located on a first portion and a second portion (that is parallel and opposite the first portion) of the heating element 100. The first set of tines positioned on the first portion are separated from the second set of tines positioned on the second portion by a platform portion that is positioned between and spaced from both of the first and second set of tines. The platform portion is configured to contact an end of the wicking element 70. The platform portion includes a cutout portion. The cutout portion may provide additional edges along which the vaporizable material can vaporize from when the heating element 100 is activated.

[0172] FIGS. 20-25 illustrate another example of a heating element 100 consistent with implementations of the current subject matter in an unbent position (FIG. 20) and a bent position (FIGS. 21-25). As shown, the heating element 100 includes the one or more tines 102 located in the heating portion 104, the one or more legs 106 extending from the tines 102, the cartridge contacts 65 formed at the end portion of each of the one or more legs 106, and the heat shields 118 extending from the one or more legs 106. In this example, the heating element 100 is configured to be crimped around and/or bent to receive a cylindrical-shaped wicking element 70 or a wicking element 70 having a circular cross-section. Each of the tines 102 include apertures 140. The apertures 140 may provide additional edges along which the vaporizable material can vaporize from when the heating element 100 is activated. The apertures 140 also reduce the amount of material used to form the heating element 100, reducing the weight of the heating element 100 and the amount of material used for the heating element 100, thereby reducing material costs.

[0173] FIGS. 26-35 illustrate a heating element 100 consistent with implementations of the current subject matter in which the heating element 100 is pressed against one side of the wicking element 70. As shown, the heating element 100 includes the one or more tines 102 located in the heating portion 104, the one or more legs 106 extending from the tines 102, and the cartridge contacts 65 formed at the end portion of each of the one or more legs 106. In these examples, the legs 106 and the cartridge contacts 65 are configured to bend in a third direction, rather than in a first-second direction that is perpendicular to the third direction. In such a configuration, the tines 102 of the heating portion 104 form a planar platform that faces outwardly from the heating element 100 and is configured to be pressed against the wicking element 70 (e.g., on one side of the wicking element 70).

[0174] FIGS. 28-31 illustrate several examples of the heating element 100 consistent with implementations of the current subject matter including tines 102 configured in various geometries. As mentioned above, the tines 102 form a planar platform that is pressed against one side of the wicking element 70 in use. The legs 106, rather than the tines 102, bend in the bent position.

[0175] FIG. 32 illustrates an example of the heating element 100 shown in FIG. 28 assembled with a component of the vaporizer cartridge 52, such as a wick housing (e.g., the wick housing 98) that houses the wicking element 70 and the heating element 100 and FIG. 33 illustrates the heating element 100 assembled with an example vaporizer cartridge 52 consistent with implementations of the current subject matter. As shown the cartridge contacts 65 are bent towards one another in a lateral direction.

[0176] FIGS. 34 and 35 illustrate another example of the heating element 100 in which the tines 102 form a platform that is configured to be pressed against the wicking element 70. Here, the legs 106 may form spring-like structures that force the tines 102 to be pressed against the wicking element 70 when a lateral inward force is applied to each of the legs 106. For example, FIG. 35 illustrates an example of the tines 102 being pressed against the wicking element 70 when power (e.g., a current) is supplied to the heating element 100, such as via the cartridge contacts 65.

[0177] FIGS. 39-43 illustrate another example of a heating element 100 consistent with implementations of the current subject matter. As shown, the heating element 100 includes the one or more tines 102 located in the heating portion 104, the one or more legs 106 extending from the tines 102, and the cartridge contacts 65 formed at the end portion and/or as part of each of the one or more legs 106. In this example, each of the tines 102 have the same or similar shape and size, and are spaced apart from one another at equal distances. The tines 102 have a rounded outer edge 103.

[0178] As shown in FIG. 42, the tines 102 have been crimped about a wicking element 70 (e.g., a flat pad) to secure the wicking element 70 within the pocket formed by the tines 102. For example, the tines 102 may be folded and/or crimped to define the pocket in which the wicking element 70 resides. The tines 102 include a platform tine portion 124 and side tine portions 126. The platform tine portion 124 is configured to contact one side of the wicking element 70 and the side tine portions 126 are configured to contact other opposite sides of the wicking element 70. The platform tine portion 124 and the side tine portions 126 form the pocket that is shaped to receive the wicking element 70 and/or conform to the shape of at least a portion of the wicking element 70. The pocket allows the wicking element 70 to be secured and retained by the heating element 100 within the pocket.

[0179] In some implementations, the side tine portions 126 and the platform tine portion 124 retain the wicking element 70 via compression (e.g., at least a portion of the wicking element 70 is compressed between the opposing side tine portions 126 and/or the platform tine portion 124). The platform tine portion 124 and the side tine portions 126 contact the wicking element 70 to provide a multi-dimensional contact between the heating element 100 and the wicking element 70. Multi-dimensional contact between the heating element 100 and the wicking element 70 provides for a more efficient and/or faster transfer of the vaporizable material from the reservoir 55 of the vaporizer cartridge 52 to the heating portion 104 (via the wicking element 70) to be vaporized.

[0180] The one or more legs 106 of the example heating element 100 shown in FIGS. 39-43 includes four legs 106. Each of the legs 106 may include and/or

define a cartridge contact 65 that is configured to contact a corresponding receptacle contact 62 of the vaporizer 10. In some implementations, each pair of legs 106 (and the cartridge contacts 65) may contact a single receptacle contact 62. The legs 106 may be spring-loaded to allow the legs 106 to maintain contact with the receptacle contacts 62. The legs 106 may include a portion that extends along a length of the legs 106 that is curved to help to maintain contact with the receptacle contacts 62. Spring-loading the legs 106 and/or the curvature of the legs 106 may help to increase and/or maintain consistent pressure between the legs 106 and the receptacle contacts 62. In some implementations, the legs 106 are coupled with a support 97 that helps to increase and/or maintain consistent pressure between the legs 106 and the receptacle contacts 62. The support 97 may include plastic, rubber, or other materials to help maintain contact between the legs 106 and the receptacle contacts 62. In some implementations, the support 97 is formed as a part of the legs 106.

[0181] The legs 106 may contact one or more wiping contacts that are configured to clean the connection between the cartridge contacts 65 and other contacts or power source. For example, the wiping contacts would include at least two parallel, but offset, bosses that frictionally engage and slide against one another in a direction that is parallel or perpendicular to the insertion direction.

[0182] As shown in FIGS. 39-55, the one or more legs 106 of the heating element 100 includes four legs 106. FIGS. 48-49, 54A-55B, and 66-67 show examples of the heating element 100 in the unbent position. As shown, the heating element 100 has an H-shape, defined by the four legs 106 and the tines 102. This configuration allows for resistance across the heater to be measured more accurately, and reduces variability in the resistance measurements, thereby allowing for more efficiency aerosol generation and higher quality aerosol generation. The heating element 100 includes two pairs of opposing legs 106. The tines 102 are coupled (e.g., intersect) with each of the pairs of opposing legs 106 at or near a center of each of the pairs of opposing legs 106. The heating portion 104 is positioned between the pairs of opposing legs 106.

[0183] FIG. 66 illustrates an example of the heating element 100 before the heating element 100 has been stamped and/or otherwise formed from a substrate material 177. Excess substrate material 177A may be coupled with the heating element 100 at one, two, or more coupling locations 177B. For example, as shown, the excess substrate material 177A may be coupled with the heating element 100 at two coupling locations 177B, near opposing lateral ends 173 of the platform portion of the heating element and/or heating portion 104 of the heating element 100. In some implementations, the heating element 100 may be first be stamped from the substrate material 177, and then removed from the excess substrate material 177A at the coupling locations 177B (e.g., by twisting, pulling, stamping, cutting, etc., the heating element 100).

[0184] As noted above, to crimp the heating element 100, the heating element 100 may be bent or otherwise folded along fold lines 123, 122A, 122B, 120 towards or away from one another (see, for example, FIG. 55A). Though the fold lines are illustrated in FIG. 55A, the example heating elements 100 described and shown in FIGS. 1D-72C may also be crimped, folded, or otherwise bent along the fold lines. Folding the heating element 100 along fold lines 120 forms a platform tine portion 124 defined by the region between the fold lines 120 and/or between side tine portions 126 defined by the region between the fold lines 120 and the outer edges 103 of the tines 102. The platform tine portion 124 may contact one end and/or support one end of the wicking element 70. The side tine portions 126 may contact opposite sides of the wicking element 70. The platform tine portion 124 and the side tine portions 126 define an interior volume of the heating element that forms a pocket shaped to receive the wicking element 70 and/or conform to the shape of at least a portion of the wicking element 70. The interior volume allows the wicking element 70 to be secured and retained by the heating element 100 within the pocket. The platform tine portion 124 and the side tine portions 126 contact the wicking element 70 to provide a multi-dimensional contact between the heating element 100 and the wicking element 70. Multi-dimensional contact between the heating element 100 and the wicking element 70 provides for a more efficient and/or faster transfer of the vaporizable material from the reservoir 55

of the vaporizer cartridge 52 to the heating portion 104 (via the wicking element 70) to be vaporized.

[0185] In some implementations, portions of the legs 106 of the heating element 100 may also be bent along fold lines 122A, 122B. Folding the portions of the legs 106 of the heating element 100 along fold lines 122 away from one another locates the legs 106 at a position spaced away from the heating portion 104 (and tines 102) of the heating element 100 in a first and/or second direction opposite the first direction (e.g., in the same plane). Thus, folding the portions of the legs 106 of the heating element 100 along fold lines 122 away from one another spaces the heating portion 104 from the body of the vaporizer cartridge 52. Folding the portions of the legs 106 along the fold lines 122A, 122B forms a bridge 185. In some implementations, the bridge 185 helps to reduce or eliminate overflow of vaporizable material from the heating portion 104, such as due to capillary action. The bridge 185 also helps to isolate the heating portion 104 from the legs 106, so that the heat generated at the heating portion 104 does not reach the legs 106. This also helps to localize heating of the heating element 100 to within the heating portion 104.

[0186] In some implementations, the heating element 100 may also be bent along fold lines 123 to define the cartridge contacts 65. The cartridge contacts 65 may be exposed to the environment or may otherwise be accessible (and may be positioned within an interior of a portion of the cartridge, such as the outer shell) to contact the receptacle contacts, while other portions, such as the heating portion 104 of the heating element 100, are positioned within an inaccessible part of the vaporizer cartridge 52, such as the wick housing.

[0187] In some implementations, the legs 106 include retainer portions 99 that are configured to be bent around at least a portion of a wick housing 98 that surrounds at least a portion of the wicking element 70 and heating element 100 (such as the heating portion 104). The retainer portions 99 form an end of the legs 106. The retainer portions 99 help to secure the heating element 100 and wicking element 70 to the wick housing 98 (and the vaporizer cartridge 52). The retainer portions 99 may alternatively be bent away from at least a portion of the wick housing 98.

[0188] FIGS. 44A-49 illustrate another example of a heating element 100 consistent with implementations of the current subject matter. As shown, the heating element 100 includes the one or more tines 102 located in the heating portion 104, the one or more legs 106 extending from the tines 102, and the cartridge contacts 65 formed at the end portion and/or as part of each of the one or more legs 106.

[0189] The tines 102 may be folded and/or crimped to define the pocket in which a wicking element 70 (e.g., a flat pad) resides. The tines 102 include a platform tine portion 124 and side tine portions 126. The platform tine portion 124 is configured to contact one side of the wicking element 70 and the side tine portions 126 are configured to contact other opposite sides of the wicking element 70. The platform tine portion 124 and the side tine portions 126 form the pocket that is shaped to receive the wicking element 70 and/or conform to the shape of at least a portion of the wicking element 70. The pocket allows the wicking element 70 to be secured and retained by the heating element 100 within the pocket.

[0190] In this example, the tines 102 have various shapes and size, and are spaced apart from one another at the same or varying distances. For example, as shown, each of the side tine portions 126 includes at least four tines 102. In a first pair 170 of adjacent tines 102, each of the adjacent tines 102 is spaced apart at an equal distance from an inner region 176 positioned near the platform tine portion 124 to an outer region 178 positioned near the outer edge 103. In a second pair 172 of adjacent tines 102, the adjacent tines 102 are spaced apart by a varying distance from the inner region 176 to the outer region 178. For example, the adjacent tines 102 of the second pair 172 are spaced apart by a width that is greater at the inner region 176 than at the outer region 178. These configurations may help to maintain a constant and uniform temperature along the length of the tines 102 of the heating portion 104. Maintaining a constant temperature along the length of the tines 102 may provide higher quality aerosol, as the maximum temperature is more uniformly maintainable across the entire heating portion 104.

[0191] As noted above, each of the legs 106 may include and/or define a cartridge contact 65 that is configured to contact a corresponding receptacle contact 62 of the vaporizer 10. In some implementations, each pair of legs 106 (and the cartridge contacts 65) may contact a single receptacle contact 62. In some implementations, the legs 106 include retainer portions 99 that are configured to be bent and generally extend away from the heating portion 104. The retainer portions 99 are configured to be positioned within a corresponding recess in the wick housing 98. The retainer portions 99 form an end of the legs 106. The retainer portions 99 help to secure the heating element 100 and wicking element 70 to the wick housing 98 (and the vaporizer cartridge 52). The retainer portions 99 may have a tip portion 99A that extends from an end of the retainer portion 99 towards the heating portion 104 of the heating element 100. This configuration reduces the likelihood that the retainer portion will contact another portion of the cartridge 52, or a cleaning device for cleaning the cartridge 52.

[0192] The outer edge 103 of the tines 102 in the heating portion 104 may include a tab 180. The tab 180 may include one, two, three, four, or more tabs 180. The tab 180 may extend outwardly from the outer edge 103 and extend away from a center of the heating element 100. For example, the tab 180 may be positioned along an edge of the heating element 100 surrounding an internal volume defined by at least the side tine portions 126 for receiving the wicking element 70. The tab 180 may extend outwardly away from the internal volume of the wicking element 70. The tab 180 may also extend away in a direction opposite the platform tine portion 124. In some implementations, tabs 180 positioned on opposing sides of the internal volume of the wicking element 70 may extend away from one another. This configuration helps to widen the opening leading to the internal volume of the wicking element 70, thereby helping to reduce the likelihood that the wicking element 70 will catch, tear, and/or become damaged when assembled with the heating element 100. Due to the material of the wicking element 70, the wicking element 70 may easily catch, tear, and/or otherwise become damaged when assembled (e.g., positioned within or inserted into) with the heating element 100. Contact

between the wicking element 70 and the outer edge 103 of the tines 102 may also cause damage to the heating element. The shape and/or positioning of the tab 180 may allow the wicking element 70 to more easily be positioned within or into the pocket (e.g., the internal volume of the heating element 100) formed by the tines 102, thereby preventing or reducing the likelihood that the wicking element 70 and/or the heating element will be damaged. Thus, the tabs 180 help to reduce or prevent damage caused to the heating element 100 and/or the wicking element 70 upon entry of the wicking element 70 into thermal contact with the heating element 100. The shape of the tab 180 also helps to minimize impact on the resistance of the heating portion 104.

[0193] In some implementations, at least a portion of the cartridge contacts 65 and/or at least a portion of the legs 106 may be plated with one or more outer plating materials 150 to reduce contact resistance at the point where the heating element 100 contacts the receptacle contacts 69.

[0194] FIGS. 50A-55B illustrate another example of a heating element 100 consistent with implementations of the current subject matter. As shown, the heating element 100 includes the one or more tines 102 located in the heating portion 104, the one or more legs 106 extending from the tines 102, and the cartridge contacts 65 formed at the end portion and/or as part of each of the one or more legs 106.

[0195] The tines 102 may be folded and/or crimped to define the pocket in which a wicking element 70 (e.g., flat pad) resides. The tines 102 include a platform tine portion 124 and side tine portions 126. The platform tine portion 124 is configured to contact one side of the wicking element 70 and the side tine portions 126 are configured to contact other opposite sides of the wicking element 70. The platform tine portion 124 and the side tine portions 126 form the pocket that is shaped to receive the wicking element 70 and/or conform to the shape of at least a portion of the wicking element 70. The pocket allows the wicking element 70 to be secured and retained by the heating element 100 within the pocket.

[0196] In this example, the tines 102 have the same shape and size and are spaced apart from one another at equal distances. Here, the tines 102 include a

first side tine portion 126A and a second side tine portion 126B that are spaced apart by the platform tine portion 124. Each of the first and second side tine portions 126A, 126B include an inner region 176 positioned near the platform tine portion 124 to an outer region 178 positioned near the outer edge 103. At the outer region 178, the first side tine portion 126A is positioned approximately parallel to the second tine portion 126A. At the inner region 176, the first side tine portion 126A is positioned offset from the second tine portion 126B and the first and second side tine portions 126A, 126B are not parallel. This configuration may help to maintain a constant and uniform temperature along the length of the tines 102 of the heating portion 104. Maintaining a constant temperature along the length of the tines 102 may provide higher quality aerosol, as the maximum temperature is more uniformly maintainable across the entire heating portion 104.

[0197] As noted above, each of the legs 106 may include and/or define a cartridge contact 65 that is configured to contact a corresponding receptacle contact 62 of the vaporizer 10. In some implementations, each pair of legs 106 (and the cartridge contacts 65) may contact a single receptacle contact 62. In some implementations, the legs 106 include retainer portions 99 that are configured to be bent and generally extend away from the heating portion 104. The retainer portions 99 are configured to be positioned within a corresponding recess in the wick housing 98. The retainer portions 99 form an end of the legs 106. The retainer portions 99 help to secure the heating element 100 and wicking element 70 to the wick housing 98 (and the vaporizer cartridge 52). The retainer portions 99 may have a tip portion 99A that extends from an end of the retainer portion 99 towards the heating portion 104 of the heating element 100. This configuration reduces the likelihood that the retainer portion will contact another portion of the cartridge 52, or a cleaning device for cleaning the cartridge 52.

[0198] The outer edge 103 of the tines 102 in the heating portion 104 may include a tab 180. The tab 180 may extend outwardly from the outer edge 103 and extend away from a center of the heating element 100. The tab 180 may be shaped to allow the wicking element 70 to more easily be positioned within the

pocket formed by the tines 102, thereby preventing or reducing the likelihood that the wicking element 70 will get caught on the outer edge 103. The shape of the tab 180 helps to minimize impact on the resistance of the heating portion 104.

5 [0199] In some implementations, at least a portion of the cartridge contacts 65 and/or at least a portion of the legs 106 may be plated with one or more outer plating materials 150 to reduce contact resistance at the point where the heating element 100 contacts the receptacle contacts 69.

10 [0200] FIGS. 56-57 illustrate an example of the atomizer assembly 26, with the heating element 100 assembled with the wick housing 98, and FIG. 58 illustrates an exploded view of the atomizer assembly 26, consistent with implementations of the current subject matter. The wick housing 98 may be made of plastic, polypropylene, and the like. The wick housing 98 includes four recesses 192 in which at least a portion of each of the legs 106 of the heating
15 element 100 may be positioned and secured. As shown, the wick housing 98 also includes an opening 193 providing access to an internal volume 194, in which at least the heating portion 104 of the heating element 100 and the wicking element 70 are positioned.

20 [0201] The wick housing 98 may also include a separate heat shield 118A, which is shown in FIG. 59. The heat shield 118A is positioned within the internal volume 194 within the wick housing 98 between the walls of the wick housing 98 and the heating element 100. The heat shield 118A is shaped to at least partially surround the heating portion 104 of the heating element 100 and to space the heating element 100 from the side walls of the wick housing 98. The
25 heat shield 118A can help to insulate the heating portion 104 from the body of the vaporizer cartridge 52 and/or the wick housing 98. The heat shield 118A helps to minimize the effects of the heat emanating from the heating portion 104 on the body of the vaporizer cartridge 52 and/or the wick housing 98 to protect the structural integrity of the body of the vaporizer cartridge 52 and/or the wick
30 housing 98 and to prevent melting or other deformation of the vaporizer cartridge 52 and/or the wick housing 98. The heat shield 118A may also help to

maintain a consistent temperature at the heating portion 104 by retaining heat within the heating portion 104, thereby preventing or limiting heat losses.

[0202] The heat shield 118A includes one or more slots 190 (e.g., three slots) at one end that align with one or more slots (e.g., one, two, three, four, five, six, or seven or more slots) 196 formed in a portion of the wick housing 98 opposite the opening 193, such as a base of the wick housing 98 (see FIGS. 57 and 69). The one or more slots 190, 196 allow for the escape of pressure caused by the flow of liquid vaporizable material within the heater portion 104 and vaporization of vaporizable material, without affecting liquid flow of the vaporizable material.

[0203] In some implementations, flooding may occur between the heating element 100 (e.g., the legs 106) and an outer wall of the wick housing 98 (or between portions of the heating element 100). For example, liquid vaporizable material may build up due to capillary pressure between the legs 106 of the heating element 100 and the outer wall of the wick housing 98, as indicated by liquid path 199. In such cases, there may be sufficient capillary pressure to draw the liquid vaporizable material out of the reservoir and/or the heating portion 104. To help limit and/or prevent liquid vaporizable material from escaping the internal volume of the wick housing 98 (or the heating portion 104), the wick housing 98 and/or the heating element 100 may include a capillary feature that causes an abrupt change in capillary pressure, thereby forming a liquid barrier that prevents the liquid vaporizable material from passing the feature without the use of an additional seal (e.g., a hermetic seal). The capillary feature may define a capillary break, formed by a sharp point, a bend, a curved surface, or other surface in the wick housing 98 and/or the heating element 100. The capillary feature allows a conductive element (e.g., the heating element 100) to be positioned within both a wet and dry region.

[0204] The capillary feature may be positioned on and/or form a part of the heating element 100 and/or the wick housing 98 and causes an abrupt change in capillary pressure. For example, the capillary feature may include a bend, sharp point, curved surface, angled surface, or other surface feature that causes an abrupt change in capillary pressure between the heating element

and the wick housing, along a length of the heating element, or another component of the vaporizer cartridge. The capillary feature may also include a protrusion or other portion of the heating element and/or wick housing that widens a capillary channel, such as a capillary channel formed between portions of the heating element, between the heating element and the wick housing, and the like, that is sufficient to reduce the capillary pressure within the capillary channel (e.g., the capillary feature spaces the heating element from the wick housing) such that the capillary channel does not draw liquid into the capillary channel. Thus, the capillary feature prevents or limits liquid from flowing along a liquid path beyond the capillary feature, due at least in part to the abrupt change and/or reduction in capillary pressure. The size and/or shape of the capillary feature (e.g., the bend, sharp point, curved surface, angled surface, protrusion, and the like) may be a function of a wetting angle formed between materials, such as the heating element and wick housing, or other walls of a capillary channel formed between components, may be a function of a material of the heating element and/or the wick housing or other component, and/or may be a function of a size of a gap formed between two components, such as the heating element and/or wick housing defining the capillary channel, among other properties.

[0205] As an example, FIGS. 60A and 60B illustrate the wick housing 98 having a capillary feature 198 that causes an abrupt change in capillary pressure. The capillary feature 198 prevents or limits liquid from flowing along the liquid path 199 beyond the capillary feature 198, and helps to prevent liquid from pooling between the legs 106 and the wick housing 98. The capillary feature 198 on the wick housing 98 spaces the heating element 100 (e.g., a component made of metal, etc.) away from the wick housing 98 (e.g., a component made of plastic, etc.), thereby reducing the capillary strength between the two components. The capillary feature 198 shown in FIGS. 60A and 60B also includes a sharp edge at an end of an angled surface of the wick housing that limits or prevents liquid from flowing beyond the capillary feature 198.

[0206] As shown in FIG. 60B, the legs 106 of the heating element 100 may also be angled inwardly towards the interior volume of the heating element 100 and/or wick housing 98. The angled legs 106 may form a capillary feature that helps to limit or prevent liquid from flowing over an outer surface of the heating element and along the legs 106 of the heating element 100.

[0207] As another example, the heating element 100 may include a capillary feature (e.g., a bridge 185) that is formed with the one or more legs 106 and spaces the legs 106 away from the heating portion 104 (See FIGS. 39-55). The bridge 185 may be formed by folding the heating element 100 along the fold lines 120, 122. In some implementations, the bridge 185 helps to reduce or eliminate overflow of vaporizable material from the heating portion 104, such as due to capillary action. In some examples, such as the example heating elements 100 shown in FIGS. 50A-55B, the bridge 185 is angled and/or includes a bend to help limit fluid flow out of the heating portion 104.

[0208] As another example, the heating element 100 may include a capillary feature 198 that defines a sharp point to causes an abrupt change in capillary pressure, thereby preventing liquid vaporizable material from flowing beyond the capillary feature 198. FIG. 61 shows an example of the heating element 100 having the capillary feature 198, consistent with implementations of the current subject matter. As shown in FIG. 61, the capillary feature 198 may form an end of the bridge 185 that extends outwardly away from the heating portion by a distance that is greater than a distance between the legs 106 and the heating portion 104. The end of the bridge 185 may be a sharp edge to further help prevent liquid vaporizable material from passing to the legs 106 and/or out of the heating portion 104, thereby reducing leaking and increasing the amount of vaporizable material that remains within the heating portion 104.

[0209] FIGS. 62-63 illustrate a variation of the heating element 100 shown in FIGS. 44A-49. In this variation of the heating element 100, the legs 106 of the heating element 100 include a bend at an inflection region 111. The bend in the legs 106 may form a capillary feature 198, which helps to prevent liquid vaporizable material from flowing beyond the capillary feature 198. For example, the bend may create an abrupt change in capillary pressure, which

may also help to limit or prevent liquid vaporizable material from flowing beyond the bend and/or from pooling between the legs 106 and the wick housing 98, and may help to limit or prevent liquid vaporizable material from flowing out of the heating portion 104.

5 [0210] FIGS. 64-65 illustrate a variation of the heating elements 100 shown in FIGS. 50A-55B. In this variation of the heating element 100, the legs 106 of the heating element 100 include a bend at an inflection region 111. The bend in the legs 106 may form a capillary feature 198, which helps to prevent liquid vaporizable material from flowing beyond the capillary feature 198. For
10 example, the bend may create an abrupt change in capillary pressure, which also helps to limit or prevent liquid vaporizable material from flowing beyond the bend and/or from pooling between the legs 106 and the wick housing 98, and may help to limit or prevent liquid vaporizable material from flowing out of the heating portion 104.

15 [0211] FIGS. 68A-69 illustrate another example of the atomizer assembly 26, with the heating element 100 assembled with the wick housing 98 and the heat shield 118A, and FIG. 70 illustrates an exploded view of the atomizer assembly 26, consistent with implementations of the current subject matter. The wick housing 98 may be made of plastic, polypropylene, and the like. The wick
20 housing 98 includes four recesses 192 in which at least a portion of each of the legs 106 of the heating element 100 may be positioned and secured. Within the recesses 192, the wick housing 98 may include one or more wick housing retention features 93 (see FIG. 72A) that help to secure the heating element 100 to the wick housing 98, such as, for example, via a snap-fit arrangement
25 between at least a portion of the legs 106 of the heating element 100 and the wick housing retention features 93. The wick housing retention features 93 may also help to space the heating element 100 from a surface of the wick housing 98, to help prevent heat from acting on the wick housing and melting a portion of the wick housing 98.

30 [0212] As shown, the wick housing 98 also includes an opening 193 providing access to an internal volume 194, in which at least the heating portion 104 of the heating element 100 and the wicking element 70 are positioned.

[0213] The wick housing 98 may also include one or more other cutouts that help to space the heating element 100 from a surface of the wick housing 98 to reduce the amount of heat that contacts the surface of the wick housing 98. For example, the wick housing 98 may include cutouts 91. The cutouts 91 may be formed along an outer surface of the wick housing 98 proximate to the opening 193. The cutouts 91 may also include a capillary feature, such as the capillary feature 198. The capillary feature of the cutouts 91 may define a surface (e.g., curved surface 198) that breaks tangency points between adjacent (or intersecting) walls (such as the walls of the wick housing). The curved surface 198 may have a radius that is sufficient to reduce or eliminate the capillarity formed between the adjacent outer walls of the wick housing.

[0214] Referring to FIGS. 68A-69, the wick housing 98 may include a tab 89. The tab 89 may help to properly position and/or orient the wick housing during assembly of the vaporizer cartridge, with respect to one or more other components of the vaporizer cartridge. For example, added material forming the tab 89 shifts the center of mass of the wick housing 98. Due to the shifted center of mass, the wick housing 98 may rotate or slide in a certain orientation to align with a corresponding feature of another component of the vaporizer cartridge during assembly.

[0215] FIGS. 71A-71C illustrate an example method of forming the atomizer assembly 26 of the vaporizer cartridge 52, including the wick housing 98, the wicking element 70, and the heating element 100, consistent with implementations of the current subject matter. As shown in FIG. 71A, the wicking element 70 may be inserted into the pocket formed in the heating element 100 (e.g., formed by the side tine portions 126 and the platform tine portion 124). In some implementations, the wicking element 70 expands after being secured to the heating element 100, when vaporizable material is introduced to the wicking element 70.

[0216] FIG. 71B shows the wicking element 70 and the heating element 100 being coupled to the wick housing 98 and FIG. 71C shows an example of the wicking element 70 and the heating element 100 assembled with the wick housing 98. At least a portion of the heating element 100, such as the heating

portion 104 may be positioned within the internal volume of the wick housing 98. The legs 106 (e.g., the retainer portions 99) of the heating element 100 may couple with the outer walls of the wick housing 98 via, for example, a snap-fit arrangement. In particular, the retainer portions 99 of the legs 106 may couple with and be positioned at least partially within the recesses in the wick housing 98.

[0217] FIGS. 72A-72C illustrate another example method of forming the atomizer assembly 26 of the vaporizer cartridge 52, including the wick housing 98, the wicking element 70, and the heating element 100, consistent with implementations of the current subject matter. As shown in FIG. 72A, the heating element 100 may be coupled to the wick housing 98, for example, by inserting or otherwise positioning the at least a portion of the heating element 100, such as the heating portion 104 within the internal volume of the wick housing 98. The legs 106 (e.g., the retainer portions 99) of the heating element 100 may couple with the outer walls of the wick housing 98 via, for example, a snap-fit arrangement. In particular, the retainer portions 99 or another portion of the legs 106 may couple with and be positioned at least partially within the recesses in the wick housing 98, for example, by coupling with the wick housing retention features 93.

[0218] As shown in FIG. 72B, the wicking element 70 may be inserted into the pocket formed in the heating element 100 (e.g., formed by the side tine portions 126 and the platform tine portion 124). In some implementations, the wicking element 70 is compressed as the wicking element 70 is coupled with the heating element 70. In some implementations, the wicking element 70 fits within the heating element 70 and expands after being secured to the heating element 100, when vaporizable material is introduced to the wicking element 70.

[0219] FIG. 72C shows an example of the wicking element 70 and the heating element 100 assembled with the wick housing 98 to form the atomizer assembly 26.

[0220] FIG. 73 illustrates an example process 3600 for assembling the heating element 100 consistent with implementations of the current subject

matter. The process flow chart 3600 illustrates features of a method, which may optionally include some or all of the following. At block 3610, a planar substrate having resistive heating properties is provided. At block 3612, the planar substrate may be cut and/or stamped into the desired geometry. At block 3614, at least a portion of the heating element 100 may be plated. For example, as mentioned above, one or more layers of a plating material (e.g., an adhering plating material and/or an outer plating material) may be deposited onto at least a portion of an outer surface of the heating element 100. At block 3616, the heating portion 104 (e.g., the tines 102) may be bent and/or otherwise crimped about a wicking element to match the shape of the wicking element and to secure the wicking element to the heating element. At block 3618, the cartridge contacts 65, which in some implementations form an end portion of the legs 106 of the heating element 100, may be bent in a first or second direction along a plane or a third direction that is perpendicular to the first or second direction. At block 3620, the heating element 100 may be assembled into a vaporizer cartridge 52 and fluid communication between the wicking element 70 and a reservoir of vaporizable material may be caused. At 3622, the vaporizable material may be drawn into the wicking element 70, which may be positioned in contact with at least two surfaces of the heating portion 104 of the heating element 100. At block 3624, a heating means may be provided to the cartridge contacts 65 of the heating element to heat the heating element 100 at least the heating portion 104. The heating causes vaporization of the vaporizable material. At block 3626, the vaporized vaporizable material is entrained in a flow of air to a mouthpiece of the vaporization cartridge in which the heating element is positioned.

Terminology

[0221] When a feature or element is herein referred to as being “on” another feature or element, it can be directly on the other feature or element or intervening features and/or elements may also be present. In contrast, when a feature or element is referred to as being “directly on” another feature or element, there are no intervening features or elements present. It will also be

understood that, when a feature or element is referred to as being “connected”, “attached” or “coupled” to another feature or element, it can be directly connected, attached or coupled to the other feature or element or intervening features or elements may be present. In contrast, when a feature or element is referred to as being “directly connected”, “directly attached” or “directly coupled” to another feature or element, there are no intervening features or elements present.

[0222] Although described or shown with respect to one embodiment, the features and elements so described or shown can apply to other embodiments. It will also be appreciated by those of skill in the art that references to a structure or feature that is disposed “adjacent” another feature may have portions that overlap or underlie the adjacent feature.

[0223] Terminology used herein is for the purpose of describing particular embodiments and implementations only and is not intended to be limiting. For example, as used herein, the singular forms “a”, “an” and “the” are intended to include the plural forms as well, unless the context clearly indicates otherwise. It will be further understood that the terms “comprises” and/or “comprising,” when used in this specification, specify the presence of stated features, steps, operations, elements, and/or components, but do not preclude the presence or addition of one or more other features, steps, operations, elements, components, and/or groups thereof. As used herein, the term “and/or” includes any and all combinations of one or more of the associated listed items and may be abbreviated as “/”.

[0224] In the descriptions above and in the claims, phrases such as “at least one of” or “one or more of” may occur followed by a conjunctive list of elements or features. The term “and/or” may also occur in a list of two or more elements or features. Unless otherwise implicitly or explicitly contradicted by the context in which it used, such a phrase is intended to mean any of the listed elements or features individually or any of the recited elements or features in combination with any of the other recited elements or features. For example, the phrases “at least one of A and B;” “one or more of A and B;” and “A and/or B” are each intended to mean “A alone, B alone, or A and B together.” A similar

interpretation is also intended for lists including three or more items. For example, the phrases “at least one of A, B, and C;” “one or more of A, B, and C;” and “A, B, and/or C” are each intended to mean “A alone, B alone, C alone, A and B together, A and C together, B and C together, or A and B and C together.” Use of the term “based on,” above and in the claims is intended to mean, “based at least in part on,” such that an unrecited feature or element is also permissible.

[0225] Spatially relative terms, such as “forward”, “rearward”, “under”, “below”, “lower”, “over”, “upper” and the like, may be used herein for ease of description to describe one element or feature’s relationship to another element(s) or feature(s) as illustrated in the figures. It will be understood that the spatially relative terms are intended to encompass different orientations of the device in use or operation in addition to the orientation depicted in the figures. For example, if a device in the figures is inverted, elements described as “under” or “beneath” other elements or features would then be oriented “over” the other elements or features. Thus, the exemplary term “under” can encompass both an orientation of over and under. The device may be otherwise oriented (rotated 90 degrees or at other orientations) and the spatially relative descriptors used herein interpreted accordingly. Similarly, the terms “upwardly”, “downwardly”, “vertical”, “horizontal” and the like are used herein for the purpose of explanation only unless specifically indicated otherwise.

[0226] Although the terms “first” and “second” may be used herein to describe various features/elements (including steps), these features/elements should not be limited by these terms, unless the context indicates otherwise. These terms may be used to distinguish one feature/element from another feature/element. Thus, a first feature/element discussed below could be termed a second feature/element, and similarly, a second feature/element discussed below could be termed a first feature/element without departing from the teachings provided herein.

[0227] As used herein in the specification and claims, including as used in the examples and unless otherwise expressly specified, all numbers may be read as if prefaced by the word “about” or “approximately,” even if the term does

not expressly appear. The phrase “about” or “approximately” may be used when describing magnitude and/or position to indicate that the value and/or position described is within a reasonable expected range of values and/or positions. For example, a numeric value may have a value that is +/- 0.1% of the stated value (or range of values), +/- 1% of the stated value (or range of values), +/- 2% of the stated value (or range of values), +/- 5% of the stated value (or range of values), +/- 10% of the stated value (or range of values), etc. Any numerical values given herein should also be understood to include about or approximately that value, unless the context indicates otherwise. For example, if the value “10” is disclosed, then “about 10” is also disclosed. Any numerical range recited herein is intended to include all sub-ranges subsumed therein. It is also understood that when a value is disclosed that “less than or equal to” the value, “greater than or equal to the value” and possible ranges between values are also disclosed, as appropriately understood by the skilled artisan. For example, if the value “X” is disclosed the “less than or equal to X” as well as “greater than or equal to X” (e.g., where X is a numerical value) is also disclosed. It is also understood that the throughout the application, data is provided in a number of different formats, and that this data, represents endpoints and starting points, and ranges for any combination of the data points. For example, if a particular data point “10” and a particular data point “15” are disclosed, it is understood that greater than, greater than or equal to, less than, less than or equal to, and equal to 10 and 15 are considered disclosed as well as between 10 and 15. It is also understood that each unit between two particular units are also disclosed. For example, if 10 and 15 are disclosed, then 11, 12, 13, and 14 are also disclosed.

[0228] Although various illustrative embodiments are described above, any of a number of changes may be made to various embodiments without departing from the teachings herein. For example, the order in which various described method steps are performed may often be changed in alternative embodiments, and in other alternative embodiments one or more method steps may be skipped altogether. Optional features of various device and system embodiments may be included in some embodiments and not in others.

Therefore, the foregoing description is provided primarily for exemplary purposes and should not be interpreted to limit the scope of the claims.

[0229] One or more aspects or features of the subject matter described herein can be realized in digital electronic circuitry, integrated circuitry, specially designed application specific integrated circuits (ASICs), field programmable gate arrays (FPGAs) computer hardware, firmware, software, and/or combinations thereof. These various aspects or features can include implementation in one or more computer programs that are executable and/or interpretable on a programmable system including at least one programmable processor, which can be special or general purpose, coupled to receive data and instructions from, and to transmit data and instructions to, a storage system, at least one input device, and at least one output device. The programmable system or computing system may include clients and servers. A client and server are generally remote from each other and typically interact through a communication network. The relationship of client and server arises by virtue of computer programs running on the respective computers and having a client-server relationship to each other.

[0230] These computer programs, which can also be referred to programs, software, software applications, applications, components, or code, include machine instructions for a programmable processor, and can be implemented in a high-level procedural language, an object-oriented programming language, a functional programming language, a logical programming language, and/or in assembly/machine language. As used herein, the term "machine-readable medium" refers to any computer program product, apparatus and/or device, such as for example magnetic discs, optical disks, memory, and Programmable Logic Devices (PLDs), used to provide machine instructions and/or data to a programmable processor, including a machine-readable medium that receives machine instructions as a machine-readable signal. The term "machine-readable signal" refers to any signal used to provide machine instructions and/or data to a programmable processor. The machine-readable medium can store such machine instructions non-transitorily, such as for example as would a non-transient solid-state memory or a magnetic hard drive or any equivalent

storage medium. The machine-readable medium can alternatively or additionally store such machine instructions in a transient manner, such as for example as would a processor cache or other random access memory associated with one or more physical processor cores.

5 [0231] The examples and illustrations included herein show, by way of illustration and not of limitation, specific embodiments in which the subject matter may be practiced. As mentioned, other embodiments may be utilized and derived there from, such that structural and logical substitutions and changes may be made without departing from the scope of this disclosure. Such
10 embodiments of the inventive subject matter may be referred to herein individually or collectively by the term "invention" merely for convenience and without intending to voluntarily limit the scope of this application to any single invention or inventive concept, if more than one is, in fact, disclosed. Thus, although specific embodiments have been illustrated and described herein, any
15 arrangement calculated to achieve the same purpose may be substituted for the specific embodiments shown. This disclosure is intended to cover any and all adaptations or variations of various embodiments. Combinations of the above embodiments, and other embodiments not specifically described herein, will be apparent to those of skill in the art upon reviewing the above description.

Conclusies

1. Verwarmingselement van een verdamperinrichting die een reservoir omvat bevattende verdampbaar materiaal en een wiekelement in fluïdumverbinding met het reservoir, waarbij het verwarmingselement omvat:

5 een verwarmingsgedeelte dat ten minste twee tanden omvat die ruimtelijk op een afstand van elkaar zijn geplaatst, waarbij het verwarmingsgedeelte is gevormd om een binnenvolume te definiëren dat is geconfigureerd voor het ontvangen van het wiekelement zodat het verwarmingsgedeelte ten minste een gedeelte van het wiekelement aan het
10 verwarmingselement vastmaakt, waarbij het verwarmingsgedeelte is geconfigureerd om in contact te komen met ten minste twee afzonderlijke oppervlakken van het wiekelement; en

ten minste twee benen gekoppeld aan de ten minste twee tanden en op een afstand geplaatst van het verwarmingsgedeelte, waarbij de ten minste twee
15 benen geconfigureerd zijn om in elektrische verbinding te staan met een voedingsbron,

waarbij vermogen geconfigureerd is om naar het verwarmingsgedeelte te worden aangevoerd vanuit de voedingsbron om warmte te genereren, waardoor het verdampbare materiaal dat is opgeslagen in het wiekelement
20 wordt verdampt.

2. Het verwarmingselement volgens conclusie 1, waarbij de ten minste twee benen vier benen omvatten.

3. Het verwarmingselement volgens conclusie 2, waarbij het verwarmingsgedeelte is geconfigureerd om in contact te komen met ten minste
25 drie afzonderlijke oppervlakken van het wiekelement.

4. Het verwarmingselement volgens conclusie 1, waarbij de ten minste twee tanden omvatten:

een eerste zij-tandgedeelte;

een tweede zij-tandgedeelte tegenover het eerste zij-tandgedeelte; en

30 een platformtandgedeelte dat het eerste zij-tandgedeelte met het tweede zij-tandgedeelte verbindt, waarbij het platformtandgedeelte ongeveer

loodrecht op een gedeelte van het eerste zij-tandgedeelte en het tweede zij-tandgedeelte is gepositioneerd,

waarbij het eerste zij-tandgedeelte, het tweede zij-tandgedeelte en het platformtandgedeelte het binnenvolume definiëren waarin het wiekelement is gepositioneerd.

5 5. Het verwarmingselement volgens conclusie 4, waarbij de ten minste twee benen weg van het verwarmingsgedeelte zijn gelokaliseerd door een brug.

6. Het verwarmingselement volgens conclusie 1, waarbij elk van de ten minste twee benen een patrooncontact bevat dat is gepositioneerd aan een uiteinde van elk van de ten minste twee benen, waarbij het patrooncontact geconfigureerd is om in elektrische verbinding te staan met de voedingsbron, waarbij het patrooncontact onder een hoek staat en zich weg van het verwarmingsgedeelte uitstrekt.

7. Het verwarmingselement volgens conclusie 4, waarbij de ten minste twee tanden een eerste paar tanden en een tweede paar tanden omvatten.

8. Het verwarmingselement volgens conclusie 7, waarbij de tanden van het eerste paar tanden op gelijke afstand van elkaar zijn geplaatst.

9. Het verwarmingselement volgens conclusie 7, waarbij de tanden van het eerste paar tanden door een breedte op een afstand zijn geplaatst.

10. Het verwarmingselement volgens conclusie 9, waarbij de breedte groter is aan een binnengebied van het verwarmingselement grenzend aan het platformtandgedeelte dan de breedte aan een buitengebied van het verwarmingselement grenzend aan een buitenrand van het eerste zij-tandgedeelte tegenover het binnengebied.

11. Het verwarmingselement volgens conclusie 2, waarbij de verdamperinrichting is geconfigureerd voor het meten van een weerstand van het verwarmingselement aan elk van de vier benen om een temperatuur van het verwarmingselement te regelen.

12. Het verwarmingselement volgens conclusie 1, verder omvattende een warmteschild geconfigureerd voor het isoleren van het verwarmingsgedeelte van een lichaam van de verdamperinrichting.

13. Het verwarmingselement volgens conclusie 1, waarbij de verdamperinrichting verder een warmteschild omvat dat is geconfigureerd om ten minste een gedeelte van het verwarmingselement te omgeven en het verwarmingsgedeelte te isoleren van een lichaam van een wiekbehuizing die is geconfigureerd om ten minste een gedeelte van het wiekelement en het verwarmingselement te omgeven.

14. Het verwarmingselement volgens conclusie 1, waarbij het verwarmingsgedeelte is gevouwen tussen het verwarmingsgedeelte en de ten minste twee benen om het verwarmingsgedeelte te isoleren van de ten minste twee benen.

15. Het verwarmingselement volgens conclusie 1, waarbij het verwarmingsgedeelte verder ten minste één lip omvat die zich uitstrekt vanuit een zijde van de ten minste twee tanden om vlottere invoer van het wiekelement naar het binnenvolume van het verwarmingsgedeelte mogelijk te maken.

16. Het verwarmingselement volgens conclusie 15, waarbij de ten minste ene lip zich weg van het binnenvolume uitstrekt onder een hoek.

17. Het verwarmingselement volgens conclusie 1, waarbij de ten minste twee benen een capillair kenmerk omvatten, waarbij het capillaire kenmerk een abrupte verandering in capillaire druk veroorzaakt om zodoende te voorkomen dat het verdampbare materiaal voorbij het capillaire kenmerk stroomt.

18. Het verwarmingselement volgens conclusie 17, waarbij het capillaire kenmerk één of meer buigingen omvat in de ten minste twee benen.

19. Het verwarmingselement volgens conclusie 17, waarbij de ten minste twee benen zich onder een hoek uitstrekken naar het binnenvolume van het verwarmingsgedeelte, waarbij de ten minste twee benen onder een hoek het capillaire kenmerk definiëren.

20. Verdamperinrichting omvattende:

een reservoir dat verdampbaar materiaal bevat;

een wiekelement in fluïdumverbinding met het reservoir; en

een verwarmingselement omvattende:

een verwarmingsgedeelte dat ten minste twee tanden omvat die ruimtelijk op een afstand van elkaar zijn geplaatst, waarbij het verwarmingsgedeelte is gevormd om een binnenvolume te definiëren dat is geconfigureerd voor het ontvangen van het wiekelement zodat het

5 verwarmingsgedeelte ten minste een gedeelte van het wiekelement aan het verwarmingselement vastmaakt, waarbij het verwarmingsgedeelte is geconfigureerd om in contact te komen met ten minste twee afzonderlijke oppervlakken van het wiekelement; en

ten minste twee benen gekoppeld aan de ten minste twee tanden en op

10 een afstand geplaatst van het verwarmingsgedeelte, waarbij de ten minste twee benen geconfigureerd zijn om in elektrische verbinding te staan met een voedingsbron,

waarbij vermogen geconfigureerd is om naar het verwarmingsgedeelte te worden aangevoerd vanuit de voedingsbron om warmte te genereren,

15 waardoor het verdampbare materiaal dat is opgeslagen in het wiekelement wordt verdampt.

21. De verdamperinrichting volgens conclusie 20, waarbij de ten minste twee benen vier benen omvatten.

22. De verdamperinrichting volgens conclusie 20, waarbij het

20 verwarmingsgedeelte is geconfigureerd om in contact te komen met ten minste drie afzonderlijke oppervlakken van het wiekelement.

23. De verdamperinrichting volgens conclusie 20, waarbij de ten minste twee tanden omvatten:

een eerste zij-tandgedeelte;

25 een tweede zij-tandgedeelte tegenover het eerste zij-tandgedeelte; en

een platformtandgedeelte dat het eerste zij-tandgedeelte met het tweede zij-tandgedeelte verbindt, waarbij het platformtandgedeelte ongeveer loodrecht op een gedeelte van het eerste zij-tandgedeelte en het tweede zij-tandgedeelte is gepositioneerd,

30 waarbij het eerste zij-tandgedeelte, het tweede zij-tandgedeelte en het platformtandgedeelte het binnenvolume definiëren waarin het wiekelement is gepositioneerd.

24. De verdamperinrichting volgens conclusie 23, waarbij de ten minste twee benen weg van het verwarmingsgedeelte zijn gelokaliseerd door een brug.

25. De verdamperinrichting volgens conclusie 20, waarbij elk van de ten minste twee benen een patrooncontact bevat dat is gepositioneerd aan een uiteinde van elk van de ten minste twee benen, waarbij het patrooncontact geconfigureerd om is in elektrische verbinding te staan met de voedingsbron, waarbij het patrooncontact onder een hoek staat en zich weg van het verwarmingsgedeelte uitstrekt.

26. De verdamperinrichting volgens conclusie 20, waarbij de ten minste twee tanden een eerste paar tanden en een tweede paar tanden omvatten.

27. De verdamperinrichting volgens conclusie 26, waarbij de tanden van het eerste paar tanden op gelijke afstand van elkaar zijn geplaatst.

28. De verdamperinrichting volgens conclusie 26, waarbij de tanden van het eerste paar tanden door een breedte op een afstand zijn geplaatst, waarbij de breedte groter is aan een binnengebied van het verwarmingselement grenzend aan het platformtandgedeelte dan de breedte aan een buitengebied van het verwarmingselement grenzend aan een buitenrand van het eerste zijtandgedeelte tegenover het binnengebied.

29. Werkwijze voor het vormen van een verstuiversamenstel voor een verdamperinrichting, waarbij de werkwijze omvat:

het vastmaken van een wiekelement aan een binnenvolume van een verwarmingselement, waarbij het verwarmingselement omvat:

een verwarmingsgedeelte dat ten minste twee tanden omvat die ruimtelijk op een afstand van elkaar zijn geplaatst; en

ten minste twee benen die op een afstand van het verwarmingsgedeelte zijn geplaatst, waarbij de benen geconfigureerd zijn om in elektrische verbinding te staan met een voedingsbron van de verdamperinrichting,

waarbij het verwarmingsgedeelte is geconfigureerd om in contact te komen met ten minste twee oppervlakken van het wiekelement; en

het koppelen van het verwarmingselement aan een wiekbehuizing die is geconfigureerd om ten minste een gedeelte van het wiekelement en het verwarmingselement te omgeven.

5 30. De werkwijze volgens conclusie 29, waarbij het vastmaken verder het schuiven van het wiekelement in het binnenvolume van het verwarmingselement omvat.

31. Verwarmingselement van een verdamperinrichting, omvattende:
een verwarmingsgedeelte omvattende één of meer verwarmingssporen die integraal zijn gevormd en op een afstand van elkaar zijn geplaatst, waarbij
10 de één of meer verwarmingssporen geconfigureerd zijn om in contact te komen met ten minste een gedeelte van een wiekelement van de verdamperinrichting;

een verbindingsgedeelte dat geconfigureerd is voor het ontvangen van vermogen van een voedingsbron en het richten van het vermogen naar het verwarmingsgedeelte; en

15 een plateringslaag met een plateringsmateriaal dat verschilt van een materiaal van het verwarmingsgedeelte, waarbij de plateringslaag geconfigureerd is voor het verminderen van contactweerstand tussen het verwarmingselement en de voedingsbron, waardoor verwarming van het verwarmingselement naar het verwarmingsgedeelte wordt gelokaliseerd.

20 32. De verwarmingselement volgens conclusie 31, waarbij de plateringslaag één of meer lagen omvat die zijn afgezet op het verbindingsgedeelte.

33. De verwarmingselement volgens conclusie 31, waarbij de plateringslaag integraal is gevormd met het verbindingsgedeelte.

25 34. De verwarmingselement volgens conclusie 32, waarbij de plateringslaag een hechtende plateringslaag en een buitenste plateringslaag omvat.

30 35. De verwarmingselement volgens conclusie 34, waarbij ten minste de buitenste plateringslaag is geconfigureerd voor het verminderen van contactweerstand tussen het verwarmingselement en de voedingsbron.

36. De verwarmingselement volgens conclusie 34, waarbij de hechtende plateringslaag is afgezet op het verwarmingselement om de buitenste plateringslaag vast te hechten aan het verwarmingselement.

5 37. De verwarmingselement volgens conclusie 31, waarbij het materiaal van het verwarmingsgedeelte chroomnikkel omvat.

38. De verwarmingselement volgens conclusie 31, waarbij de plateringslaag goud omvat.

10 39. Werkwijze voor het vormen van een verwarmingselement voor een verdamperpatroon dat een reservoir omvat bevattende verdampbaar materiaal en een wiekelement in fluïdumverbinding met het reservoir, waarbij de werkwijze omvat:

het verschaffen van een vlak substraat dat een weerstandverwarmingsmateriaal omvat;

15 het persen van het vlakke substraat in een gewenste vorm van het verwarmingselement; en

20 het vouwen van het vlakke substraat om een verwarmingsgedeelte van het verwarmingselement te isoleren van een verbindingsgedeelte van het verwarmingselement, waarbij het verwarmingsgedeelte geconfigureerd is voor het verwarmen van het verdampbare materiaal om een aerosol te genereren, en waarbij het verbindingsgedeelte geconfigureerd is om in elektrische verbinding te staan met een voedingsbron om vermogen aan het verwarmingsgedeelte te verschaffen.

25 40. De werkwijze volgens conclusie 39, waarbij het verwarmingsgedeelte van het gevouwen vlakke substraat een binnenvolume definieert.

30 41. De werkwijze volgens conclusie 40, verder omvattende: het vastmaken van het wiekelement aan het verwarmingselement door het wiekelement in te brengen in het binnenvolume zodat het verwarmingsgedeelte in contact komt met het wiekelement op ten minste twee oppervlakken van het wiekelement.

42. De werkwijze volgens conclusie 39, waarbij het verwarmingsgedeelte van het gevouwen vlakke substraat tegenoverliggende

zij-tandgedeelten omvat die het binnenvolume definiëren, waarbij de tegenoverliggende zij-tandgedeelten ongeveer parallel lopen met elkaar.

43. De werkwijze volgens conclusie 42, waarbij het verbindingsgedeelte ongeveer parallel met de tegenoverliggende zij-tandgedeelten is gepositioneerd.

44. De werkwijze volgens conclusie 42, waarbij het verbindingsgedeelte op een afstand is geplaatst van de tegenoverliggende zij-tandgedeelten en zich onder een hoek uitstrekt naar het binnenvolume.

45. De werkwijze volgens conclusie 39, verder omvattende het afzetten van een plateringslaag op ten minste een gedeelte van een oppervlak van het vlakke substraat voor het verminderen van contactweerstand op ten minste het gedeelte van het oppervlak van het vlakke substraat.

46. Wiekbehuizing van een verdamperpatroon geconfigureerd om te worden gekoppeld aan een verdamperlichaam, waarbij de wiekbehuizing omvat:

een buitenwand; en

een binnenvolume gedefinieerd door de buitenwand, waarbij het binnenvolume geconfigureerd is voor het ontvangen van een gedeelte van een verwarmingselement en een wiekelement van de verdamperinrichting.

47. De wiekbehuizing volgens conclusie 46, waarbij het verwarmingselement een verwarmingsgedeelte en een verbindingsgedeelte omvat, waarbij het verwarmingsgedeelte geconfigureerd is voor het verwarmen van verdamgbaar materiaal dat is opgeslagen in het wiekelement om een aerosol te genereren, waarbij het verbindingsgedeelte geconfigureerd is voor elektrische verbinding met een voedingsbron om vermogen te verschaffen aan het verwarmingsgedeelte, en waarbij het gedeelte van het verwarmingselement het verwarmingsgedeelte is.

48. De wiekbehuizing volgens conclusie 47, waarbij de buitenwand is geconfigureerd om te worden gepositioneerd tussen het verwarmingsgedeelte en het verbindingsgedeelte.

49. De wiekbehuizing volgens conclusie 47, waarbij de buitenwand twee tegenoverstaande korte zijden en twee tegenoverstaande lange zijden omvat.

50. De wiekbehuizing volgens conclusie 49, waarbij elke van de twee tegenoverstaande lange zijden een uitsparing omvat die is geconfigureerd om op een losneembare manier het verdamperpatroon aan een overeenkomstig kenmerk van het verdamperlichaam te koppelen.

51. De wiekbehuizing volgens conclusie 50, waarbij de uitsparing is gepositioneerd nabij een intersectie tussen een lange zijde van de twee tegenoverstaande lange zijden en een korte zijde van de twee tegenoverstaande korte zijden.

52. De wiekbehuizing volgens conclusie 51, waarbij elke van de twee tegenoverstaande lange zijden twee uitsparingen omvat.

53. De wiekbehuizing volgens conclusie 49, waarbij de buitenwand verder een basis omvat die ongeveer loodrecht op de twee tegenoverstaande korte zijden en twee tegenoverstaande lange zijden is gepositioneerd.

54. De wiekbehuizing volgens conclusie 53, waarbij de basis één of meer gleuven omvat, waarbij luchtdruk die wordt veroorzaakt door de stroming van verdamgbaar materiaal in het verwarmingsgedeelte is geconfigureerd om te ontsnappen door de één of meer gleuven.

55. De wiekbehuizing volgens conclusie 49, waarbij ten minste één van de twee tegenoverstaande korte zijden een chipuitsparing omvat die is geconfigureerd om een identificatiechip op te nemen.

56. De wiekbehuizing volgens conclusie 55, waarbij de chipuitsparing ten minste twee wanden omvat die zijn geconfigureerd voor het omgeven en vasthouden van de identificatiechip.

57. De wiekbehuizing volgens conclusie 56, waarbij de ten minste twee wanden ten minste vier wanden omvatten.

58. De wiekbehuizing volgens conclusie 47, waarbij de buitenwand omvat:

twee tegenoverstaande korte zijden;

twee tegenoverstaande lange zijden;

een basis, ongeveer loodrecht op de twee tegenoverstaande korte zijden en de twee tegenoverstaande lange zijden gepositioneerd; en een opening tegenover de basis.

5 59. De wiekbehuizing volgens conclusie 58, verder omvattende een buitenrand die de opening omgeeft en zich weg van de opening uitstrekt.

60. De wiekbehuizing volgens conclusie 59, waarbij de buitenwand een capillair kenmerk omvat, waarbij het capillaire kenmerk een abrupte verandering in capillaire druk tussen het verwarmingselement en de wiekbehuizing veroorzaakt om zodoende te voorkomen dat het verdampbare materiaal voorbij
10 het capillaire kenmerk stroomt.

61. De wiekbehuizing volgens conclusie 60, waarbij het capillaire kenmerk een gekromd oppervlak omvat dat is gevormd aan de intersectie tussen ten minste één van de twee tegenoverstaande lange zijden en de buitenrand.

15 62. De wiekbehuizing volgens conclusie 61, waarbij het gekromde oppervlak een radius heeft die volstaat om raakpunten tussen het buitenoppervlak en de buitenrand te verbreken.

63. De wiekbehuizing volgens conclusie 60, waarbij het capillaire kenmerk is gepositioneerd in een uitsnijding in de buitenwand, waarbij de
20 uitsnijding geconfigureerd is voor het plaatsen van het verwarmingselement op een afstand van de buitenwand, waardoor wordt voorkomen dat een teveel aan warmte in contact komt met de buitenwand.

64. De wiekbehuizing volgens conclusie 46, verder omvattende een uitsnijding in de buitenwand, geconfigureerd voor het plaatsen van het
25 verwarmingselement op een afstand van de buitenwand, waardoor wordt voorkomen dat een teveel aan warmte in contact komt met de buitenwand.

65. Verstuiversamenstel van een verdamperinrichting, waarbij het verstuiversamenstel omvat:

een wiekelement;

30 de wiekbehuizing volgens een van de conclusies 46 tot en met 64; en het verwarmingselement volgens een van de conclusies 1 tot en met 19 en 31 tot en met 38.

66. Verwarmingselement van een verdamperinrichting die een reservoir omvat bevattende verdampbaar materiaal en een wiekelement in fluïdumverbinding met het reservoir, waarbij het verwarmingselement omvat:

5 een verwarmingsgedeelte dat ten minste twee tanden omvat die ruimtelijk op een afstand van elkaar zijn geplaatst;

een patrooncontact, geconfigureerd om in elektrische verbinding te staan met een voedingsbron; en

een been dat zich uitstrekt tussen het verwarmingsgedeelte en het patrooncontact,

10 waarbij het verwarmingsgedeelte is geconfigureerd om rond het wiekelement te worden gegolfd zodat het verwarmingsgedeelte ten minste een gedeelte van het wiekelement vastmaakt aan het verwarmingselement en in contact komt met ten minste twee oppervlakken van het wiekelement.

67. Het verwarmingselement volgens conclusie 66, waarbij het been ten minste vier benen omvat.

68. Het verwarmingselement volgens conclusie 66, verder omvattende een warmteschild geconfigureerd voor het isoleren van het verwarmingsgedeelte van een lichaam van de verdamperinrichting.

69. Het verwarmingselement volgens conclusie 66, waarbij de verdamperinrichting een warmteschild omvat dat is geconfigureerd om ten minste een gedeelte van het verwarmingselement te omgeven en het verwarmingsgedeelte te isoleren van een lichaam van een wiekbehuizing.

70. Het verwarmingselement volgens conclusie 66, verder omvattende een plateringslaag die één of meer lagen omvat die zijn afgezet op het verwarmingselement om contactweerstand tussen het verwarmingselement en de voedingsbron te verminderen.

71. Het verwarmingselement volgens conclusie 66, verder omvattende een plateringslaag die één of meer lagen omvat die zijn afgezet op het verwarmingselement, waarbij de plateringslaag een hechtende plateringslaag en een buitenste plateringslaag bevat.

72. Het verwarmingselement volgens conclusie 71, waarbij ten minste de buitenste plateringslaag is geconfigureerd om contactweerstand te verminderen.

5 73. Het verwarmingselement volgens conclusie 71, waarbij de hechtende plateringslaag is afgezet op het verwarmingselement om de buitenste plateringslaag vast te hechten aan het verwarmingselement.

74. Het verwarmingselement volgens conclusie 66, waarbij het verwarmingselement is ingedrukt in en/of uitgesneden uit een vlak substraatmateriaal.

10 75. Het verwarmingselement volgens conclusie 74, waarbij het substraatmateriaal een chroomnikkel omvat.

76. Het verwarmingselement volgens conclusie 75, waarbij de buitenste plateringslaag goud omvat.

15 77. Het verwarmingselement volgens conclusie 66, waarbij het patrooncontact is geconfigureerd om buiten een lichaam van het verdamperpatroon te worden gepositioneerd om in contact te komen met een verdamperlichaam.

20 78. Werkwijze voor het vormen van een verwarmingselement voor een verdamperpatroon dat een reservoir omvat bevattende verdampbaar materiaal en een wiekelement in fluïdumverbinding met het reservoir, waarbij de werkwijze omvat:

het verschaffen van een vlak substraat dat een weerstandverwarmingsmateriaal omvat;

het persen van het vlakke substraat in een gewenste vorm; en

25 het vastmaken van het verwarmingselement aan het wiekelement, waarbij het vastmaken het golven van ten minste een gedeelte van het verwarmingselement rond het wiekelement omvat zodat het verwarmingselement in contact komt met het wiekelement op ten minste drie oppervlakken van het wiekelement.

30 79. De werkwijze volgens conclusie 78, verder omvattende het afzetten van een plateringslaag op ten minste een gedeelte van een oppervlak van het

vlakke substraat voor het verminderen van contactweerstand aan ten minste het gedeelte van het oppervlak van het vlakke substraat.

80. Verwarmingselement van een verdamperinrichting die een reservoir omvat bevattende verdampbaar materiaal en een wiekelement in
5 fluïdumverbinding met het reservoir, waarbij het verwarmingselement omvat:

een verwarmingsgedeelte dat ten minste twee tanden omvat die ruimtelijk op een afstand van elkaar zijn geplaatst; en

ten minste twee benen die op een afstand van het verwarmingsgedeelte zijn geplaatst, waarbij de benen geconfigureerd zijn om in
10 elektrische verbinding te staan met een voedingsbron,

waarbij het verwarmingsgedeelte is geconfigureerd om rond het wiekelement te worden gegolfd zodat het verwarmingsgedeelte ten minste een gedeelte van het wiekelement vastmaakt aan het verwarmingselement en in contact komt met ten minste twee oppervlakken van het wiekelement.

81. Het verwarmingselement volgens conclusie 80, waarbij de ten
15 minste twee benen vier benen omvatten.

82. Het verwarmingselement volgens conclusie 80, waarbij het verwarmingsgedeelte is geconfigureerd om in contact te komen met ten minste drie afzonderlijke oppervlakken van het wiekelement.

83. Het verwarmingselement volgens conclusie 80, waarbij de ten
20 minste twee tanden omvatten:

een eerste zij-tandgedeelte;

een tweede zij-tandgedeelte tegenover het eerste zij-tandgedeelte; en

een platformtandgedeelte dat het eerste zij-tandgedeelte met het
25 tweede zij-tandgedeelte verbindt, waarbij het platformtandgedeelte ongeveer loodrecht op het eerste zij-tandgedeelte en het tweede zij-tandgedeelte is gepositioneerd,

waarbij het eerste zij-tandgedeelte, het tweede zij-tandgedeelte en het platformtandgedeelte een binnenvolume definiëren waarin het wiekelement is
30 gepositioneerd.

84. Het verwarmingselement volgens conclusie 83, waarbij de ten minste twee benen weg van het verwarmingsgedeelte zijn gelokaliseerd door

een brug, waarbij de brug een capillair kenmerk omvat dat voorkomt dat het verdampbare materiaal voorbij het capillaire kenmerk van het binnenvolume stroomt.

5 85. Het verwarmingselement volgens conclusie 80, waarbij elk van de ten minste twee benen een patrooncontact bevat dat is gelokaliseerd aan een uiteinde van elk van de ten minste twee benen, waarbij het patrooncontact geconfigureerd is om in elektrische verbinding te staan met een voedingsbron, waarbij het patrooncontact zich onder een hoek weg van het verwarmingsgedeelte uitstrekt.

10 86. Het verwarmingselement volgens conclusie 83, waarbij de ten minste twee tanden een eerste paar tanden en een tweede paar tanden omvatten.

 87. Het verwarmingselement volgens conclusie 86, waarbij de tanden van het eerste paar tanden op gelijke afstand van elkaar zijn geplaatst.

15 88. Het verwarmingselement volgens conclusie 86, waarbij de tanden van het eerste paar tanden door een breedte op een afstand zijn geplaatst.

 89. Het verwarmingselement volgens conclusie 88, waarbij de breedte groter is gelokaliseerd aan een binnengebied van het verwarmingselement grenzend aan het platformtandgedeelte dan de breedte gelokaliseerd aan een
20 buitengebied van het verwarmingselement grenzend aan een buitenrand van het eerste zij-tandgedeelte.

 90. Het verwarmingselement volgens conclusie 81, waarbij de verdamperinrichting is geconfigureerd voor het meten van een weerstand van het verwarmingselement aan elk van de vier benen om een temperatuur van
25 het verwarmingselement te regelen.

 91. Verdamperinrichting omvattende:

 een reservoir dat verdampbaar materiaal bevat;

 een wiekelement in fluïdumverbinding met het reservoir; en

 een verwarmingselement omvattende:

30 een verwarmingsgedeelte dat ten minste twee tanden omvat die ruimtelijk op een afstand van elkaar zijn geplaatst; en

ten minste twee benen die op een afstand van het verwarmingsgedeelte zijn geplaatst, waarbij de benen geconfigureerd zijn om in elektrische verbinding te staan met een voedingsbron,

- 5 waarbij het verwarmingsgedeelte is geconfigureerd om rond het wiekelement te worden gegolfd zodat het verwarmingsgedeelte ten minste een gedeelte van het wiekelement vastmaakt aan het verwarmingselement en in contact komt met ten minste twee oppervlakken van het wiekelement.

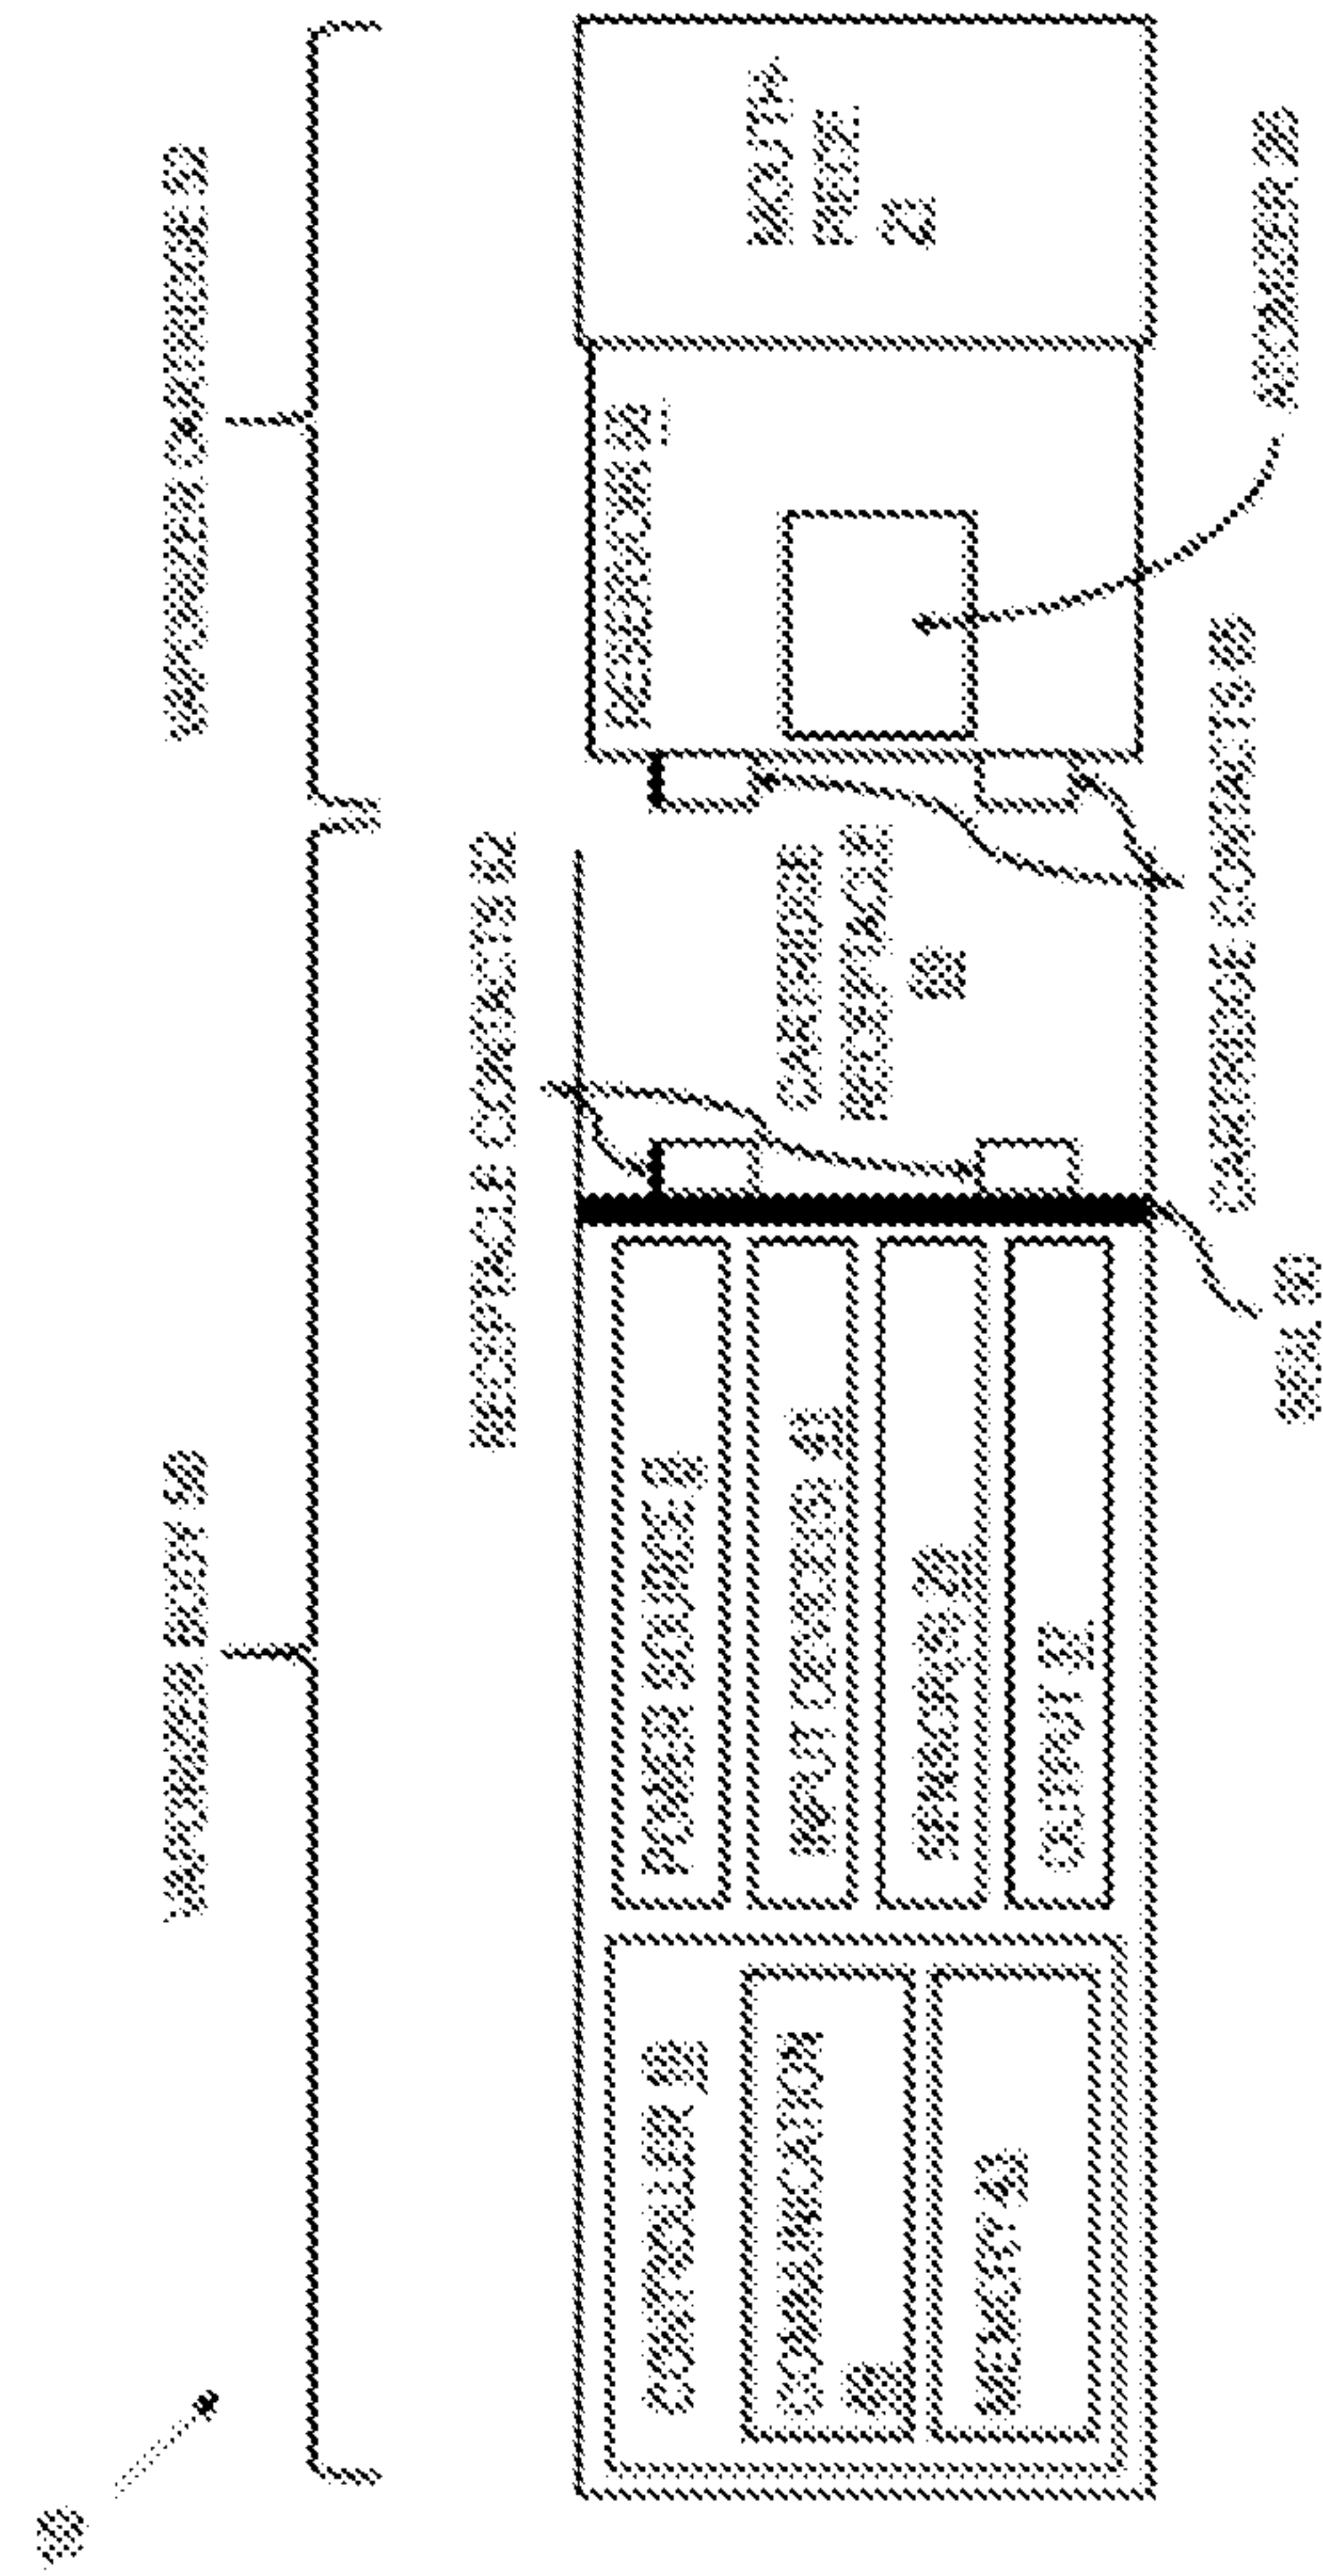


FIG. 1A

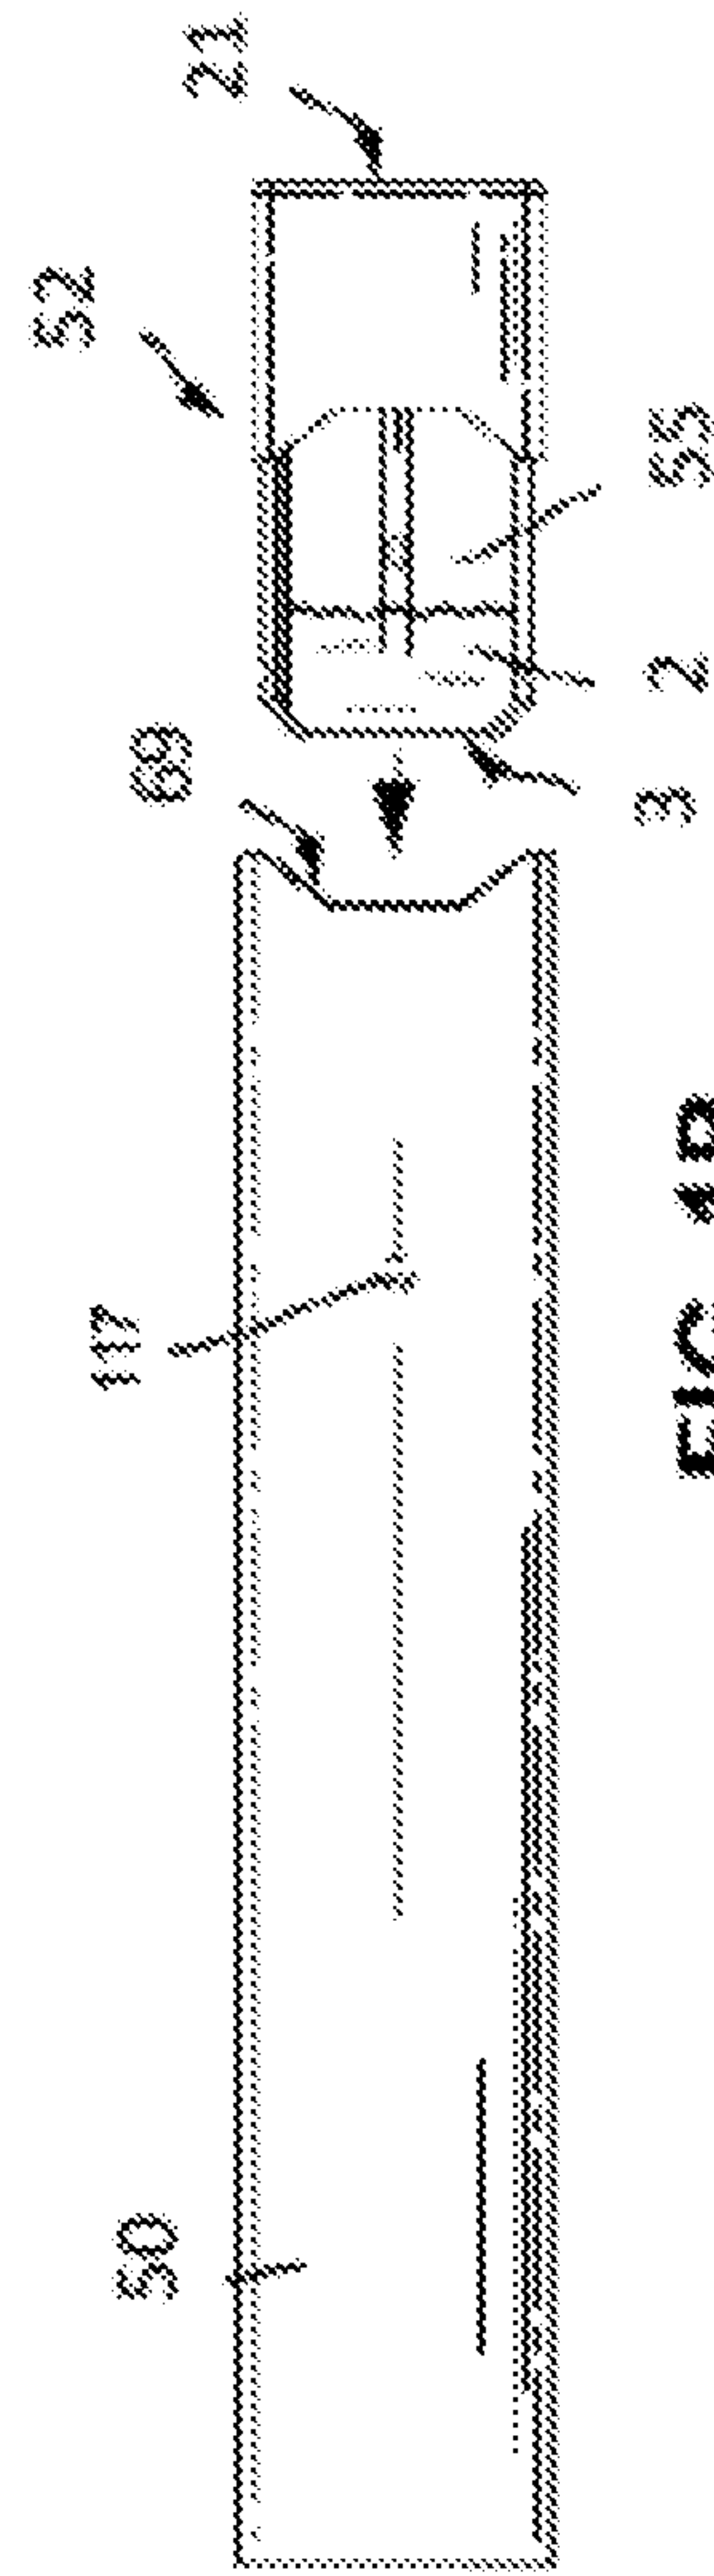


FIG. 1B

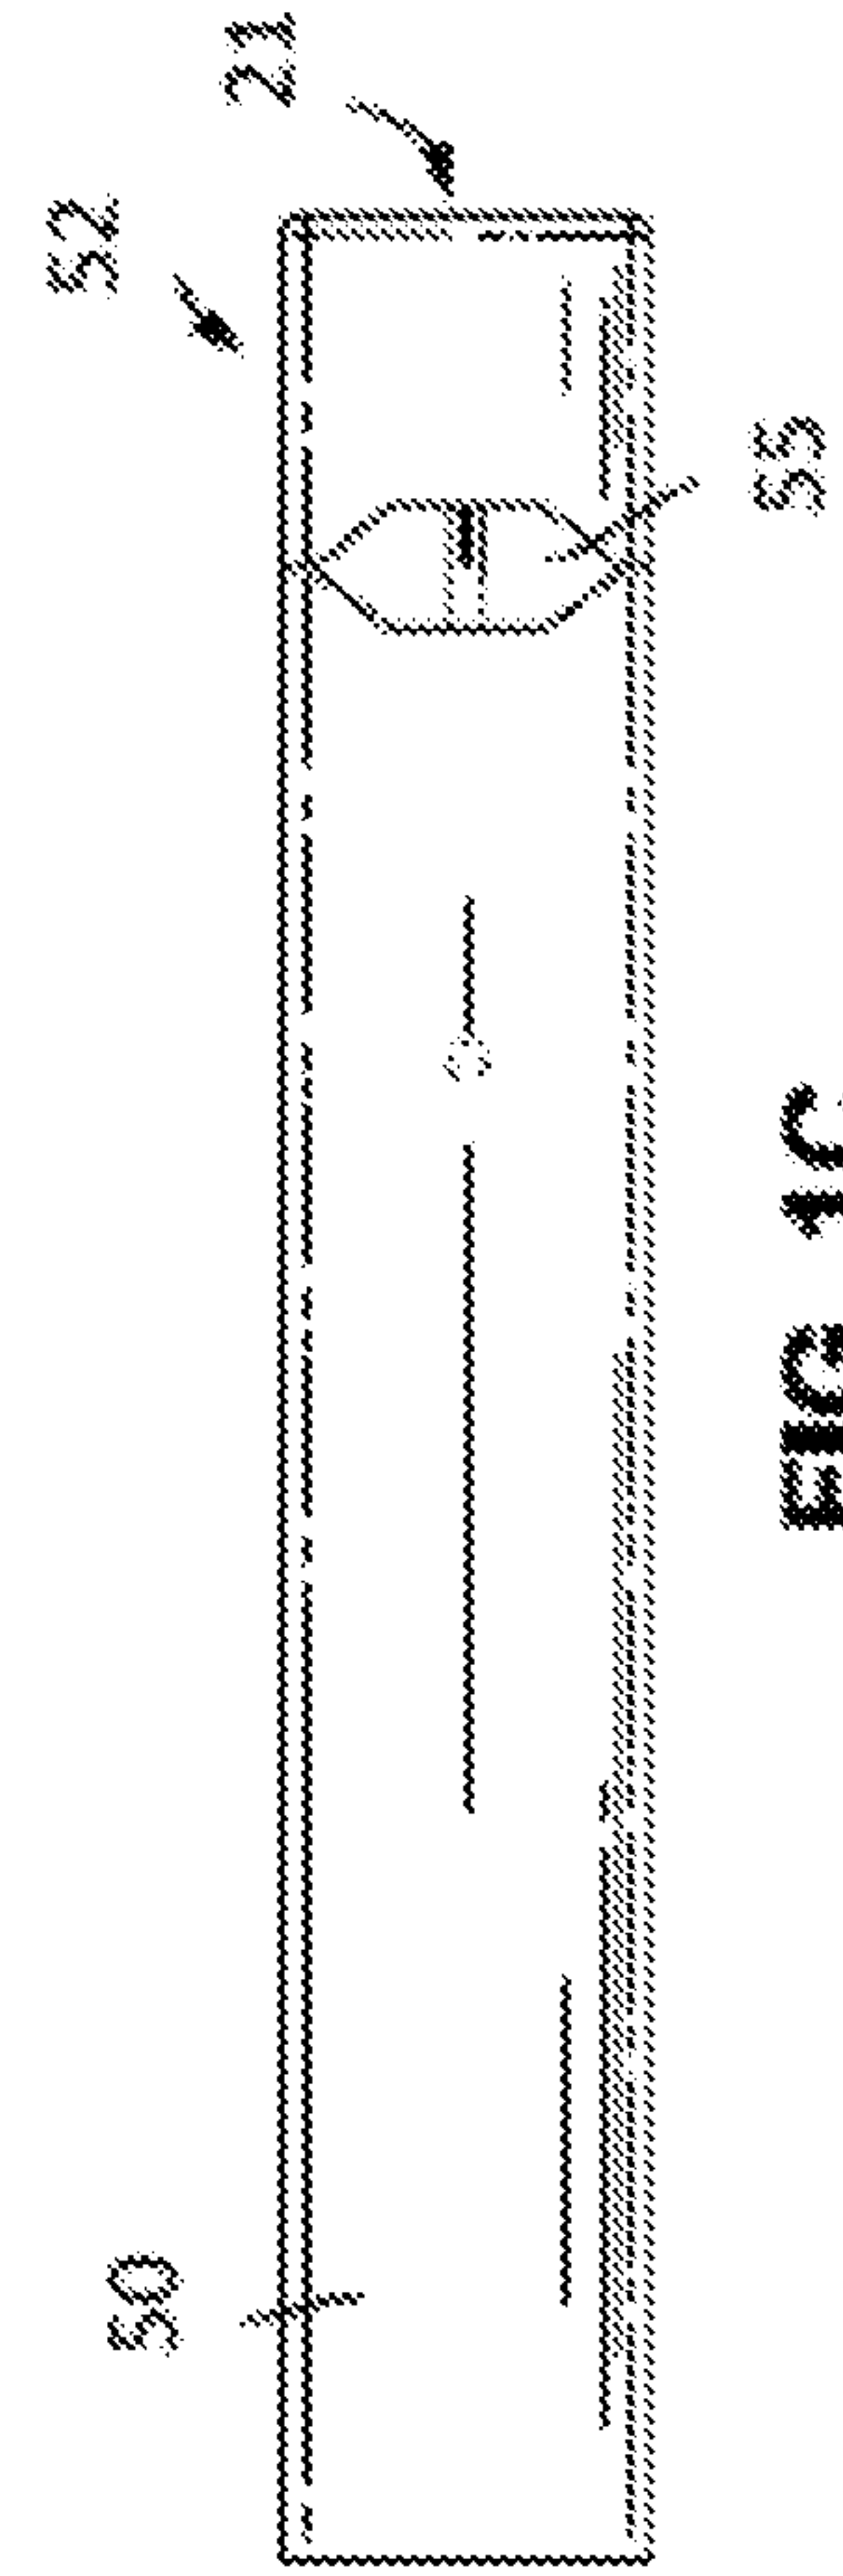


FIG. 1C

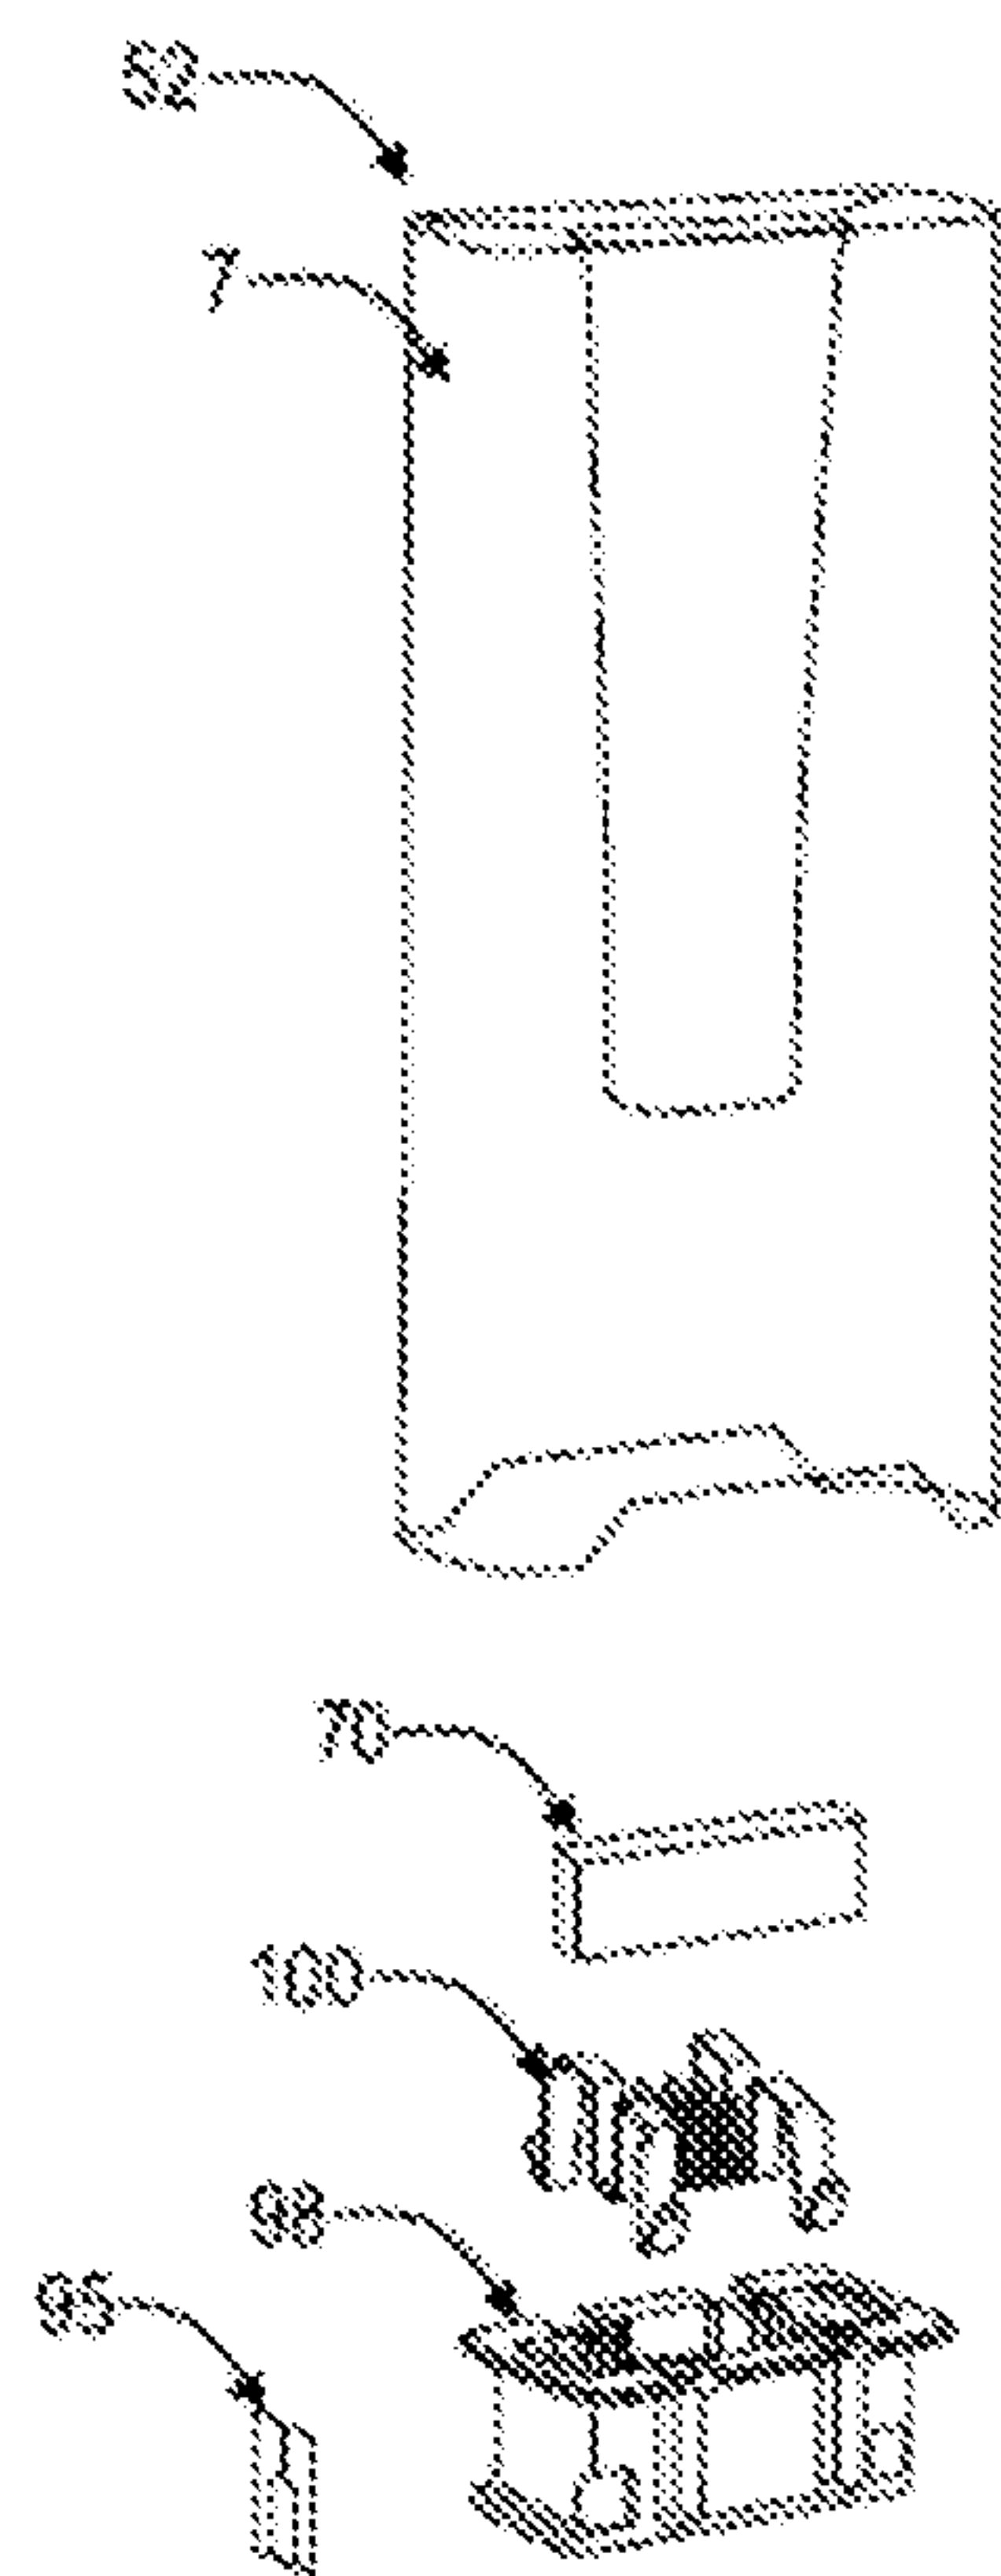


FIG. 1D

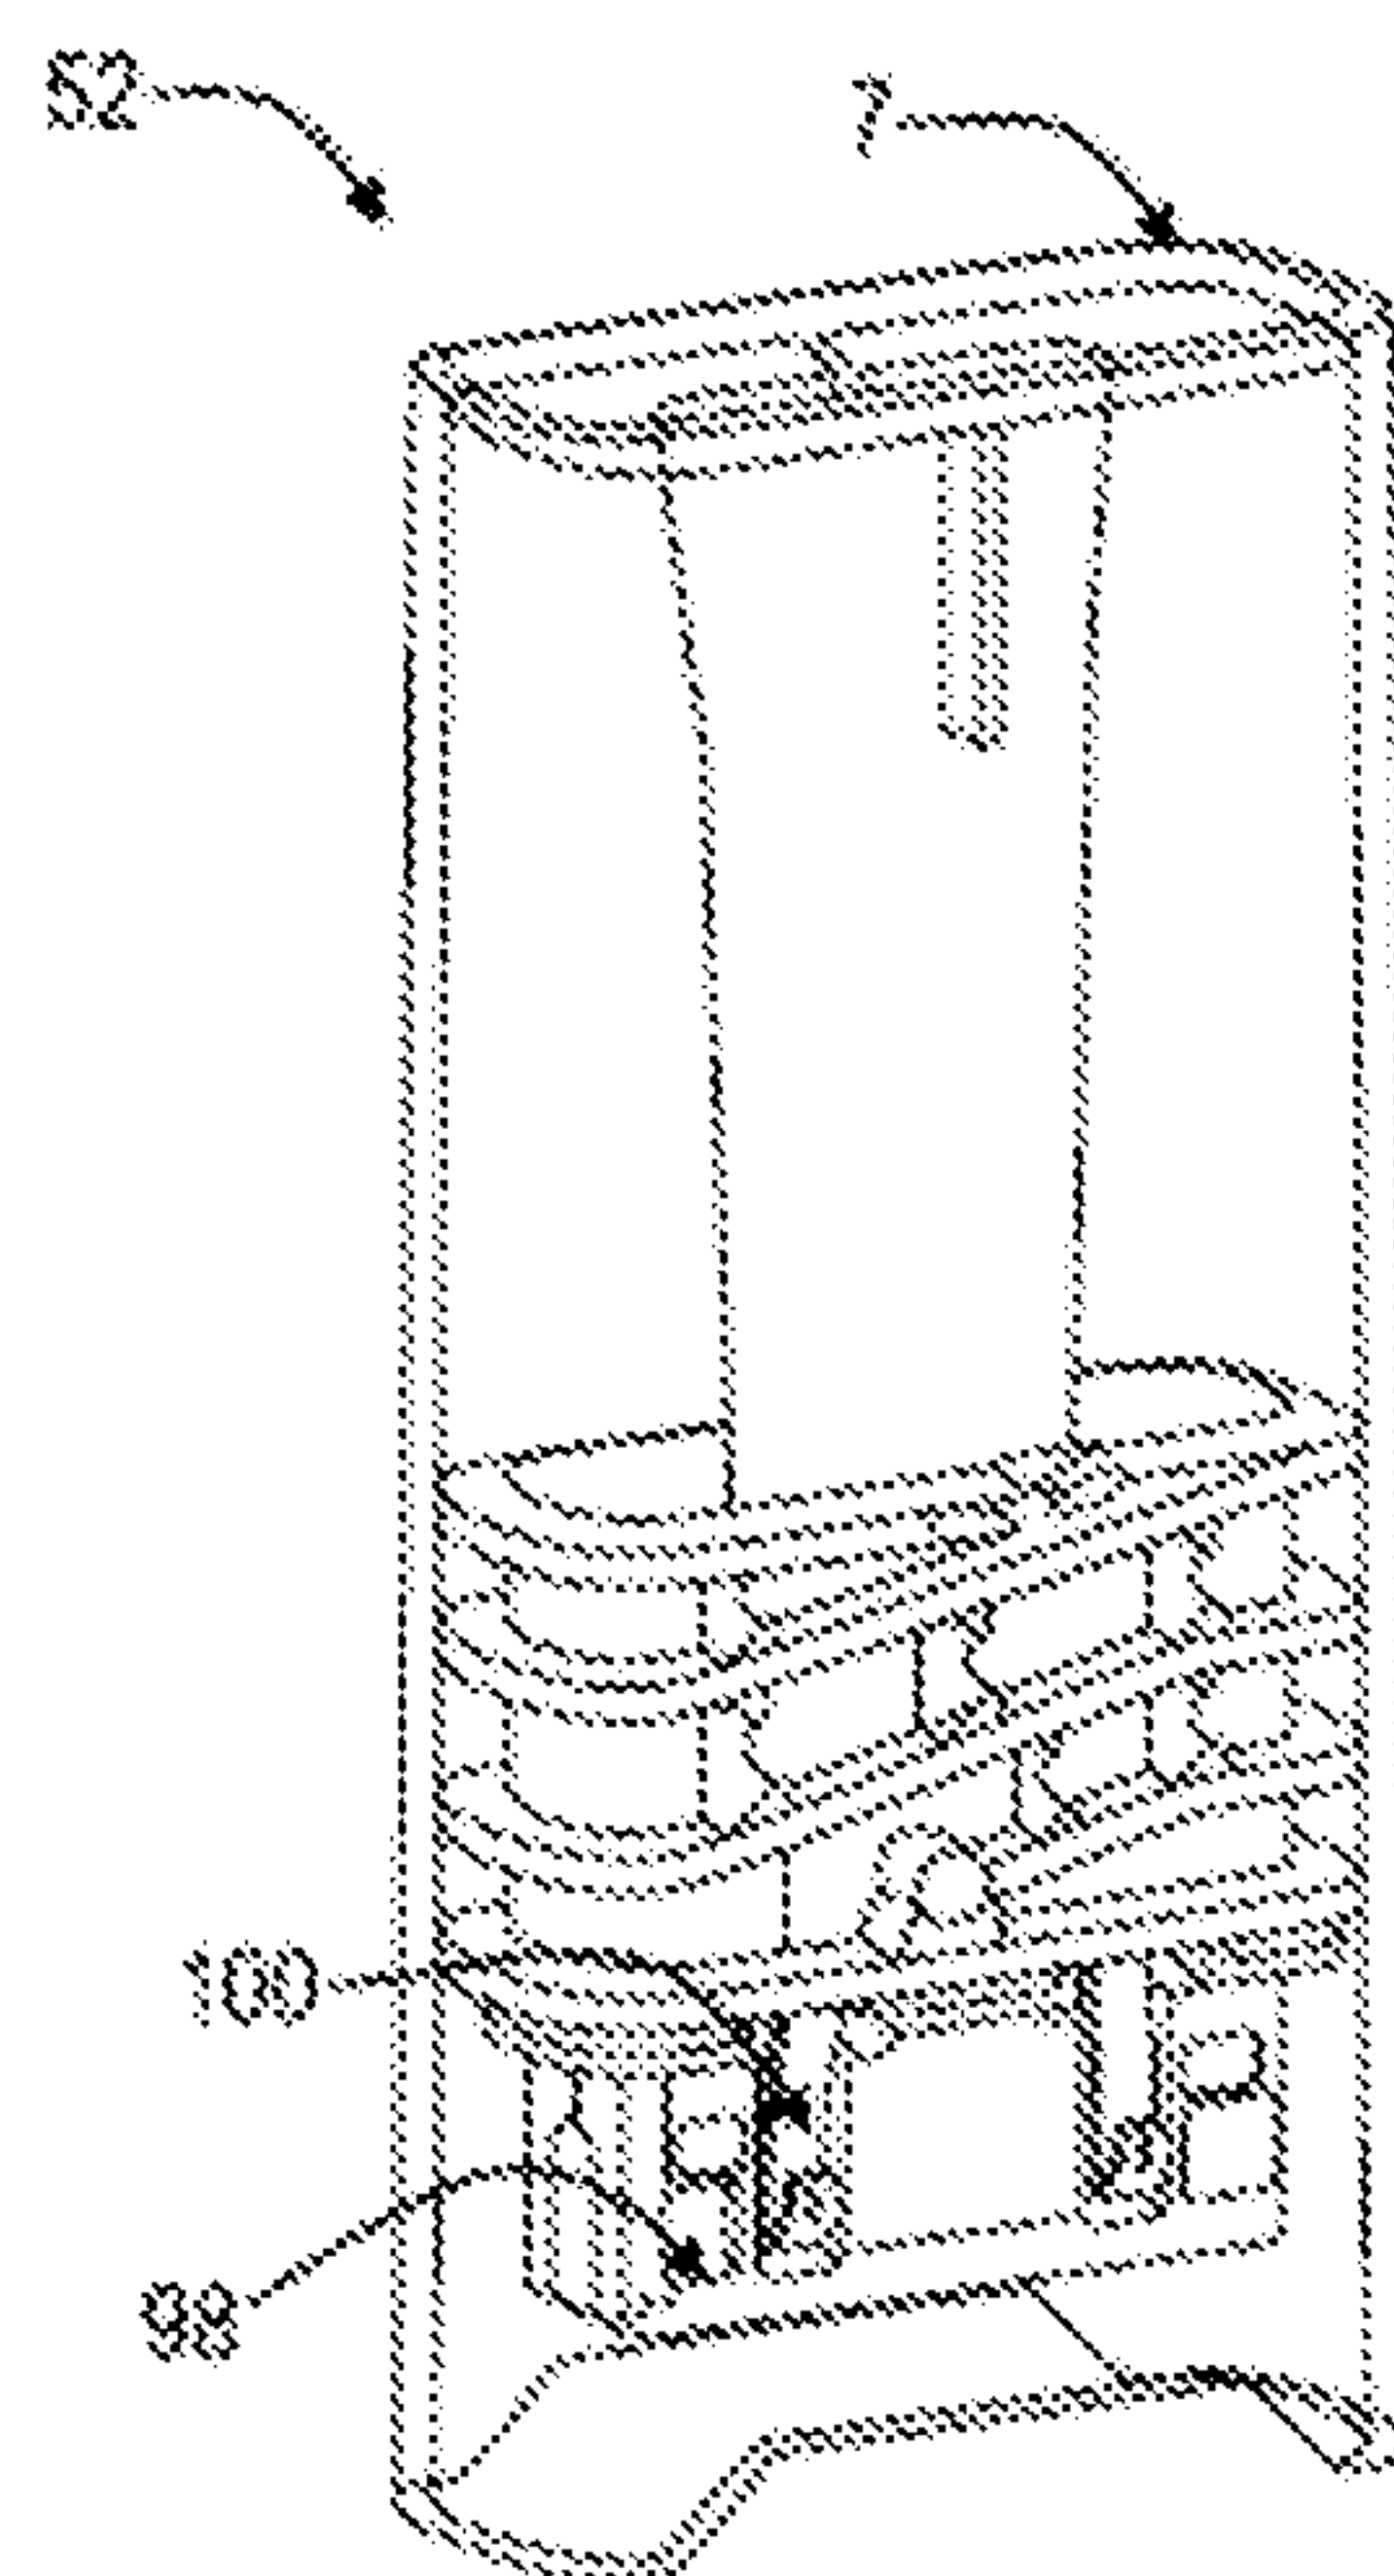


FIG. 1E

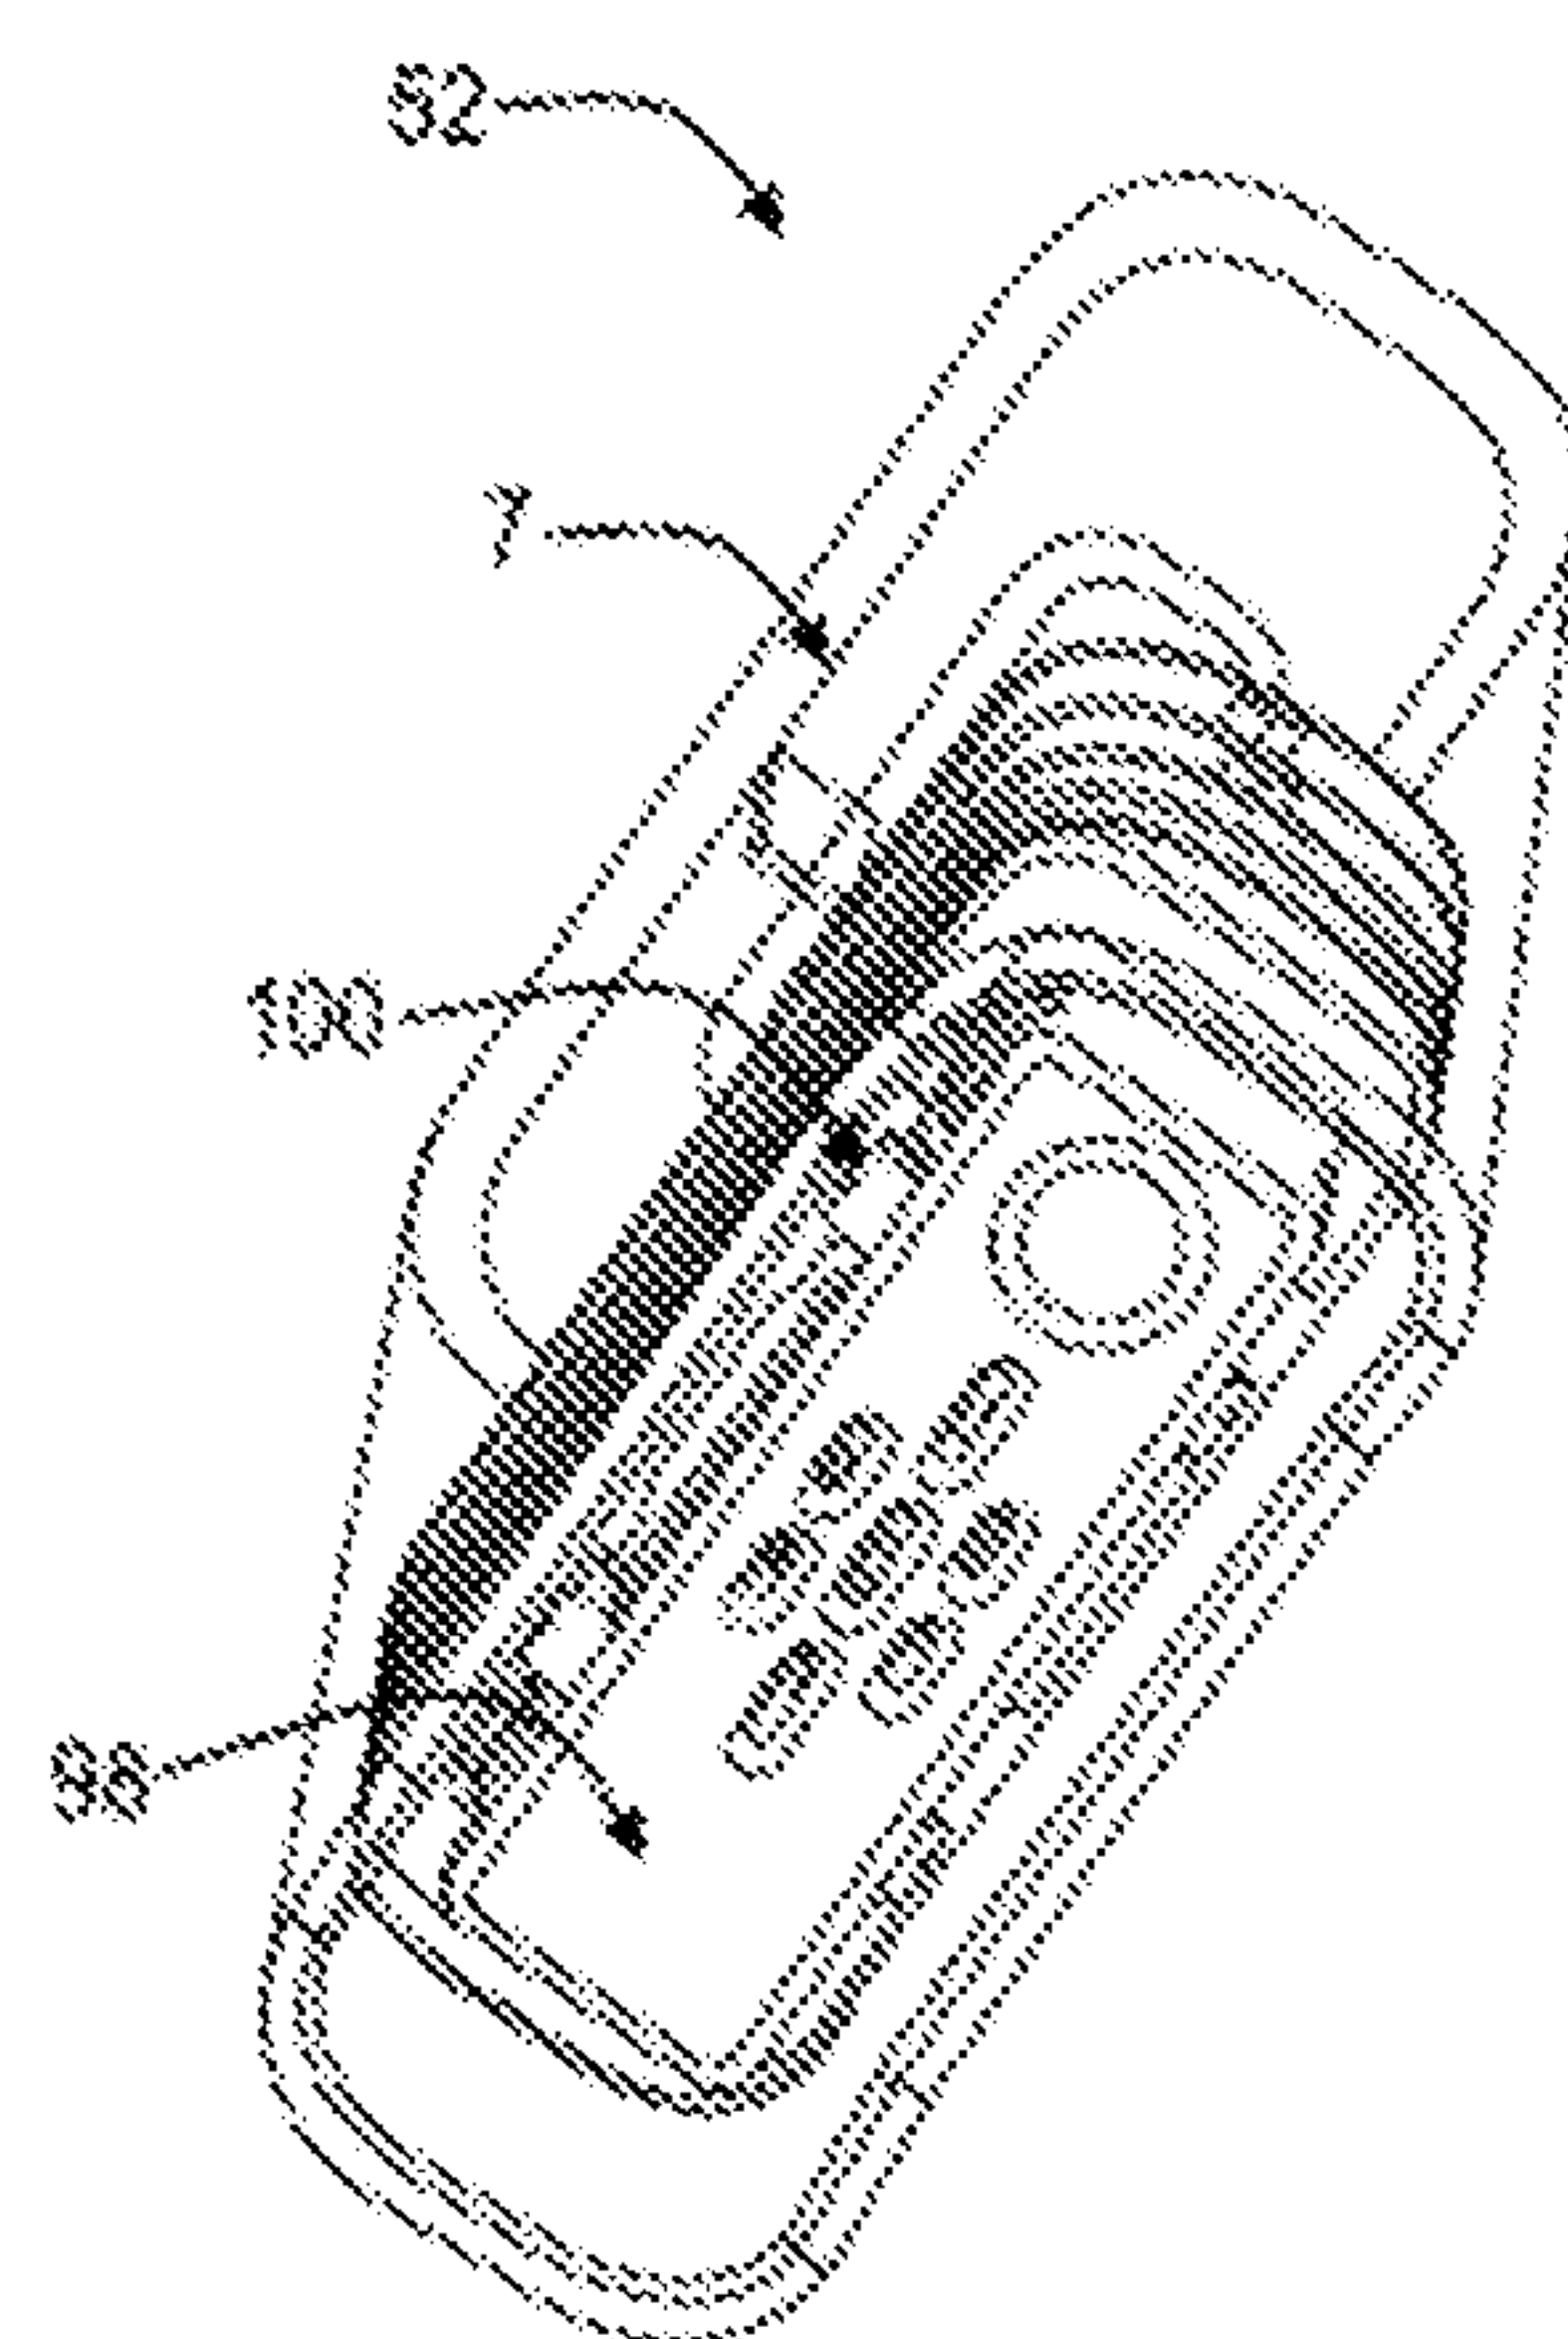
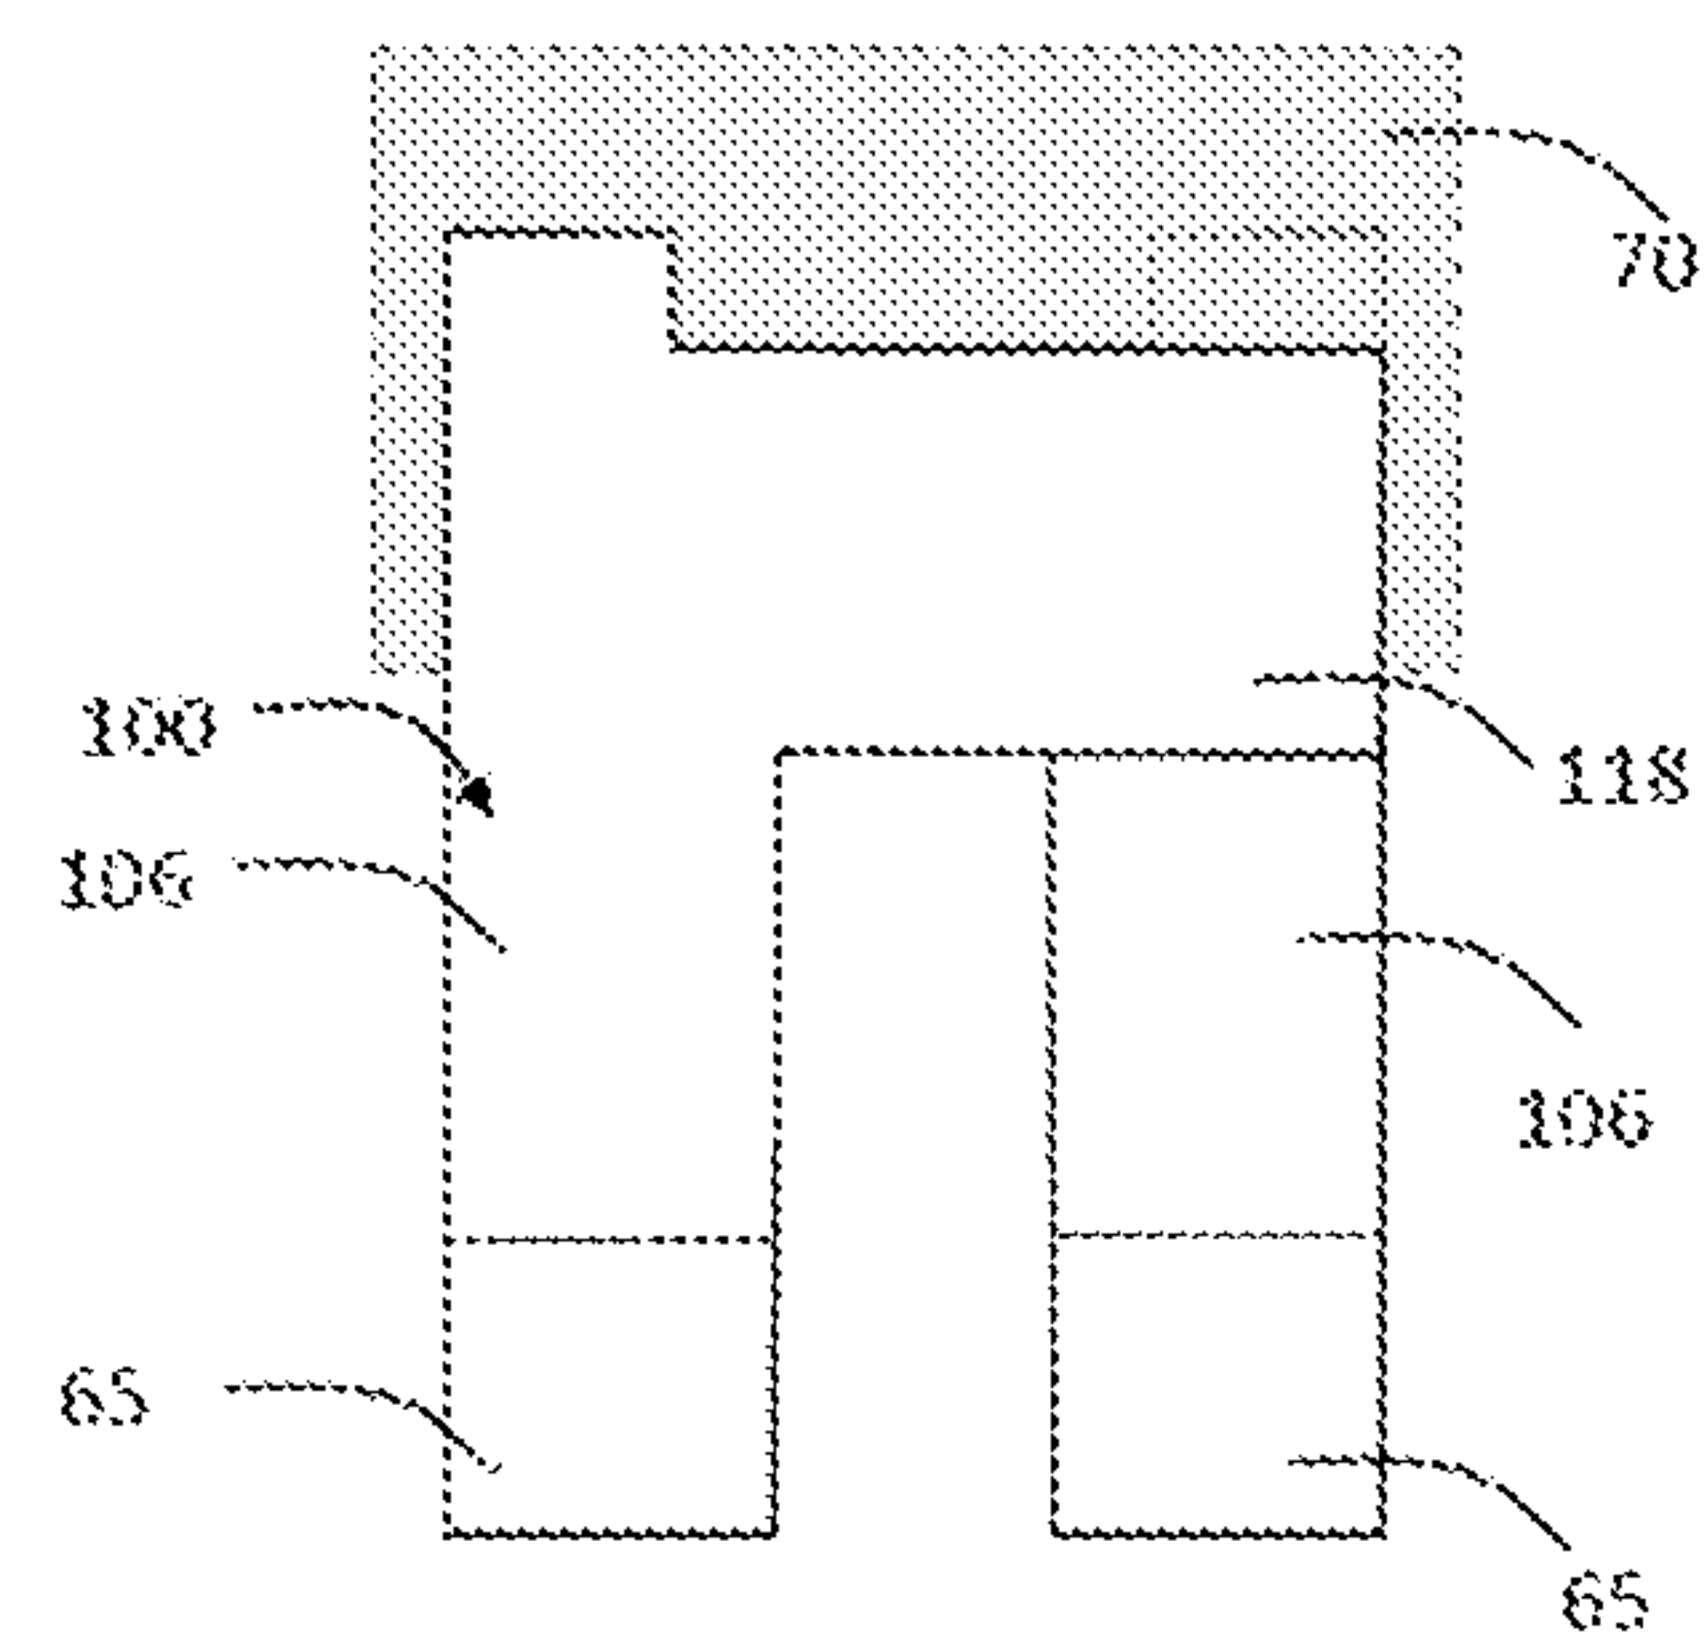
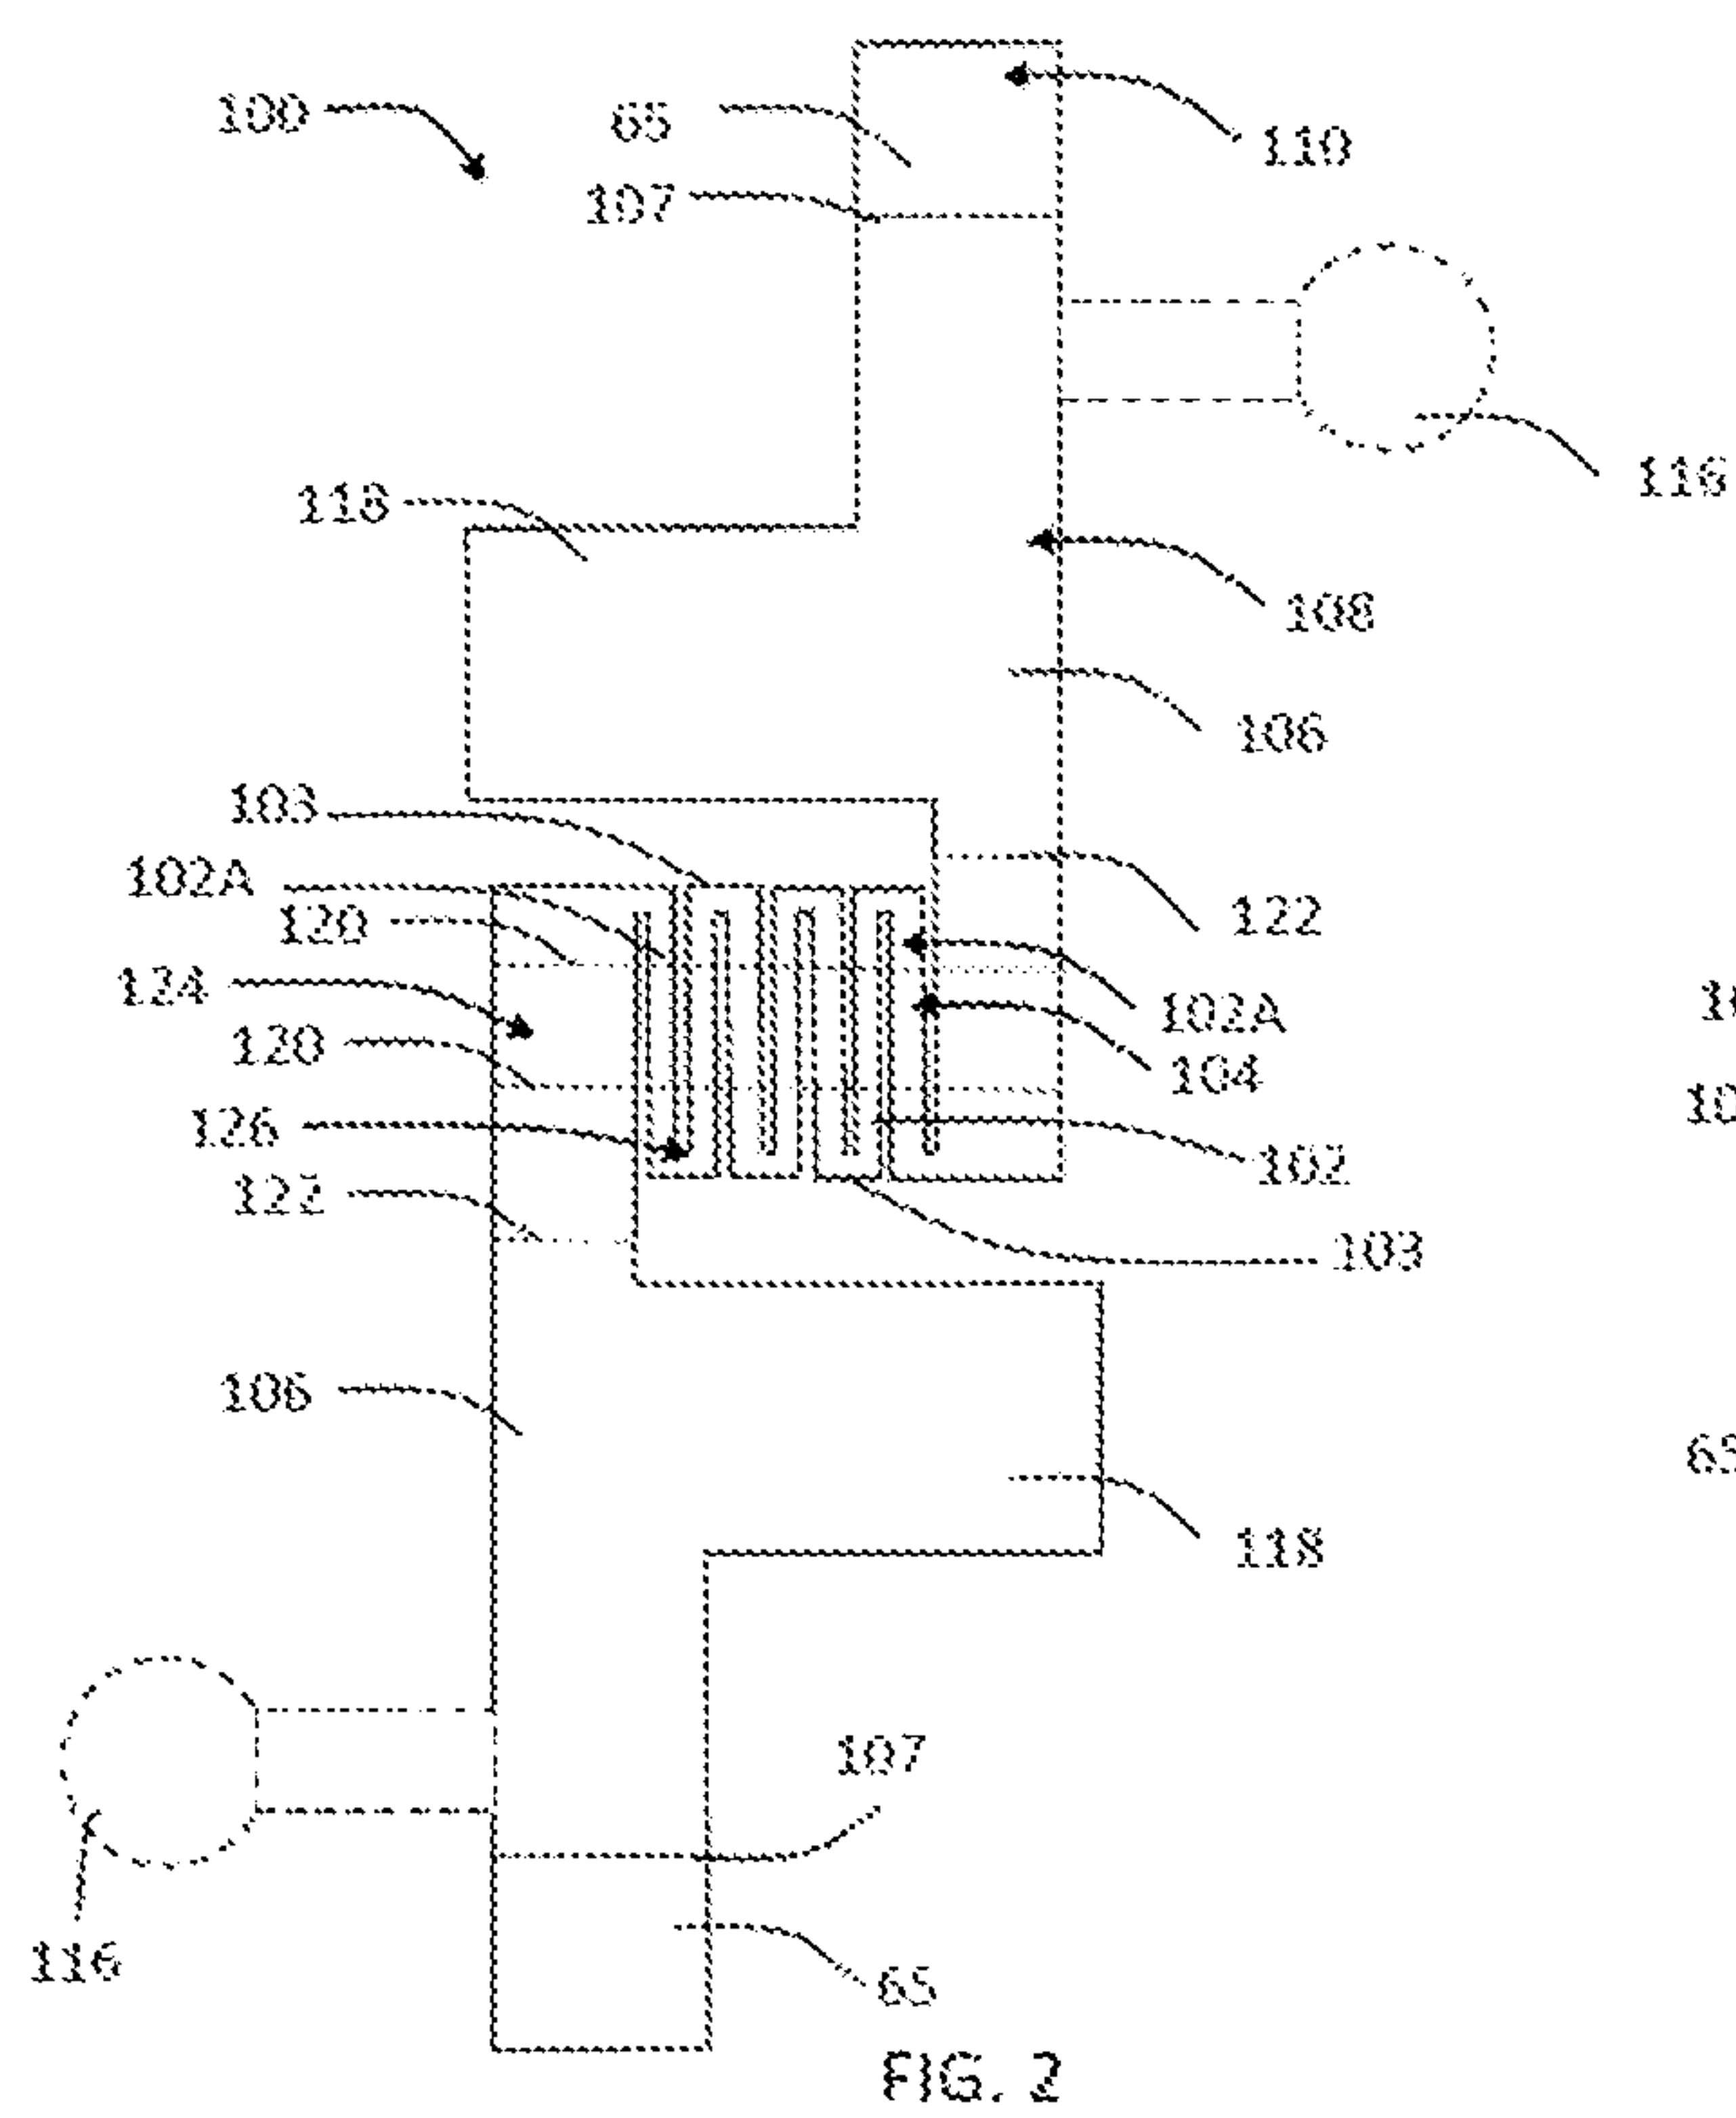


FIG. 1F



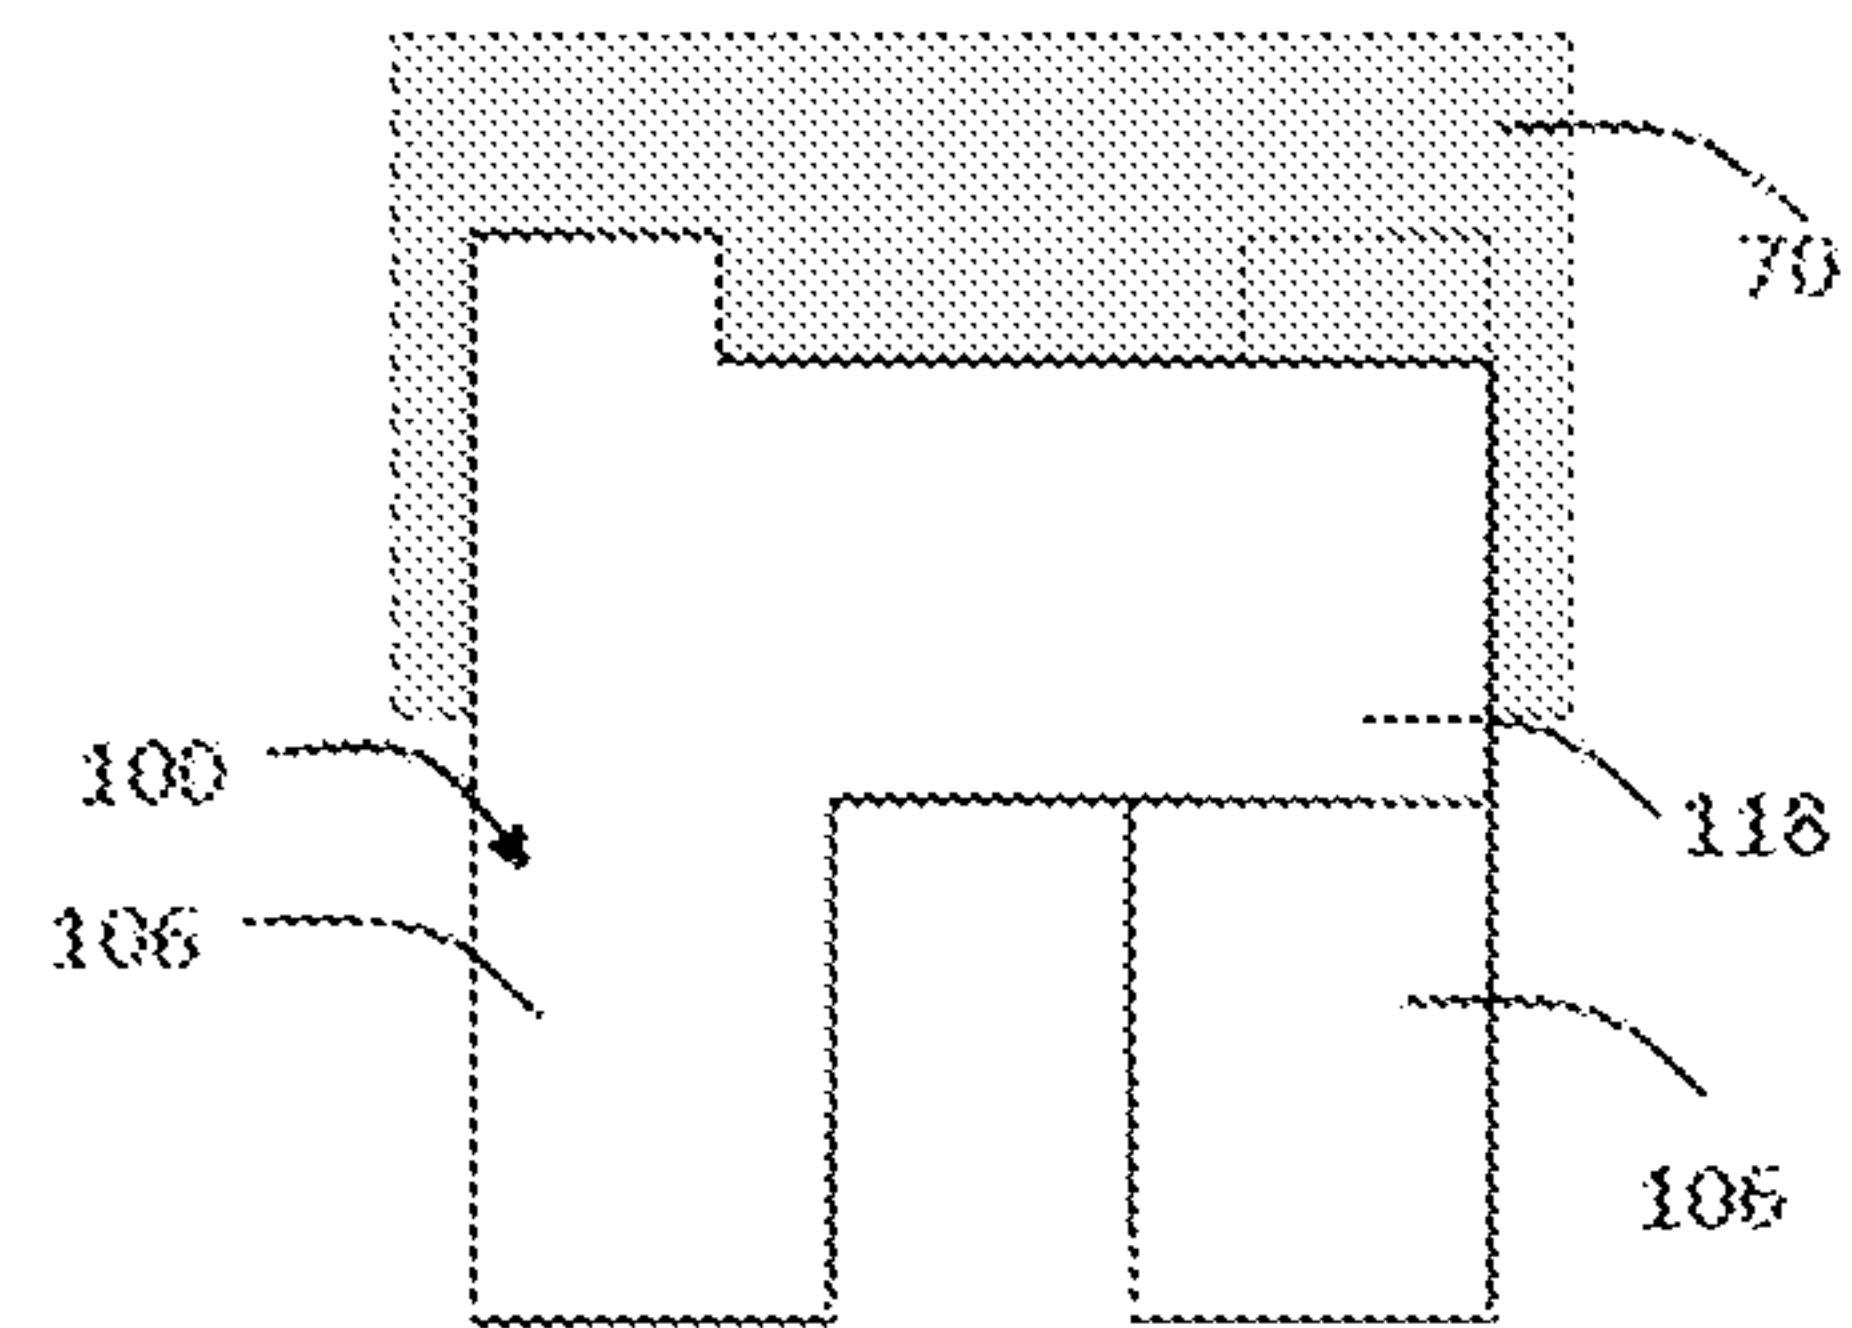


FIG. 4

52





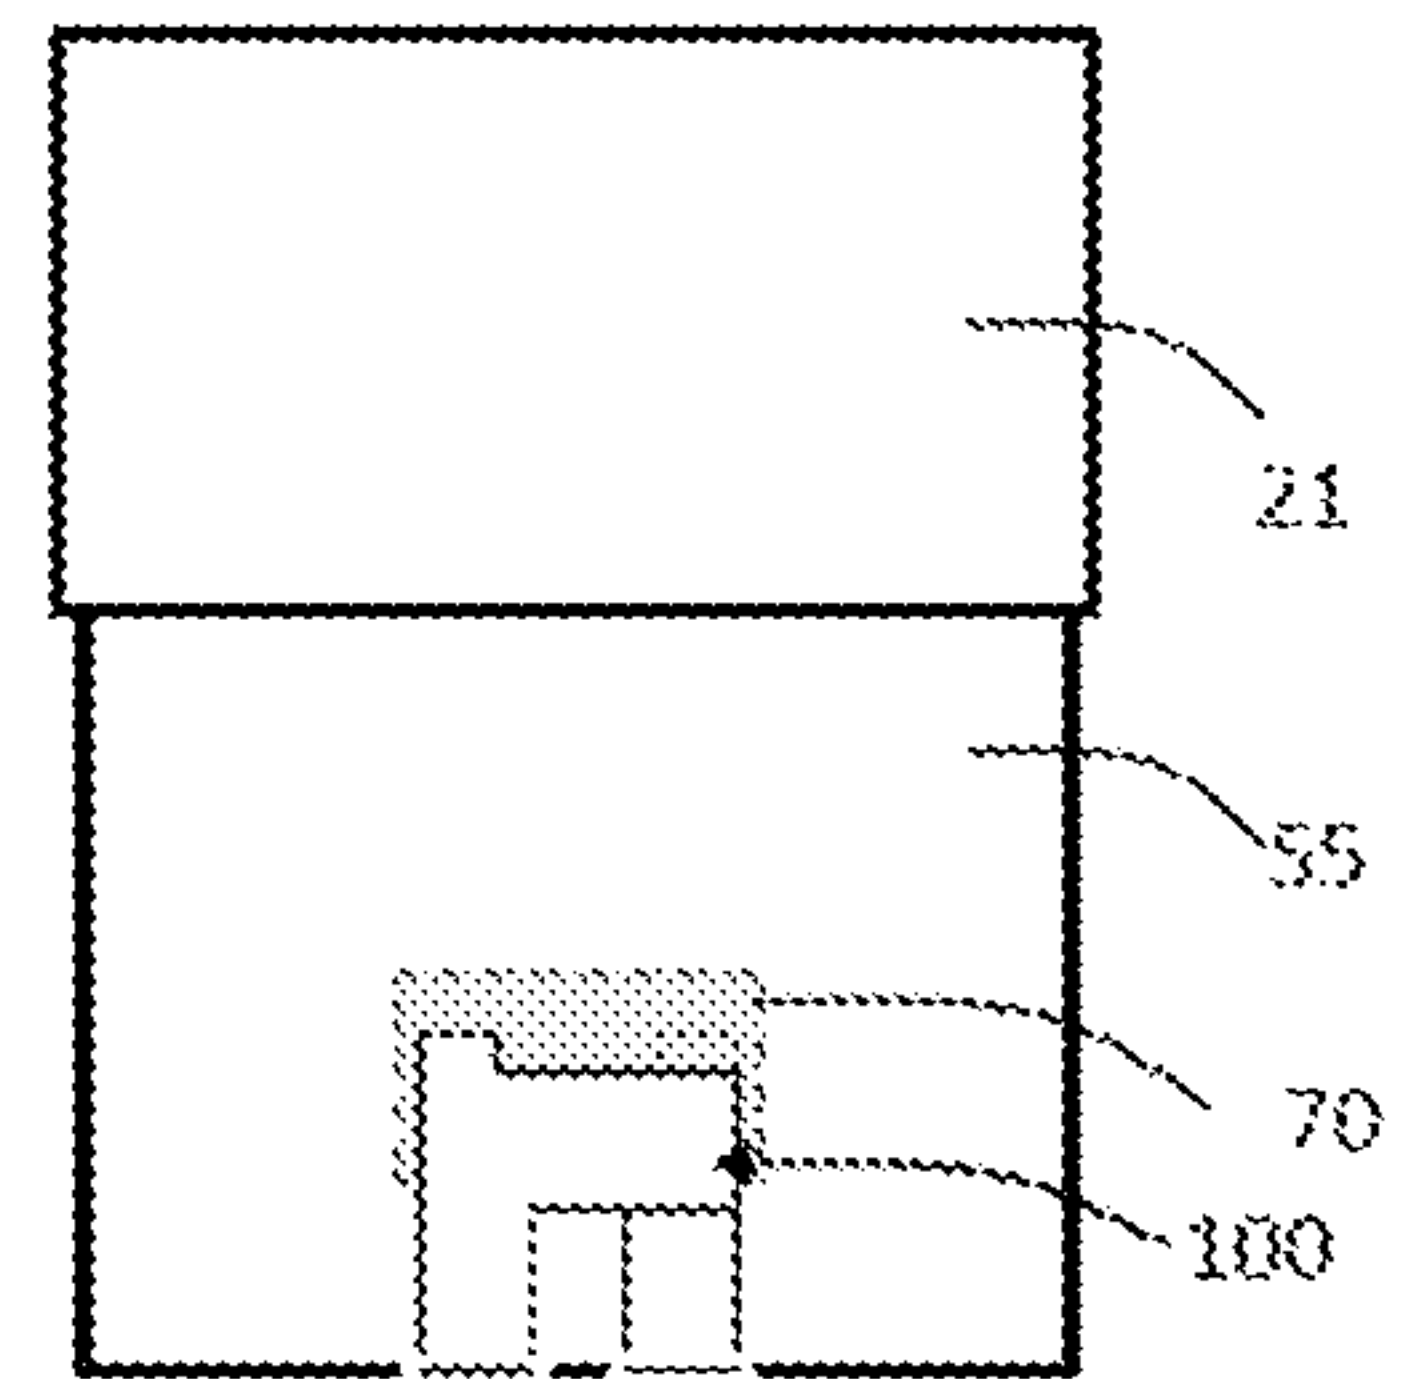


FIG. 5

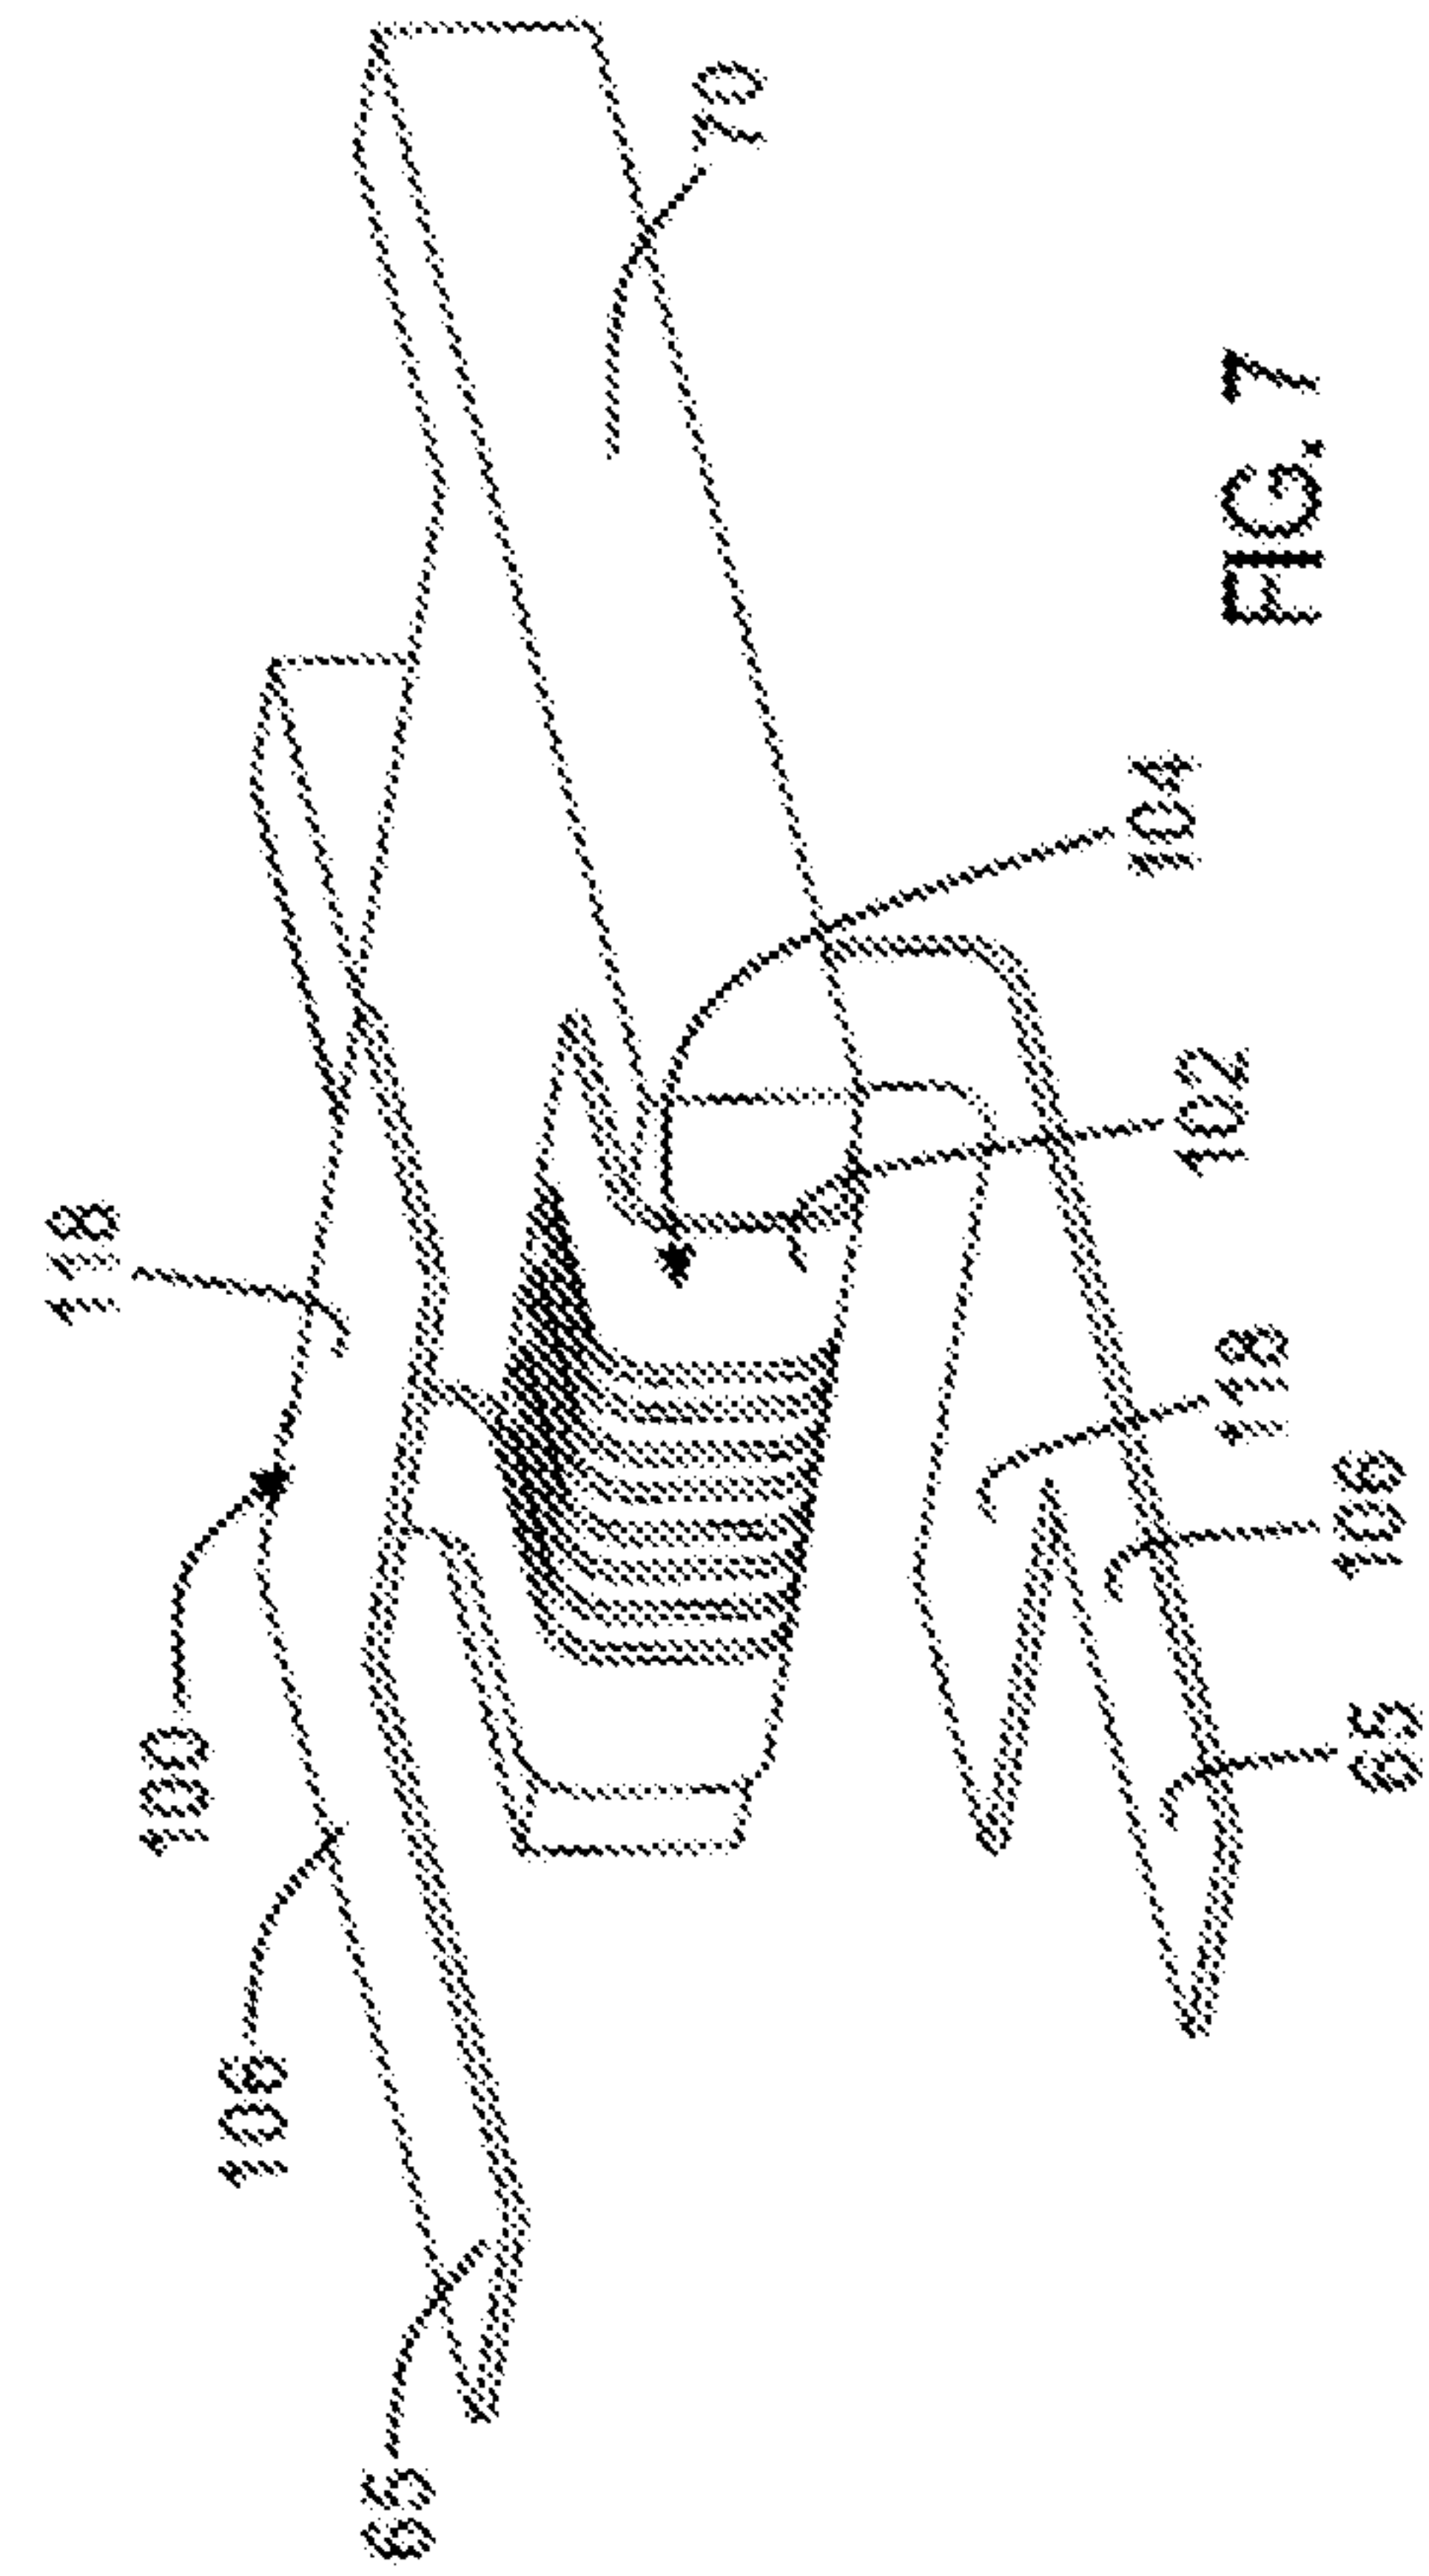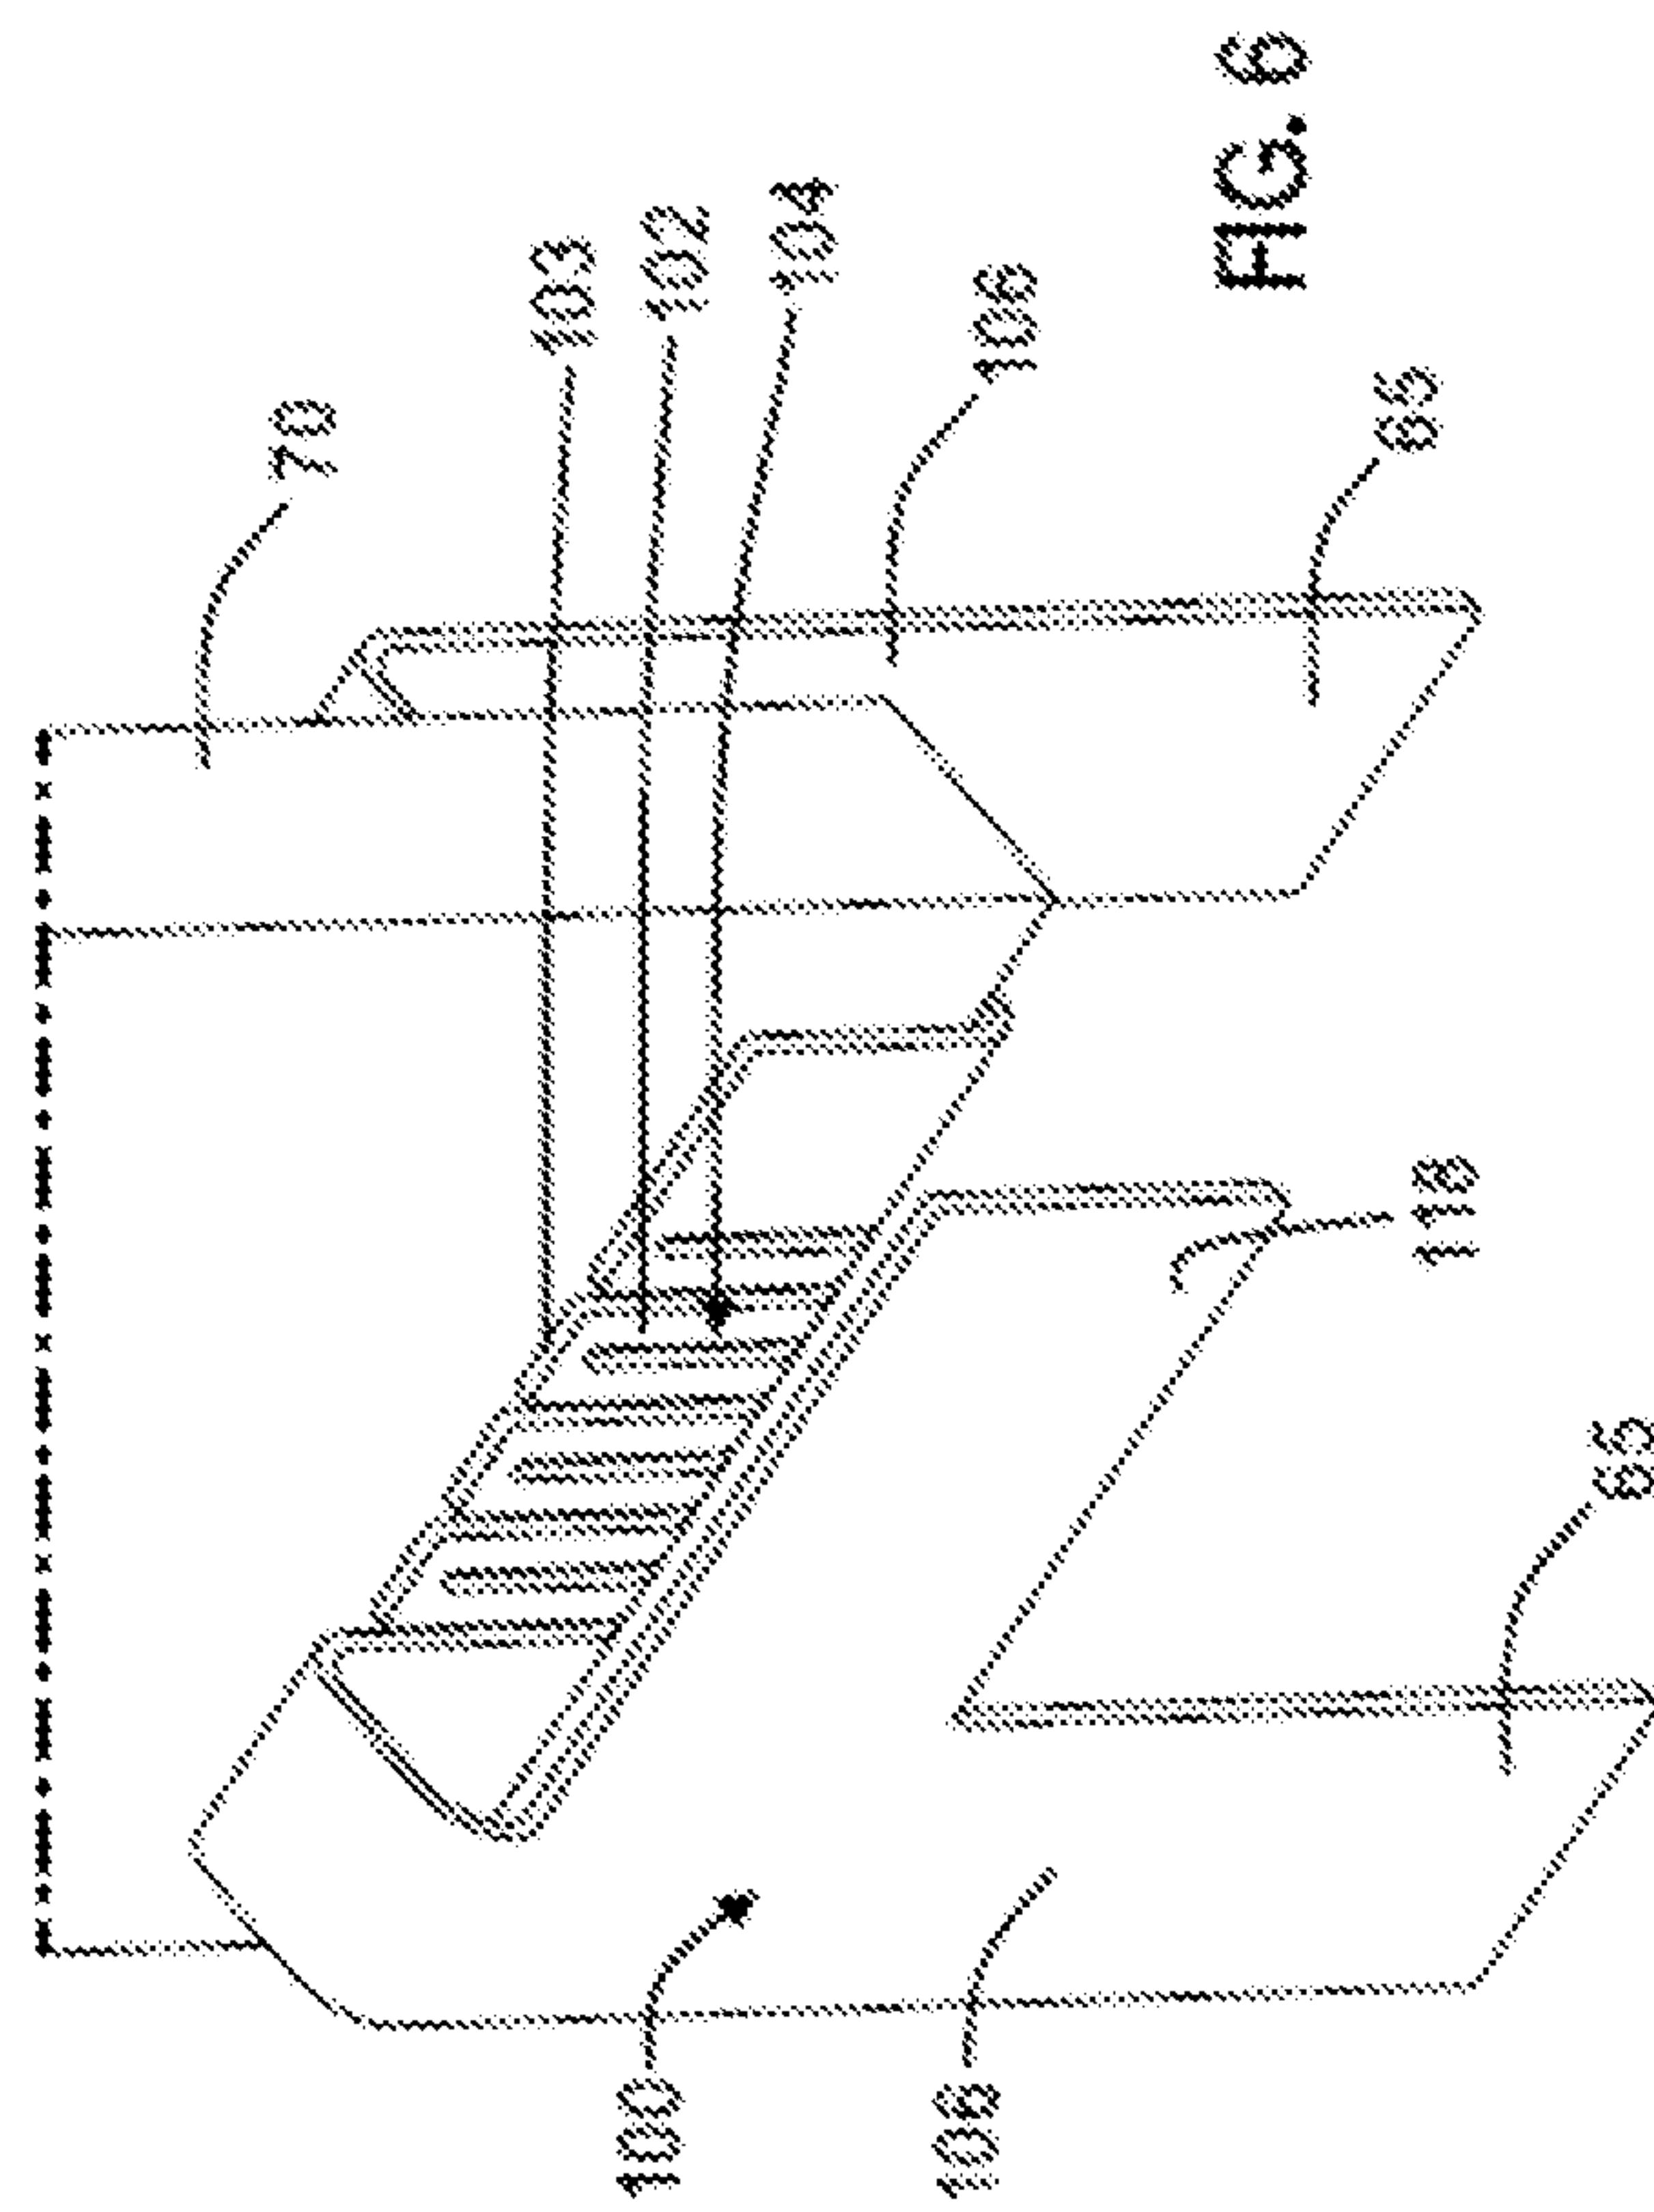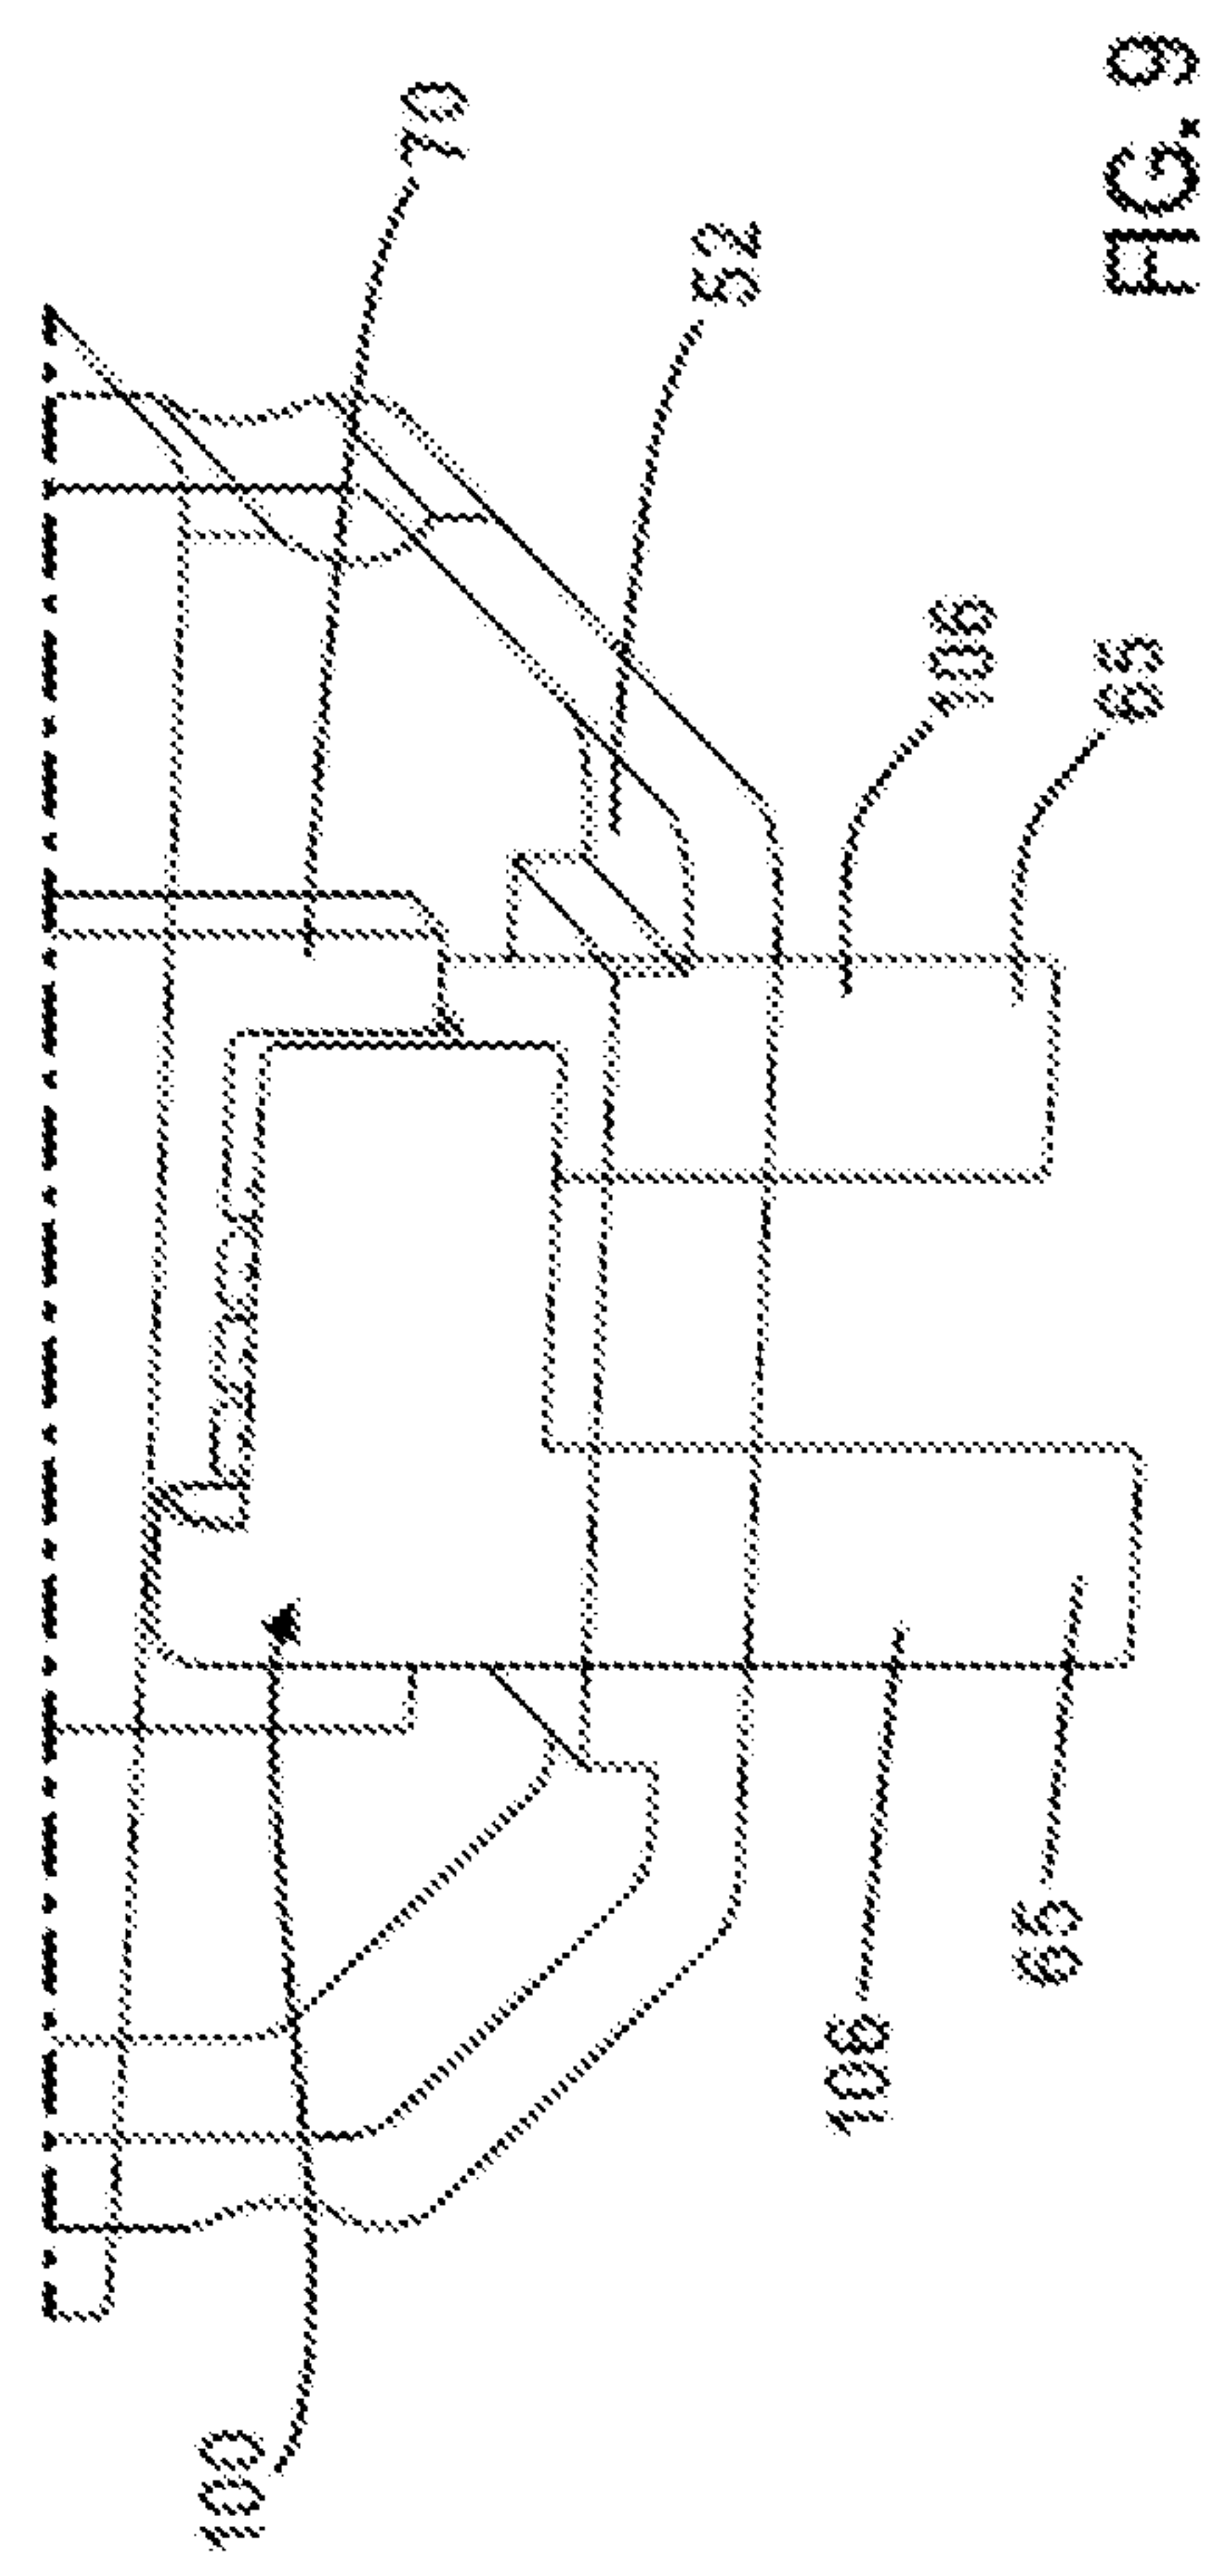

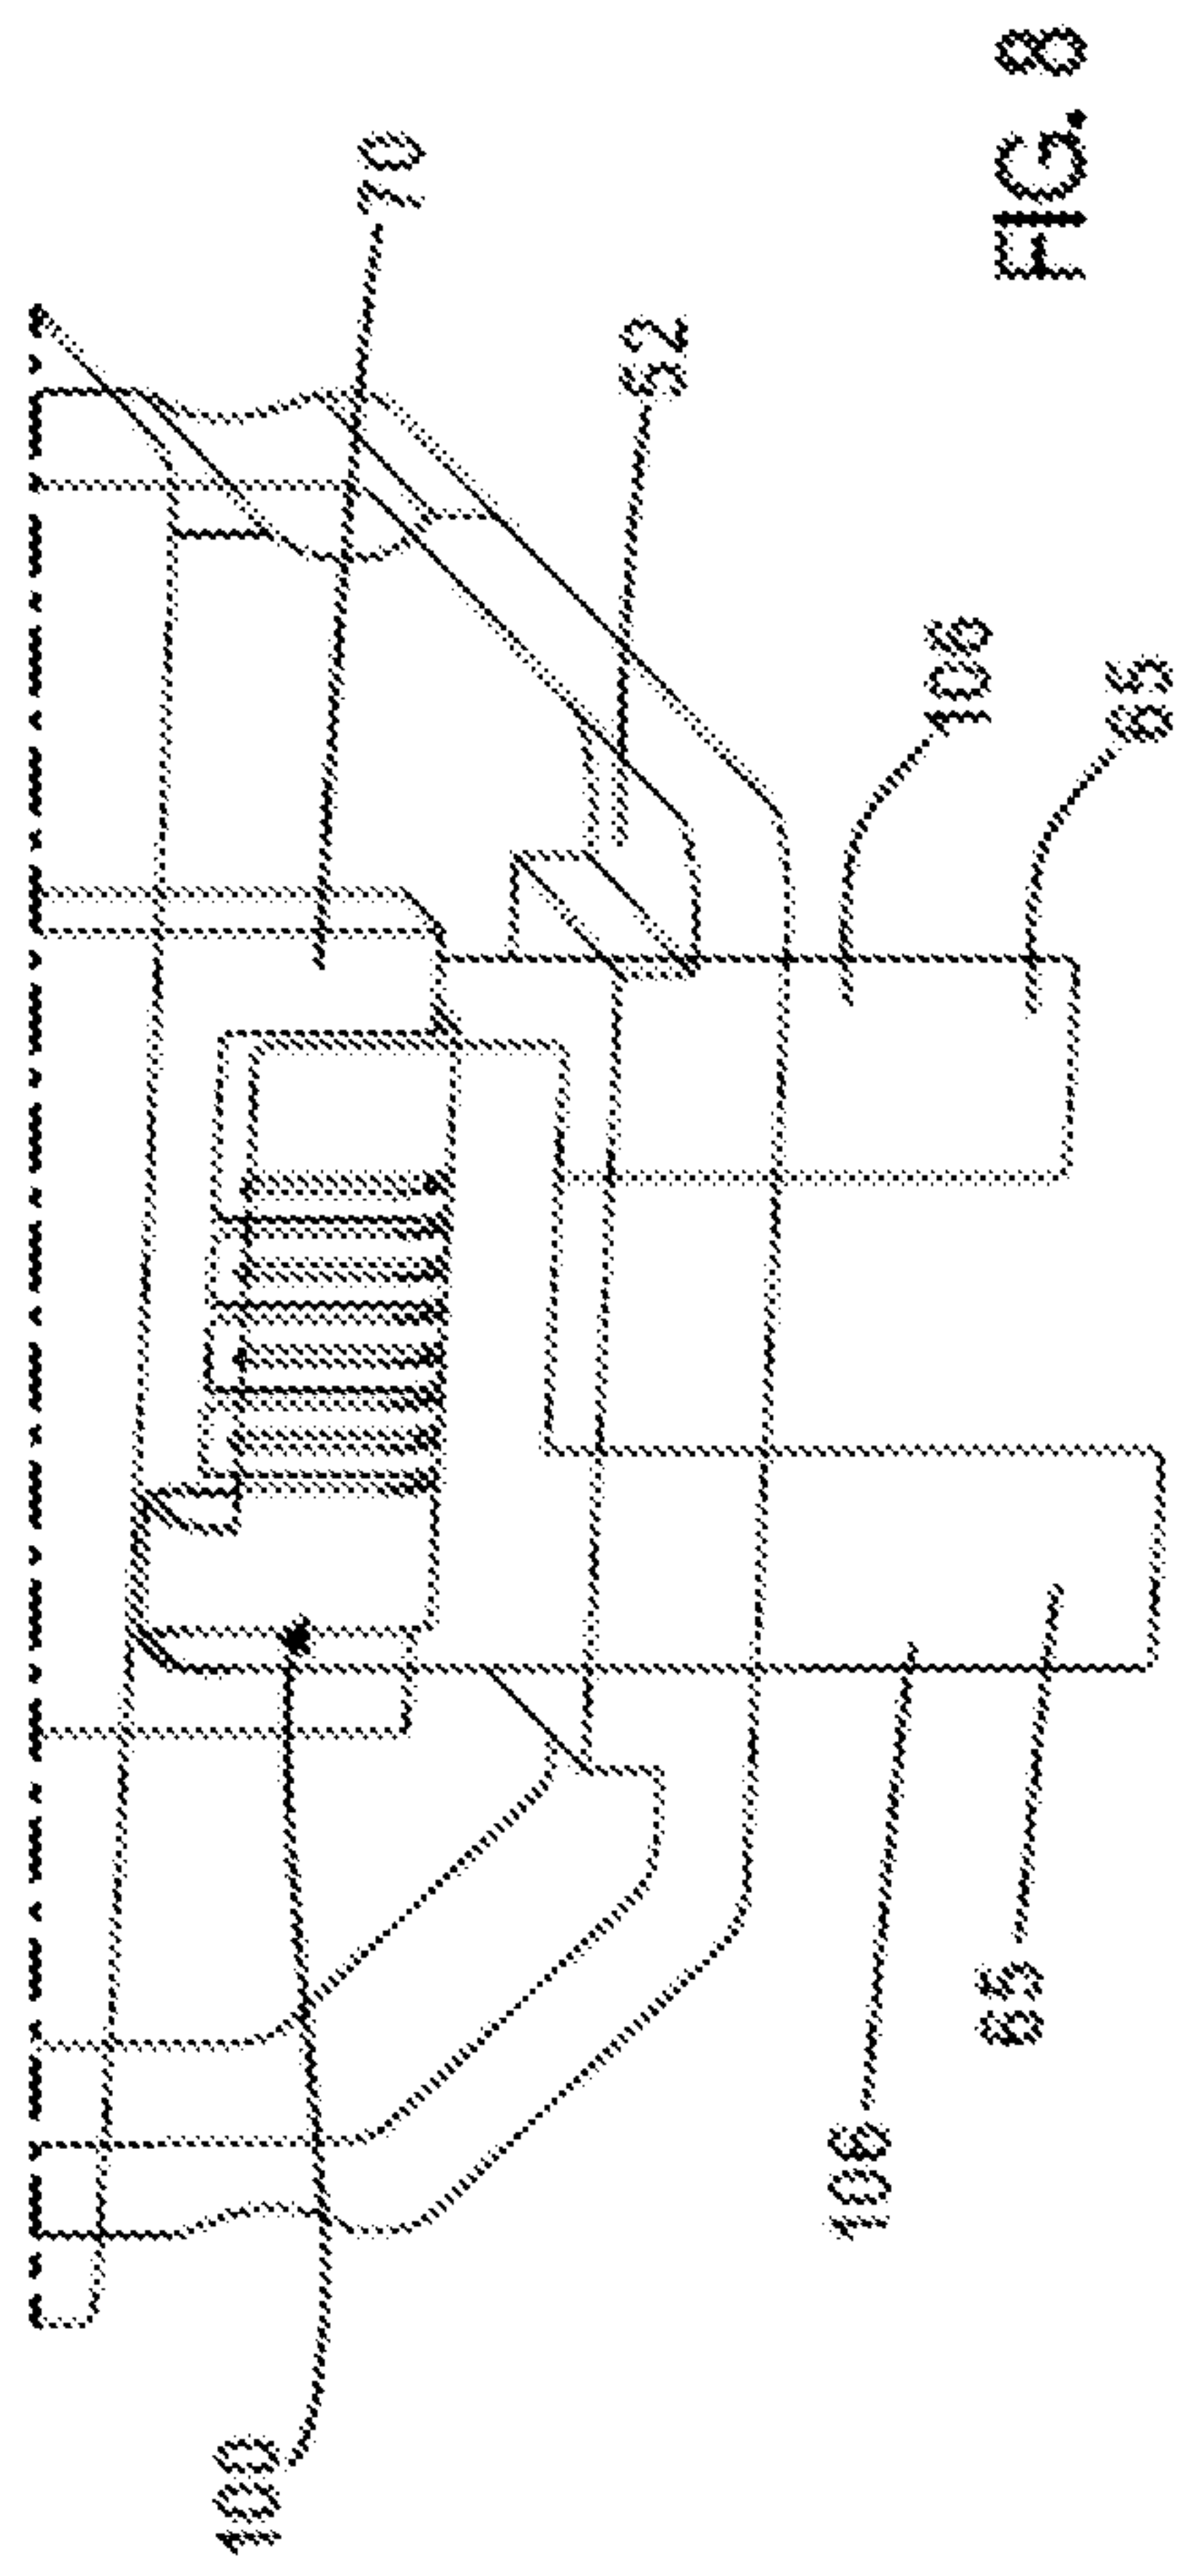

83

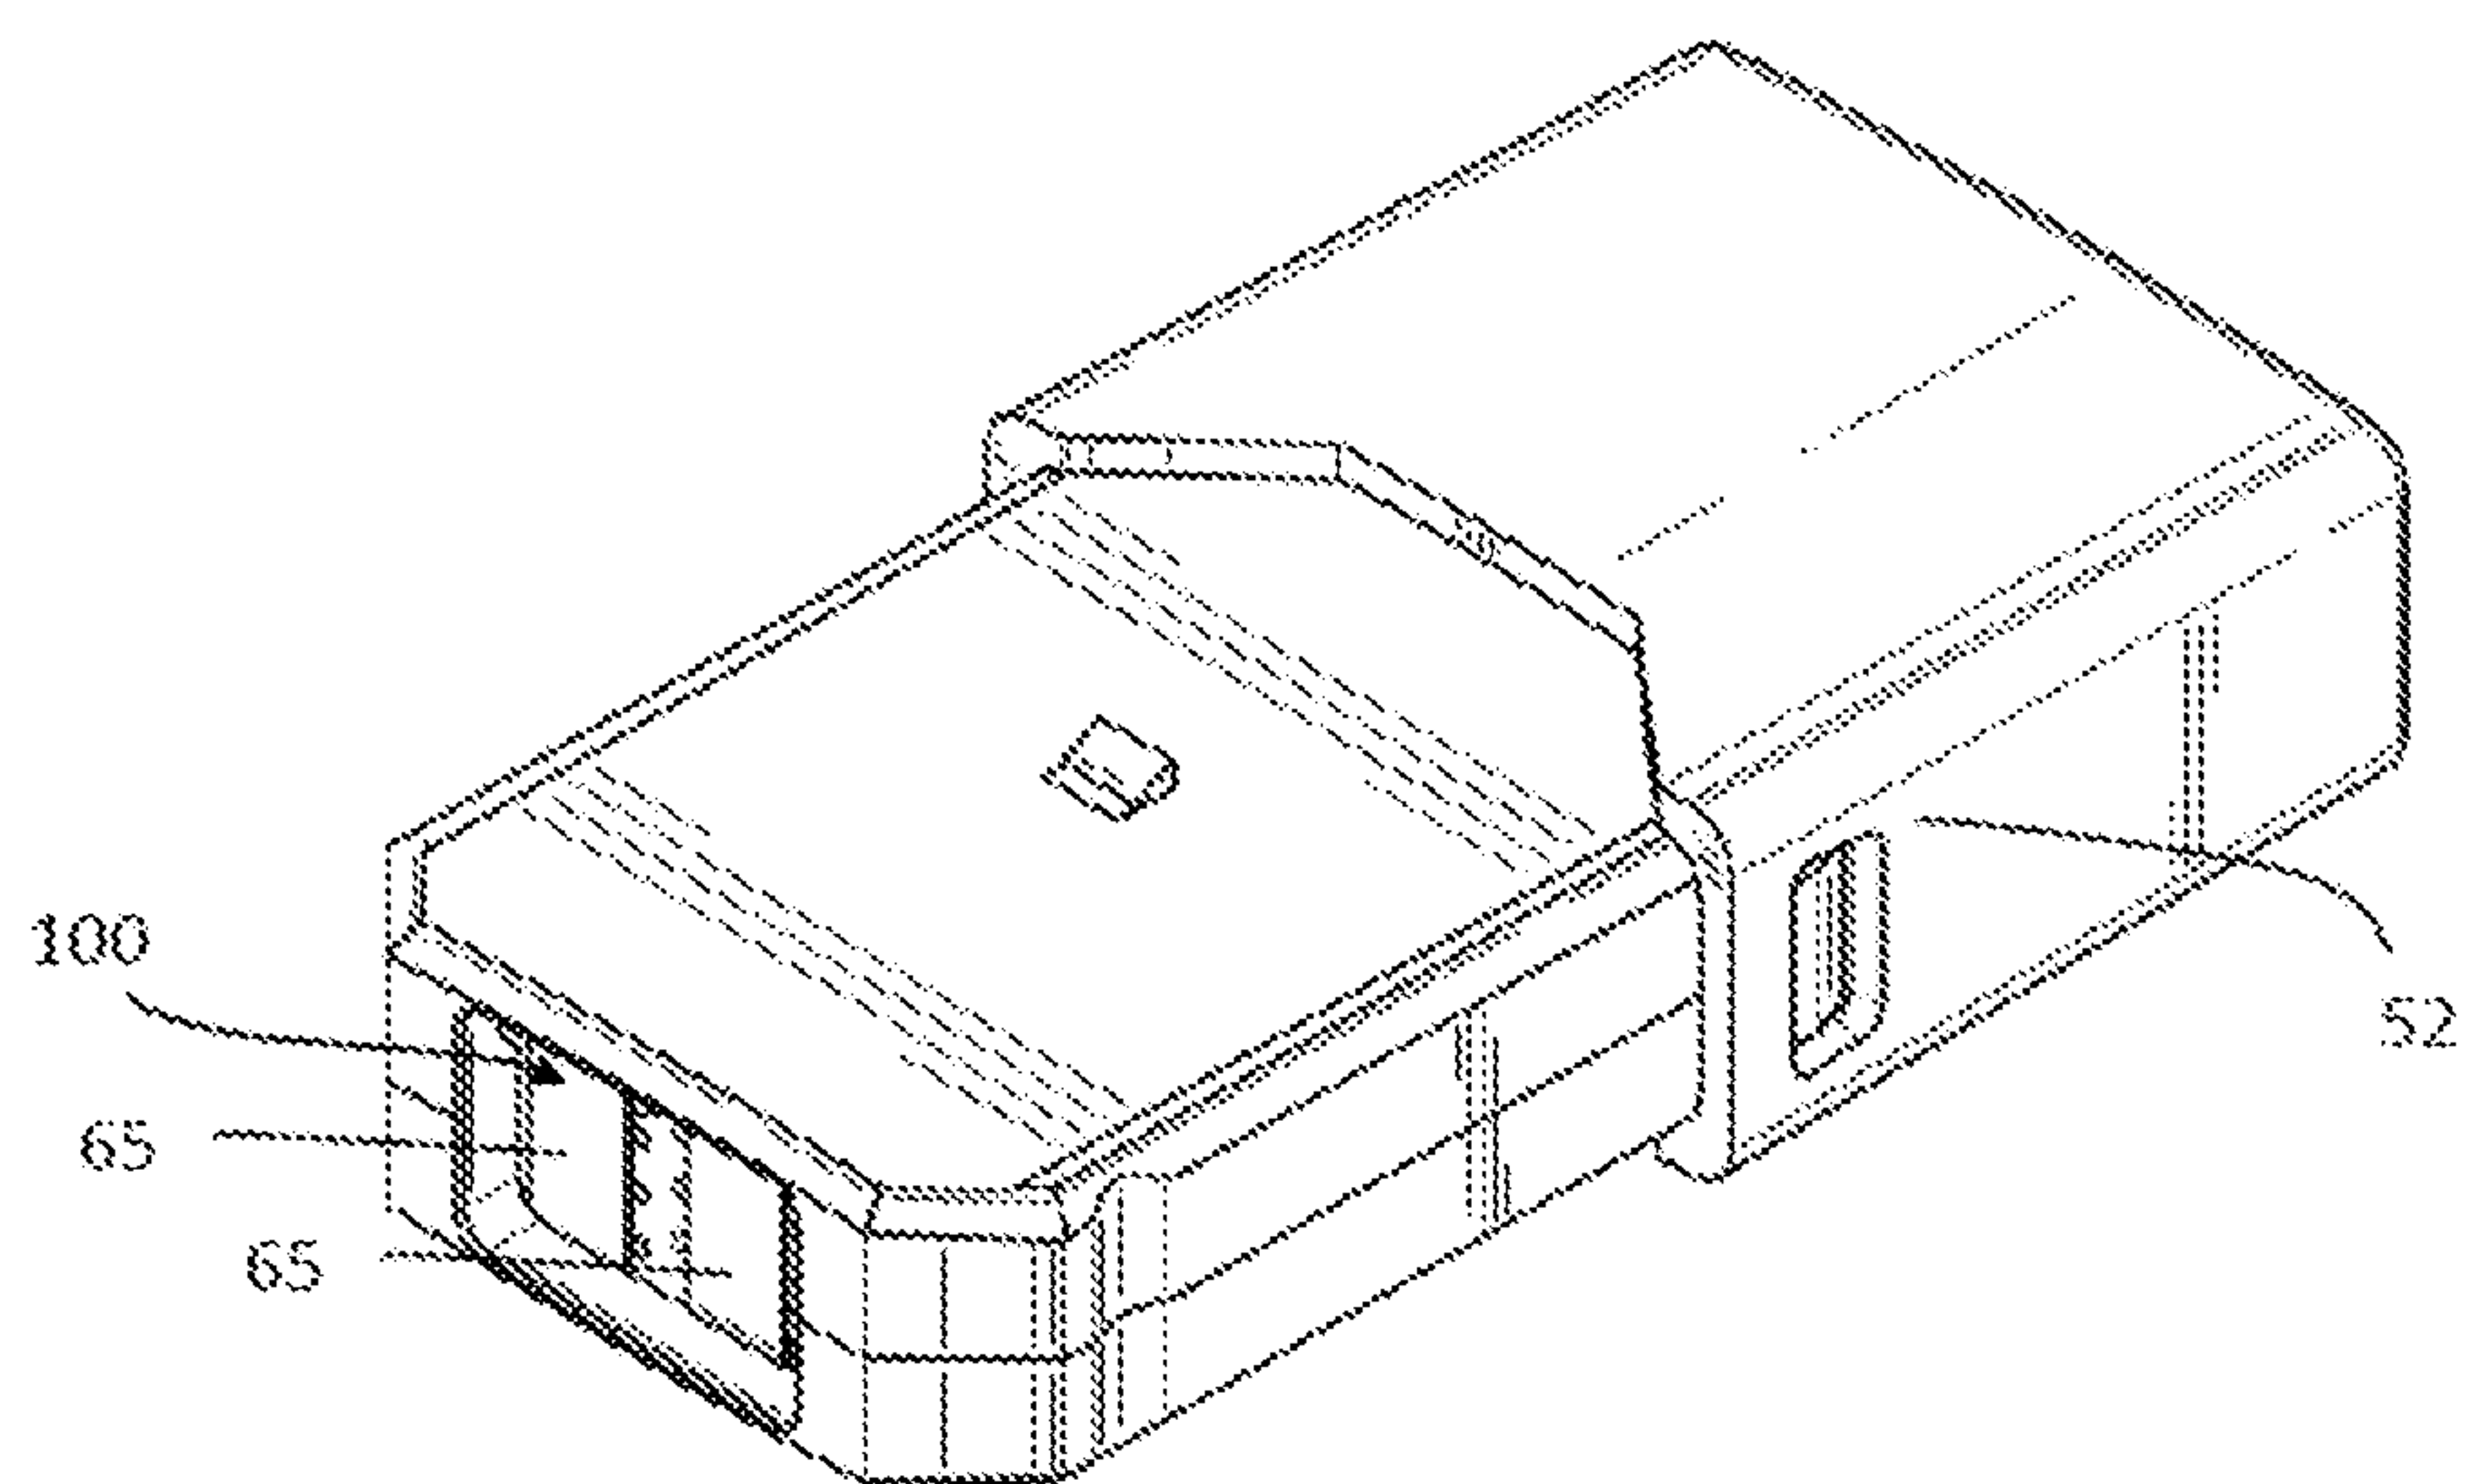
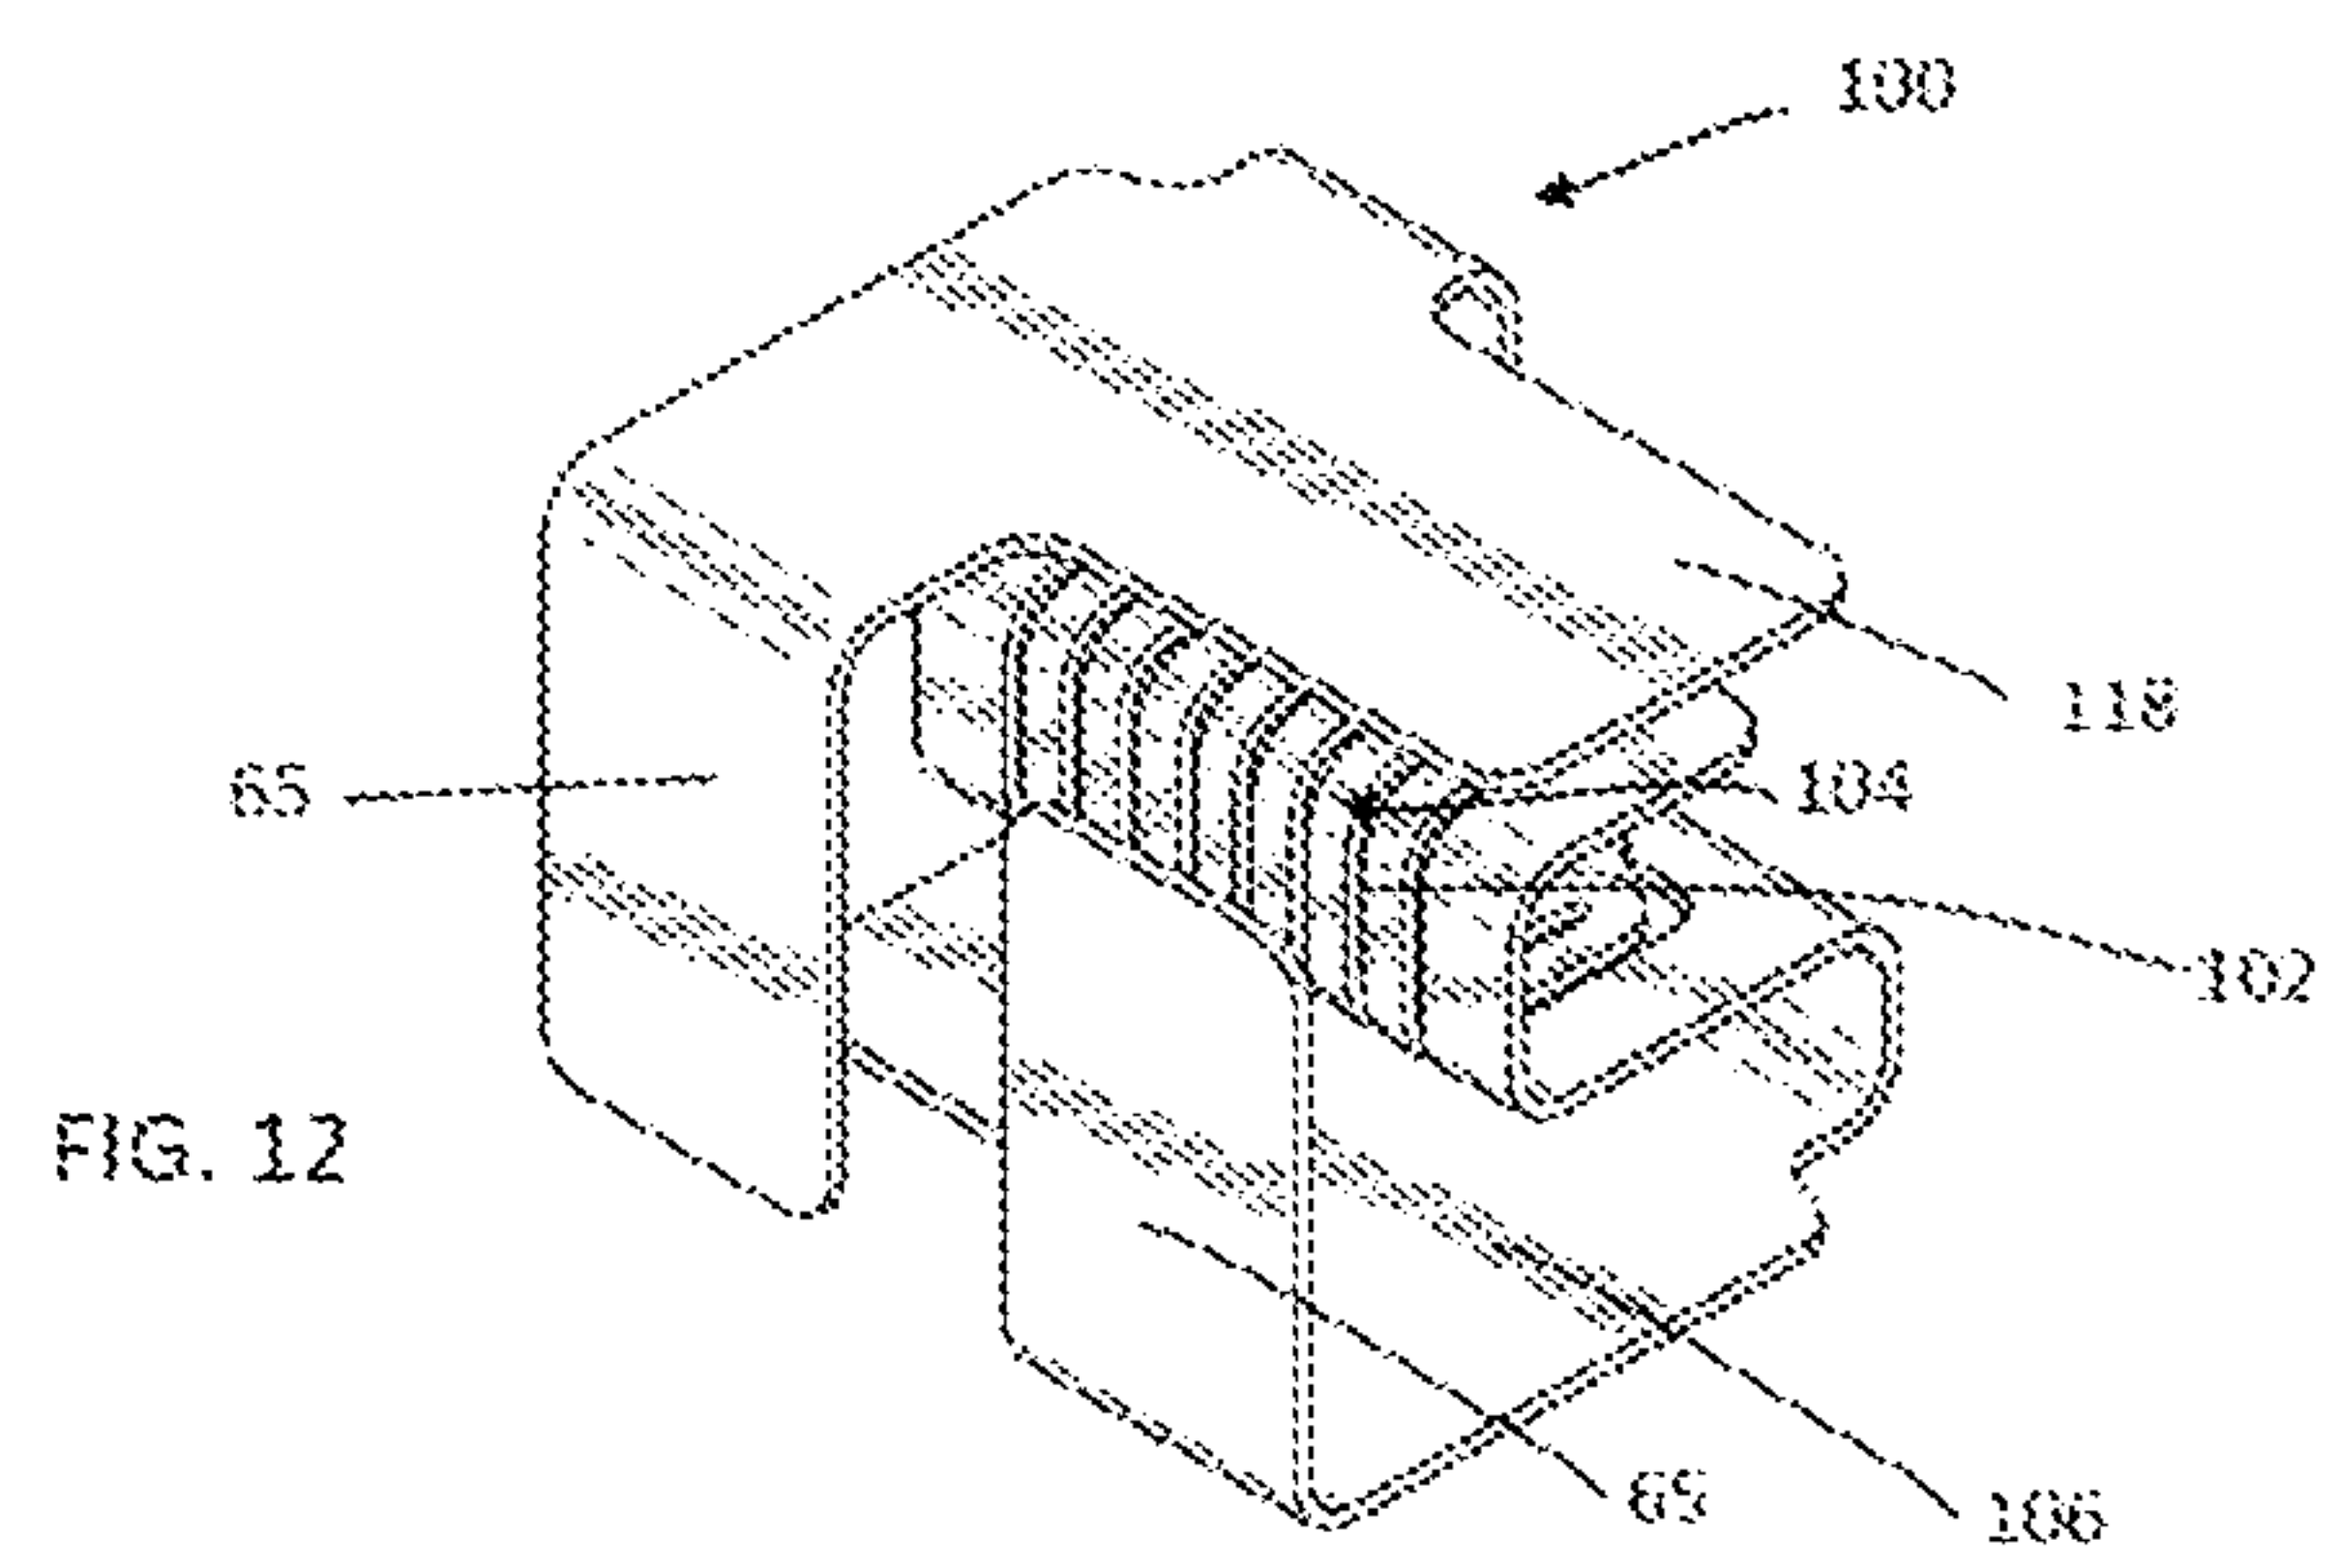
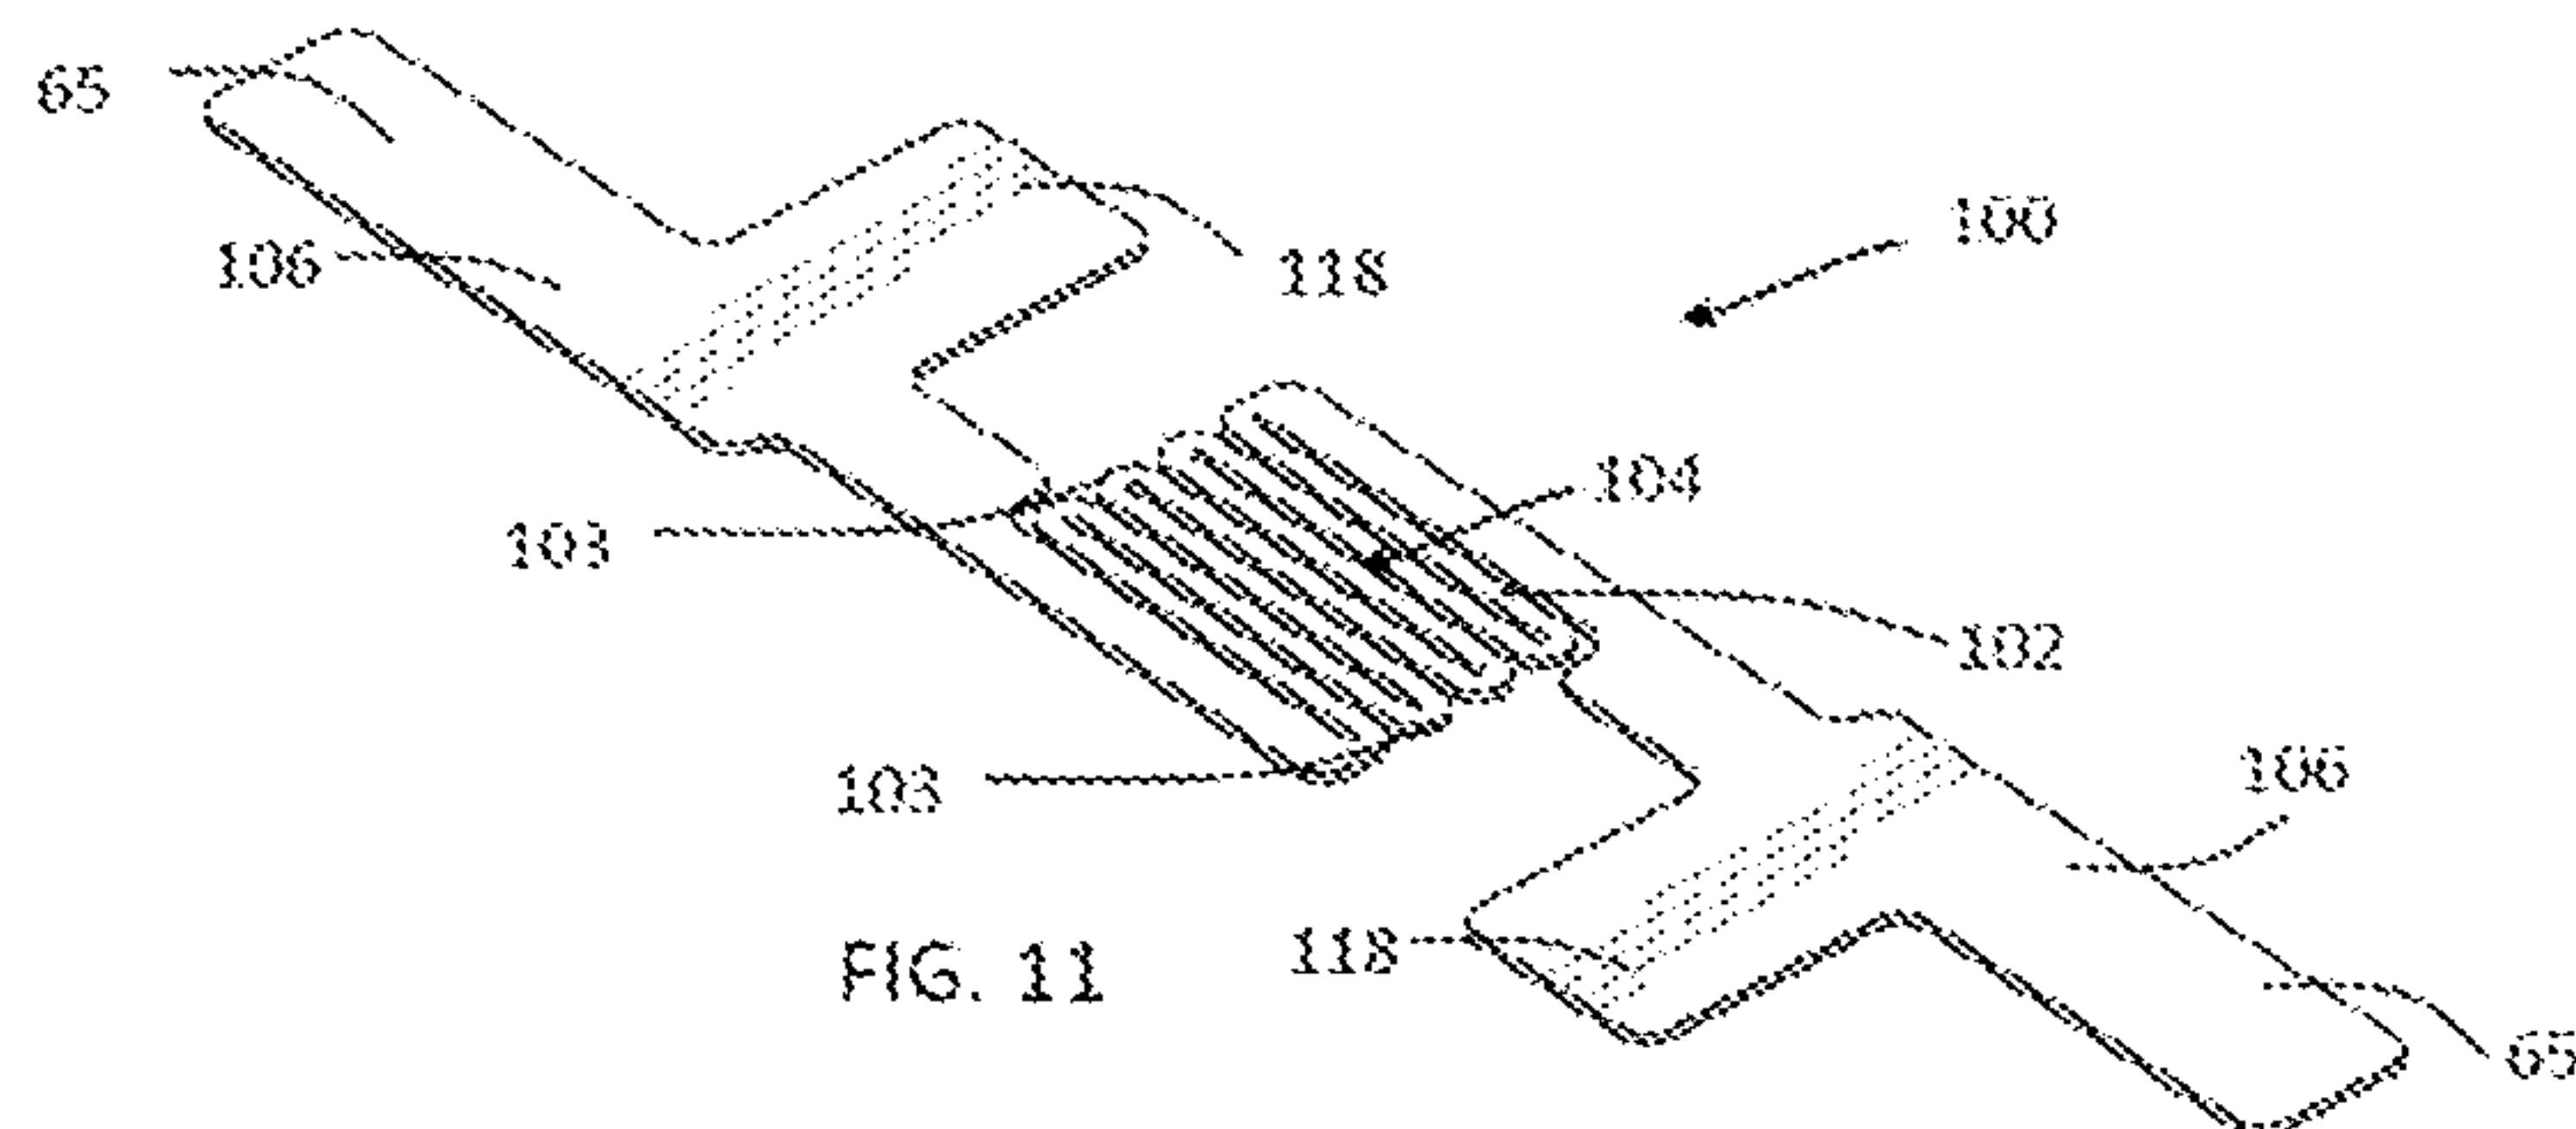


FIG. 10



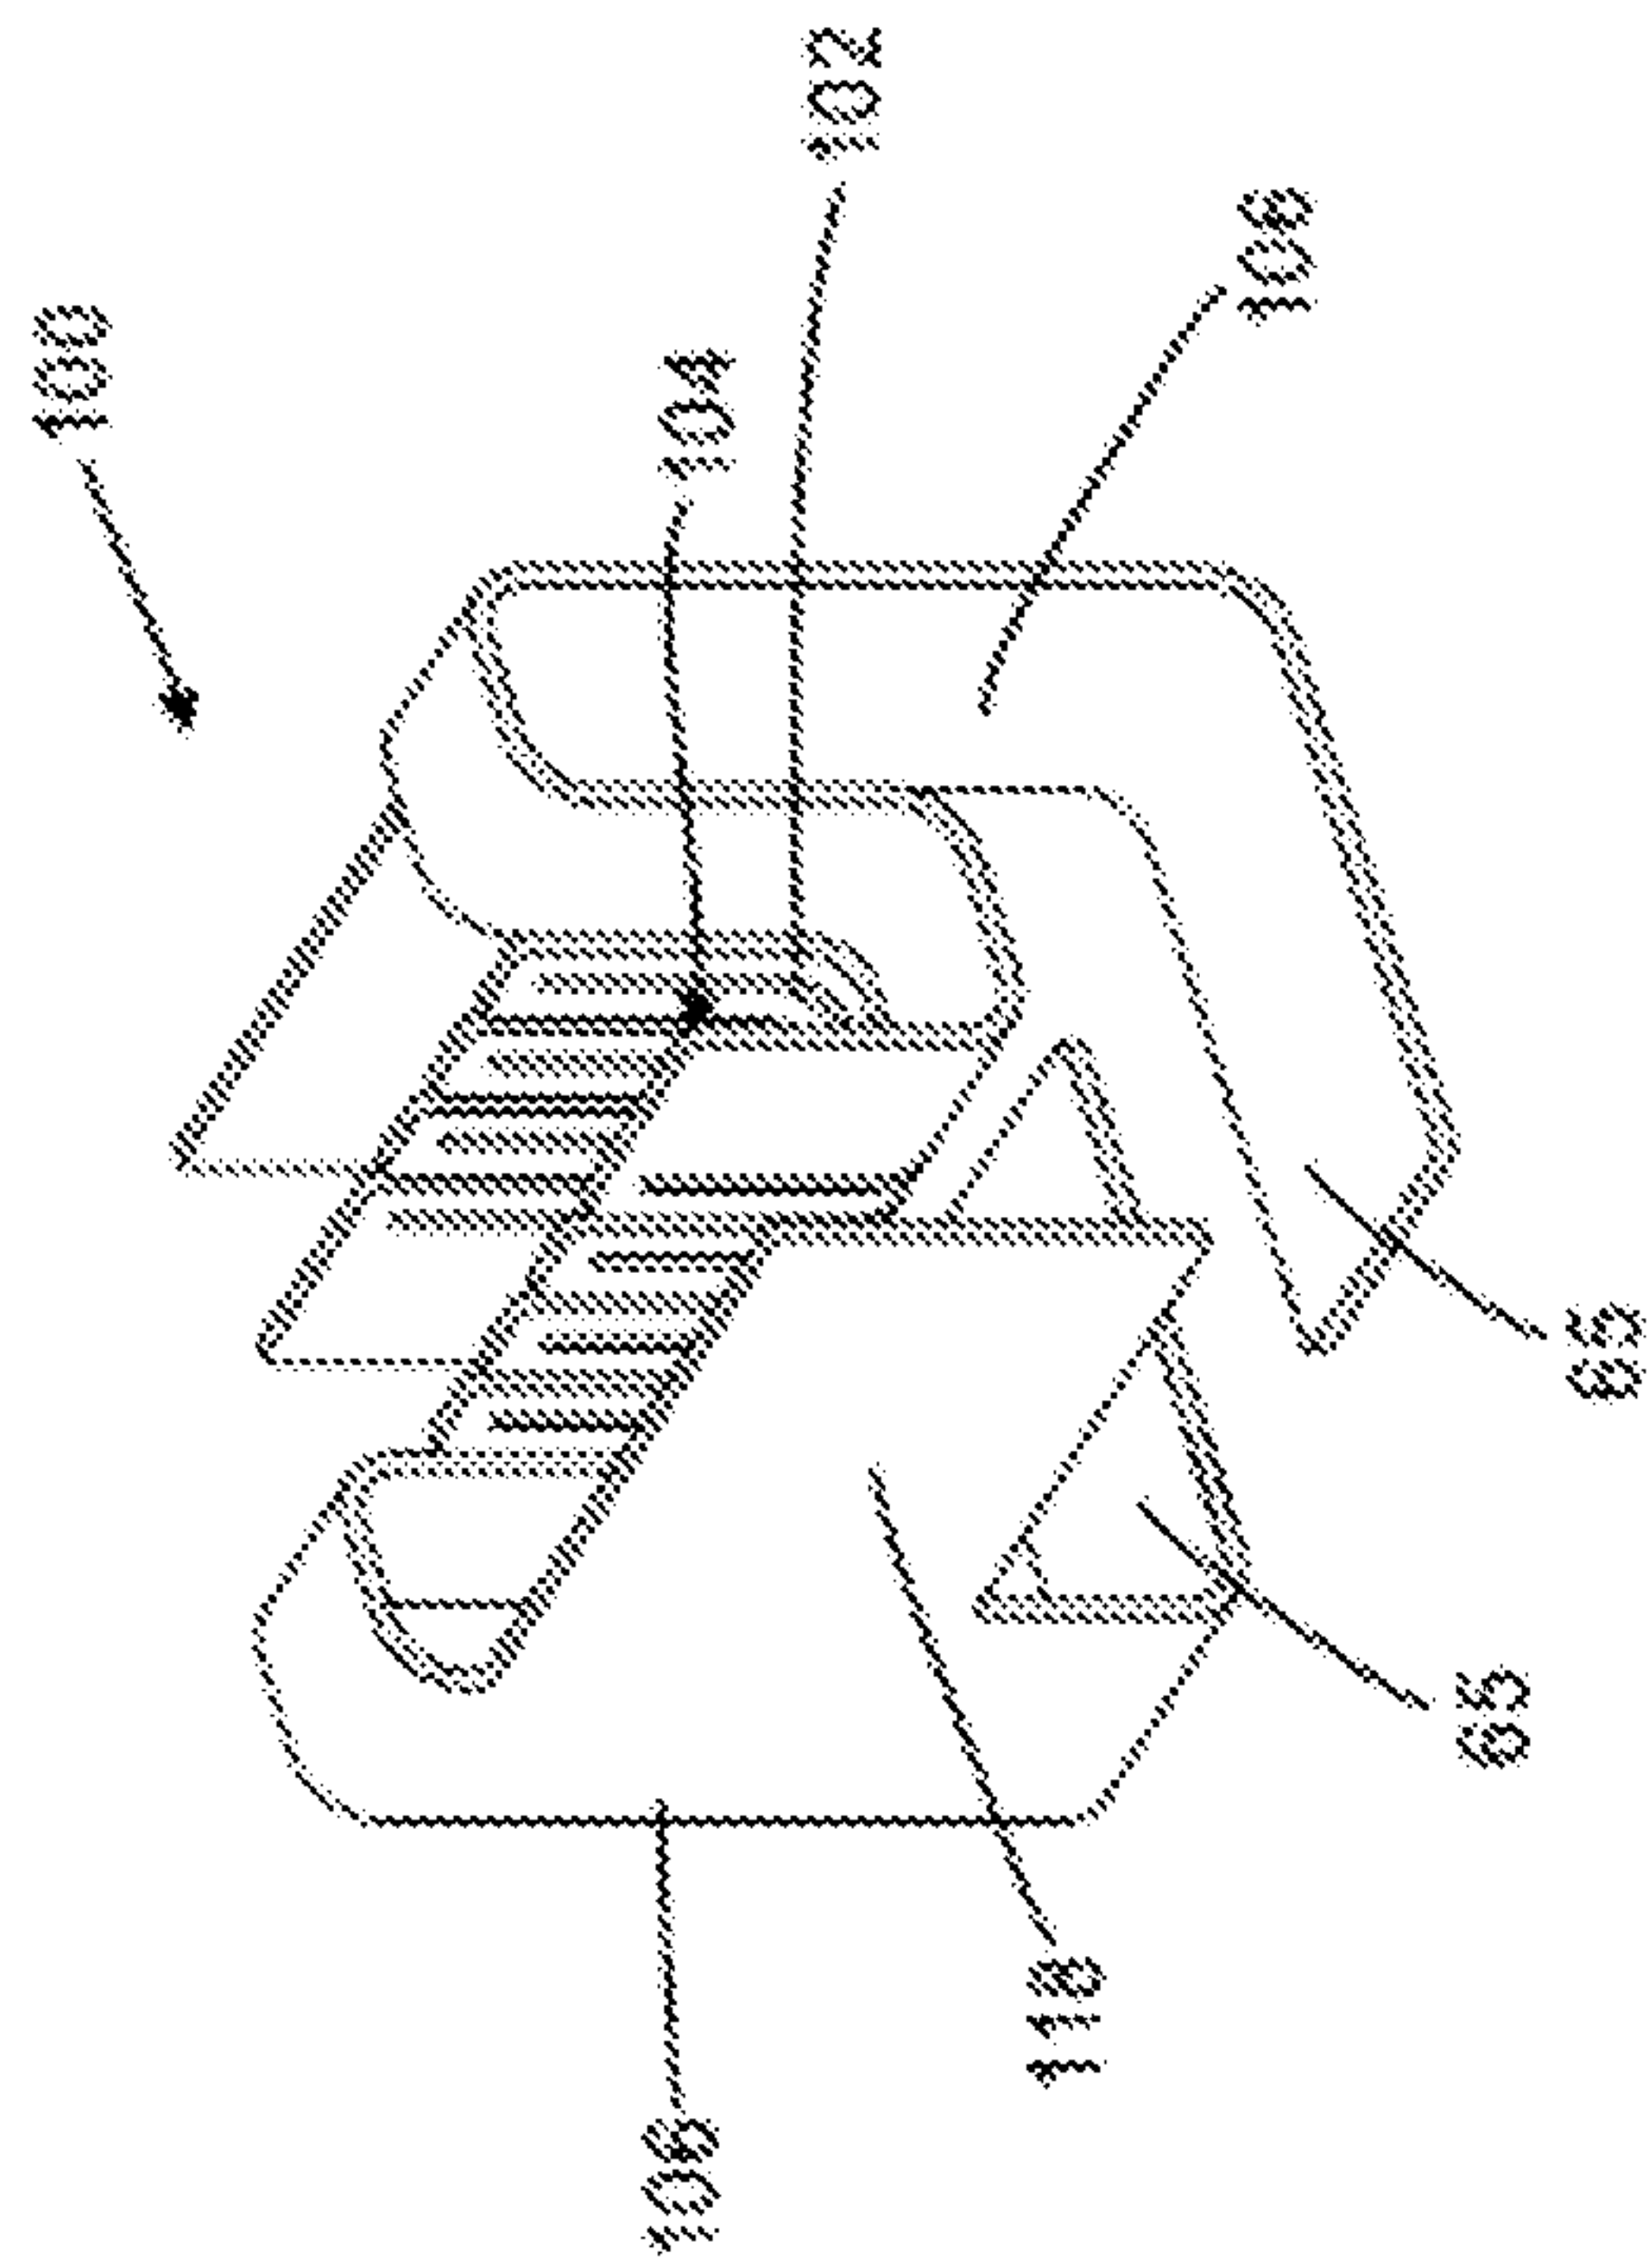


FIG. 13

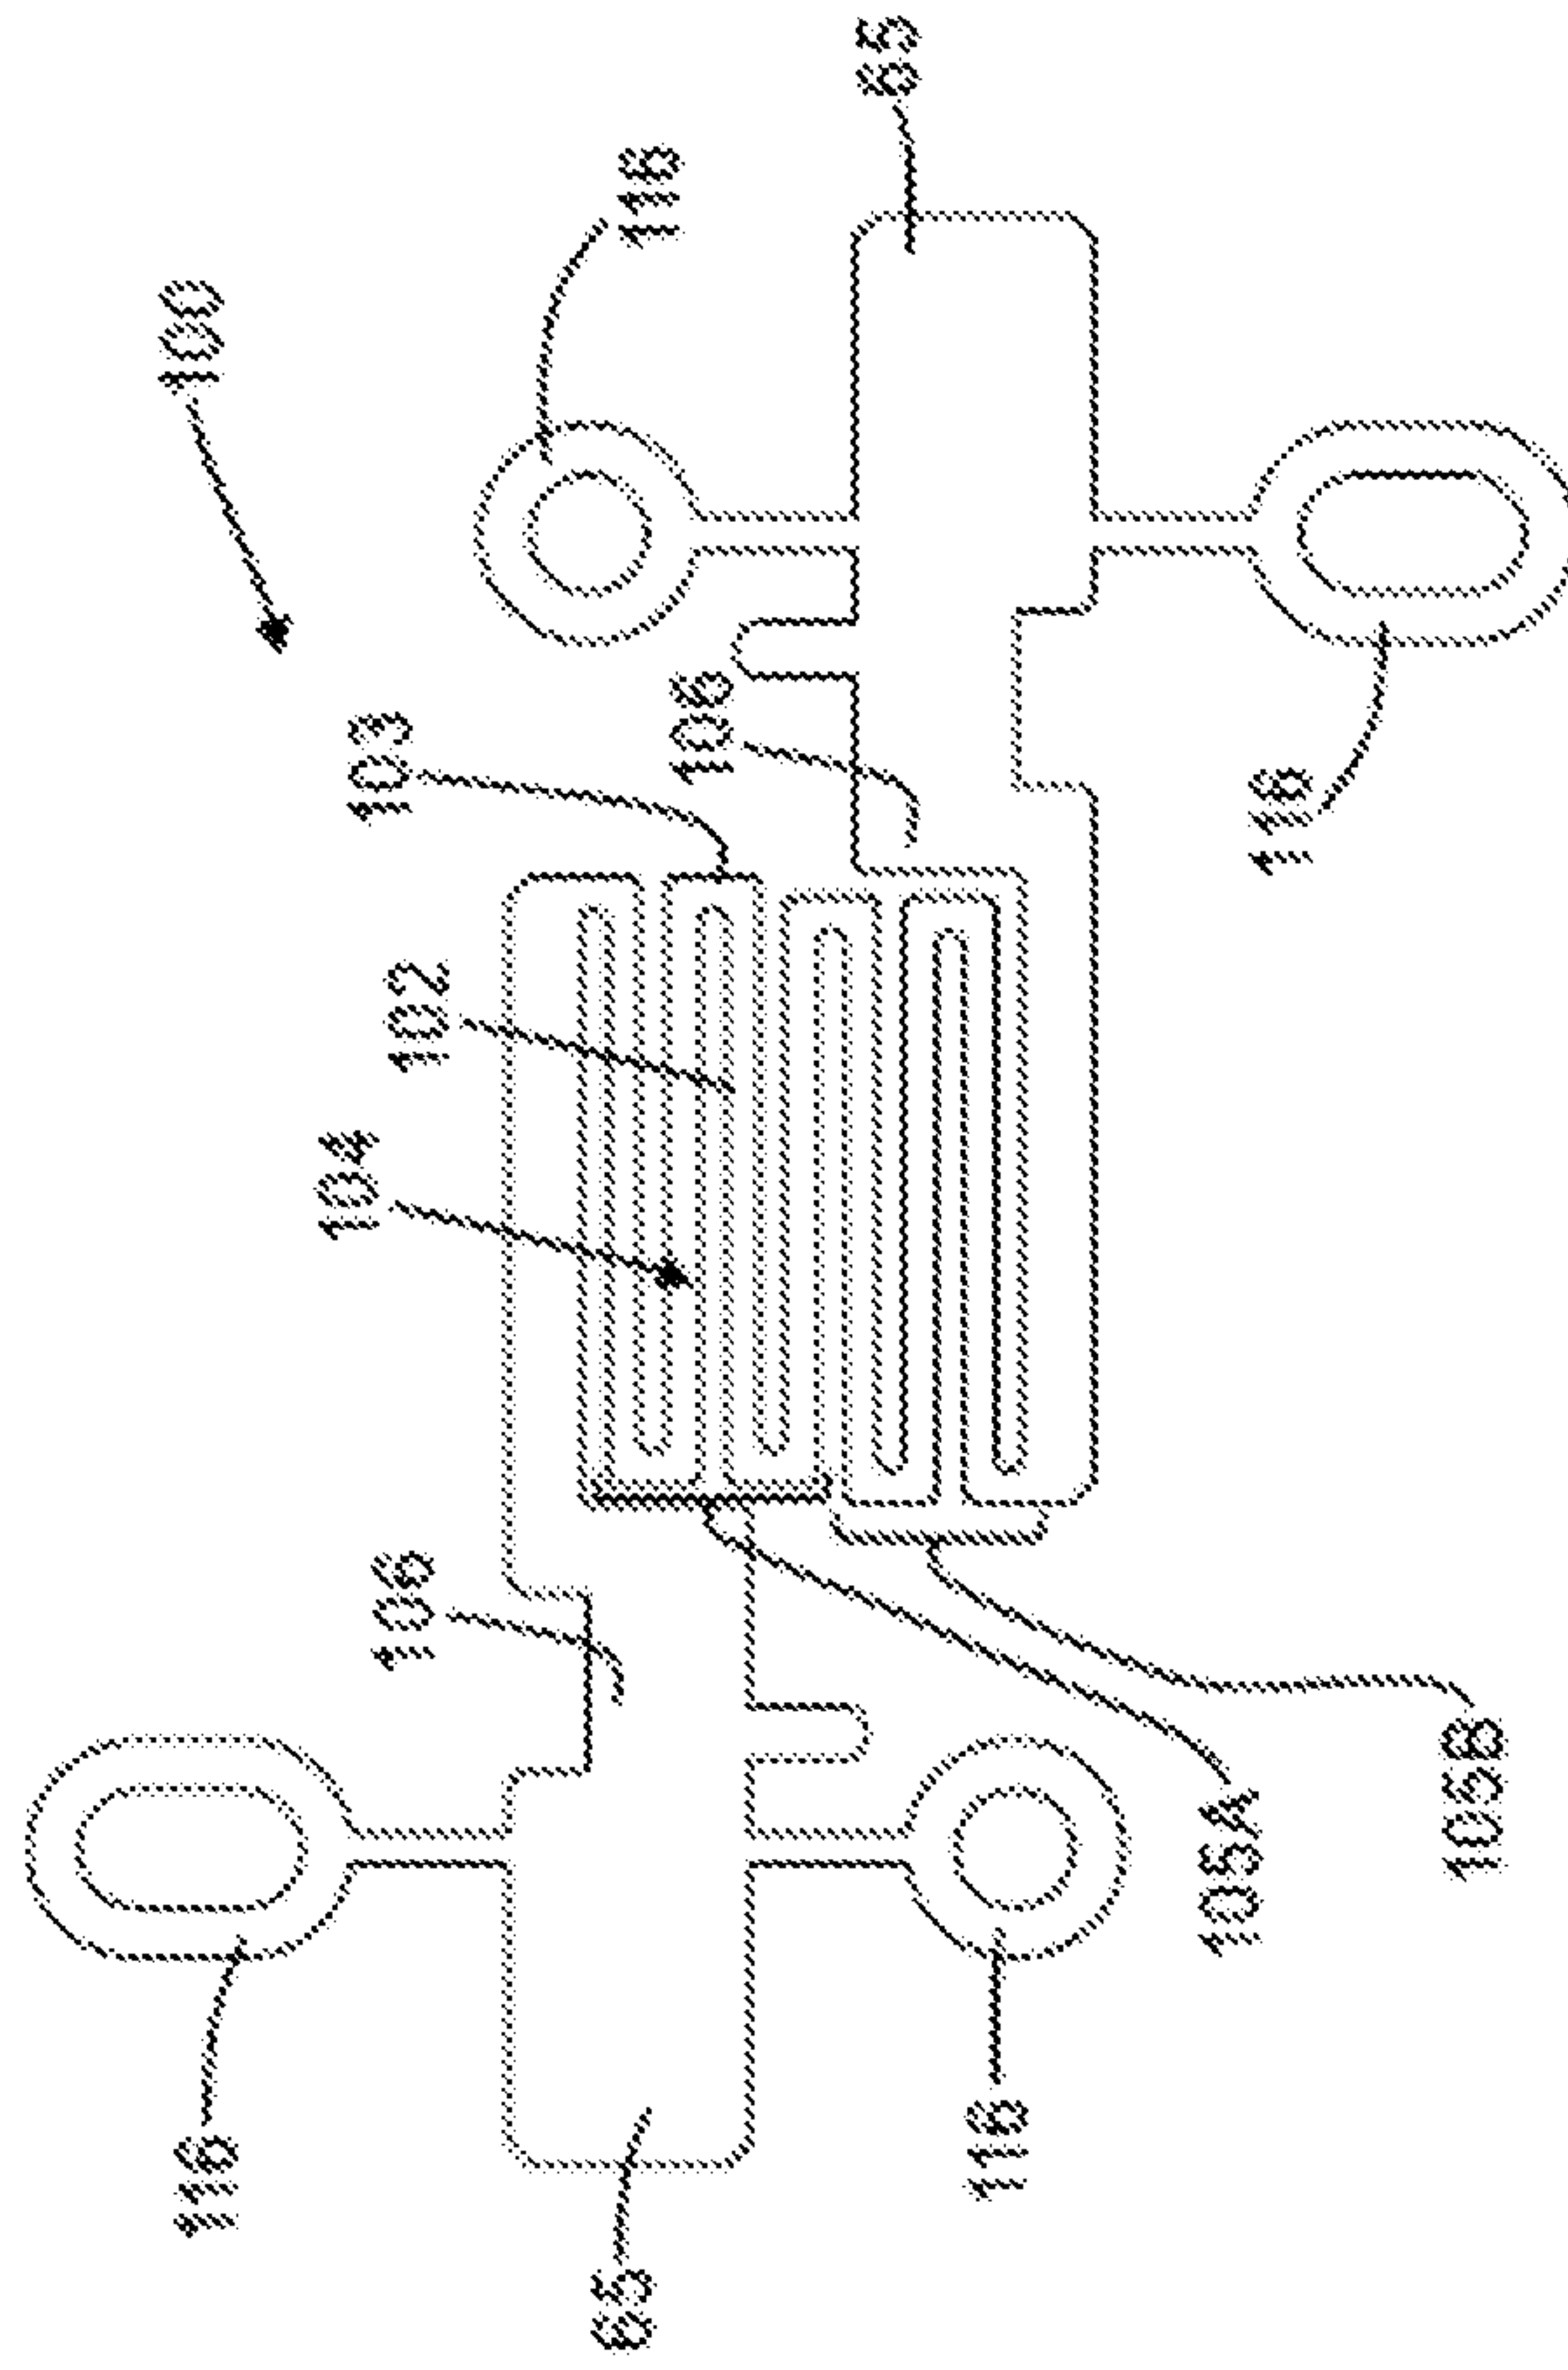


FIG. 14

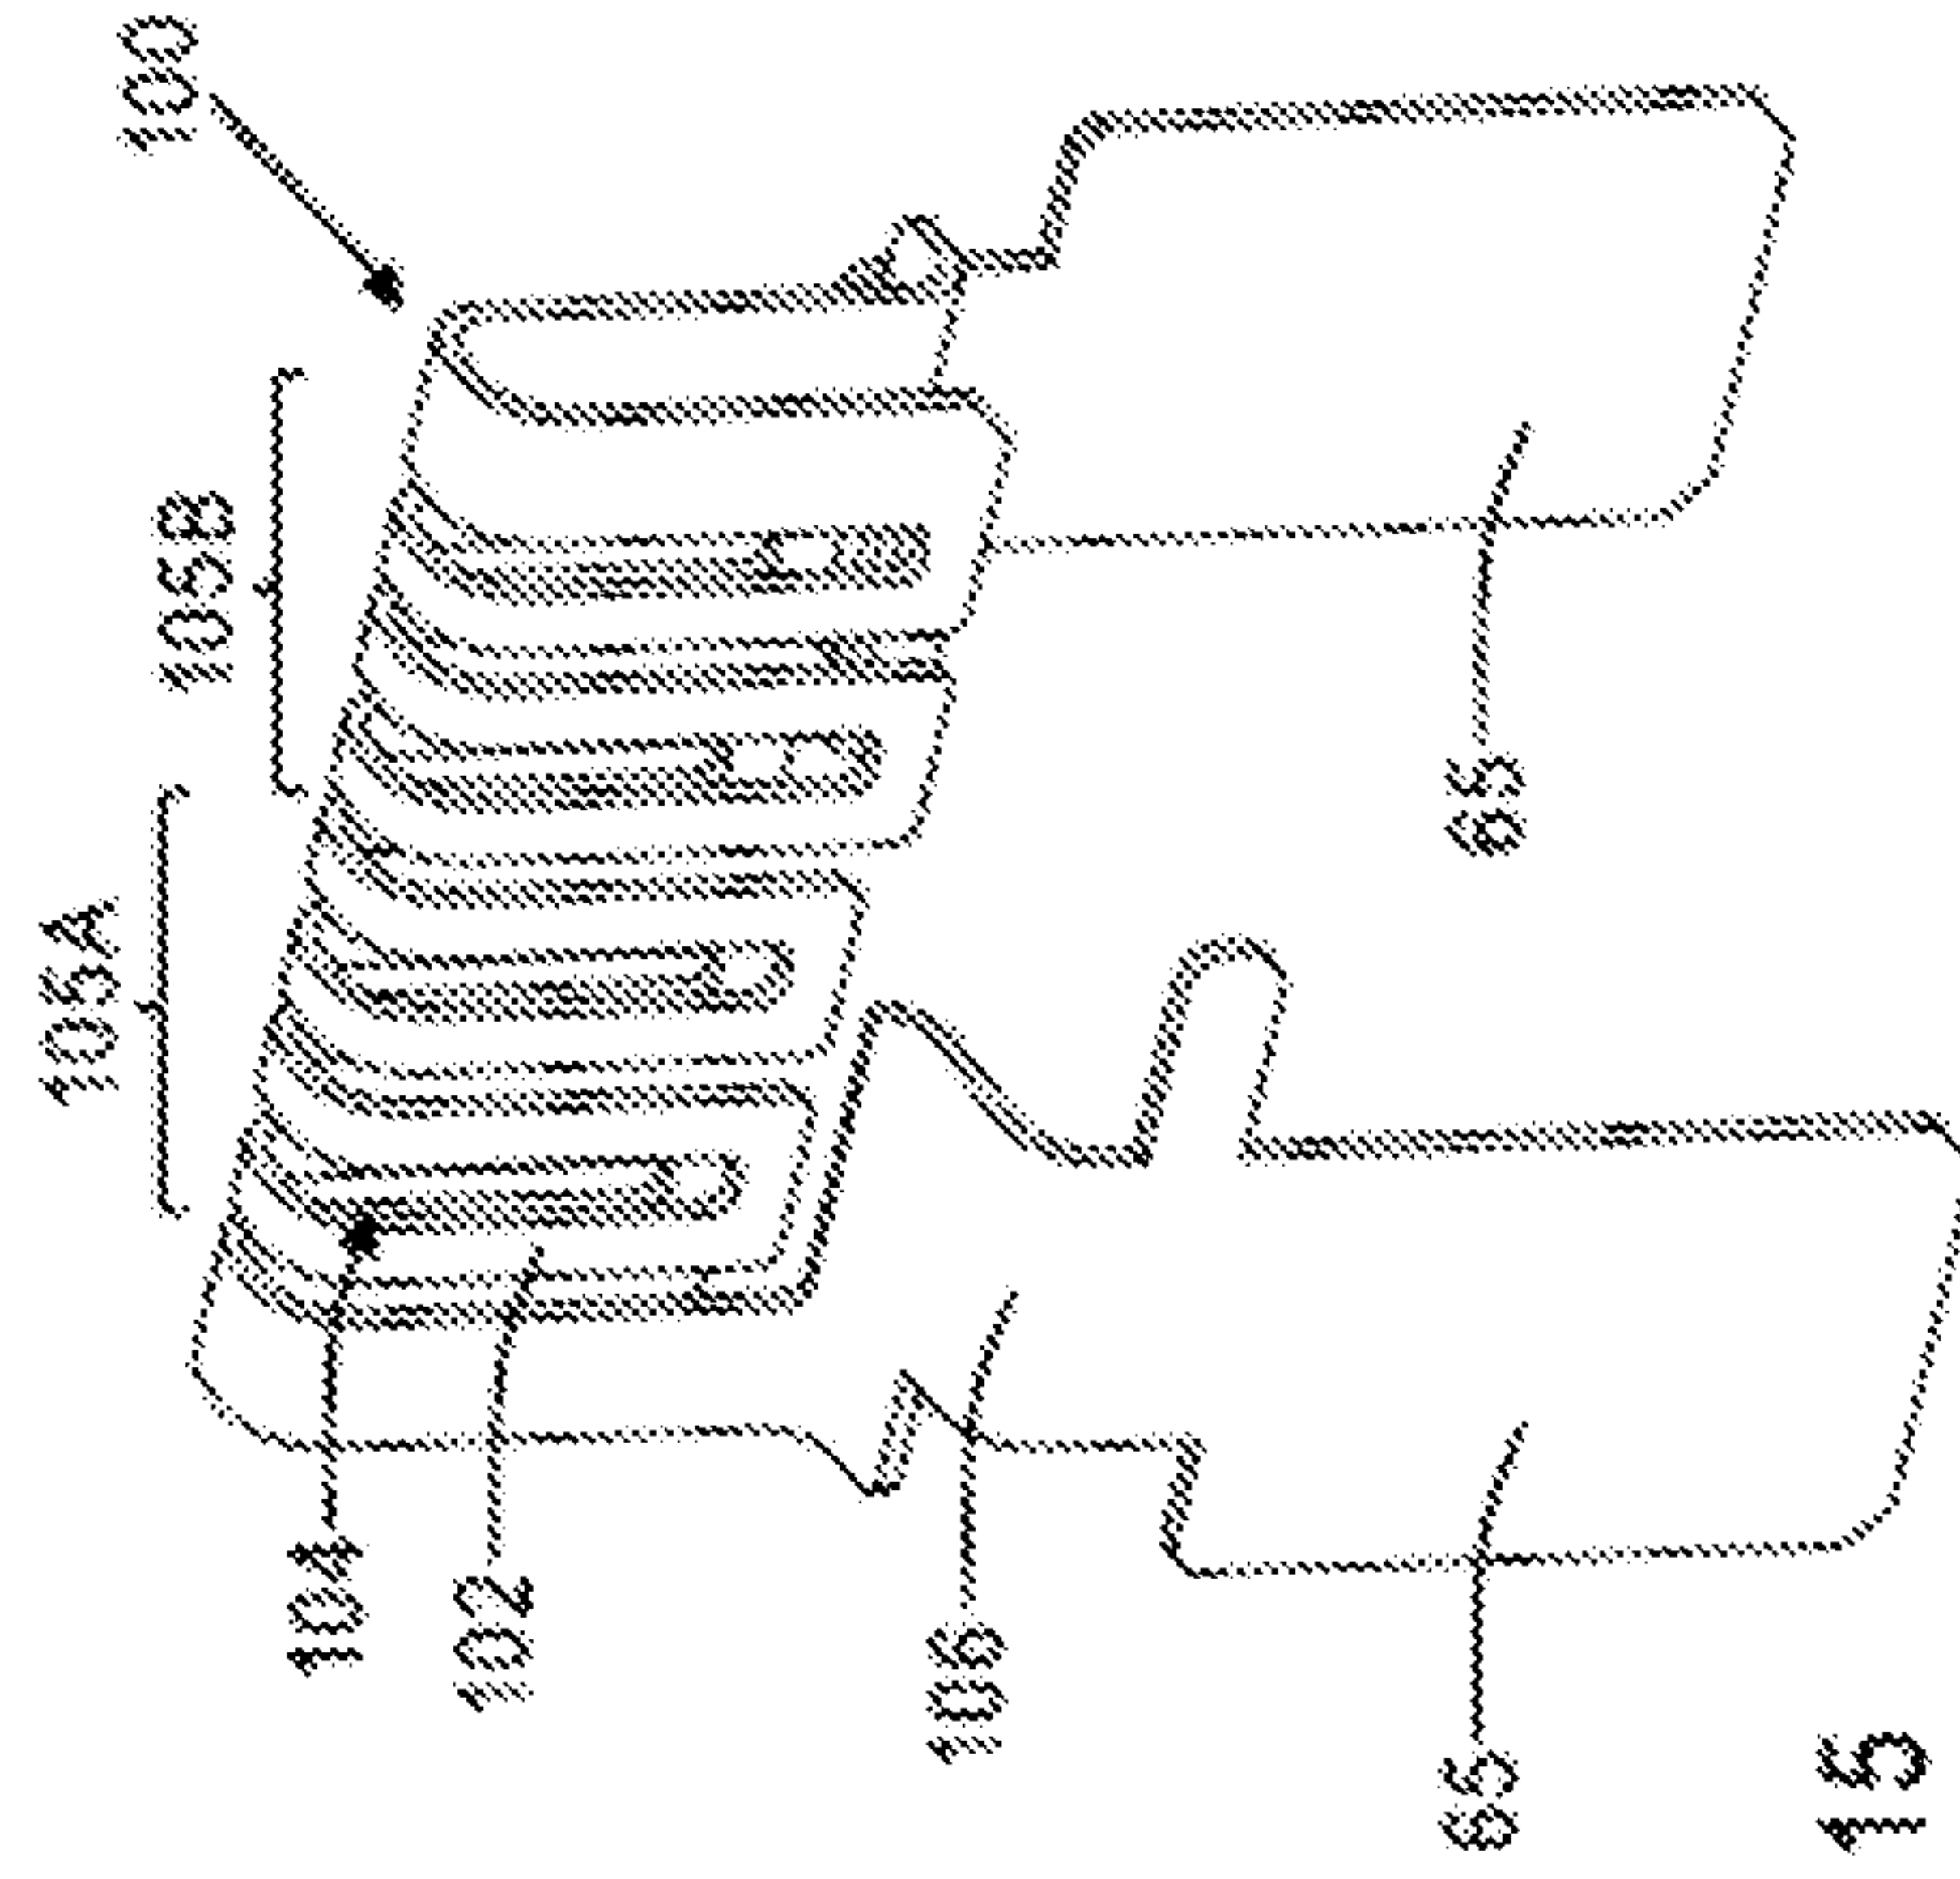


FIG. 15

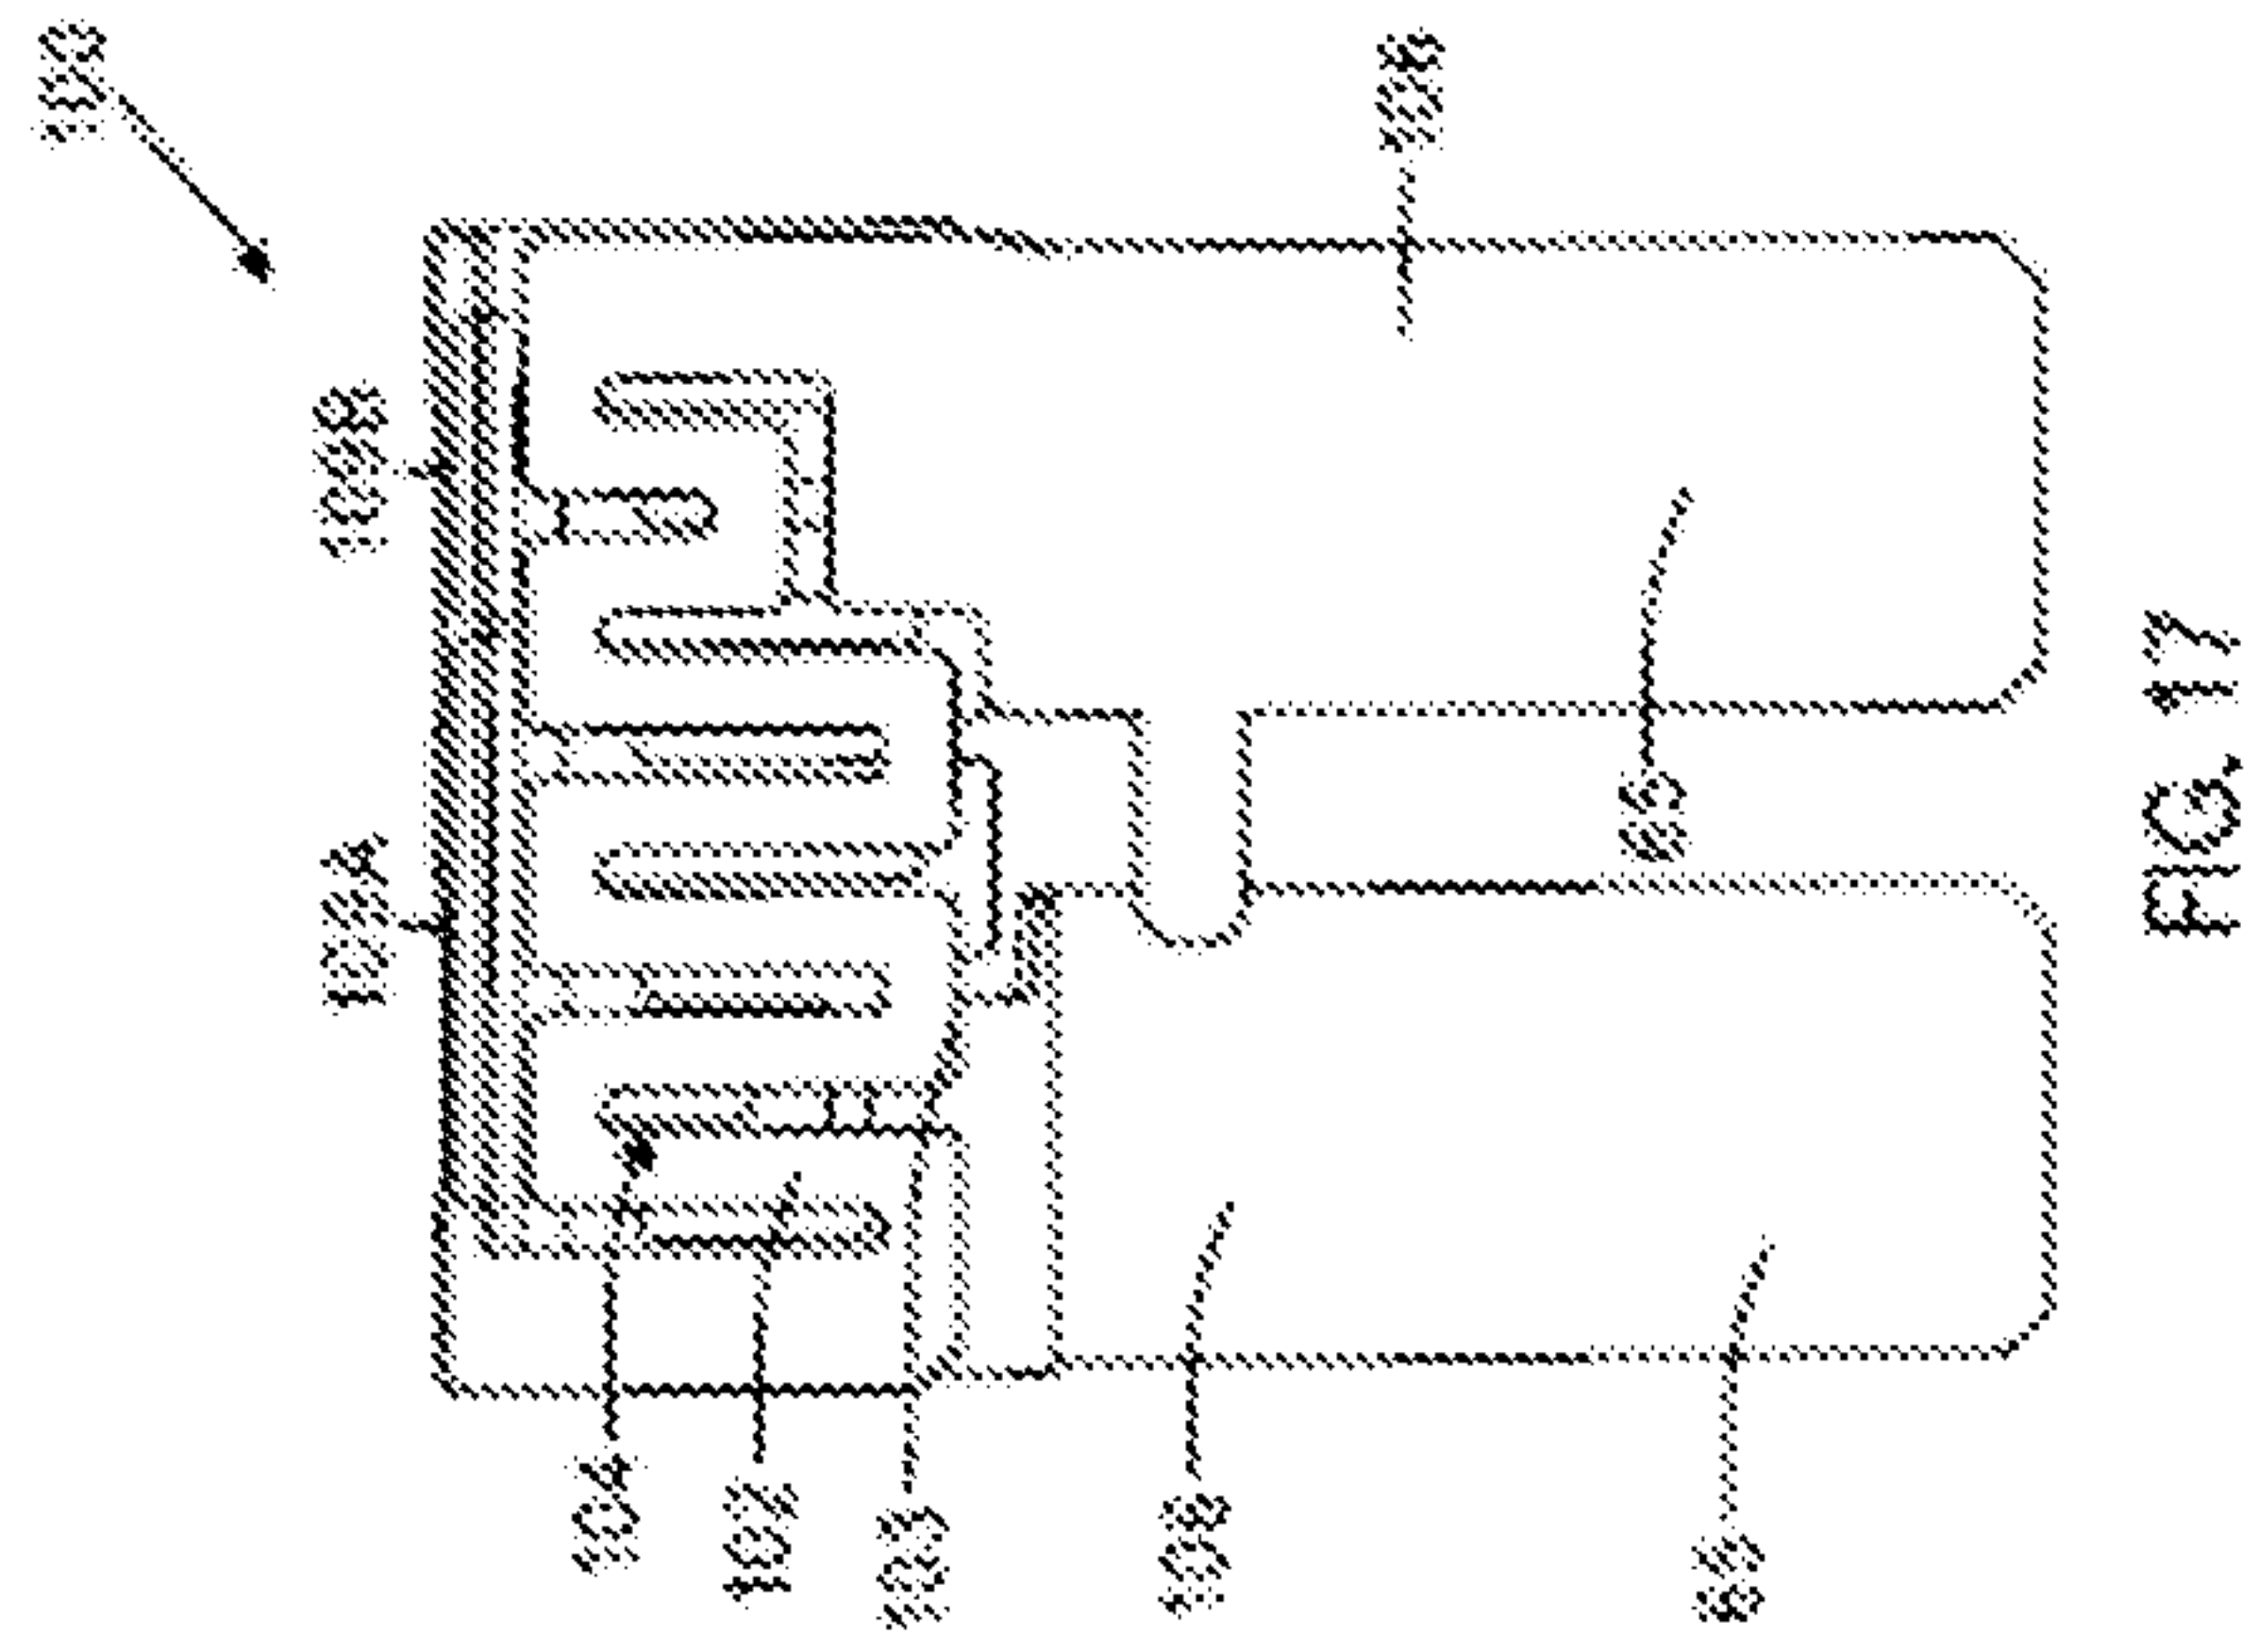


FIG. 17

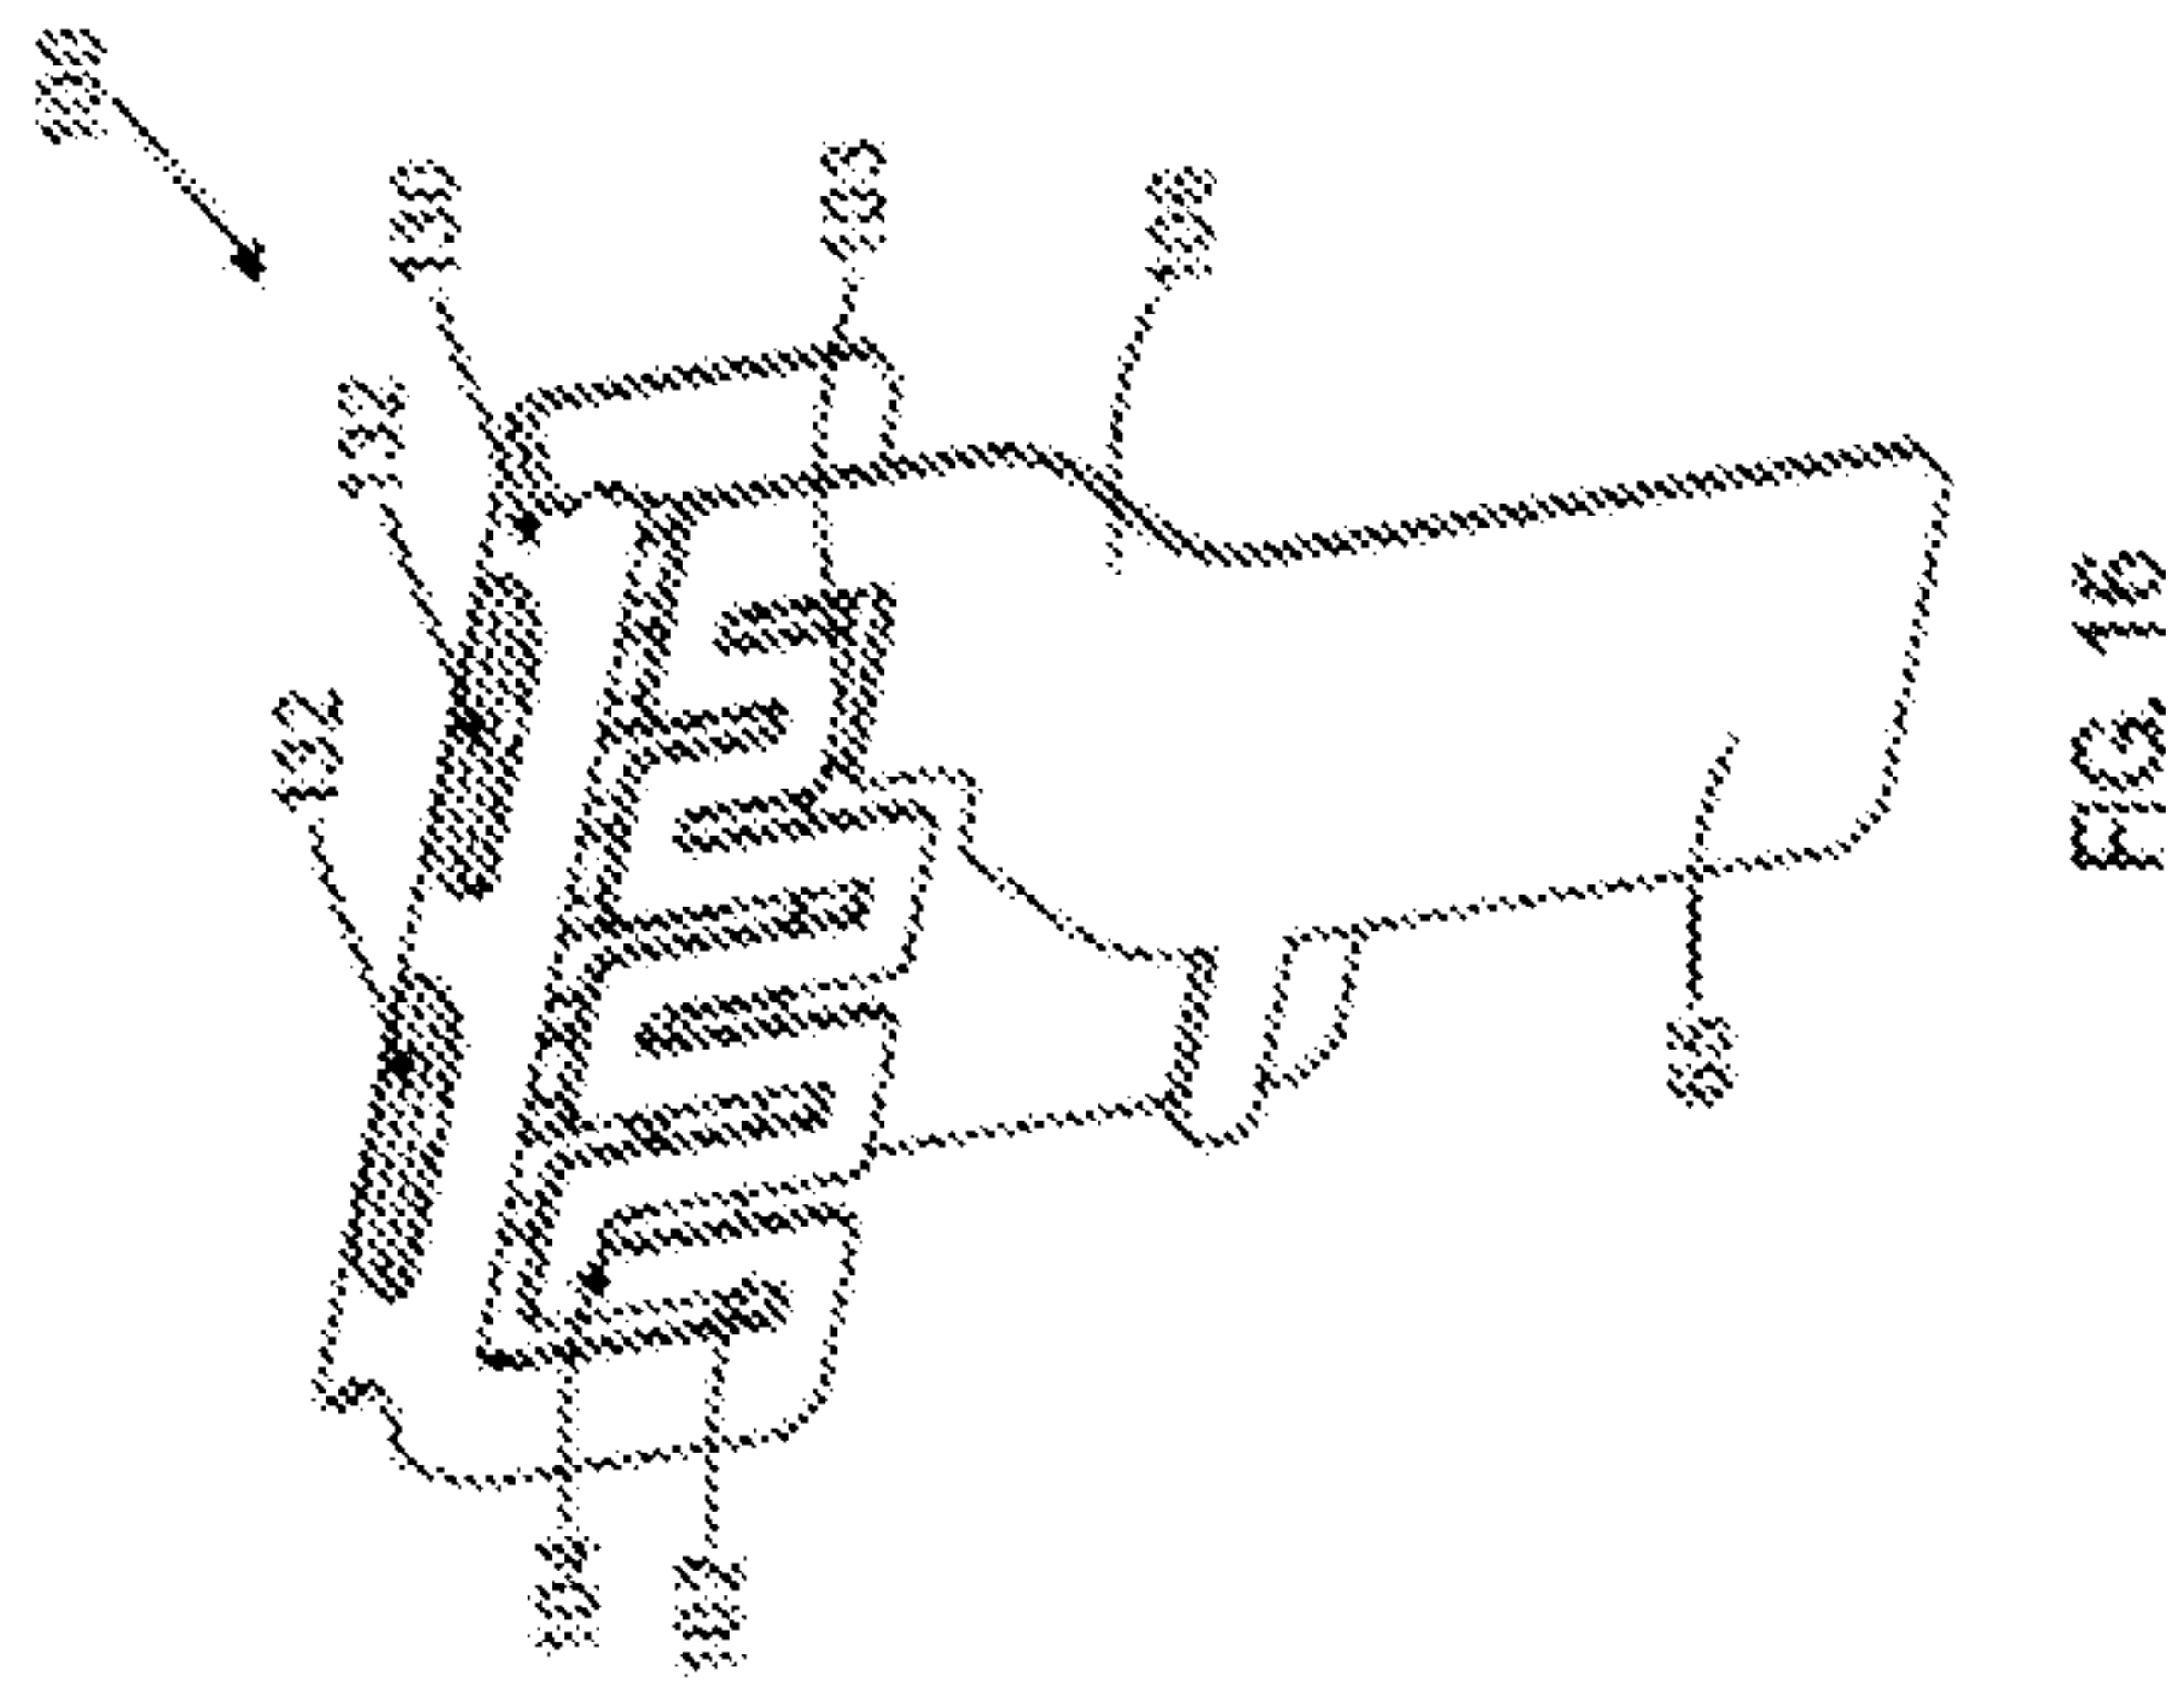
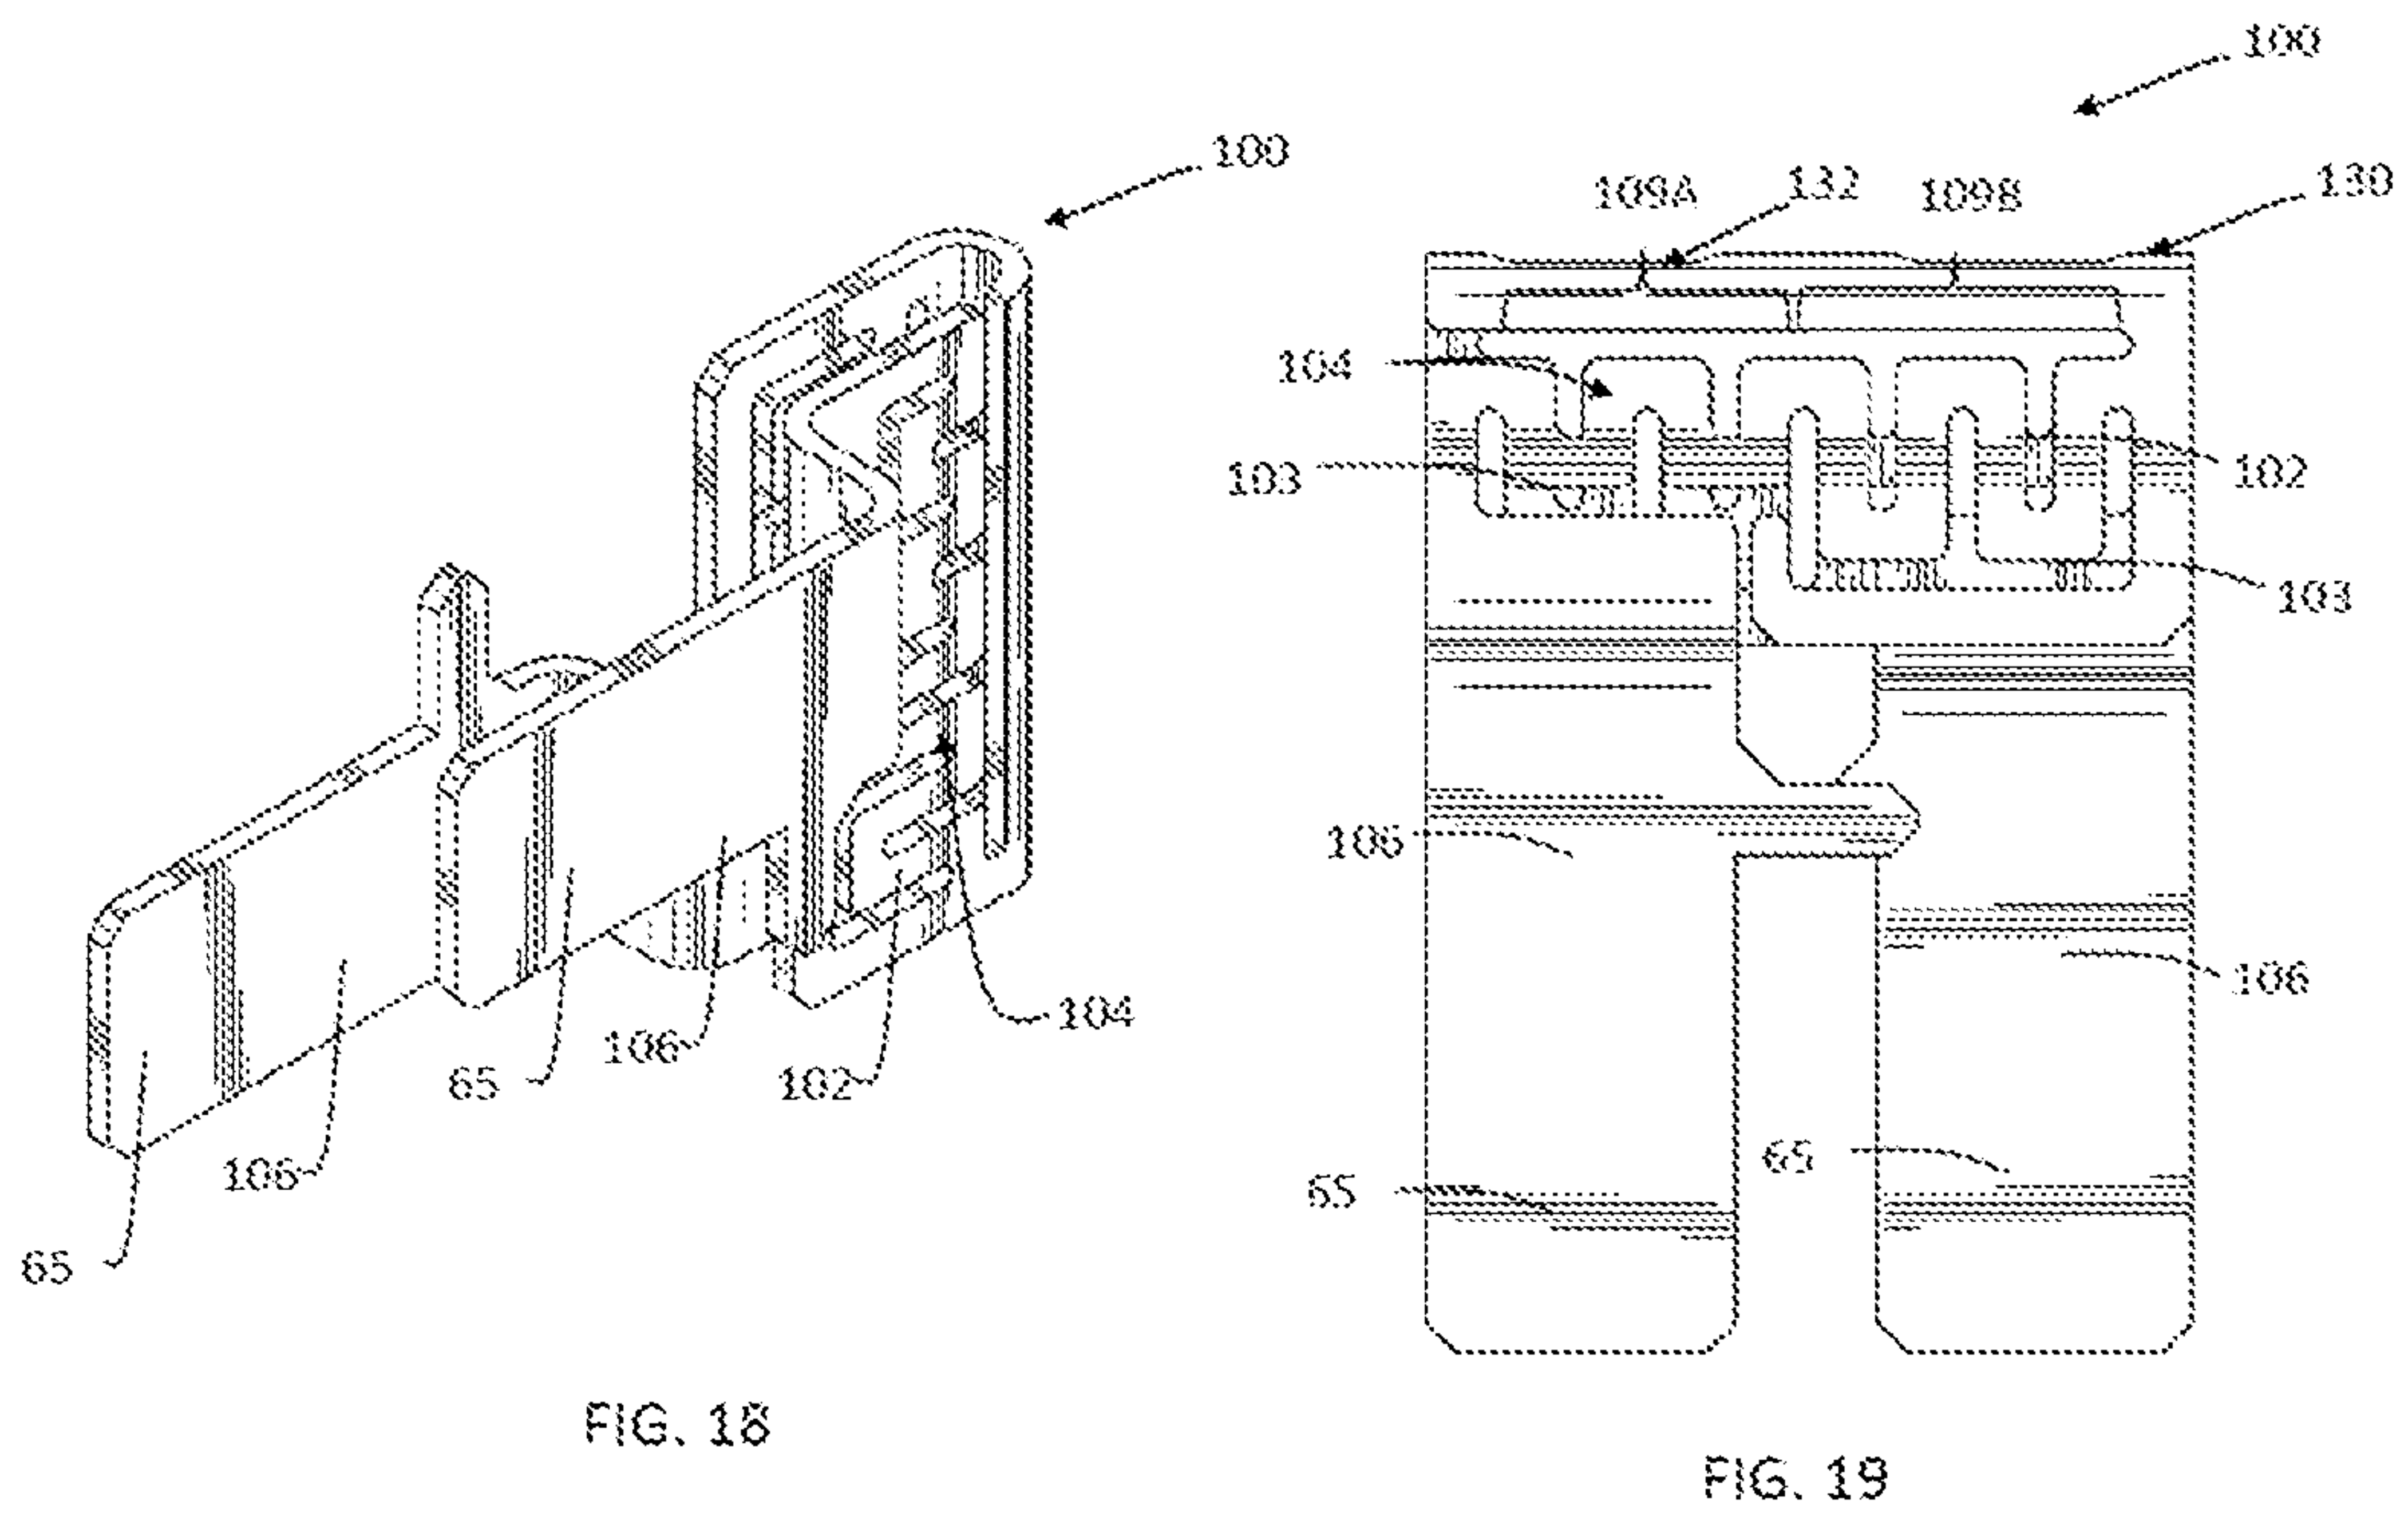
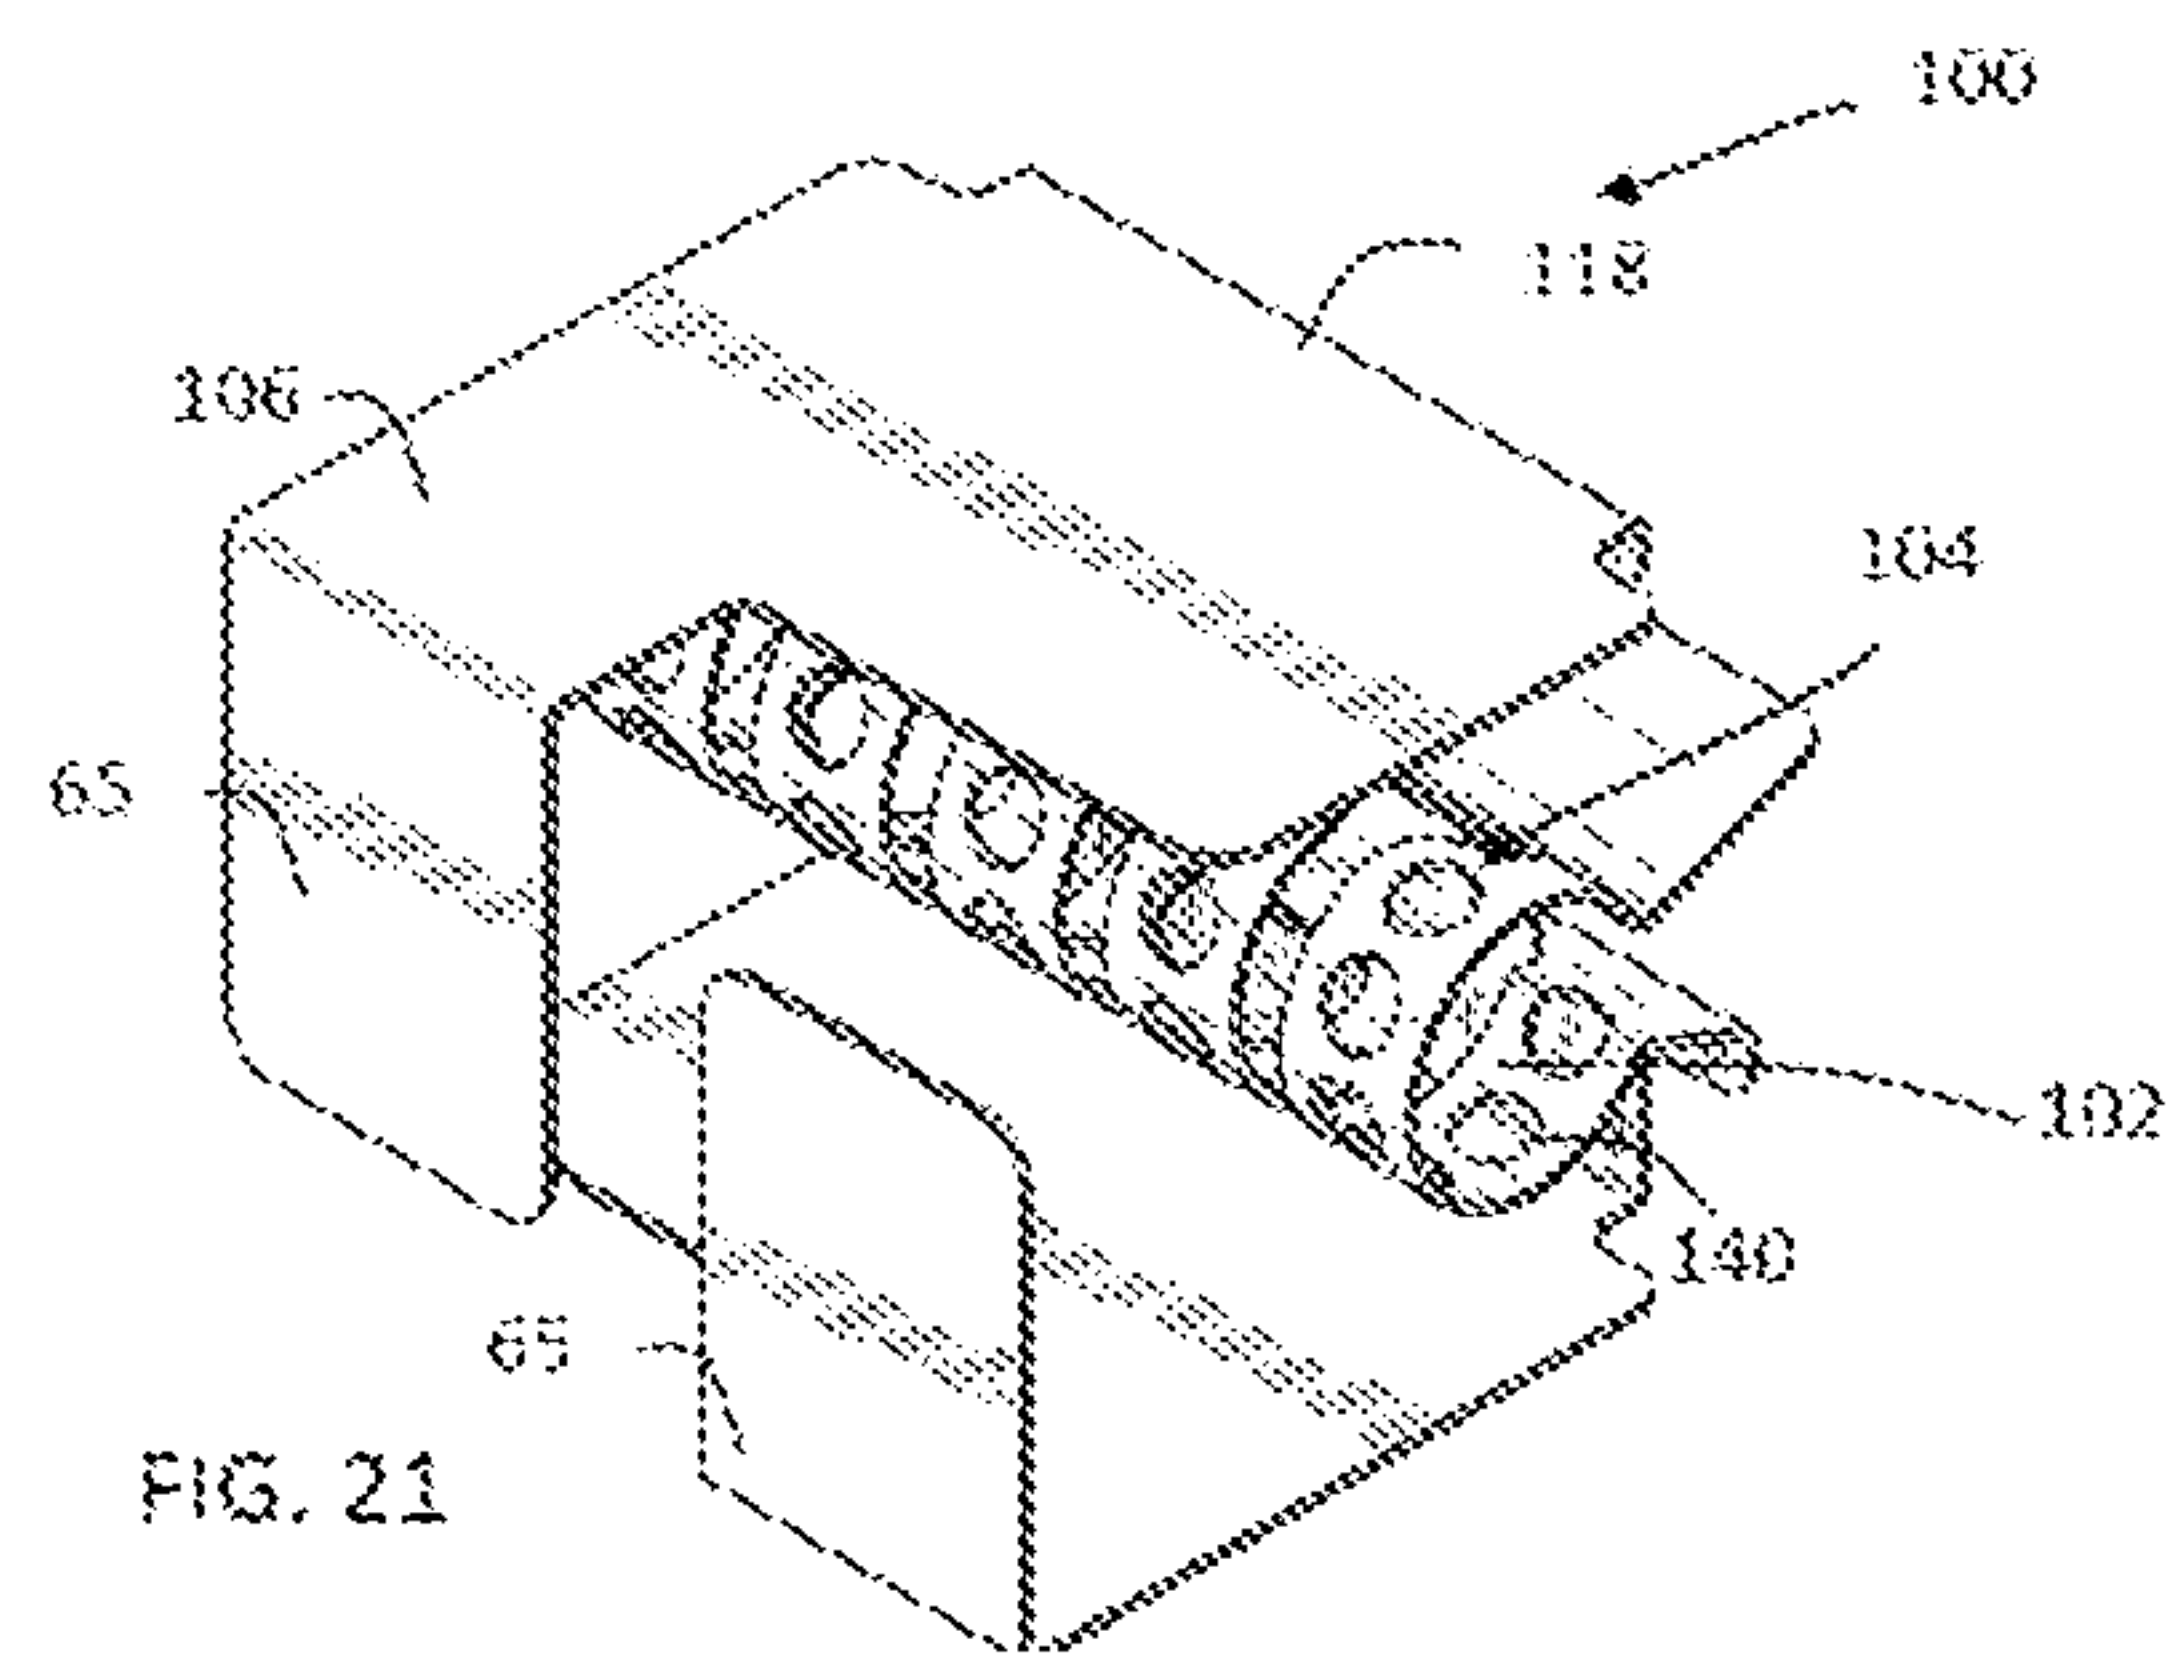
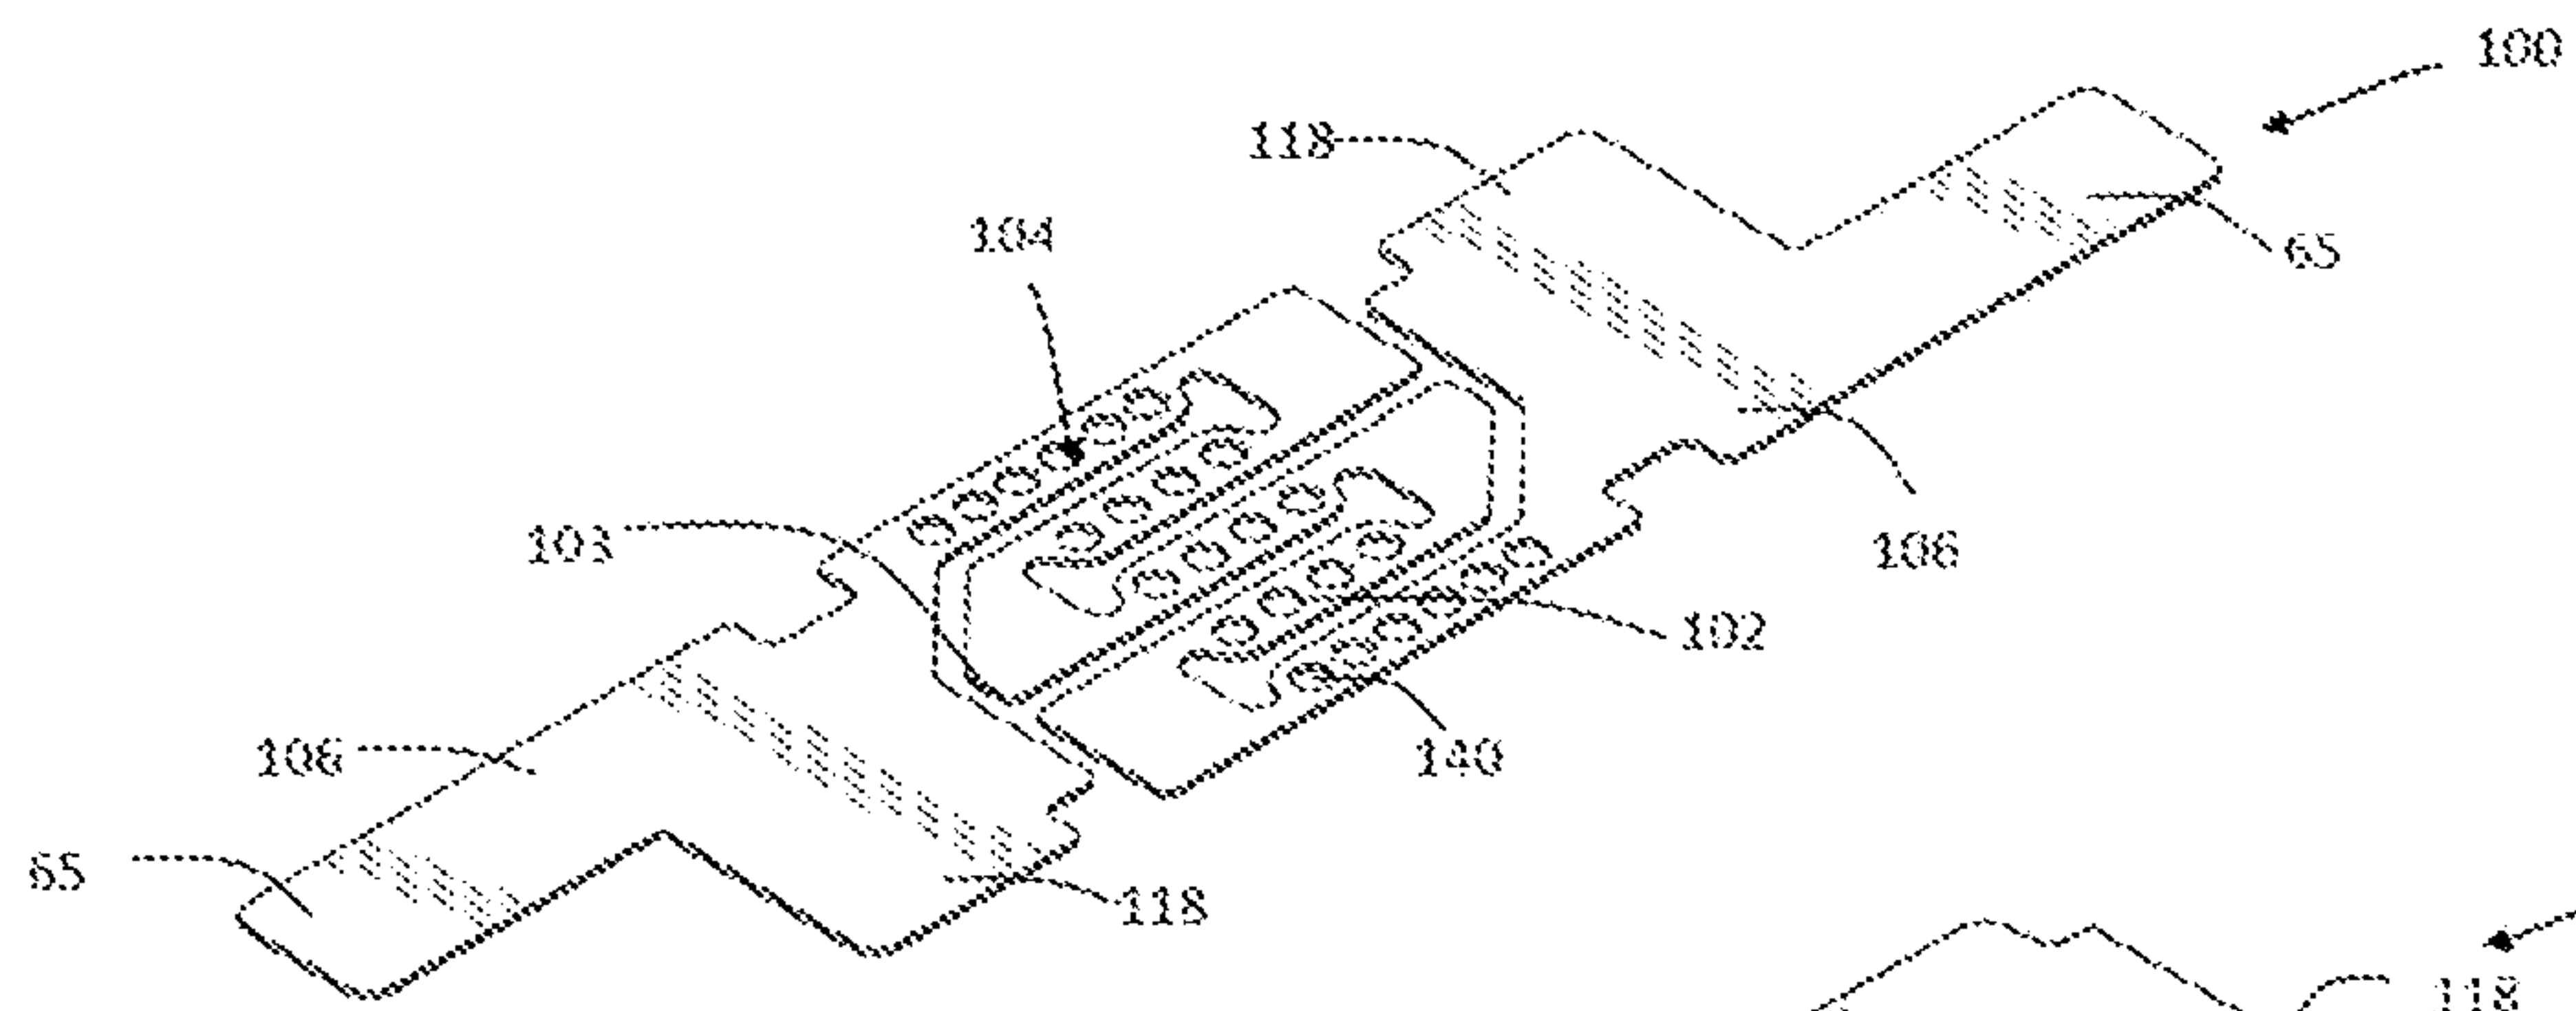


FIG. 16





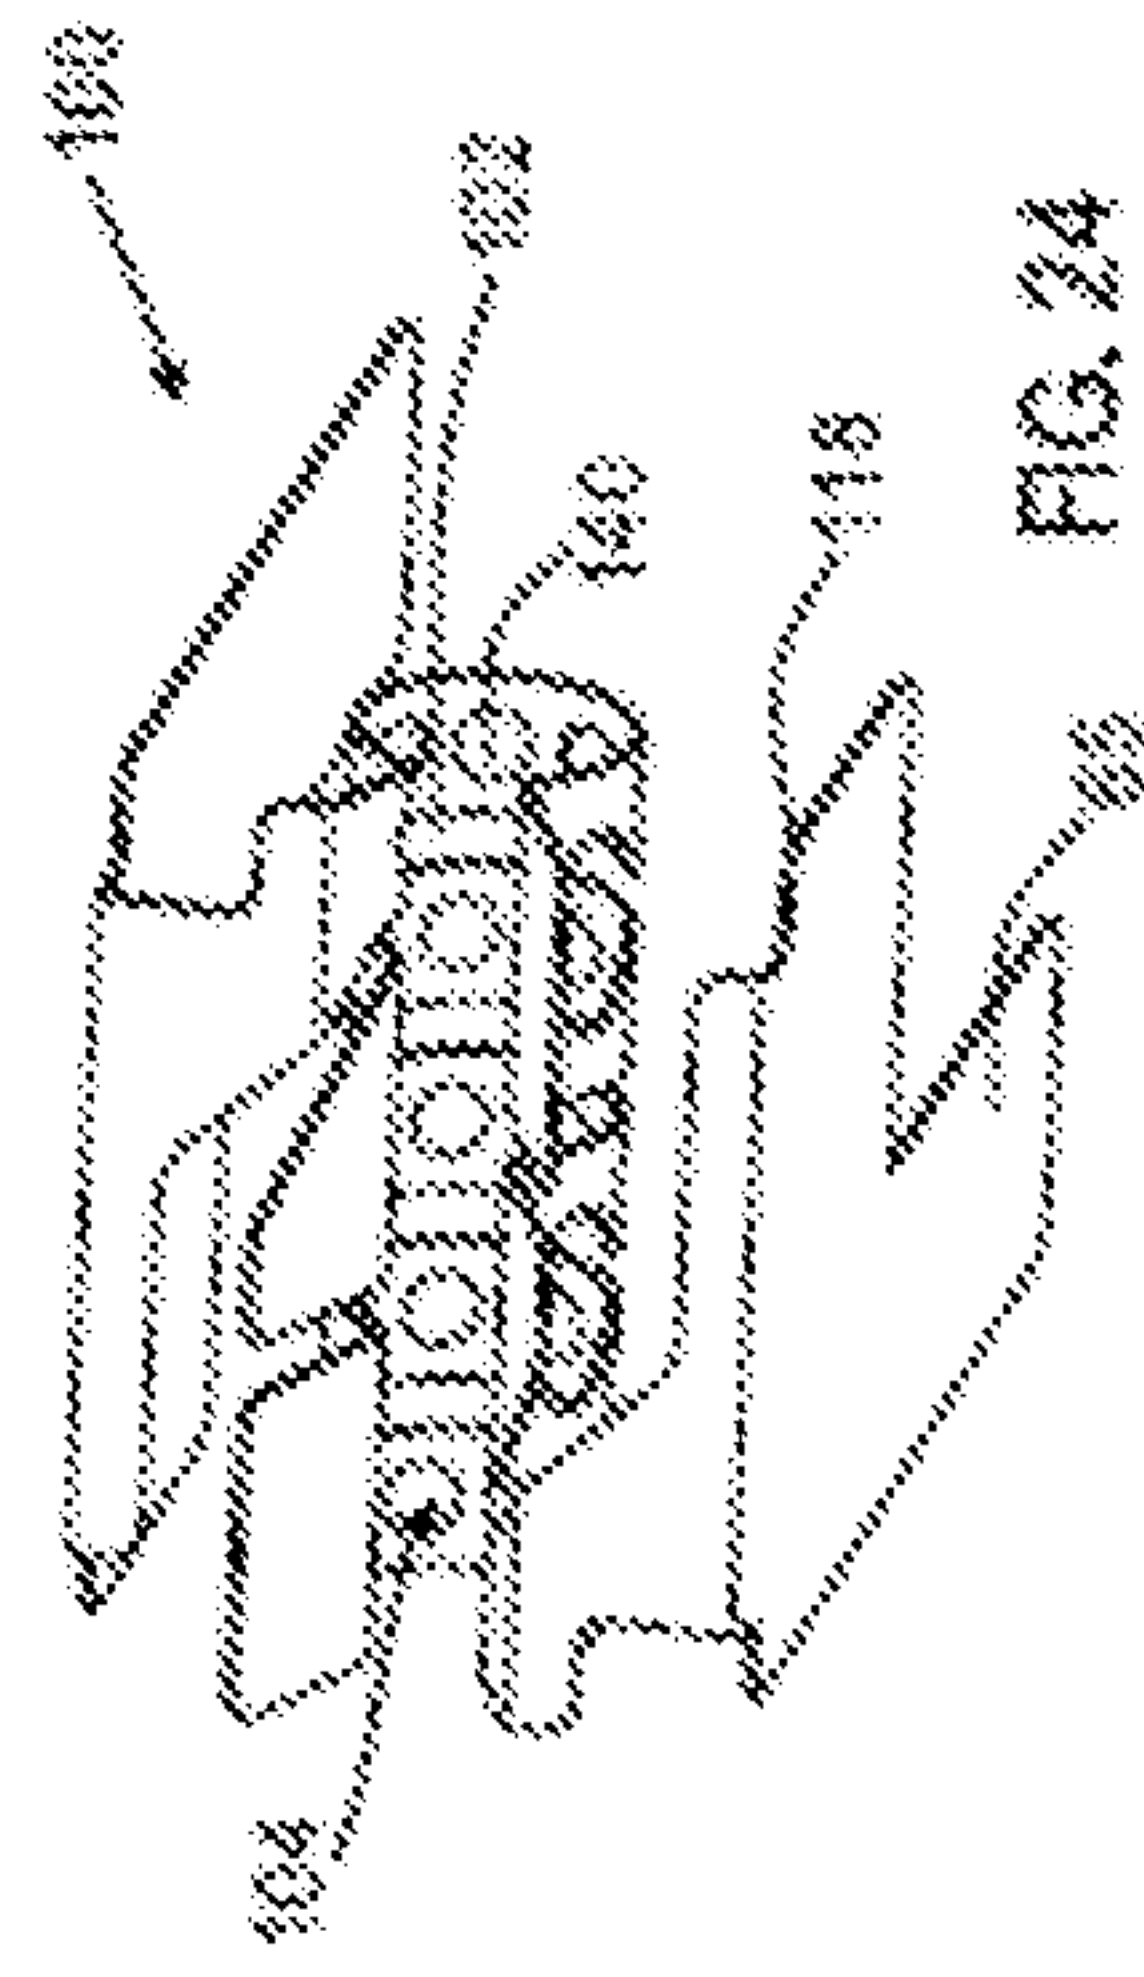
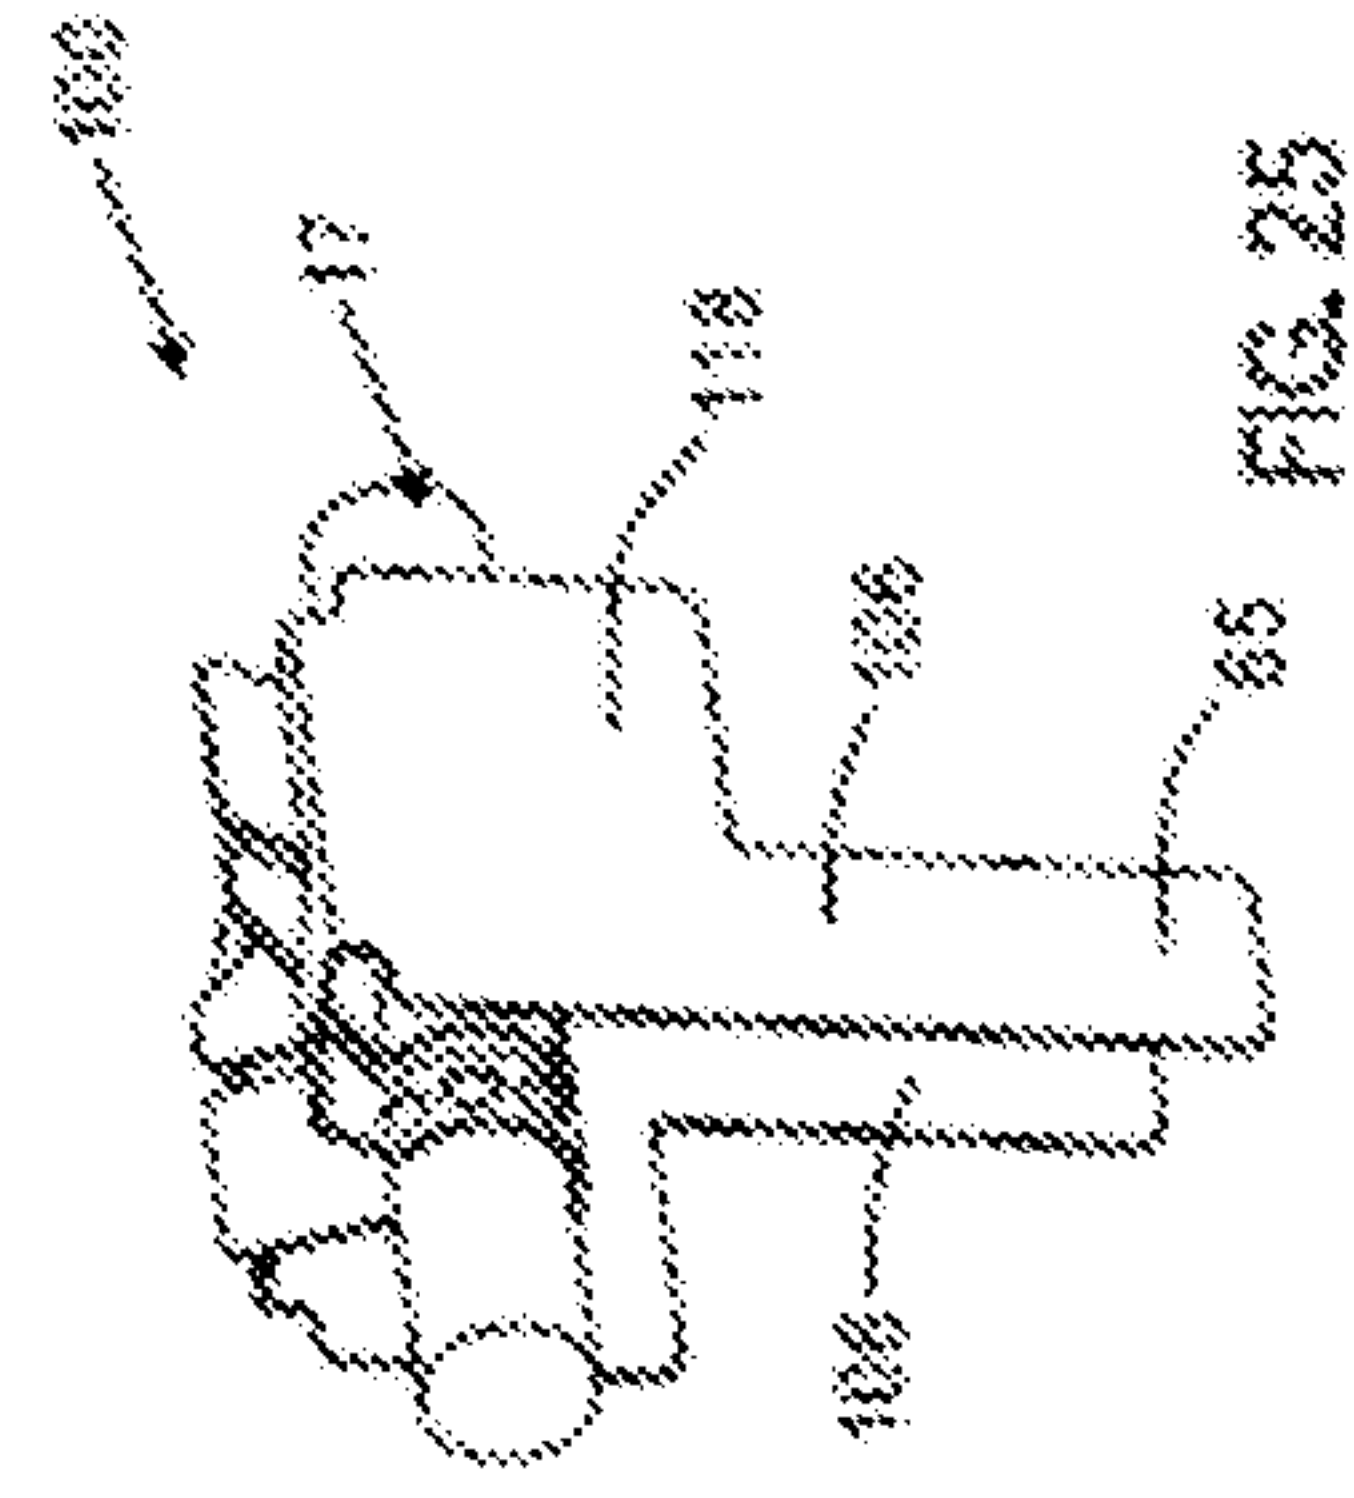
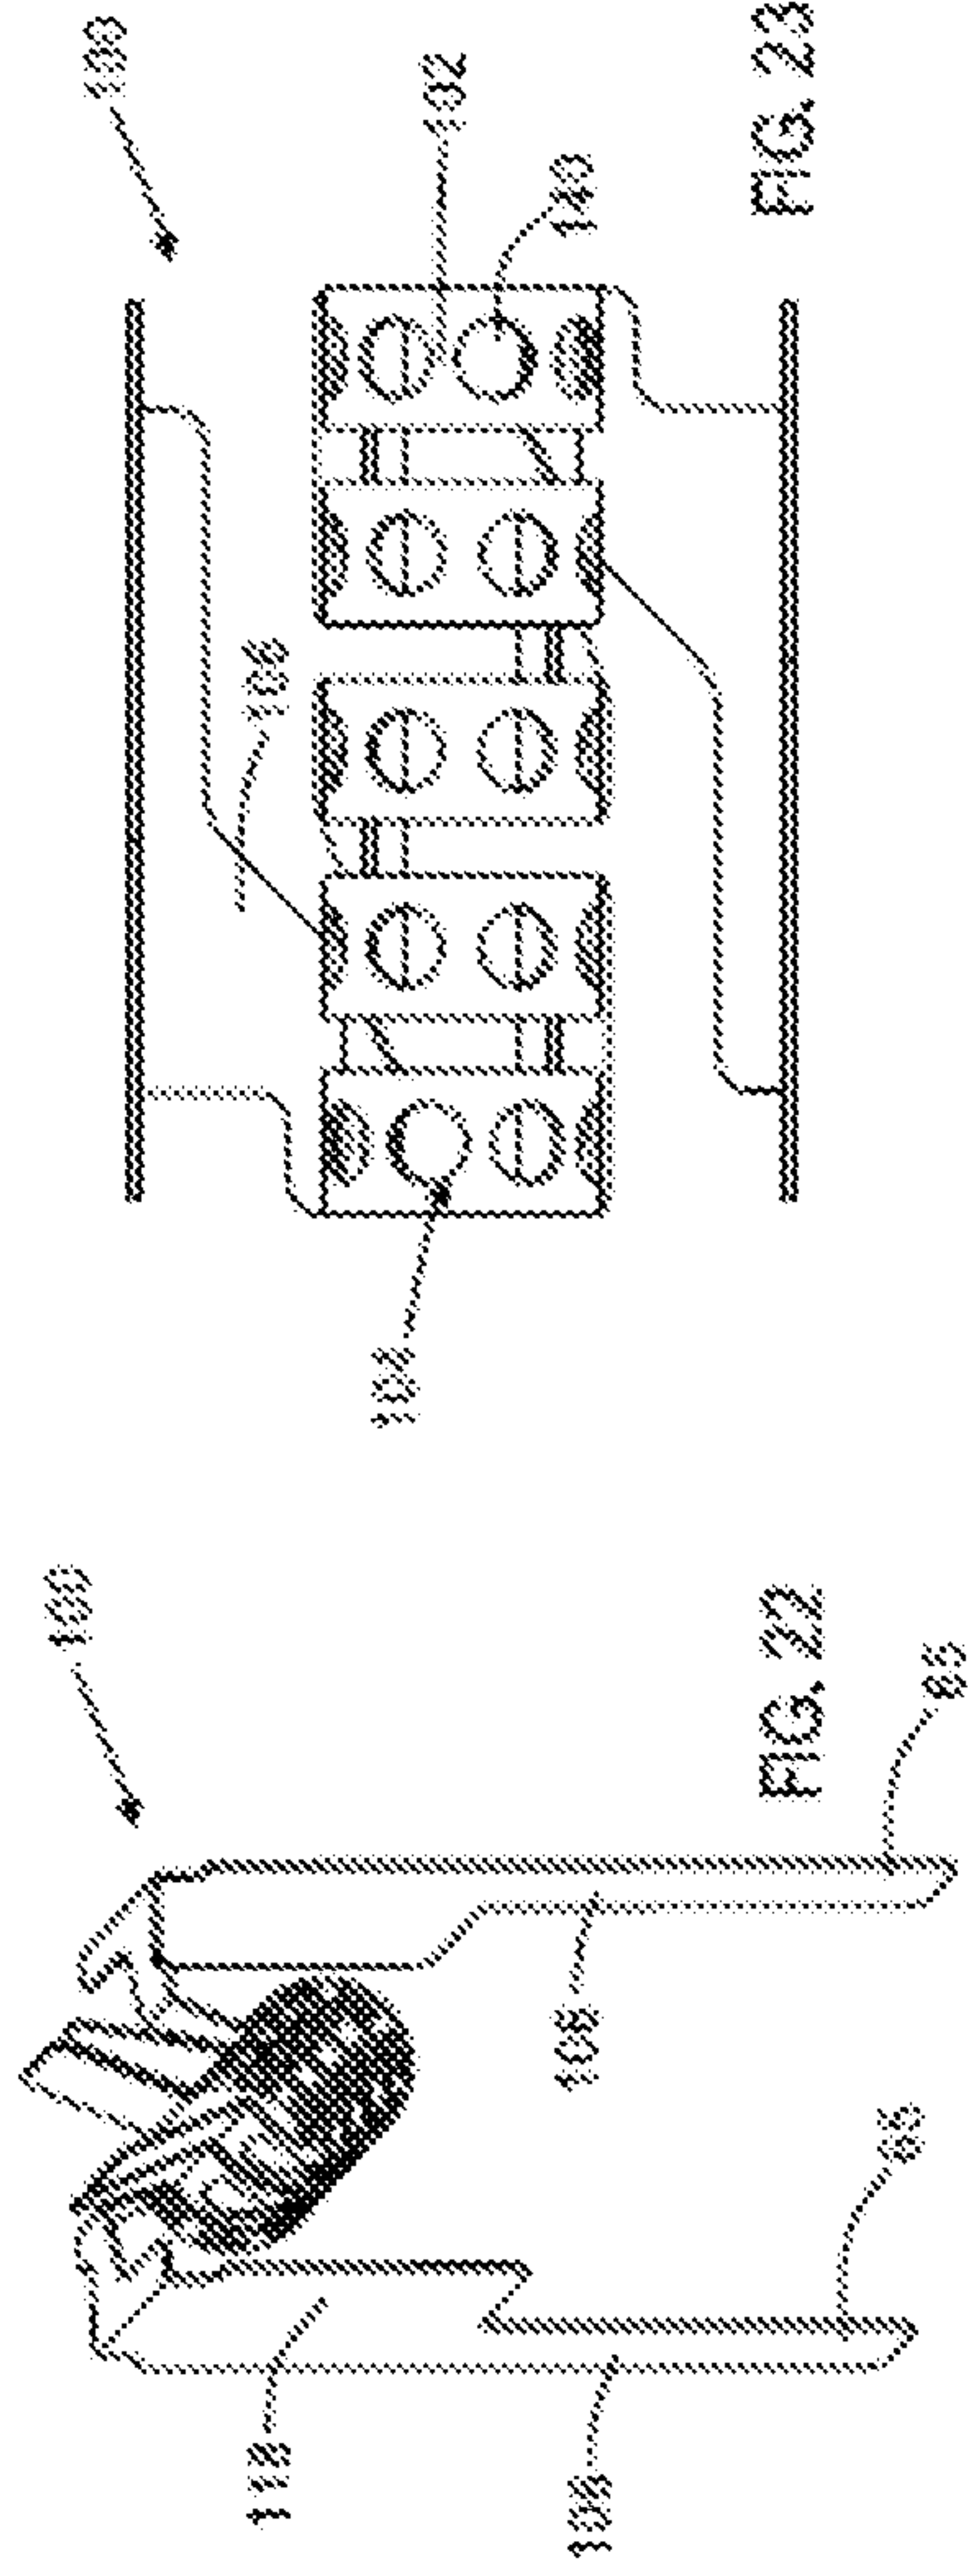
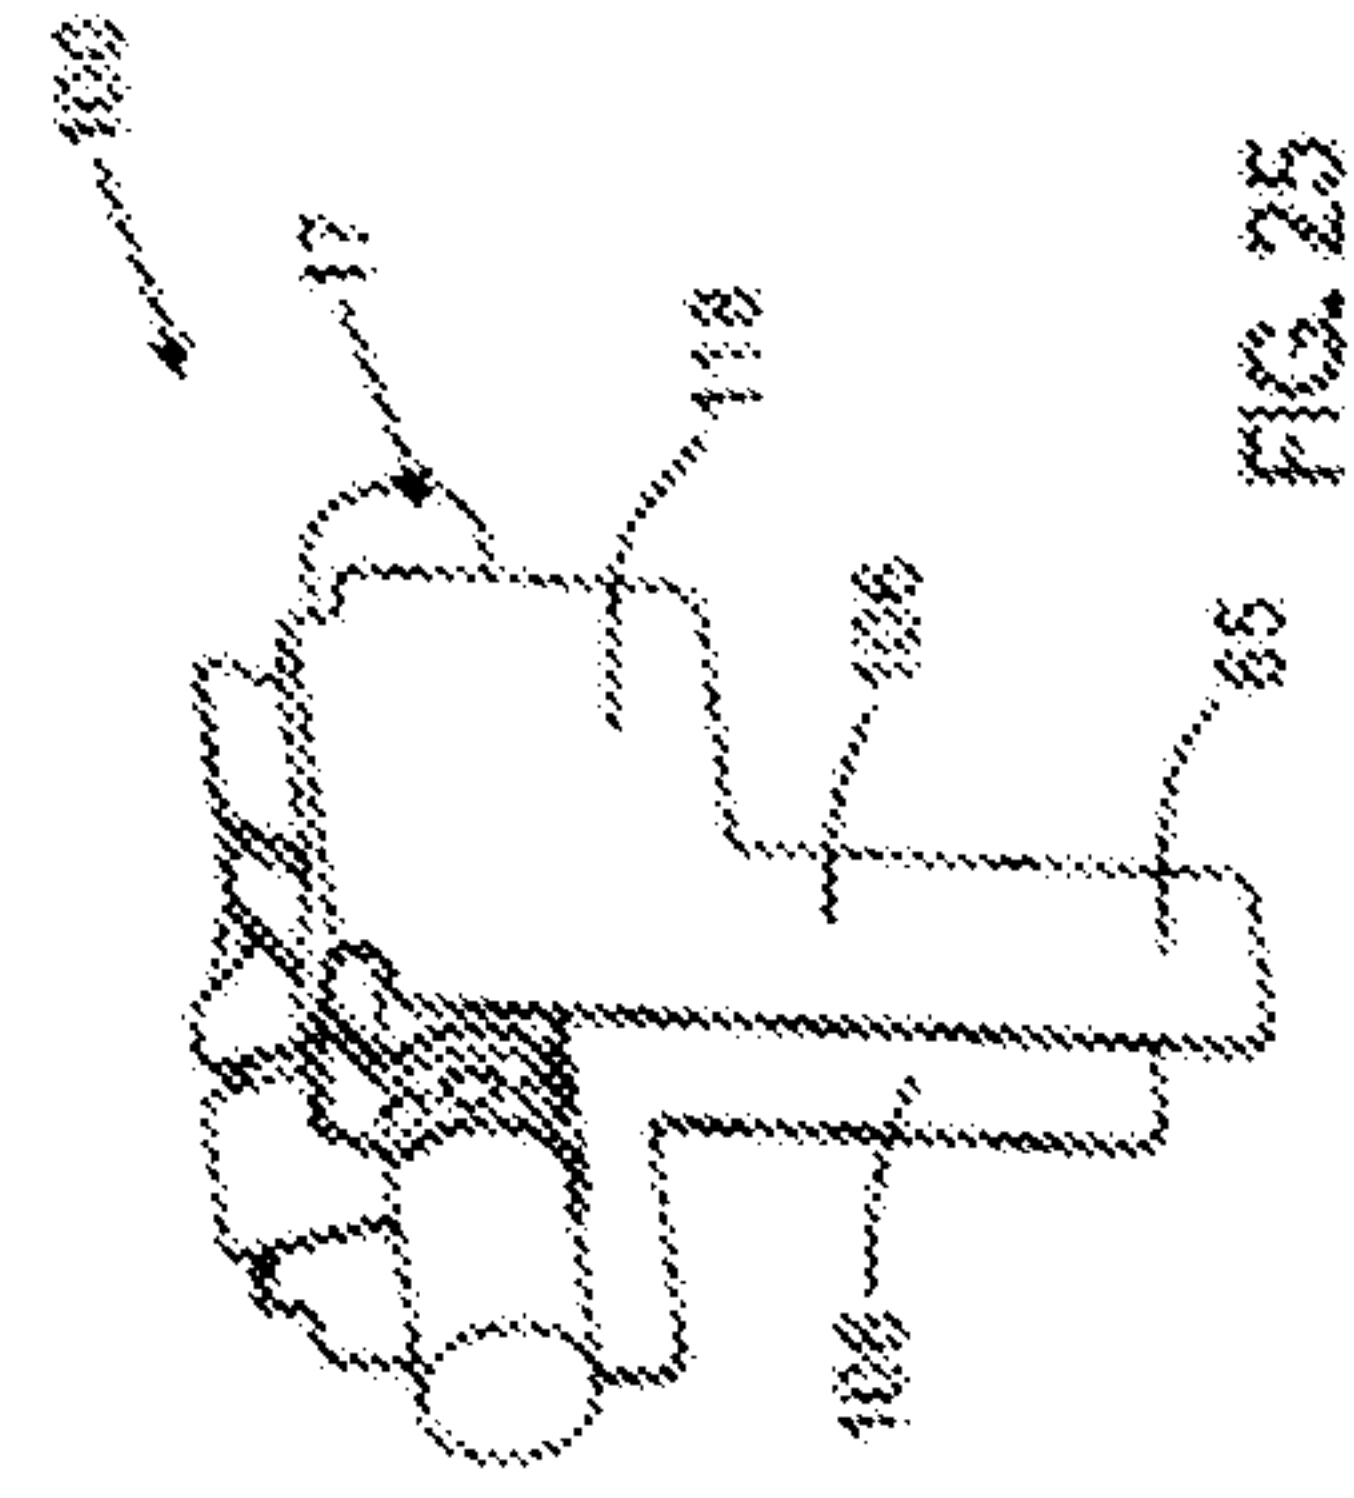


FIG. 25



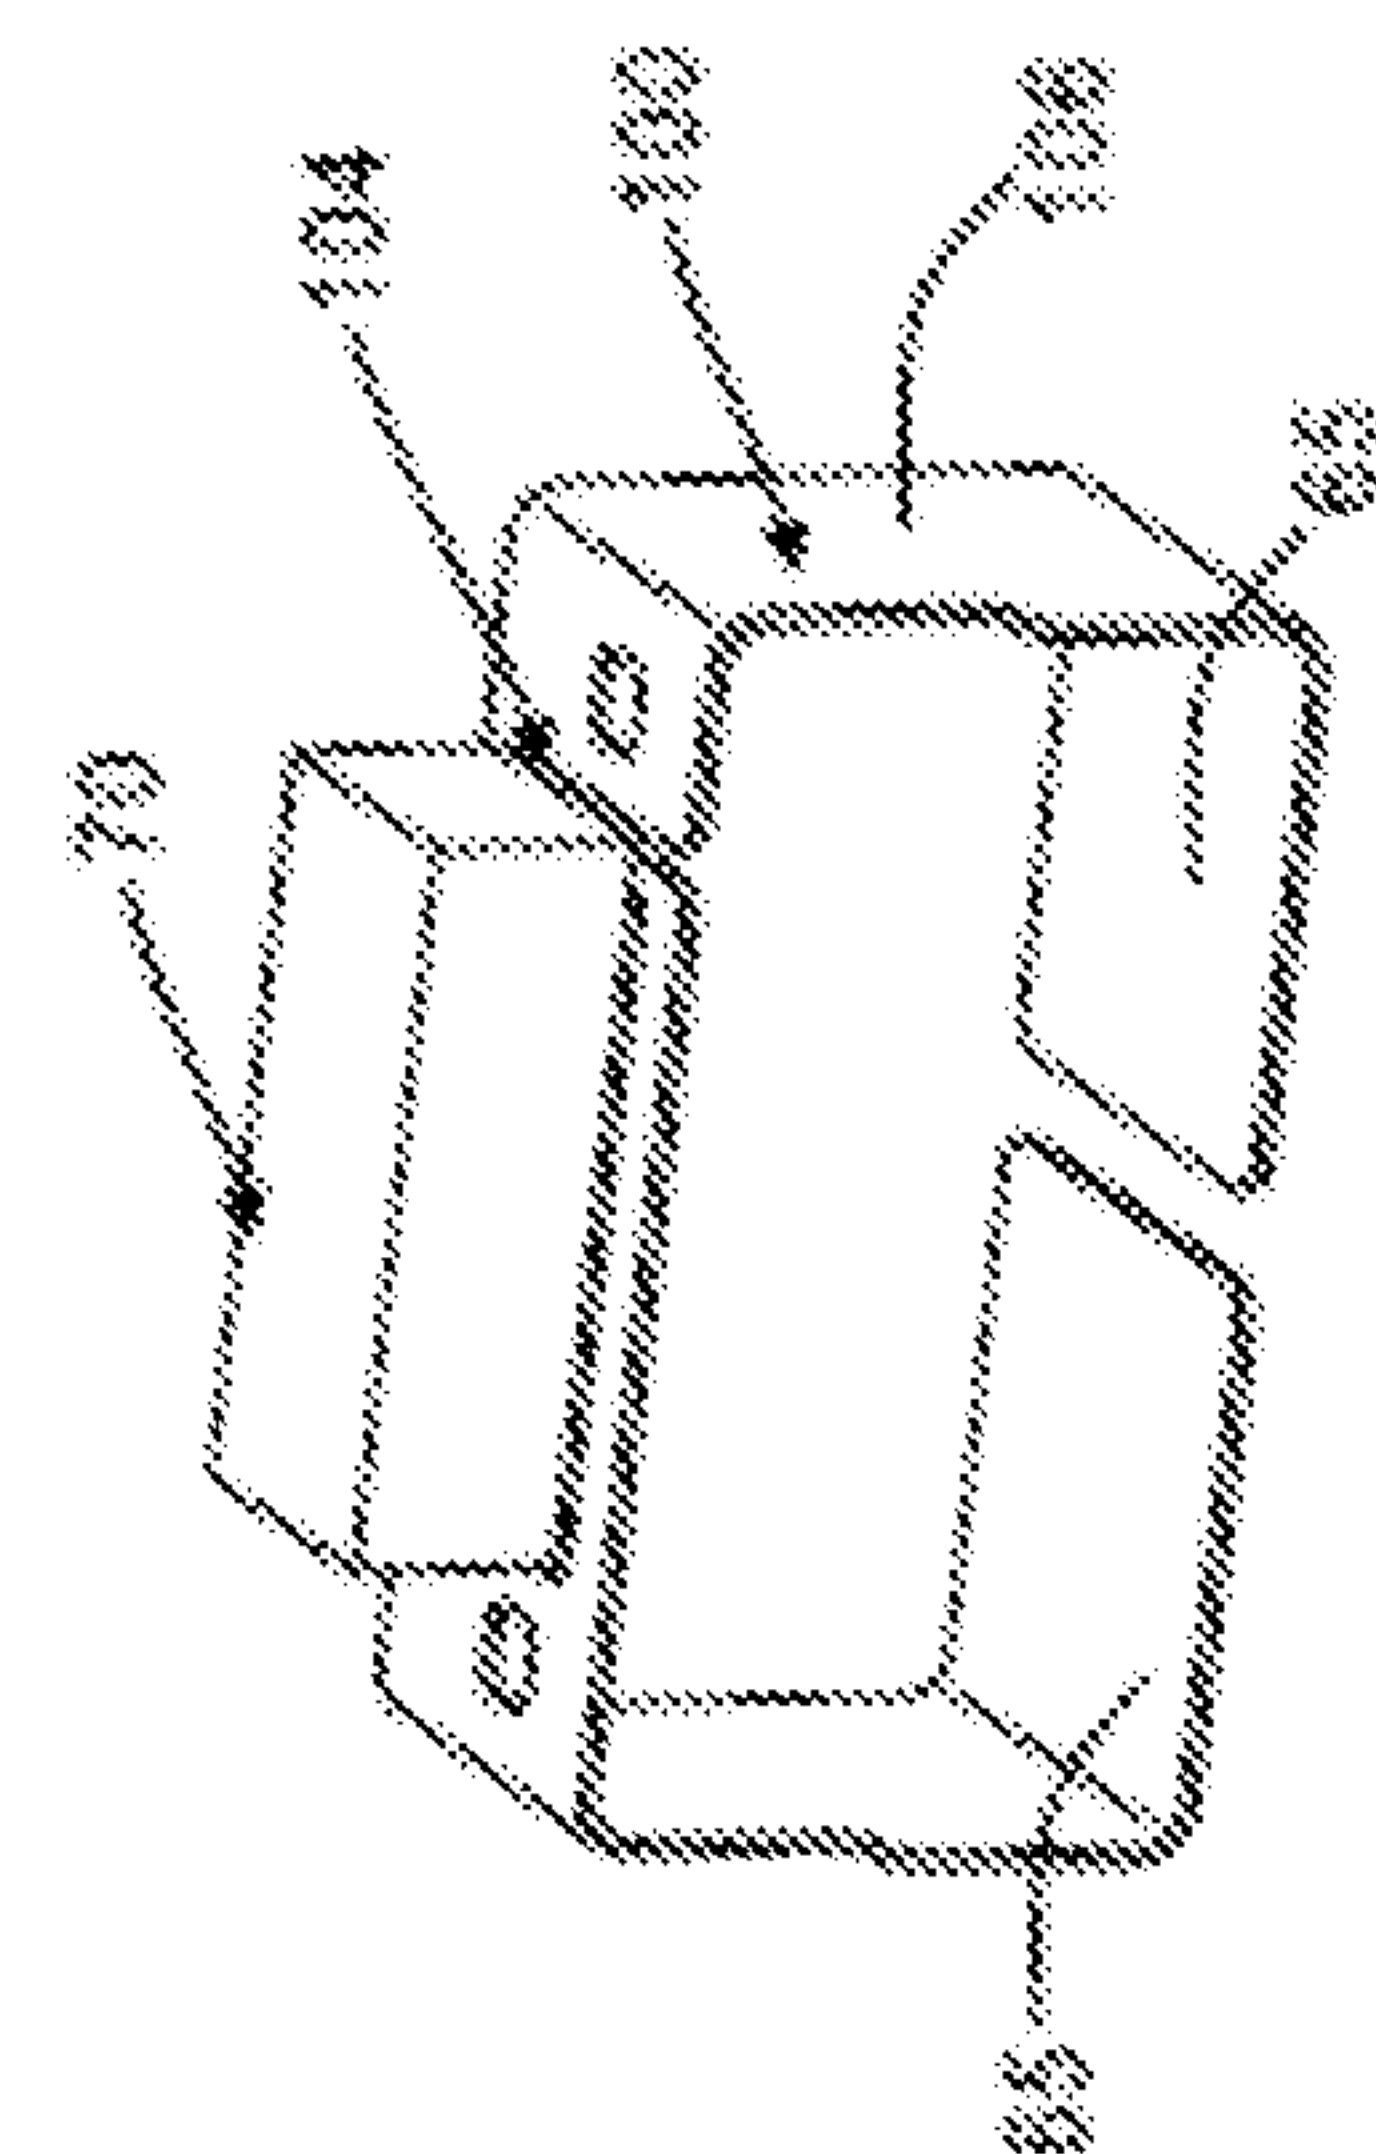


FIG. 27

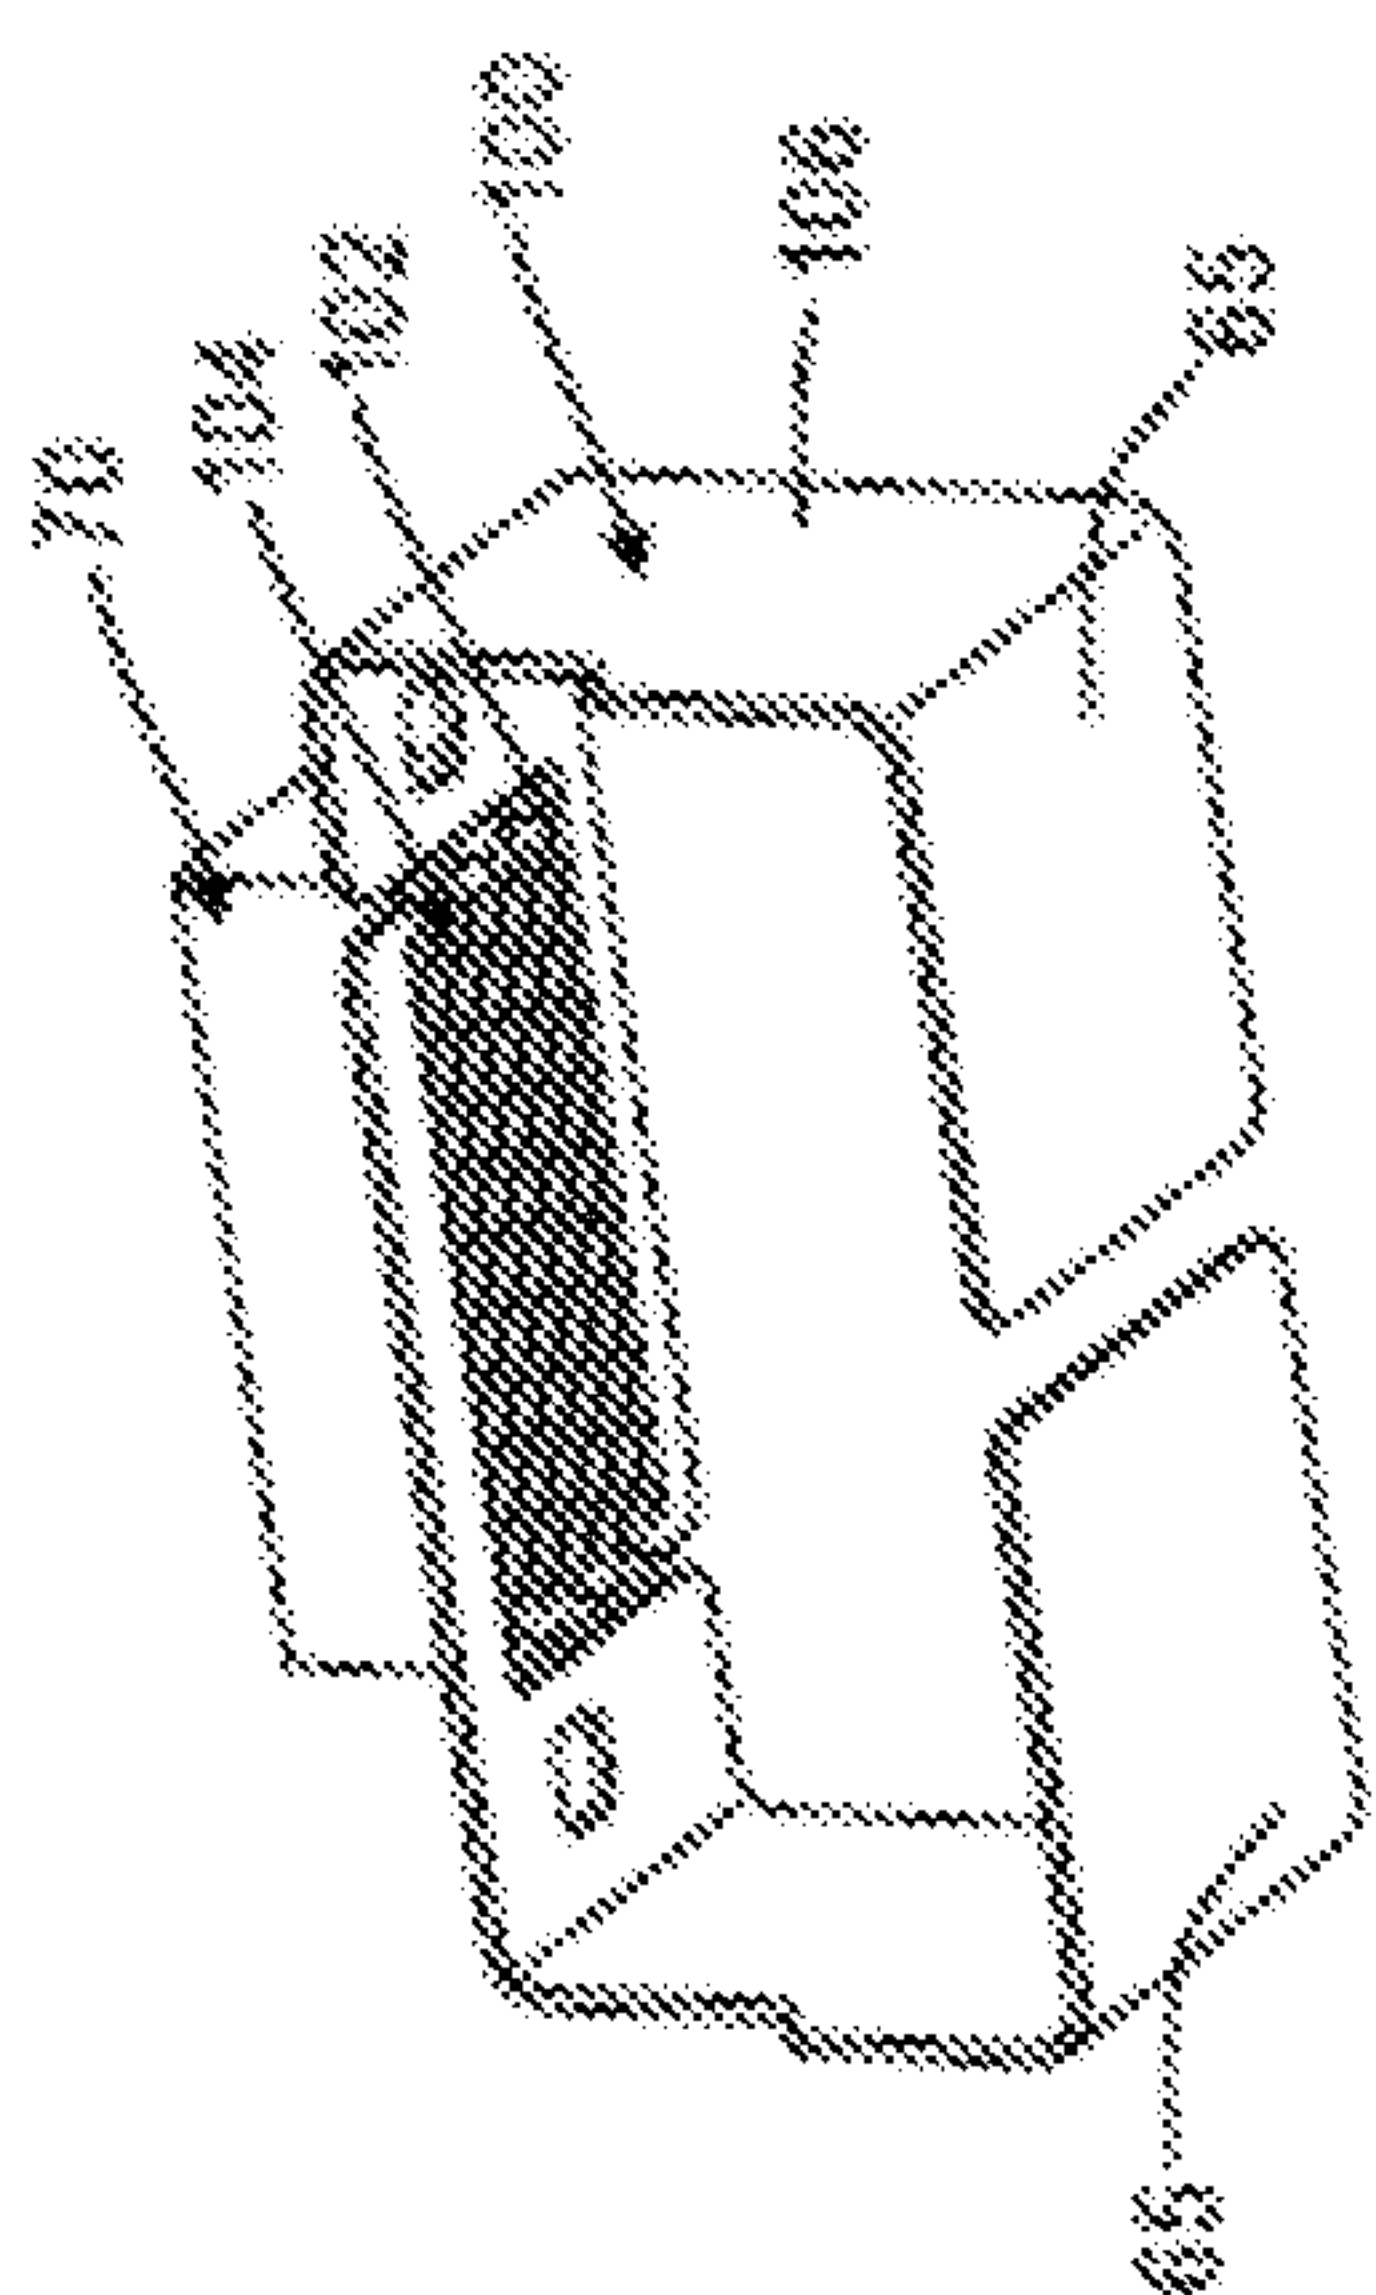


FIG. 26

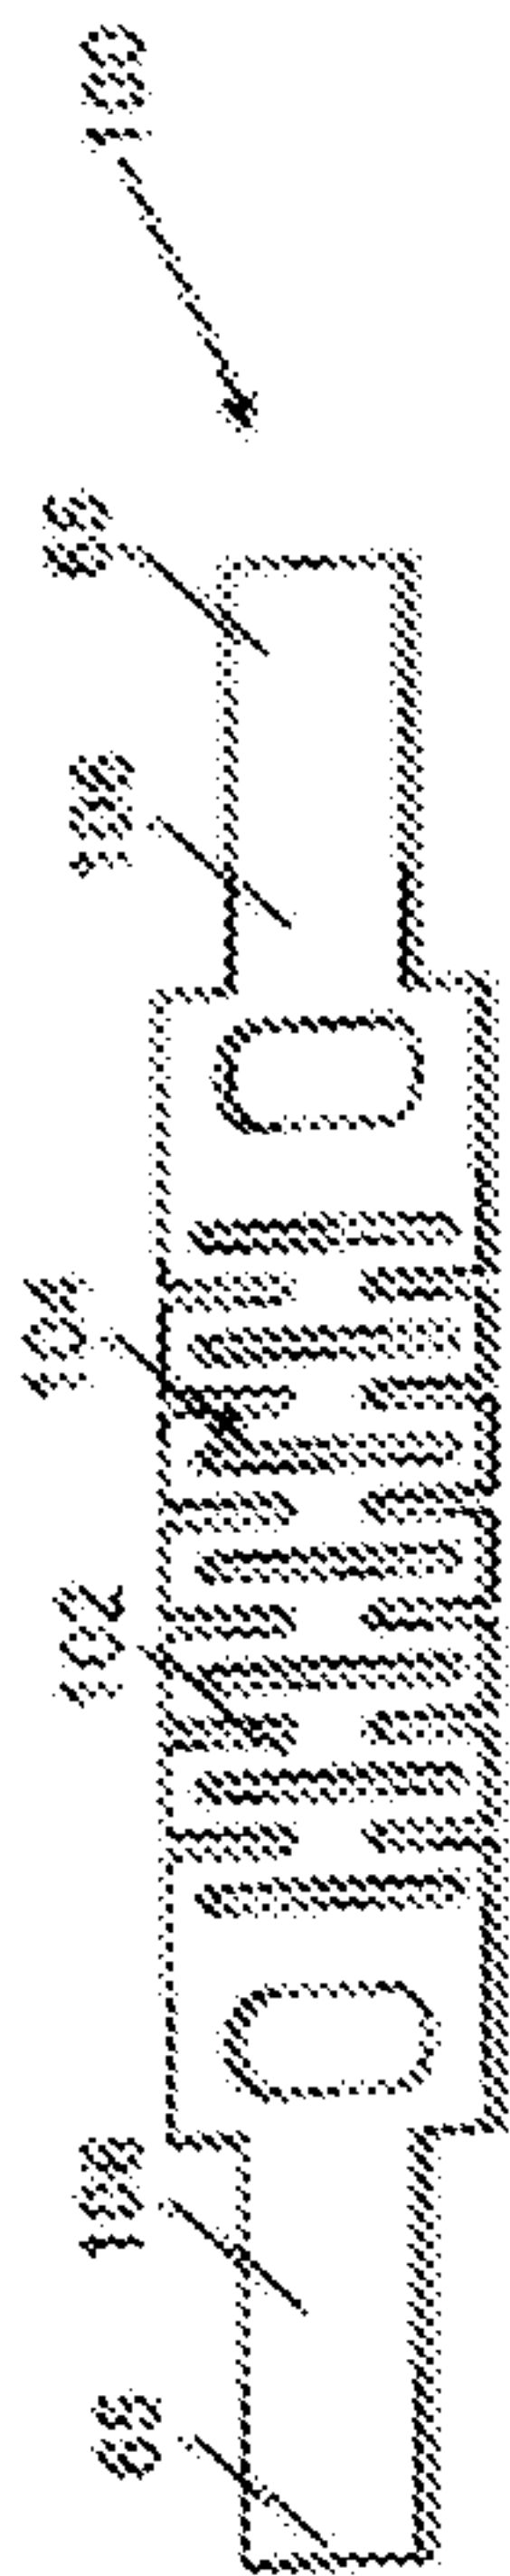


FIG. 28

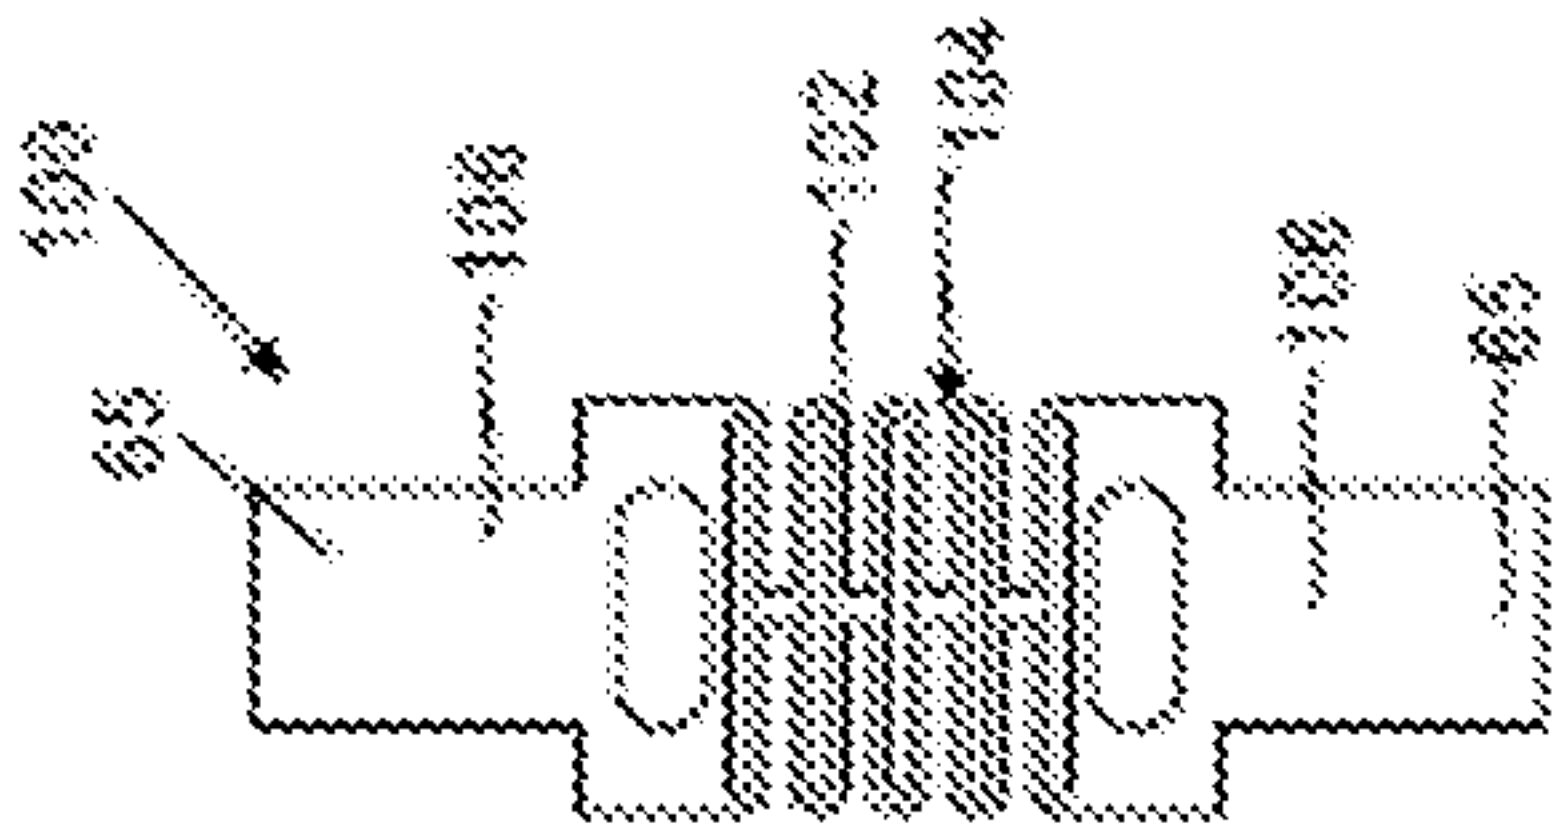


FIG. 29

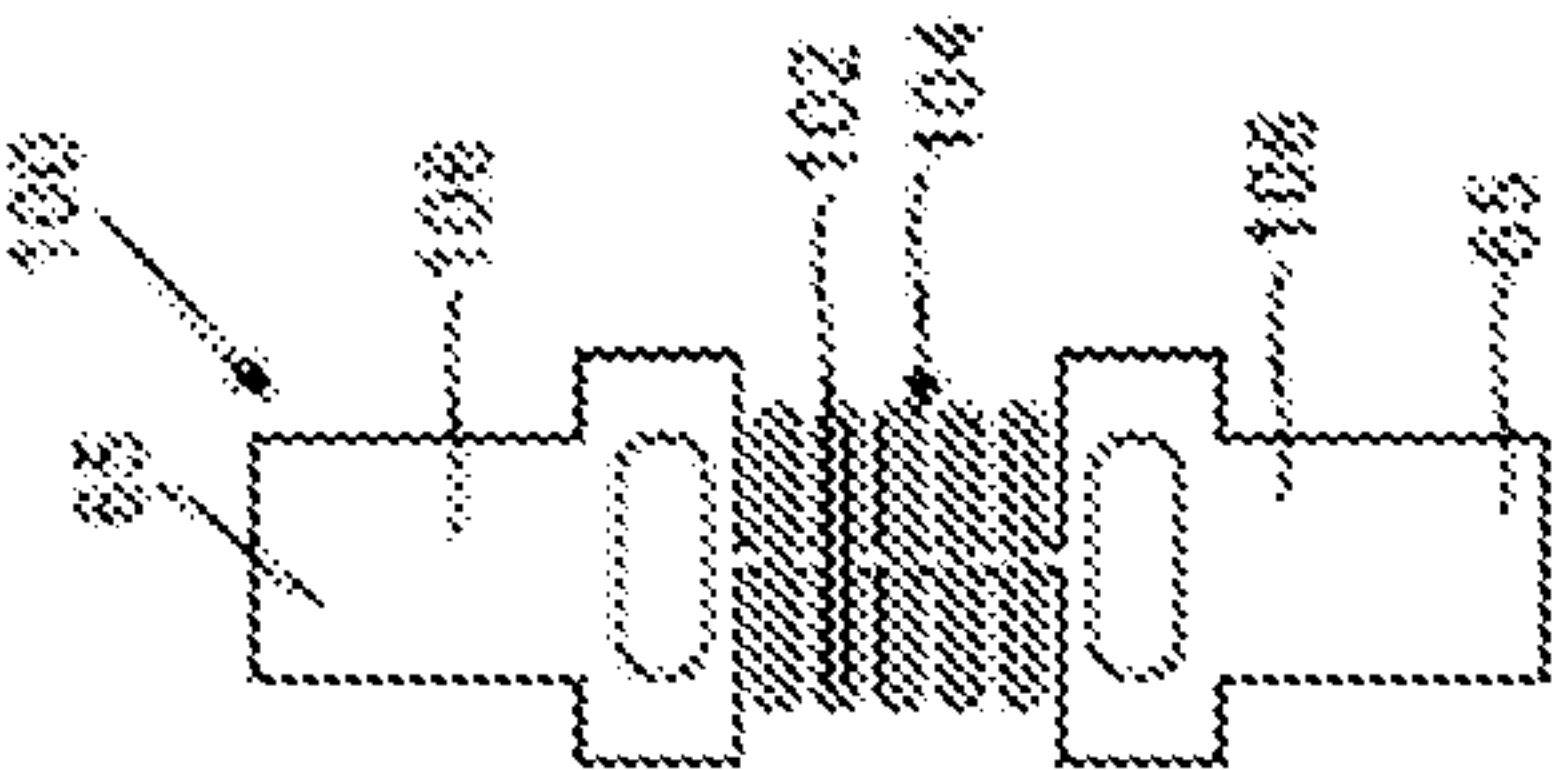


FIG. 30

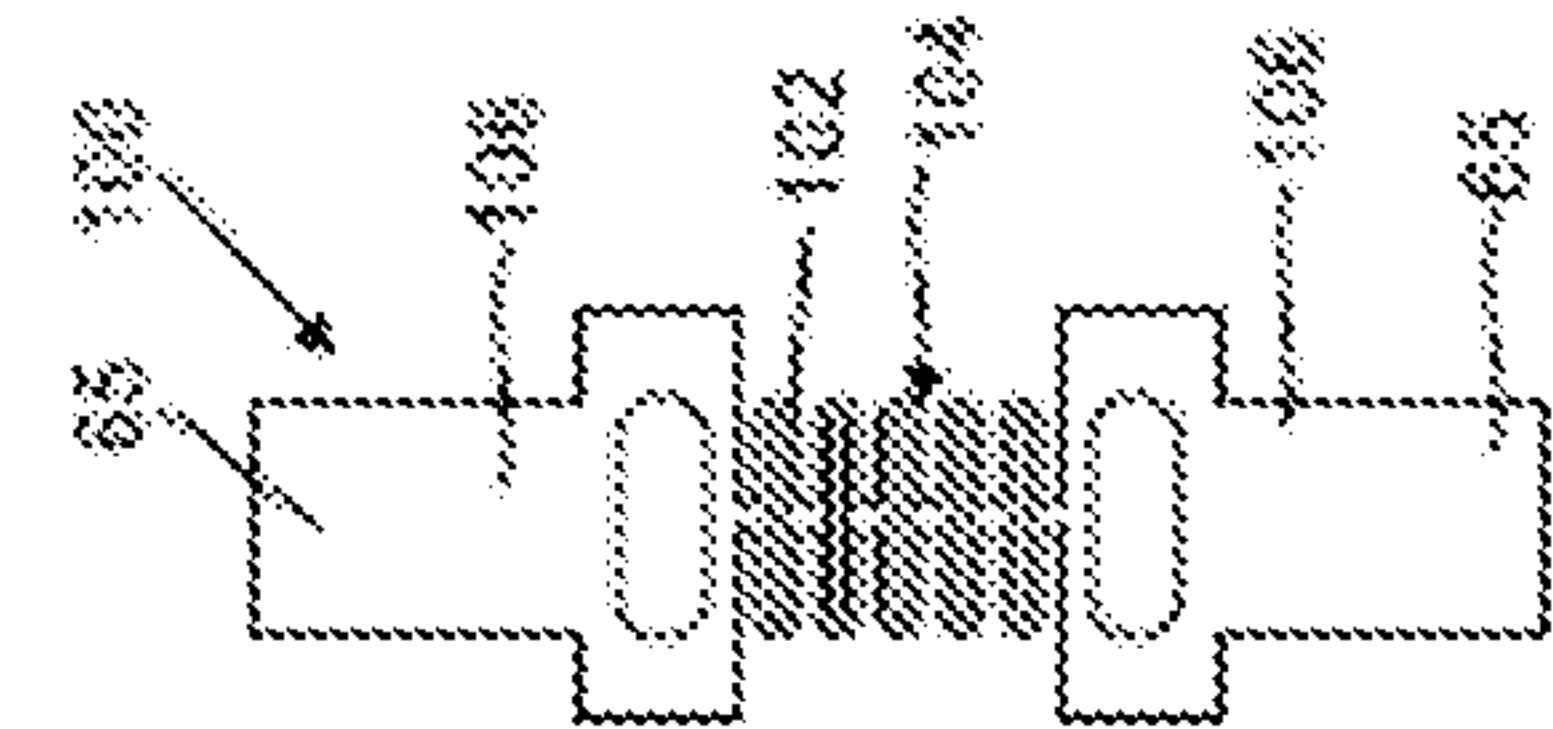
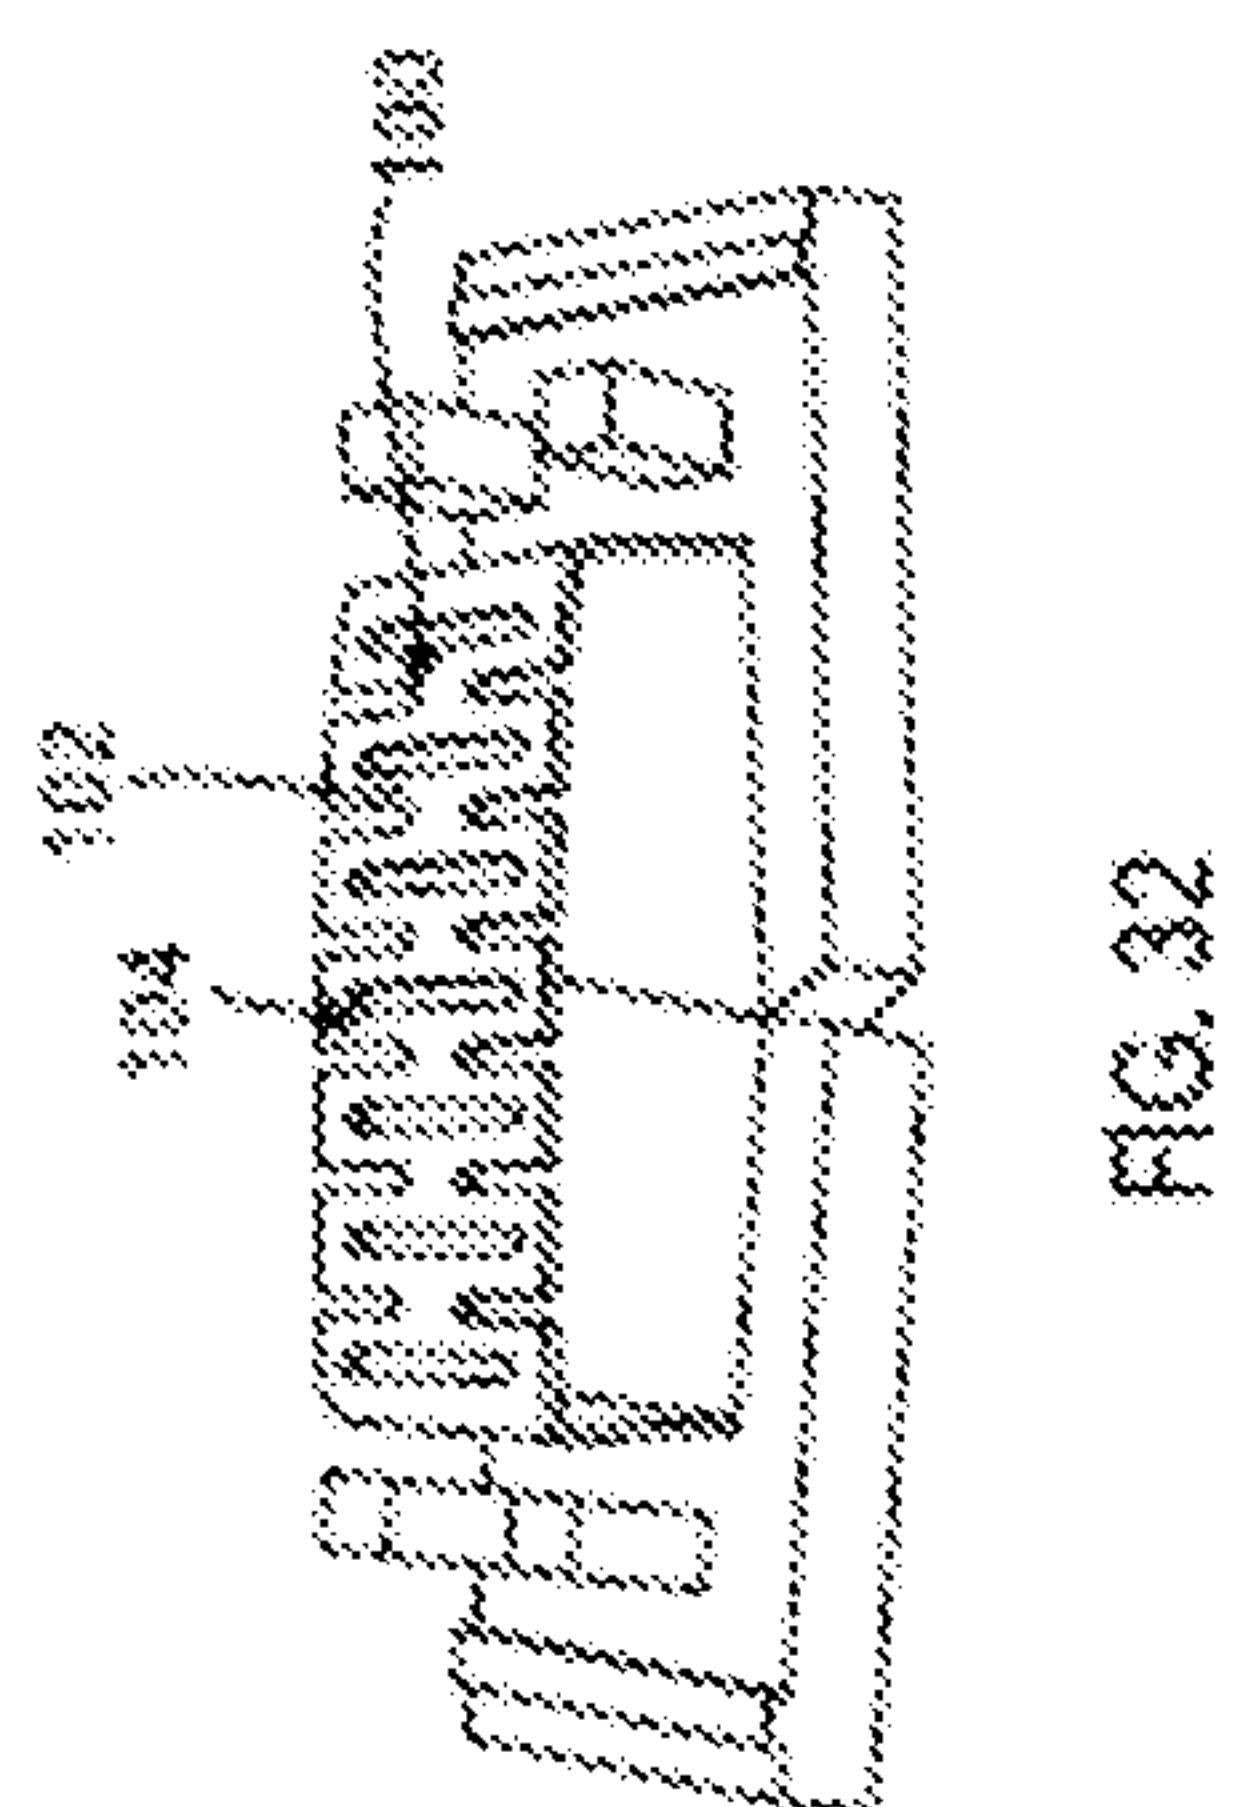
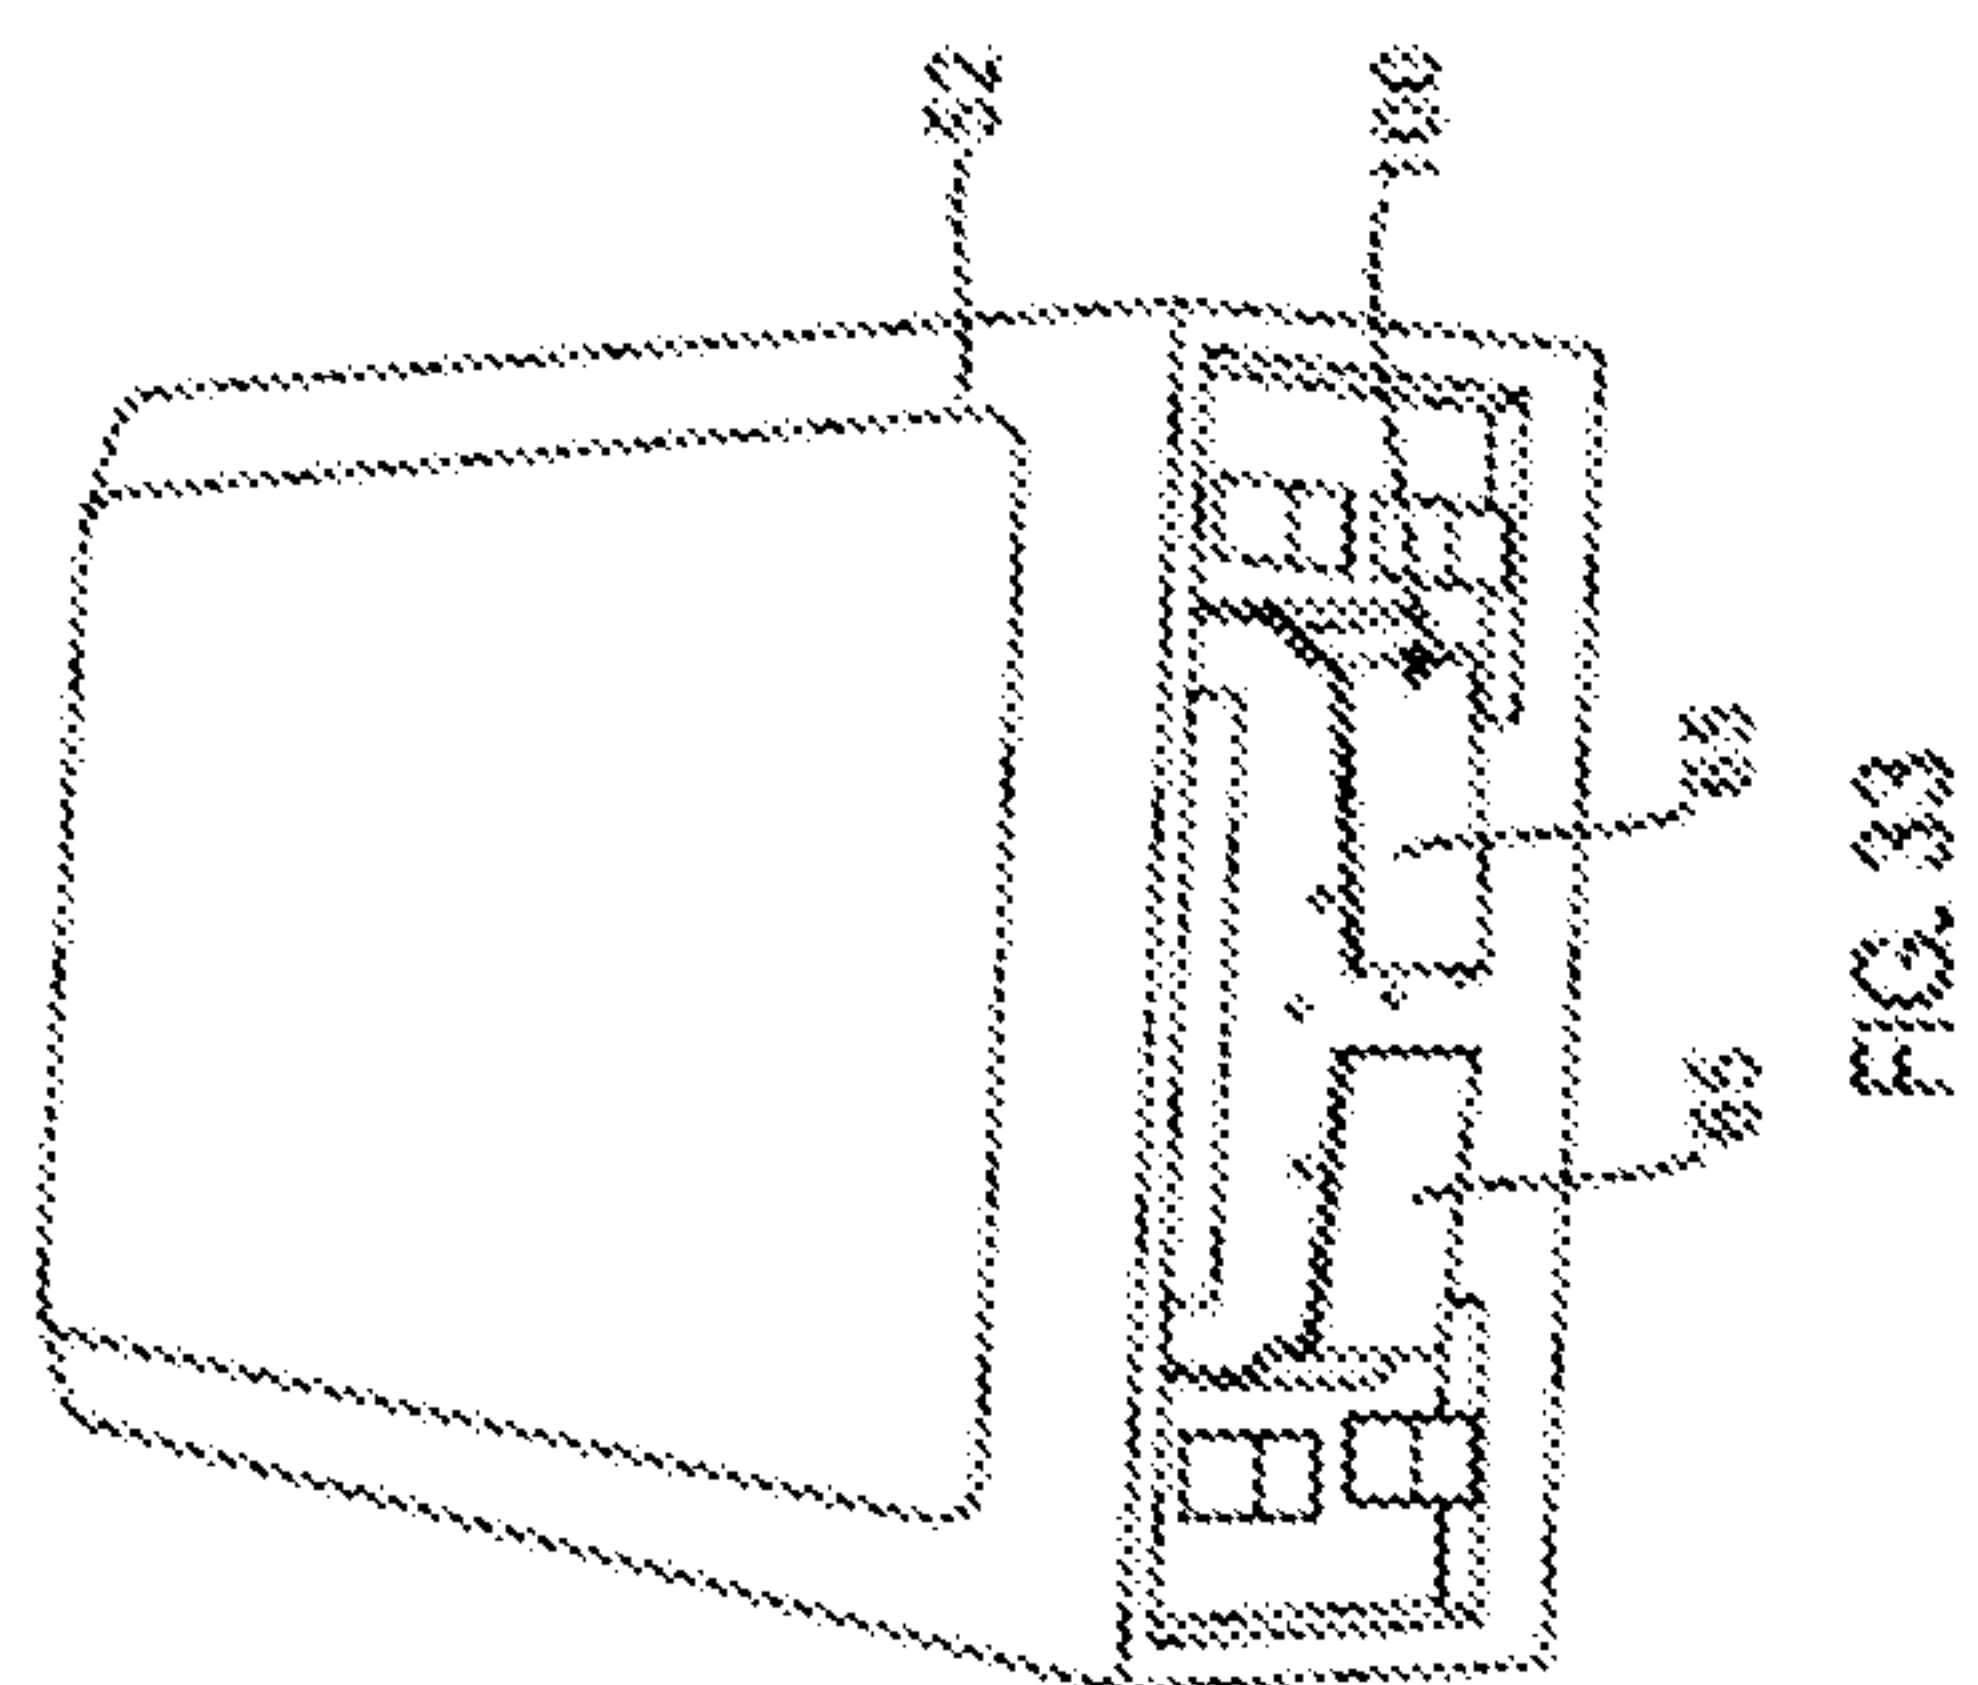


FIG. 31



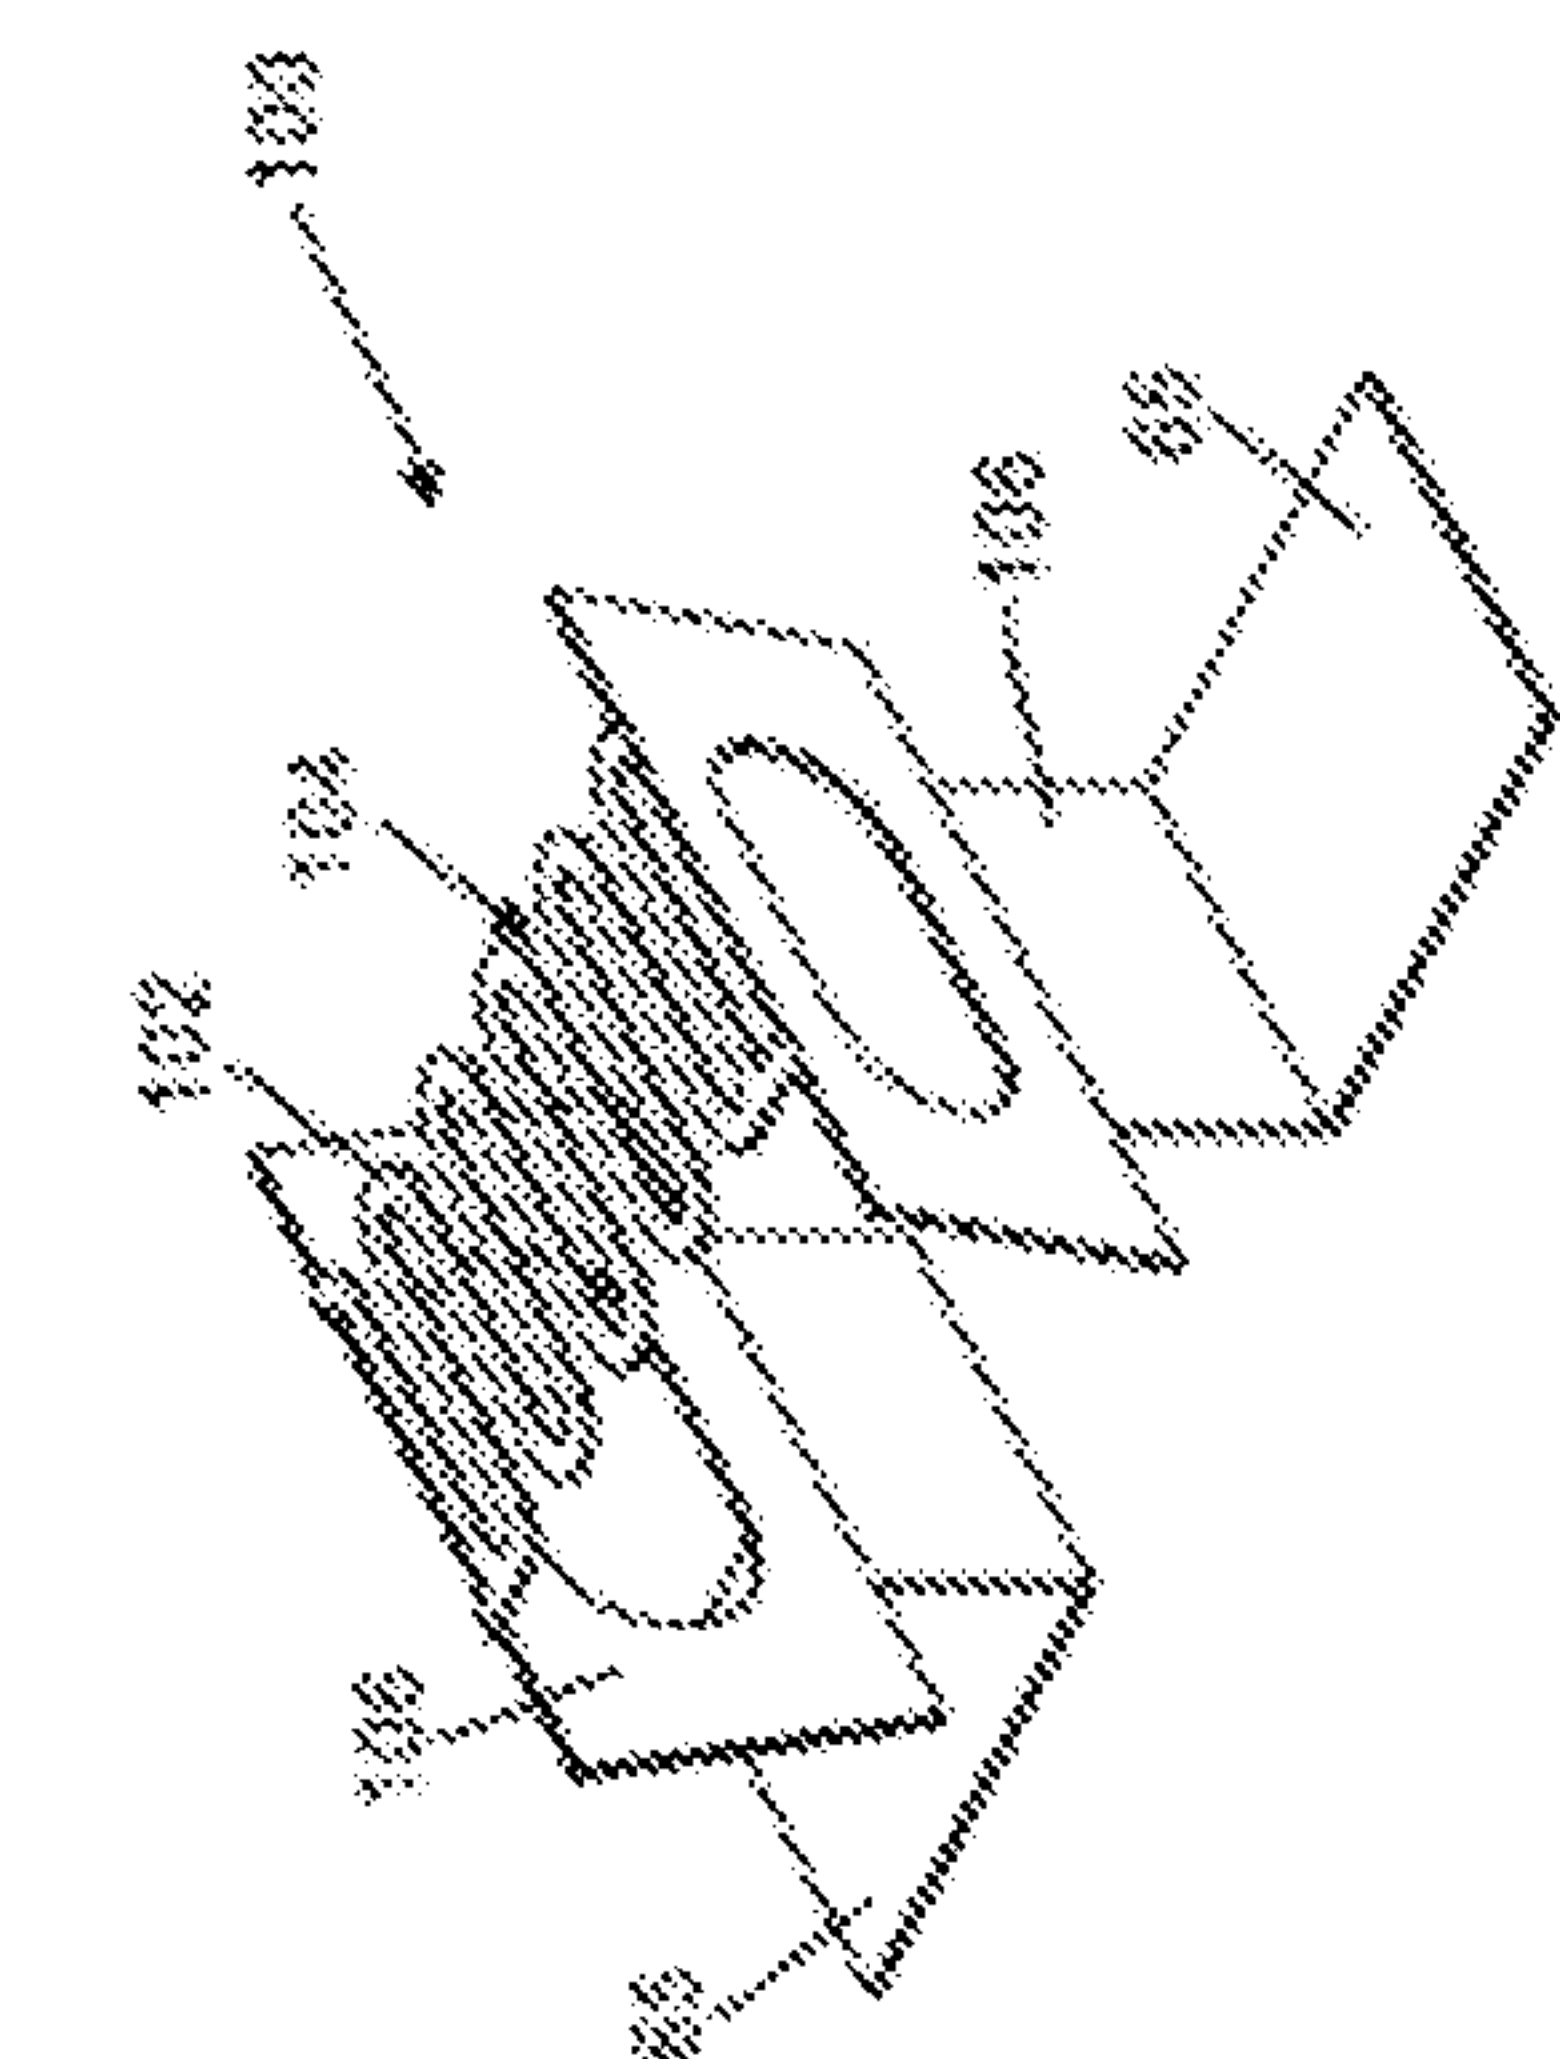


FIG. 34

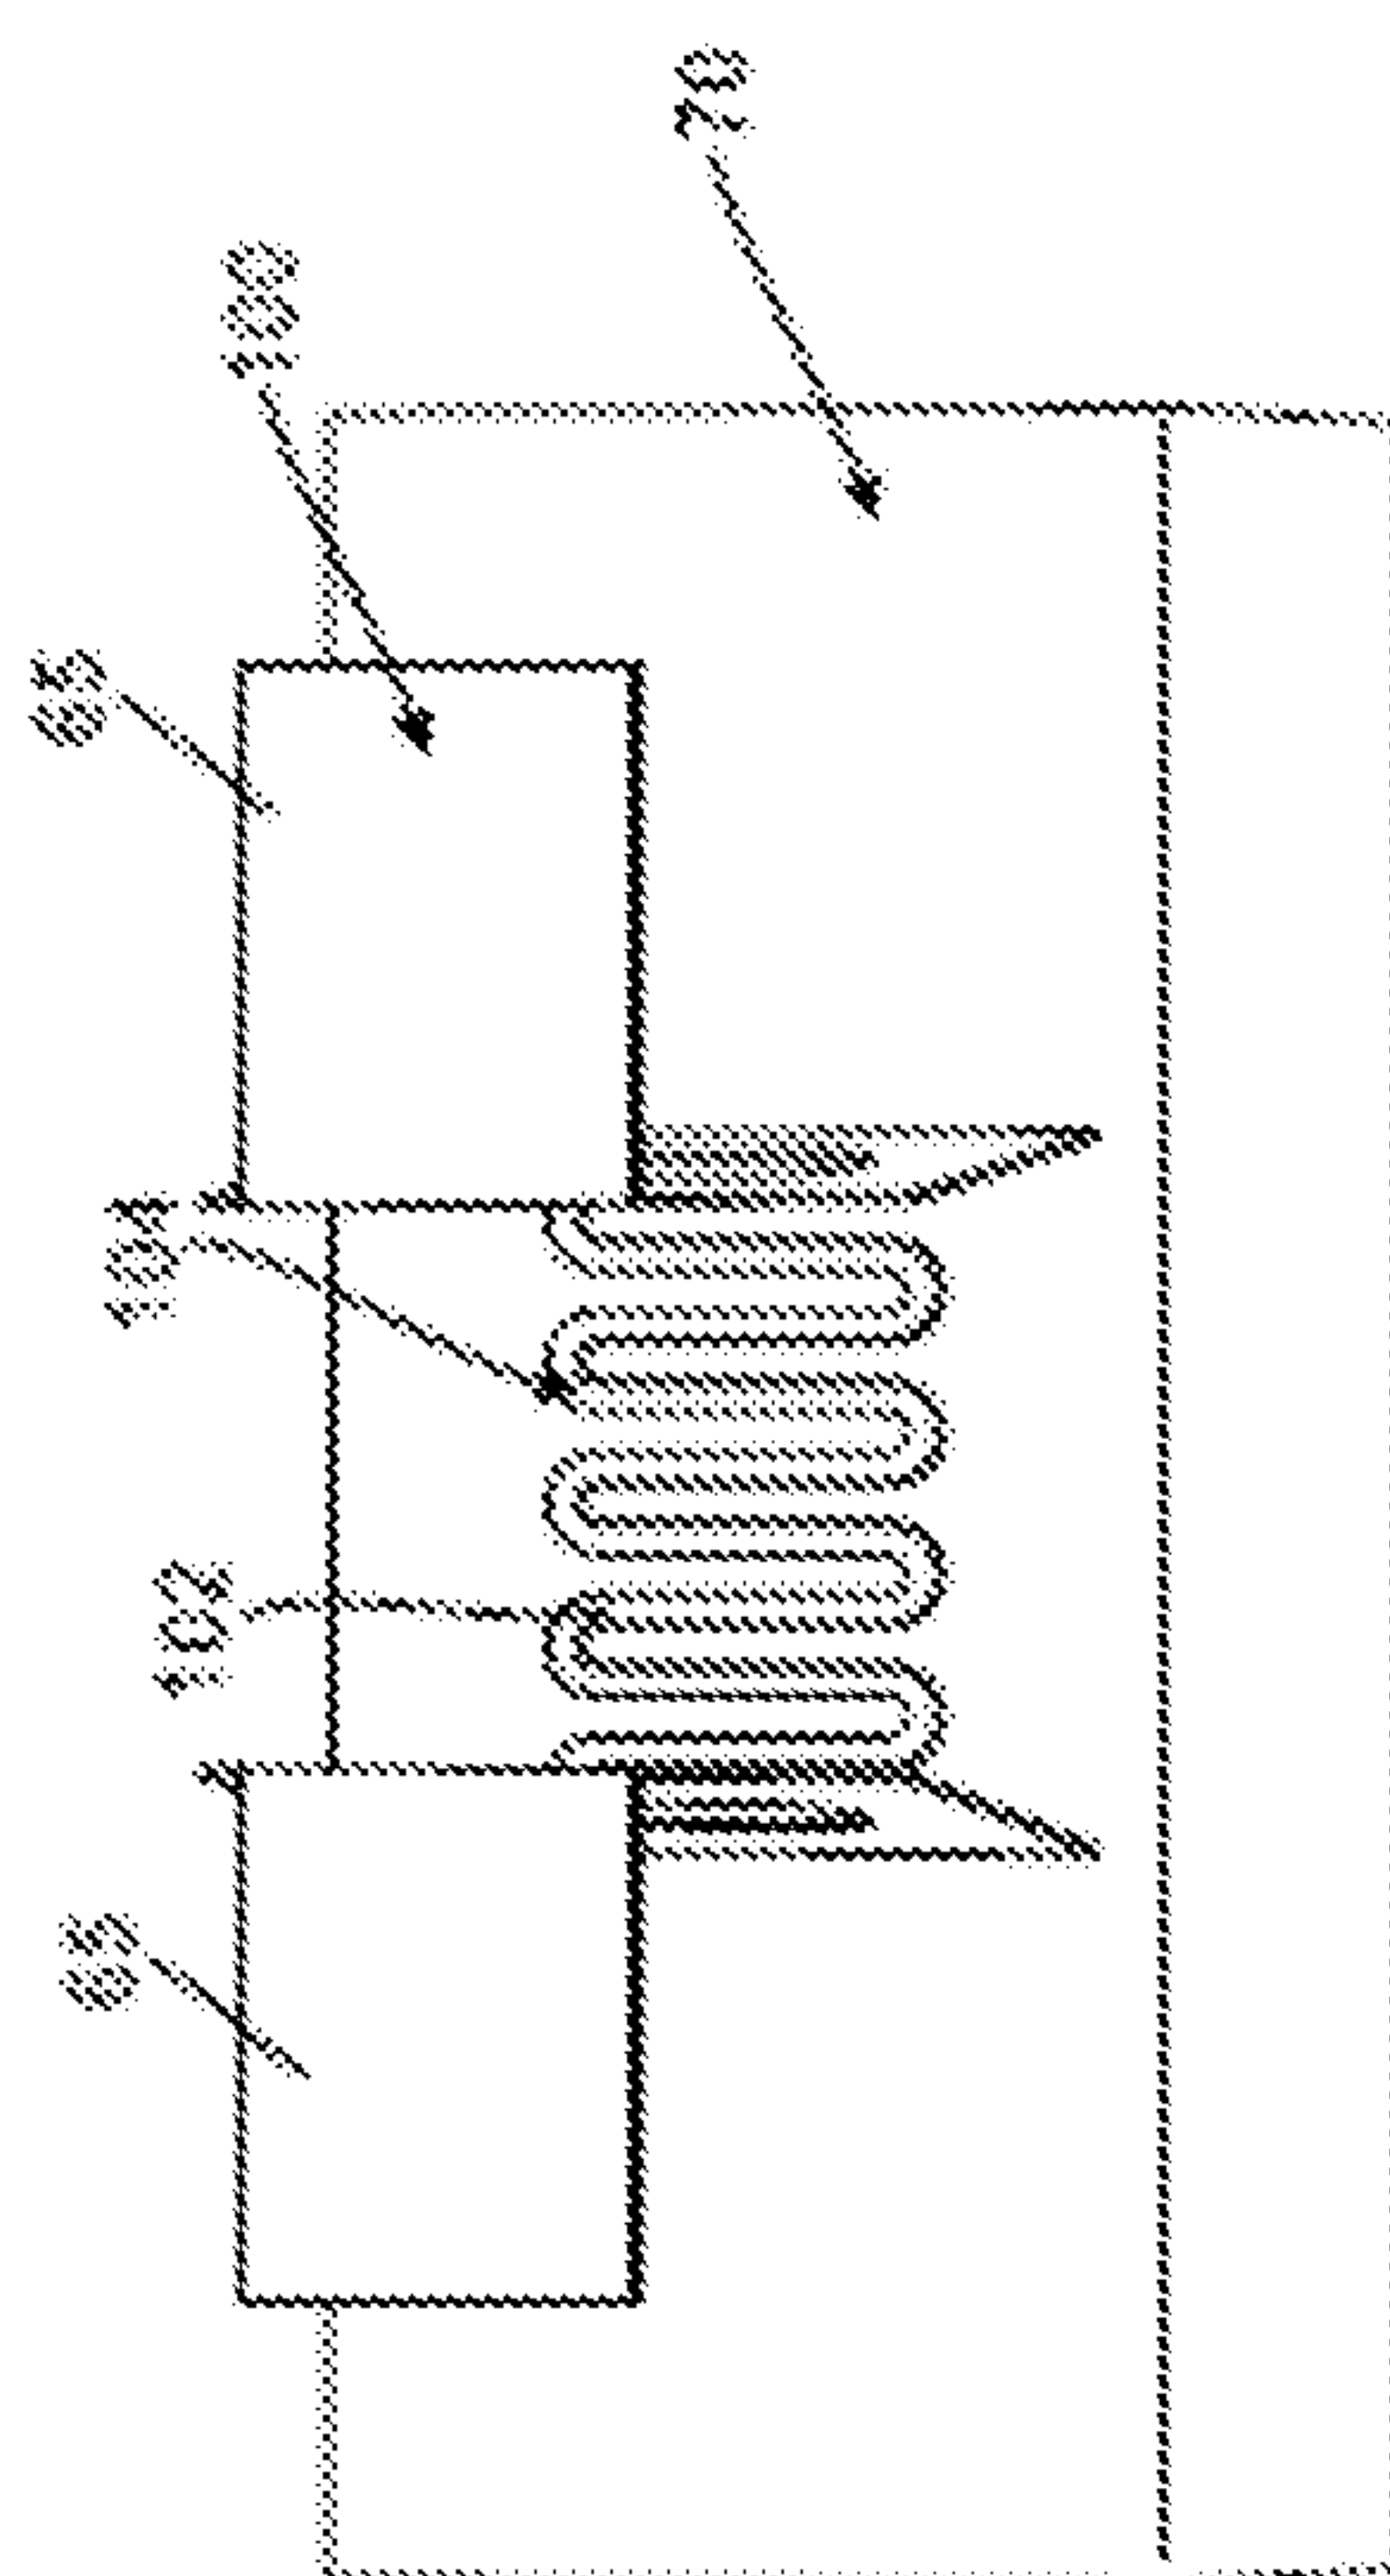


FIG. 35

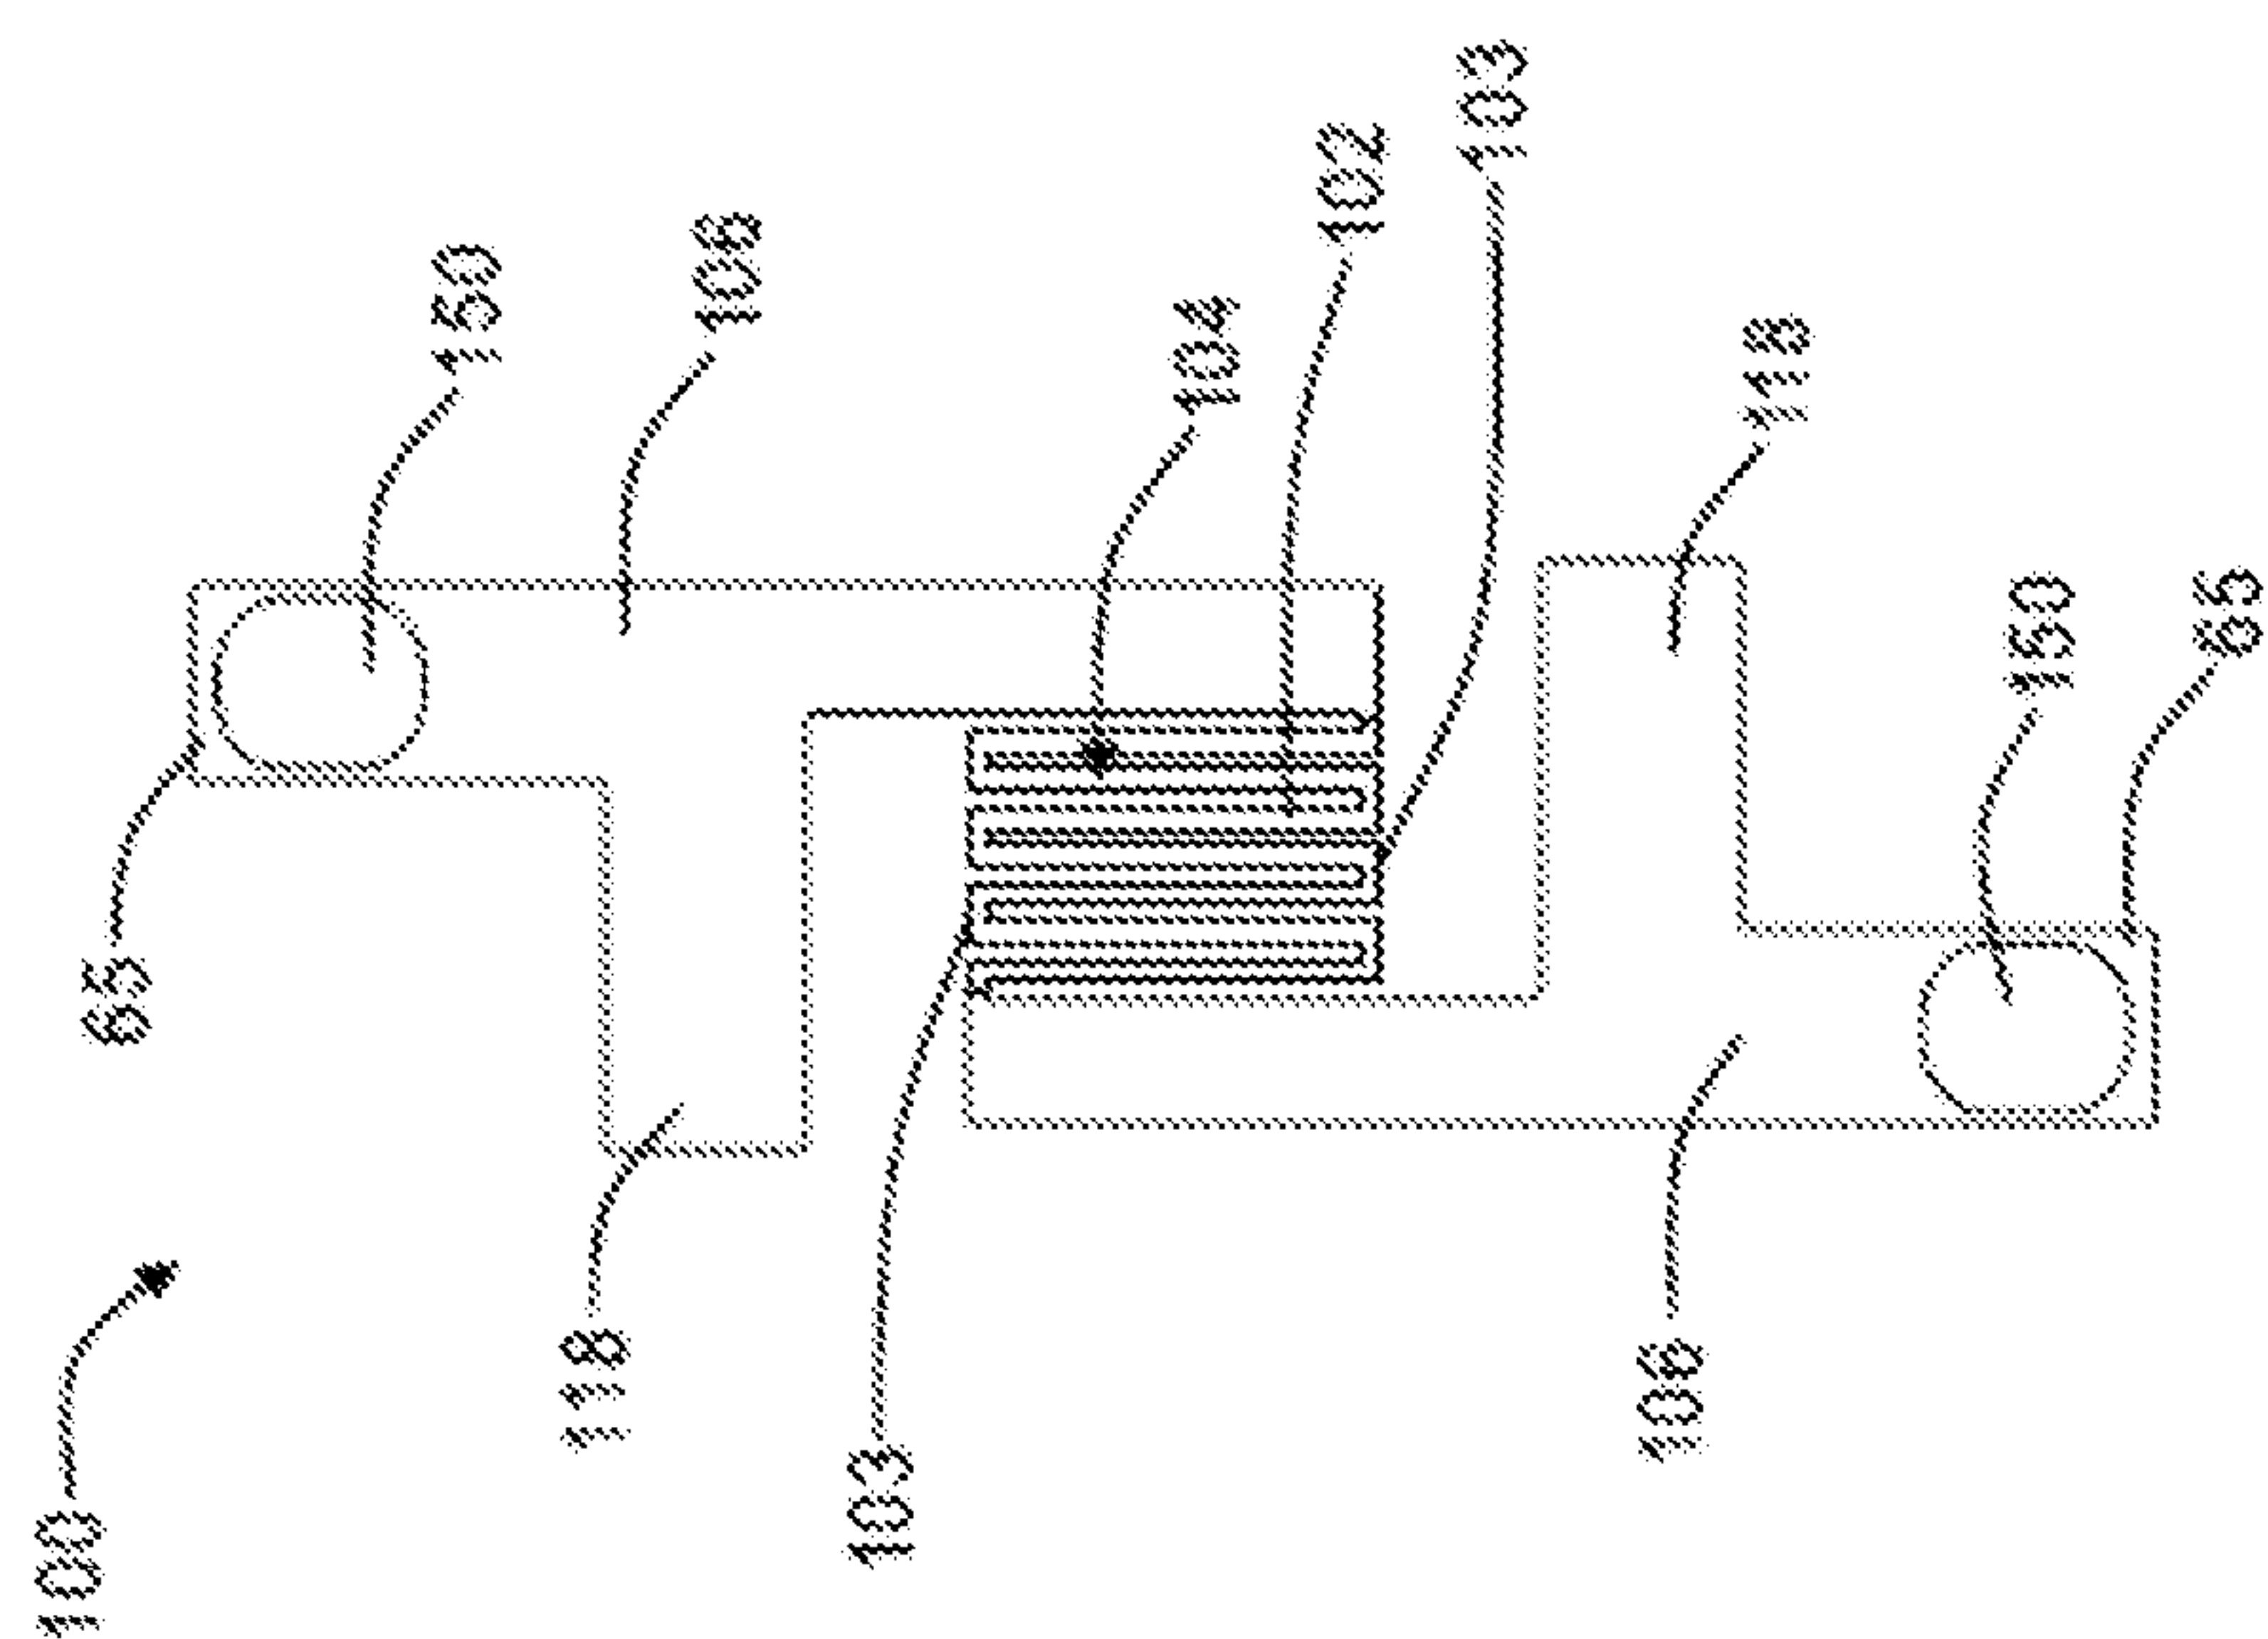


FIG. 36

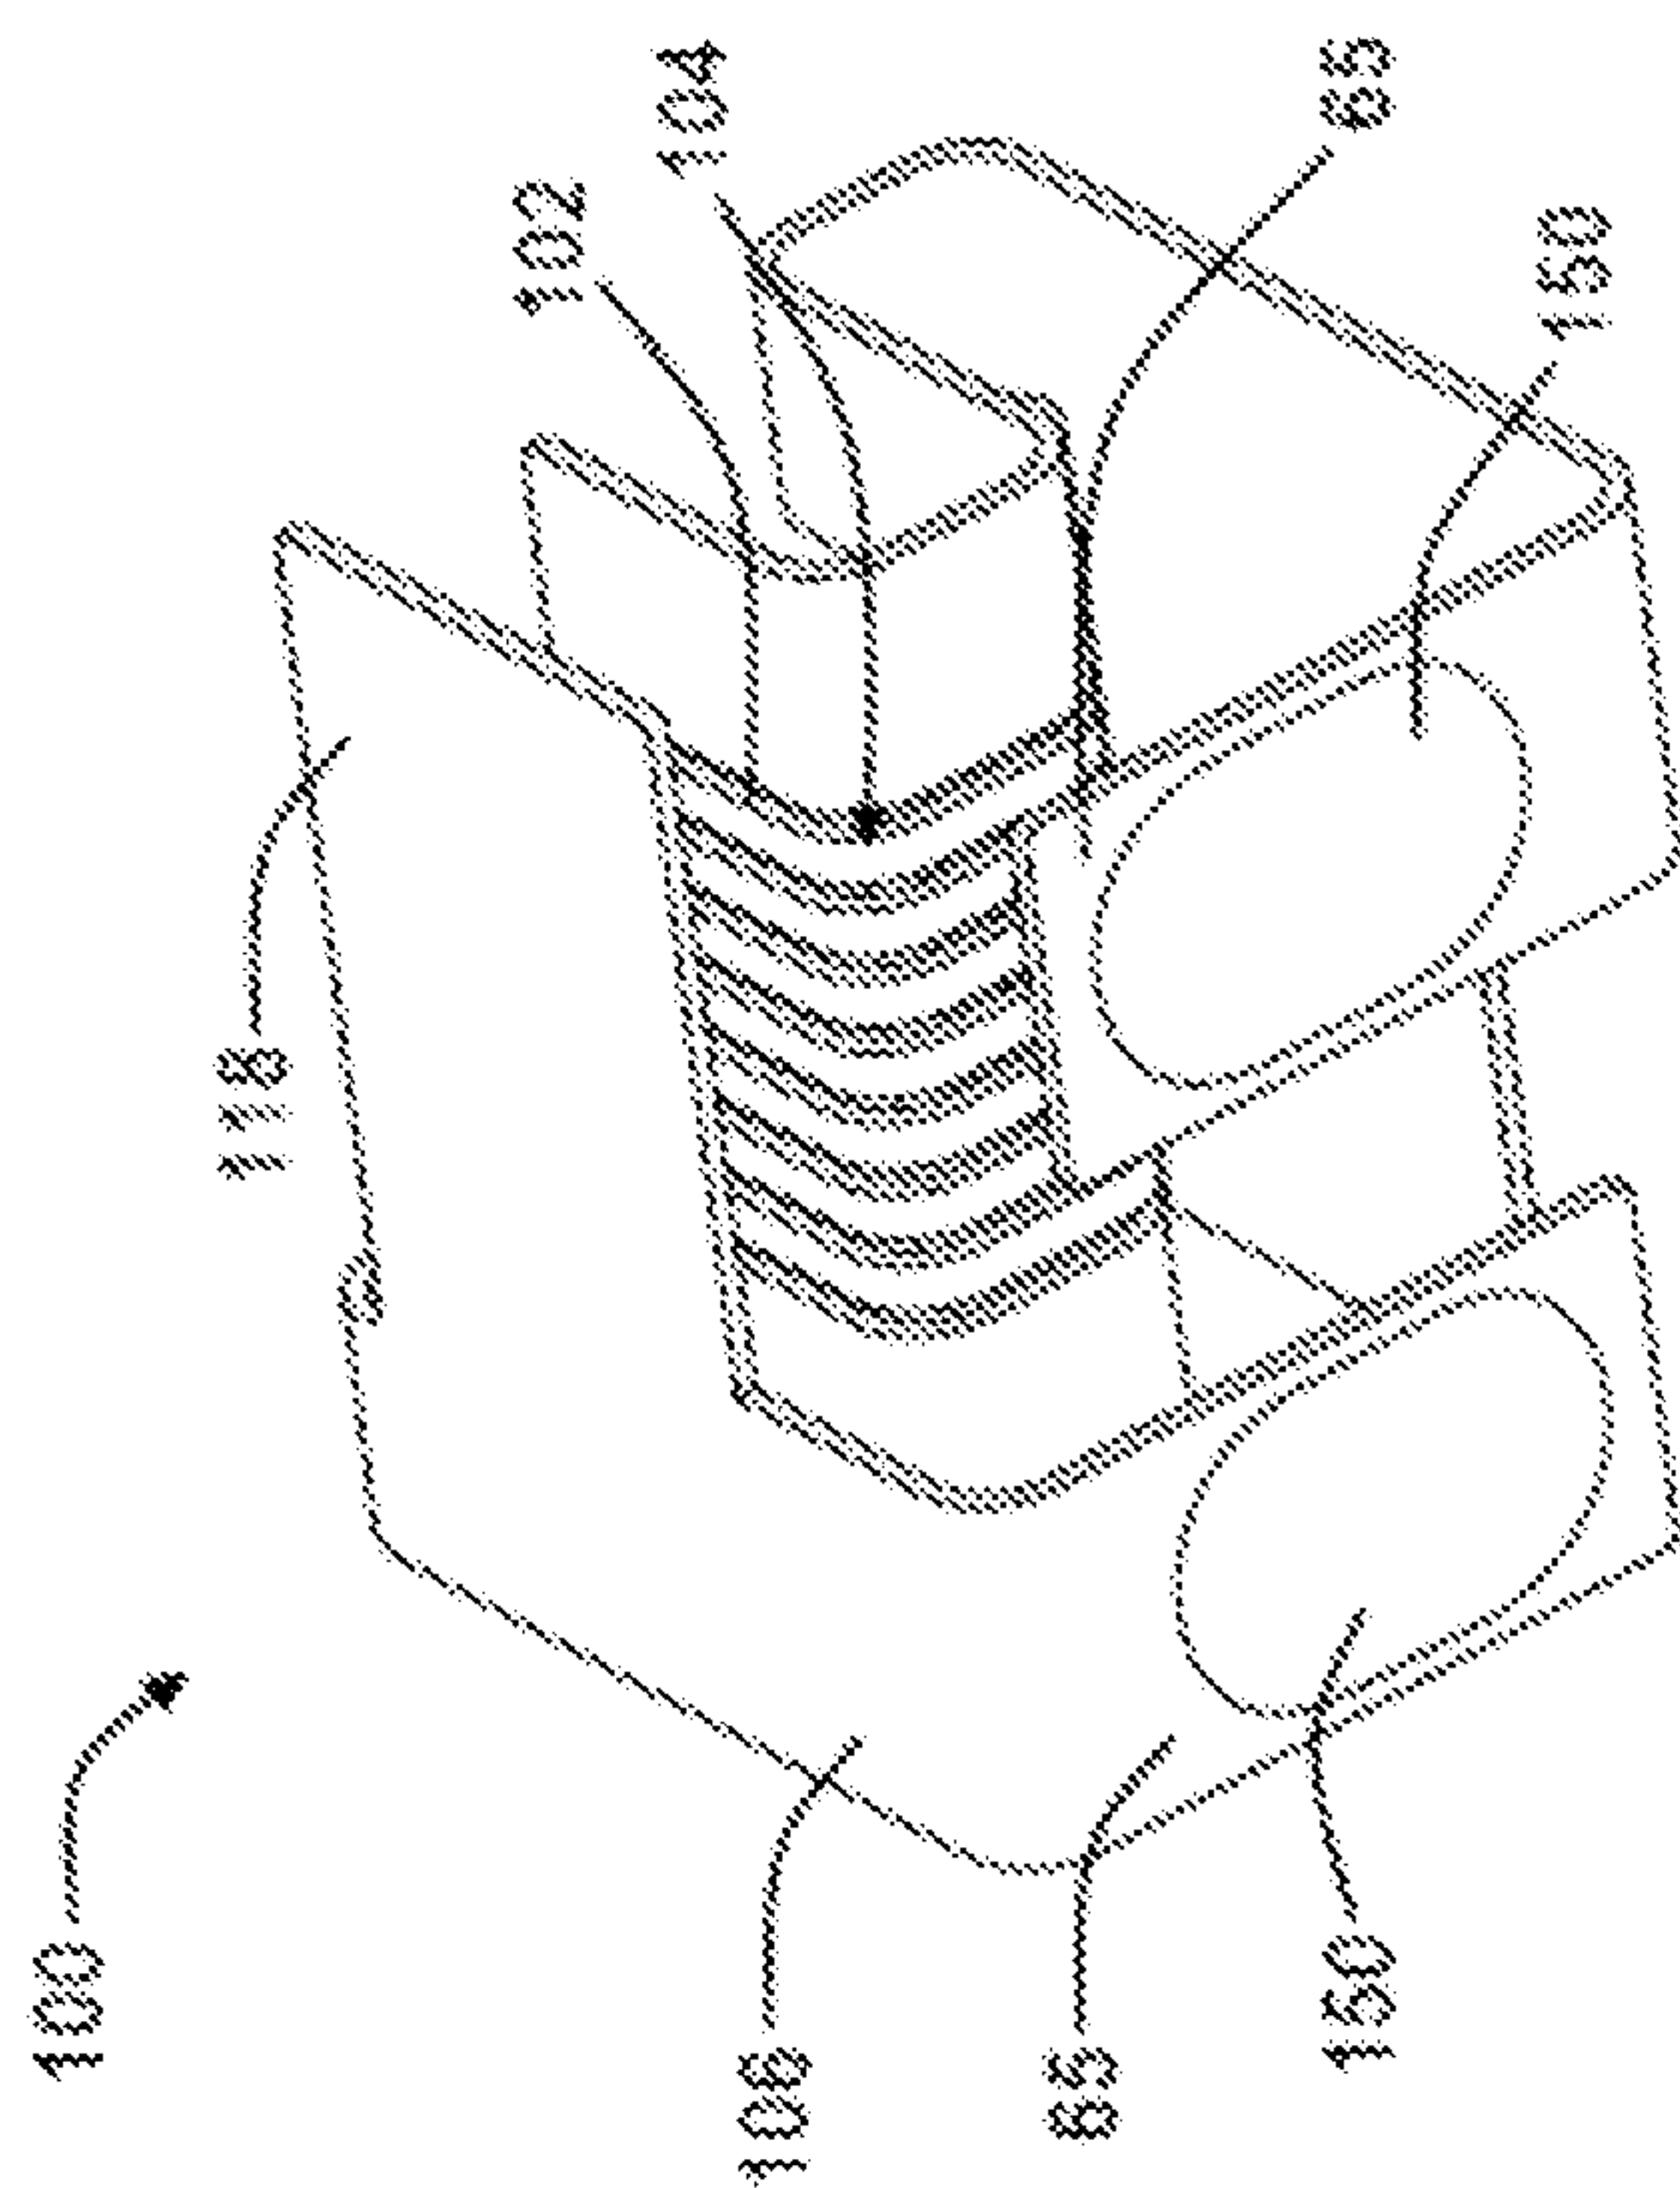


FIG. 37

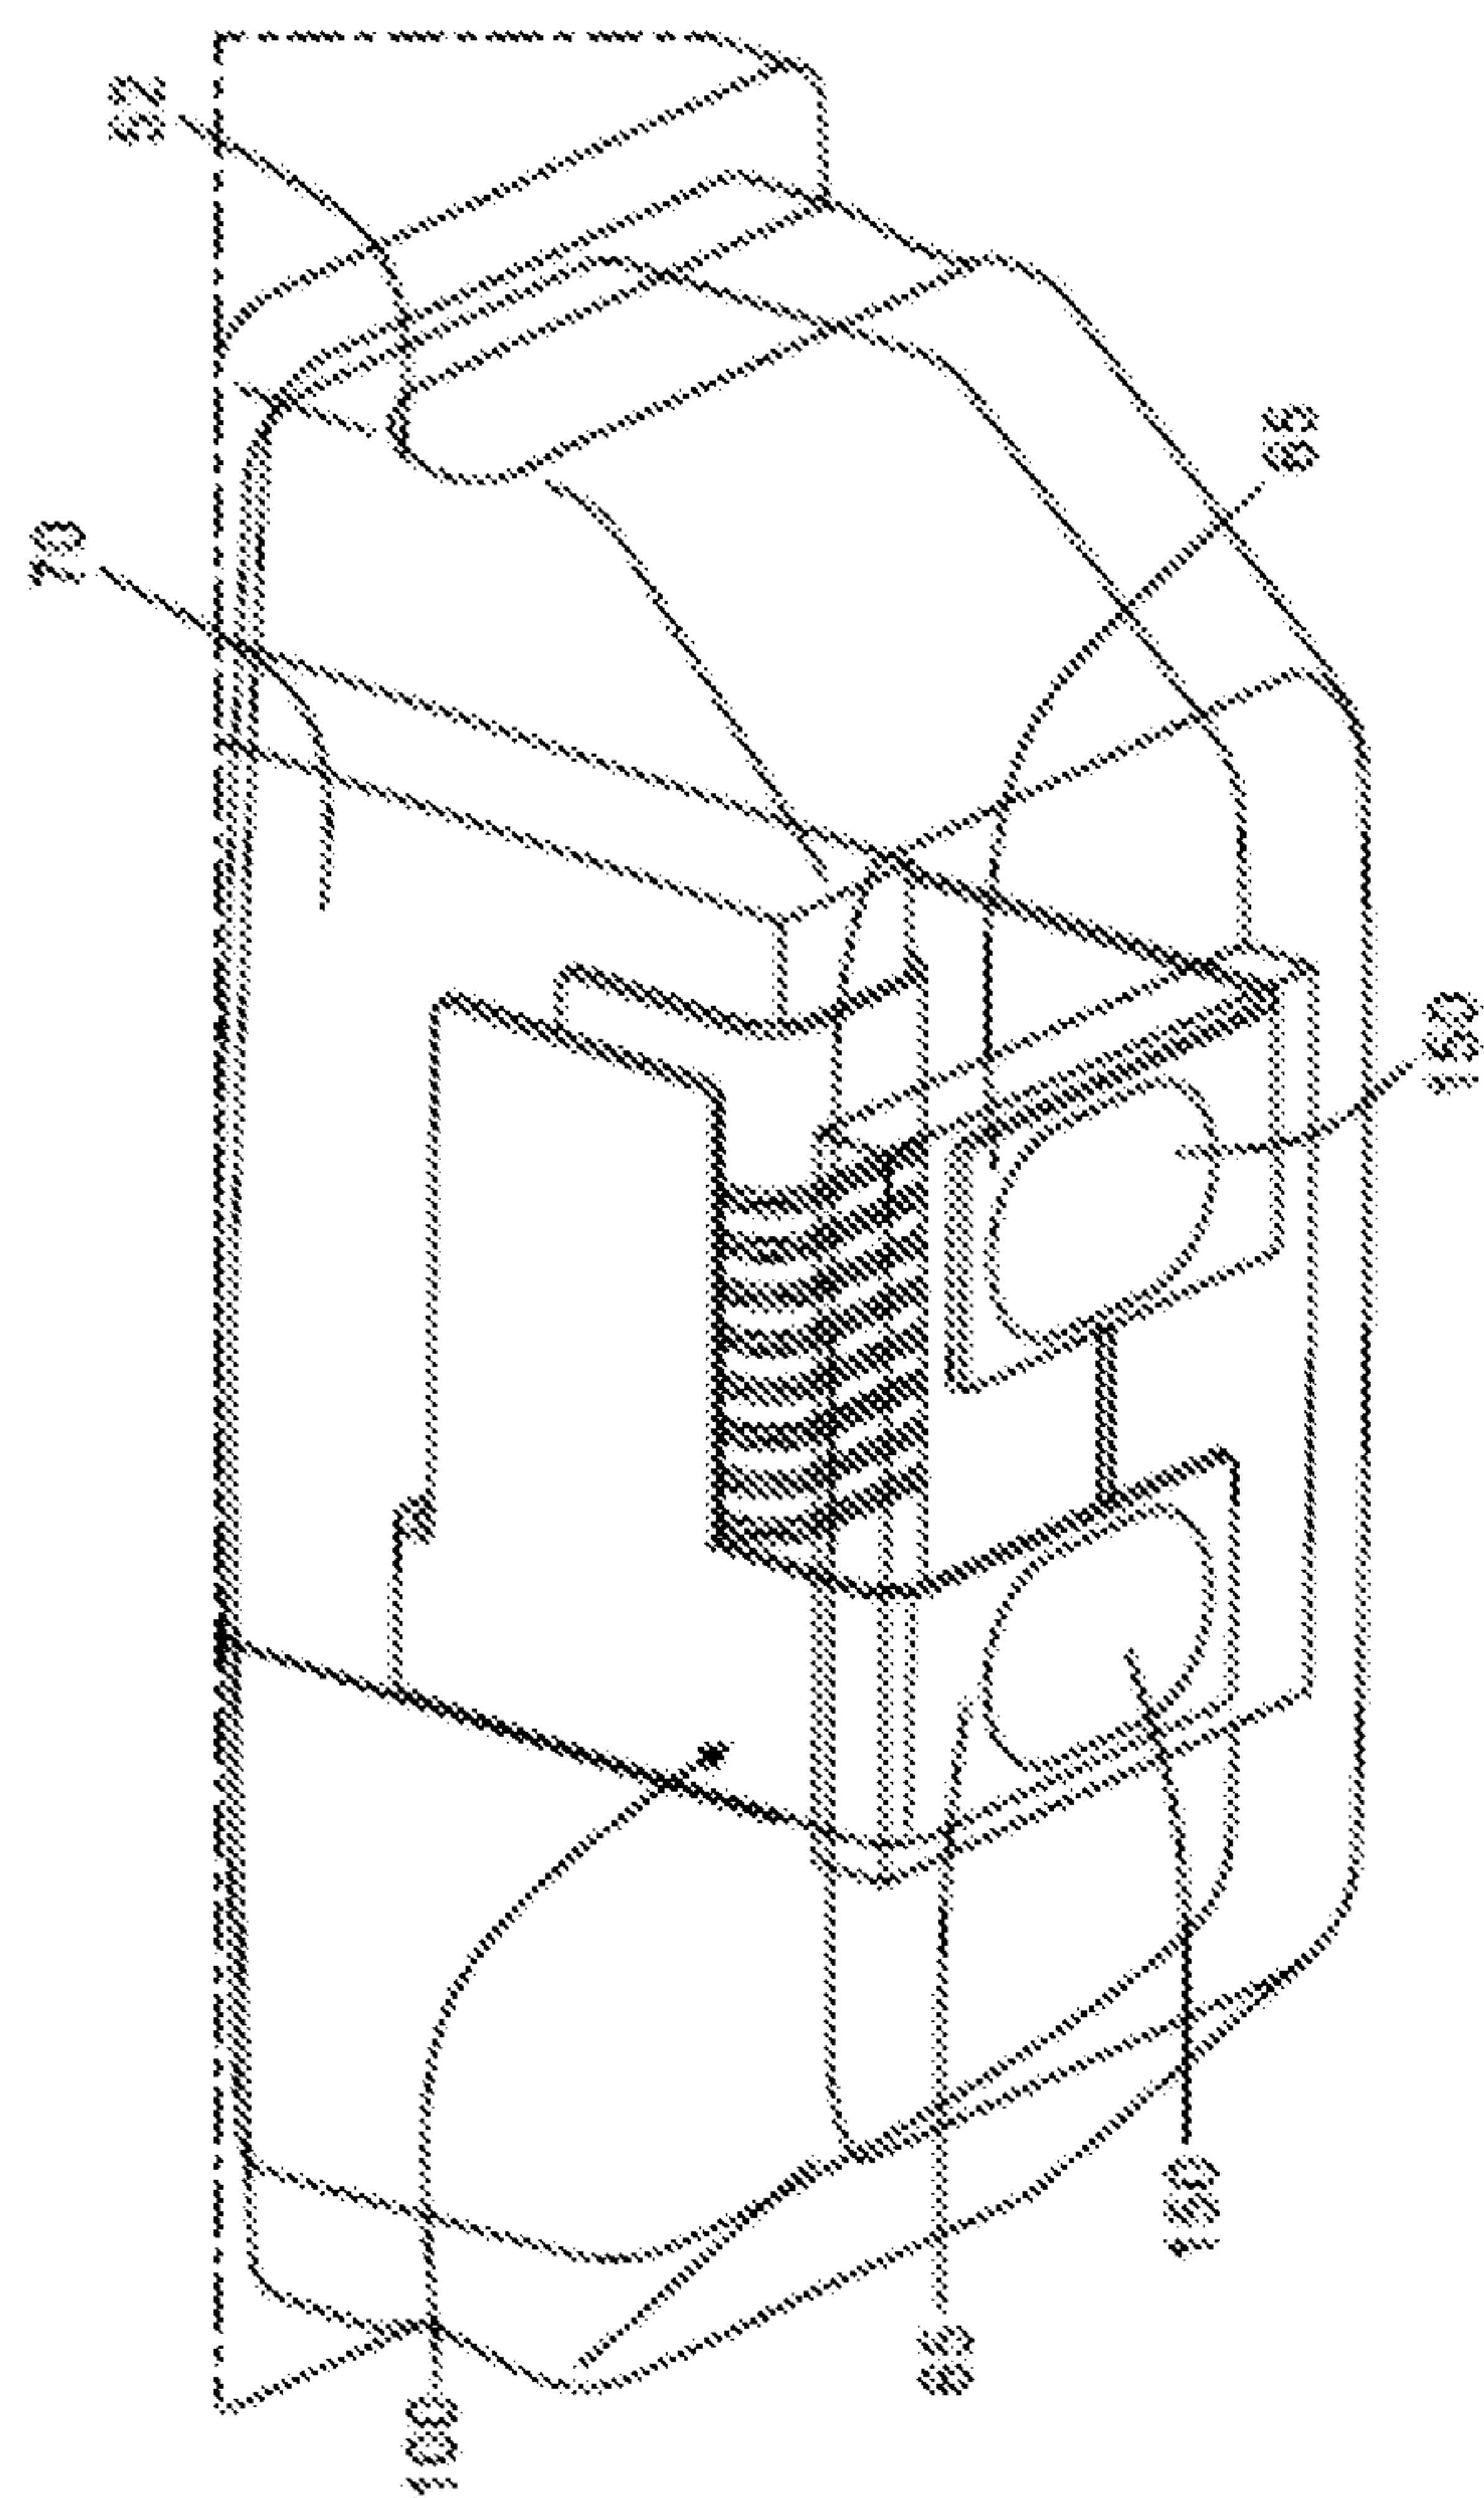
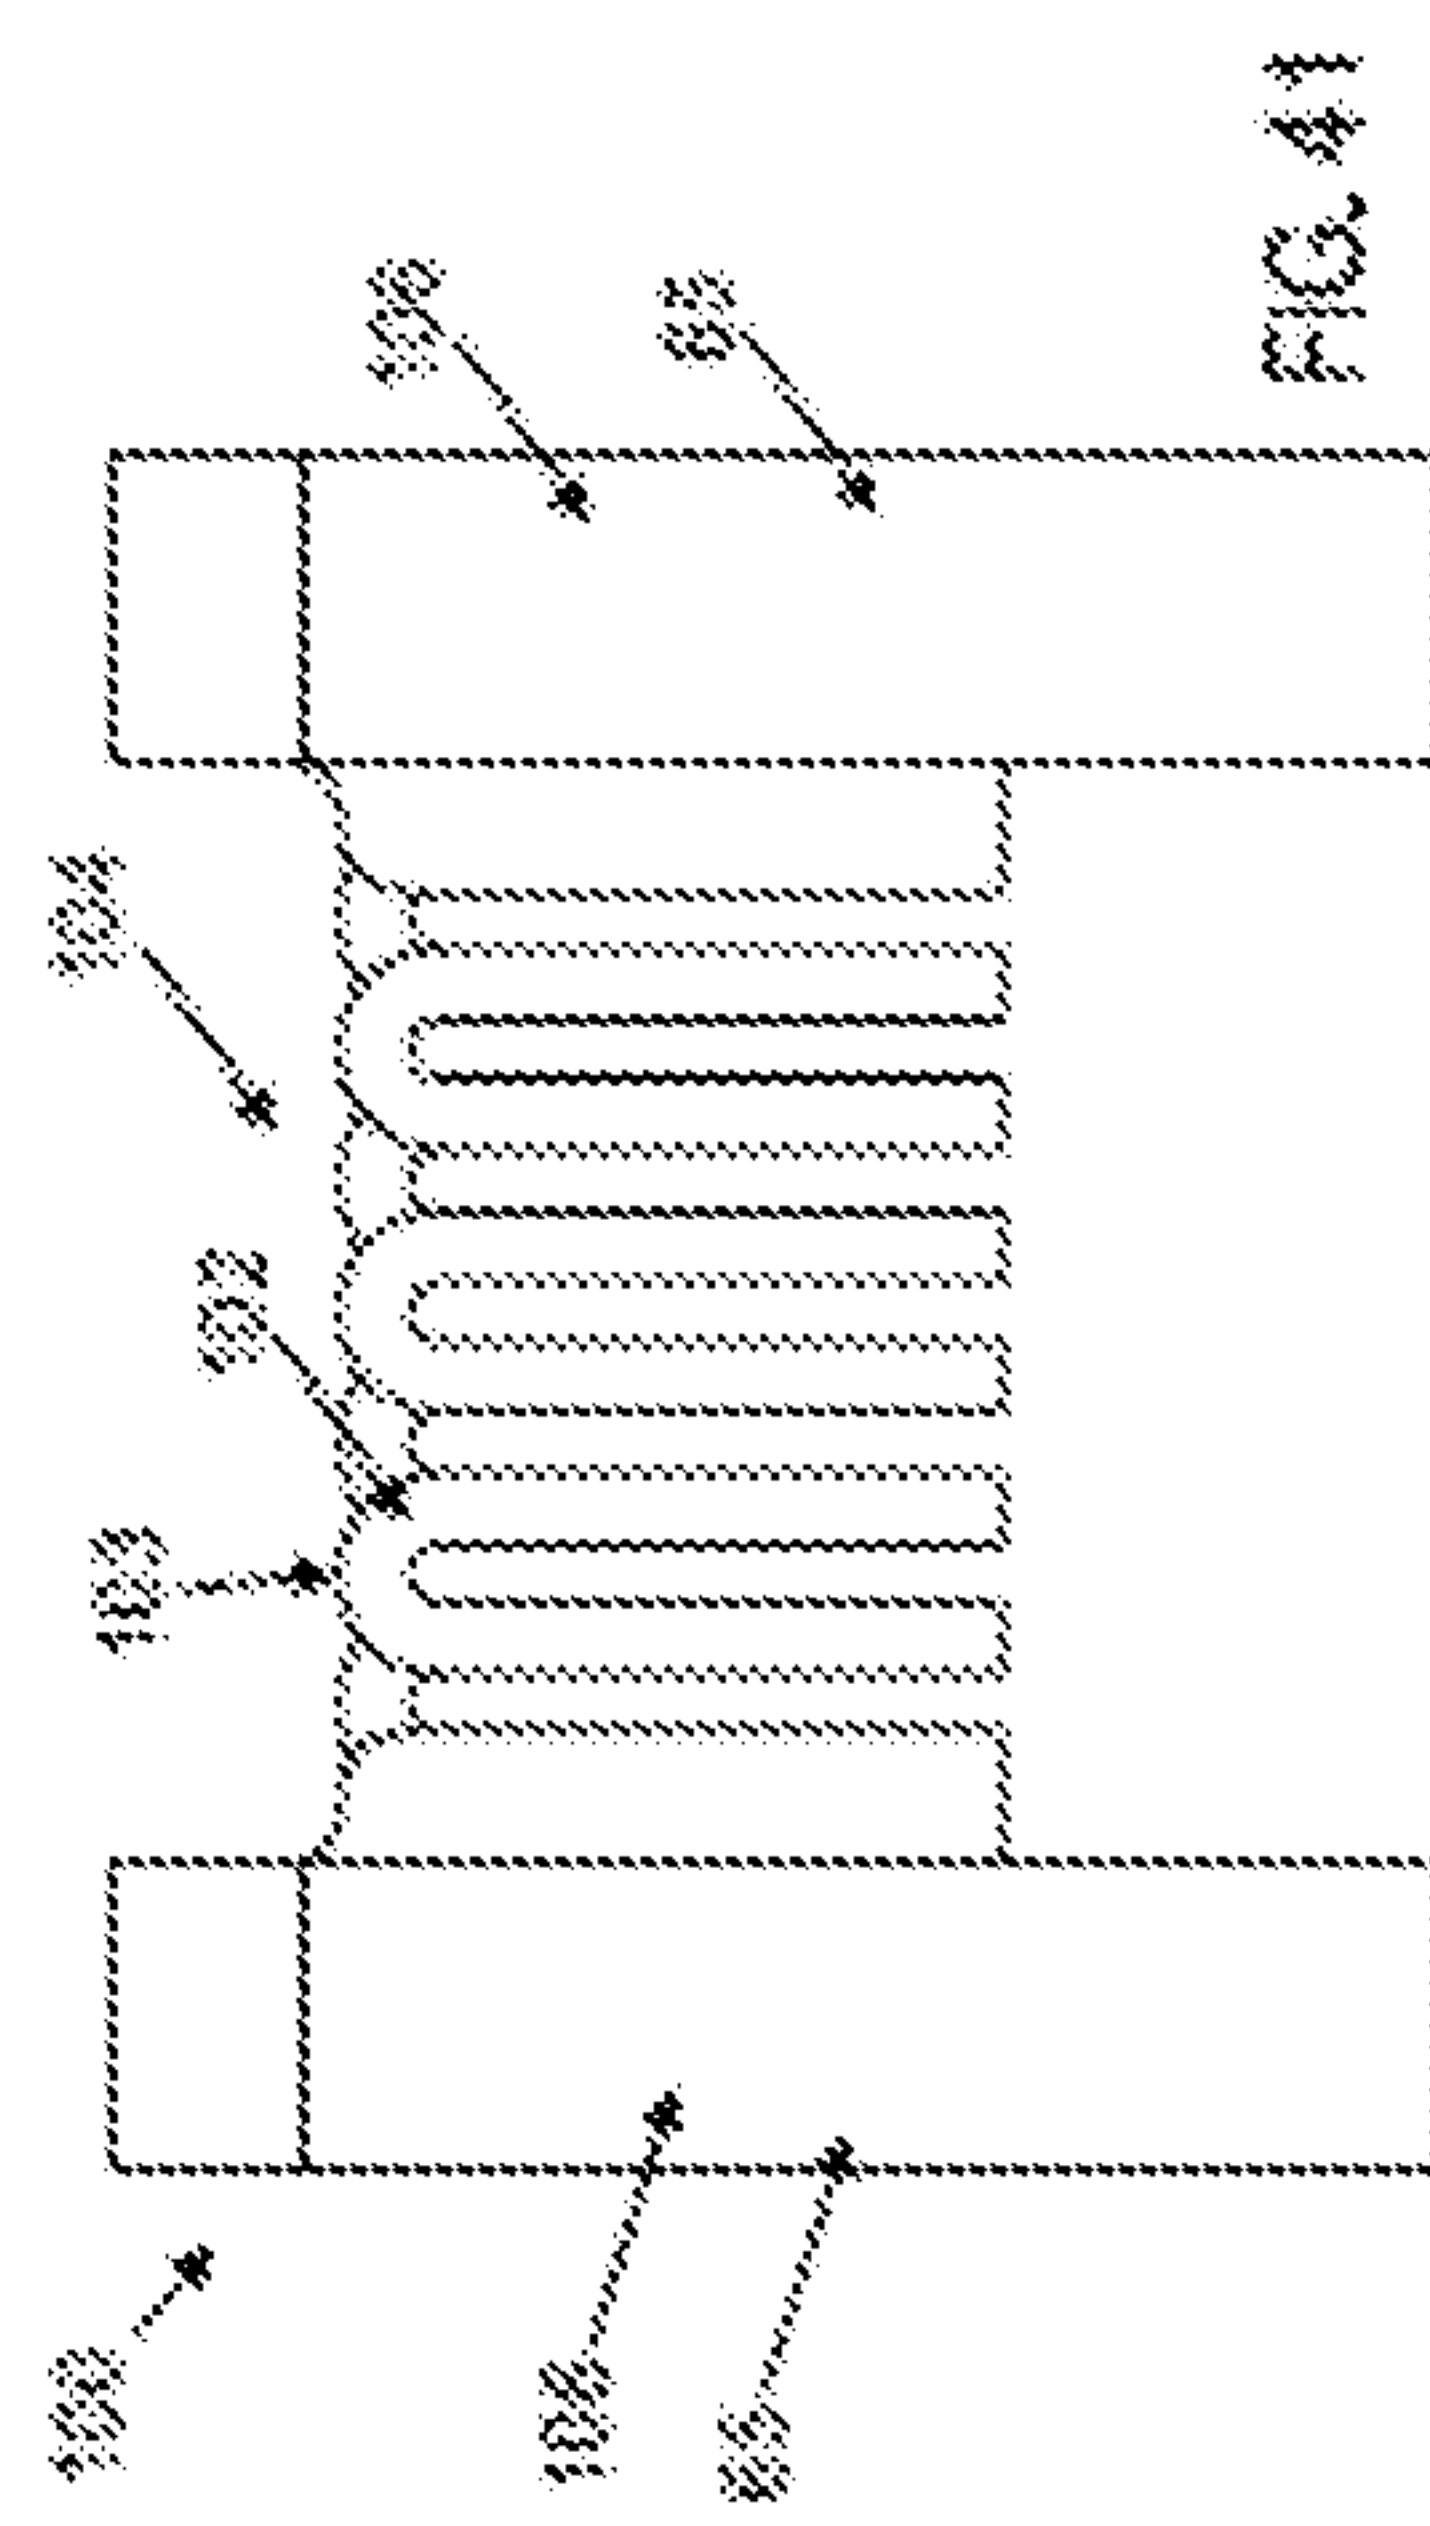
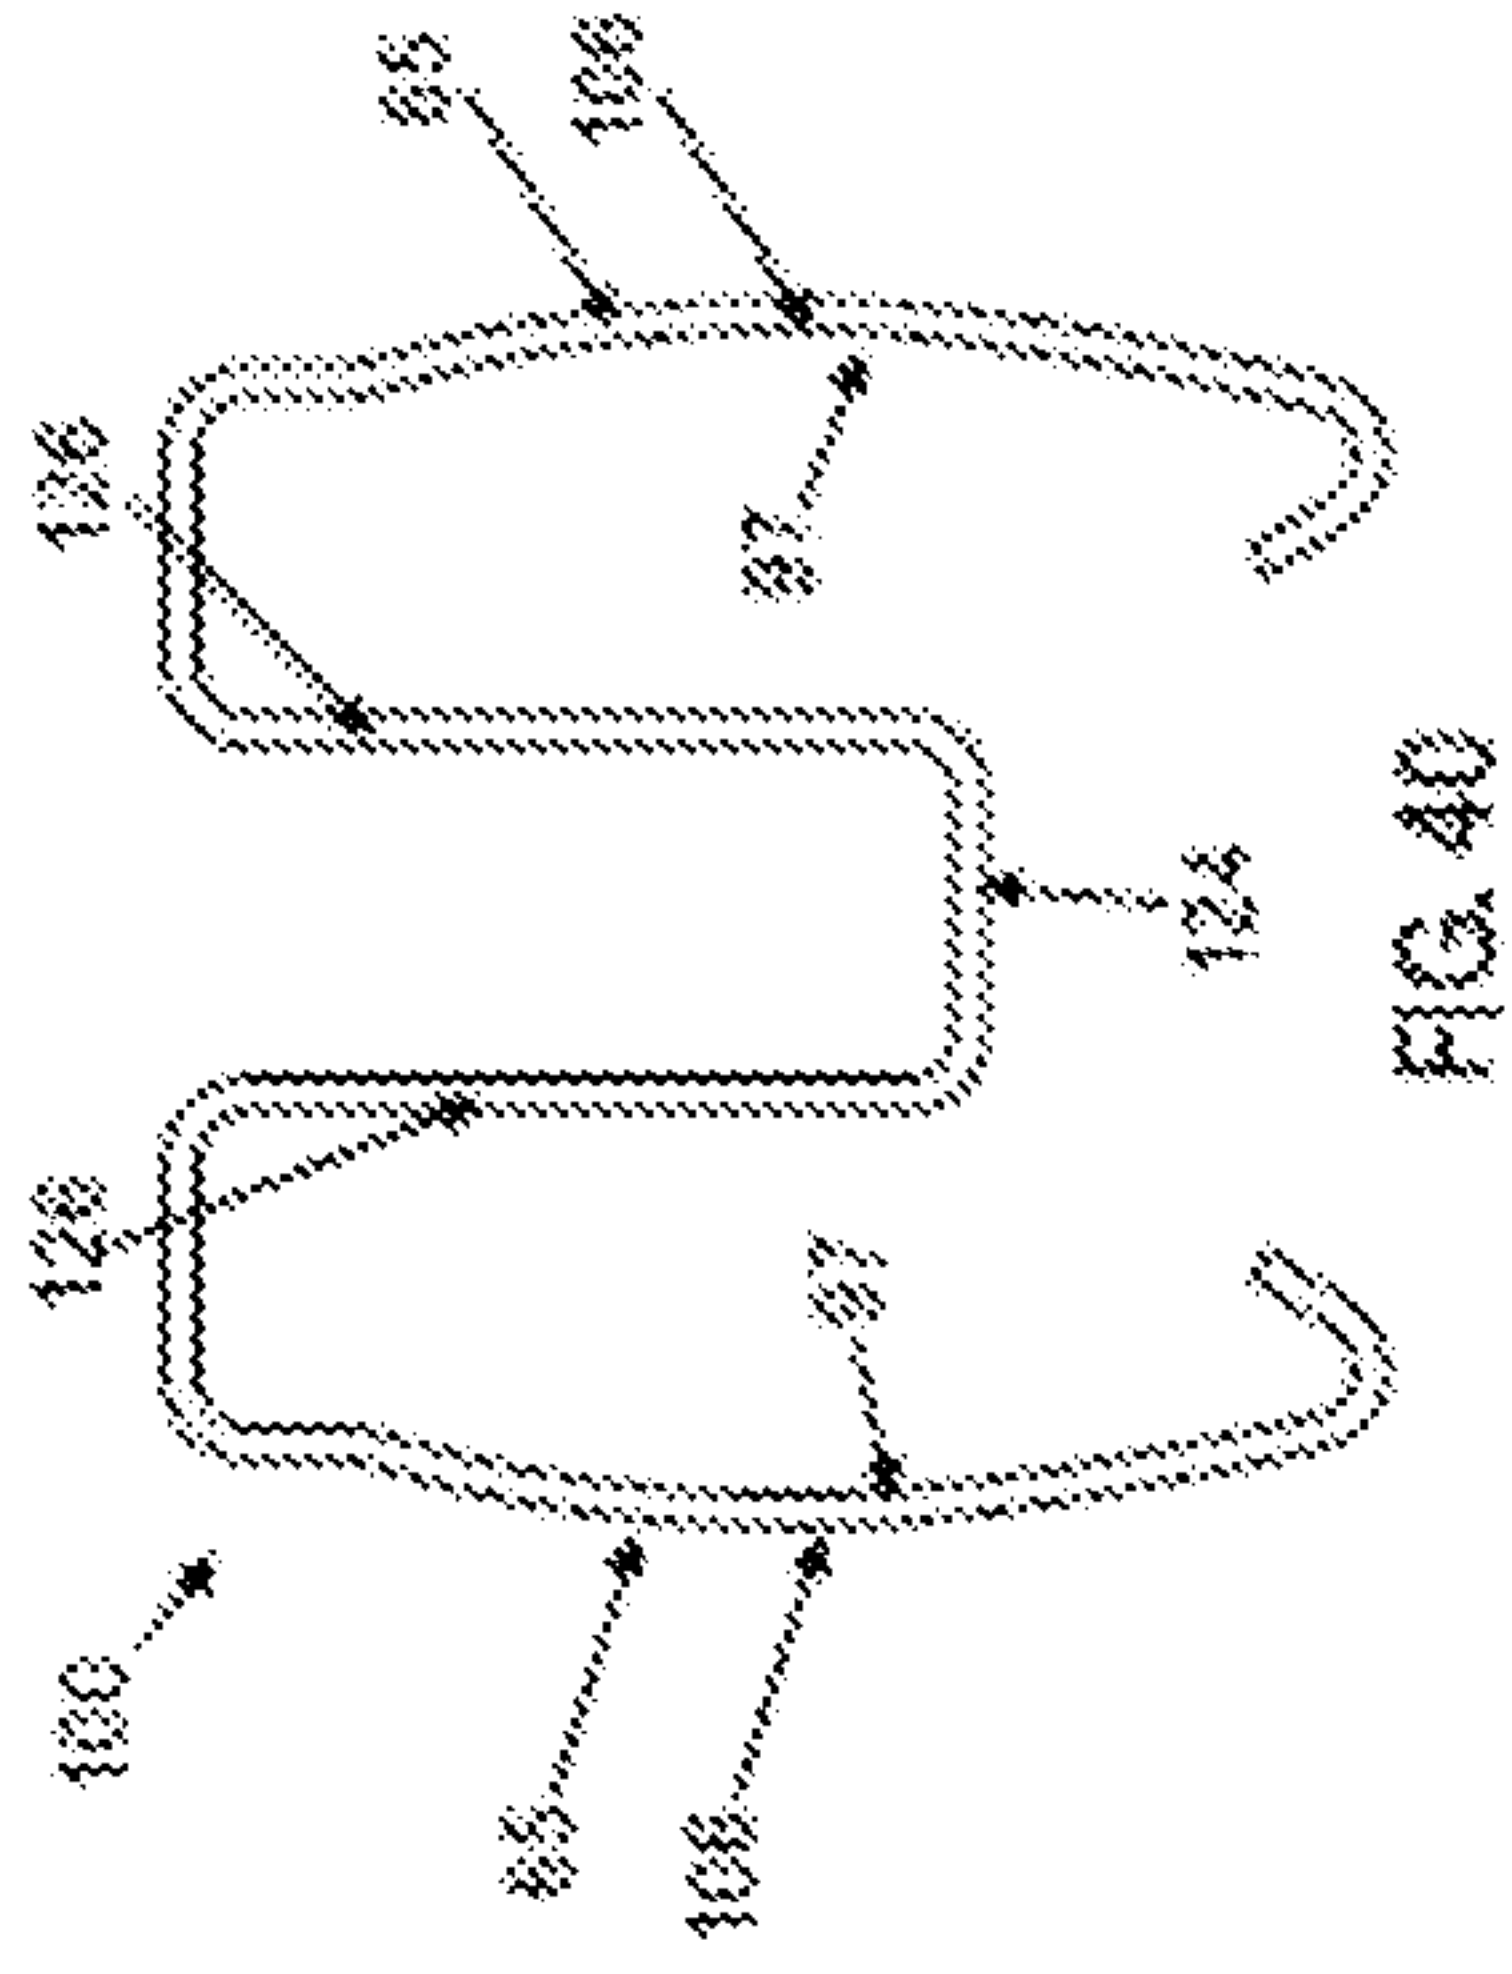
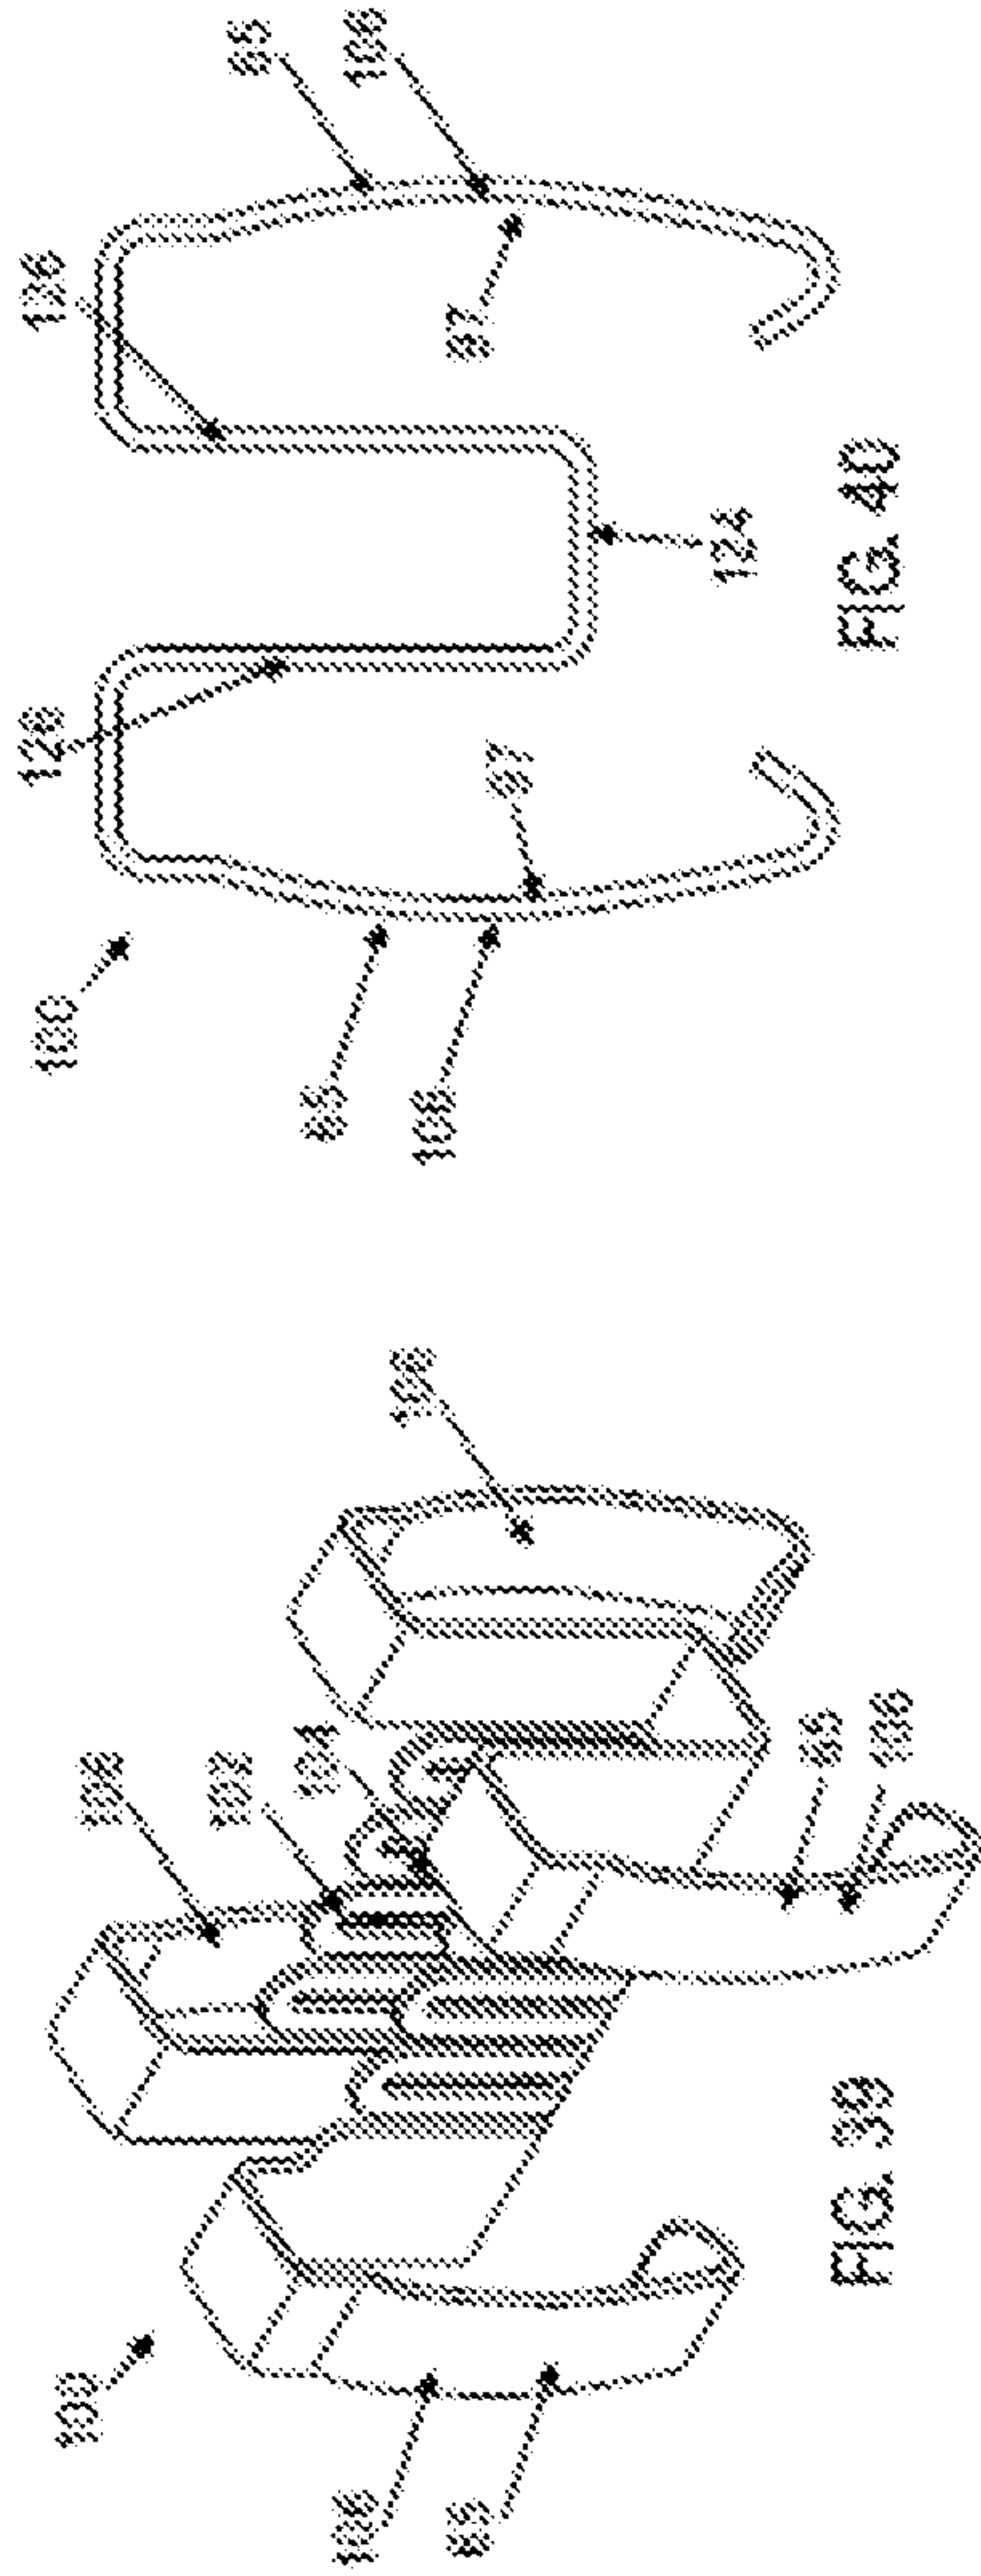
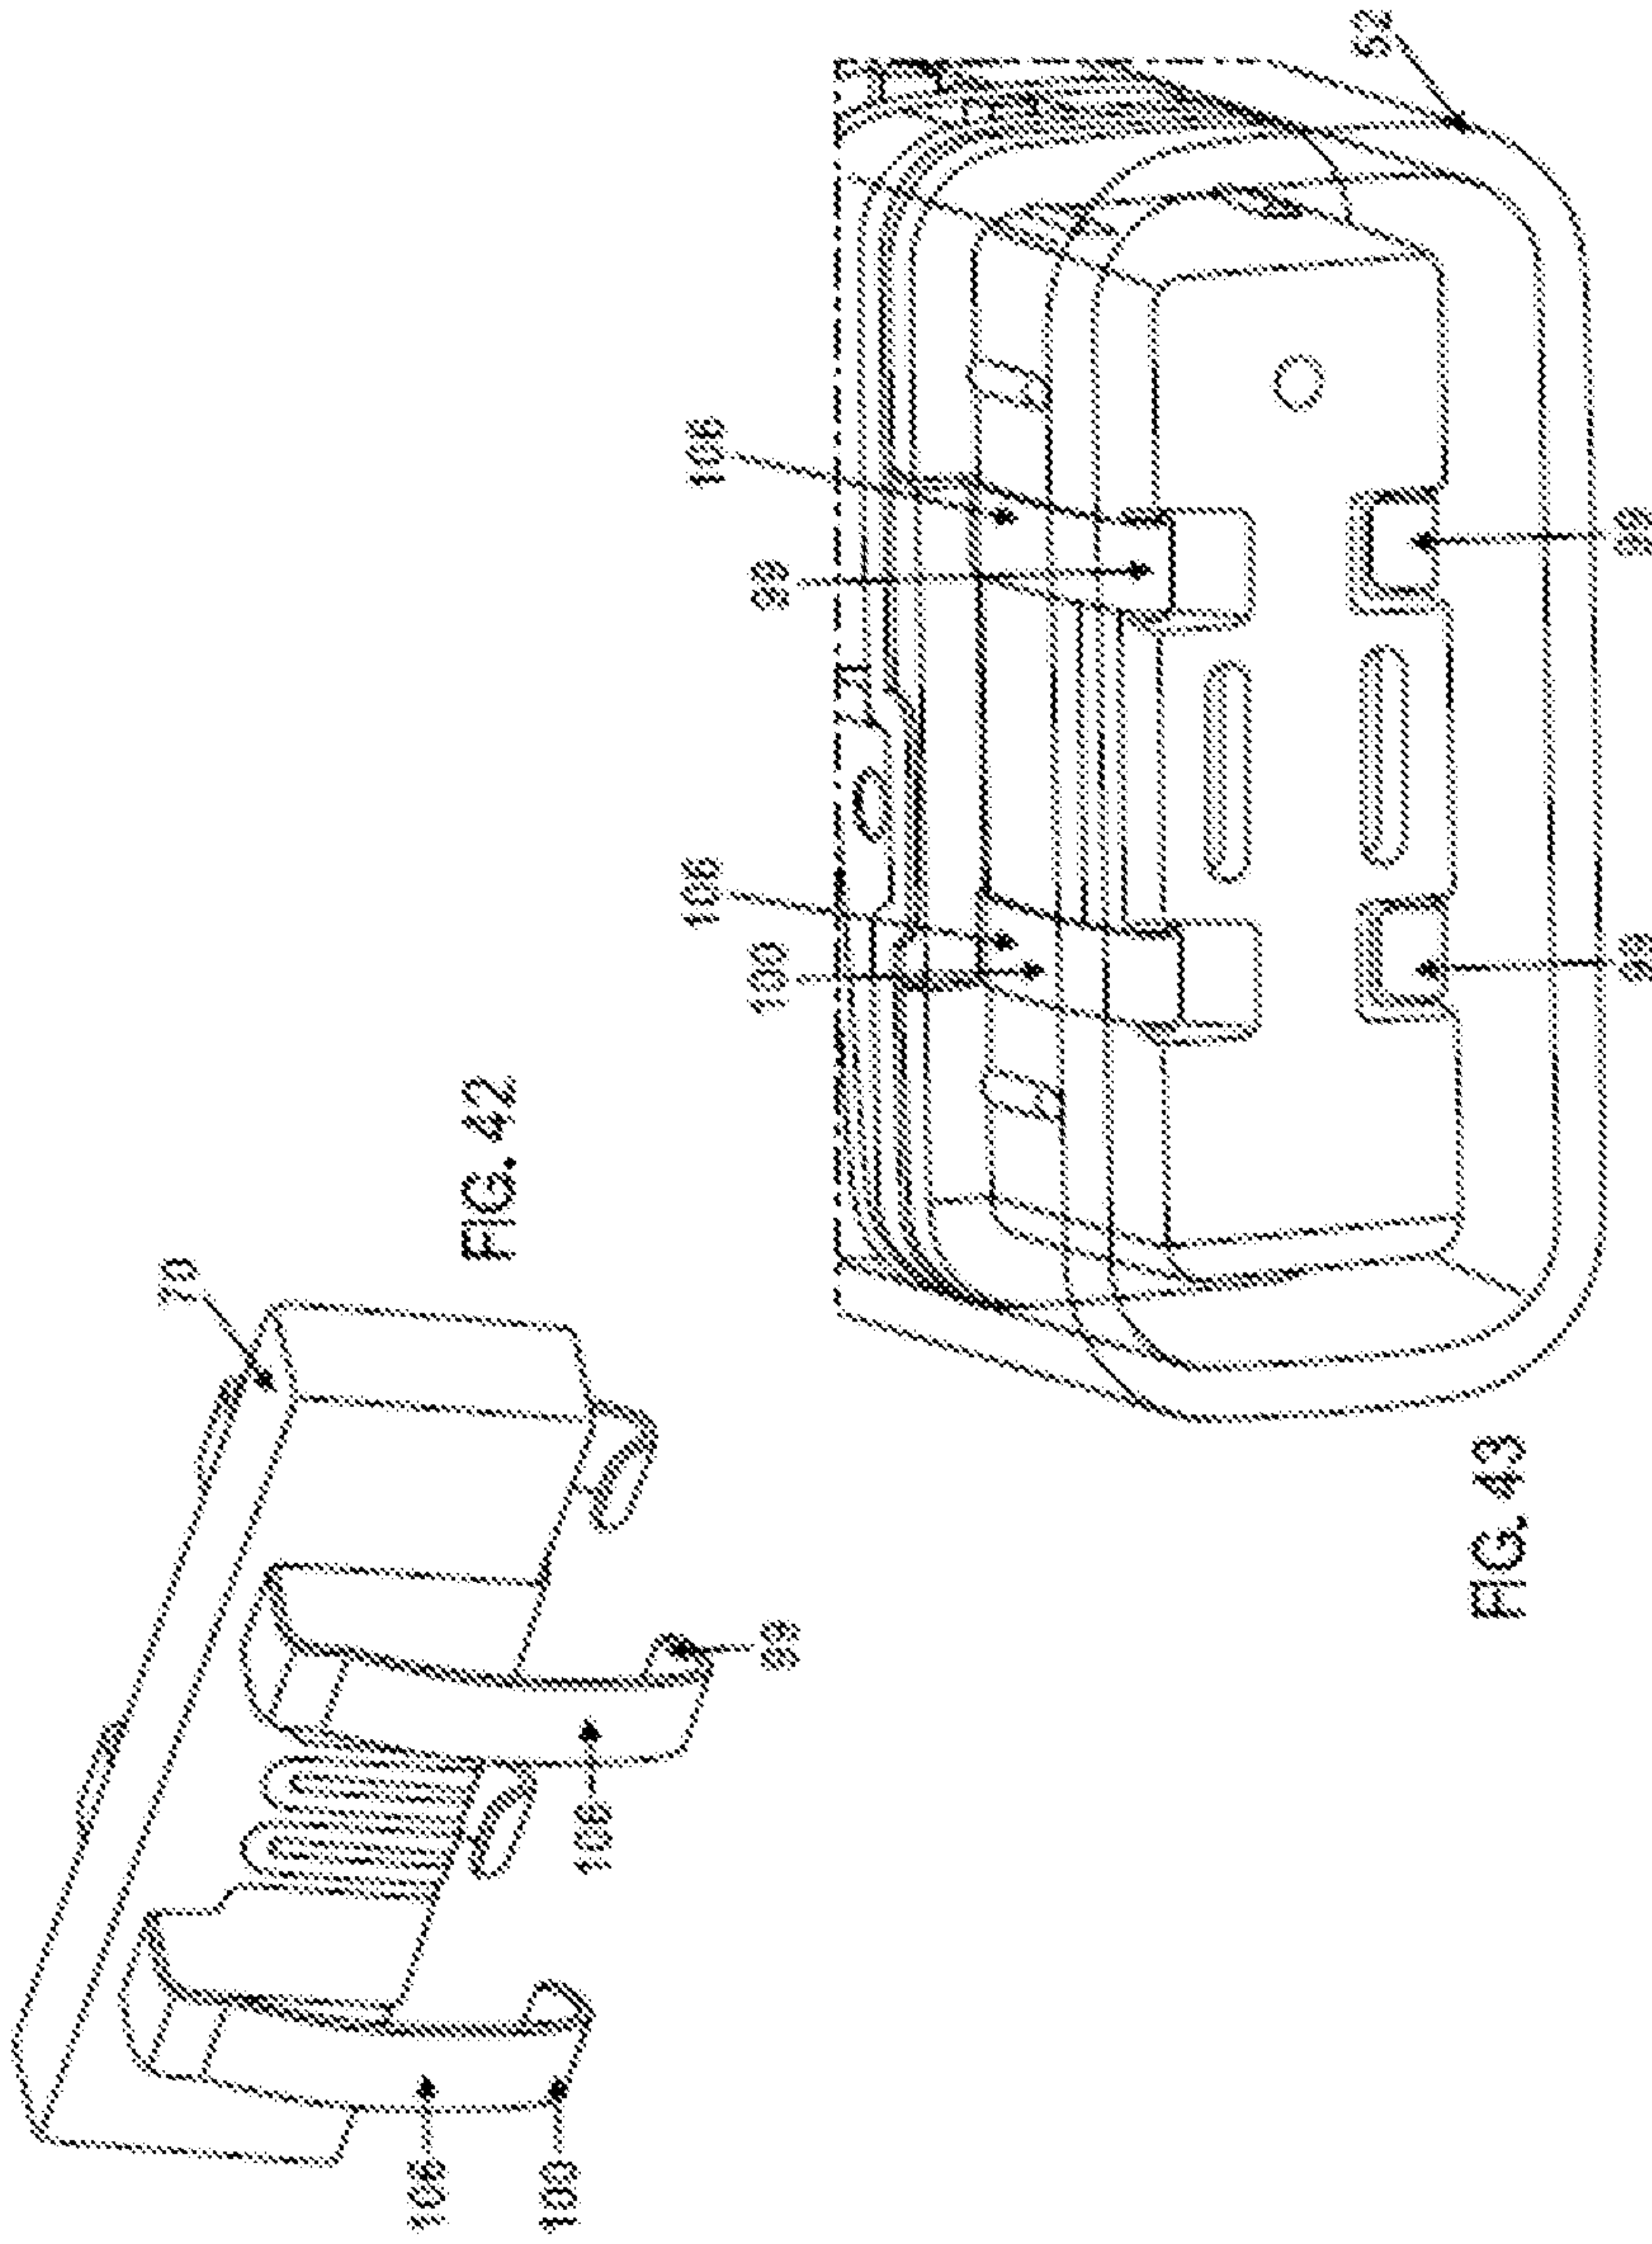
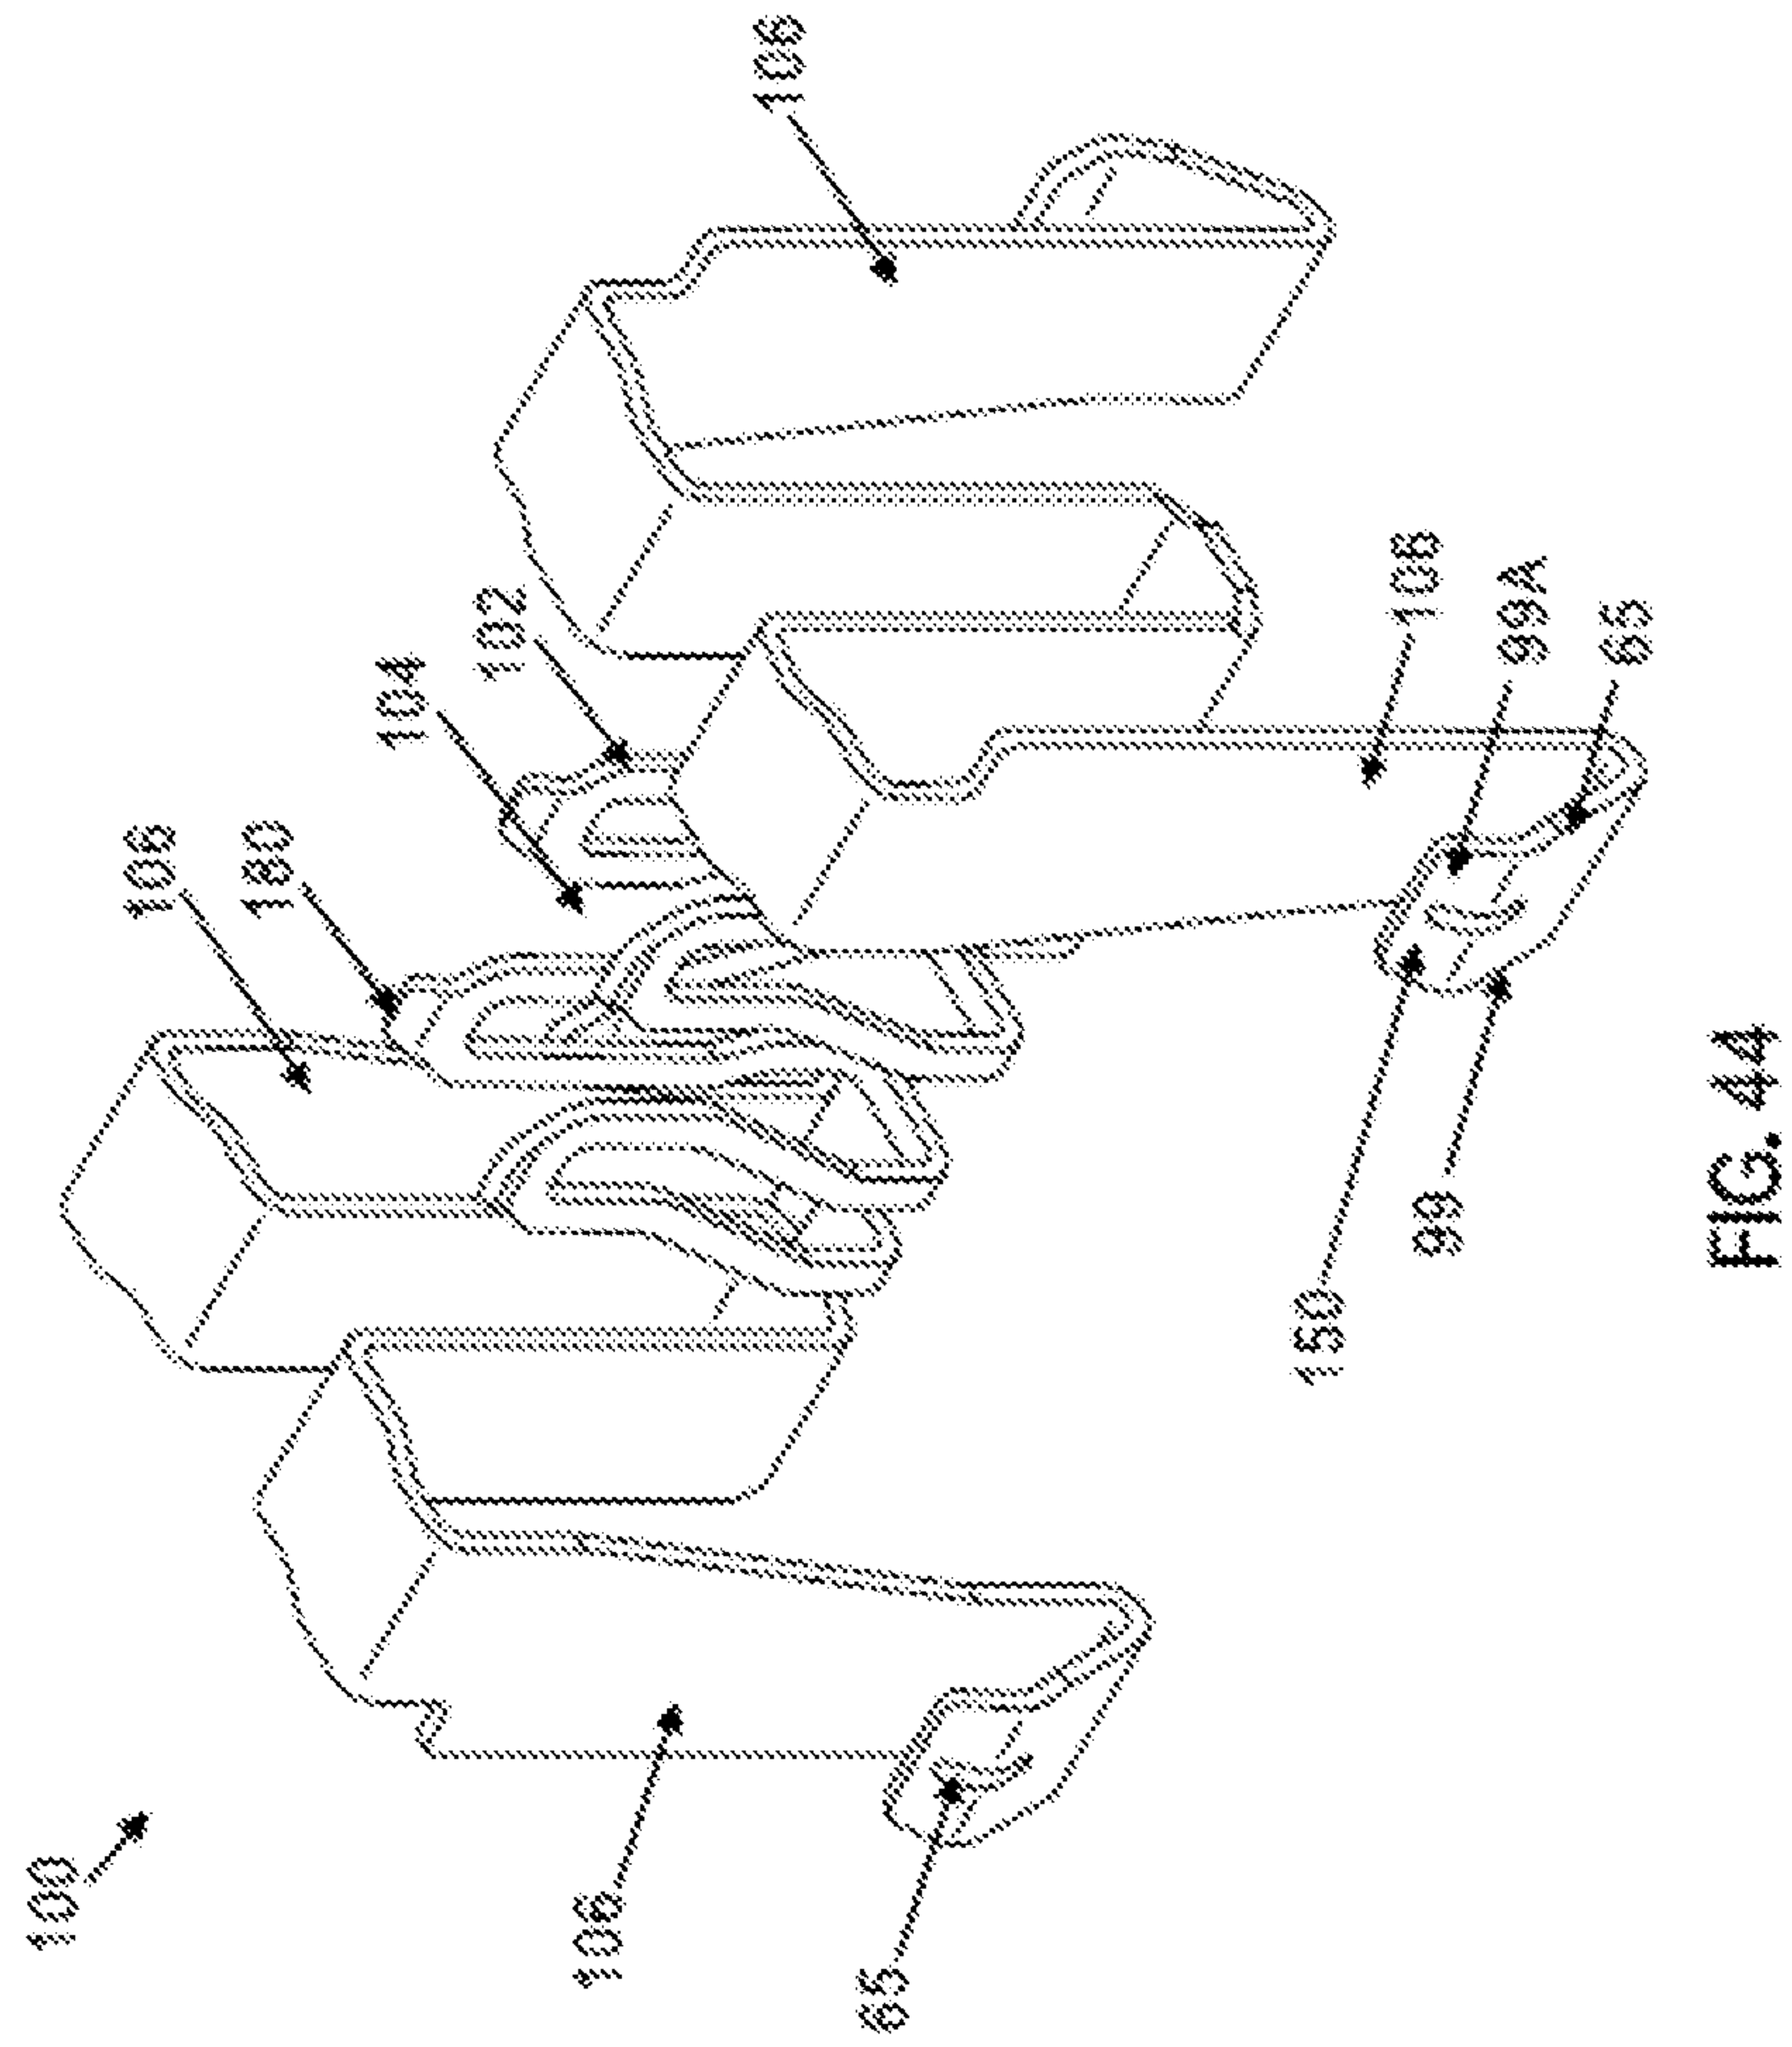


FIG. 38







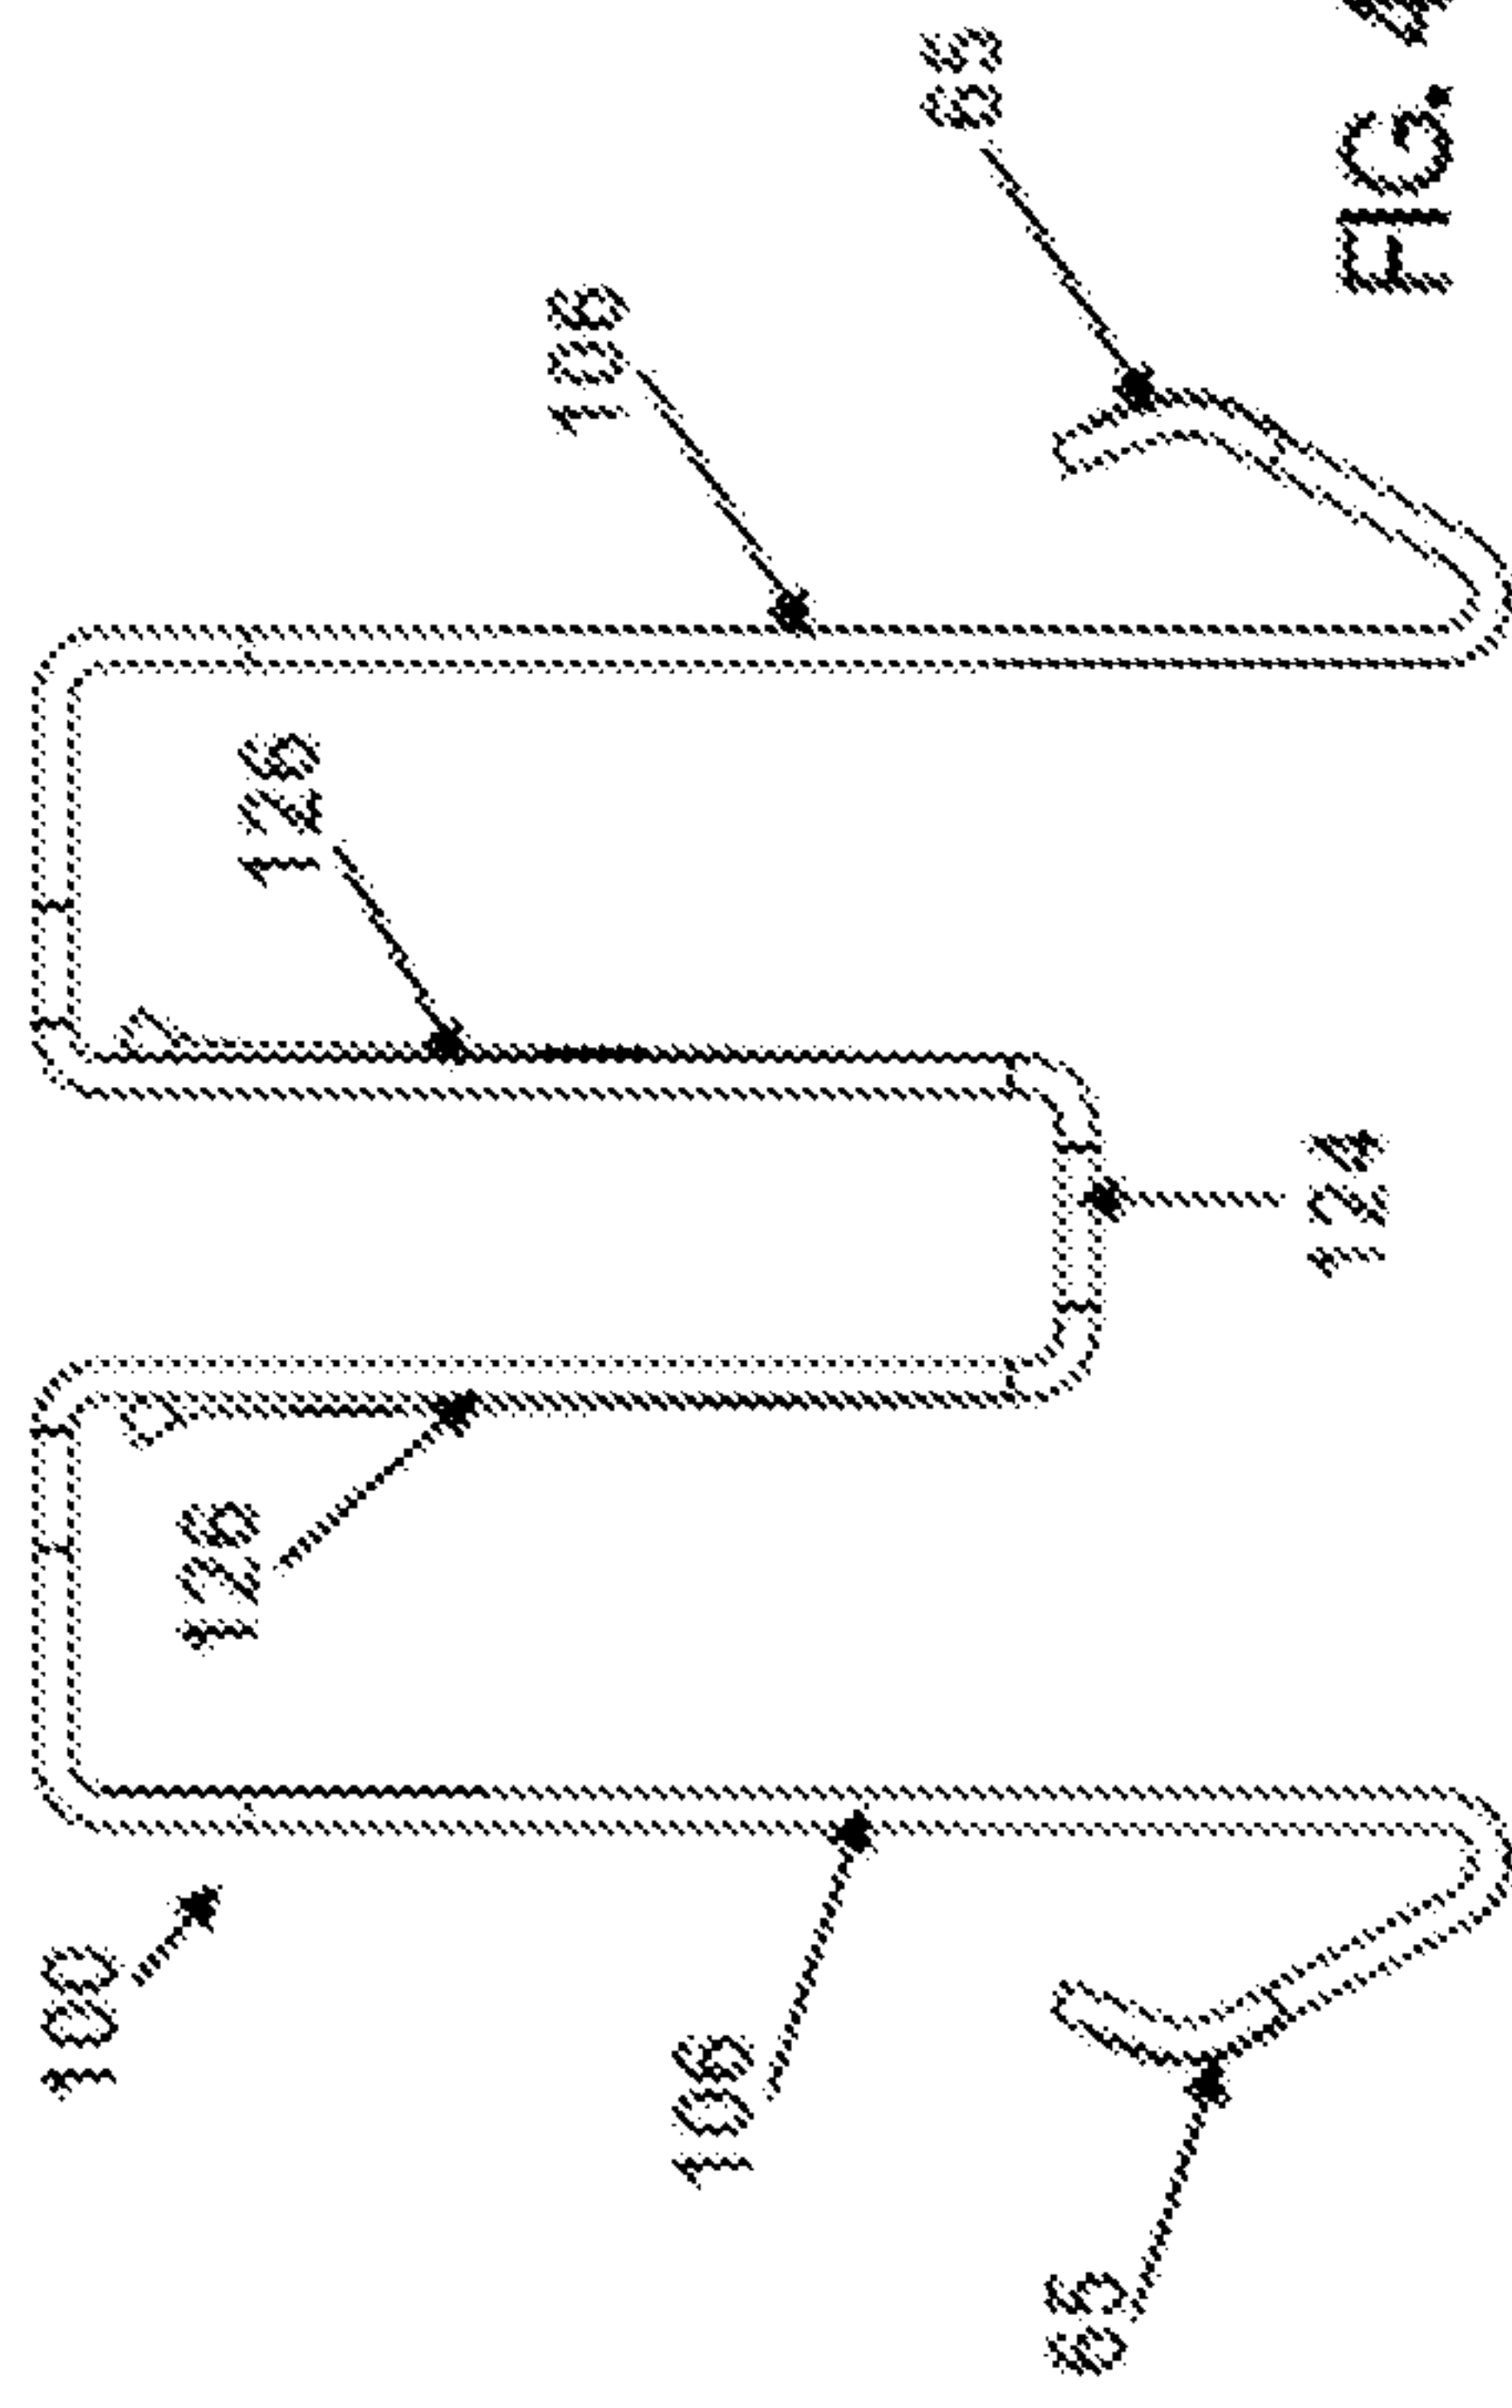


FIG. 45

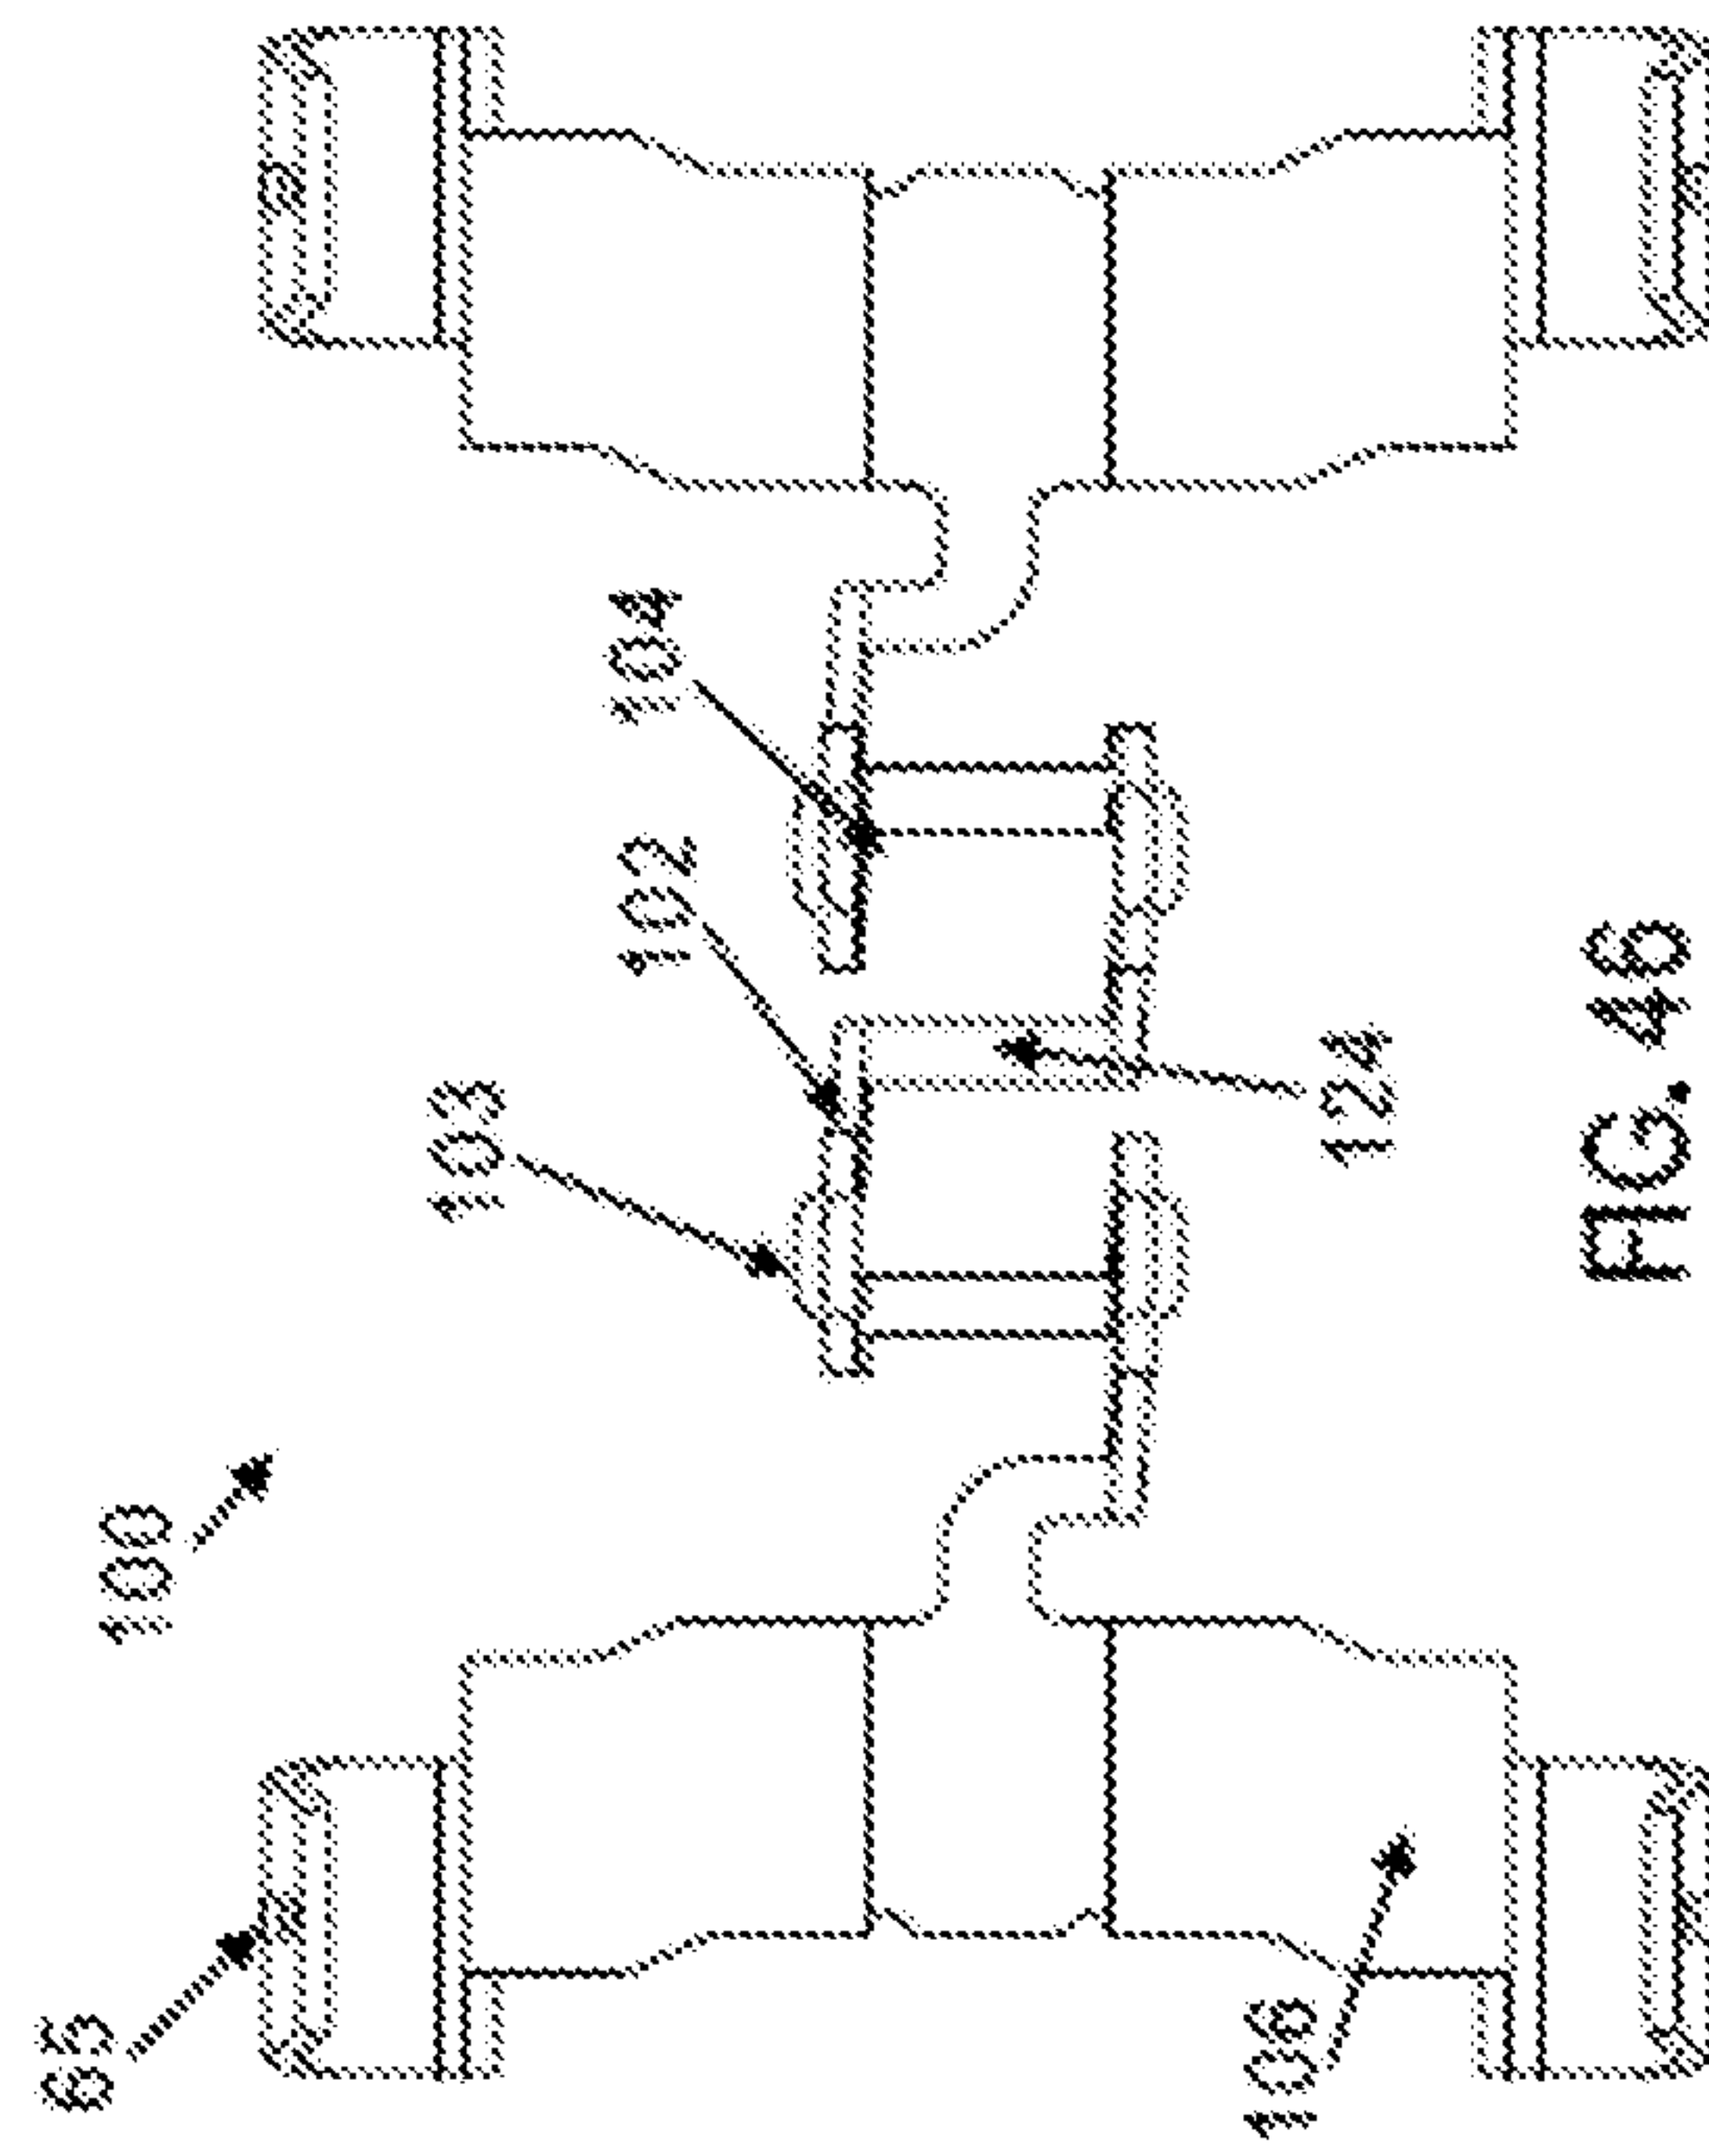


FIG. 46

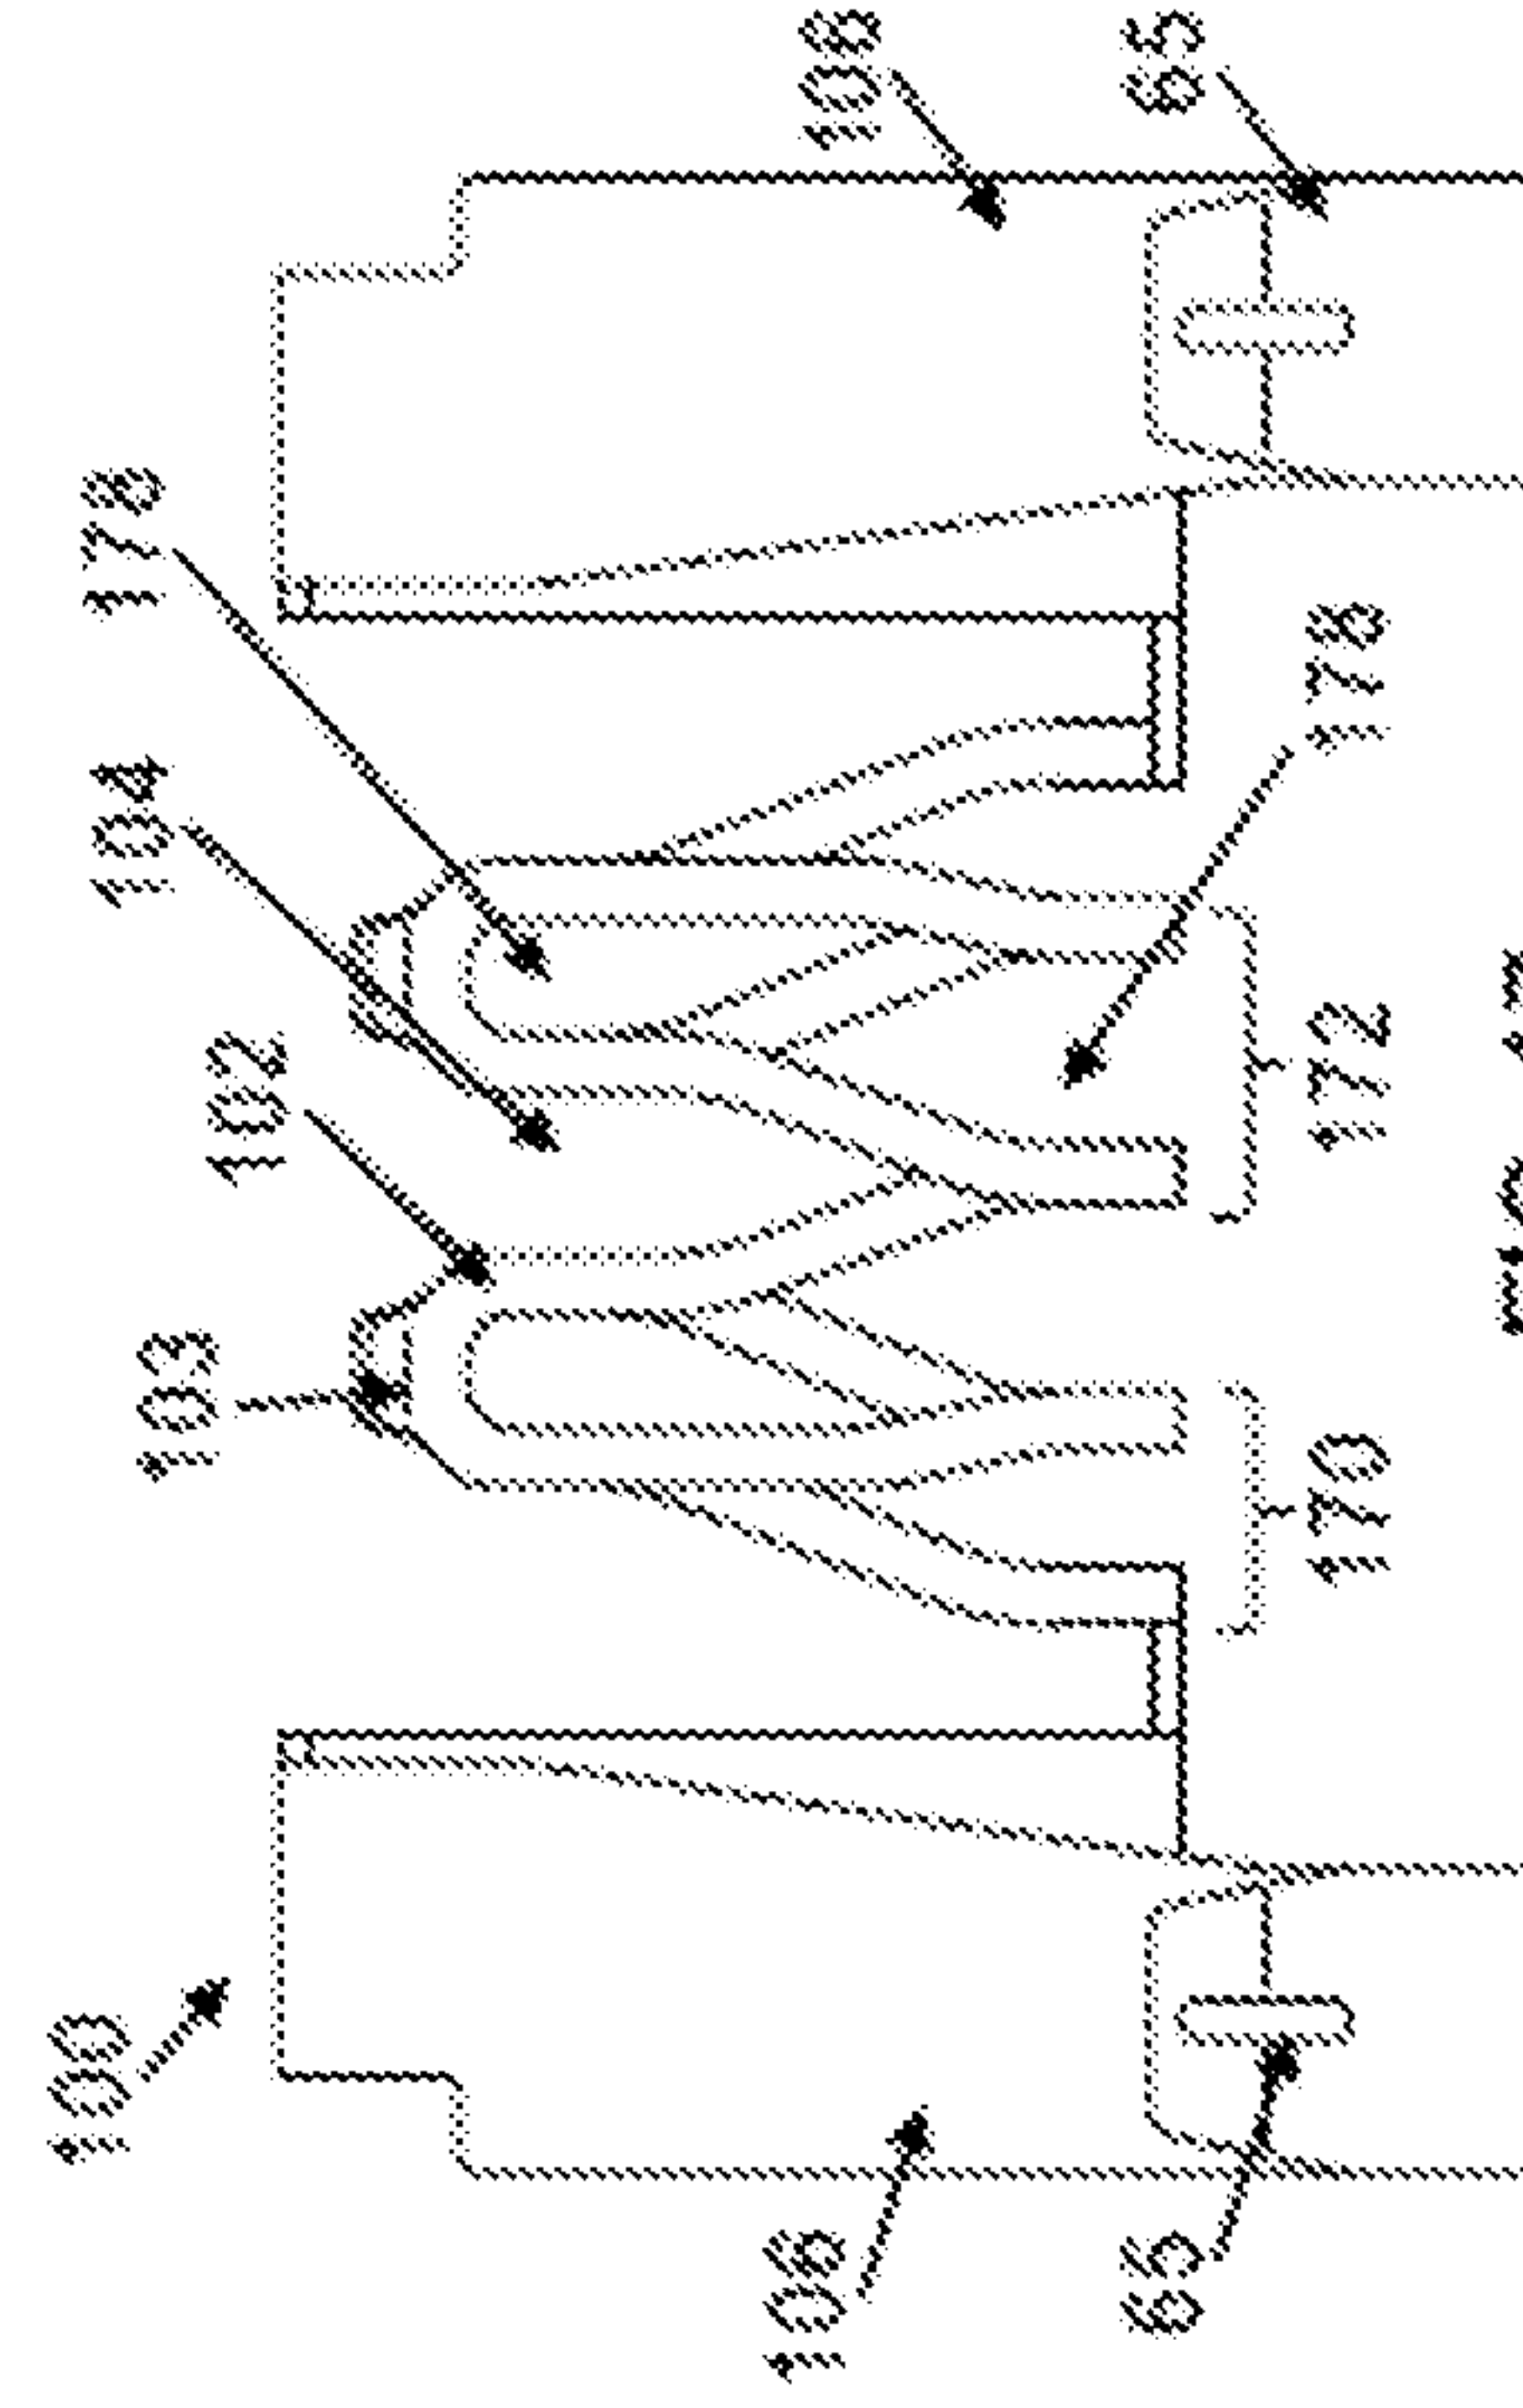


FIG. 47

102

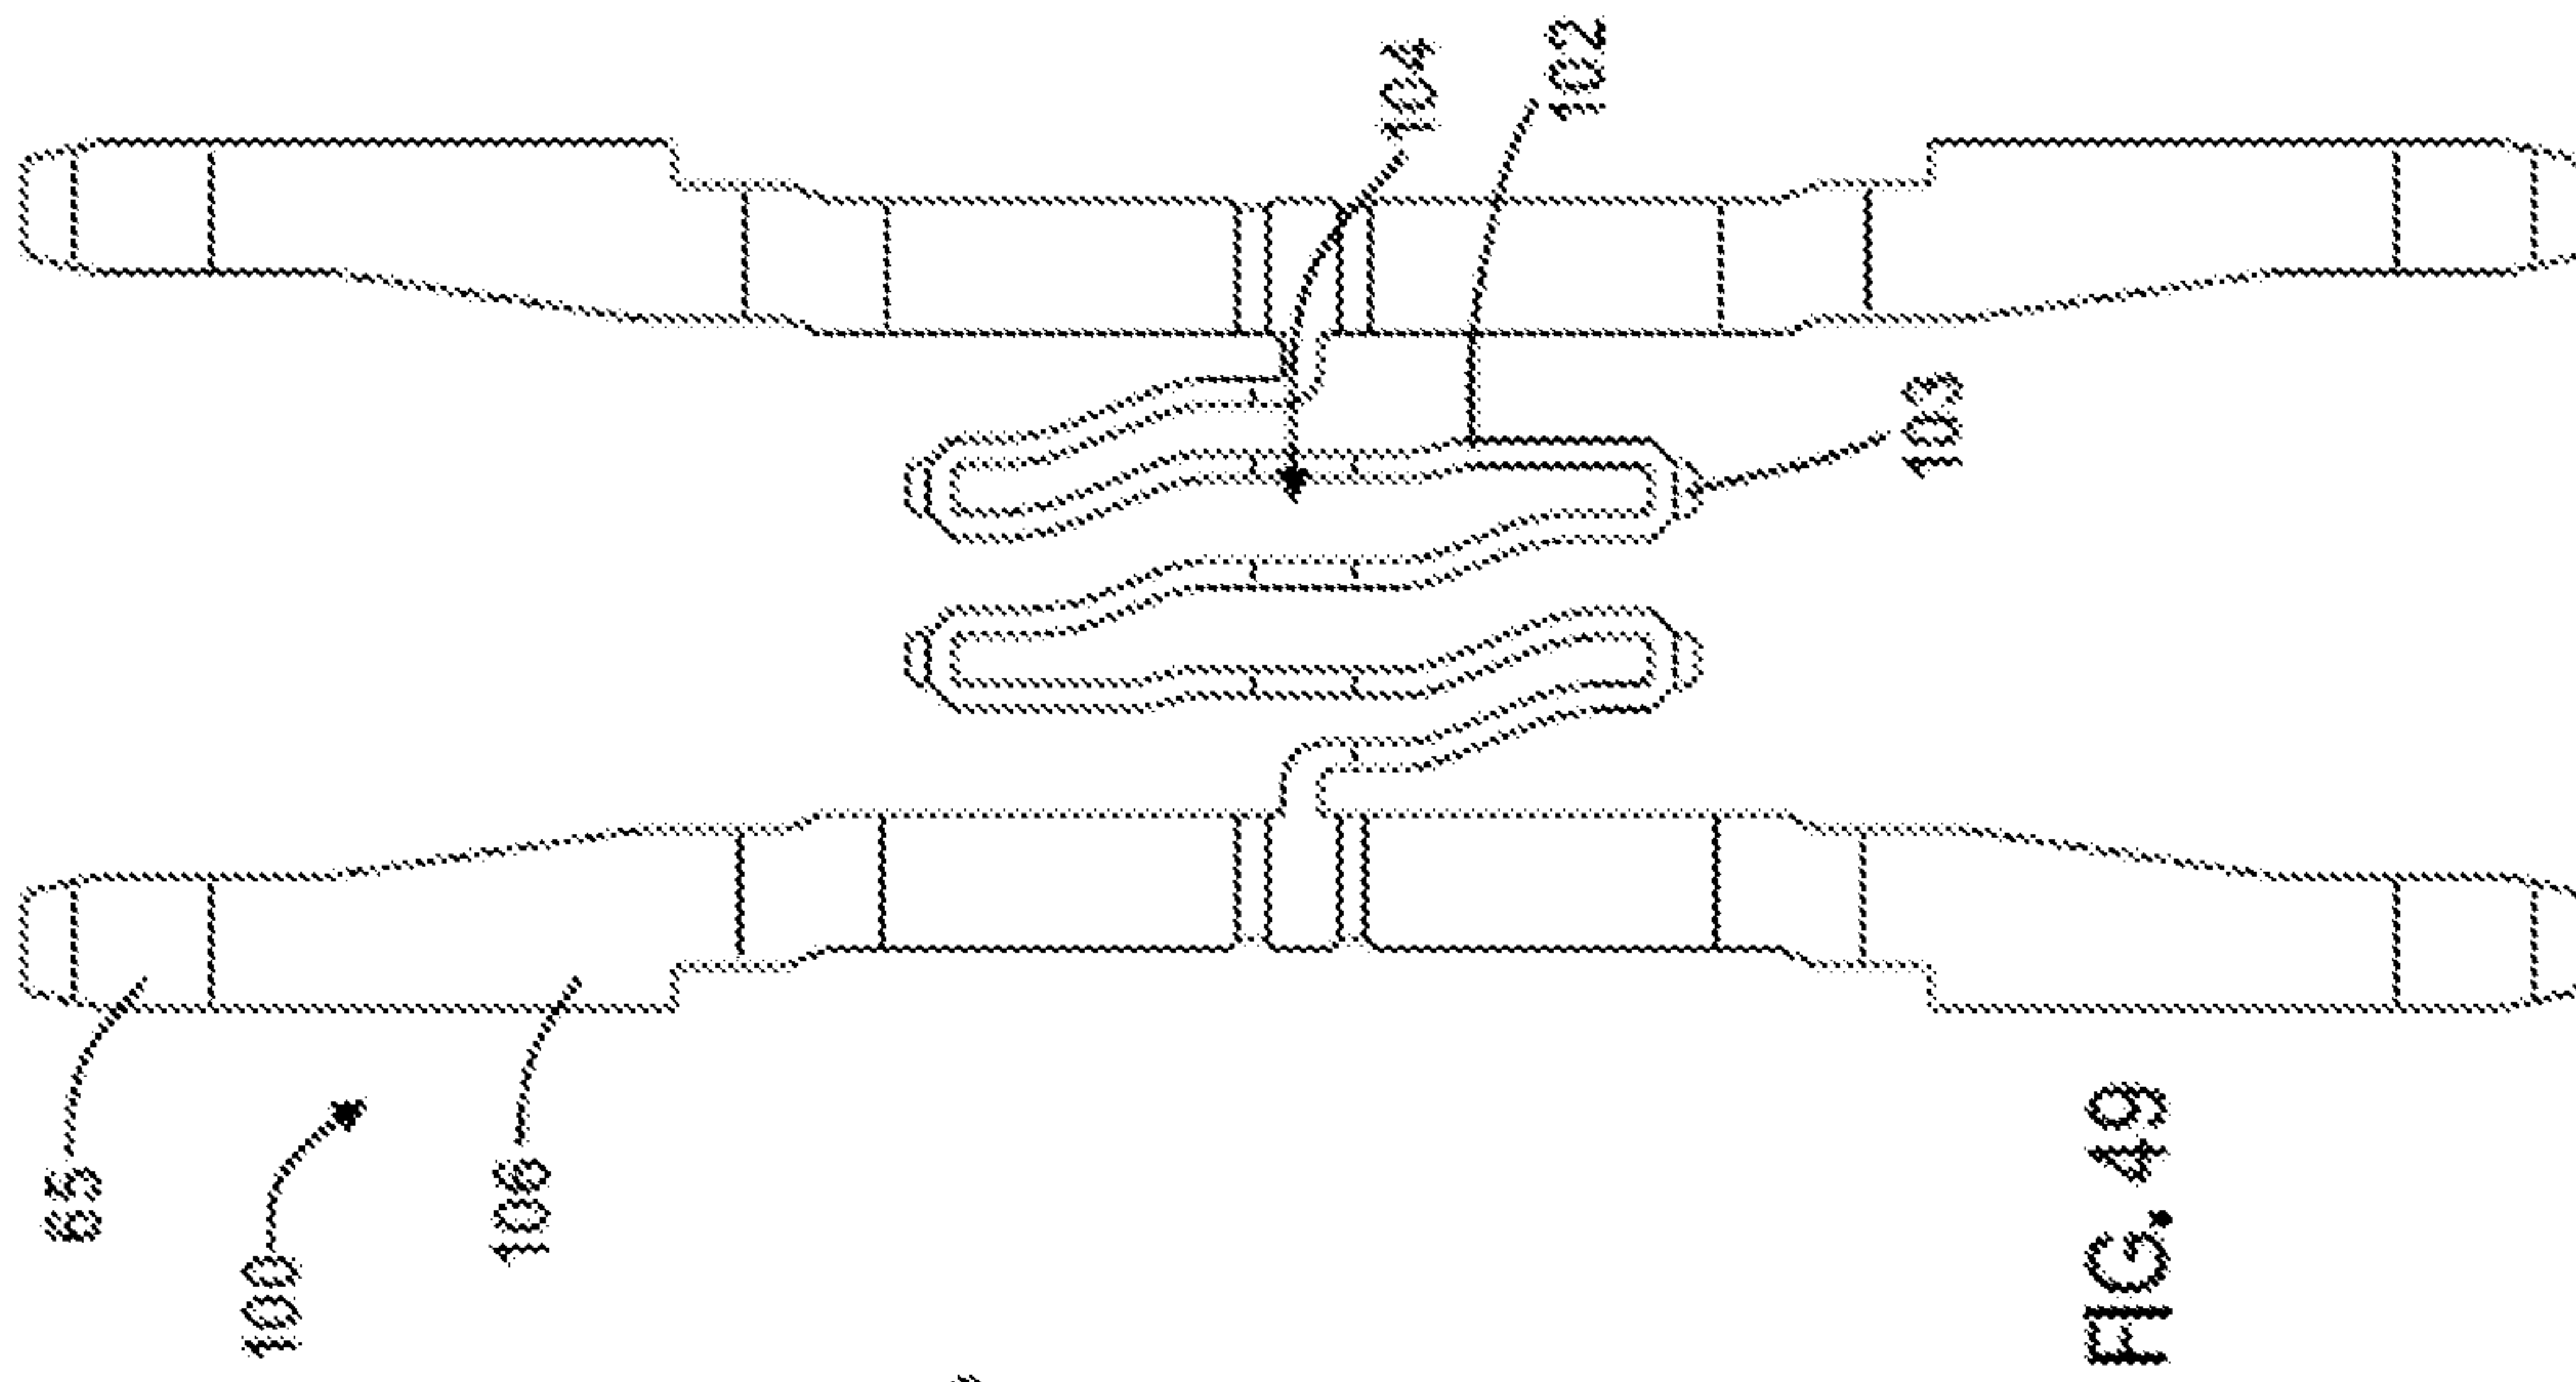


FIG. 49

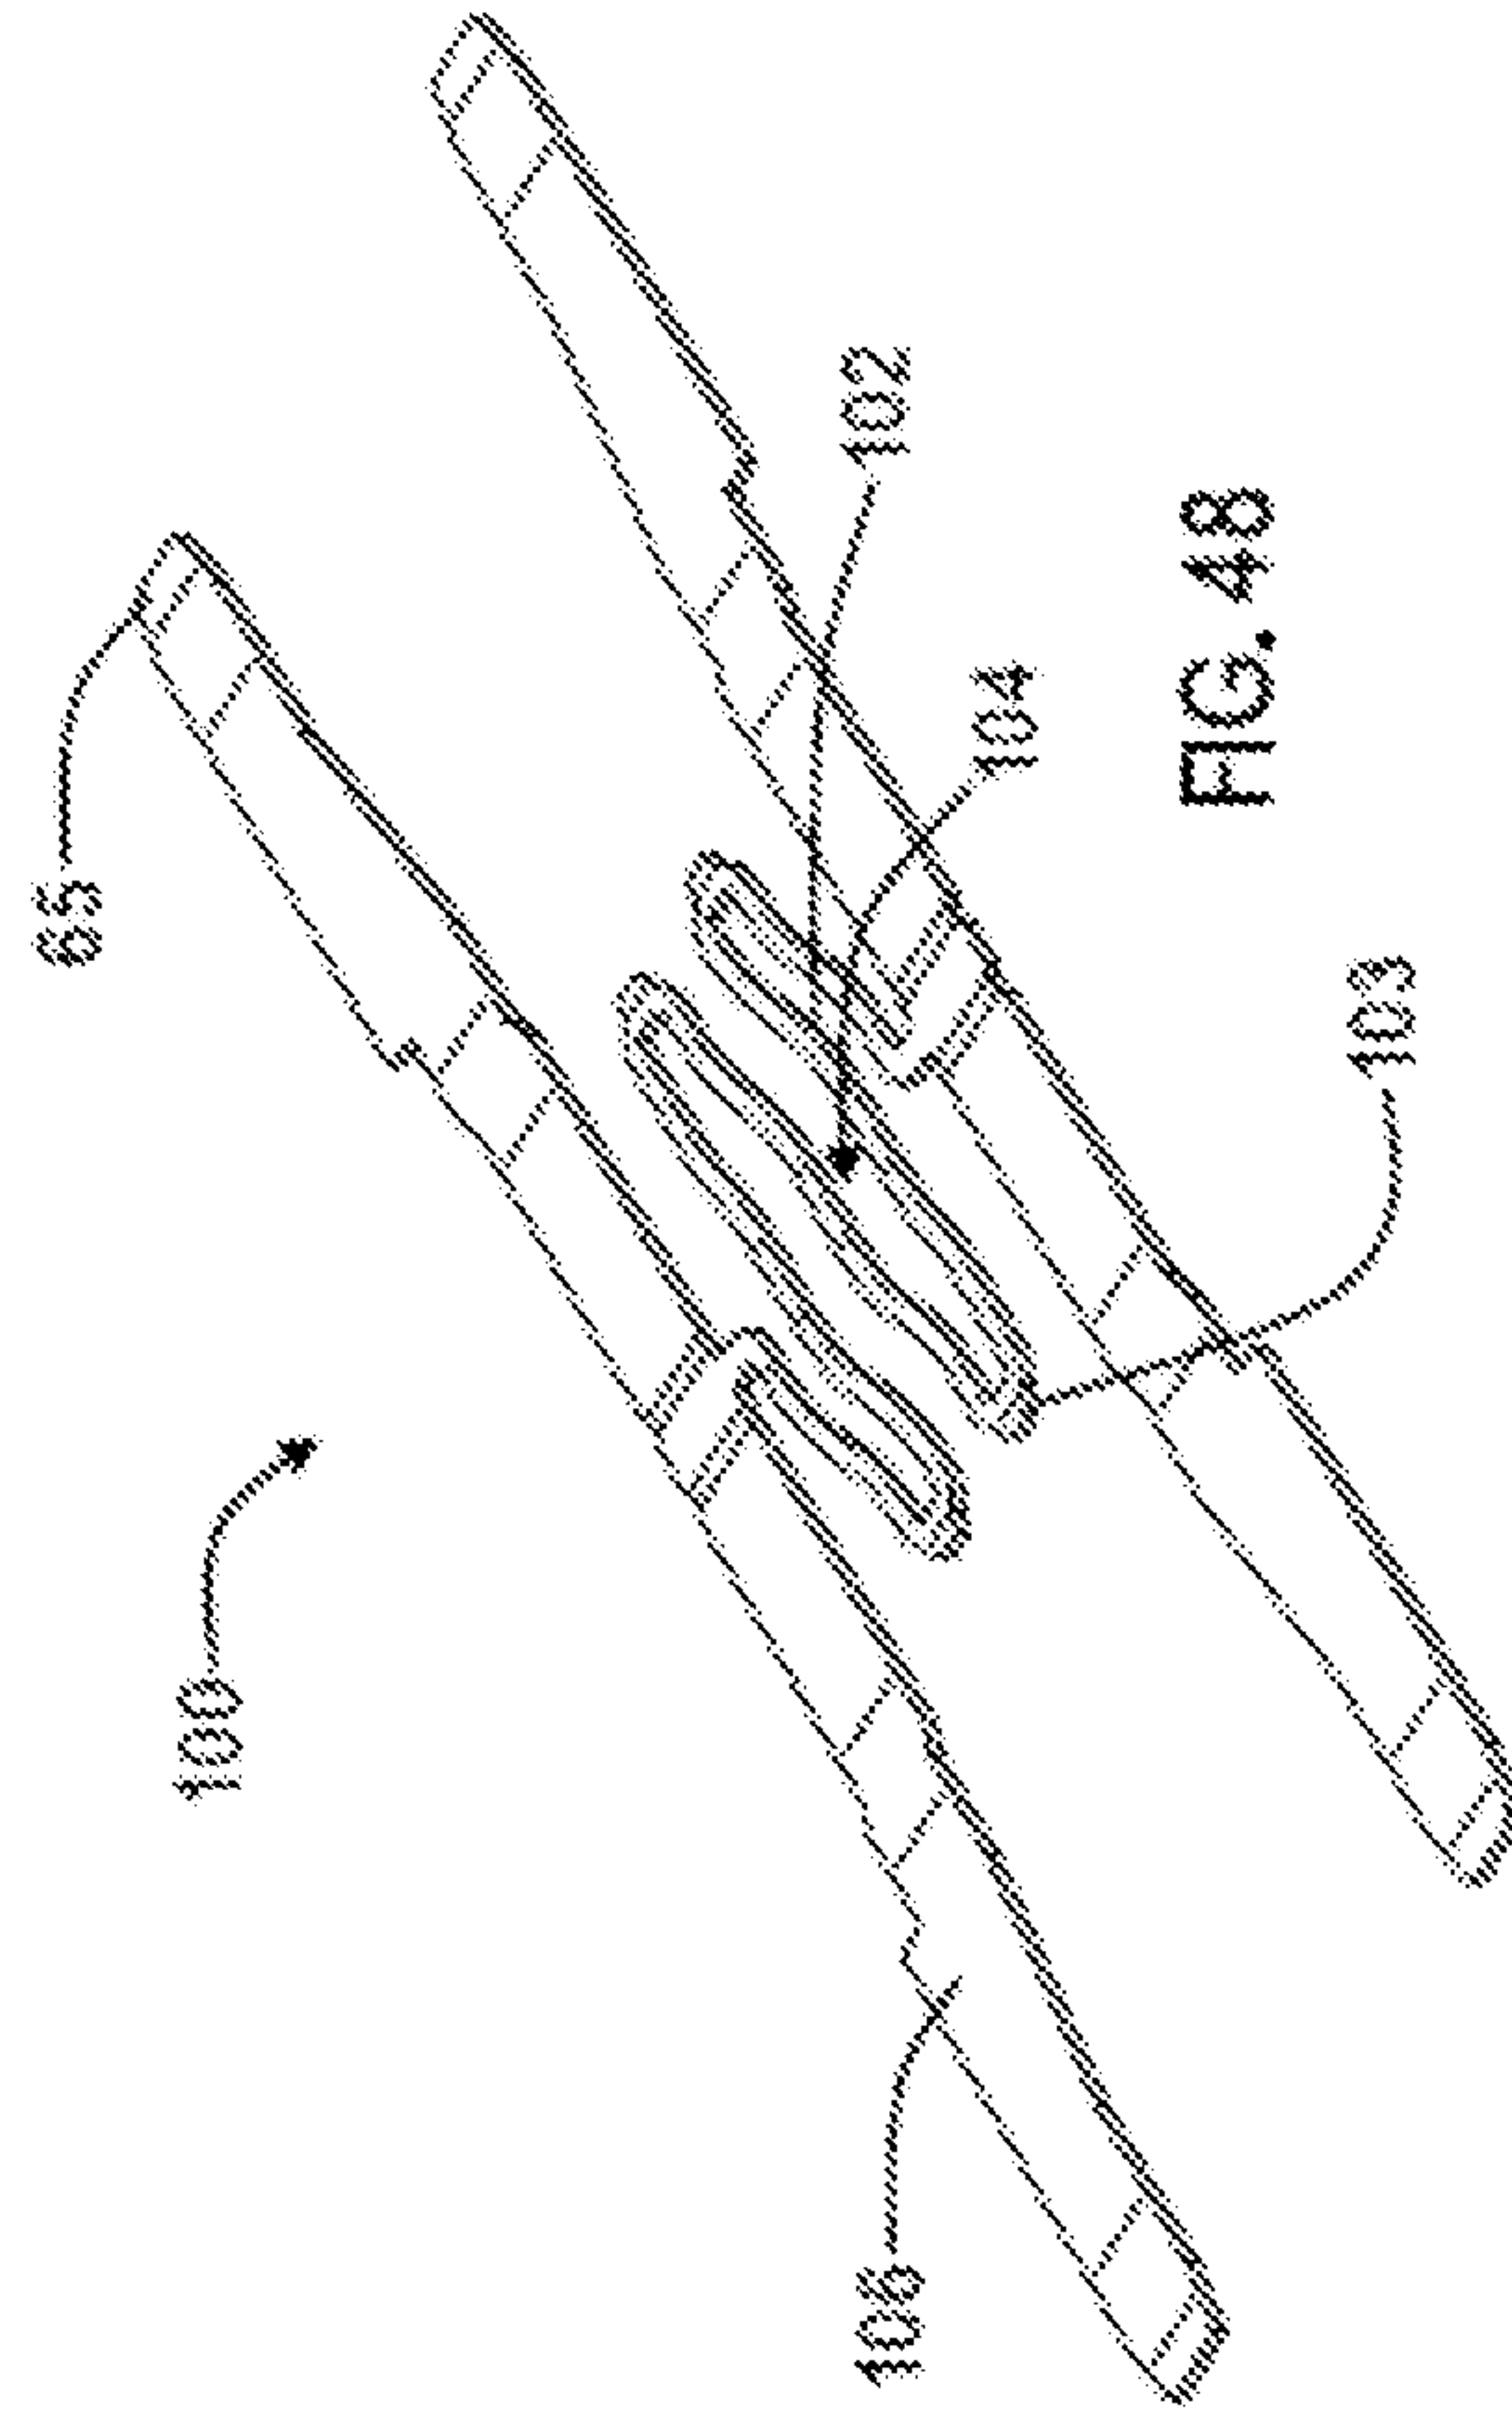


FIG. 48

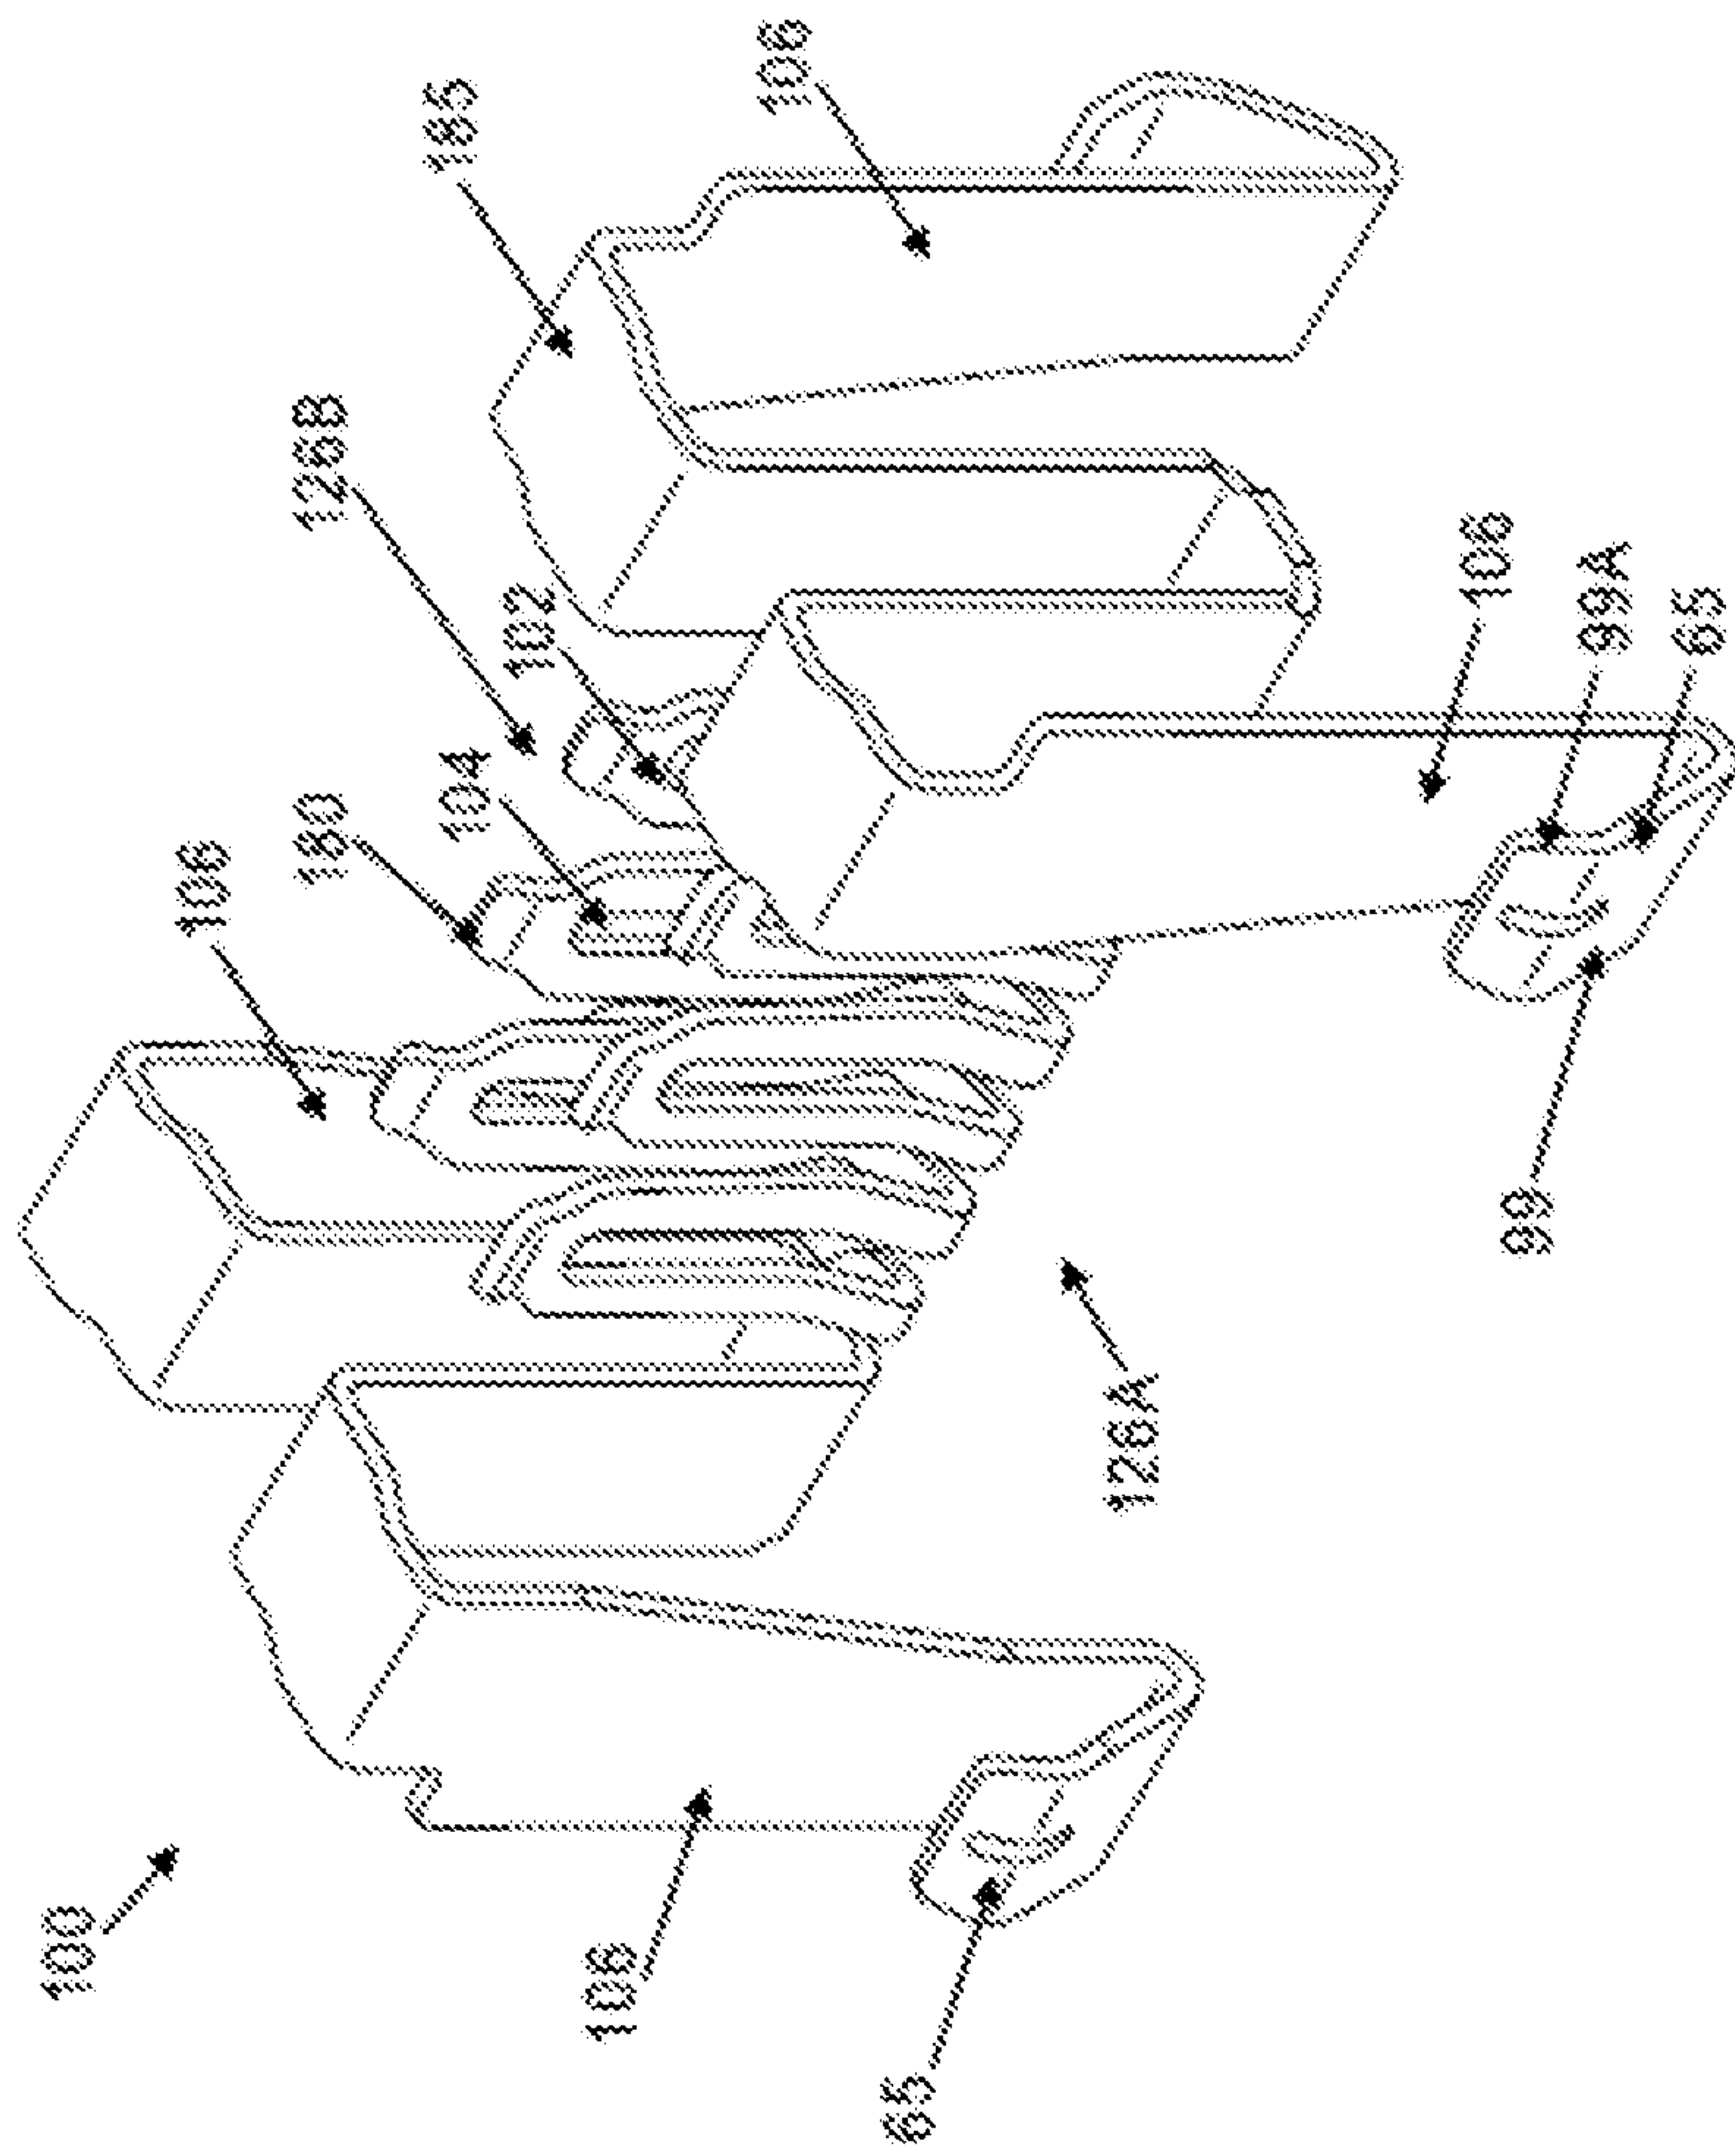


FIG. 50A







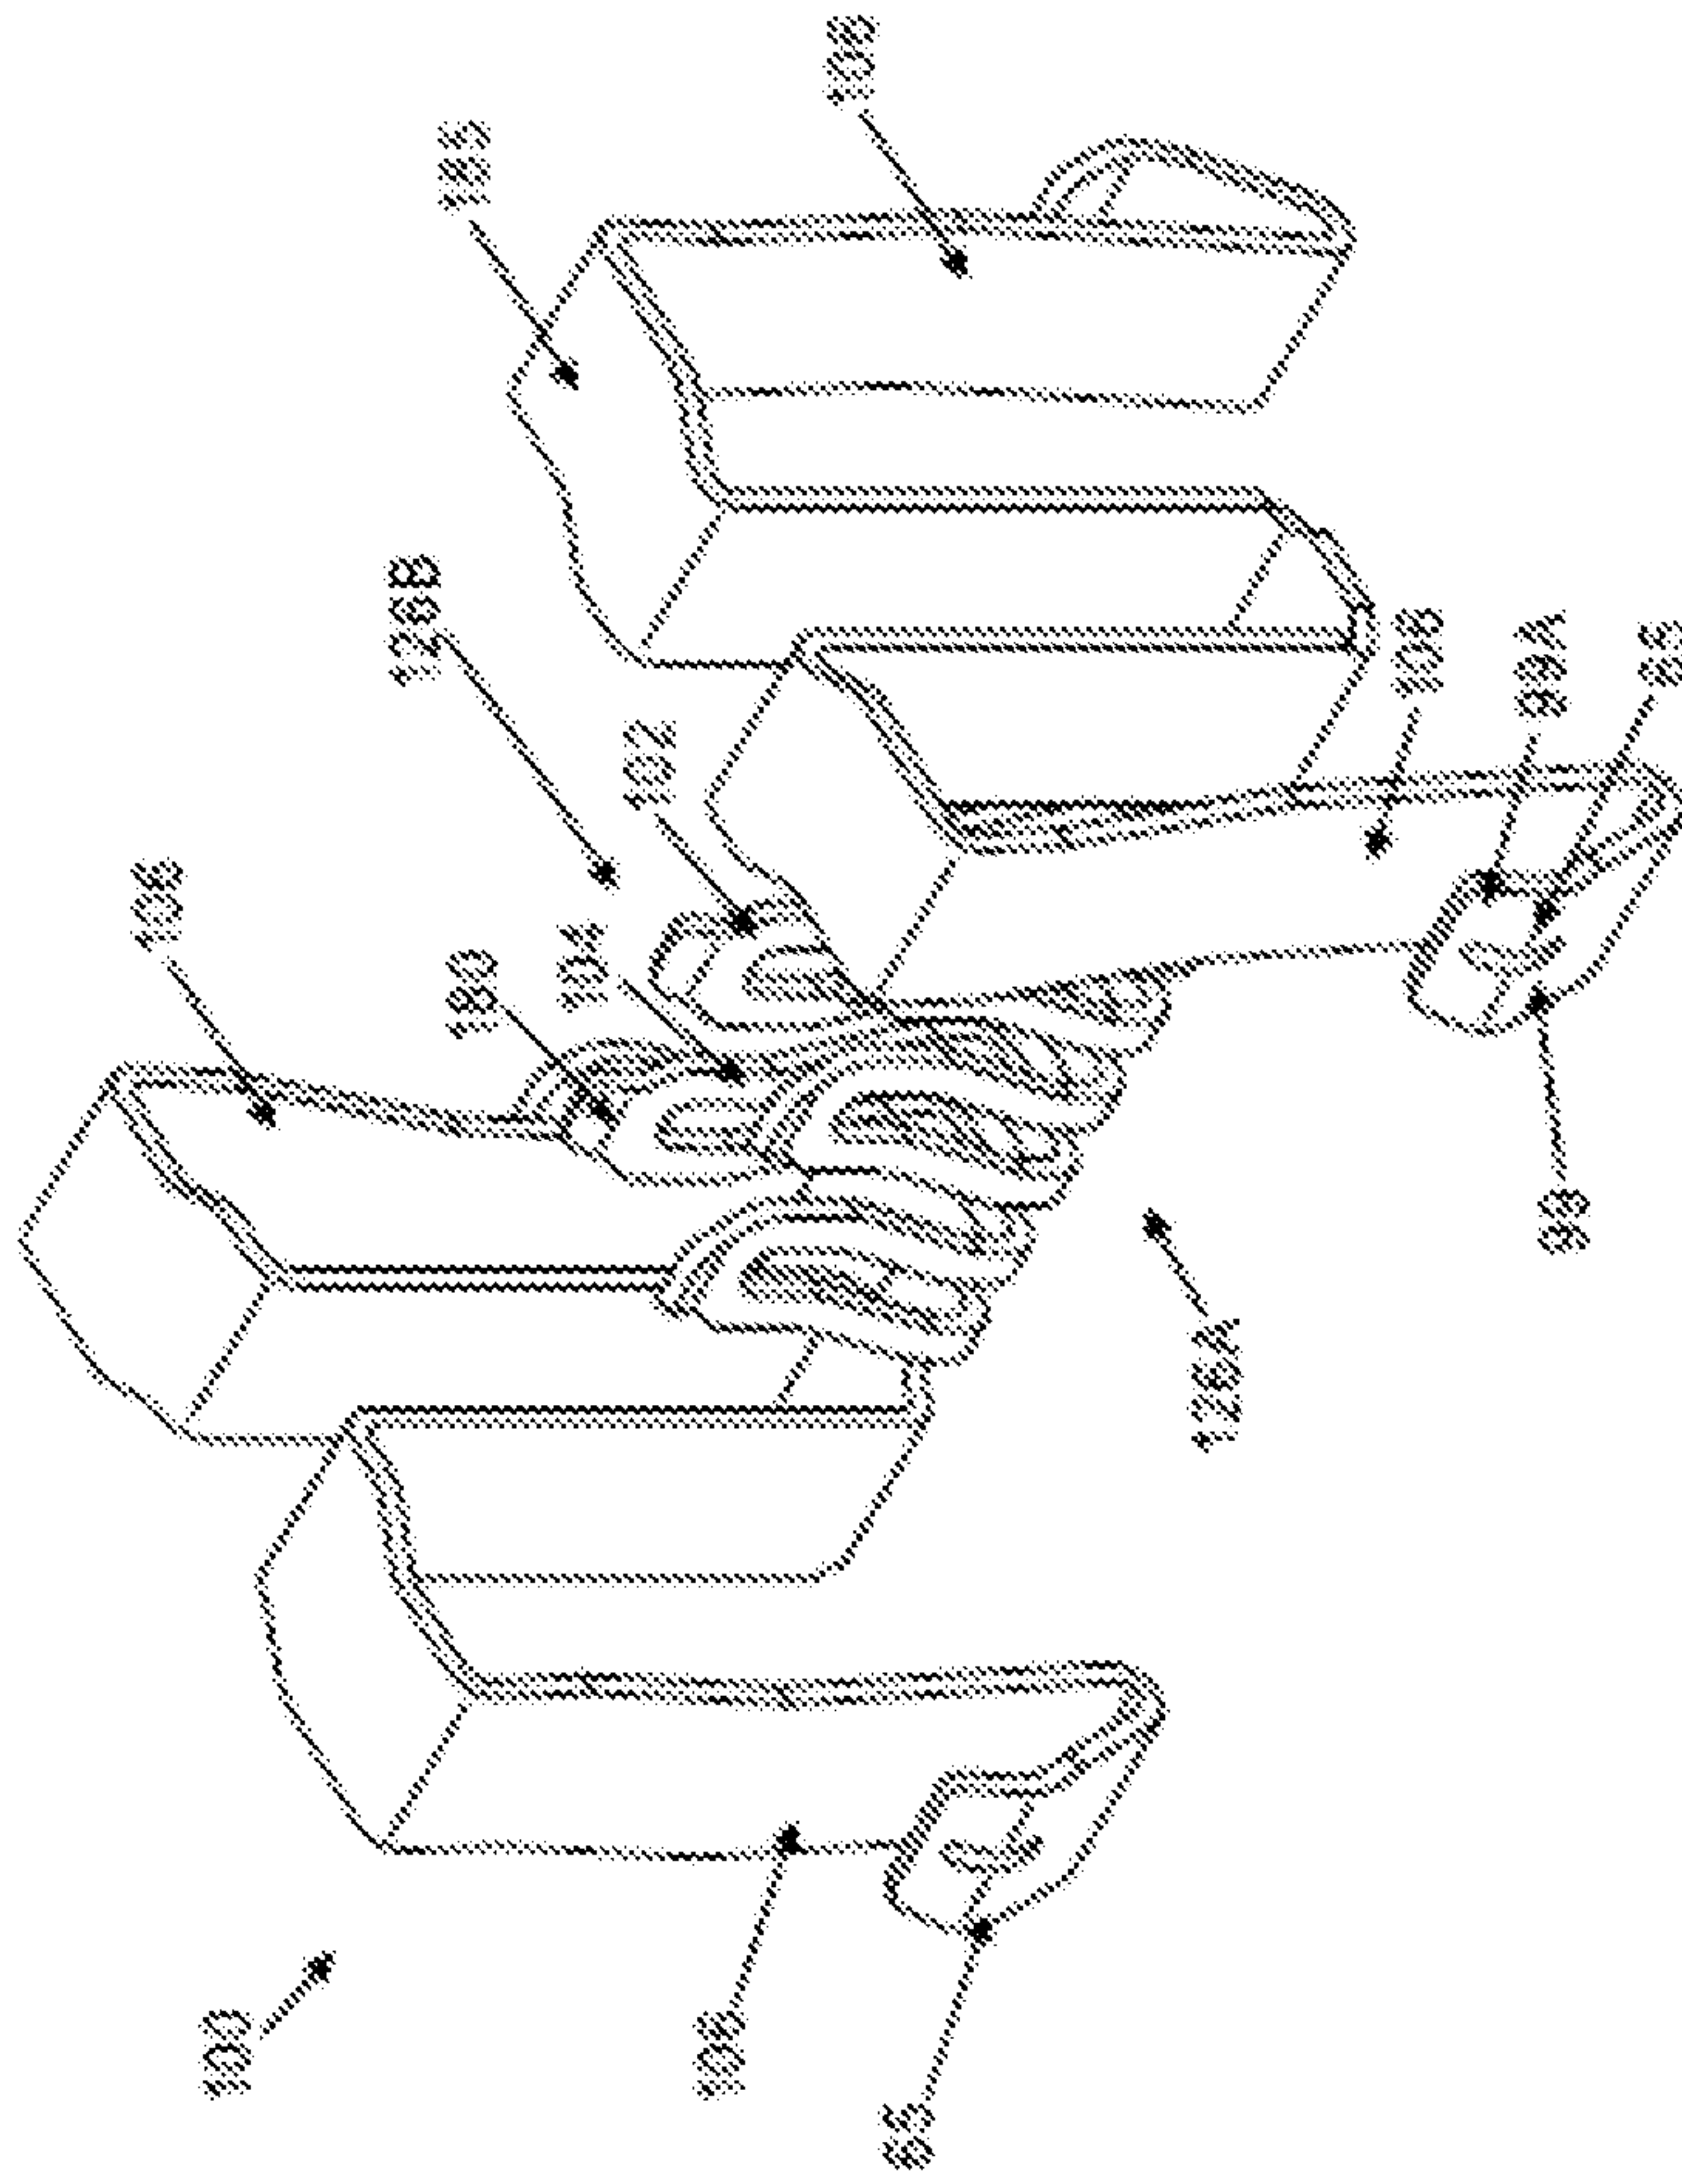



FIG. 50B

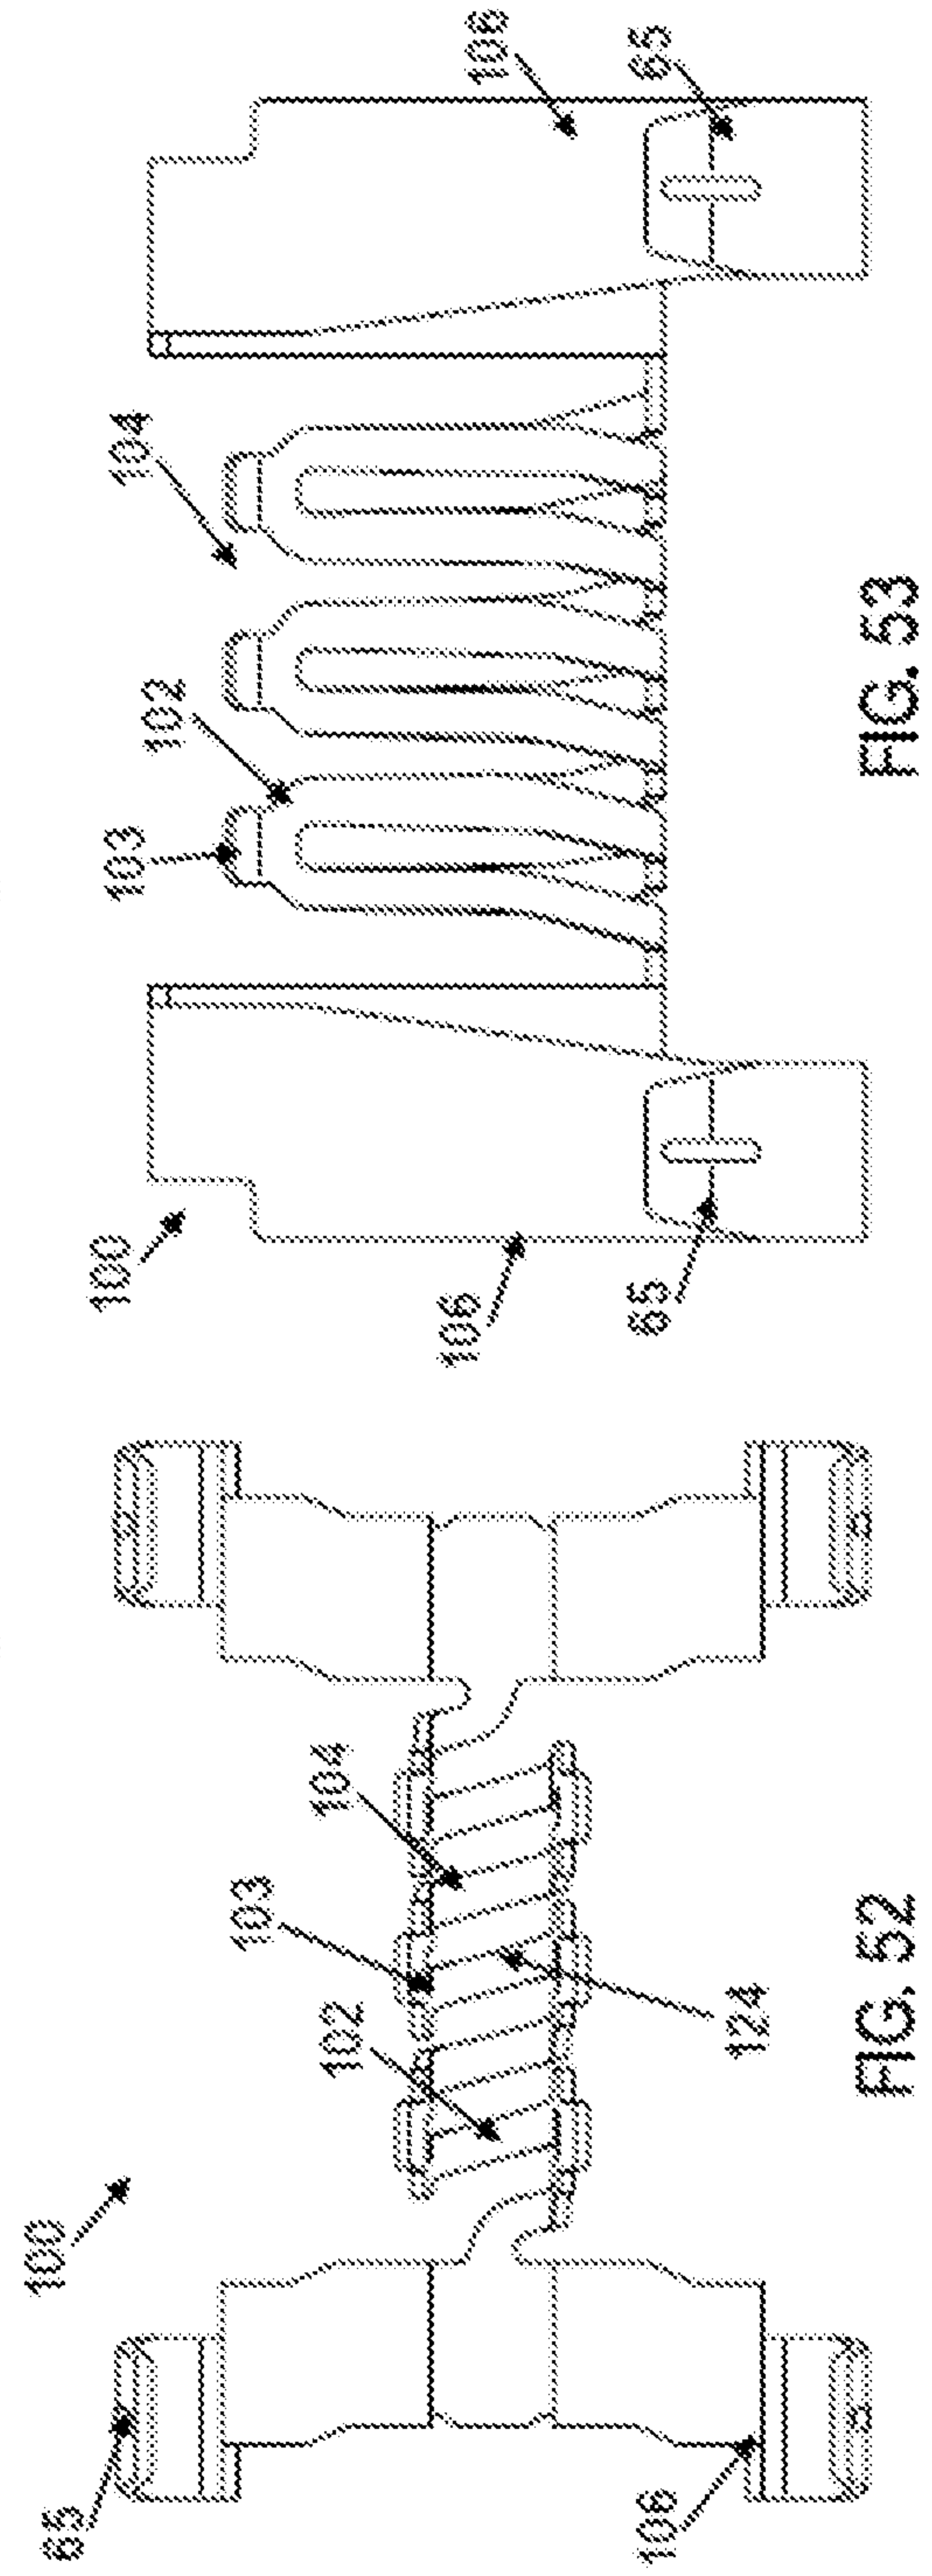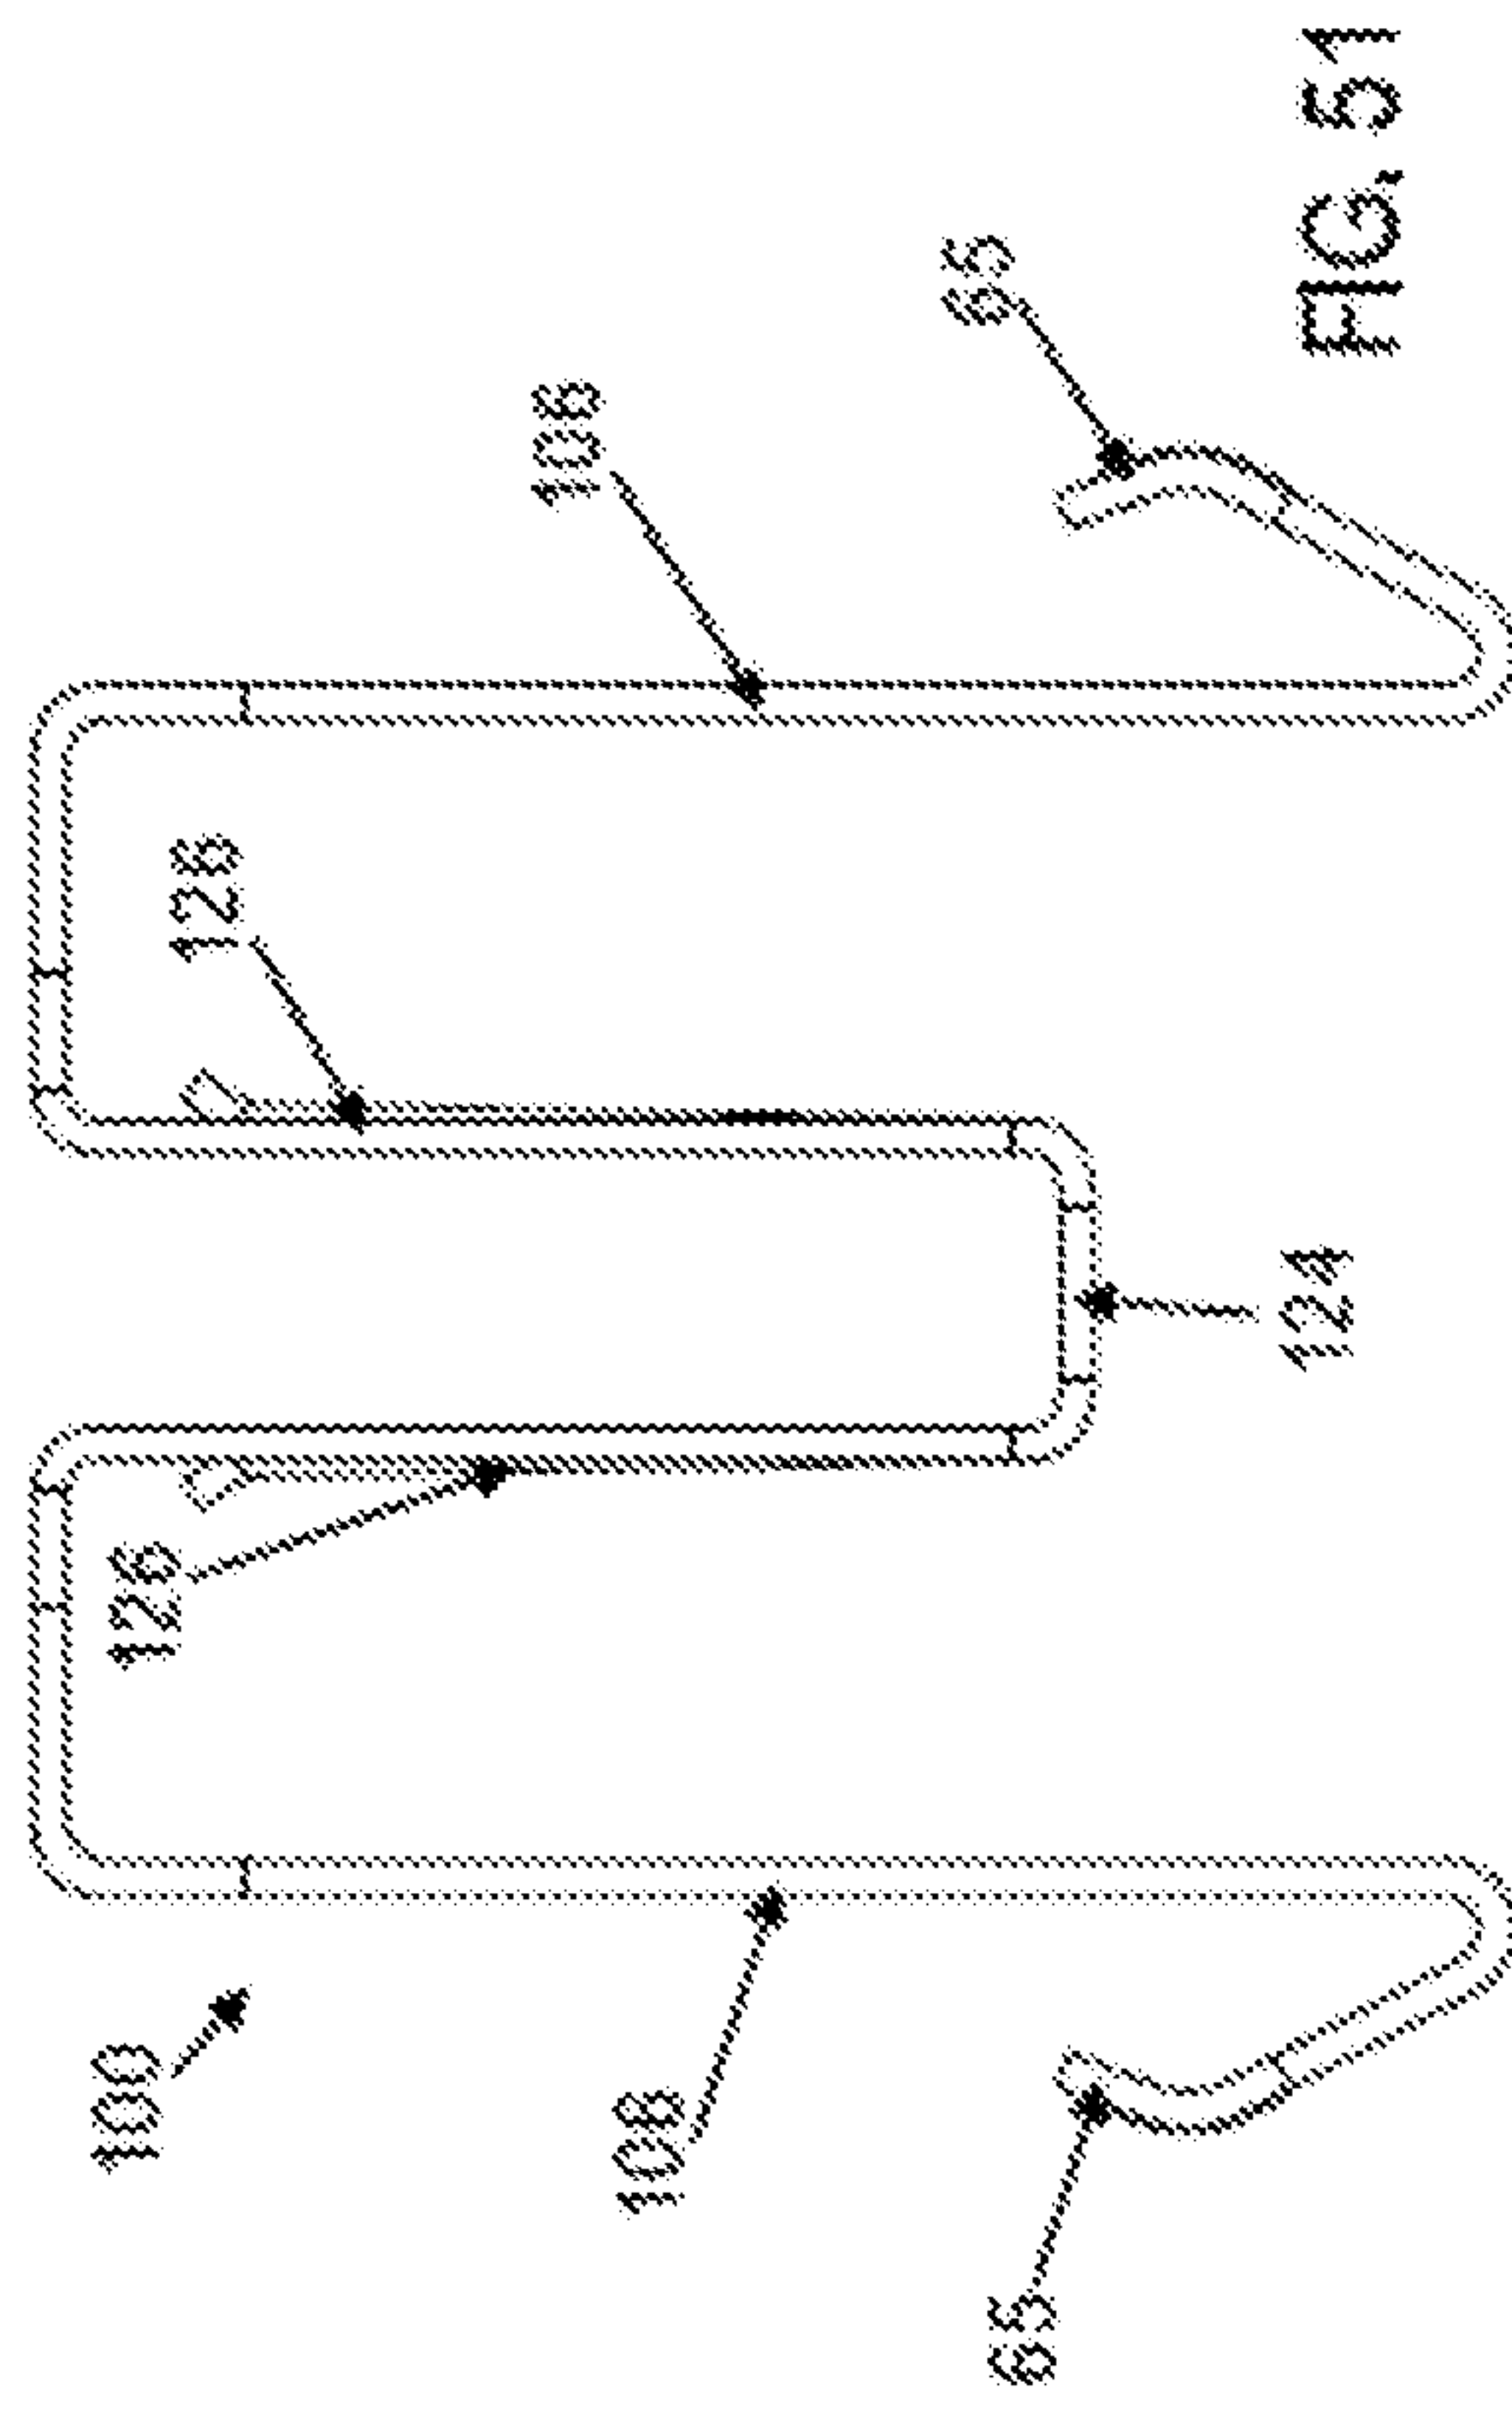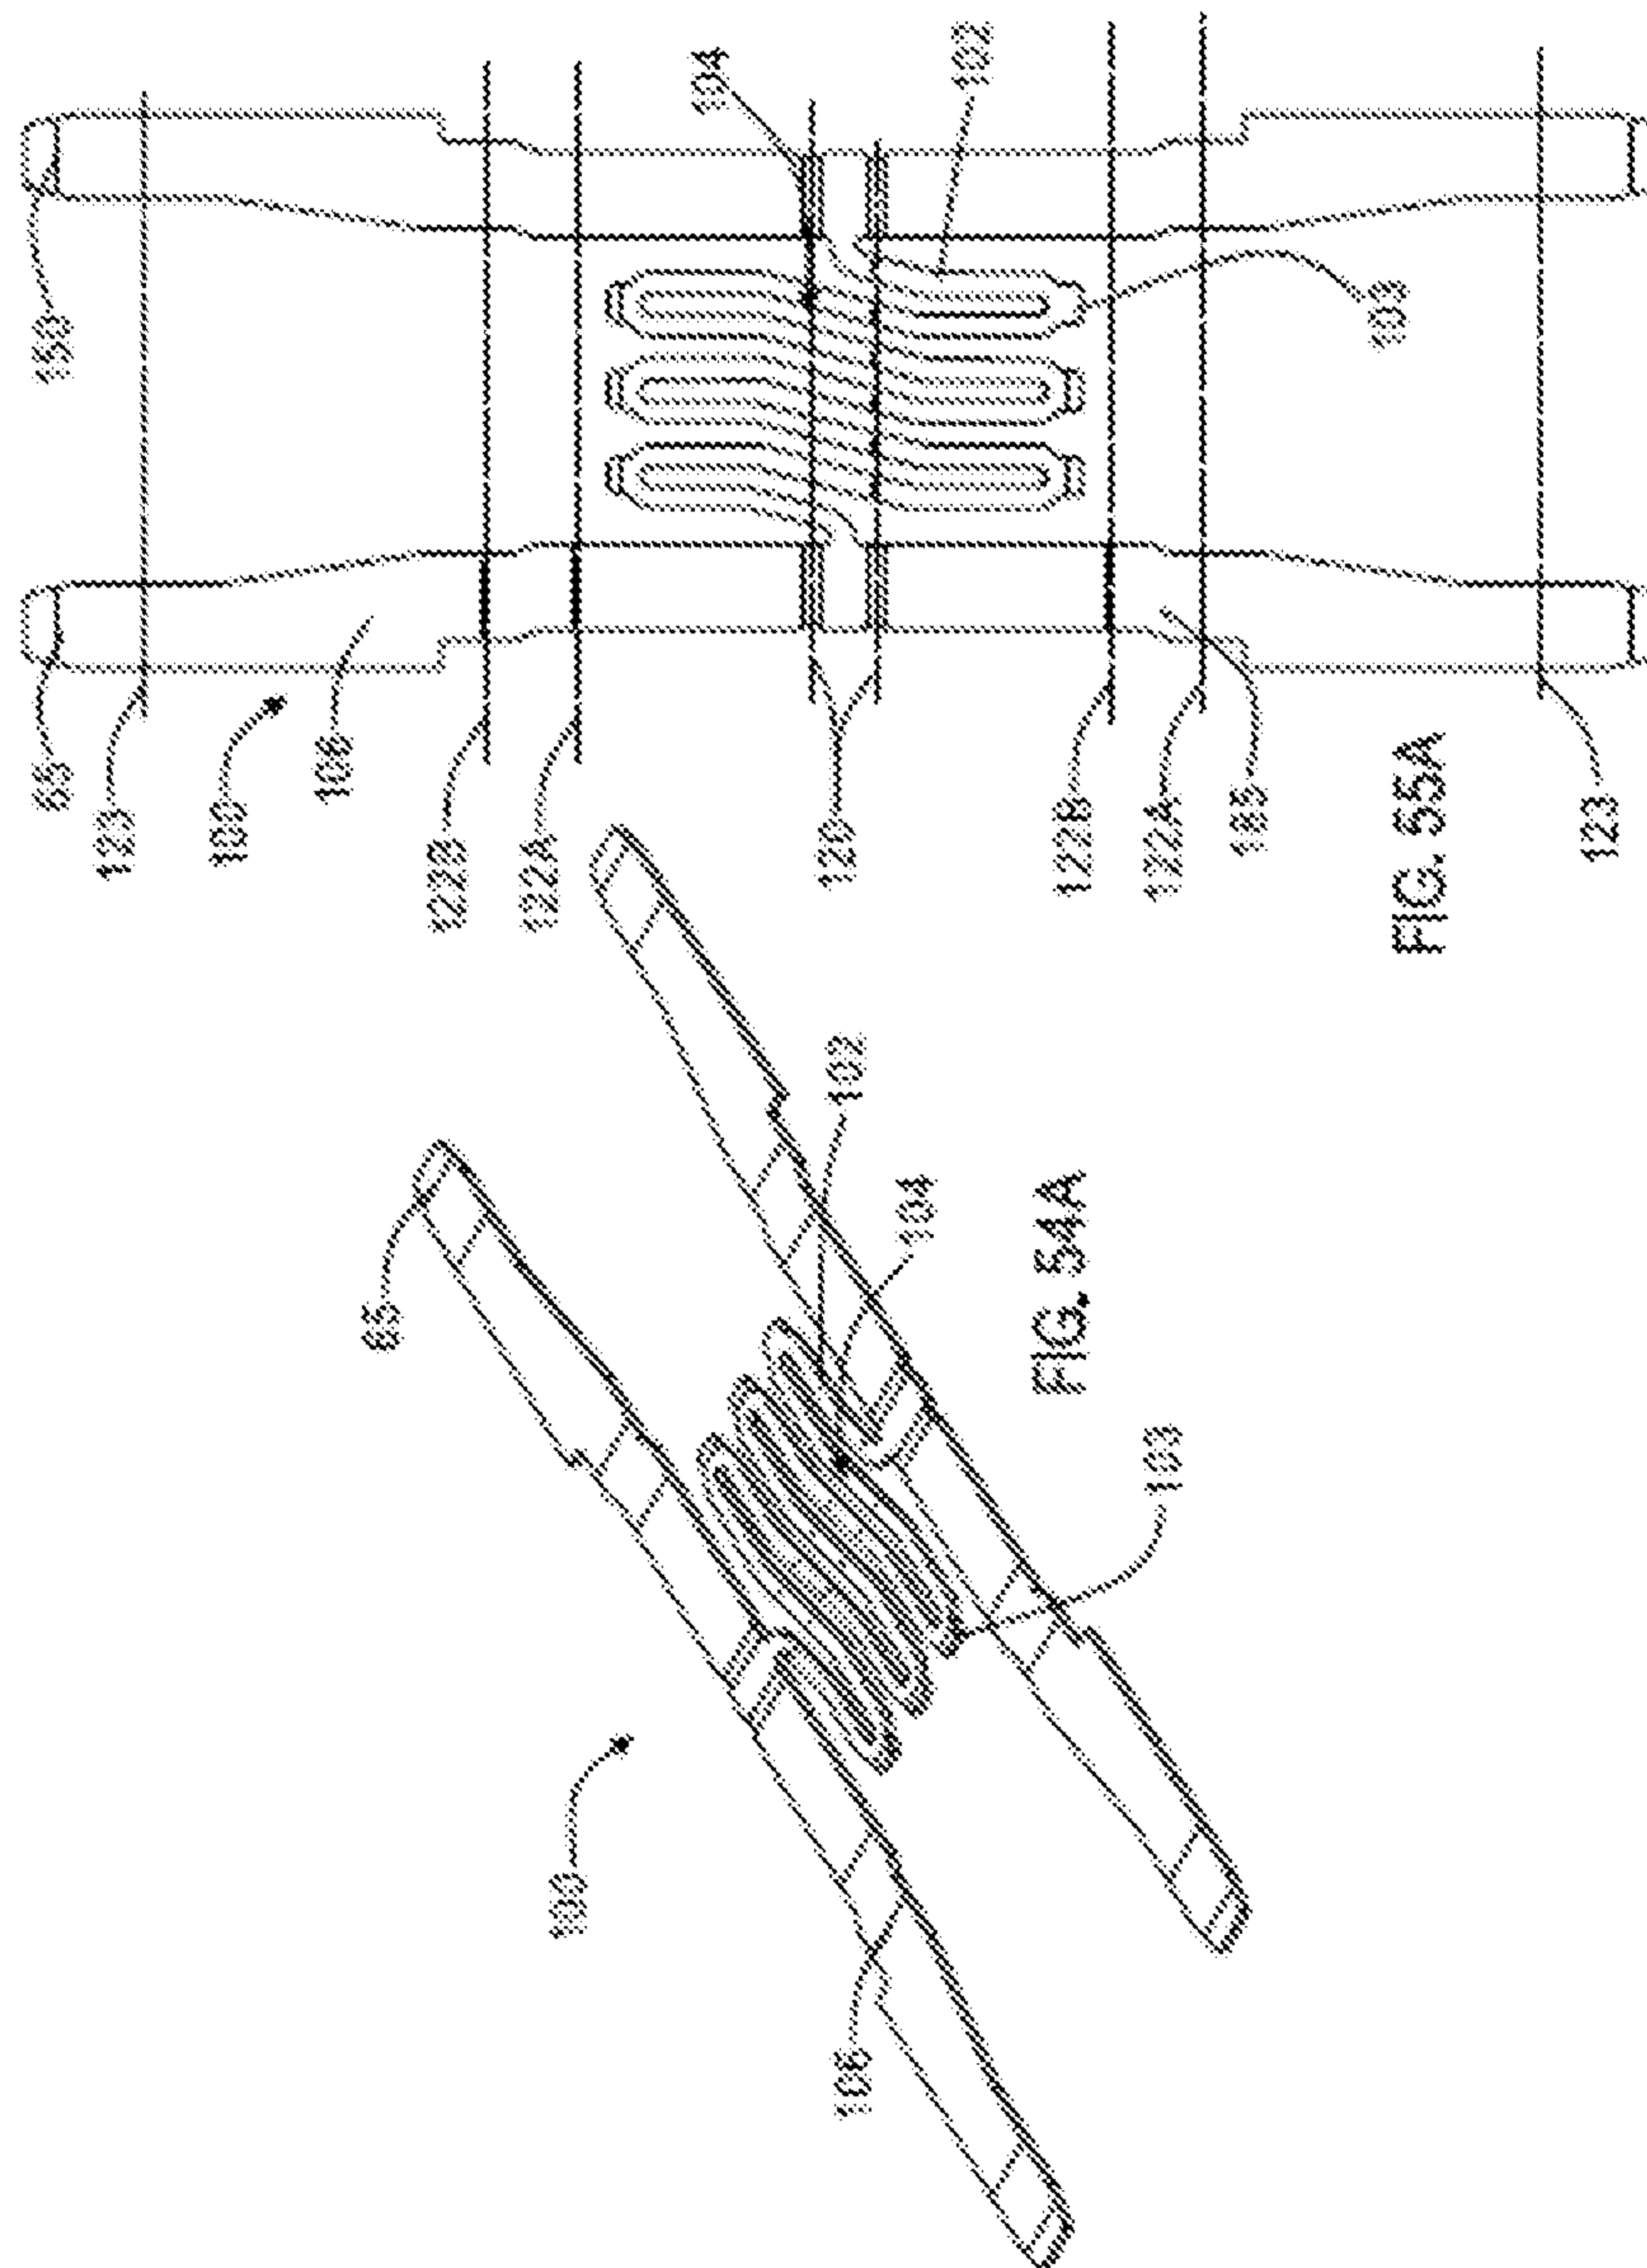


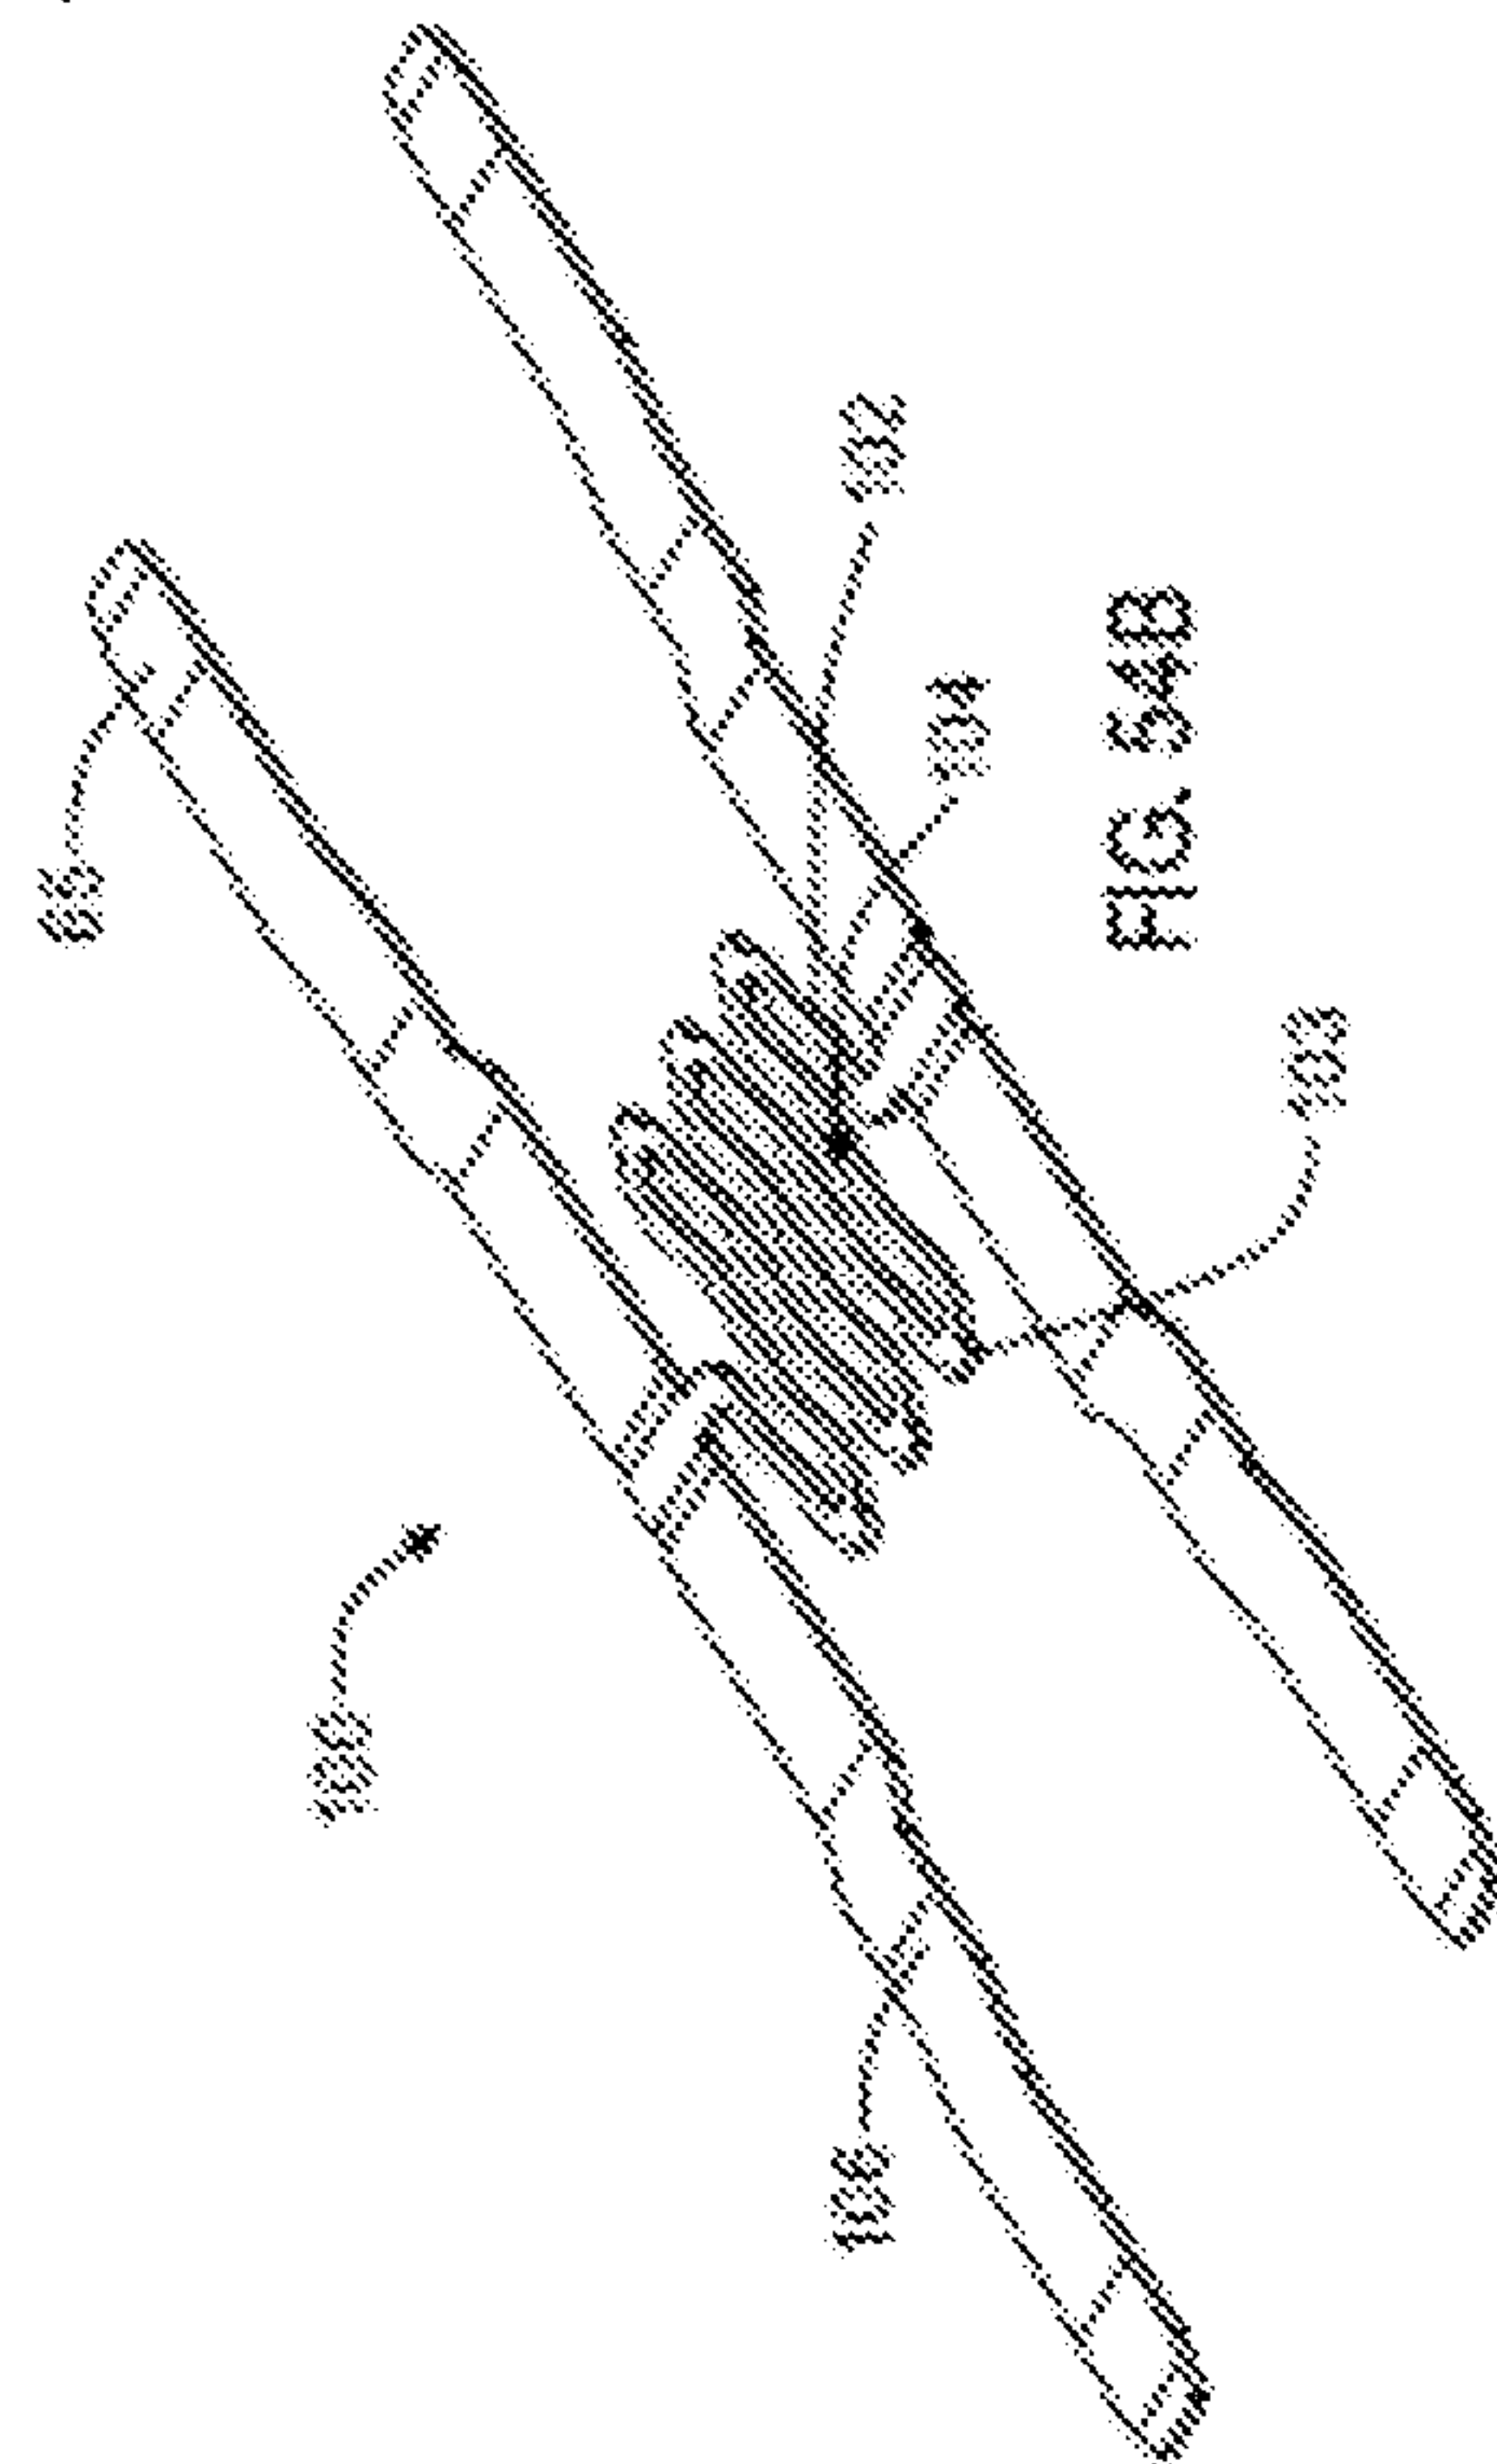

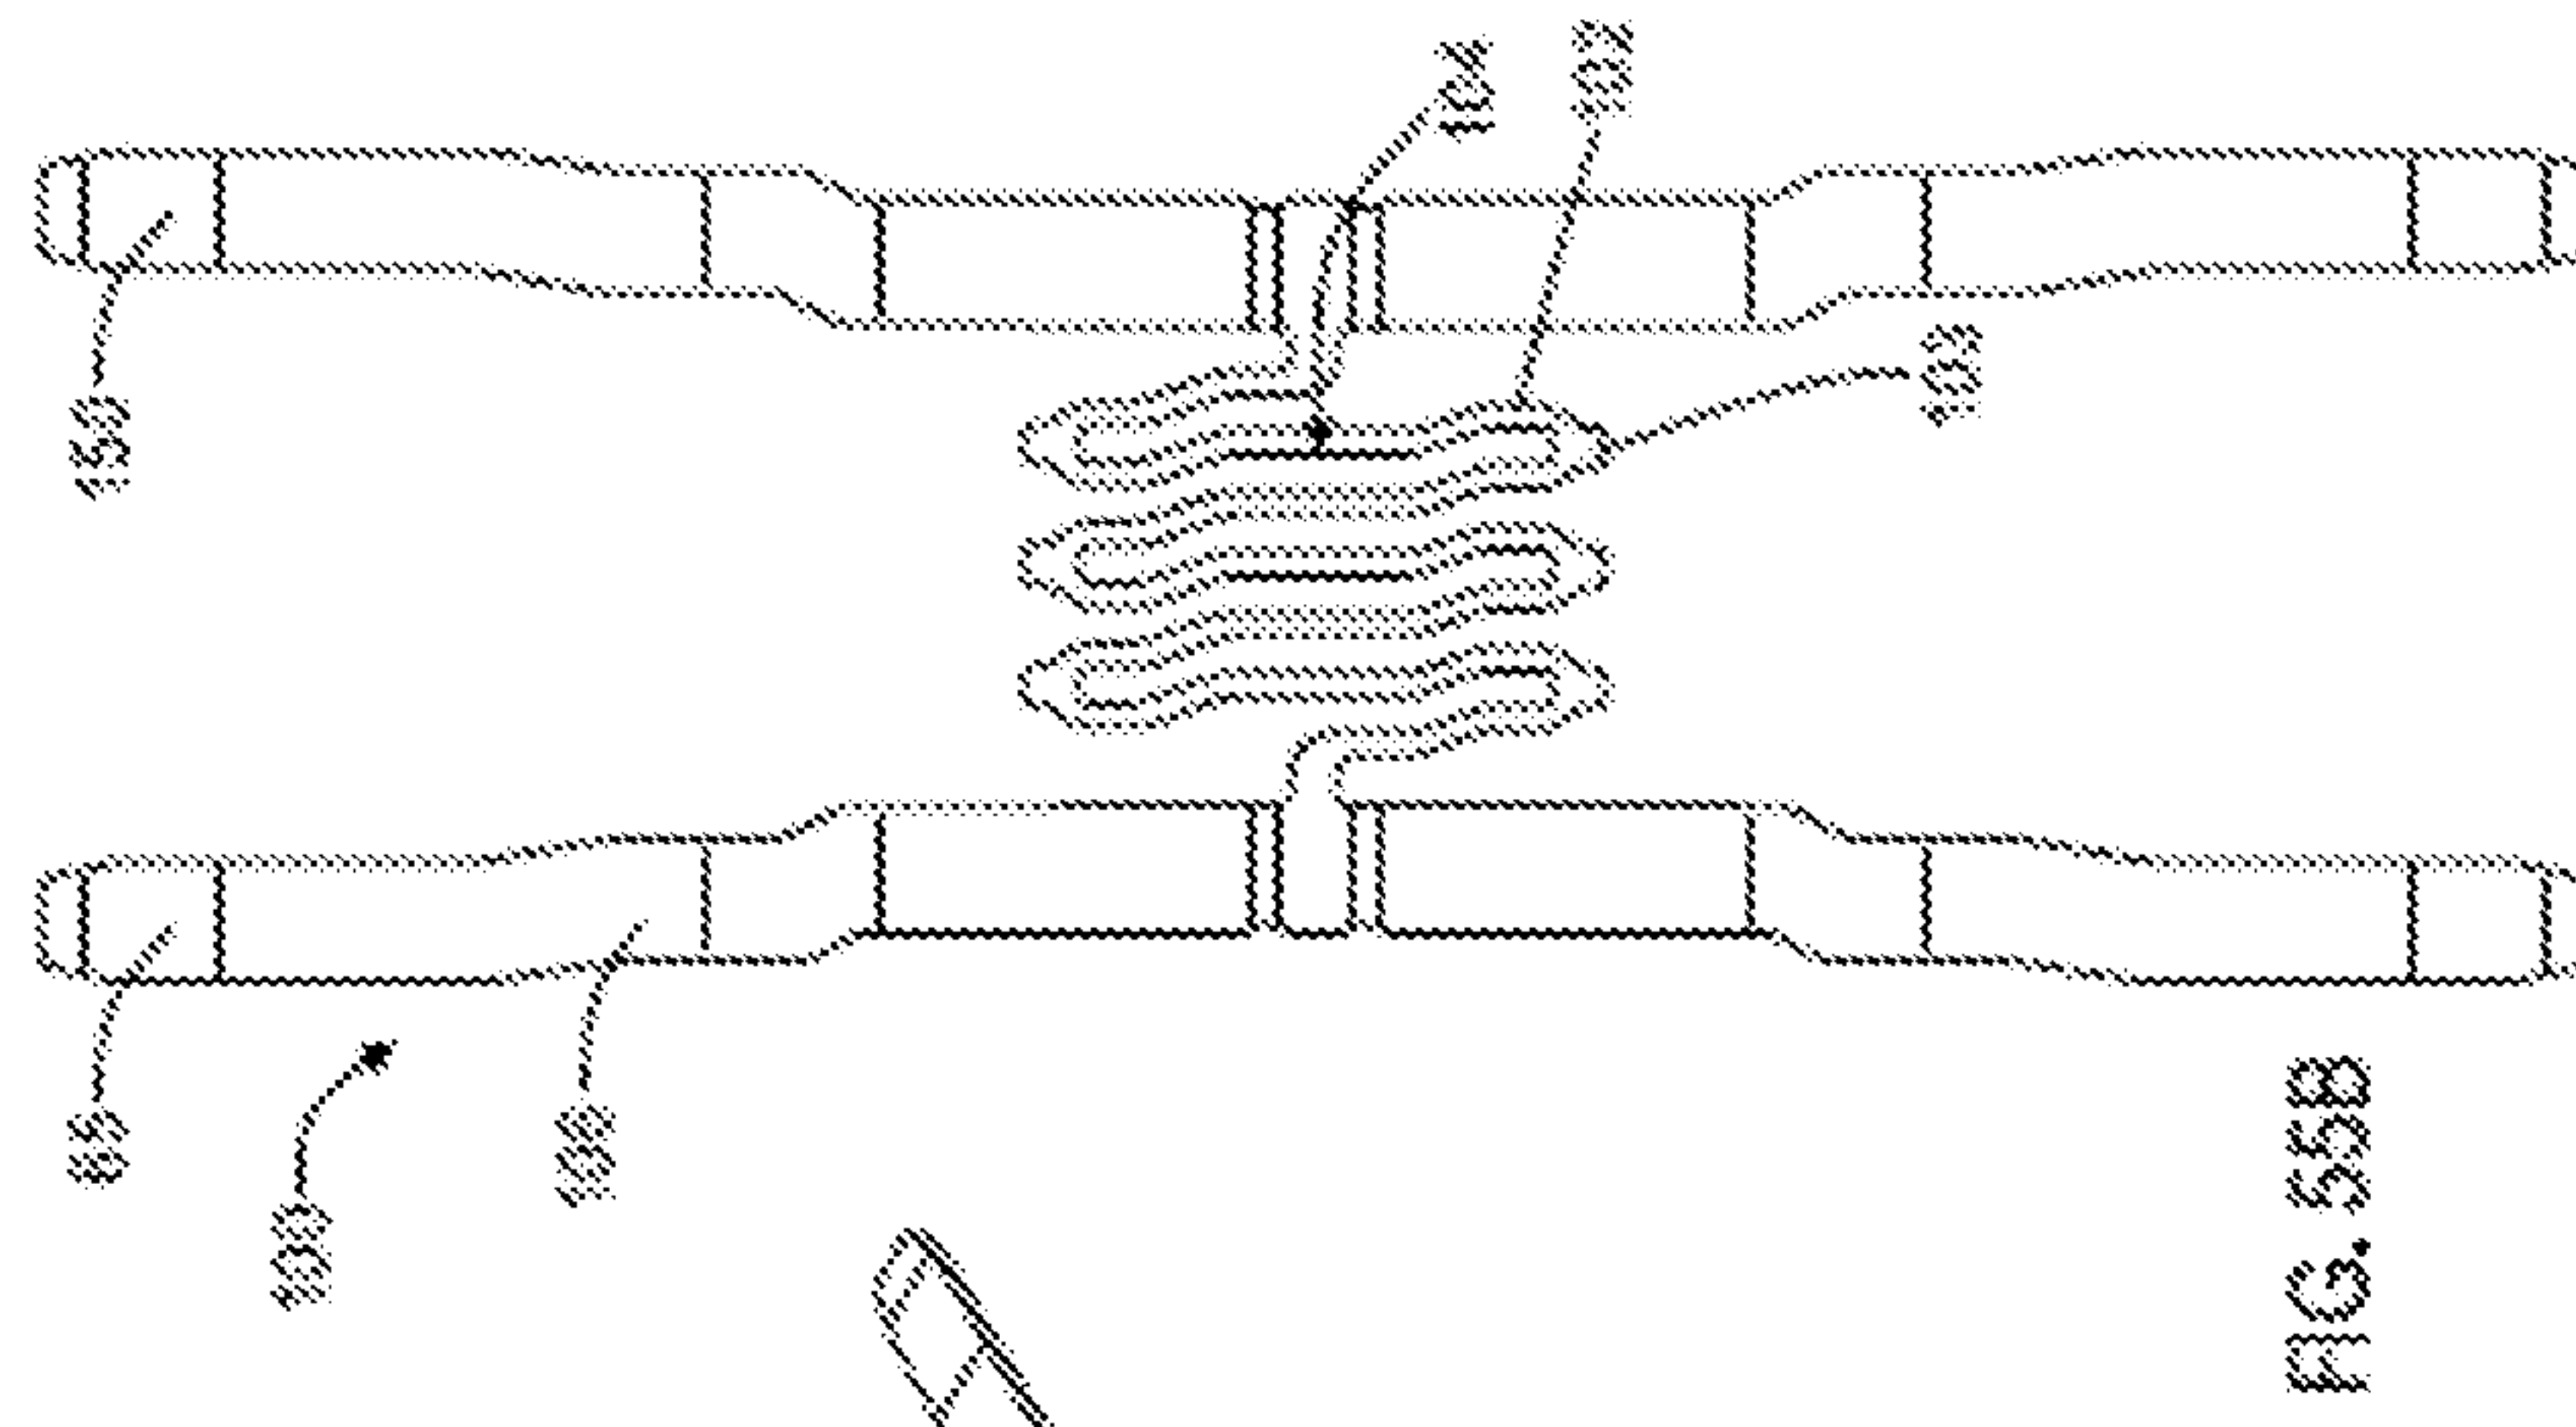


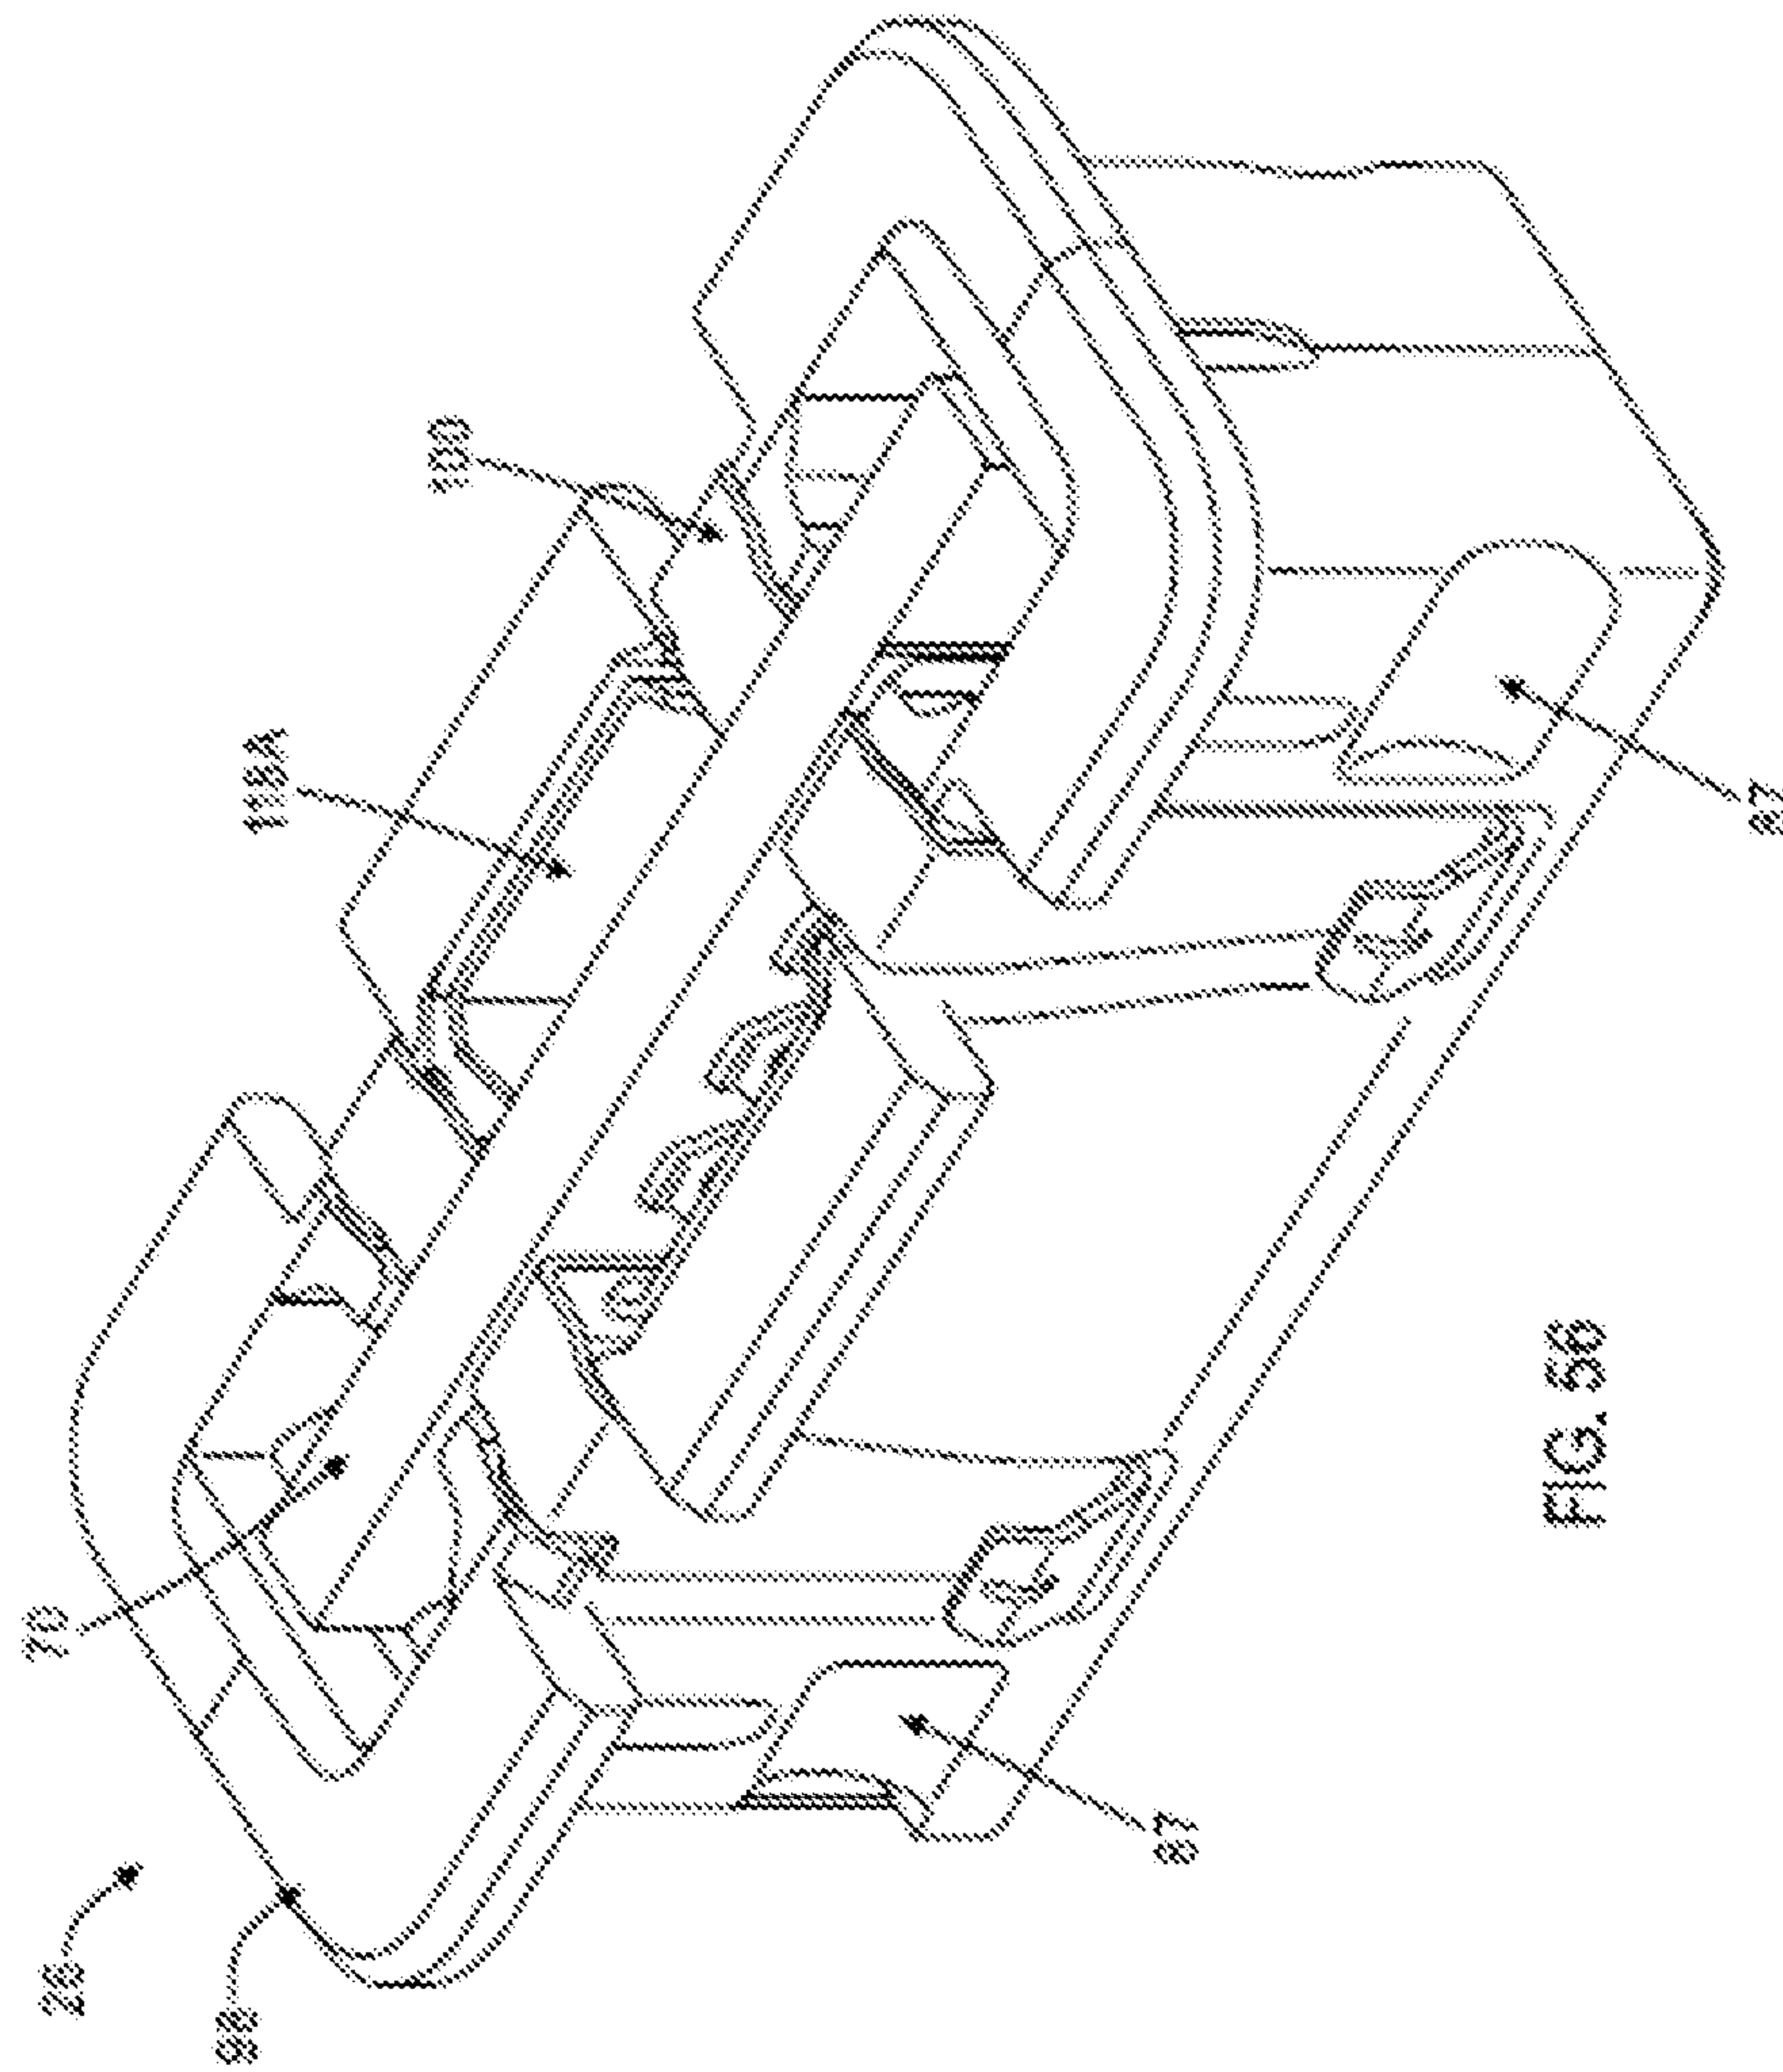

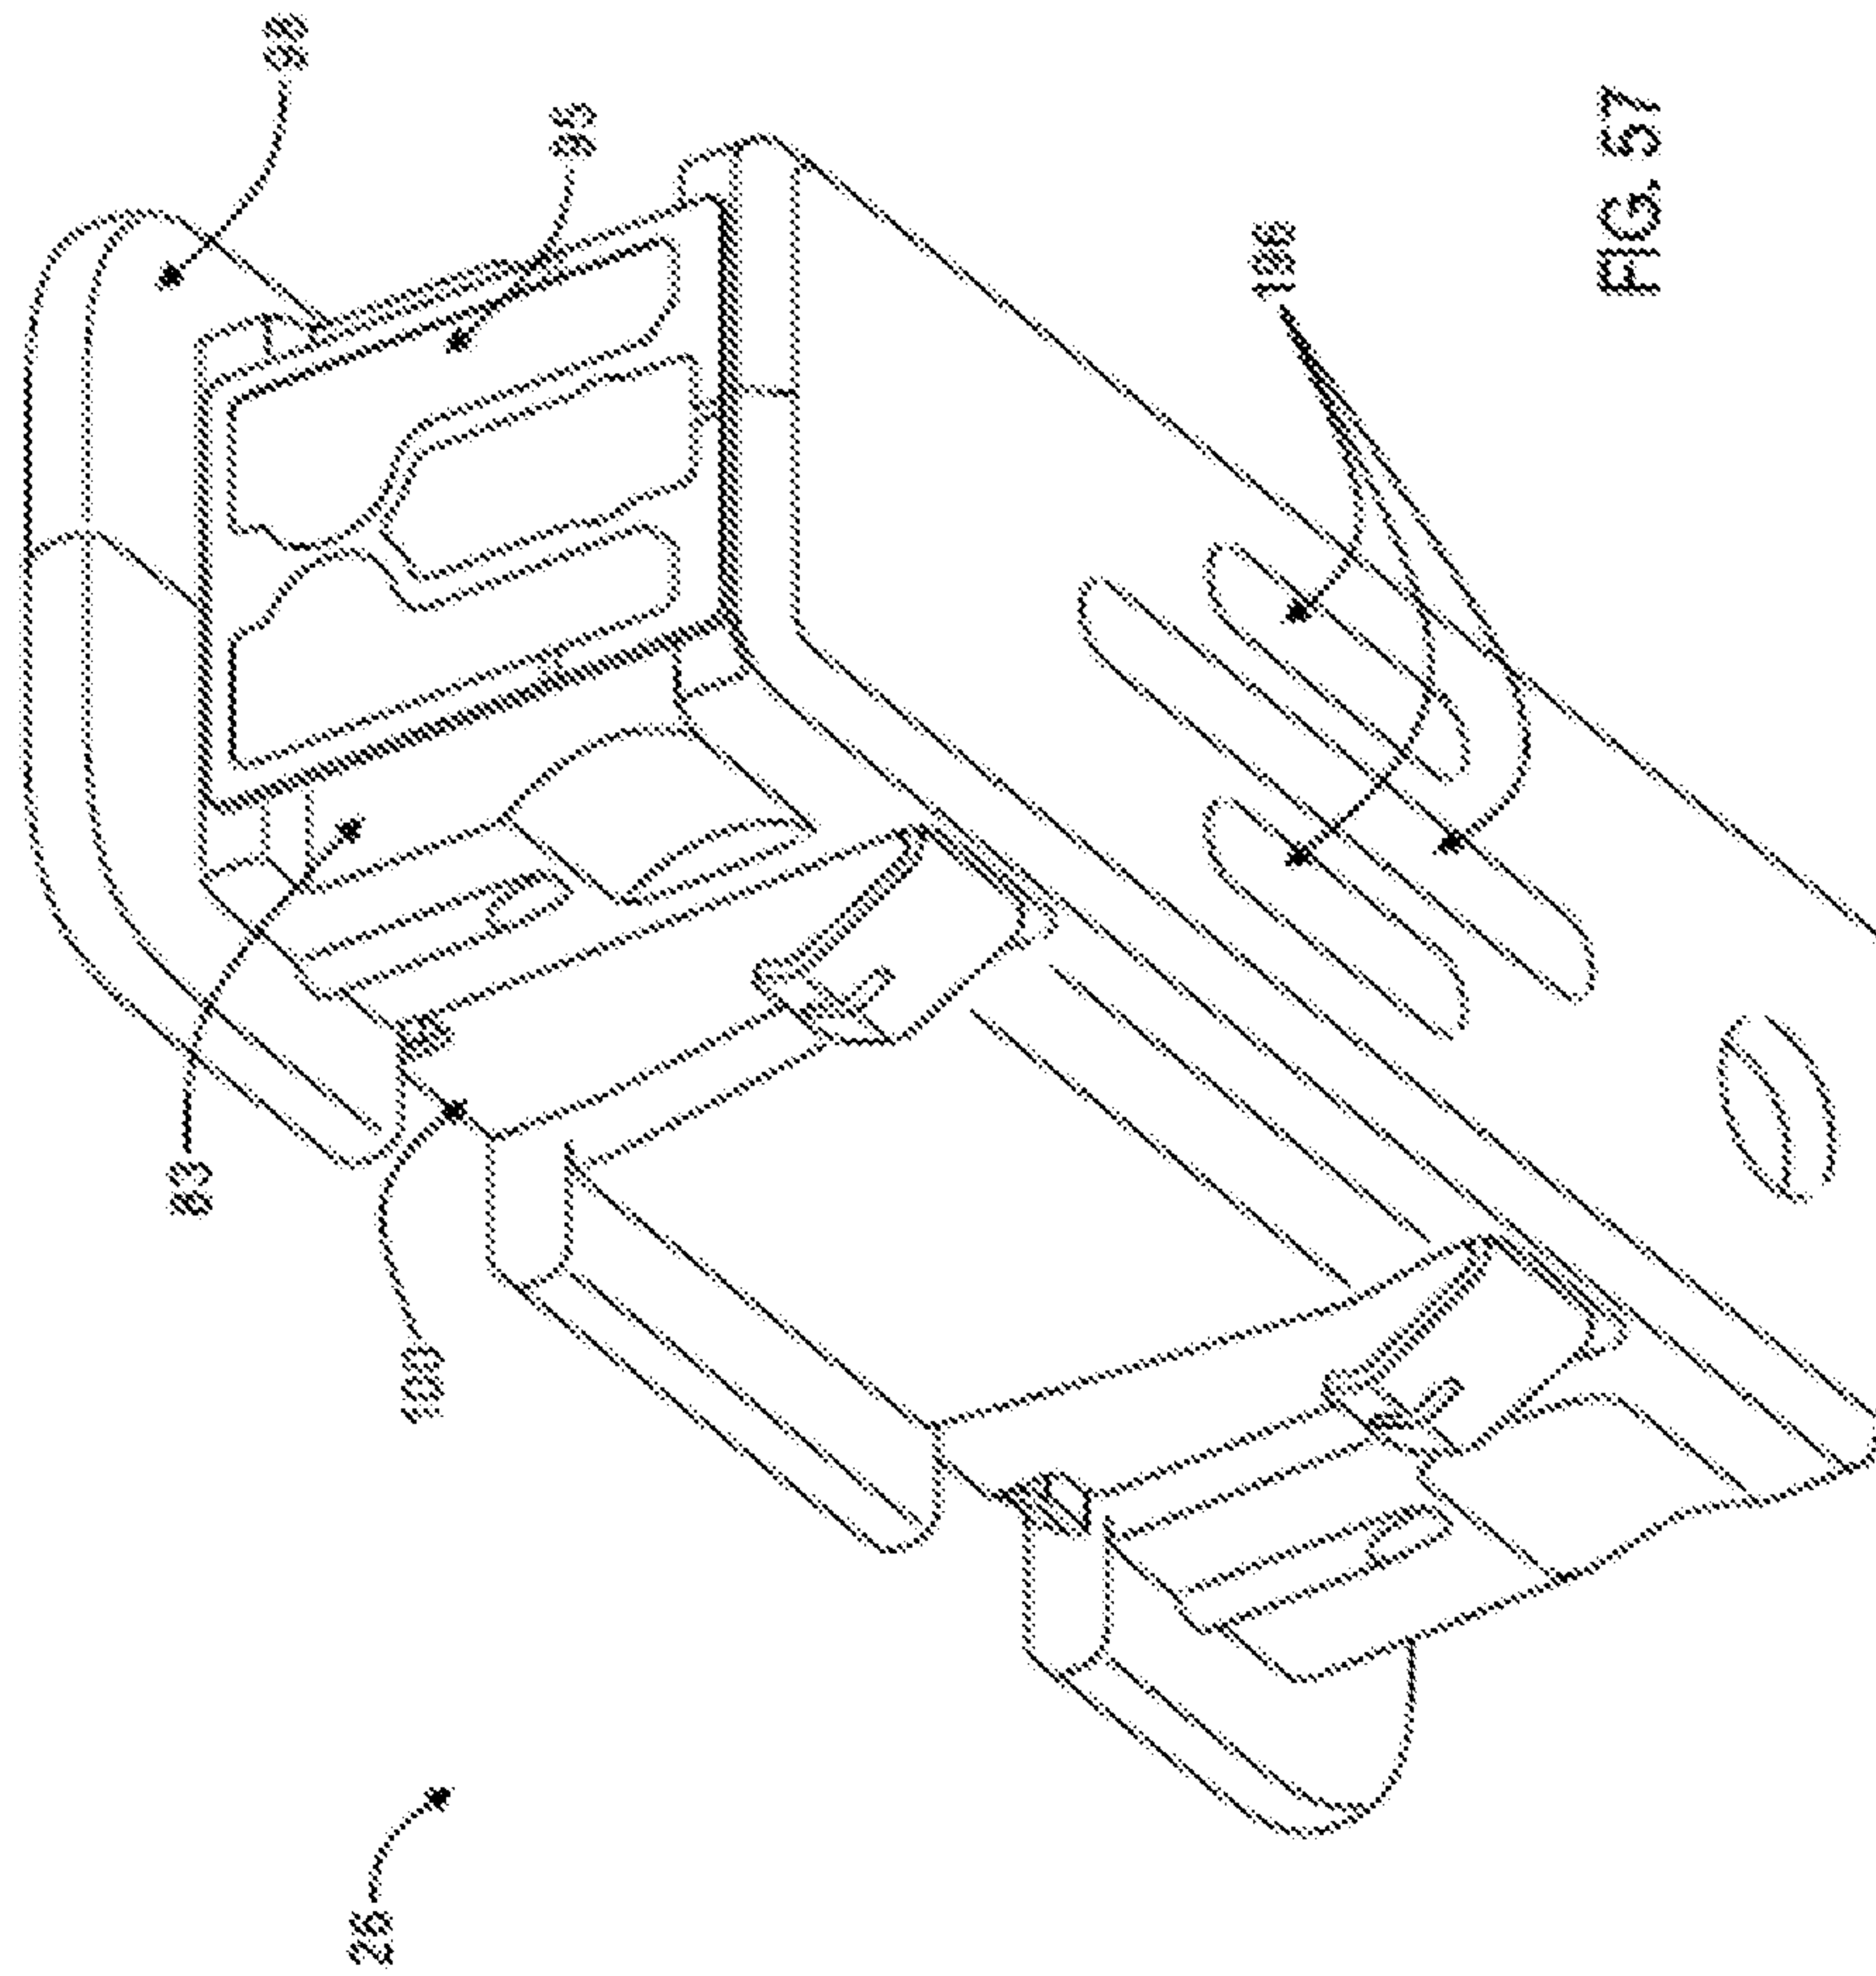

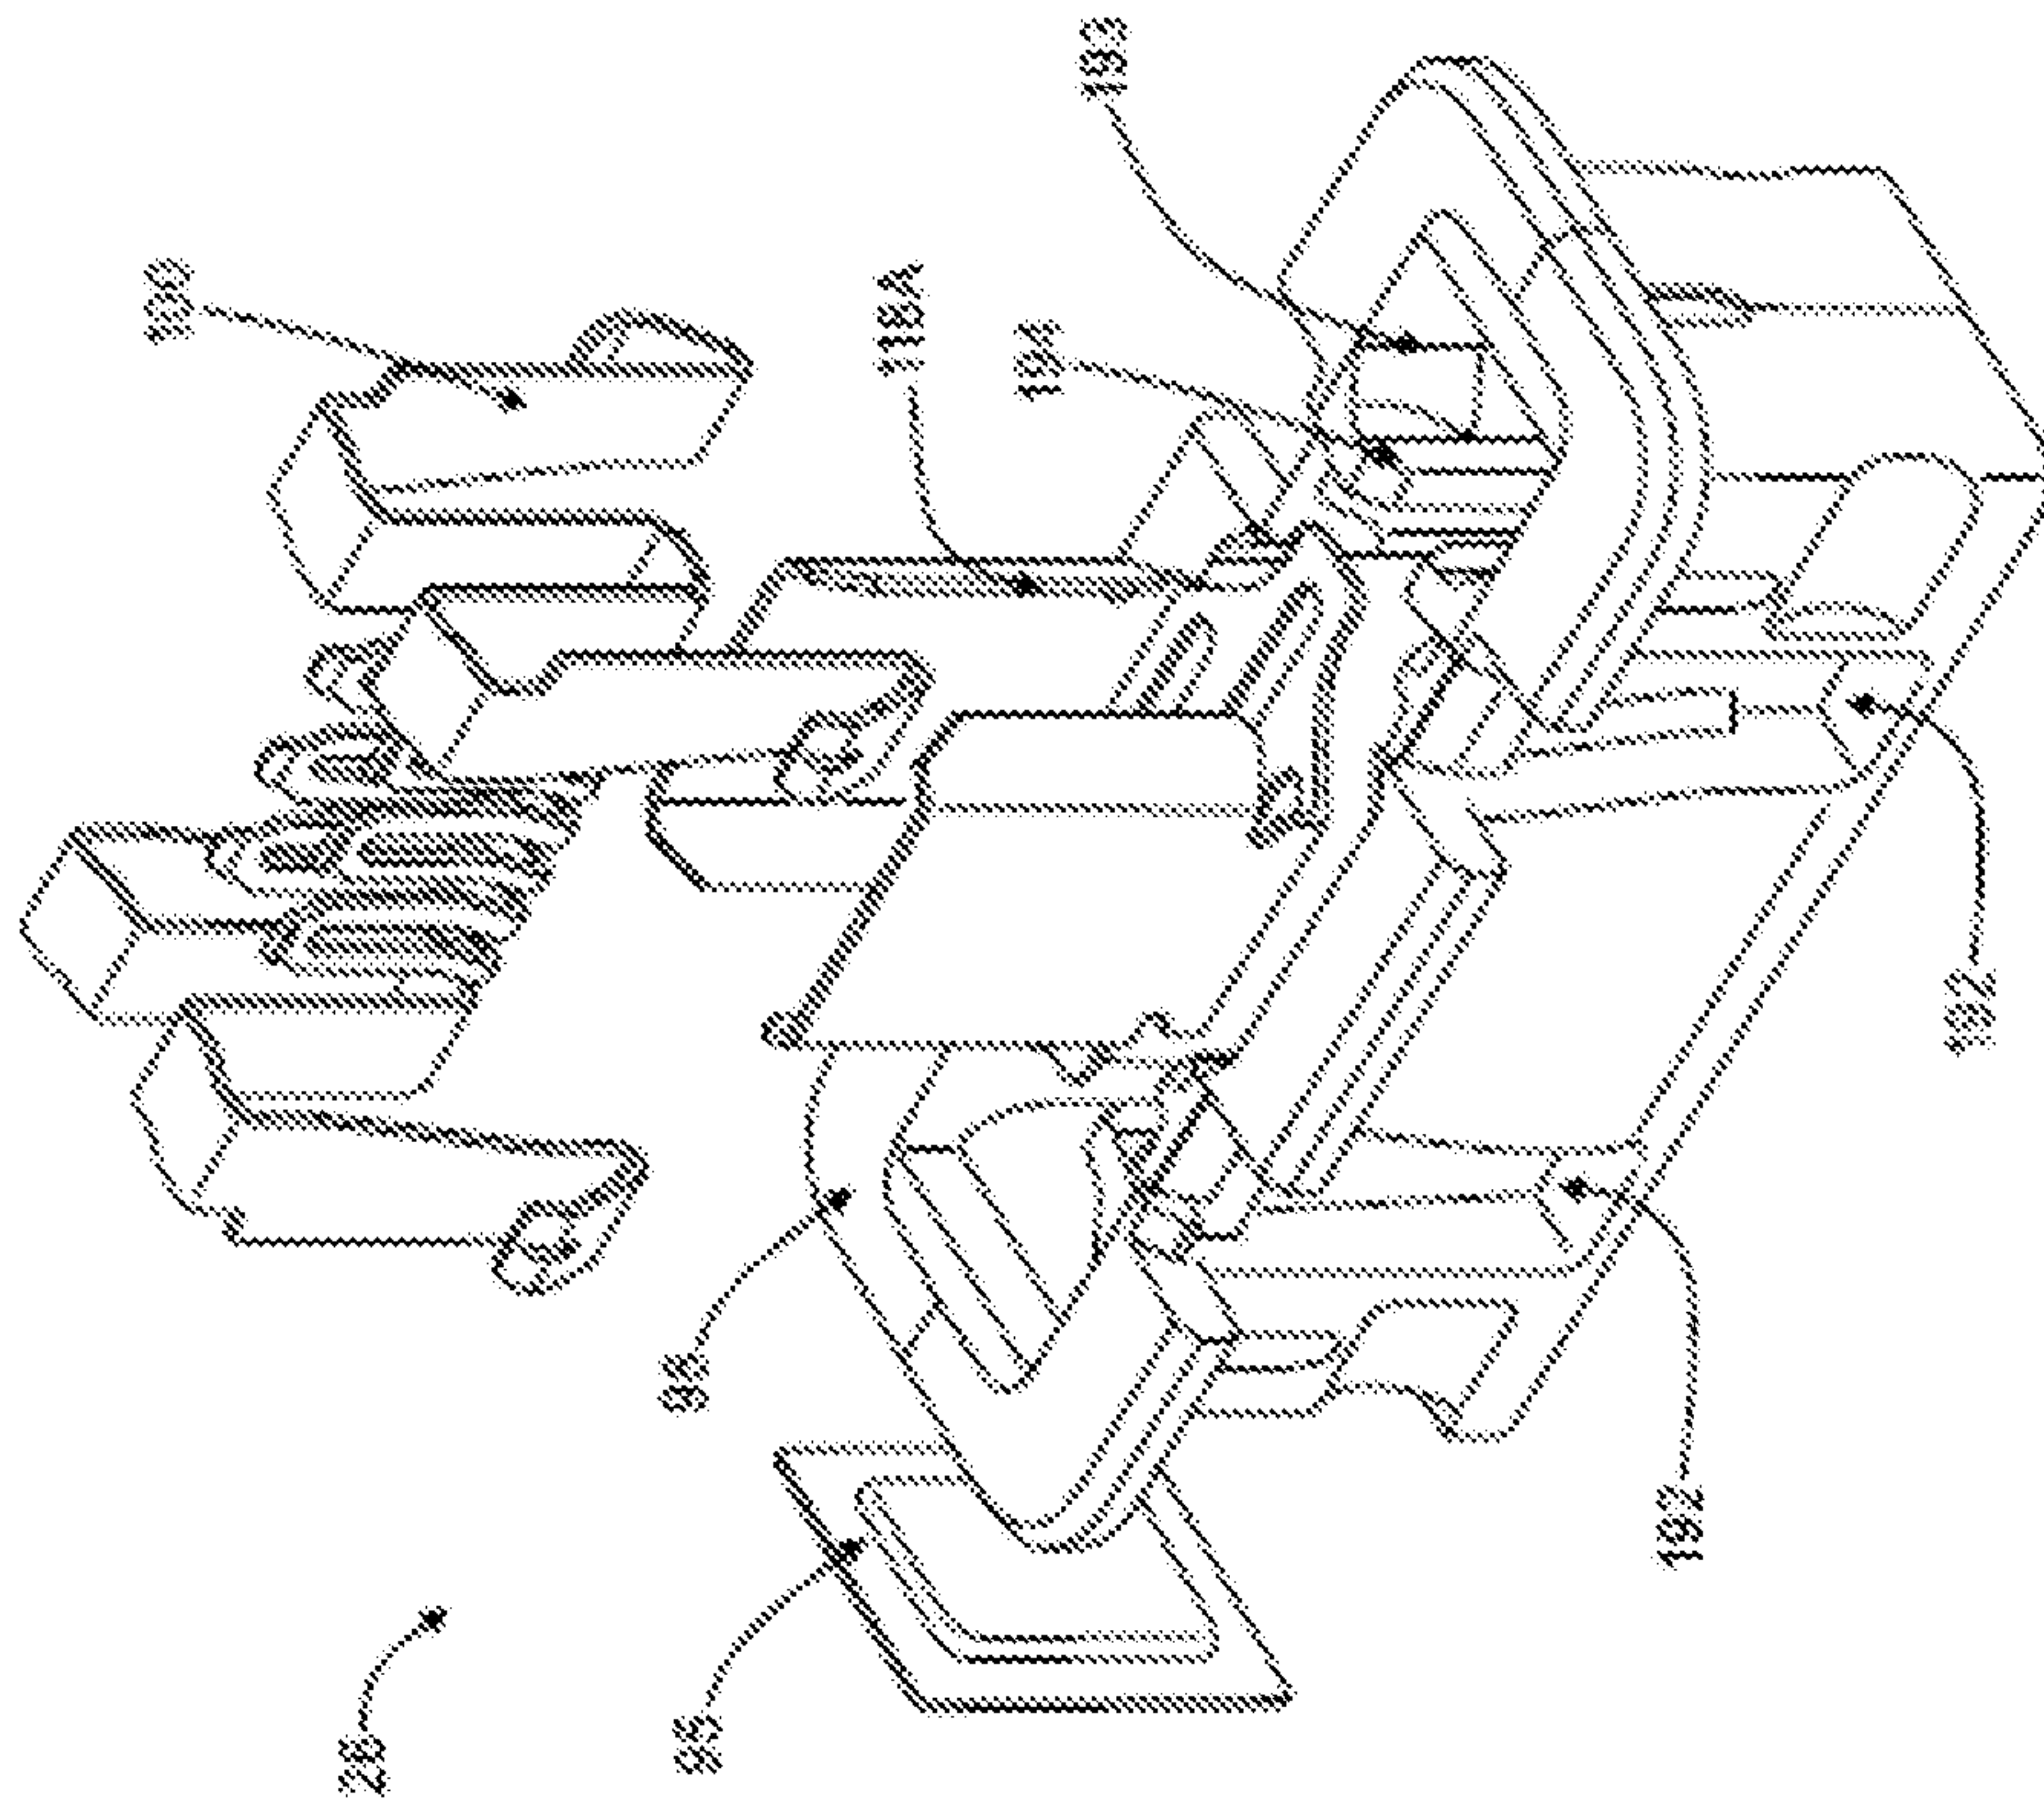

83

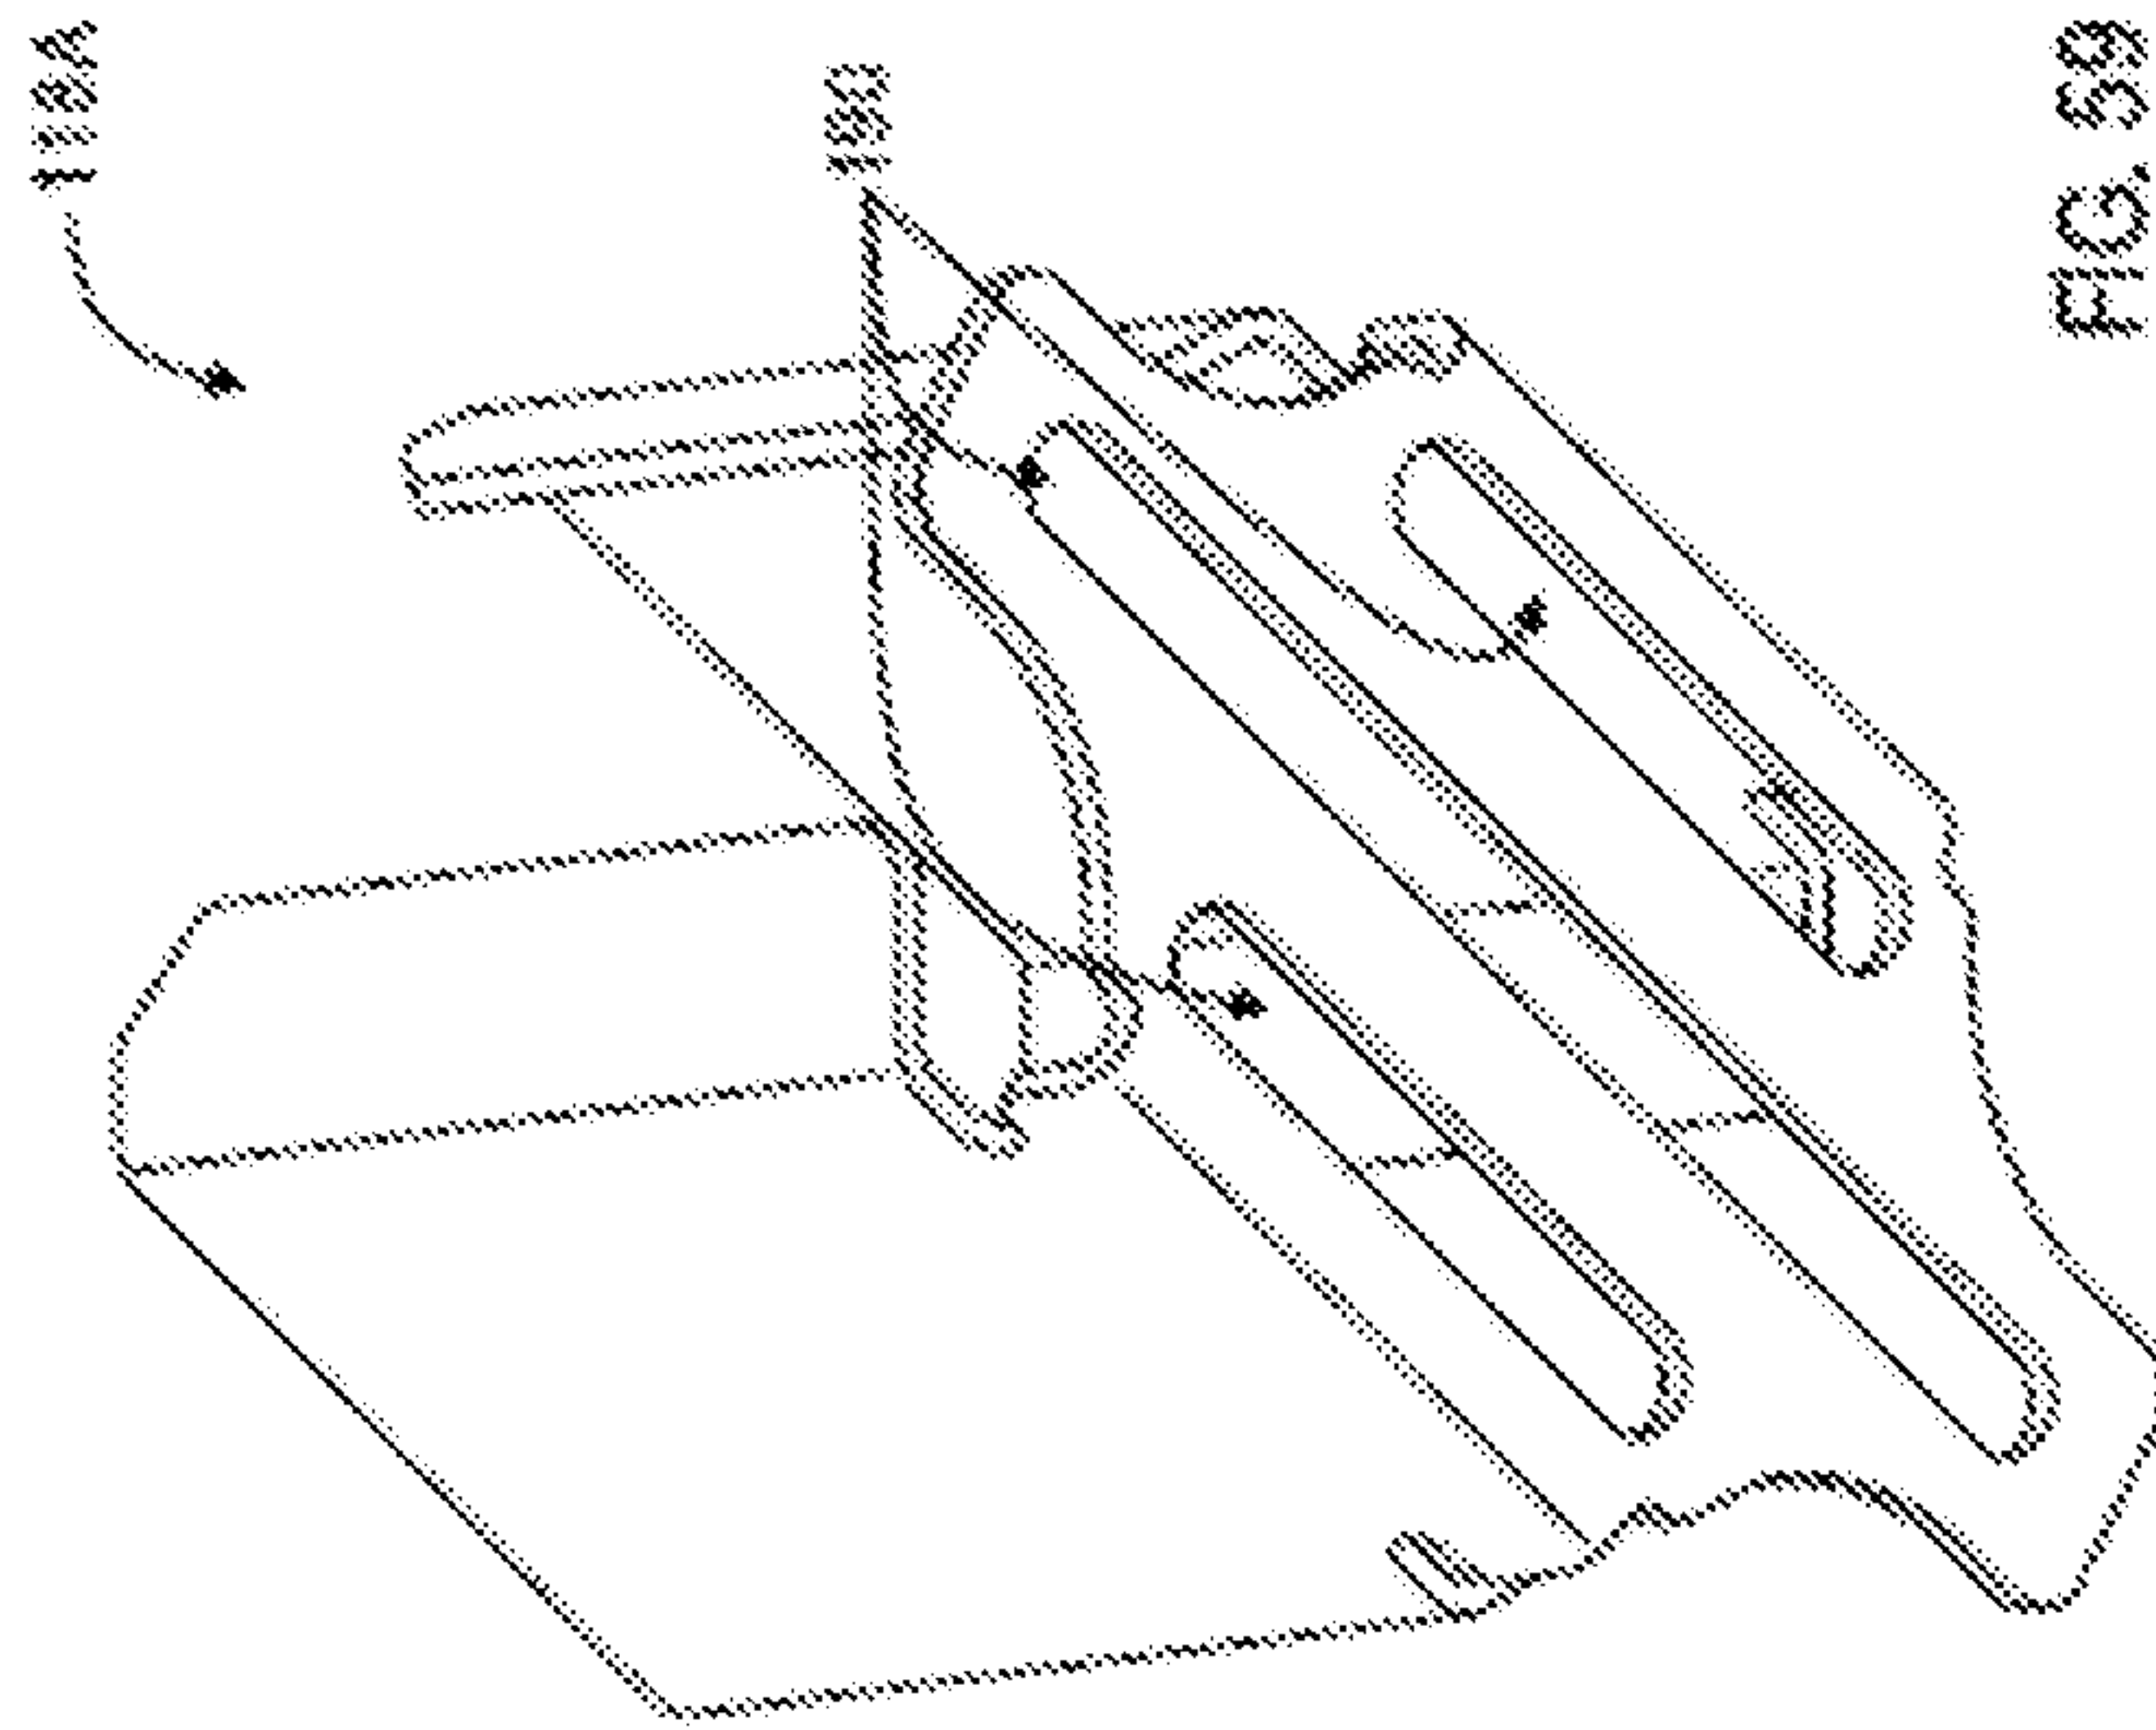

三

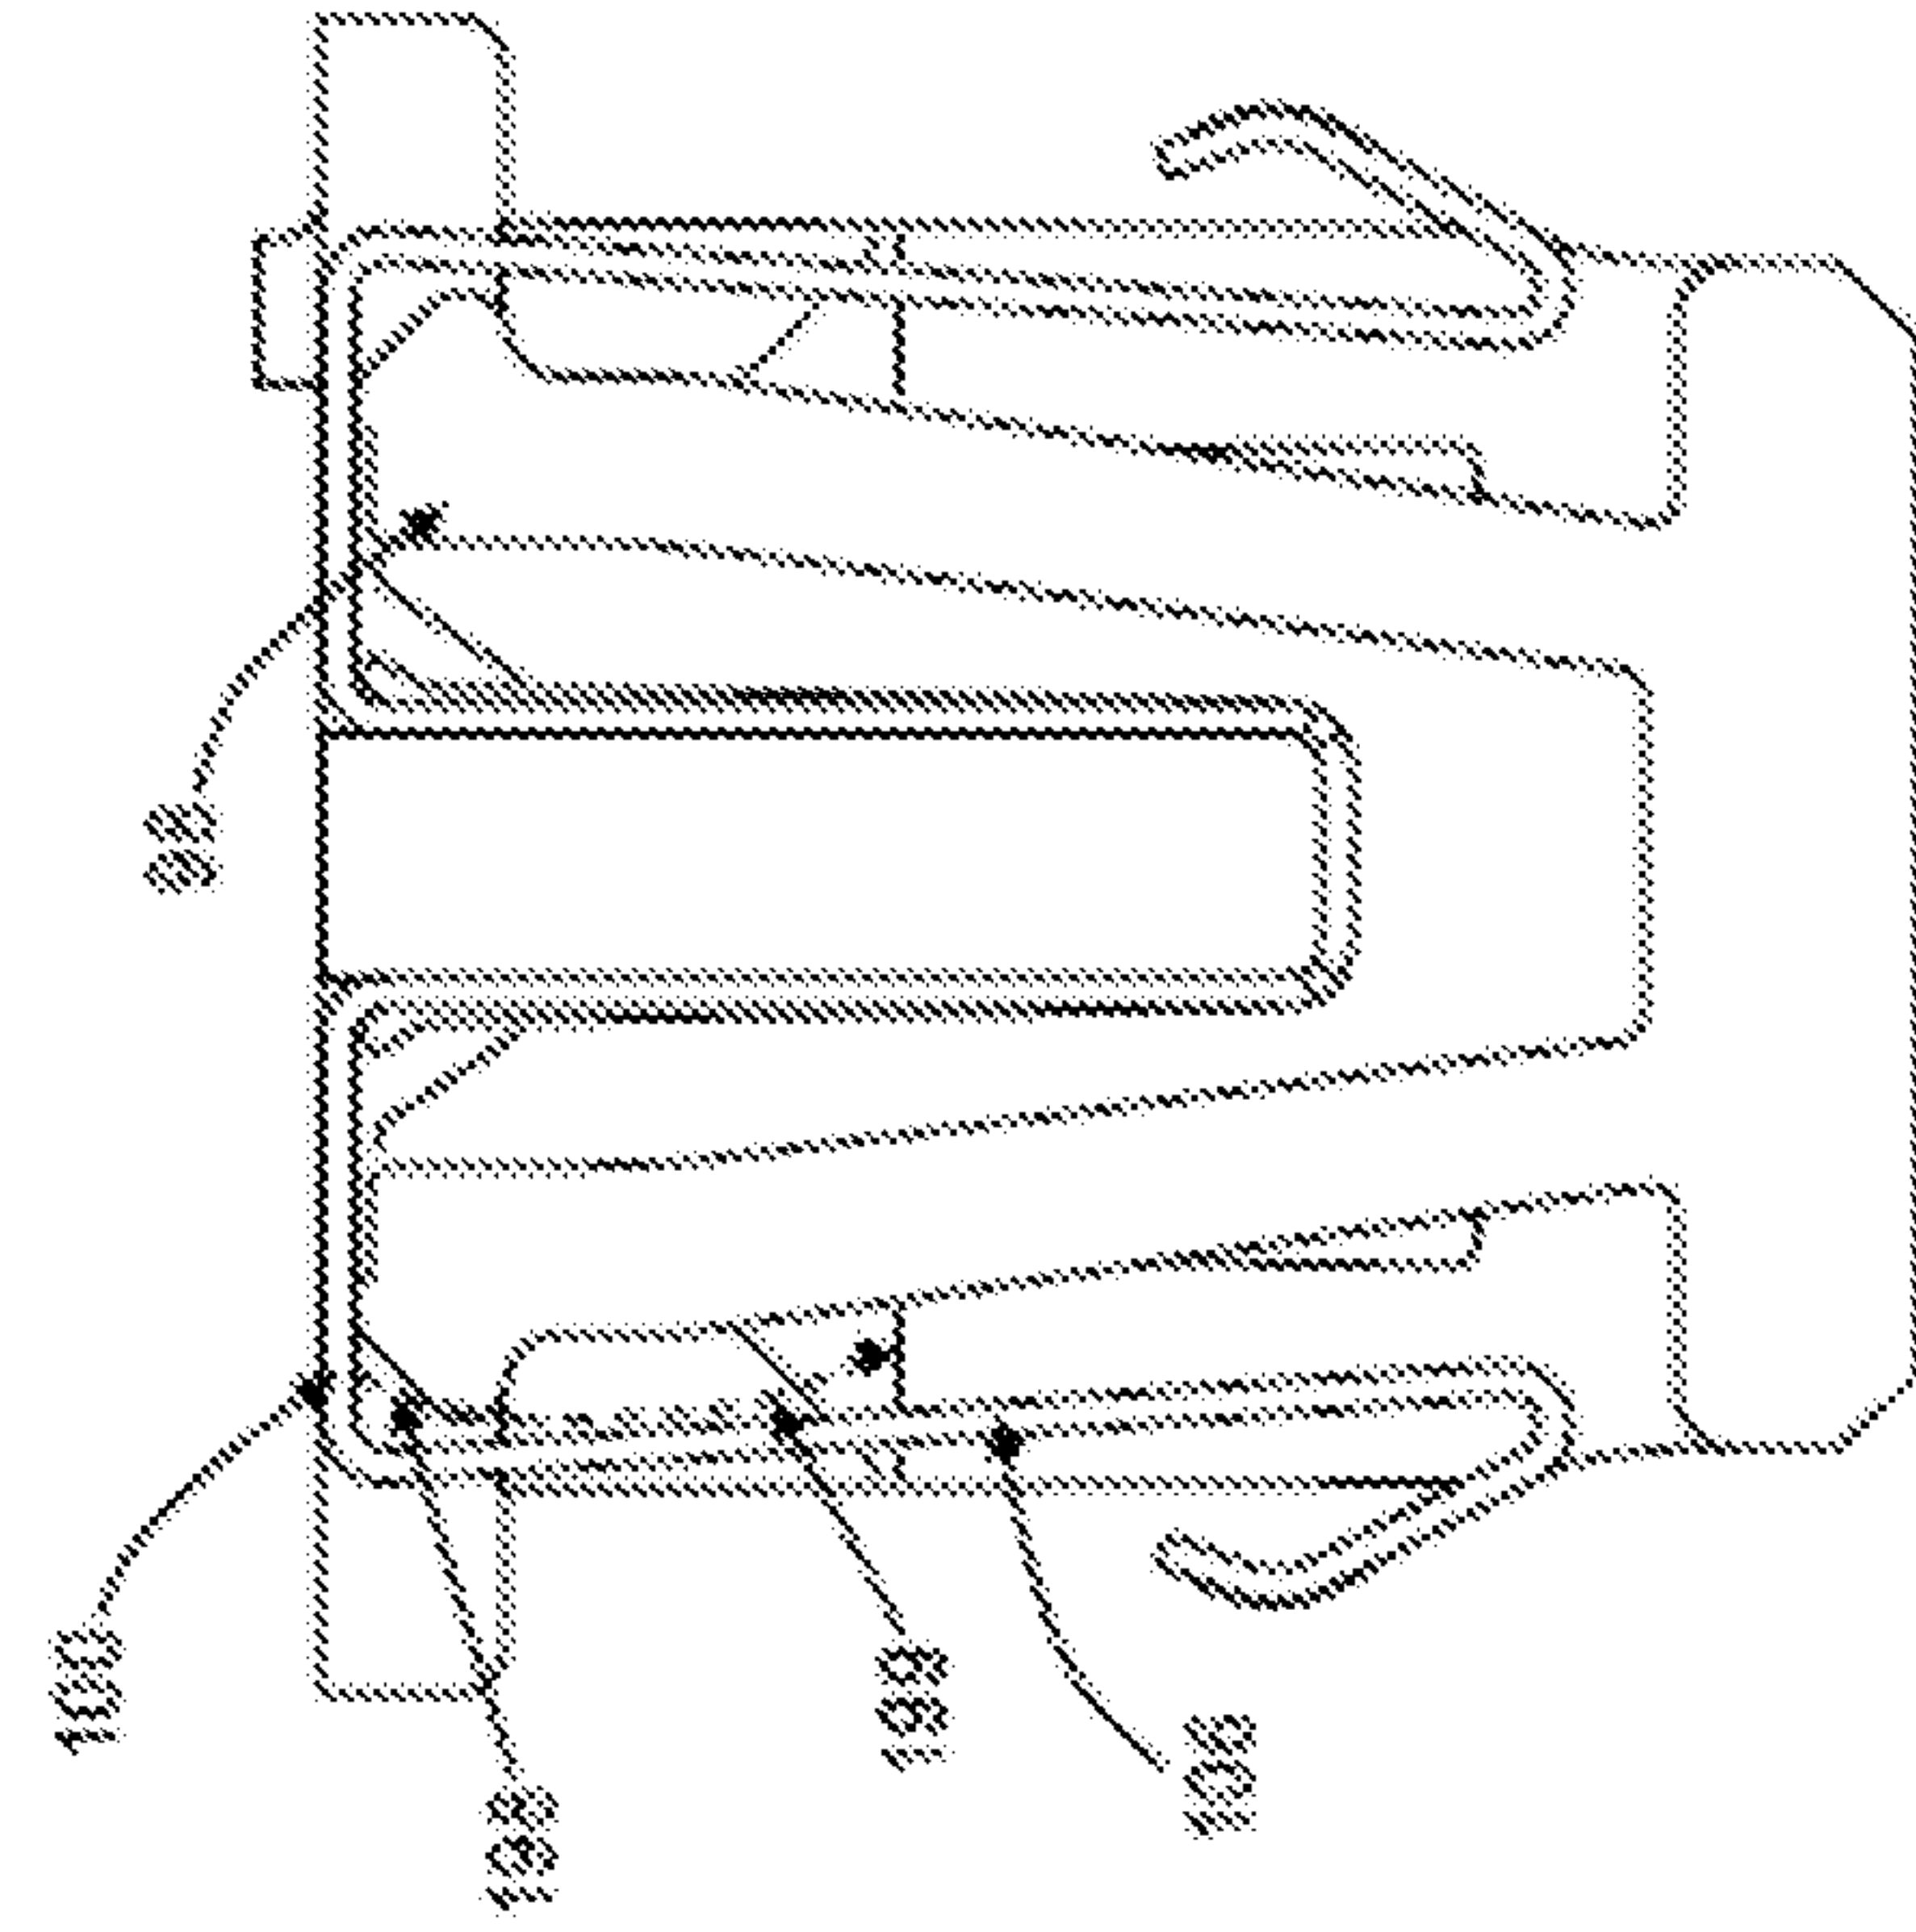


FIG. 60B

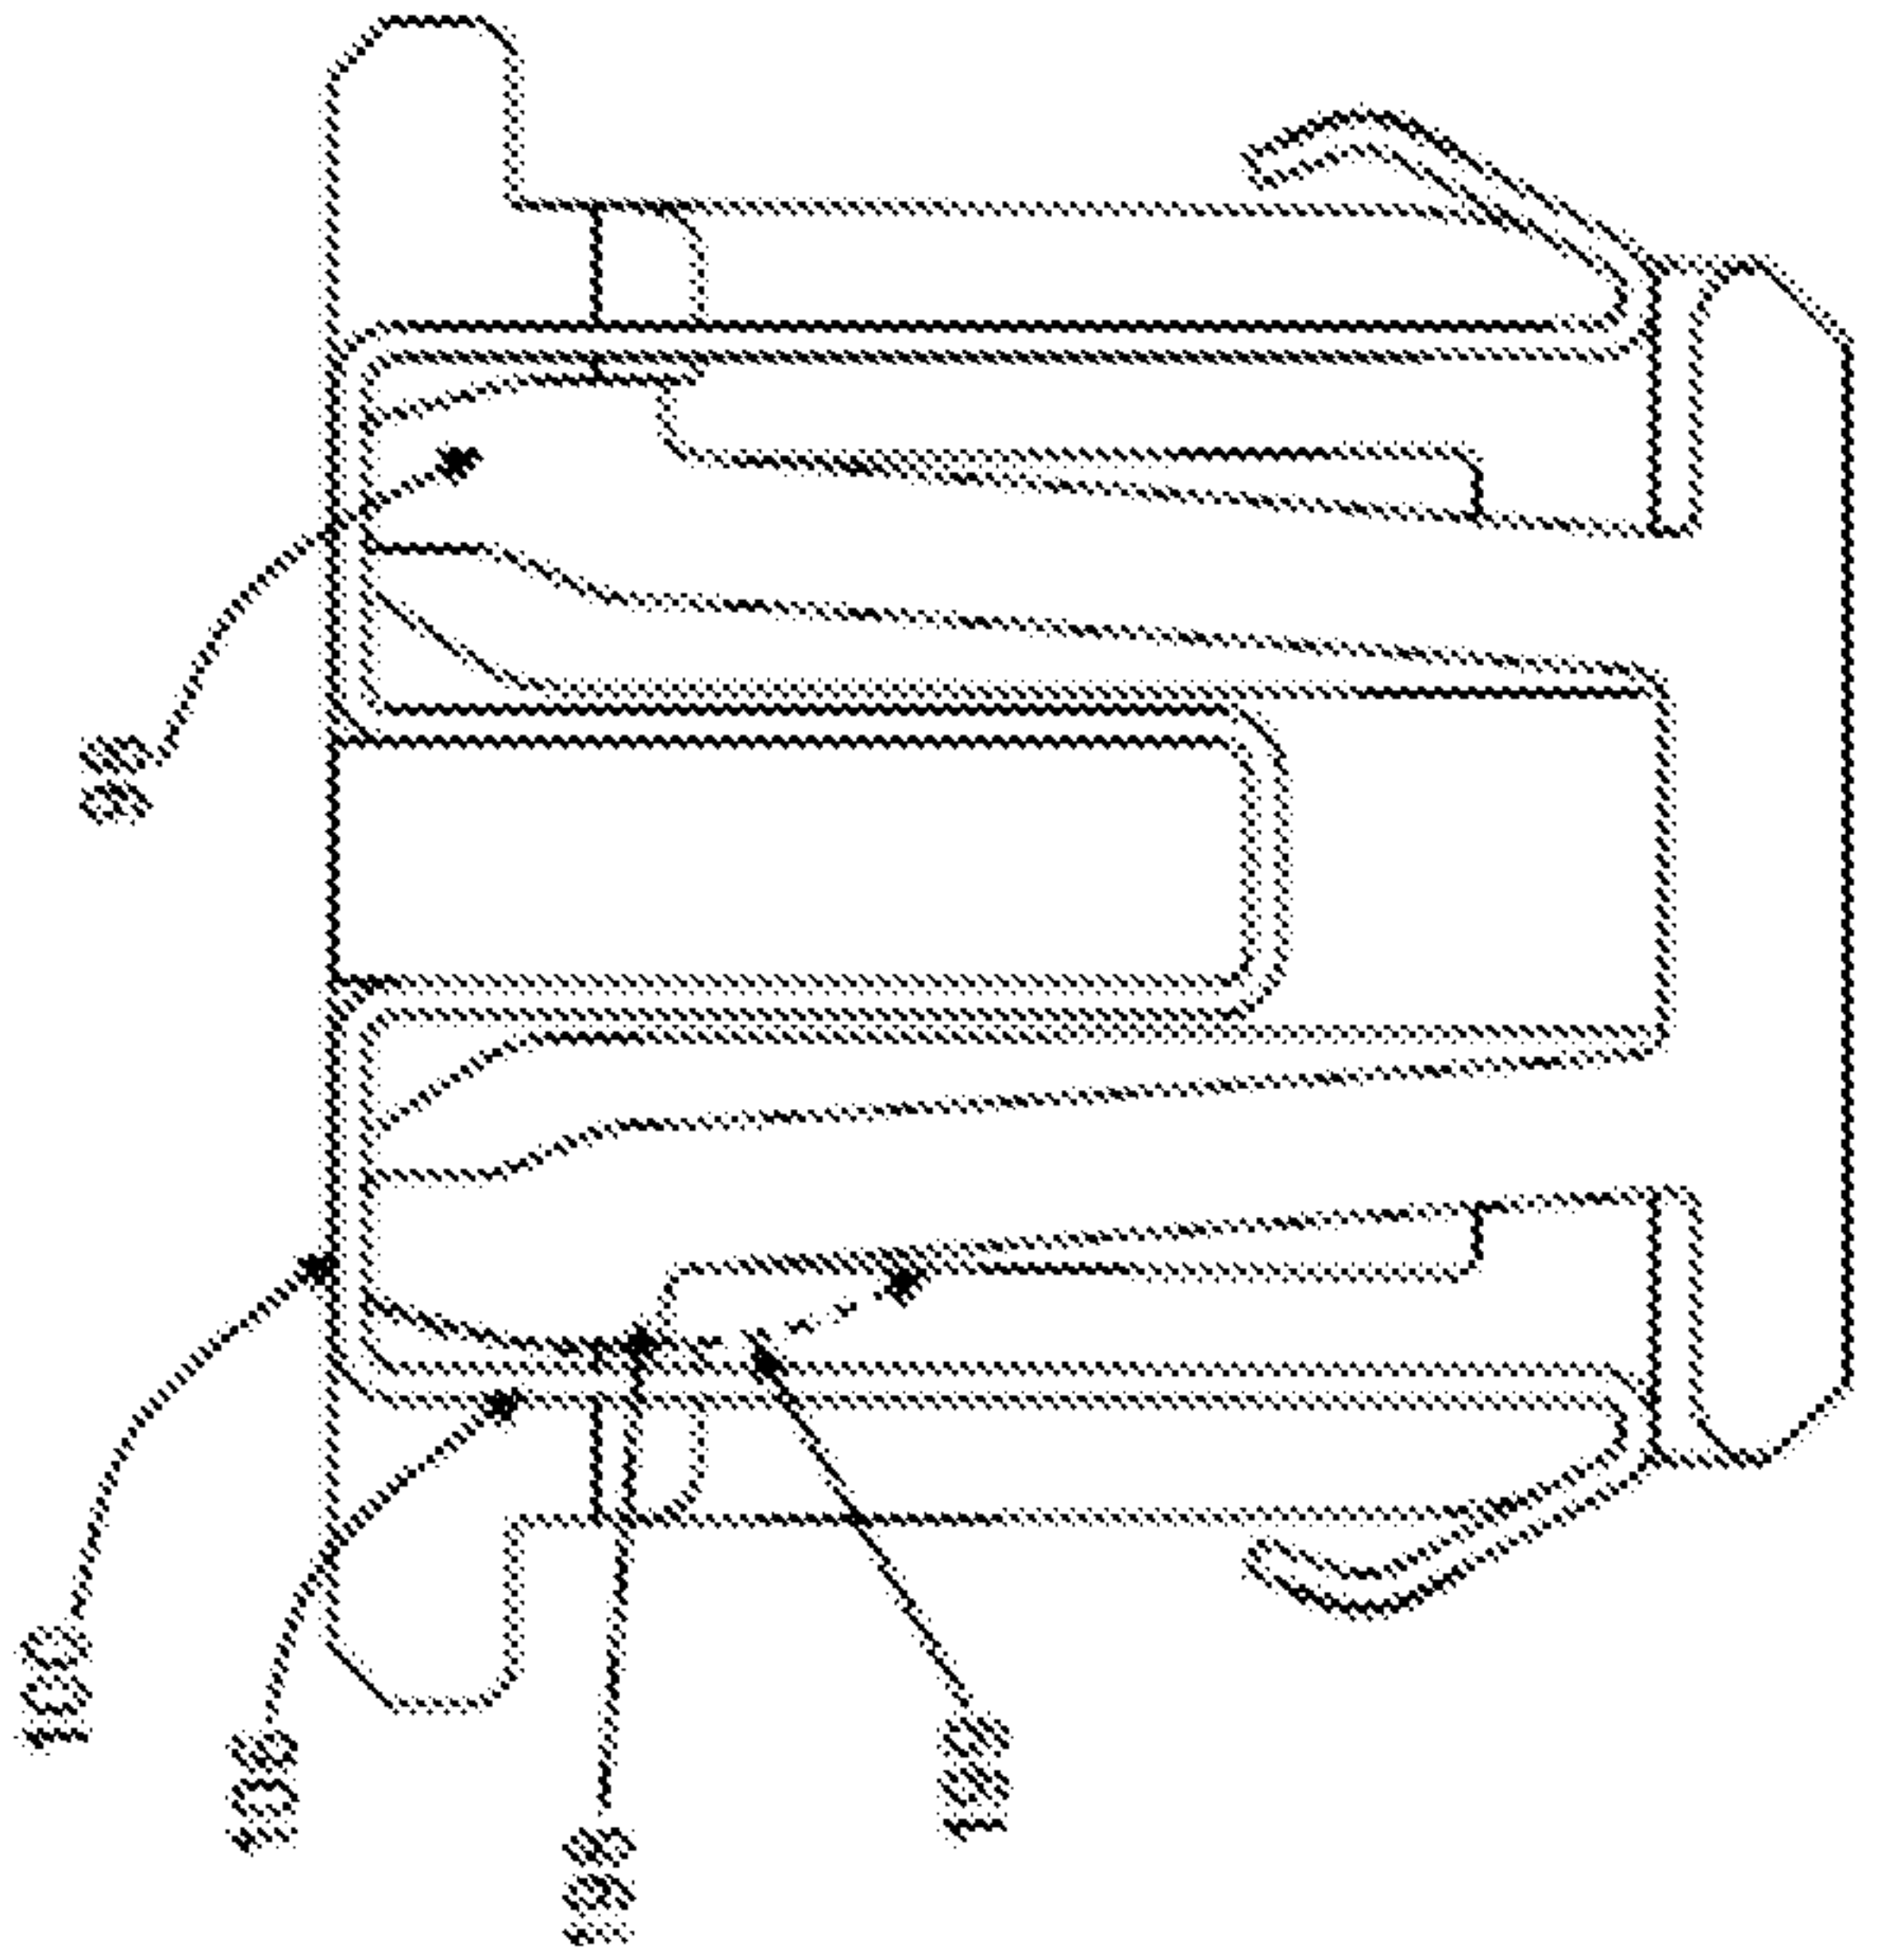


FIG. 60A

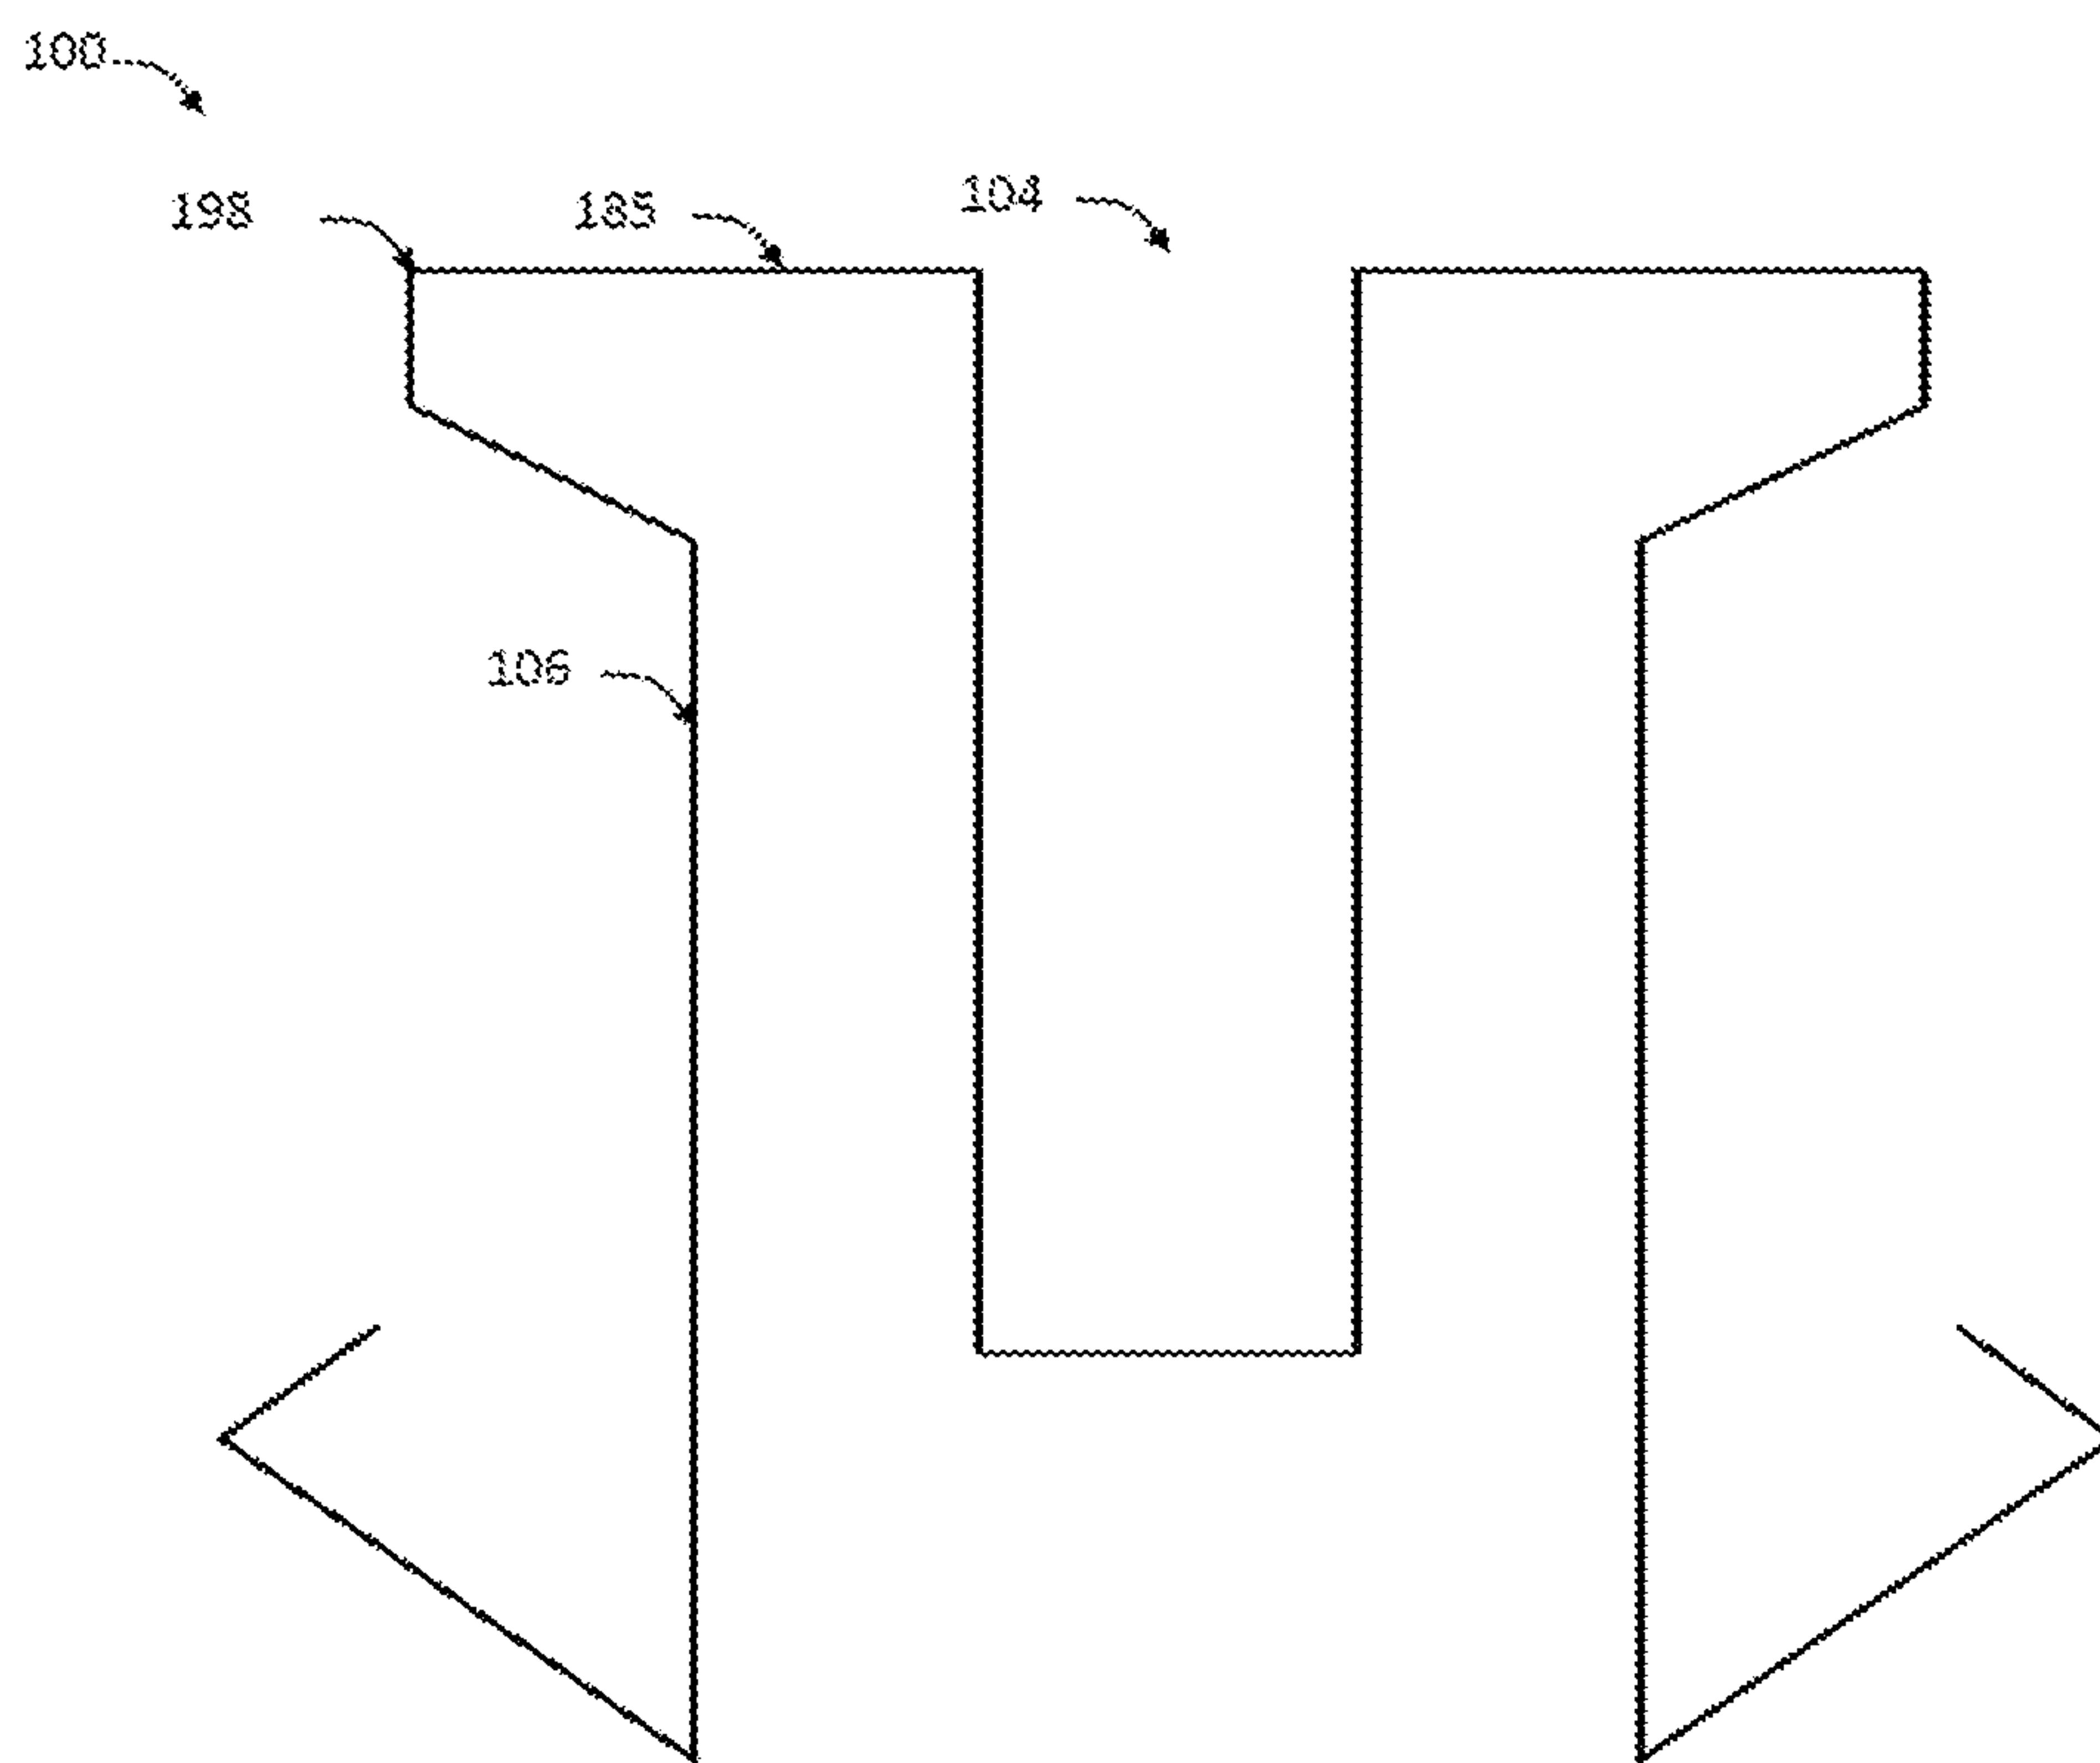


FIG. 61

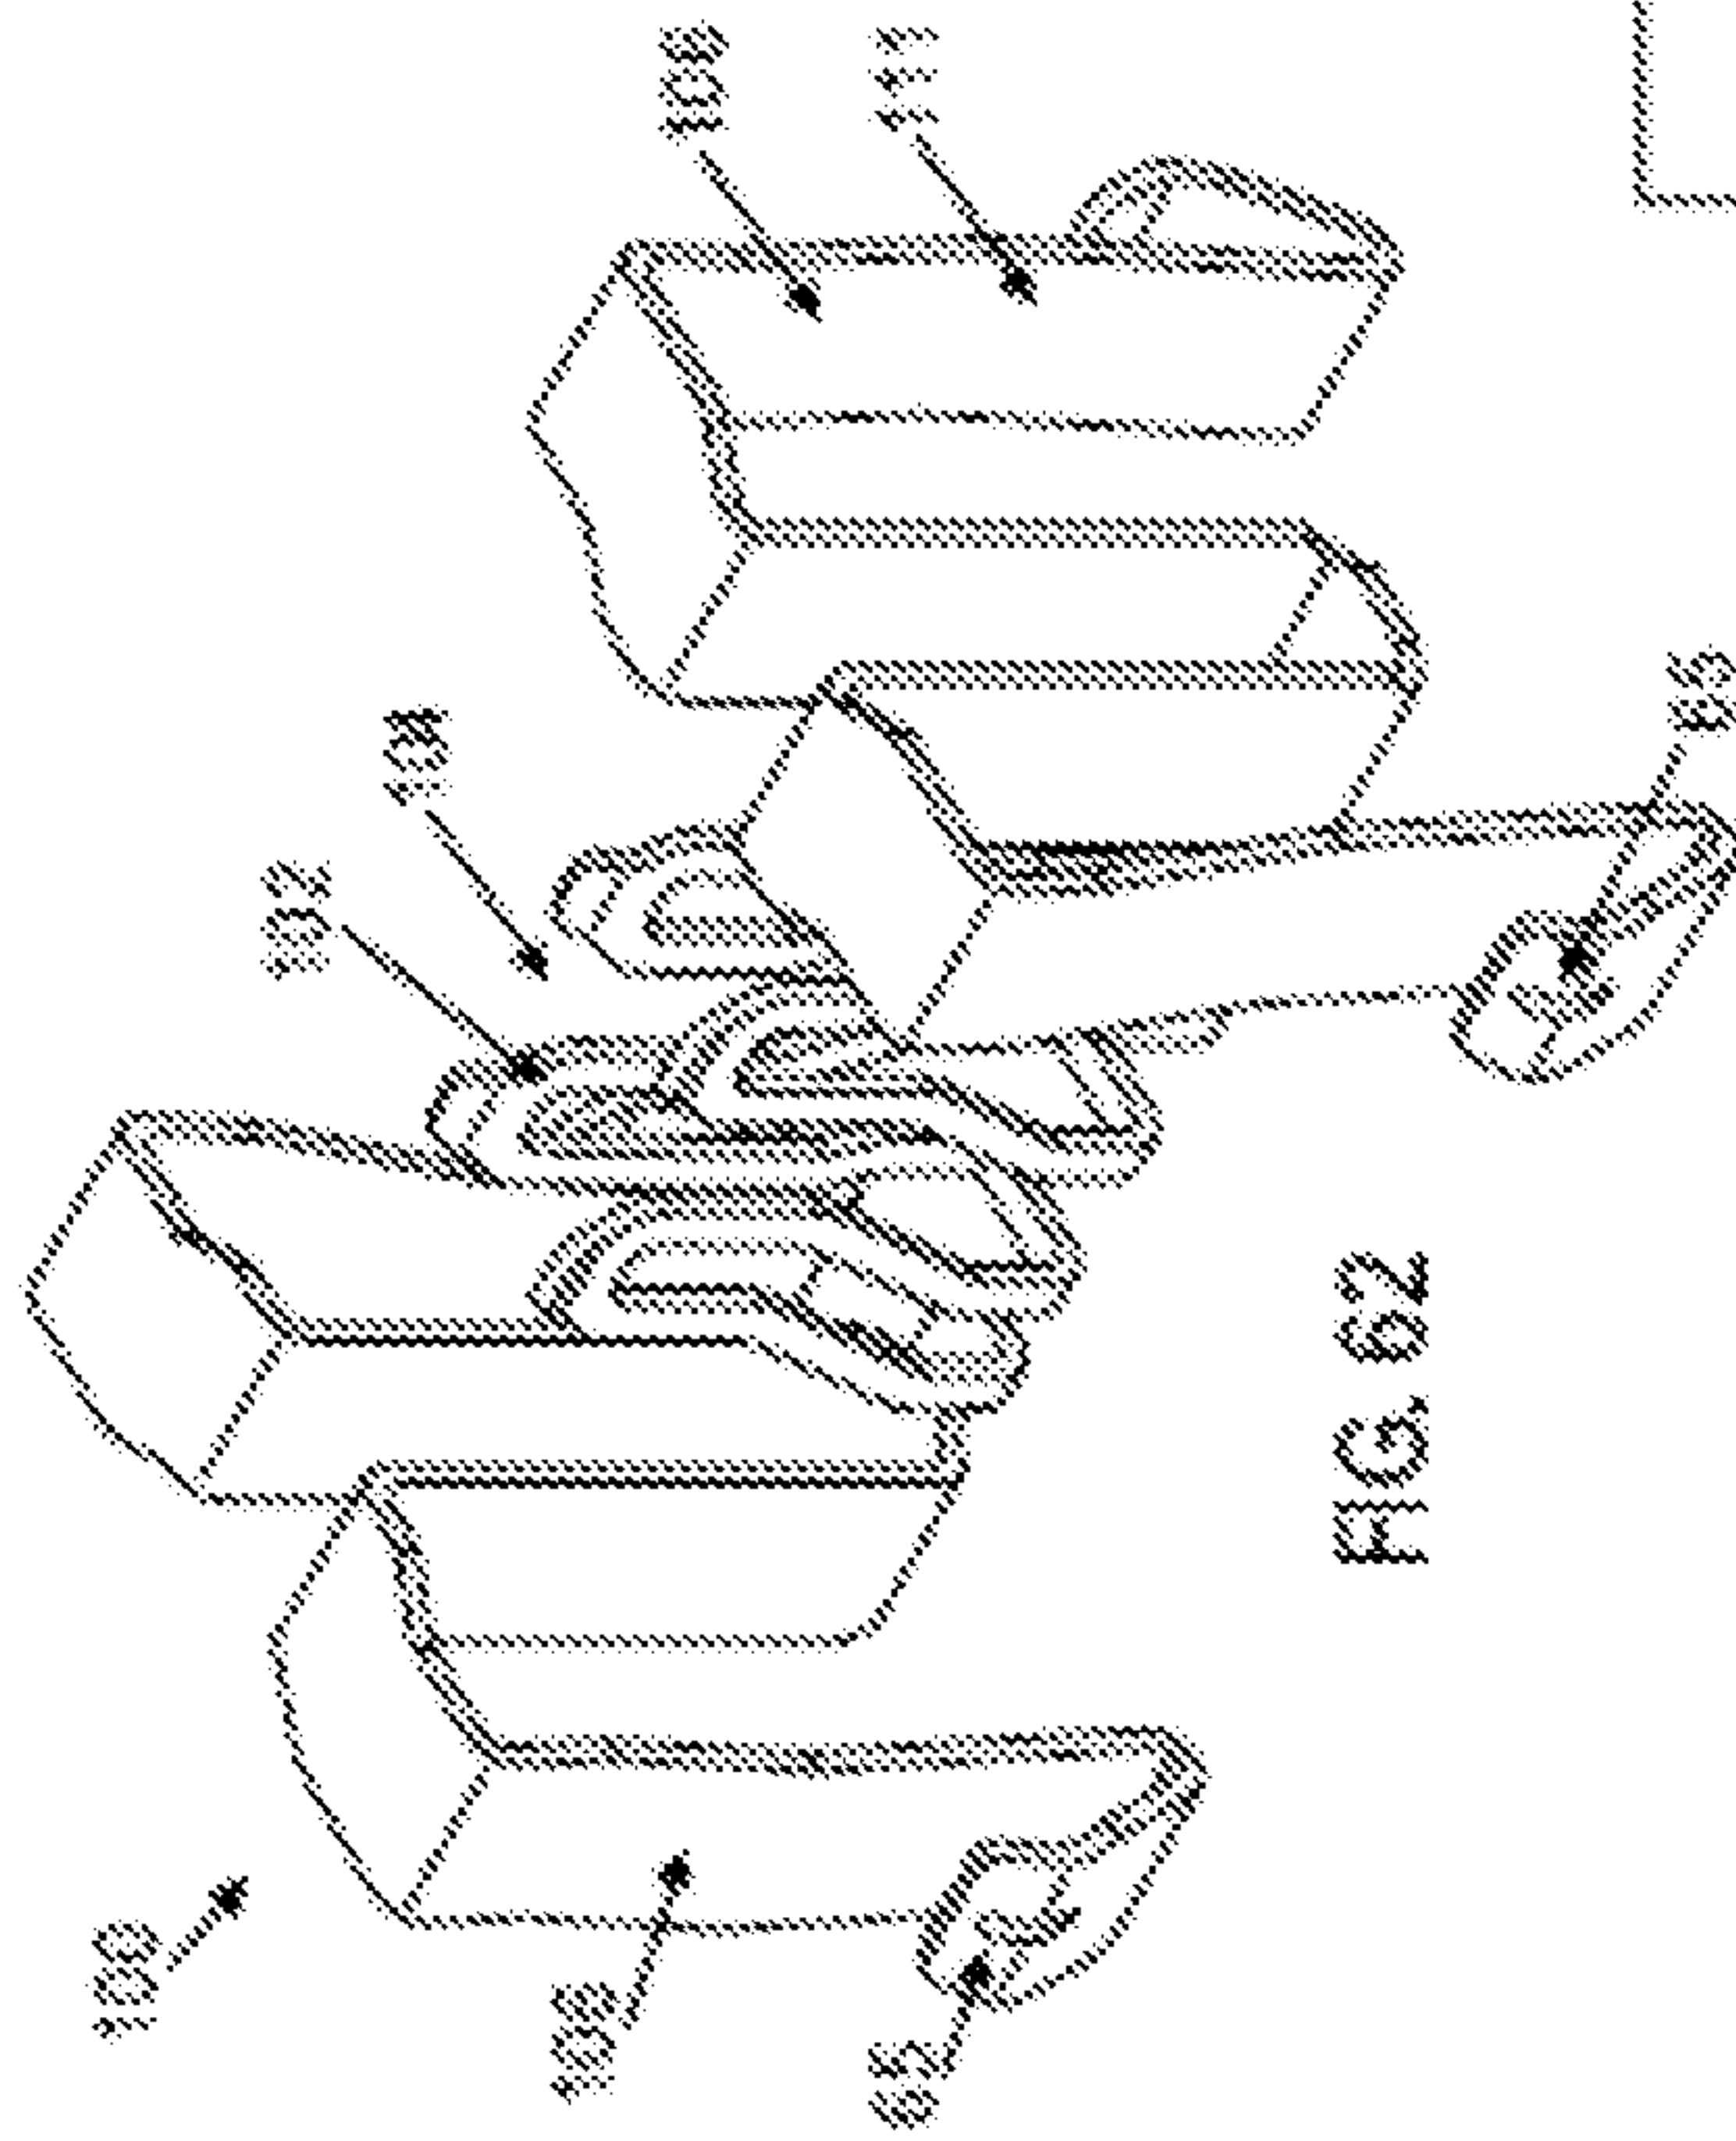


FIG. 62

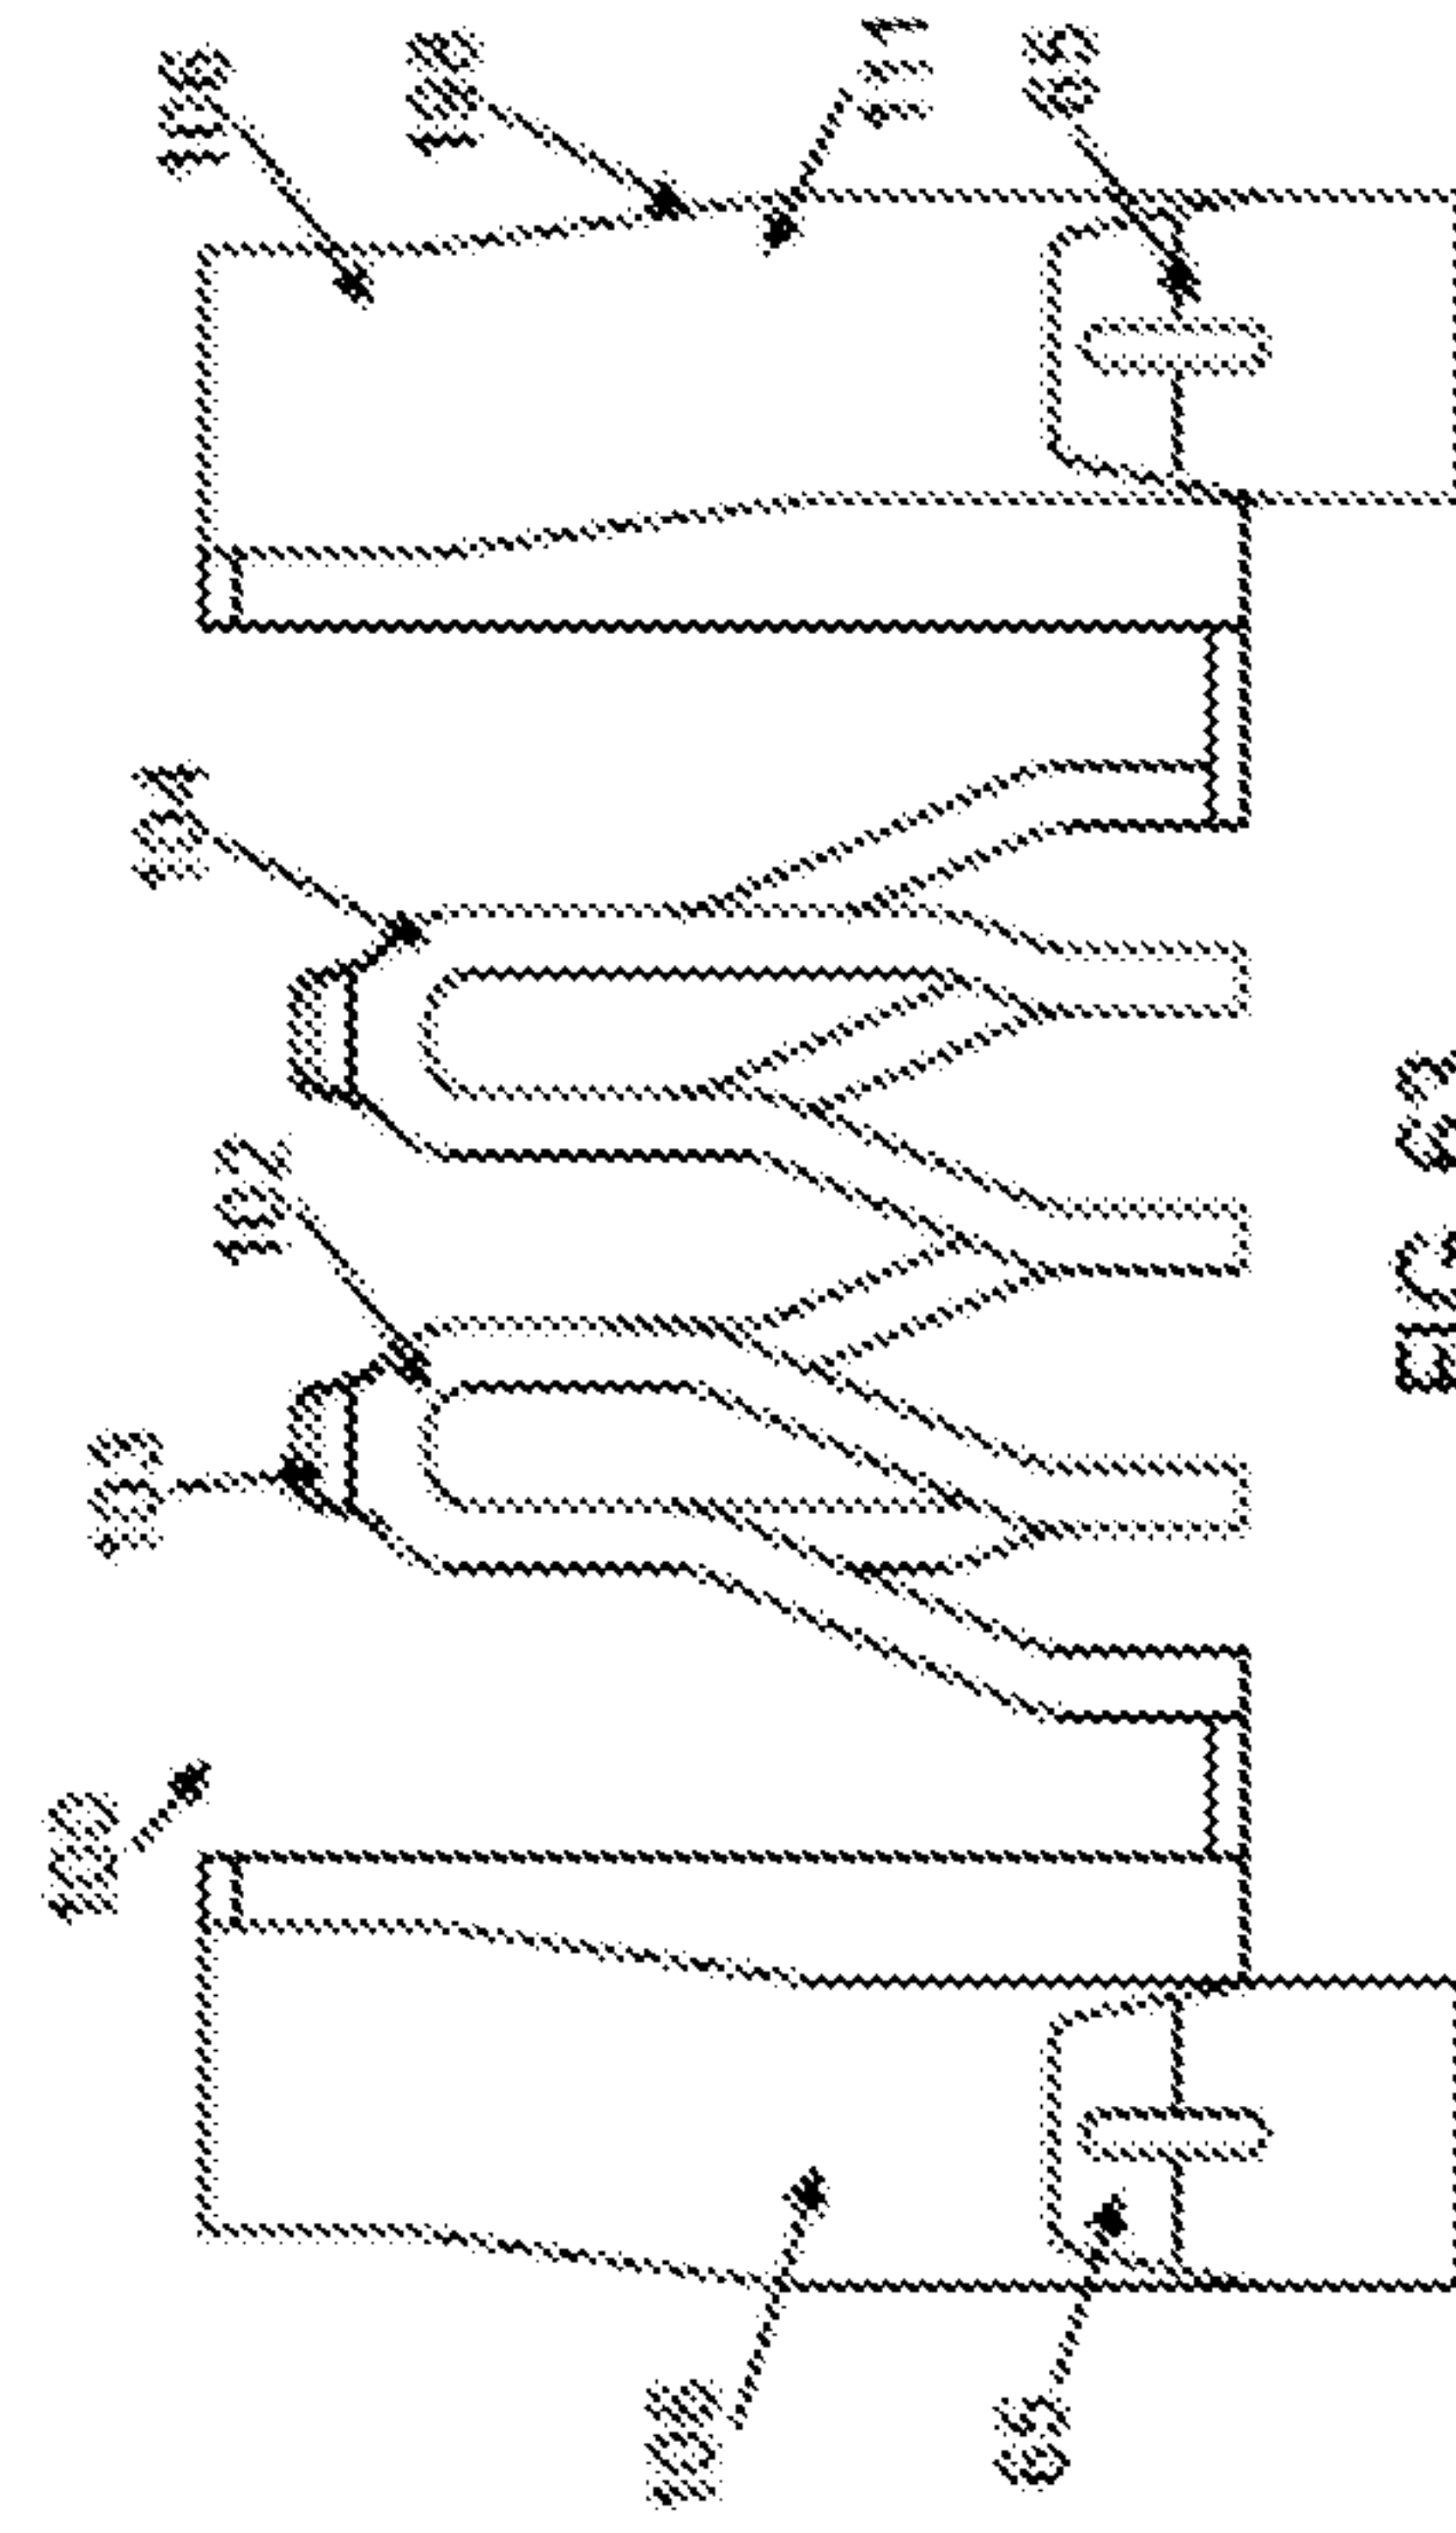
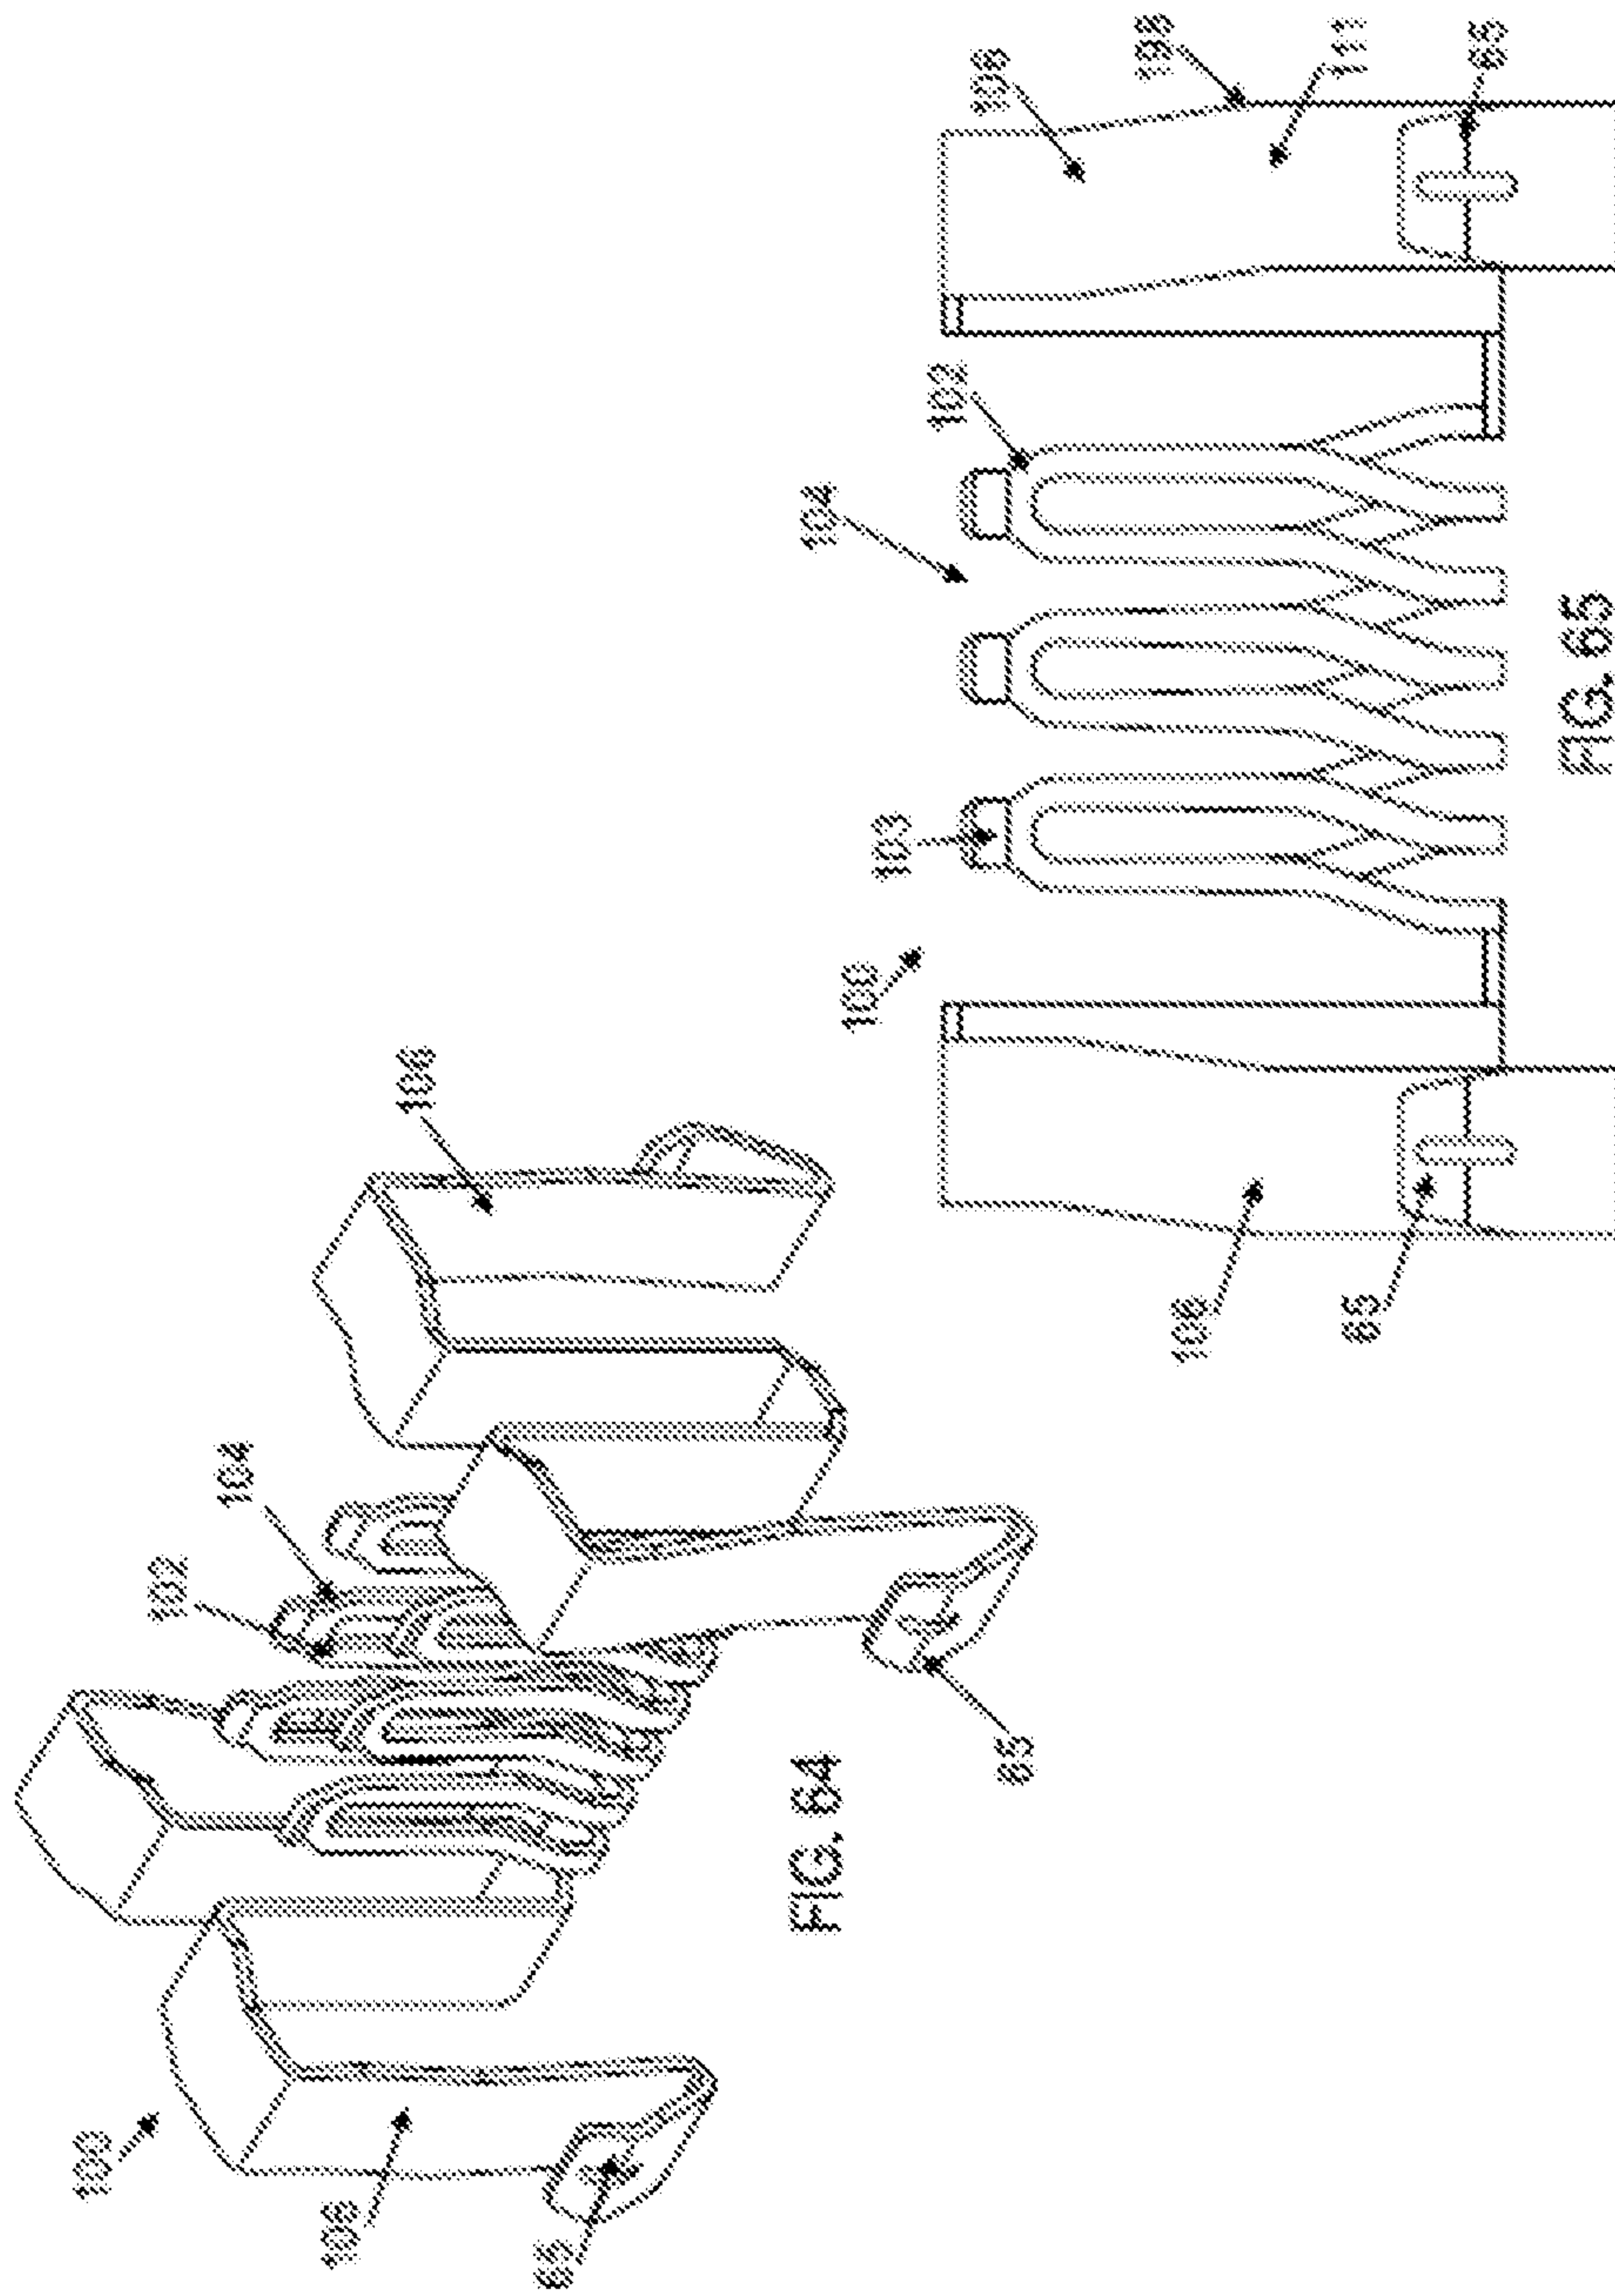
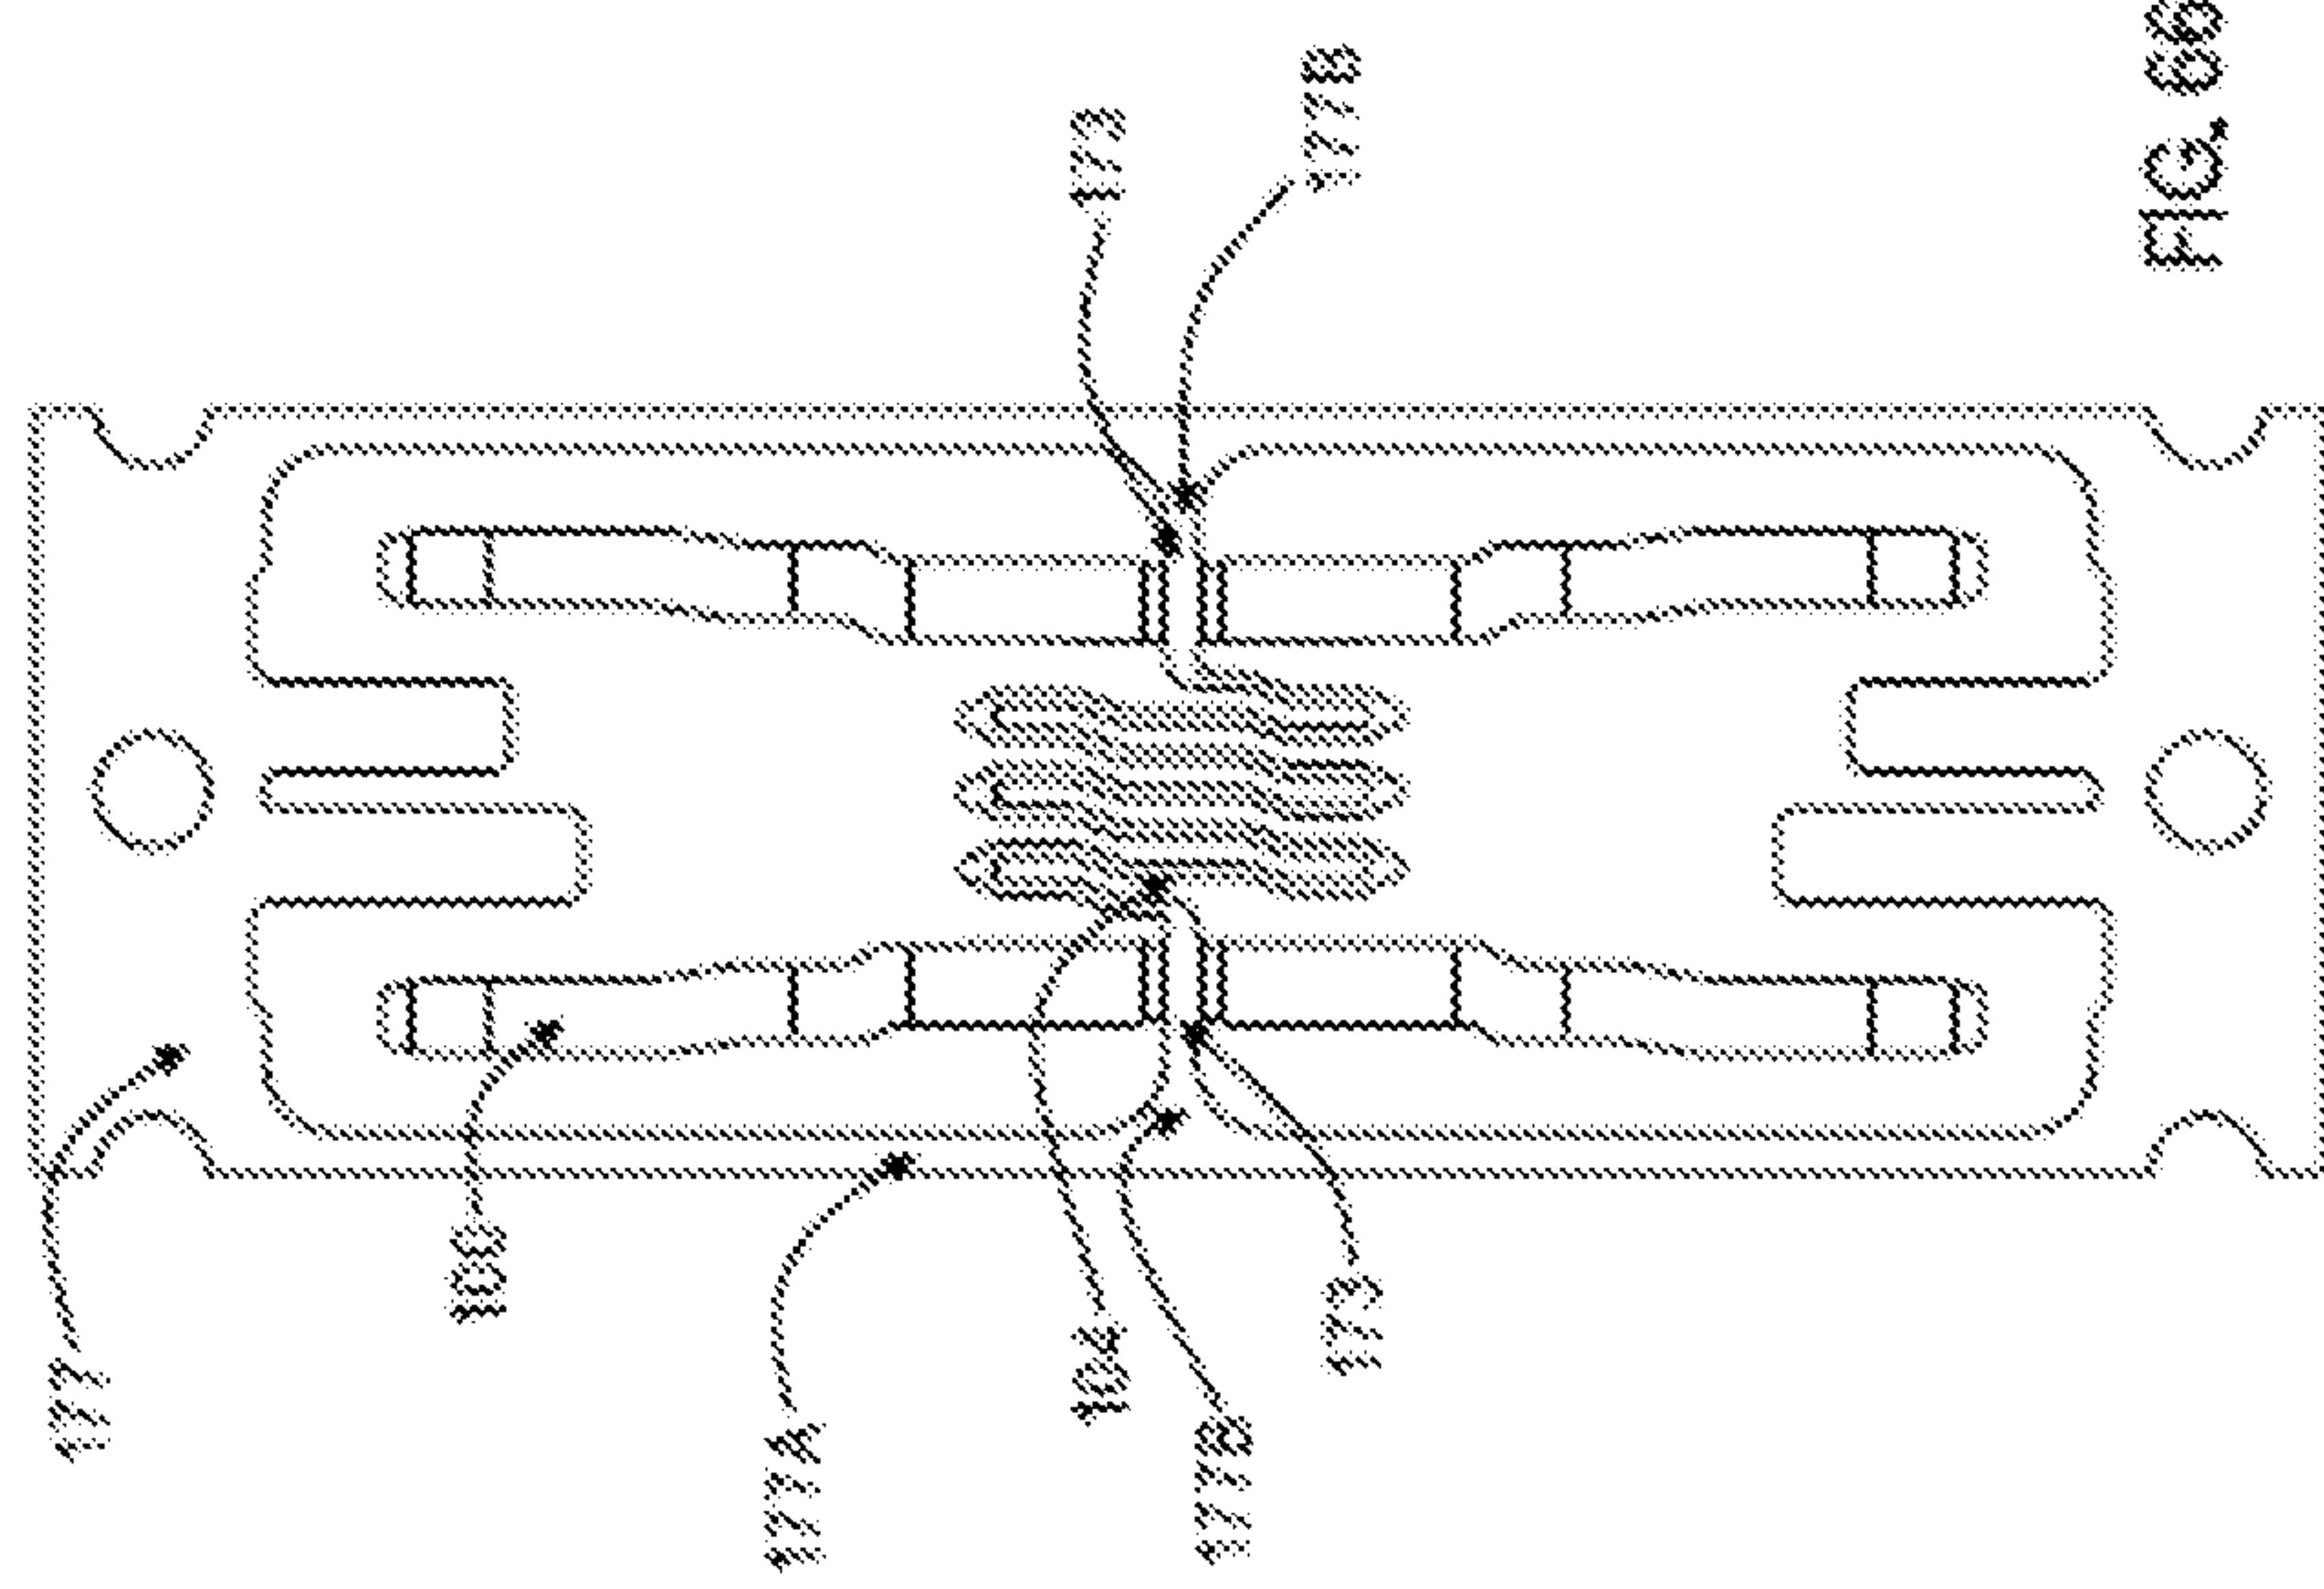
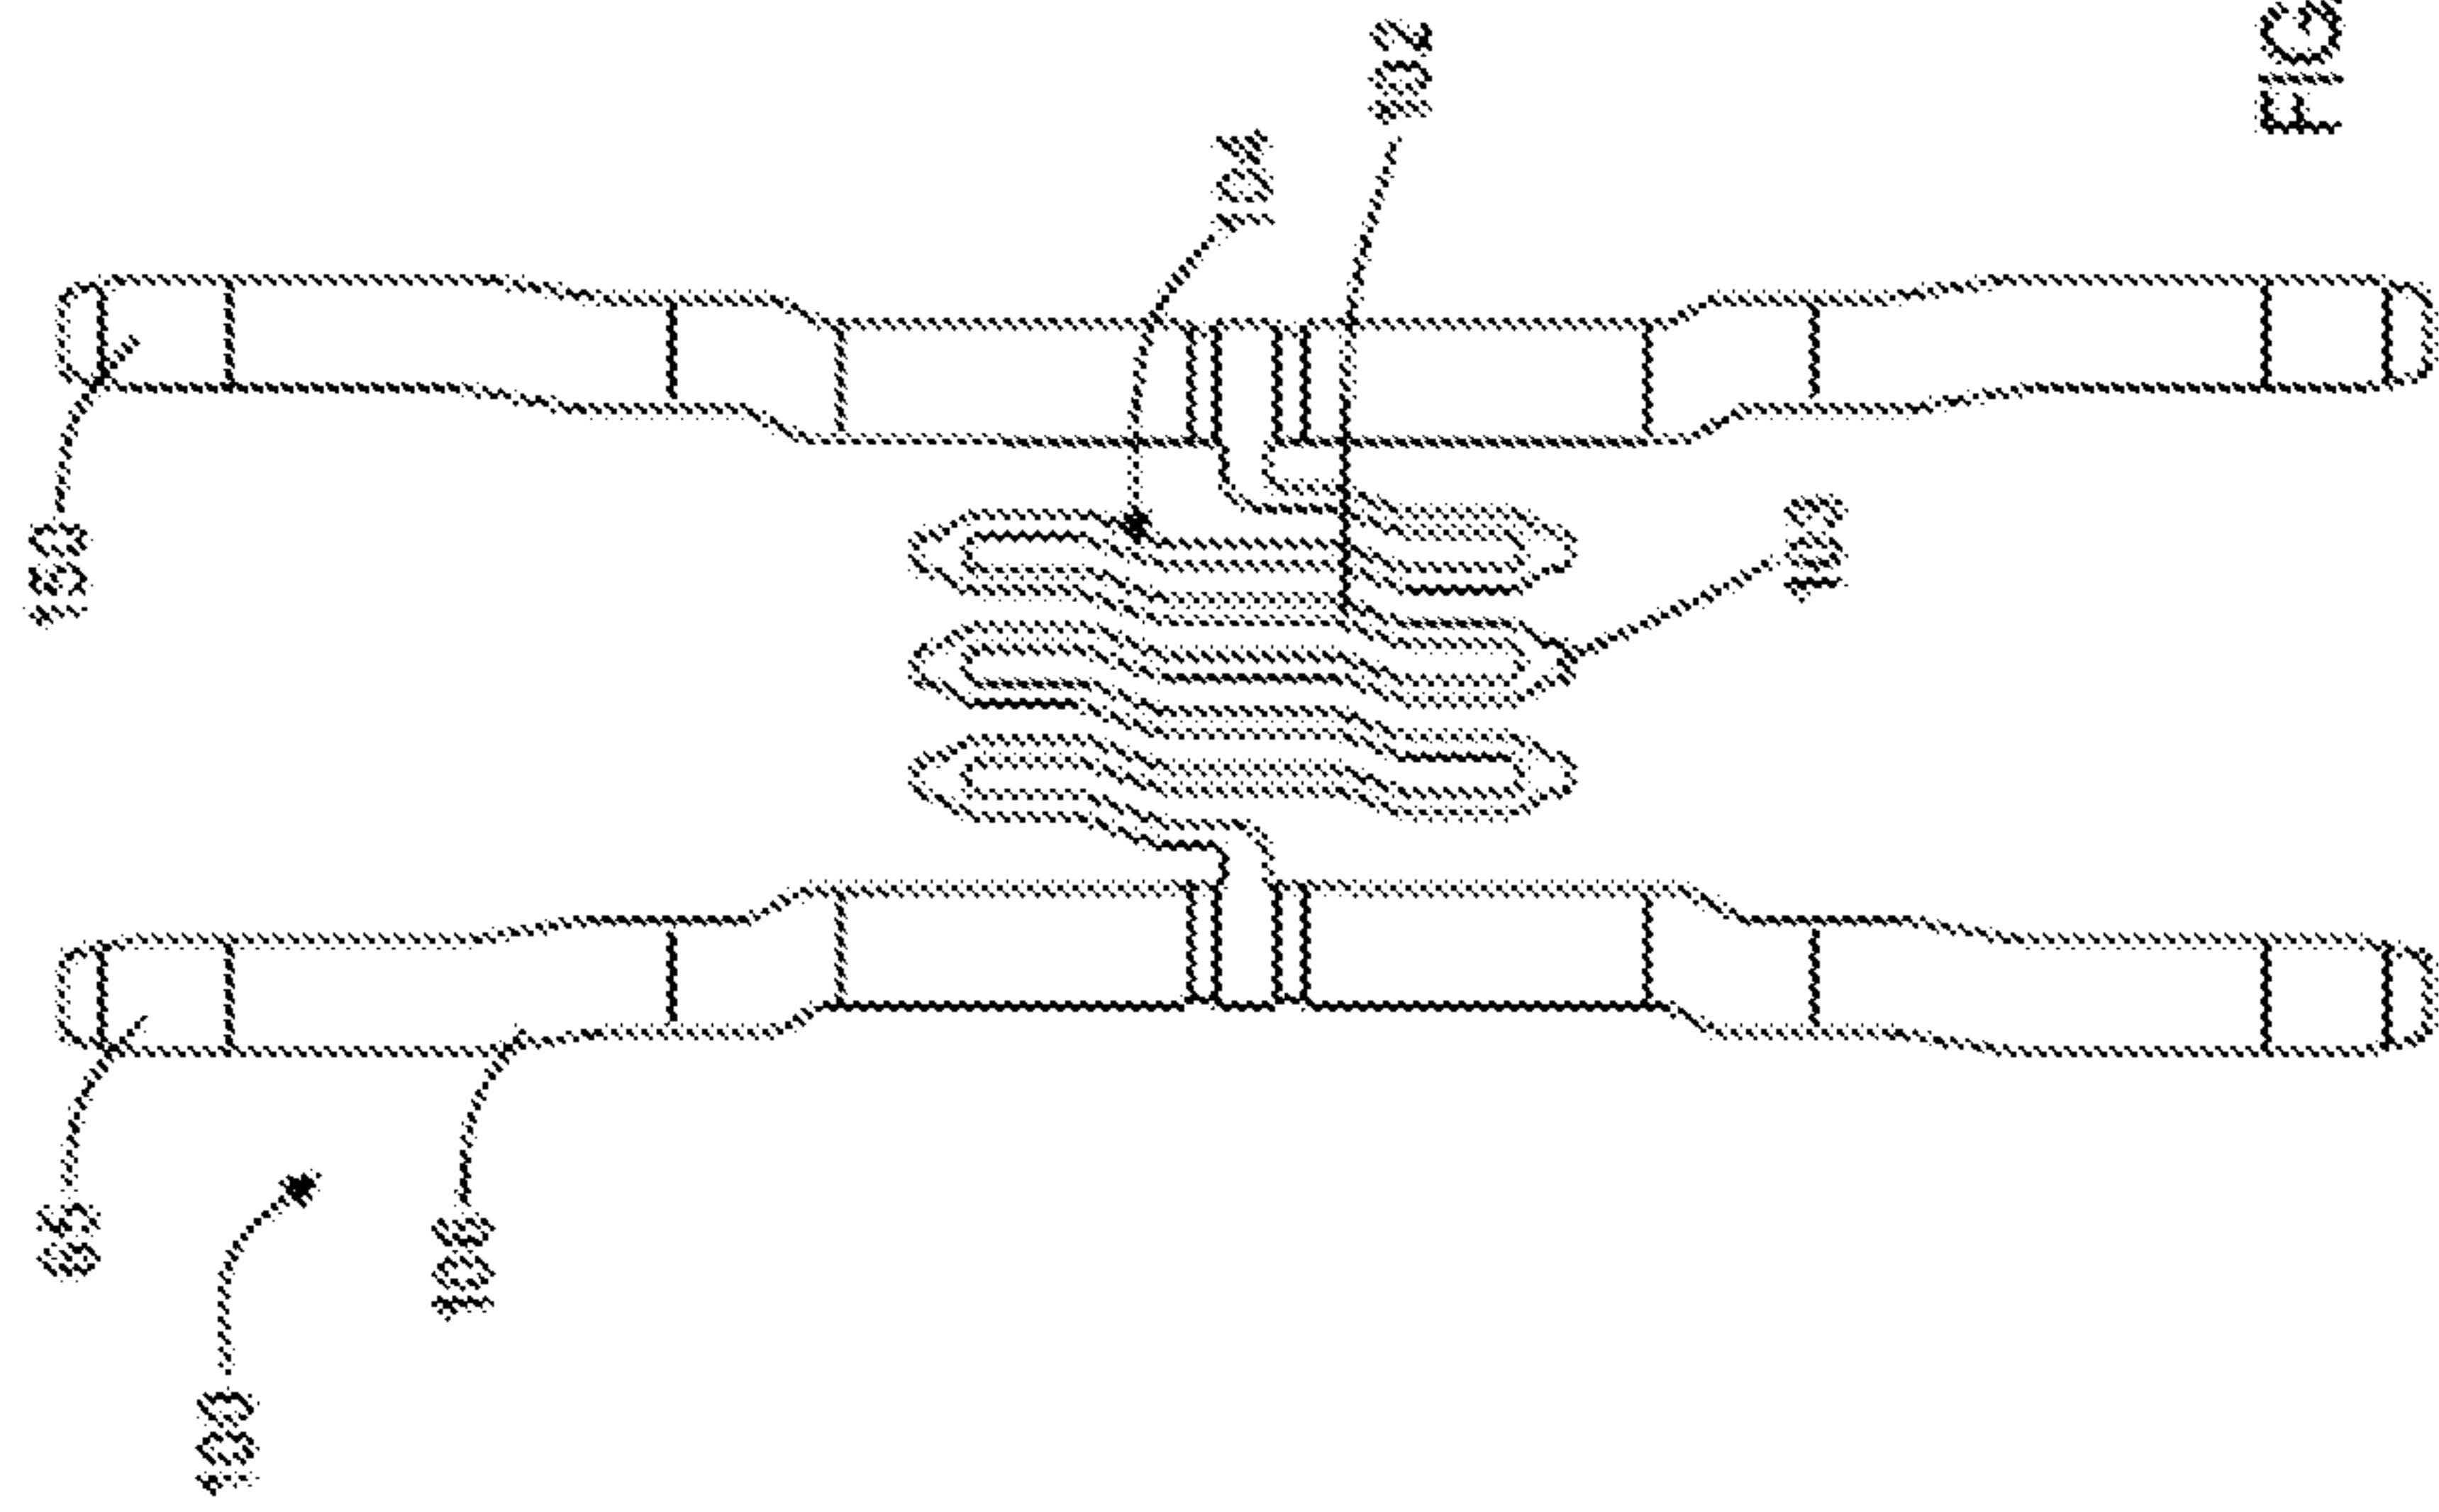
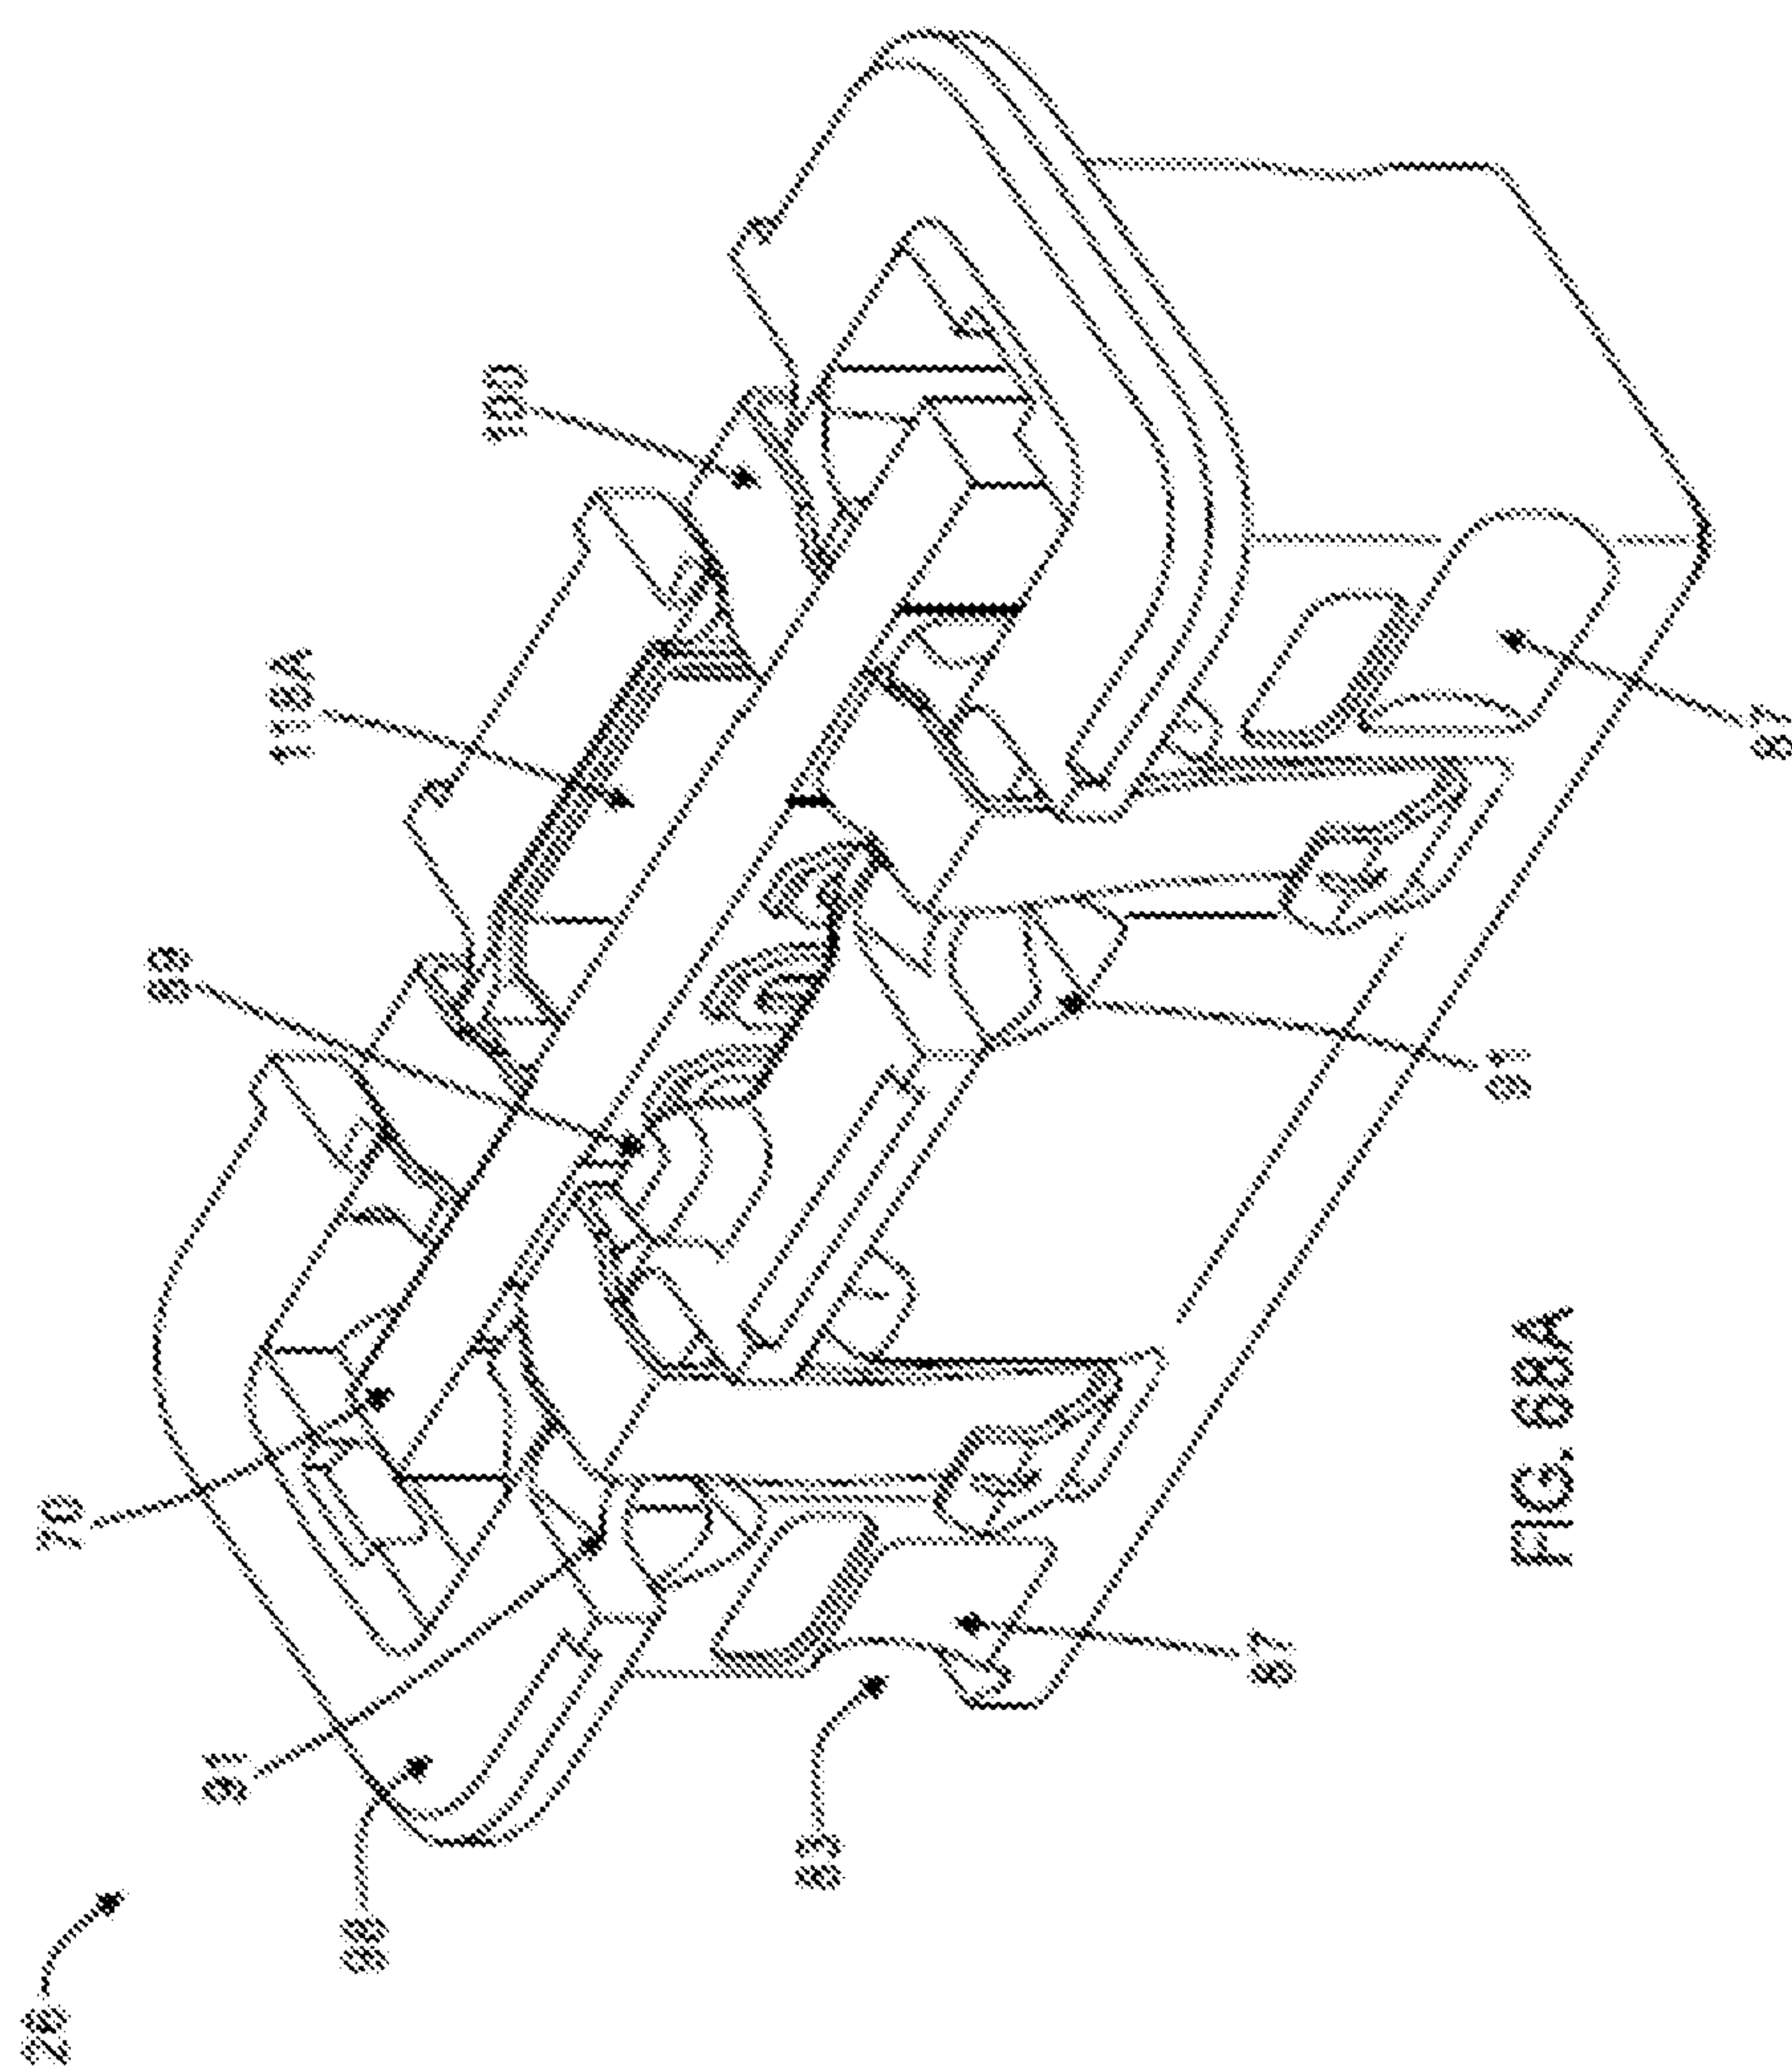


FIG. 63







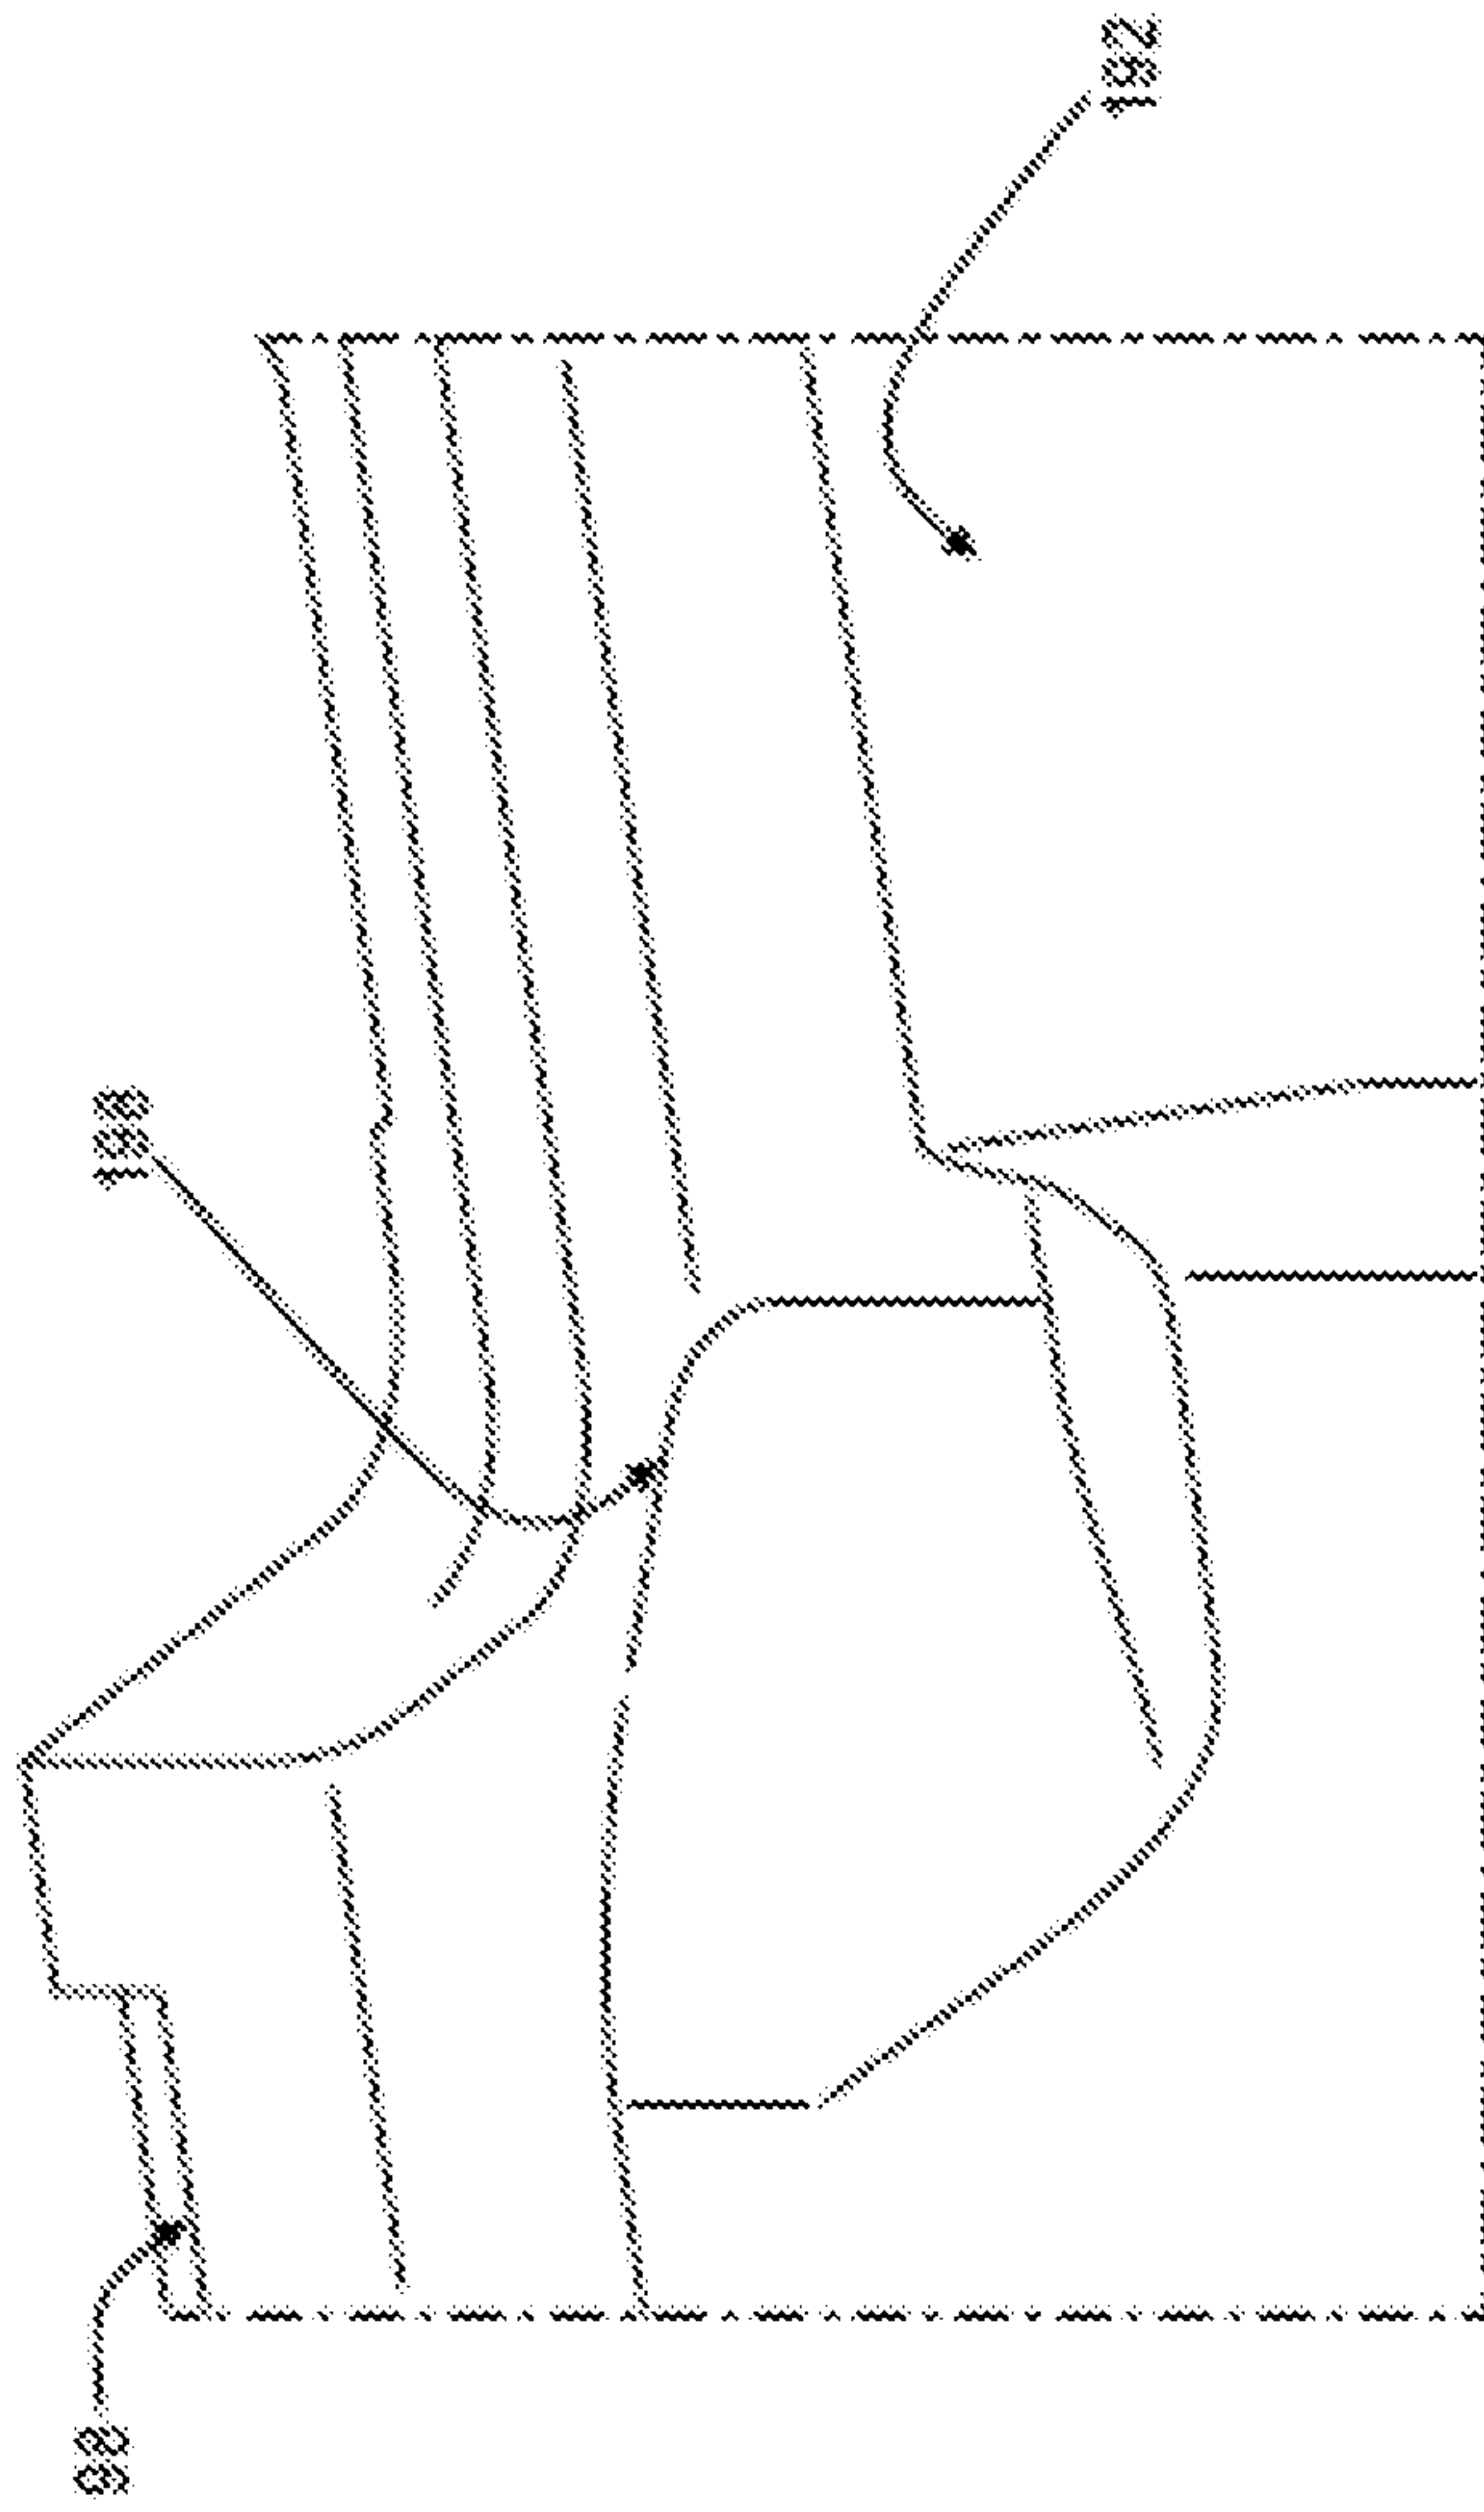


FIG. 68B

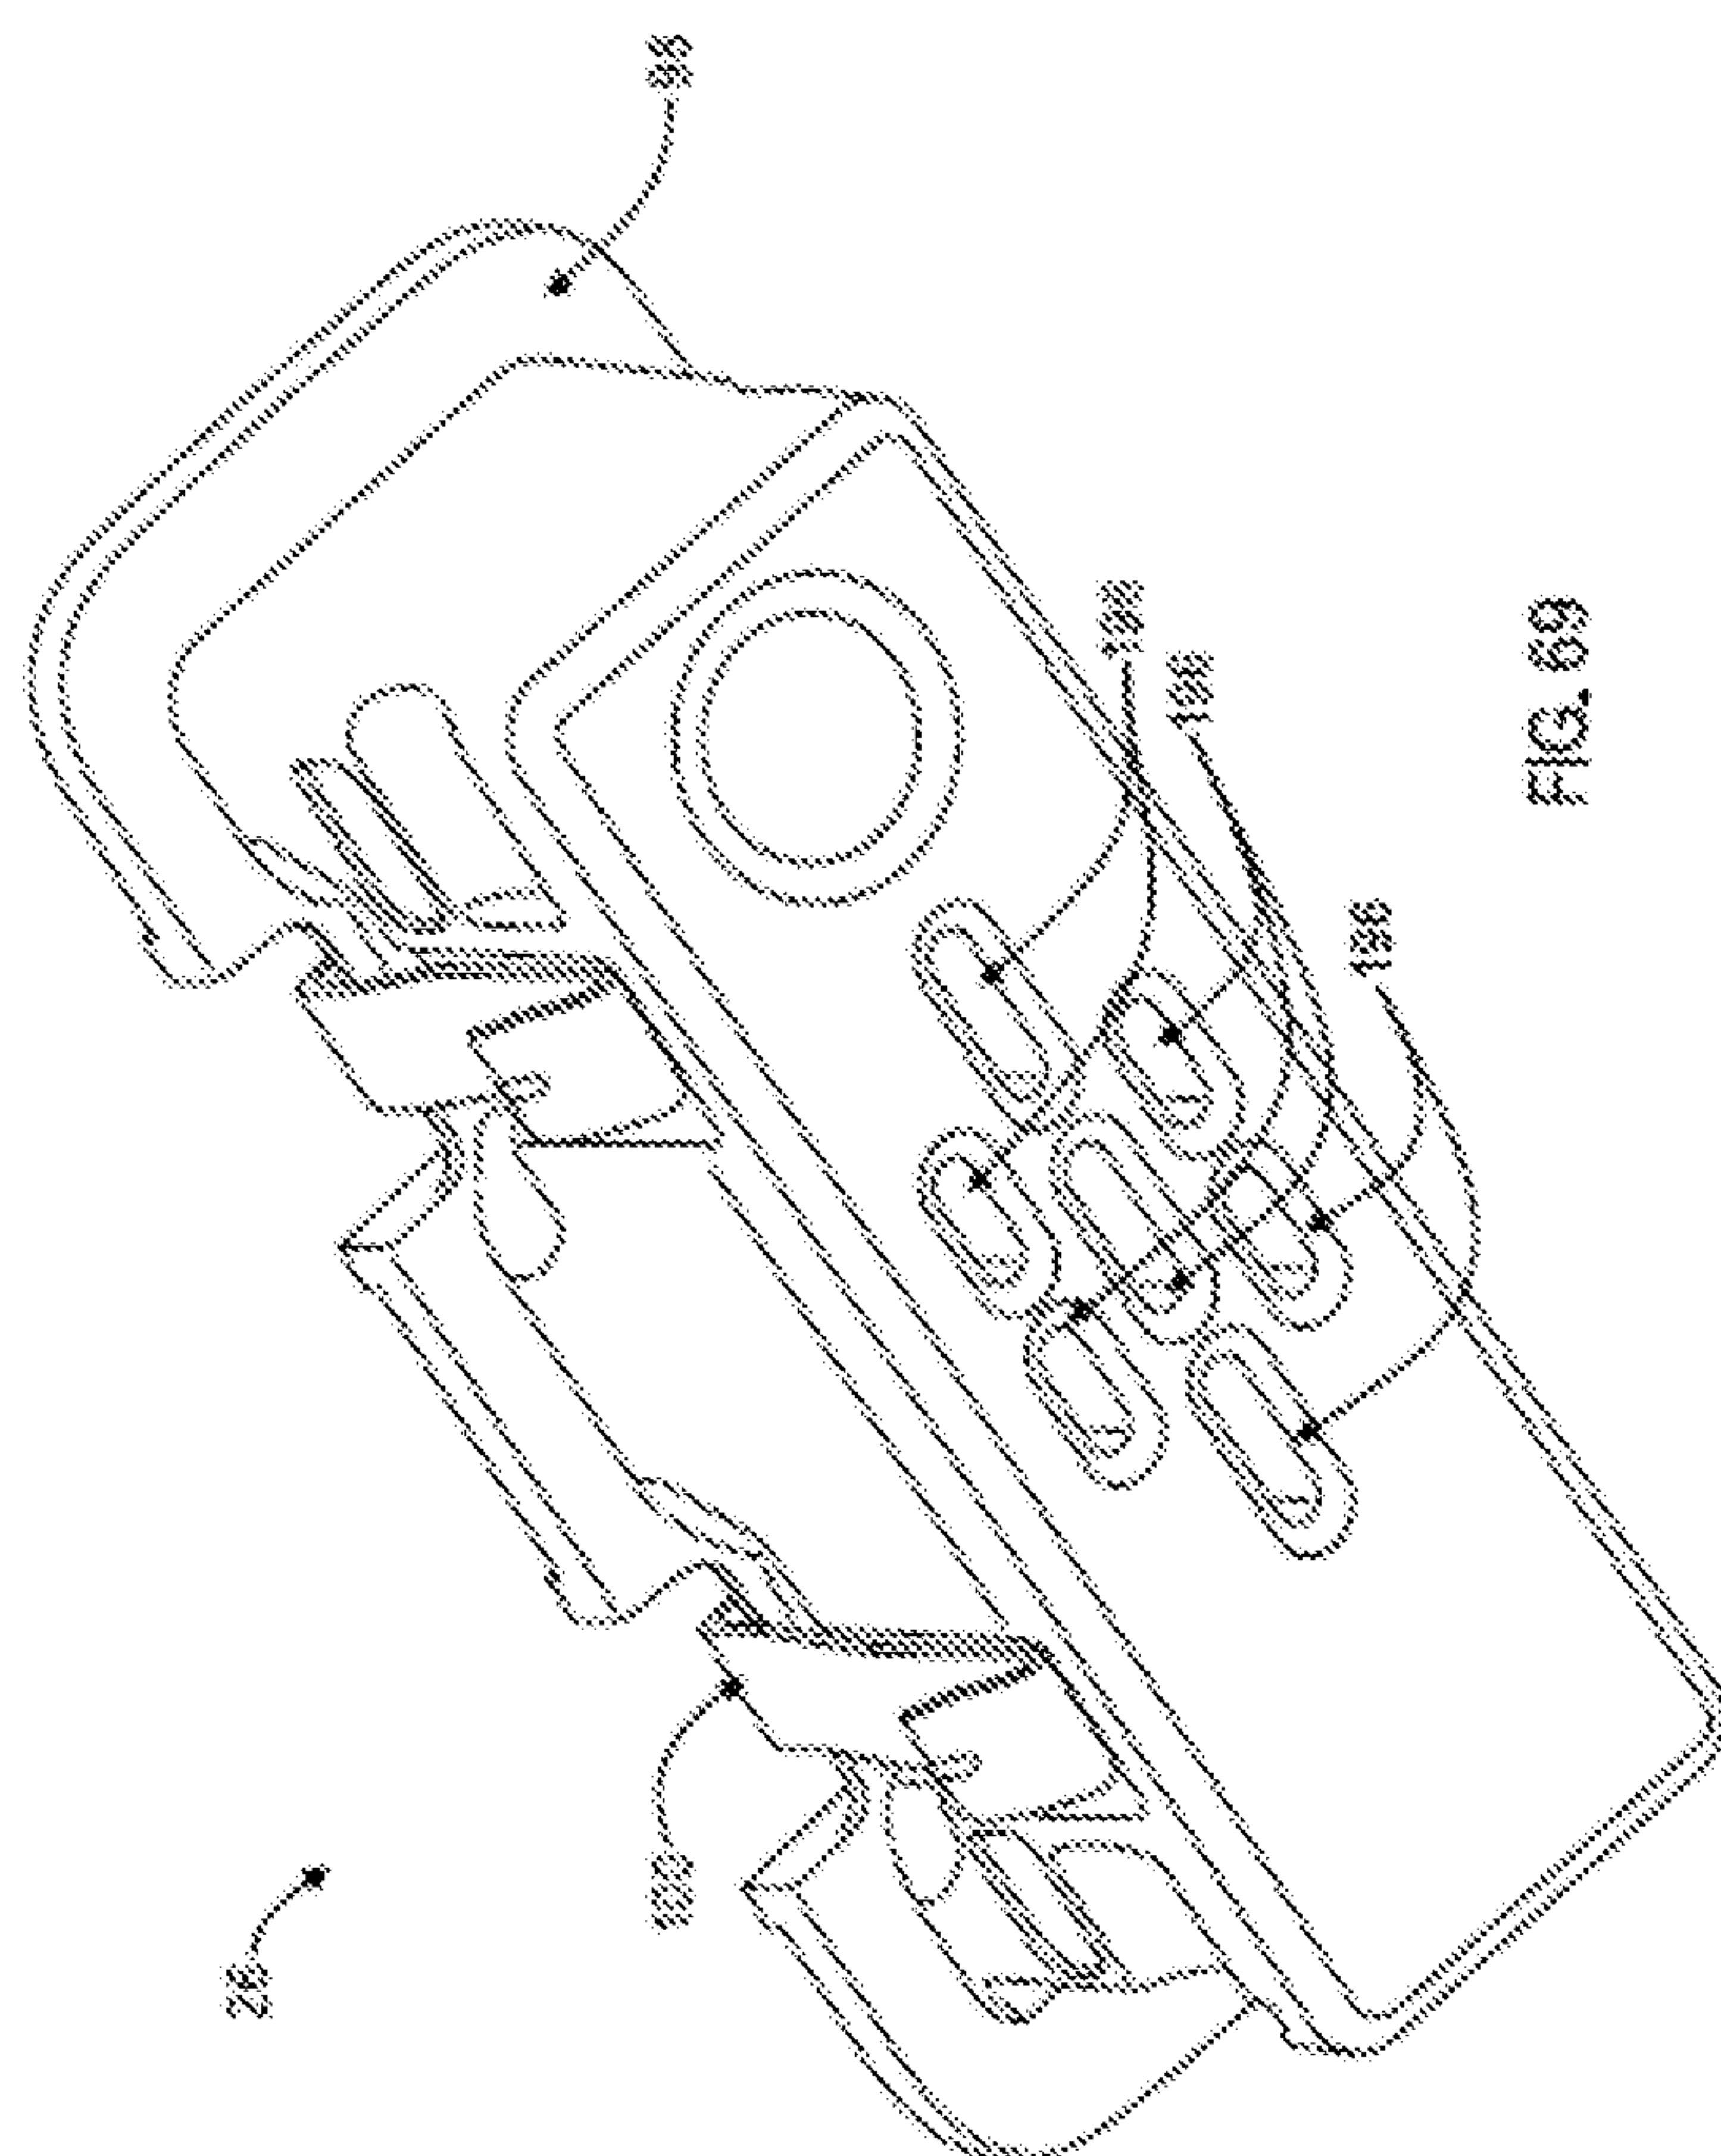


FIG. 69

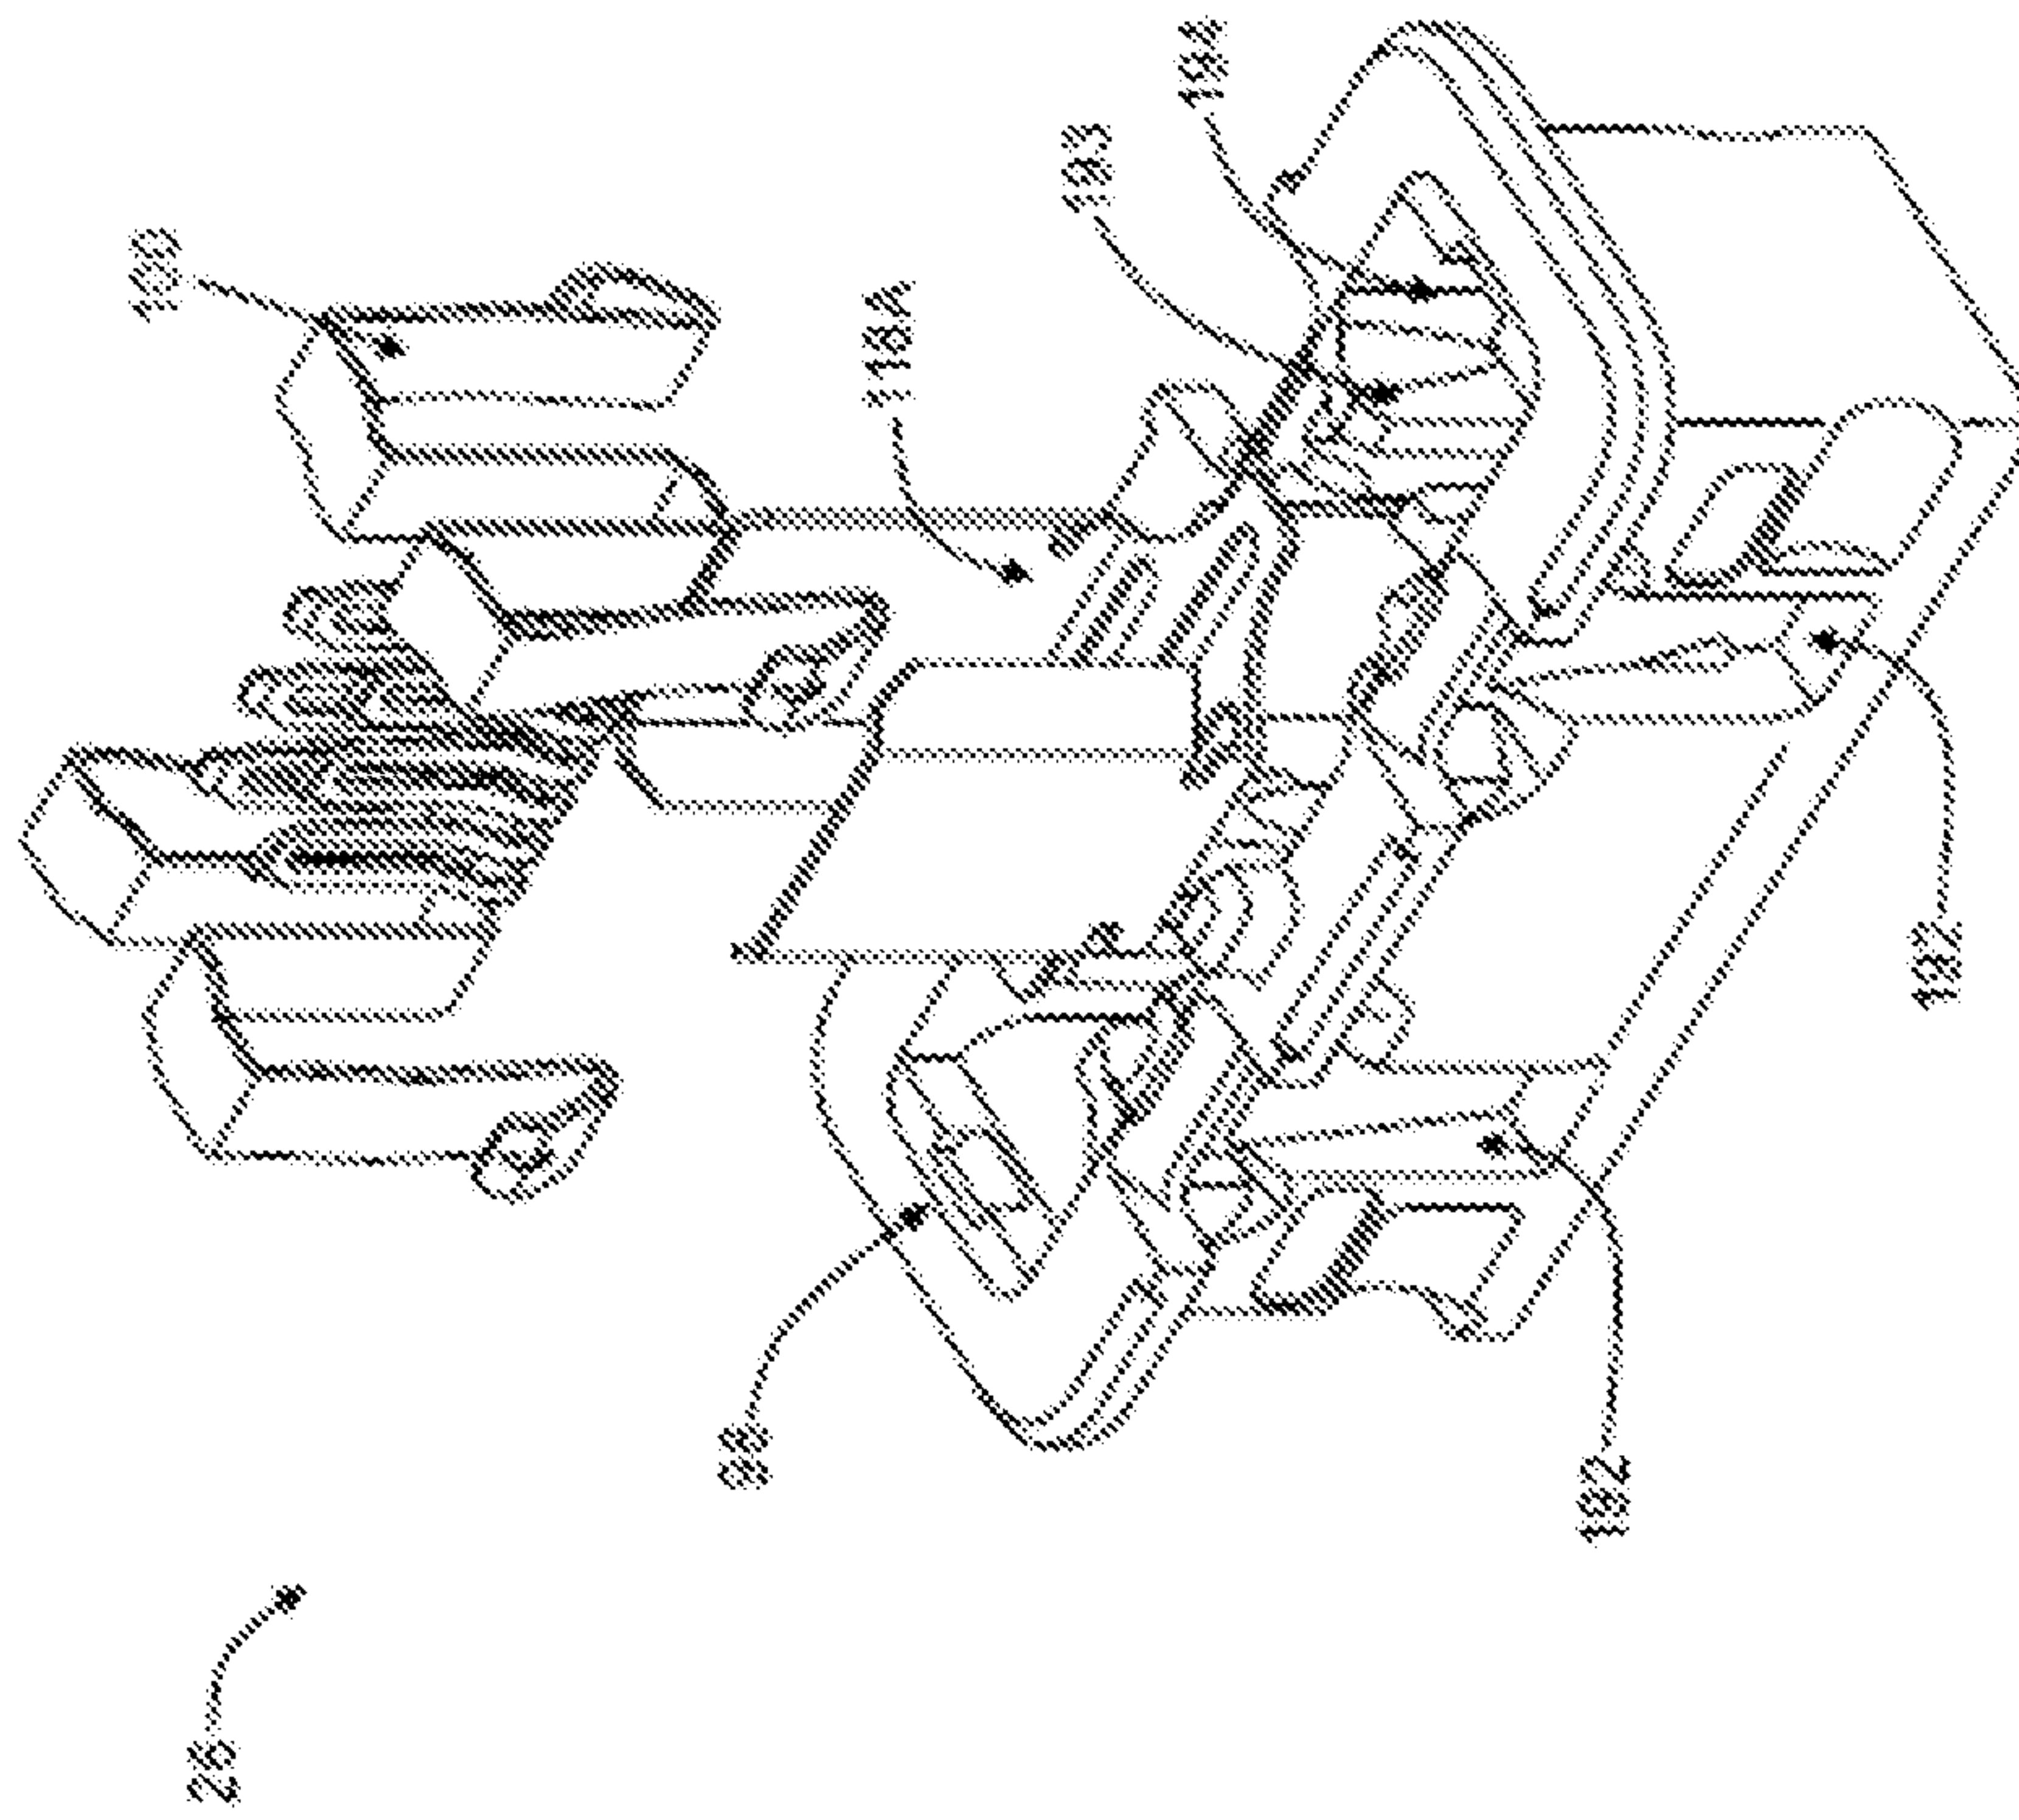
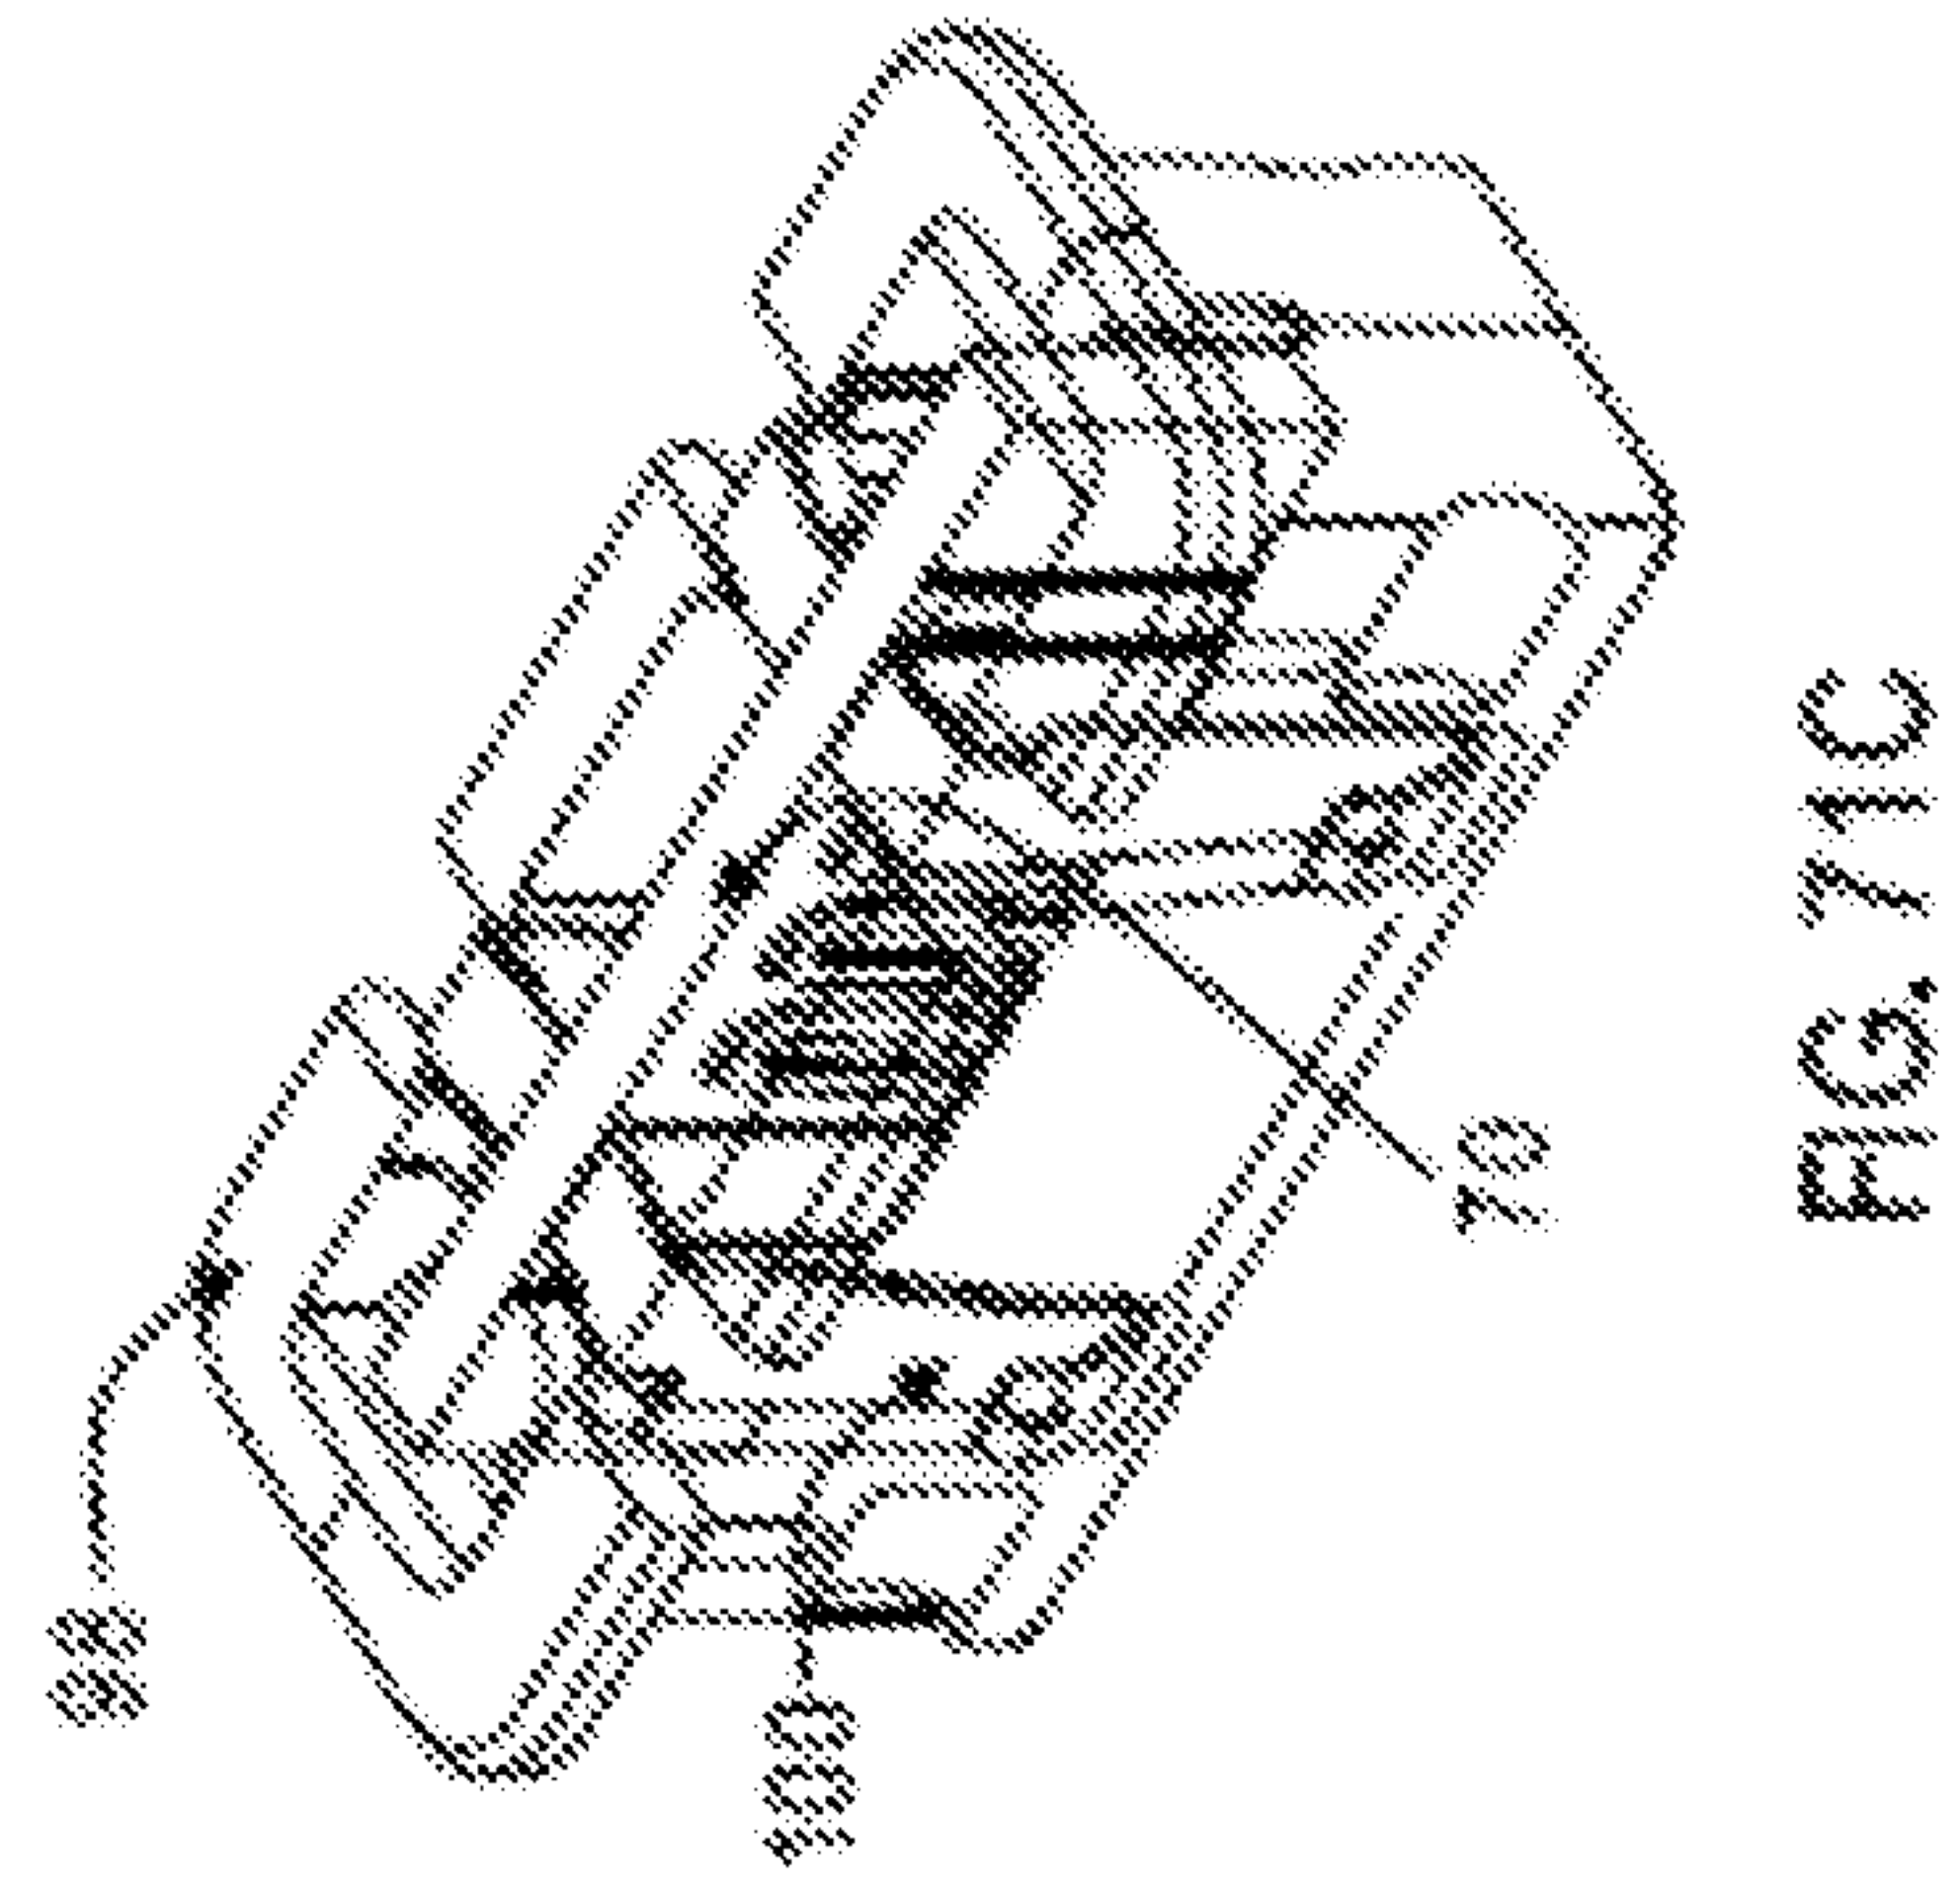
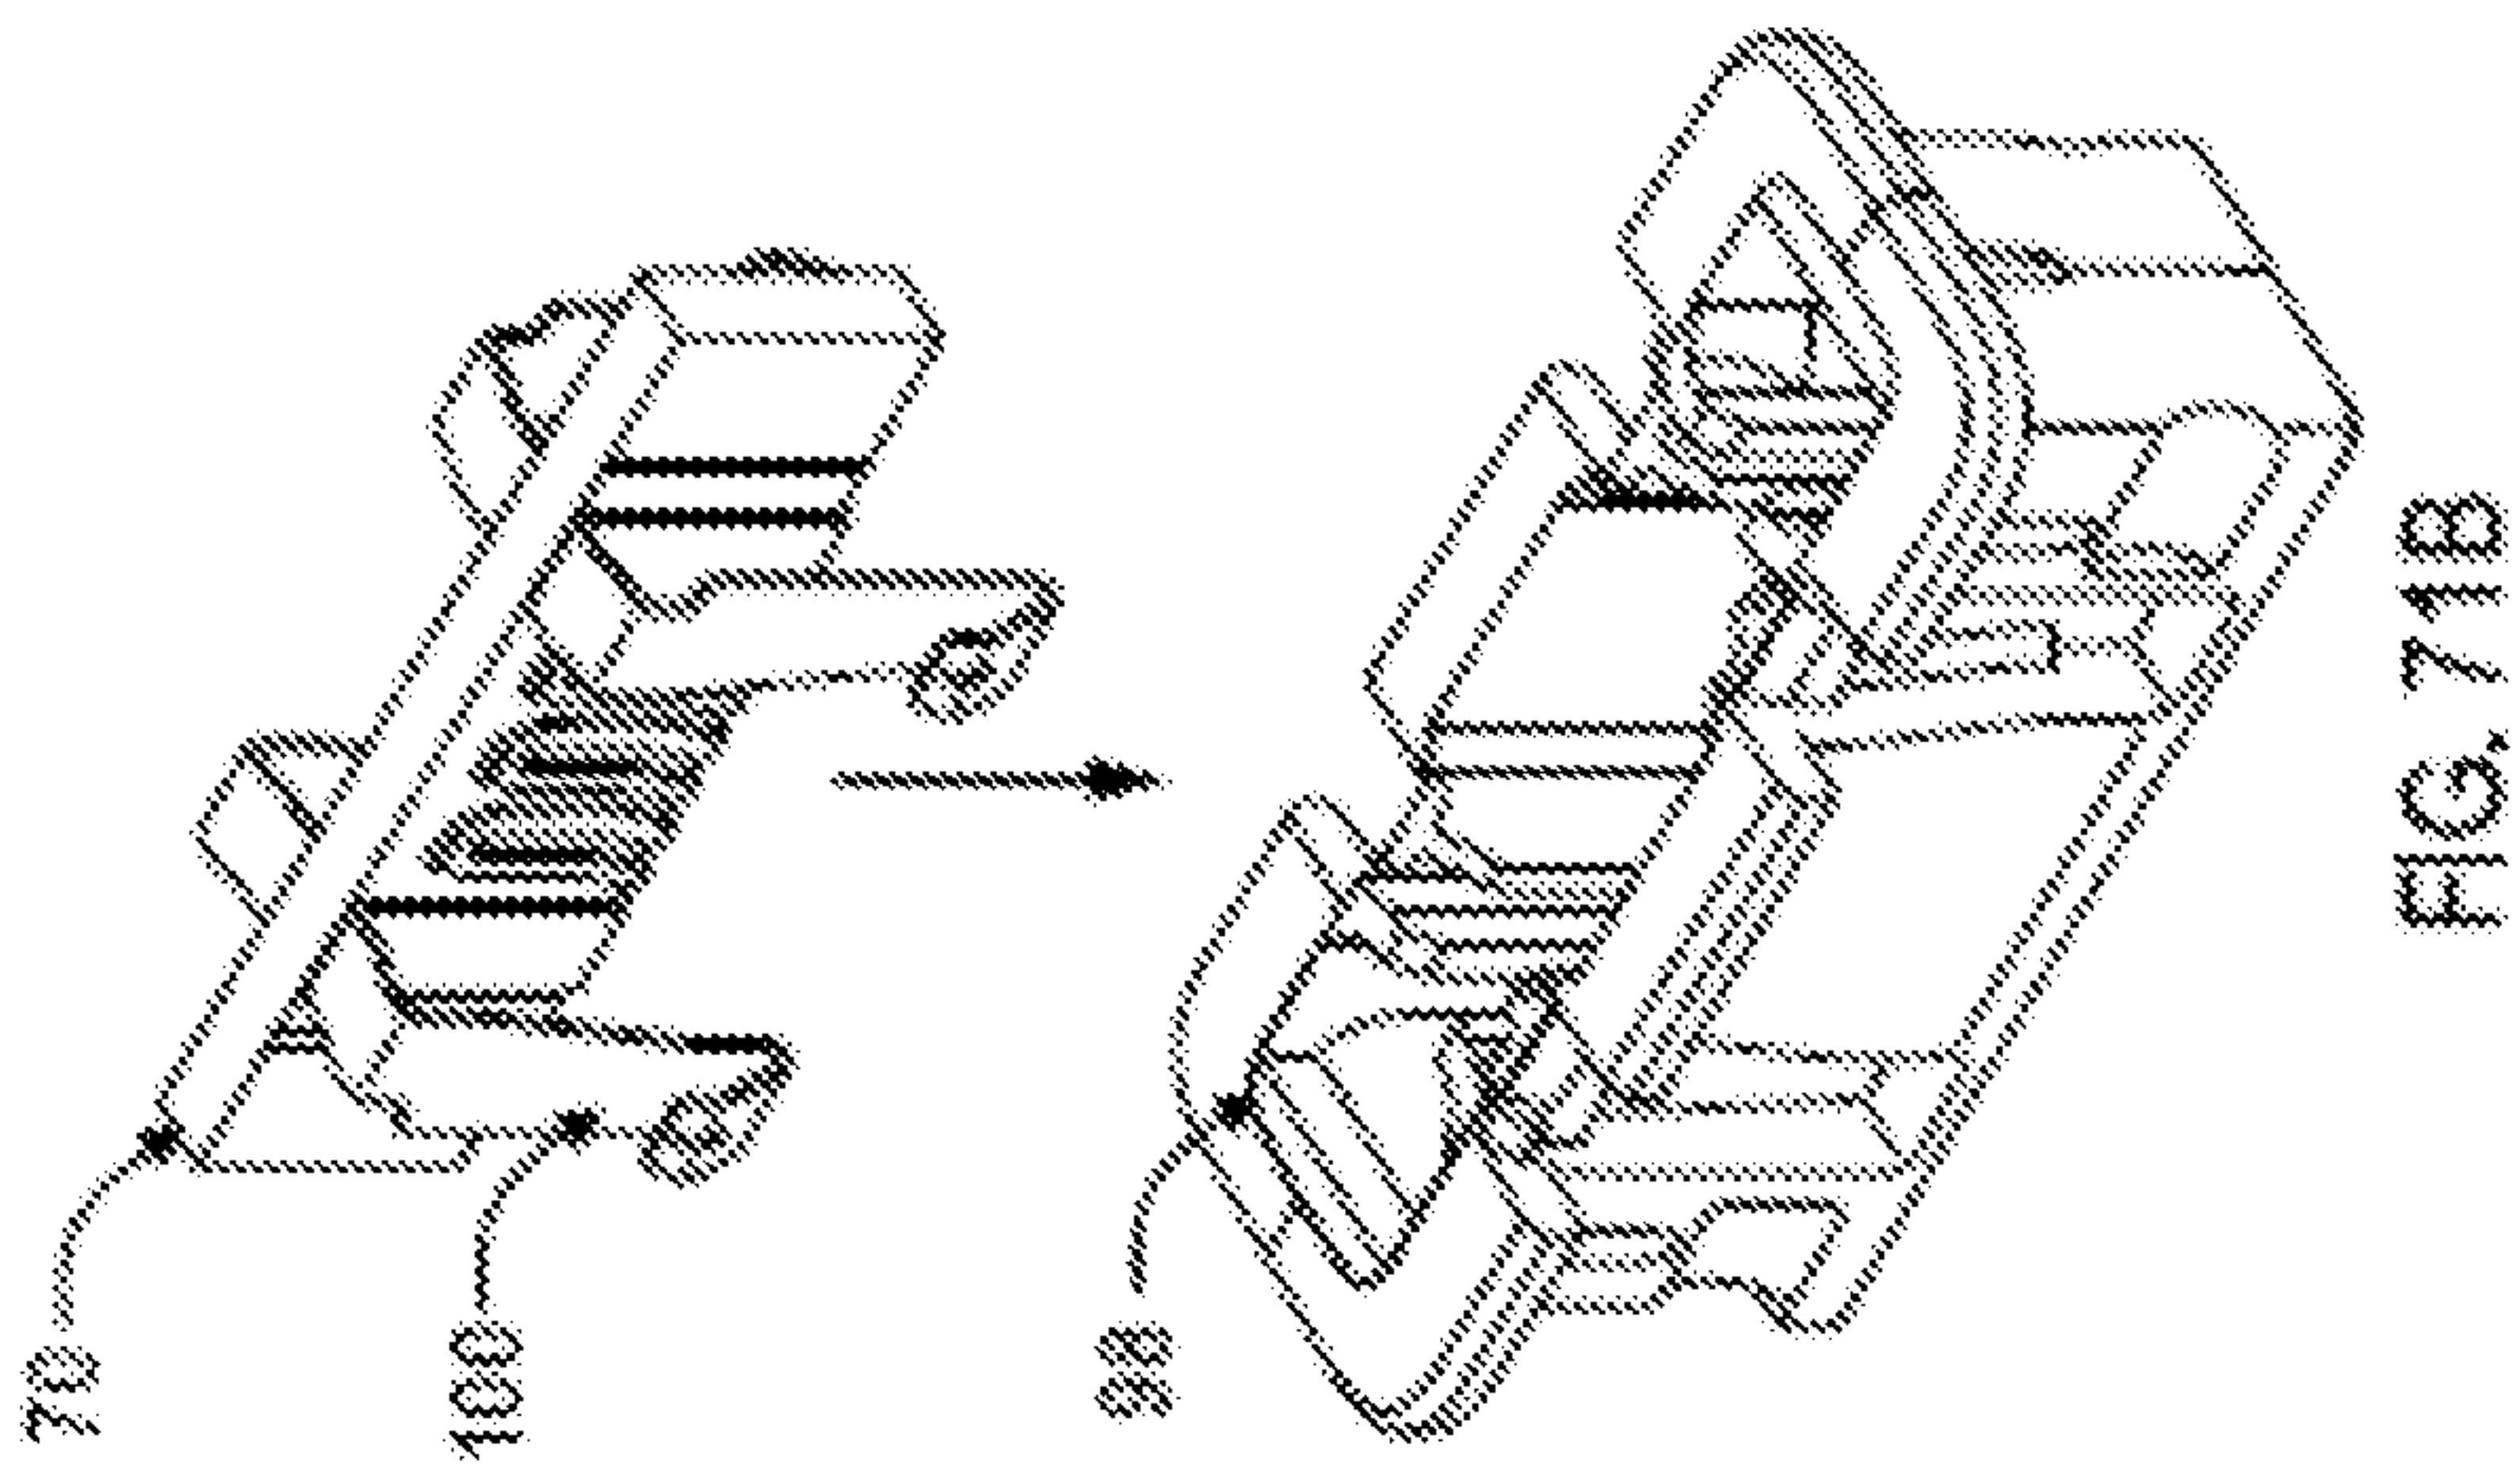
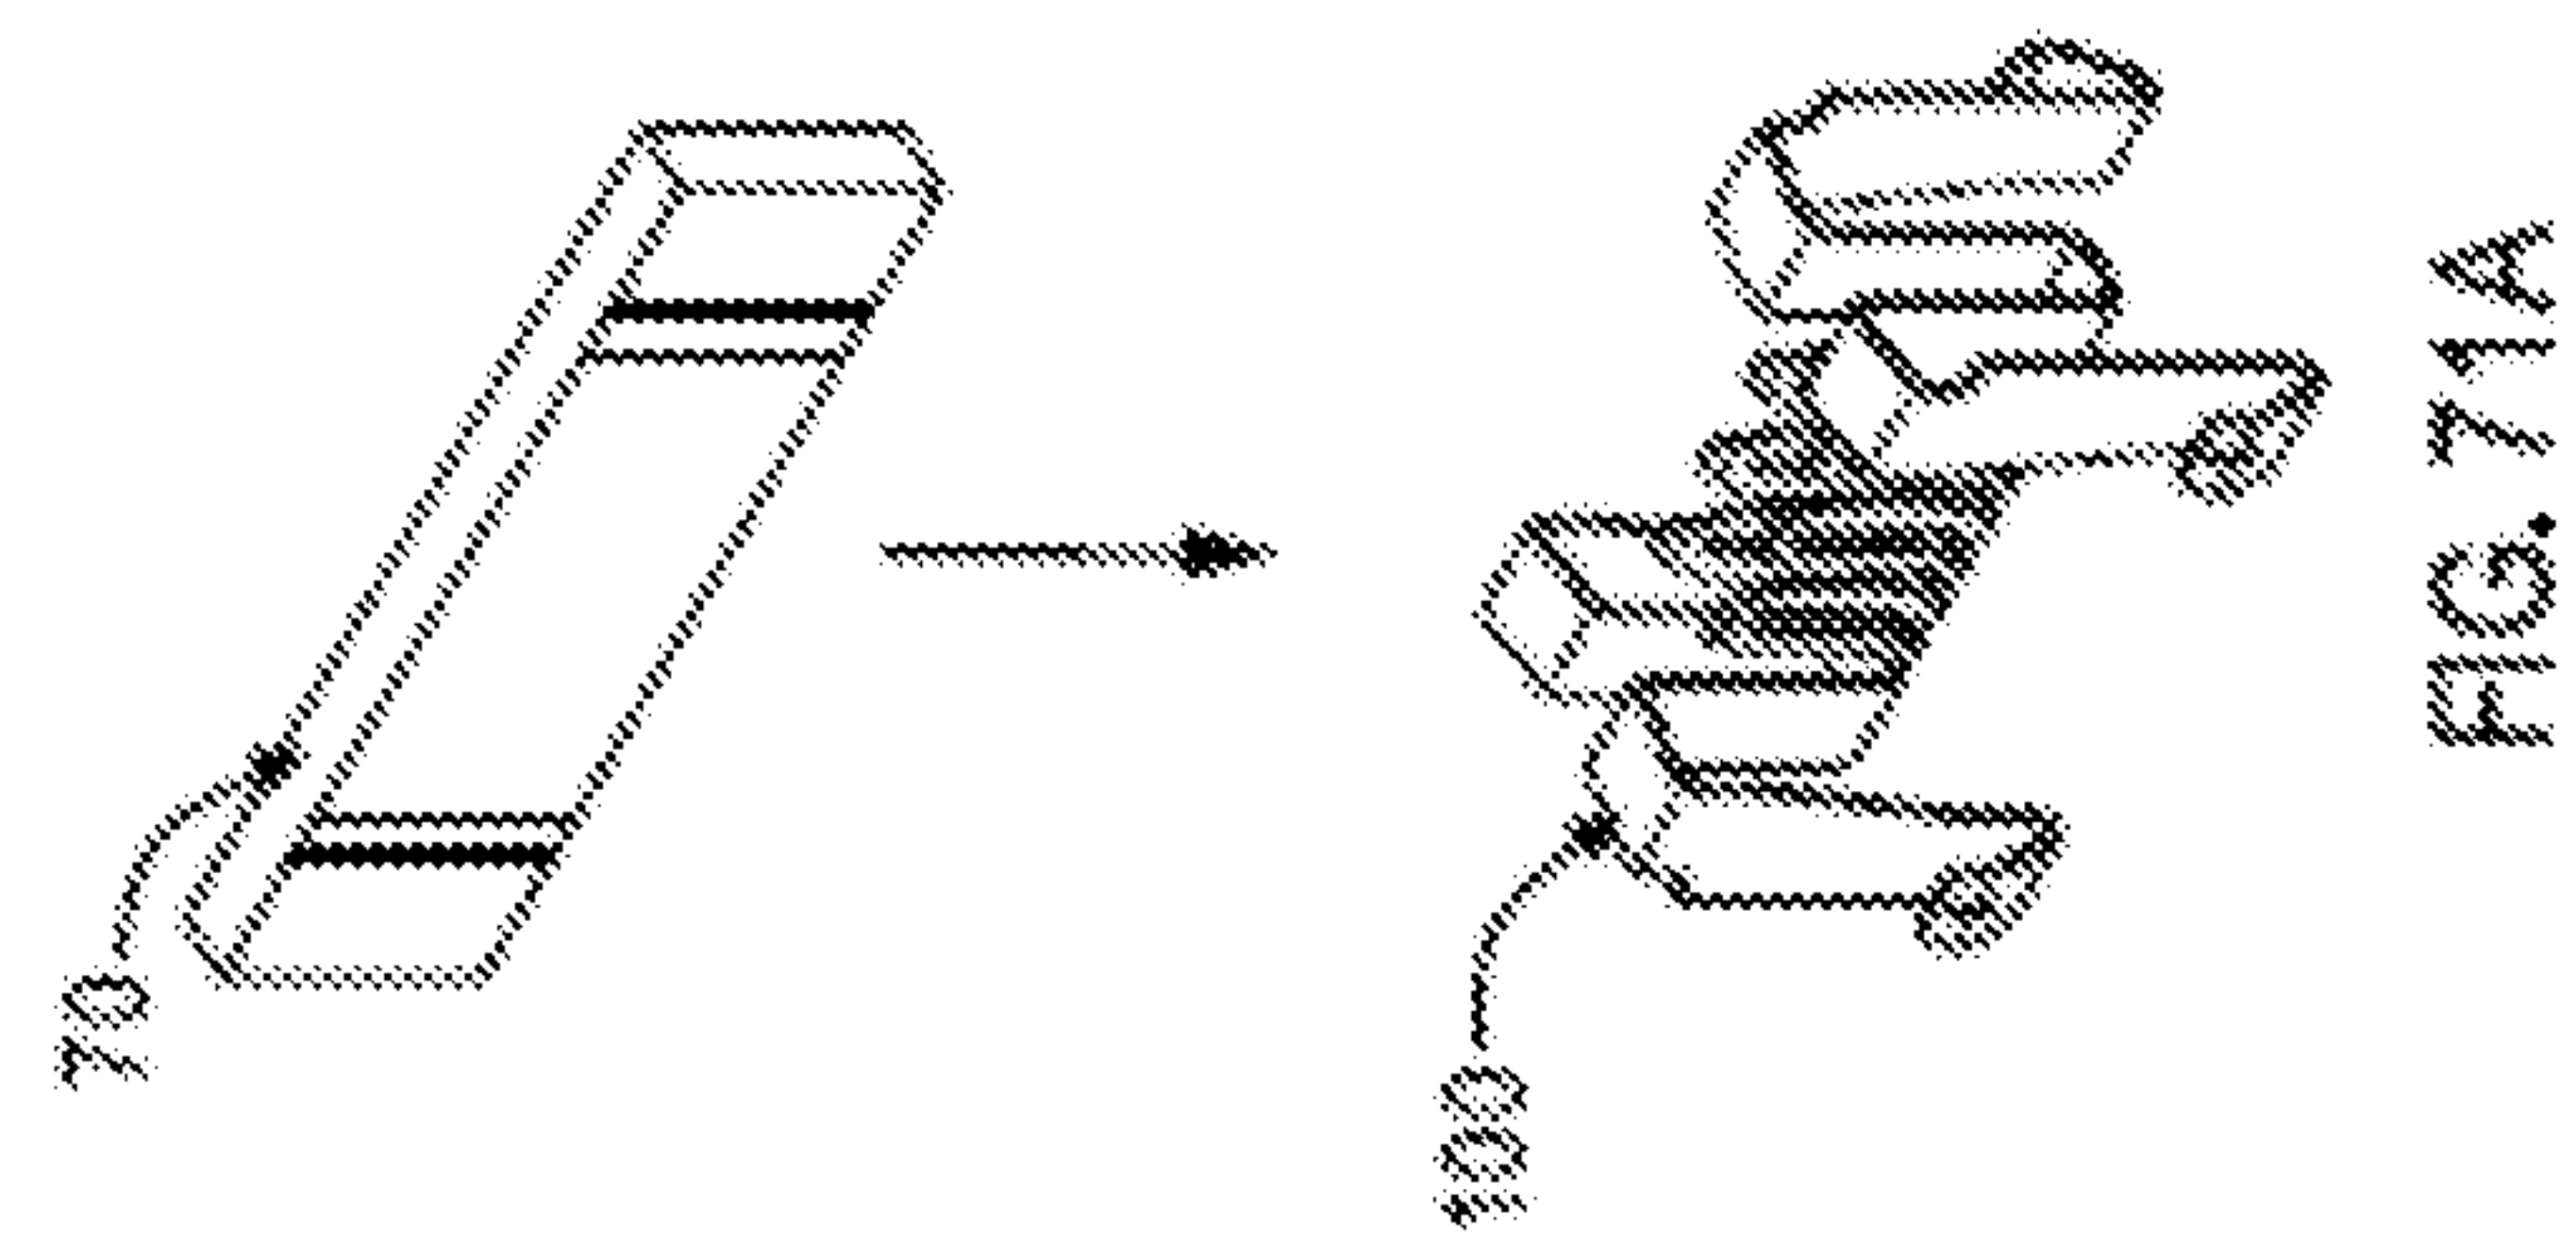
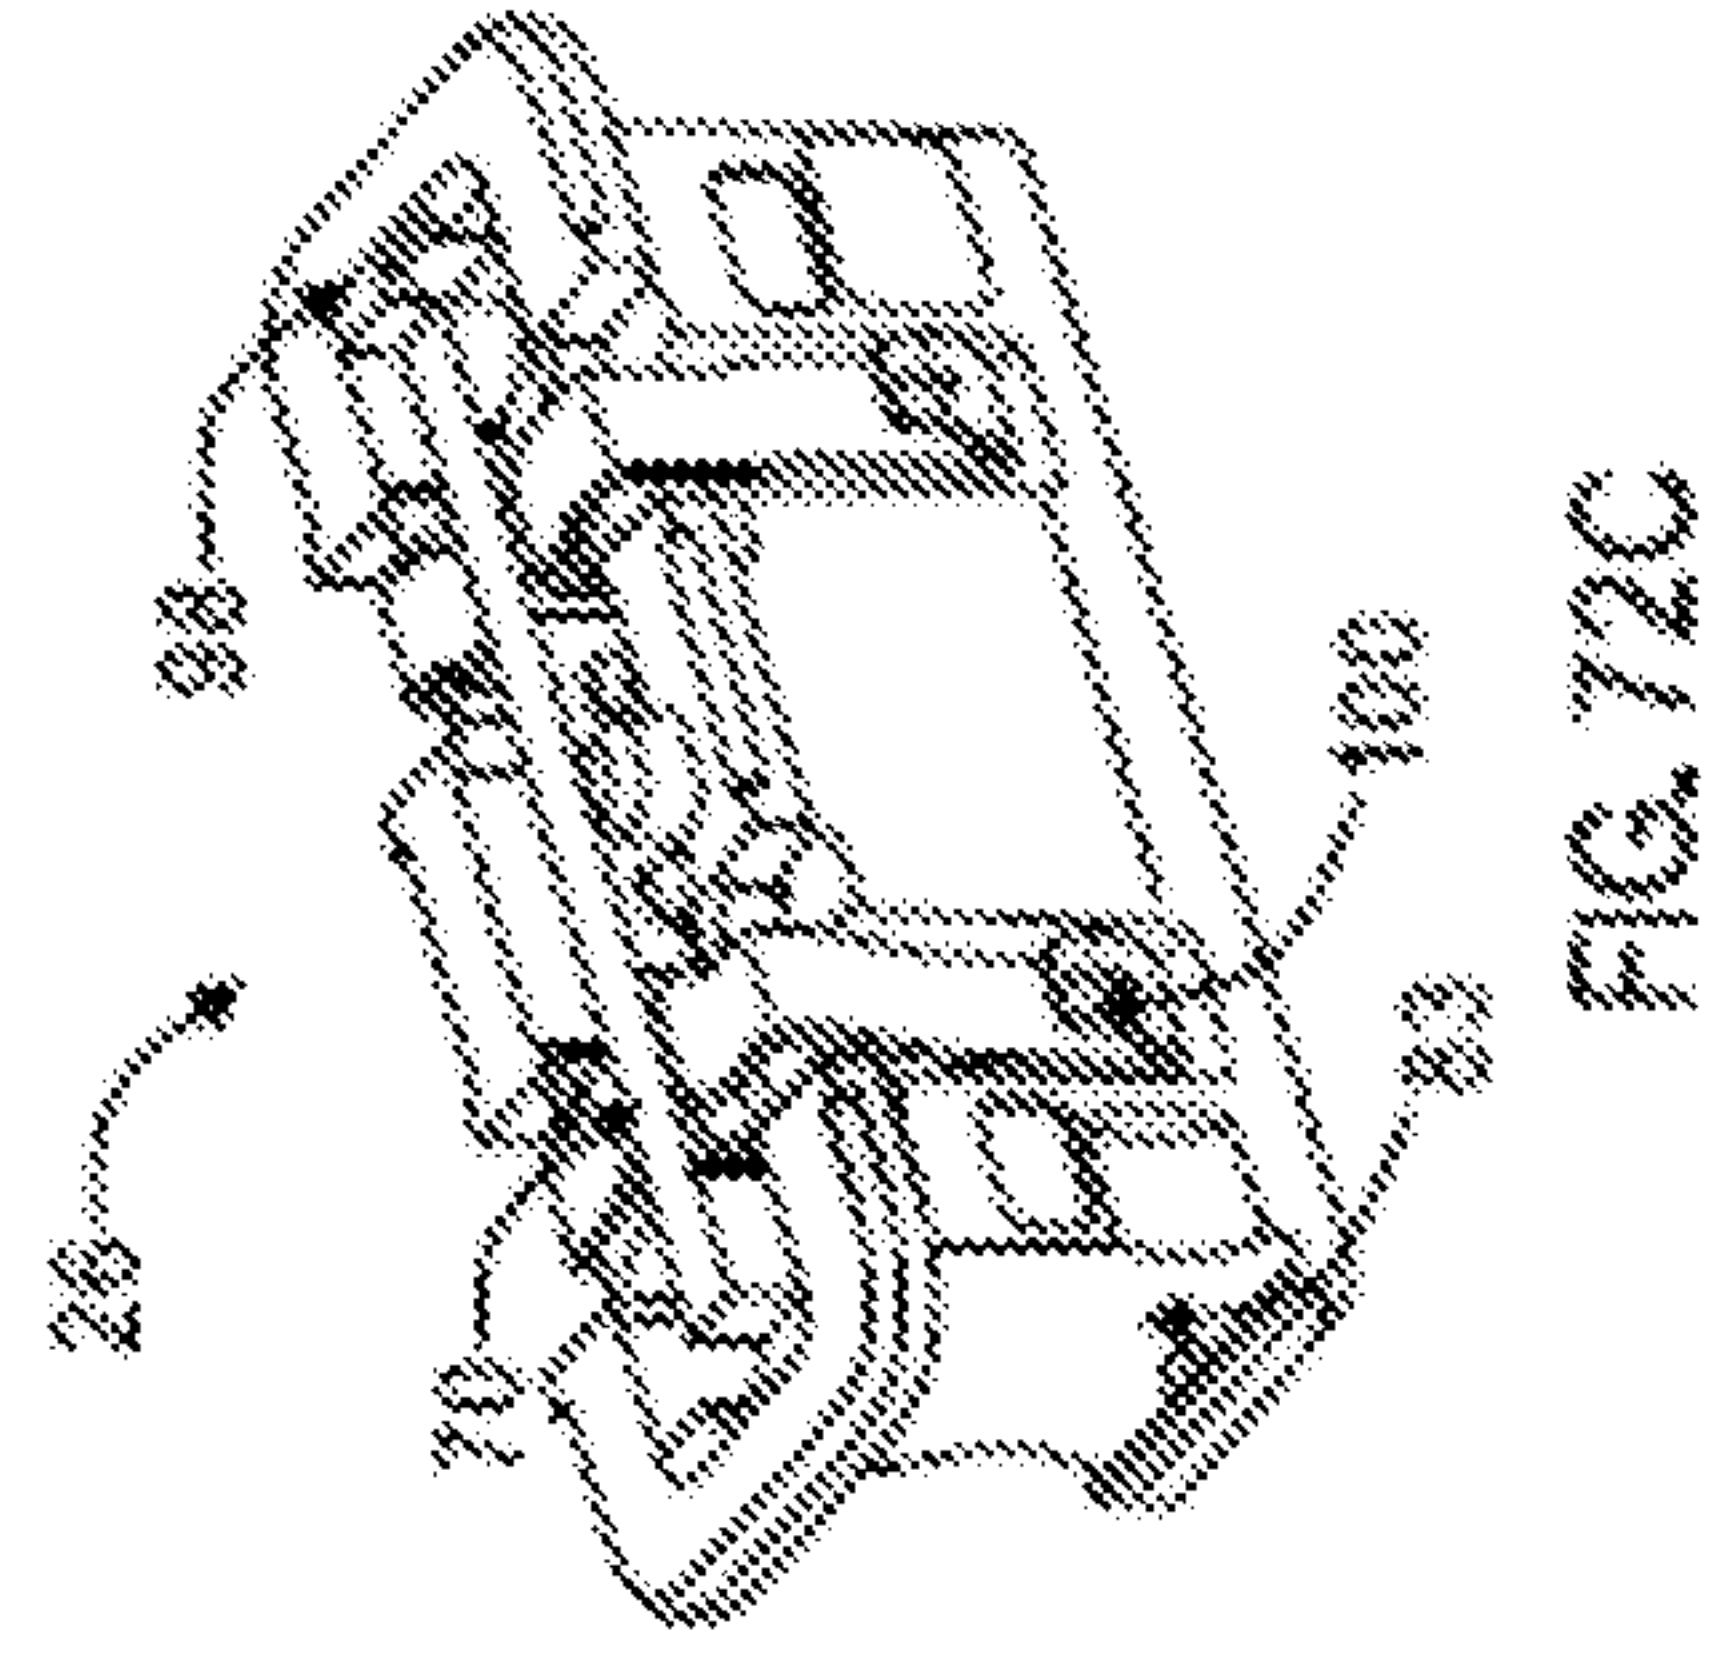
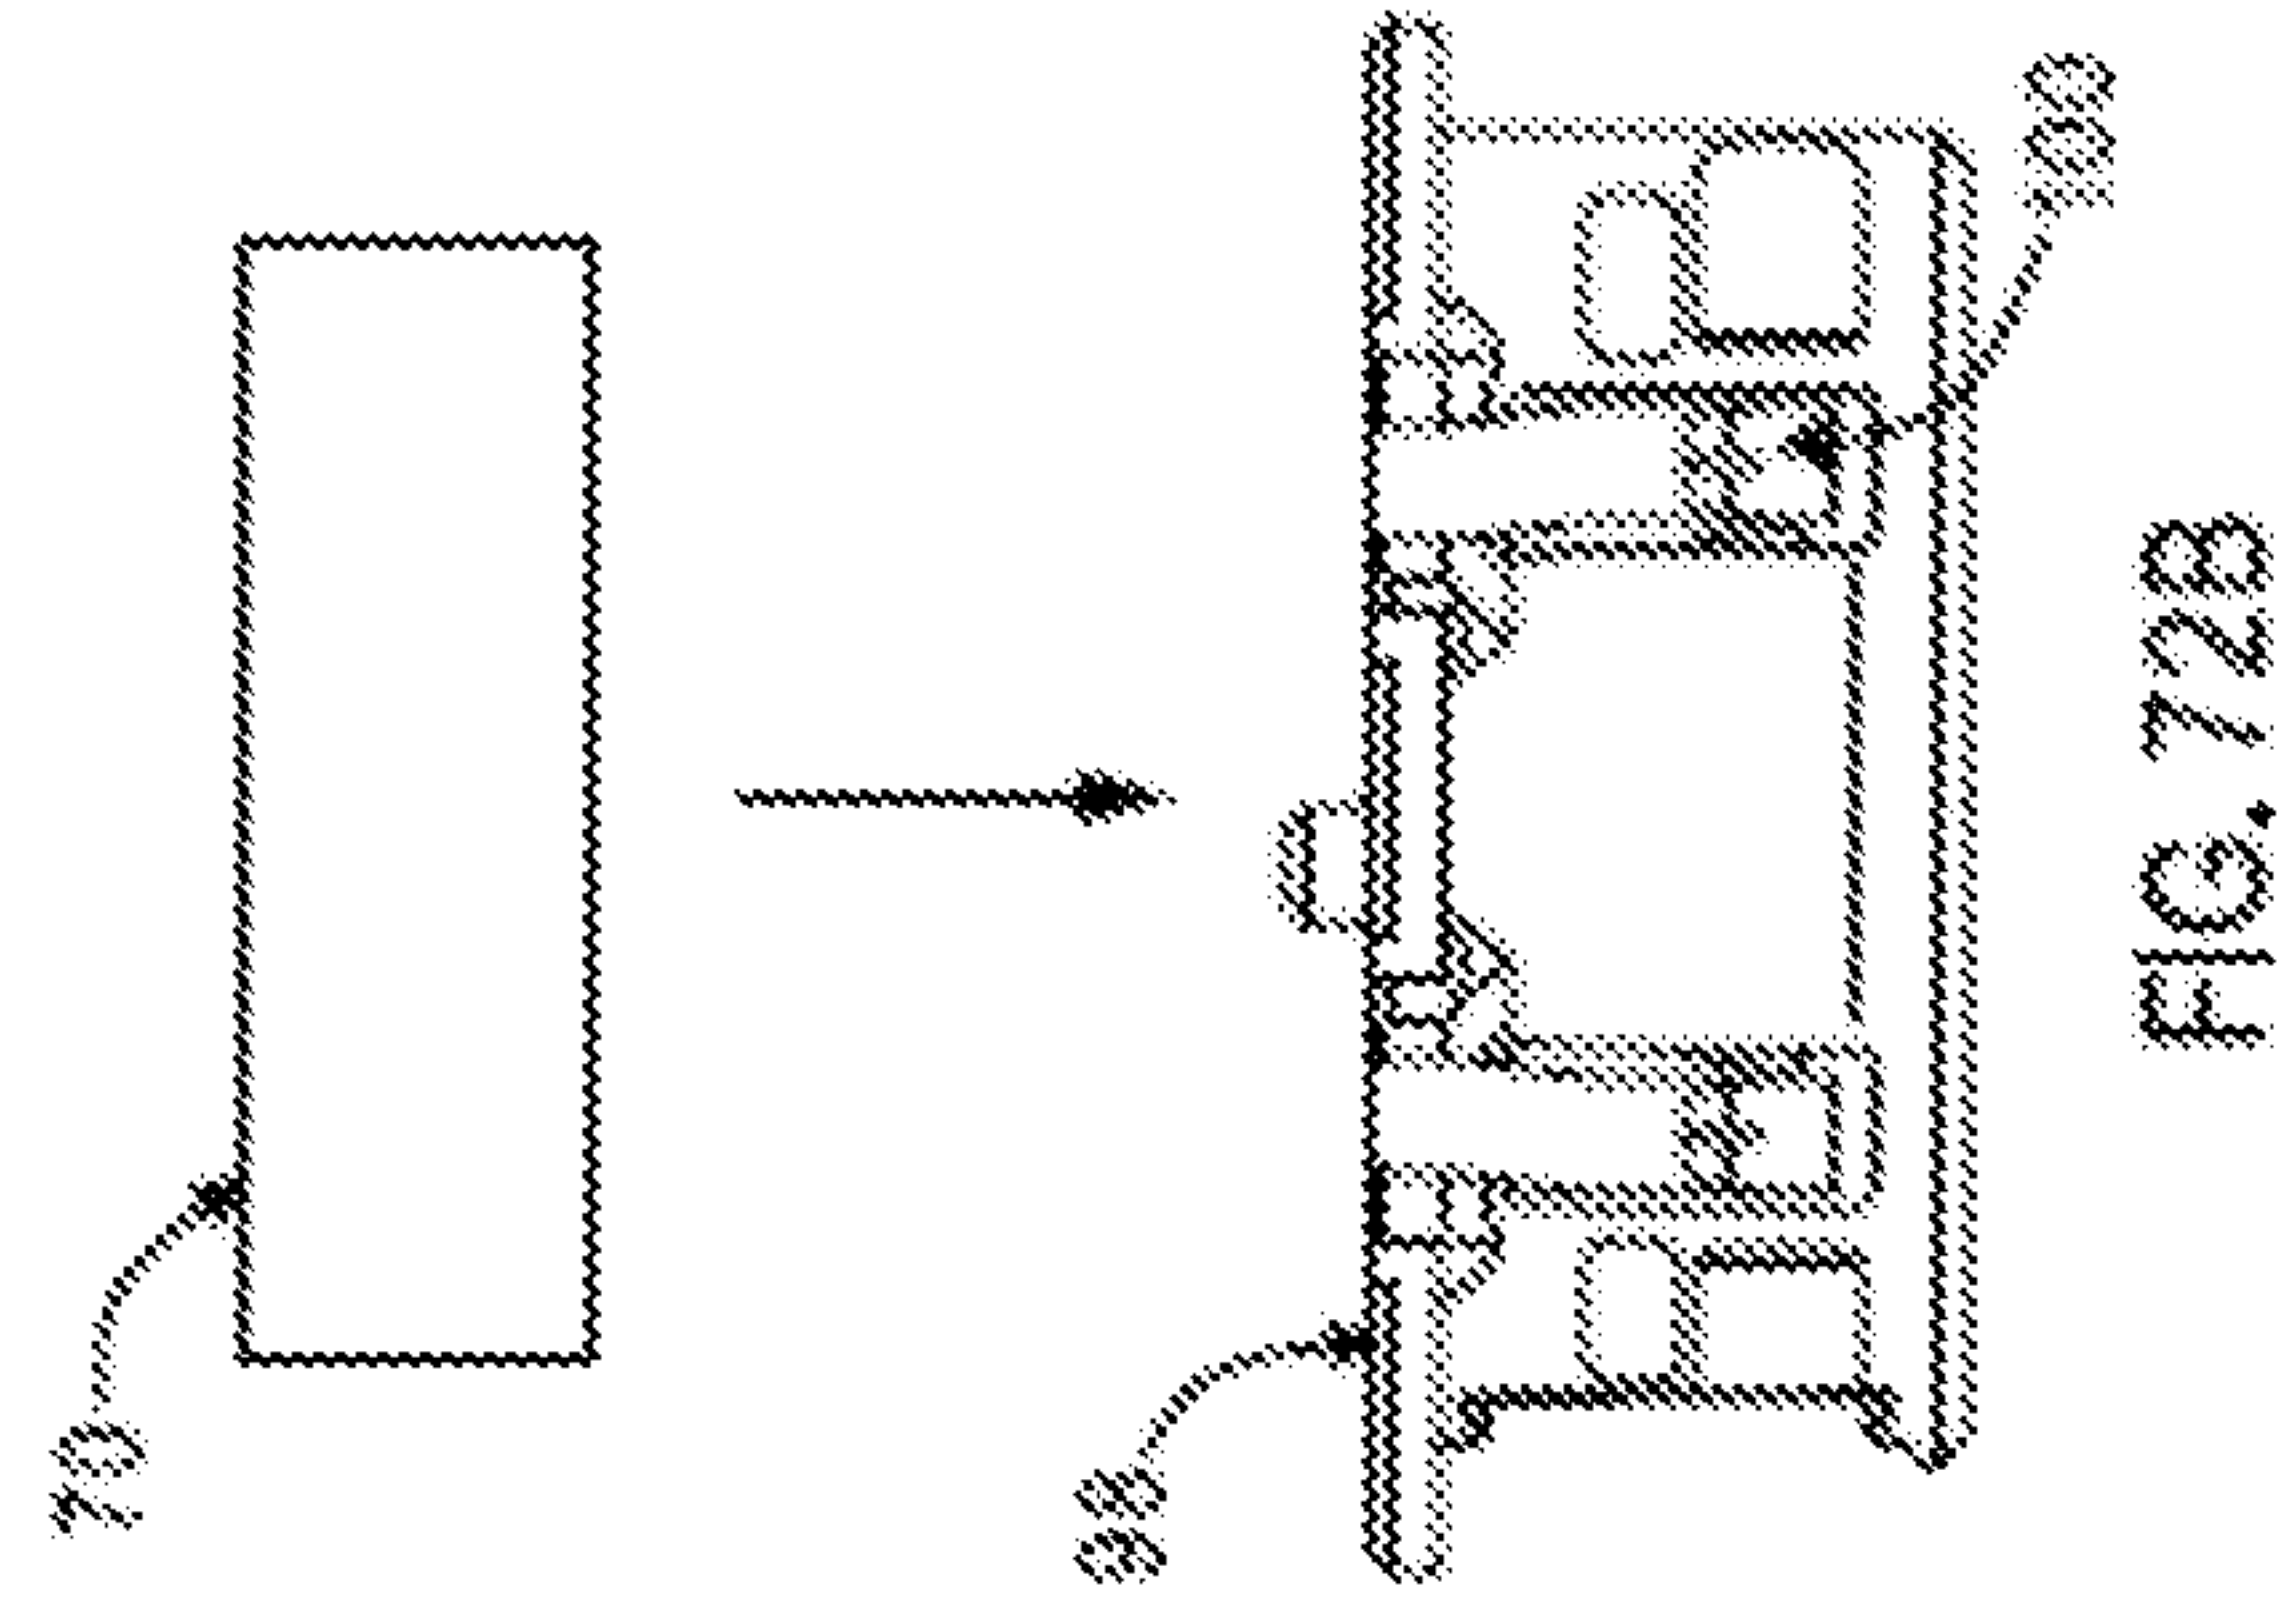
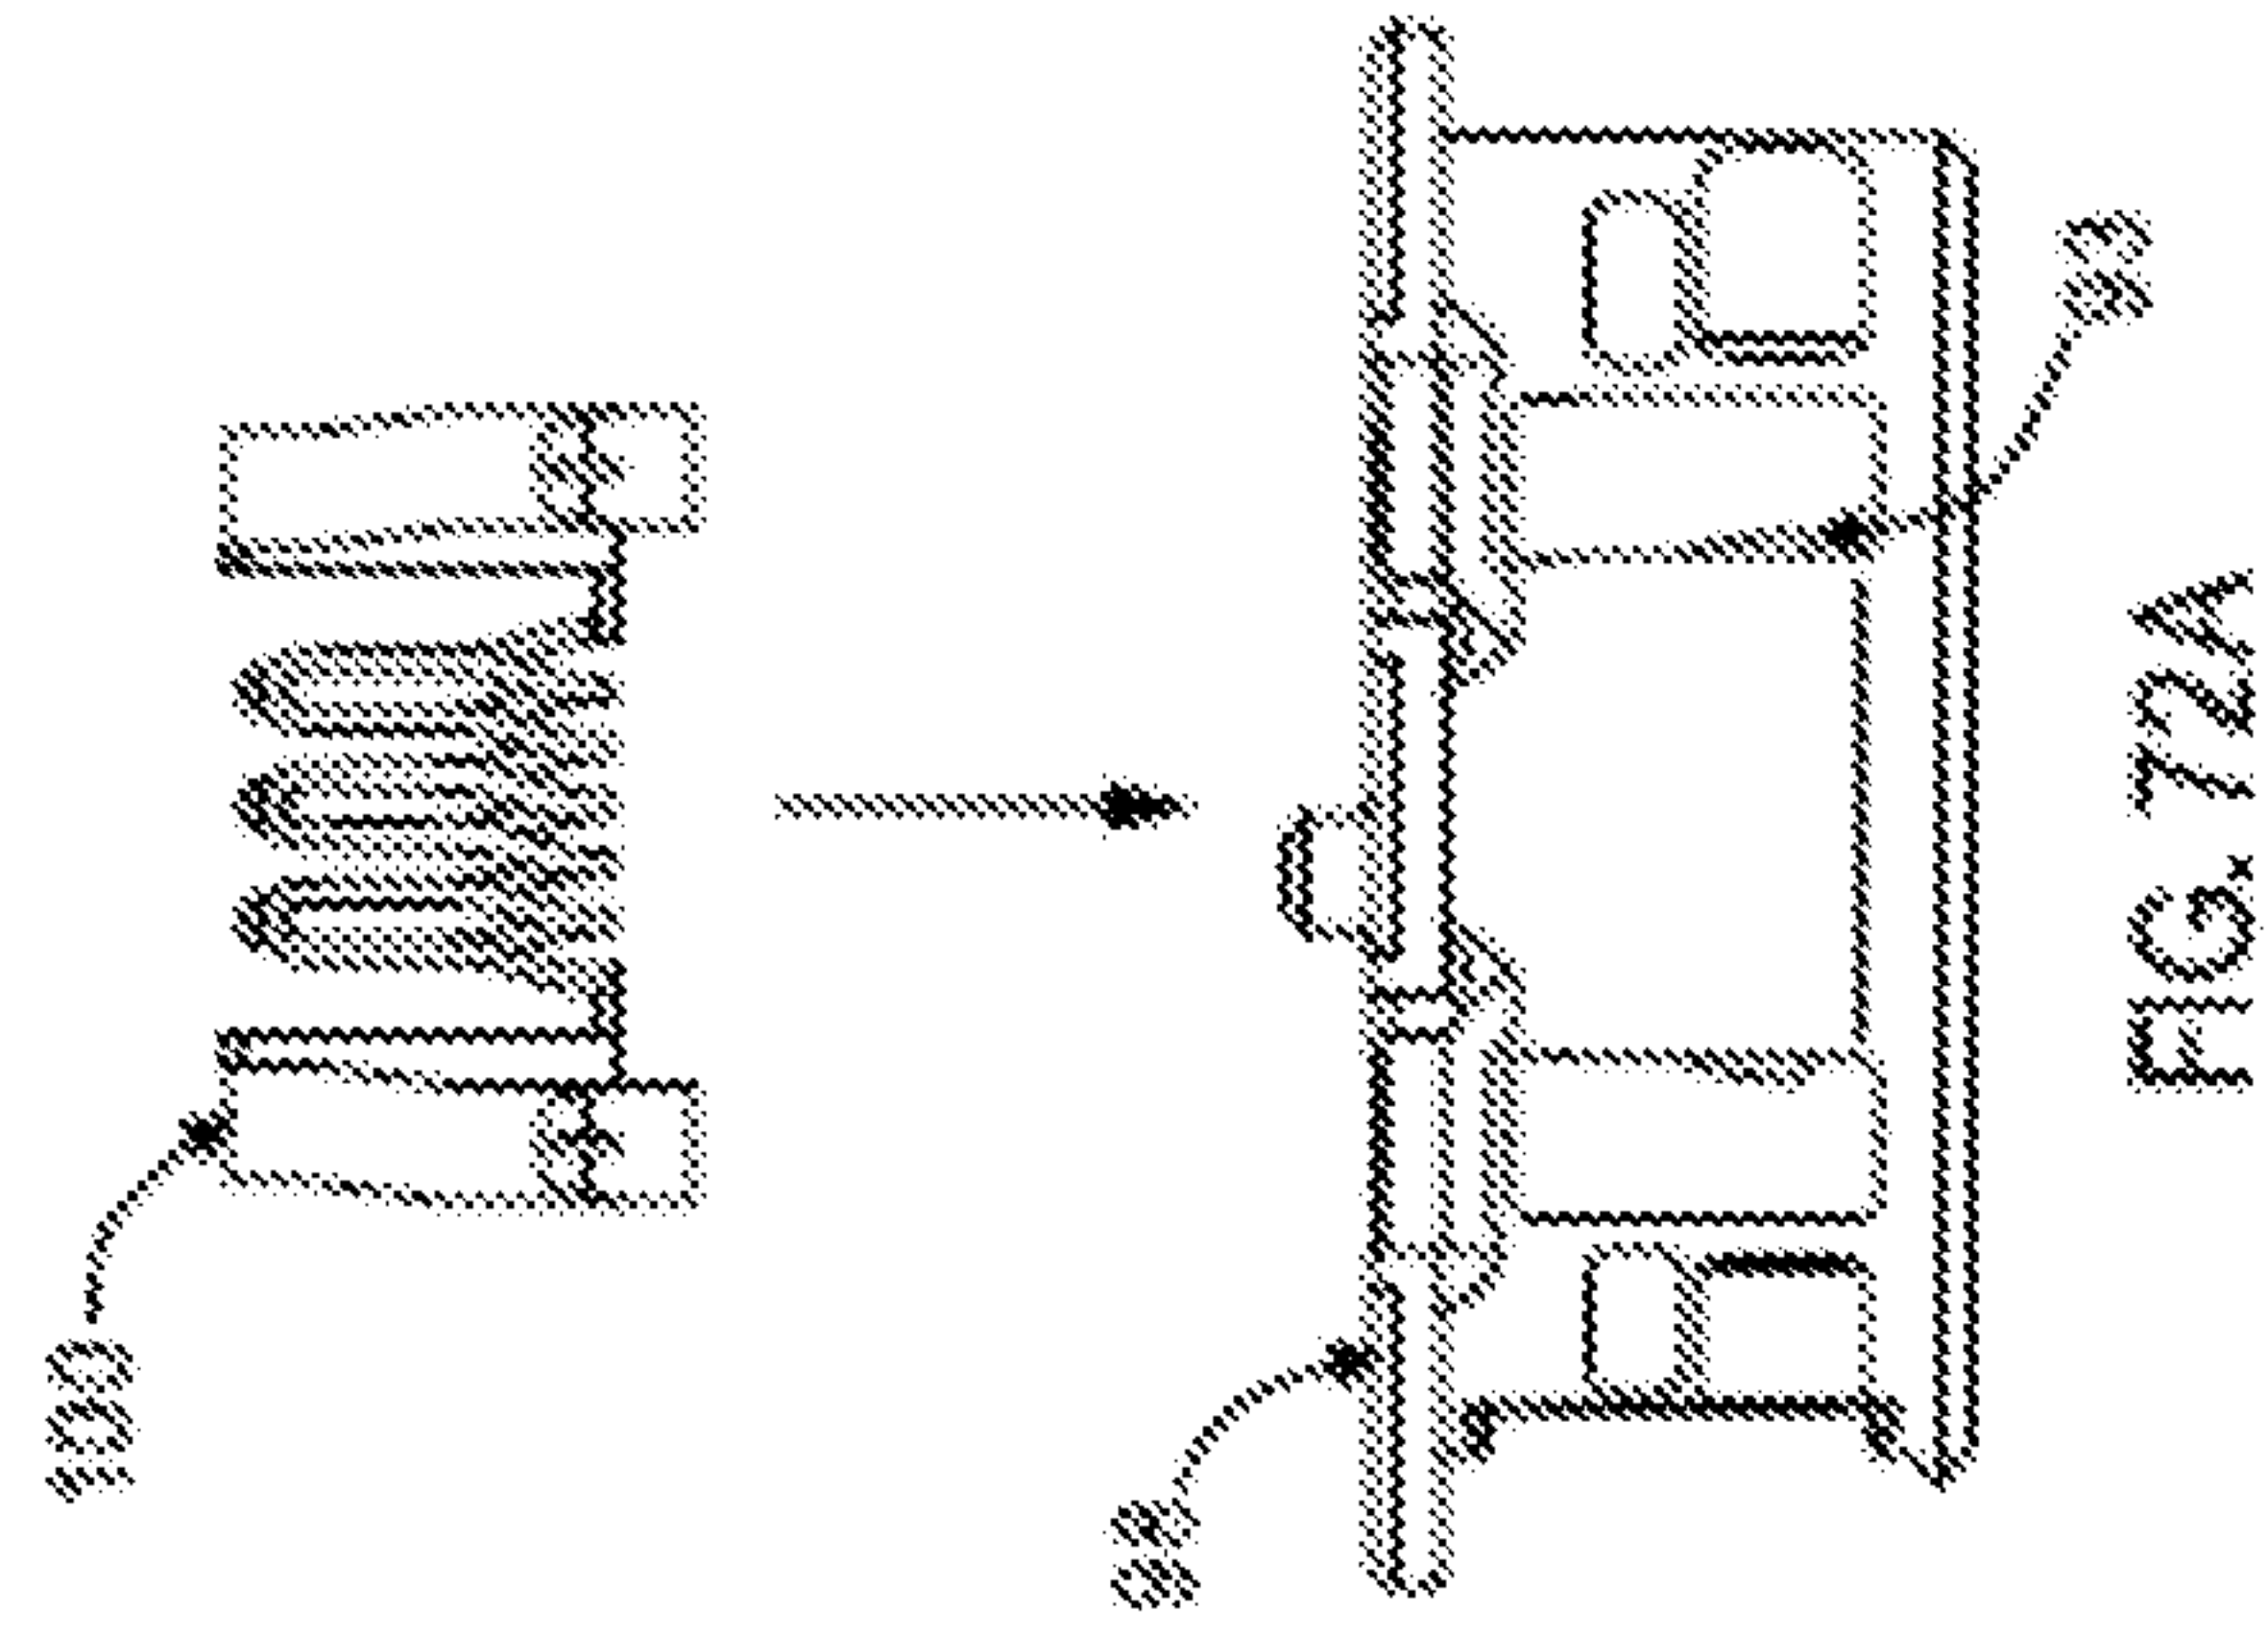


FIG. 70





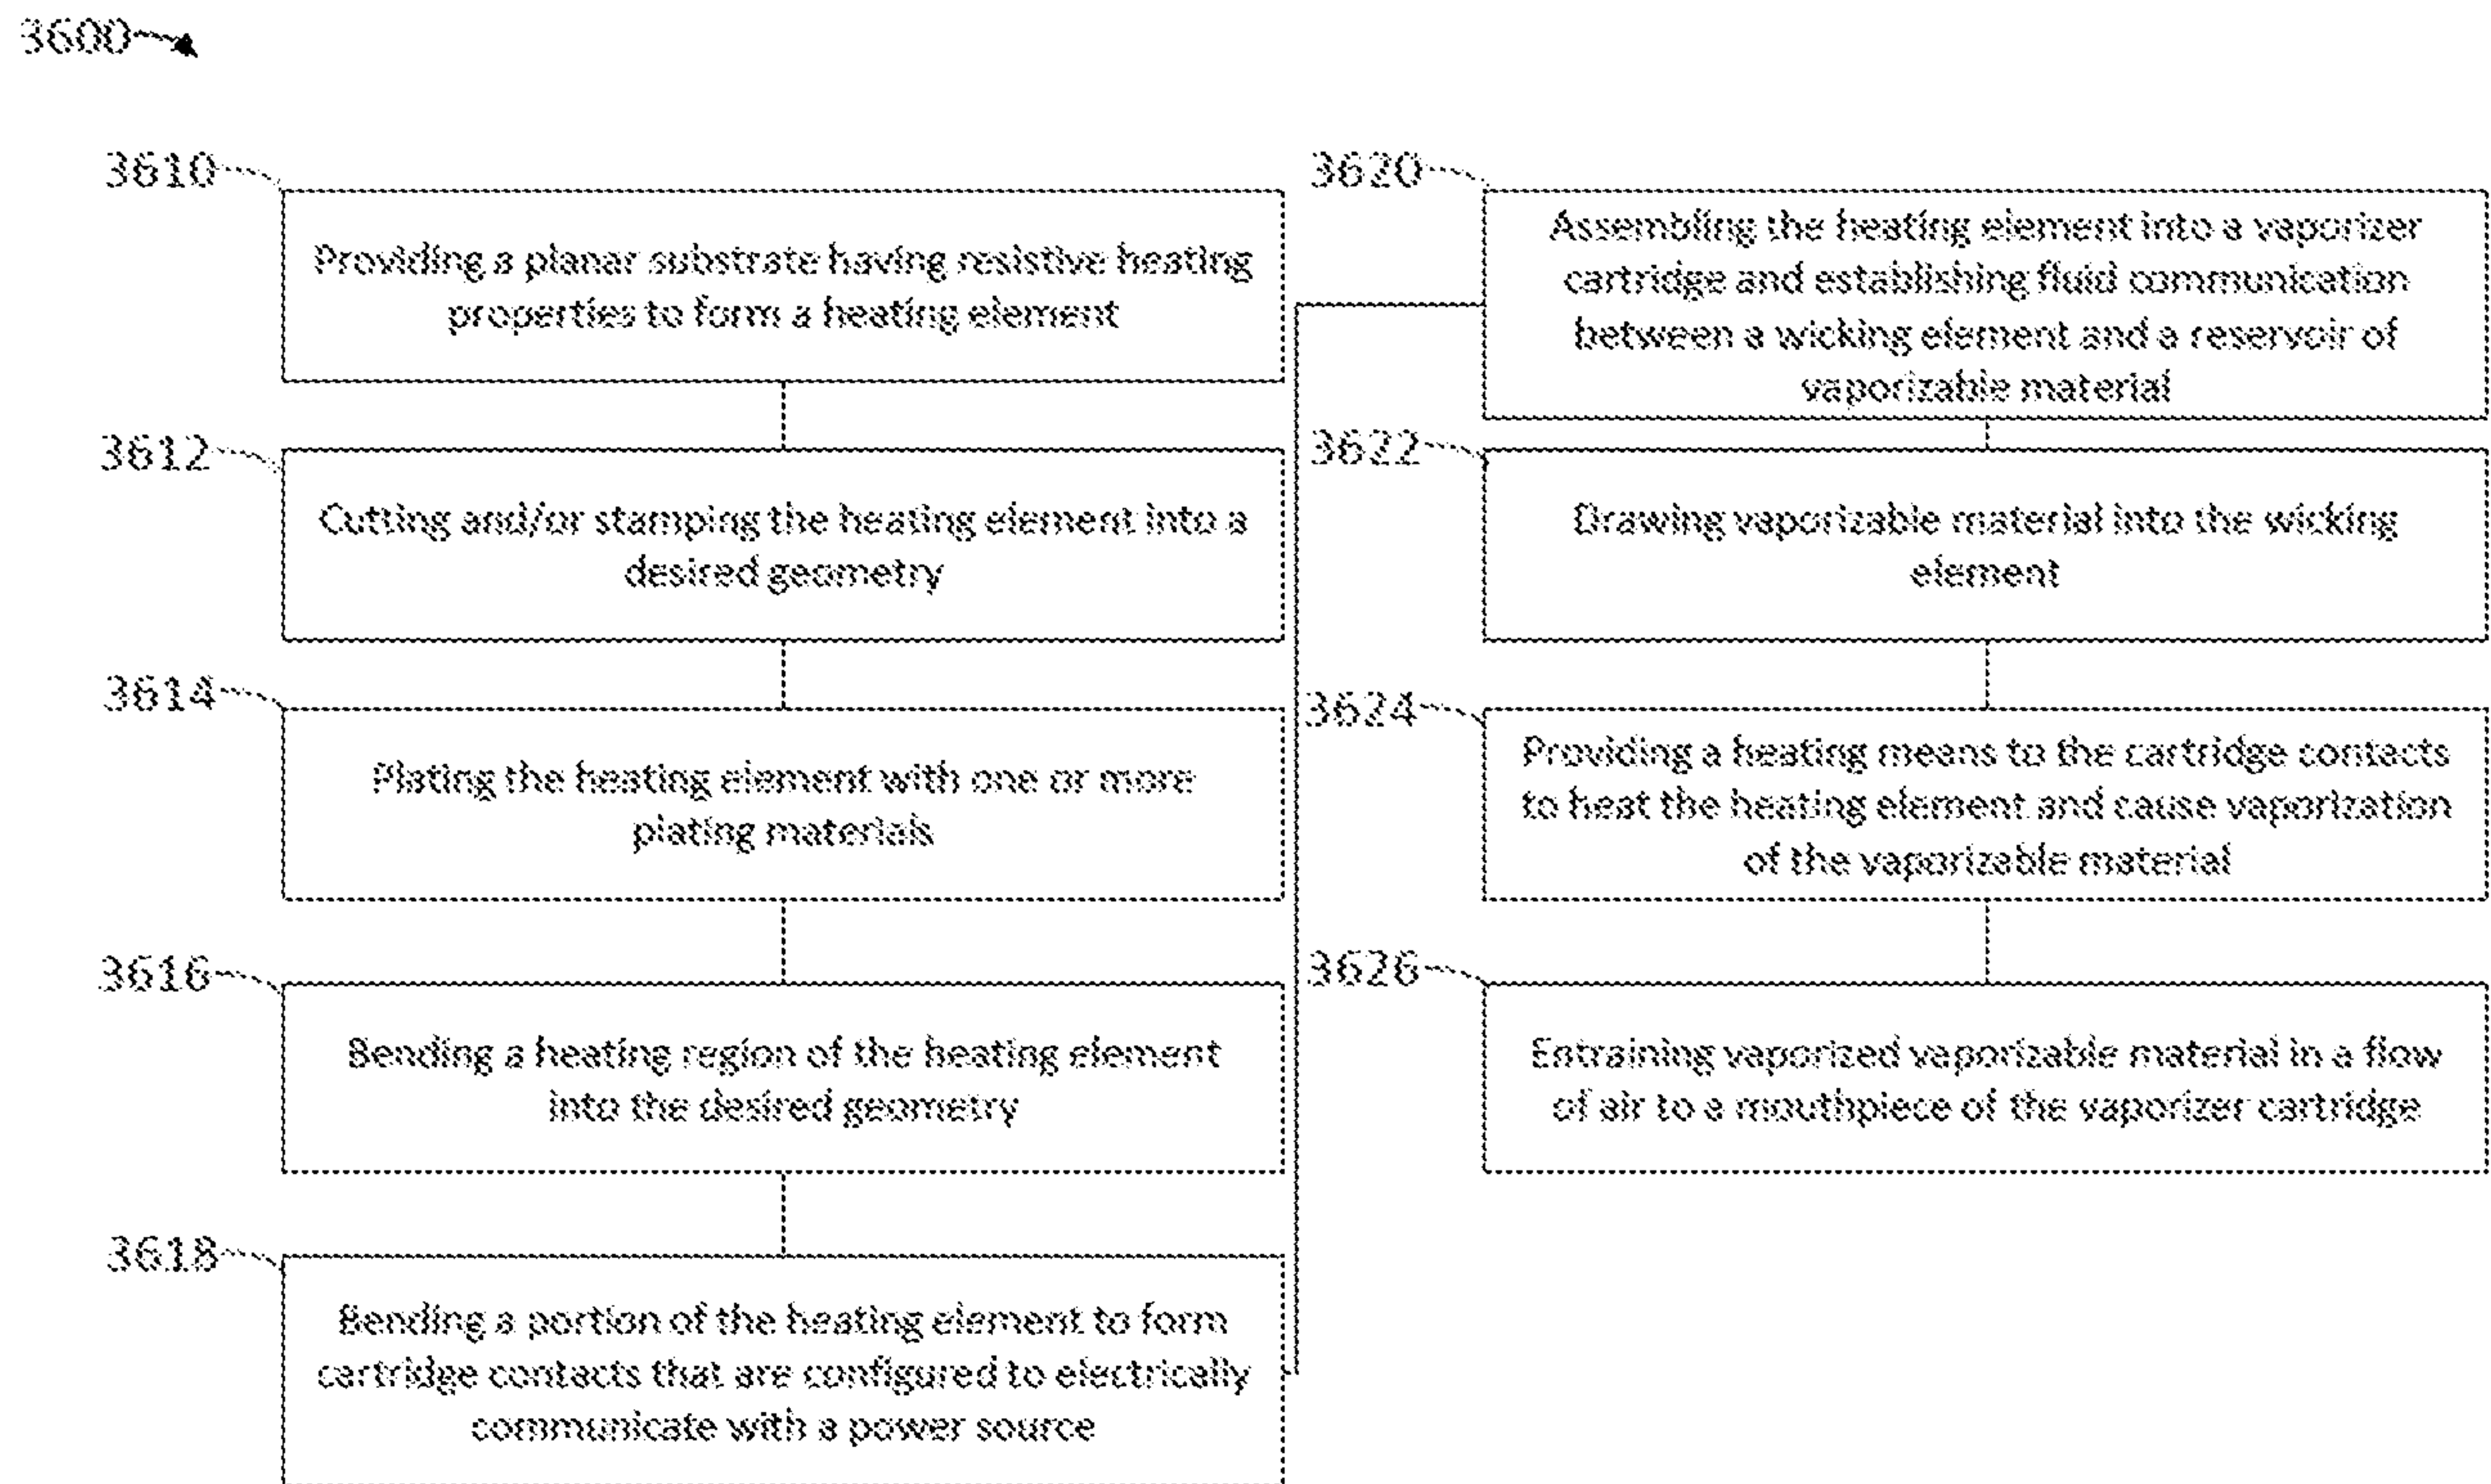


FIG. 73



ONDERZOEKSRAPPORT
BETREFFENDE HET RESULTAAT VAN HET ONDERZOEK NAAR DE STAND VAN DE TECHNIEK

RELEVANTE LITERATUUR			
Categorie ¹	Literatuur met, voor zover nodig, aanduiding van speciaal van belang zijnde tekstgedeelten of figuren.	Van belang voor conclusie(s) nr:	Classificatie (IPC)
X A	EENHEID VAN UITVINDING ONTBREEKT zie aanvullingsblad B ----- US 2016/309786 A1 (HOLTZ ARIE [IL] ET AL) 27 oktober 2016 (2016-10-27) * alinea [0069] - alinea [0071]; figuur 3A * * alinea [0058] * * alinea [0085] * -----	1-15,17, 20-30,65 16,18,19	INV. A24F40/10 A24F40/46
X A	US 9 986 761 B2 (PHILIP MORRIS USA INC [US]) 5 juni 2018 (2018-06-05) * figuren 1,3,11-19 *	1-10, 12-30,65 11	
X A	WO 2016/079155 A1 (MCNEIL AB) 26 mei 2016 (2016-05-26) * figuren 6a-8.10A,10B,10C *	1,3-6, 12-14, 17,20, 22-25, 29,30 2,7-11, 15,16, 18,19, 21,26-28	Onderzochte gebieden van de techniek A24F
X A	US 2018/027879 A1 (GAVRIELOV SHMUEL [IL] ET AL) 1 februari 2018 (2018-02-01) * figuren 2-12 * -----	1,3-6, 13-17, 19,65 2,7-12, 18,20-30	
Indien gewijzigde conclusies zijn ingediend, heeft dit rapport betrekking op de conclusies ingediend op:			
Plaats van onderzoek: München		Datum waarop het onderzoek werd voltooid: 8 juni 2020	Bevoegd ambtenaar: Caballero Martínez
¹ CATEGORIE VAN DE VERMELDE LITERATUUR			
X: de conclusie wordt als niet nieuw of niet inventief beschouwd ten opzichte van deze literatuur Y: de conclusie wordt als niet inventief beschouwd ten opzichte van de combinatie van deze literatuur met andere geciteerde literatuur van dezelfde categorie, waarbij de combinatie voor de vakman voor de hand liggend wordt geacht A: niet tot de categorie X of Y behorende literatuur die de stand van de techniek beschrijft O: niet-schriftelijke stand van de techniek P: tussen de voorrangsdatum en de indieningsdatum gepubliceerde literatuur T: na de indieningsdatum of de voorrangsdatum gepubliceerde literatuur die niet bezwarend is voor de octrooiaanvraag, maar wordt vermeld ter verheldering van de theorie of het principe dat ten grondslag ligt aan de uitvinding E: eerdere octrooi(aanvraag), gepubliceerd op of na de indieningsdatum, waarin dezelfde uitvinding wordt beschreven D: in de octrooiaanvraag vermeld L: om andere redenen vermelde literatuur &: lid van dezelfde octrooifamilie of overeenkomstige octrooipublicatie			

AANVULLINGSBLAD B

De Instantie belast met het uitvoeren van het onderzoek naar de stand van de techniek heeft vastgesteld dat deze aanvraag meerdere uitvindingen bevat, te weten:

1. conclusies: 1-30(compleet); 65(gedeeltelijk)

A heating element of a vaporizer device comprising a reservoir containing vaporizable material and a wicking element in fluid communication with the reservoir, the heating element comprising a heating portion comprising at least two times spaced apart from one another, the heating portion being preformed to define an interior volume configured to receive the wicking element such that the heating portion secures at least a portion of the wicking element to the heating element, the heating portion being configured to contact at least two separate surfaces of the wicking element; and at least two legs coupled to the at least two times and spaced apart from the heating portion, the at least two legs configured to electrically communicate with a power source, wherein power is configured to be supplied to the heating portion from the power source to generate heat, thereby vaporizing the vaporizable material stored within the wicking element.

2. conclusies: 31-38(compleet); 65(gedeeltelijk)

A heating element of a vaporizer device, comprising a heating portion comprising one or more heater traces integrally formed and spaced apart from one another, the one or more heater traces configured to contact at least a portion of a wicking element of the vaporizer device; a connecting portion configured to receive power from a power source and direct the power to the heating portion; and a plating layer having a plating material that is different from a material of the heating portion, the plating layer configured to reduce contact resistance between the heating element and the power source, thereby localizing heating of the heating element to the heating portion.

3. conclusies: 39-45

A method of forming a heating element for a vaporizer cartridge comprising a reservoir containing vaporizable material and a wicking element in fluid communication with the reservoir, the method comprising providing a planar substrate comprising a resistive heating material; stamping the planar substrate into a desired shape of the heating element; and folding the planar substrate to isolate a heating portion of the heating element from a connecting portion of the heating element, the heating portion configured to heat the vaporizable material to generate an aerosol, and the connecting portion configured to electrically communicate with a power source to provide

GEBREK AAN EENHEID VAN UITVINDING

Octrooiaanvraag Nr.:

NO 140554
NL 2024023

AANVULLINGSBLAD B

De Instantie belast met het uitvoeren van het onderzoek naar de stand van de techniek heeft vastgesteld dat deze aanvraag meerdere uitvindingen bevat, te weten:

power to the heating portion.

4. conclusies: 46-64(compleet); 65(gedeeltelijk)

A wick housing of a vaporizer cartridge configured to be coupled to a vaporizer body, the wick housing comprising an outer wall; and an interior volume defined by the outer wall, the interior volume configured to receive a portion of a heating element and a wicking element of the vaporizer device.

5. conclusies: 66-91

A heating element of a vaporizer device comprising a reservoir containing vaporizable material and a wicking element in fluid communication with the reservoir, the heating element comprising a heating portion comprising at least two times spaced apart from one another; a cartridge contact configured to be in electrical communication with a power source; and a leg extending between the heating portion and the cartridge contact, wherein the heating portion is configured to be crimped around the wicking element such that the heating portion secures at least a portion of the wicking element to the heating element and contacts at least two surfaces of the wicking element.

Het vooronderzoek werd tot het eerste onderwerp beperkt.

**AANHANGSEL BEHORENDE BIJ HET RAPPORT BETREFFENDE
HET ONDERZOEK NAAR DE STAND VAN DE TECHNIEK,
UITGEVOERD IN DE OCTROOIAANVRAGE NR.**

NO 140554
NL 2024023

Het aanhangsel bevat een opgave van elders gepubliceerde octrooiaanvragen of octrooien (zogenaamde leden van dezelfde octrooifamilie), die overeenkomen met octrooischriften genoemd in het rapport.

De opgave is samengesteld aan de hand van gegevens uit het computerbestand van het Europees Octrooibureau per
De juistheid en volledigheid van deze opgave wordt noch door het Europees Octrooibureau, noch door het Bureau voor de Industriële eigendom gegarandeerd; de gegevens worden verstrekt voor informatiedoeleinden.

08-06-2020

In het rapport genoemd octrooigeschrift	Datum van publicatie	Overeenkomend(e) geschrift(en)	Datum van publicatie
US 2016309786 A1	27-10-2016	CN 107580460 A EA 201792338 A1 EP 3286984 A1 US 2016309786 A1 WO 2016172441 A1	12-01-2018 31-07-2018 28-02-2018 27-10-2016 27-10-2016
US 9986761 B2	05-06-2018	AU 2010338614 A1 AU 2016273855 A1 BR 112012016215 A2 CA 2785698 A1 CN 102753047 A CO 6561793 A2 DK 2519121 T3 EA 201290586 A1 EP 2340729 A1 EP 2519121 A1 ES 2628856 T3 HU E033572 T2 JP 5815559 B2 JP 2013516159 A KR 20120101118 A LT 2519121 T NZ 600932 A PL 2519121 T3 PT 2519121 T SG 182313 A1 UA 108870 C2 US 2011155153 A1 US 2015264979 A1 US 2018279685 A1 WO 2011079932 A1 ZA 201204563 B	26-07-2012 05-01-2017 17-05-2016 07-07-2011 24-10-2012 15-11-2012 24-07-2017 28-12-2012 06-07-2011 07-11-2012 04-08-2017 28-12-2017 17-11-2015 13-05-2013 12-09-2012 10-07-2017 26-09-2014 29-09-2017 05-07-2017 30-08-2012 25-06-2015 30-06-2011 24-09-2015 04-10-2018 07-07-2011 27-02-2013
WO 2016079155 A1	26-05-2016	DK 3220987 T3 EP 3220987 A1 EP 3524304 A1 ES 2738730 T3 HR P20191212 T1 HU E045363 T2 LT 3220987 T PL 3220987 T3 PT 3220987 T TR 201910352 T4 US 2017360092 A1 US 2019116885 A1 US 2020113231 A1	29-07-2019 27-09-2017 14-08-2019 24-01-2020 04-10-2019 30-12-2019 10-07-2019 29-11-2019 27-08-2019 22-07-2019 21-12-2017 25-04-2019 16-04-2020

**AANHANGSEL BEHORENDE BIJ HET RAPPORT BETREFFENDE
HET ONDERZOEK NAAR DE STAND VAN DE TECHNIEK,
UITGEVOERD IN DE OCTROOIAANVRAGE NR.**

NO 140554
NL 2024023

Het aanhangsel bevat een opgave van elders gepubliceerde octrooiaanvragen of octrooien (zogenaamde leden van dezelfde octrooifamilie), die overeenkomen met octrooischriften genoemd in het rapport.
De opgave is samengesteld aan de hand van gegevens uit het computerbestand van het Europees Octrooibureau per
De juistheid en volledigheid van deze opgave wordt noch door het Europees Octrooibureau, noch door het Bureau voor de Industriële eigendom gegarandeerd; de gegevens worden verstrekt voor informatiedoeleinden.

08-06-2020

In het rapport genoemd octrooigeschrift	Datum van publicatie	Overeenkomend(e) geschrift(en)	Datum van publicatie
		WO 2016079155 A1	26-05-2016

US 2018027879 A1	01-02-2018	CA 3028378 A1	08-02-2018
		CN 109414076 A	01-03-2019
		EP 3490393 A1	05-06-2019
		JP 2019527064 A	26-09-2019
		KR 20190035690 A	03-04-2019
		US 2018027879 A1	01-02-2018
		US 2018338540 A1	29-11-2018
		US 2019261693 A1	29-08-2019
		US 2020146357 A1	14-05-2020
		WO 2018024742 A1	08-02-2018

SCHRIFTELIJKE OPINIE

DOSSIER NUMMER NO140554	INDIENINGSDATUM 15.10.2019	VOORRANGSDATUM 15.10.2018	AANVRAAGNUMMER NL2024023
CLASSIFICATIE INV. A24F40/10 A24F40/46			
AANVRAGER JUUL Labs, Inc.			

Deze schriftelijke opinie bevat een toelichting op de volgende onderdelen:

- ☒ Onderdeel I Basis van de schriftelijke opinie
- ☐ Onderdeel II Voorrang
- ☒ Onderdeel III Vaststelling nieuwheid, inventiviteit en industriële toepasbaarheid niet mogelijk
- ☒ Onderdeel IV De aanvraag heeft betrekking op meer dan één uitvinding
- ☒ Onderdeel V Gemotiveerde verklaring ten aanzien van nieuwheid, inventiviteit en industriële toepasbaarheid
- ☐ Onderdeel VI Andere geciteerde documenten
- ☒ Onderdeel VII Overige gebreken
- ☒ Onderdeel VIII Overige opmerkingen

	DE BEVOEGDE AMBTENAAR Caballero Martínez
--	---

SCHRIFTELIJKE OPINIE

Aanvraag nr.:
NL2024023

Onderdeel I Basis van de Schriftelijke Opinie

1. Deze schriftelijke opinie is opgesteld op basis van de meest recente conclusies ingediend voor aanvang van het onderzoek.
2. Met betrekking tot **nucleotide en/of aminozuur sequenties** die genoemd worden in de aanvraag en relevant zijn voor de uitvinding zoals beschreven in de conclusies, is dit onderzoek gedaan op basis van:
 - a. type materiaal:
 - ☐ sequentie opsomming
 - ☐ tabel met betrekking tot de sequentie lijst
 - b. vorm van het materiaal:
 - ☐ op papier
 - ☐ in elektronische vorm
 - c. moment van indiening/aanlevering:
 - ☐ opgenomen in de aanvraag zoals ingediend
 - ☐ samen met de aanvraag elektronisch ingediend
 - ☐ later aangeleverd voor het onderzoek
3. ☐ In geval er meer dan één versie of kopie van een sequentie opsomming of tabel met betrekking op een sequentie is ingediend of aangeleverd, zijn de benodigde verklaringen ingediend dat de informatie in de latere of additionele kopieën identiek is aan de aanvraag zoals ingediend of niet meer informatie bevatten dan de aanvraag zoals oorspronkelijk werd ingediend.
4. Overige opmerkingen:

SCHRIFTELIJKE OPINIE

Aanvraag nr.:
NL2024023

Onderdeel III Vaststelling nieuwheid, inventiviteit en industriële toepasbaarheid niet mogelijk

De vraag of de uitvinding in de aanvraag nieuw, inventief en industrieel toepasbaar is, wordt niet behandeld in deze schriftelijke opinie met betrekking tot:

- ☐ de gehele aanvraag
- ☒ conclusies 31-64, 66-91(compleet); 65(gedeeltelijk)

omdat:

- ☐ deze aanvraag of deze conclusies , betrekking hebben op materie waarvoor het niet zinvol is een schriftelijke opinie op te stellen.
- ☐ de beschrijving, figuren of deze conclusies , , zo onduidelijk zijn dat het niet zinvol is een schriftelijke opinie op te stellen.
- ☐ deze conclusies , onvoldoende steun vinden in de beschrijving waardoor het niet zinvol is een schriftelijke opinie op te stellen.
- ☒ geen onderzoek naar de stand van de techniek is uitgevoerd voor deze conclusies 31-64, 66-91(compleet) ; 65(gedeeltelijk).
- ☐ een zinvolle schriftelijke opinie niet opgesteld kon worden omdat de sequentie opsomming niet beschikbaar was in het juiste formaat, of in het geheel niet beschikbaar was (WIPO ST25).
- ☐ een zinvolle schriftelijke opinie niet opgesteld kon worden zonder de tabellen met betrekking tot de sequentie opsommingen; of deze tabellen waren niet beschikbaar in elektronische vorm.
- ☐ Zie aparte bladzijde

Onderdeel IV De aanvraag heeft betrekking op meer dan één uitvinding

1. Vastgesteld is dat de octrooiaanvraag betrekking heeft op meer dan één uitvinding.
2. Het onderzoek naar de stand van de techniek is beperkt tot de eerstgenoemde uitvinding in de conclusies en betreft:
 - ☐ alle conclusies
 - ☒ conclusies: (zie nieuwheidsrapport)

Onderdeel V Gemotiveerde verklaring ten aanzien van nieuwheid, inventiviteit en industriële toepasbaarheid

1. Verklaring

Nieuwheid	Ja: Conclusies 12 Nee: Conclusies 1-11, 13-30(compleet); 65(gedeeltelijk)
Inventiviteit	Ja: Conclusies Nee: Conclusies 1-30(compleet); 65(gedeeltelijk)
Industriële toepasbaarheid	Ja: Conclusies 1-30(compleet); 65(gedeeltelijk) Nee: Conclusies

2. Citaties en toelichting:

Zie aparte bladzijde

Onderdeel VII Overige gebreken

De volgende gebreken in de vorm of inhoud van de aanvraag zijn opgemerkt:

Zie aparte bladzijde

Onderdeel VIII Overige opmerkingen

De volgende opmerkingen met betrekking tot de duidelijkheid van de conclusies, beschrijving, en figuren, of met betrekking tot de vraag of de conclusies nawerkbaar zijn, worden gemaakt:

Zie aparte bladzijde

1 **Re Item IV**

Lack of unity of invention

1.1 Reference is made to the following documents:

- D1 US 2016/309786 A1 (HOLTZ ARIE [IL] ET AL) 27 October 2016 (2016-10-27)
- D2 US 9 986 761 B2 (PHILIP MORRIS USA INC [US]) 5 June 2018 (2018-06-05)
- D3 WO 2016/079155 A1 (MCNEIL AB) 26 May 2016 (2016-05-26)
- D4 US 2018/027879 A1 (GAVRIELOV SHMUEL [IL] ET AL) 1 February 2018 (2018-02-01)

1.2 This Authority considers that the application does not meet the requirements of unity of invention and that there are 5 inventions covered by the claims indicated as follows:

claims: 1-30(completely); 65(partially)

A heating element of a vaporizer device comprising a reservoir containing vaporizable material and a wicking element in fluid communication with the reservoir, the heating element comprising a heating portion comprising at least two tines spaced apart from one another, the heating portion being preformed to define an interior volume configured to receive the wicking element such that the heating portion secures at least a portion of the wicking element to the heating element, the heating portion being configured to contact at least two separate surfaces of the wicking element; and at least two legs coupled to the at least two tines and spaced apart from the heating portion, the at least two legs configured to electrically communicate with a power source, wherein power is configured to be supplied to the heating portion from the power source to generate heat, thereby vaporizing the vaporizable material stored within the wicking element.

claims: 31-38(completely); 65(partially)

A heating element of a vaporizer device, comprising a heating portion comprising one or more heater traces integrally formed and spaced apart from one another, the one or more heater traces configured to contact at least a portion of a wicking element of the vaporizer device; a connecting portion configured to receive power from a power source and direct the power to the heating portion; and a plating layer having a plating material that is different

from a material of the heating portion, the plating layer configured to reduce contact resistance between the heating element and the power source, thereby localizing heating of the heating element to the heating portion.

claims: 39-45

A method of forming a heating element for a vaporizer cartridge comprising a reservoir containing vaporizable material and a wicking element in fluid communication with the reservoir, the method comprising providing a planar substrate comprising a resistive heating material; stamping the planar substrate into a desired shape of the heating element; and folding the planar substrate to isolate a heating portion of the heating element from a connecting portion of the heating element, the heating portion configured to heat the vaporizable material to generate an aerosol, and the connecting portion configured to electrically communicate with a power source to provide power to the heating portion.

claims: 46-64(completely); 65(partially)

A wick housing of a vaporizer cartridge configured to be coupled to a vaporizer body, the wick housing comprising an outer wall; and an interior volume defined by the outer wall, the interior volume configured to receive a portion of a heating element and a wicking element of the vaporizer device.

claims: 66-91

A heating element of a vaporizer device comprising a reservoir containing vaporizable material and a wicking element in fluid communication with the reservoir, the heating element comprising a heating portion comprising at least two tines spaced apart from one another; a cartridge contact configured to be in electrical communication with a power source; and a leg extending between the heating portion and the cartridge contact, wherein the heating portion is configured to be crimped around the wicking element such that the heating portion secures at least a portion of the wicking element to the heating element and contacts at least two surfaces of the wicking element.

1.3 The reasons for which the inventions are not so linked as to form a single general inventive concept are as follows:

The common matter between the different inventions is as follows:

- Between inventions 1 and 2, a heating element of a vaporizer device, comprising a heating portion suitable to contact a wicking element and to connect a power source.

- Between invention 3 and the rest, a heating element comprising a heating portion configured to heat vaporizable material to generate an aerosol, and a connecting portion configured to electrically communicate with a power source to provide power to the heating portion.
- Between invention 4 and the rest, a heating element for a vaporizer device.
- Between inventions 1 and 5, a heating element comprising a heating portion with at least two tines spaced apart from one another; and a leg extending between the heating portion and the electrical contact with the power source.
- Between inventions 2 and 5, a heating element of a vaporizer device, comprising a heating portion configured to contact a wicking element; and configured to be in electrical communication with a power source.

None of the listed common subject-matters can be considered as providing a single general inventive concept, as all the features are disclosed in the heating element of document D1, D2, D3 and D4.

Concerning the remaining technical features of the different groups of claims:

- Invention 1 combines in particular a preformed heating portion defining a volume configured to contact two separate surfaces of the wicking element, as well as two tines and two legs to electrically connect said heating element to a power source.
- Invention 2 discloses in particular a plating layer of a plating material different from a material of the heating portion.
- Invention 3 discloses a method of forming a heating element comprising stamping and folding a planar substrate to obtain a heating element.
- Invention 4 discloses a wick housing to receive a portion of a (any) heating element.
- Invention 5 combines in particular a heating element comprising the heating portion is configured to be crimped around the wicking element such that the heating portion secures at least a portion of the wicking element to the heating element and contacts at least two surfaces of the wicking element.

The only remaining technical features that solve the same technical problem are the preformed heating portion of invention 1 and the heating portion configured to be crimped of invention 5. The solved technical problem can be considered as ensuring a stable assembly and contact between the wick and the heating element. This problem is well known in the art and addressed by all heating elements in contact with a wicking element. As a consequence, the said

remaining features cannot be regarded as corresponding special technical features, and the single general concept linking the two inventions as defined by the common subject-matter and said common problem being known from the prior art, inventions 1 and 5 do not share a single general inventive concept.

Hence, the claims comprise neither the same, nor corresponding special technical features, so the technical relationship between the subject matter of the claims is lacking and the claims are not so linked as to form a single general inventive concept.

Consequently the application does not meet the requirement for unity of invention.

2 **Re Item V**

Reasoned statement with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement

2.1 **Independent Claims**

The present application does not meet the criteria of patentability, because the subject-matter of claim 1 is not new.

Document D1 discloses (paragraph [0069] - paragraph [0071]; figure 3A) a heating element ("dual heating element") for a vaporizer device comprising a reservoir containing vaporizable material and a wicking element in fluid communication with the reservoir, the heating element comprising a heating portion (upper part) comprising at least two tines (parts surrounding the filament) spaced apart from one another, the heating portion being preformed to define an interior volume (between the two "single" heating elements forming the dual heating element) configured to receive the wicking element (porous substrate 400, see also paragraph [0085]) such that the heating portion secures at least a portion of the wicking element to the heating element, the heating portion being configured to contact at least two separate surfaces (upper filament, lower filament, tines) of the wicking element; and at least two legs (30, 40) coupled to the at least two tines and spaced apart from the heating portion, the at least two legs configured to electrically communicate with a power source (electrical contacts 31, 41), wherein power is configured to be supplied to the heating portion from the power source to generate heat, thereby vaporizing the vaporizable material stored within the wicking element.

Therefore, document D1 discloses all the features of claim 1, and the subject-matter of said claim is not novel over said document.

The attention of the applicant is drawn to the fact that the features of claim 1 are also disclosed in documents D2, D3 and D4. Thus the subject-matter of said claim cannot be considered novel against said documents either.

The same reasoning applies, mutatis mutandis, to the subject-matter of independent claim 29, which describes the method for forming an atomizer assembly wherein the heating element comprises most of the technical features worded in claim 1. The presence of a wick is required in claim 29 while not in claim 1, and therefore, the subject-matter of claim 29 is considered not novel over D1 - D3.

2.2 Dependent Claims

Dependent claims 2 - 28 and 30 do not appear to contain any additional features which, in combination with the features of any claim to which they refer, meet the requirements in respect of novelty and inventive step.

3 Re Item VII

Certain defects in the application

Independent claims 1 and 29 are not in the two-part form, which in the present case would be appropriate, with those features known in combination from the prior art D1 being placed in the preamble and the remaining features being included in the characterising part.

The features of the claims are not provided with reference signs placed in parentheses.

The relevant background art disclosed in D1 - D4 is not mentioned in the description, nor are these documents identified therein.

Claim 20 comprises all the features of claim 1 and is therefore not appropriately formulated as a claim dependent on the latter.

4 Re Item VIII

Certain observations on the application

Claim 1 is not clear. The wording "heating element OF a vaporizer device" leaves the reader in doubt as if the claimed subject-matter concerns the heating element or the whole vaporizer device. For said opinion, the subject-matter has been considered as the heating element, for which a more appropriate wording would be "heating element FOR a vaporizer device".

Claim 13 is not clear. The heating element being the subject matter for what protection is sought is being defined by features of a vaporizer device, which does not form part of said subject-matter. In particular, it is unclear how the

presence of a heat shield in the vaporizer may help define the claimed heating element. Said references to an entity external to the claimed subject-matter have not been taken into consideration for the assessment of novelty and inventive step under Item V.

Claim 14 is not clear. It is unclear how the heating portion may be folded if the folding takes place between said heating portion and the legs, thus outside the heating portion.