

19



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



11 Publication number:

**0 310 876 B1**

12

**EUROPEAN PATENT SPECIFICATION**

45 Date of publication of patent specification: **04.08.93** / 61 Int. Cl.<sup>5</sup>: **H04Q 7/04, H04M 1/72**

21 Application number: **88115574.1**

22 Date of filing: **22.09.88** /

54 **Radio arrangement having two radios sharing circuitry.** /

30 Priority: **09.10.87 US 107227**

43 Date of publication of application:  
**12.04.89 Bulletin 89/15**

45 Publication of the grant of the patent:  
**04.08.93 Bulletin 93/31**

84 Designated Contracting States:  
**AT BE CH DE ES FR GB GR IT LI LU NL SE**

56 References cited:  
**US-A- 4 390 963**  
**US-A- 4 525 865**  
**US-A- 4 625 274**  
**US-A- 4 677 653**  
**US-A- 4 680 787**

73 Proprietor: **MOTOROLA, INC.** /  
**1303 East Algonquin Road**  
**Schaumburg, IL 60196(US)**

72 Inventor: **Metroka, Michael P.**  
**730 Oakview Drive**  
**Algonquin Illinois 60102(US)**

74 Representative: **Ibbotson, Harold et al**  
**MOTOROLA European Intellectual Property**  
**Operations Jays Close Viables Ind. Estate**  
**Basingstoke Hants RG22 4PD (GB)**

**EP 0 310 876 B1**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid (Art. 99(1) European patent convention).

## Description

The present invention relates generally to RF communication systems, and particularly to mobile and portable radios for use on a cellular communication system.

### Background Art

RF communications systems are well known in the art. In many such systems, vehicles are equipped with mobile radios that allow an user to communicate with one or more base stations and also with other similarly equipped vehicles in the system. Such a system typically includes a vehicle mounted radio (hereinafter referred to as a mobile), an antenna and a handset (or microphone, speaker and control head). In addition, a base station at a remote system site generally communicates with the vehicle mounted equipment and typically serves to link the radio with a data terminal or operator.

The above configuration works well, so long as the user remains in the vehicle. Once the user moves beyond the operational range of the microphone, however, the user typically loses the ability to forward communications to the base station. To meet this problem, portable radios (hereinafter referred to as portables) have been used to allow the user to communicate with the base station when separated from the vehicle. The portable must, in order to be effective, emulate the mobile in all basic aspects, including frequency and signalling capabilities. Unfortunately, due to size and power supply constraints, known portables have failed to emulate some of the more important mobile characteristics including power output rating, speaker phone, diversity and speech recognition/synthesis capabilities.

Previously, a portable could be coupled to a mobile mounted apparatus which would provide a large source of primary power, an improved antenna location, an external speaker, additional micro computer capacity, and other user interface features. Such an apparatus as described in US patent No. 4680787.

In most every cellular system, each individual radio, portable or mobile, has one or more unique associated information sets, one of which includes NAM data (eg., phone number, system ID, system channel scan data and serial number). The phone number of the NAM data is used by the cellular systems to identify the radio using the system.

In instances where the user controls both the portable and the mobiles, the user incurs an unjustified cost. Because each radio has its own unique telephone number, the user is billed separately for each radio. Thus, the user's minimum

monthly costs are doubled.

There therefore exists a need to provide relatively inexpensive, effective, and reliable communications for those who ordinarily make use of a vehicle mounted radio but who must also carry on communications away from the vehicle from time to time.

It is a general object of the present invention to provide a radio arrangement which overcomes the aforementioned deficiencies.

According to a first aspect of the invention, a radio arrangement is provided for communicating on a radio system having at least one fixed radio site and a plurality of remote radio units, the arrangement comprising: a first radio unit having a first transceiver for enabling radio communications with the fixed radio site; a second radio unit having a second radio transceiver, the arrangement characterized by: means for intercoupling the first and second radio units such that the first radio unit employs the second transceiver for radio communications with the fixed radio site during said intercoupling (as defined in claim 1).

Such an apparatus allows the first radio unit, e.g. a portable radio unit, to emulate some of the characteristics of the second radio unit, e.g. a mobile radio unit, including power output rating for example. According to this aspect of the invention, a mobile radio is also provided, as well as a portable radio and a method of using a portable radio and a mobile radio (as defined in claims 3, 4 and 5 respectively).

According to a second aspect of the invention, a radio arrangement is provided for communicating on a radio system having at least one fixed radio site and a plurality of radio telephone units, the arrangement comprising: portable apparatus having a microcomputer with a memory storing at least one information set for establishing a communication link with the fixed radio site; and a radio telephone unit having a radio transceiver, the arrangement being characterized by: means for intercoupling the portable apparatus and the radio telephone unit and for transferring a code related to the information set from the portable apparatus to the radio telephone unit for subsequent use in communication between the radio telephone unit and the fixed radio site (as defined in claim 7).

In such a system, the radio telephone unit can be used with all its own features and functions but the use of the radio telephone unit can be billed to the account of the portable unit. Furthermore, where the system uses more than one channel, the channel scan information allows more rapid access to the system. According to this aspect of the invention, a portable or mobile radio is provided per se (as defined in claim 17) and a method of communicating on a radio system is also provided

(as defined in claim 24).

The at least one information set may comprise: user identification information uniquely associated with a user, a telephone number uniquely associated with a user, identification information that includes repertory dialling numbers, information that includes a serial number uniquely associated with the portable device, information that includes a system identification number uniquely associated with the radio system and/or information that includes radio channel data associated with the radio system.

In general, therefore, there is provided a radio arrangement which includes a relatively less portable unit and relatively more portable unit which are intercompatible in that costs, features or functions may be shared or separated at the convenience of the user.

#### Brief Description of the Drawings

Figure 1 is a diagram of a prior art mobile/portable arrangement;

Figure 2 is a diagram of a mobile/portable arrangement, in accordance with the present invention;

Figure 3 is an expanded diagram of Fig. 2;

Figure 4 is a flowchart depicting a set of steps, in accordance with the present invention, which may be used by the microcomputer 344 of Figure 3 for implementing the present invention with respect to the mobile; and

Figure 5 is a flowchart depicting a set of steps, in accordance with the present invention, which may be used by the microcomputer 336 of Figure 3 for implementing the present invention with respect to the portable.

#### Detailed Description of the Preferred Embodiment

In Figure (Fig.) 1, a conventional cellular communication system is illustrated. The system includes a portable 110, a mobile 112 installed in the trunk of a vehicle, and at least one remote system site (RSS) 114 which includes a transmitter (TX) and receiver (RX) for establishing a duplex communication link between the radios 110 and 112 and a master cellular switching center (MCSC) 116. The MCSC 116 couples the communication link to a central office (C/O) 118 for communication with a wireline phone 120 or another radio coupled into the system.

The novel arrangement disclosed in this specification has particular use for combining the circuitry of two cellular radios, eg. 110 and 112, such that the previously discussed disadvantages are overcome. More specifically, the arrangement is directed to intercoupling a portable and a mobile in

such a manner that their circuitry may be shared while communicating on a cellular system.

Such an arrangement is illustrated in Fig. 2 wherein a portable (R1) 210 and a mobile (R2) 212 are shown intercoupled through a connector 214. The mobile 212 is shown to include a number of peripherals such as a handset 216 for user communications, and a speaker 218 and microphone 220 which may be used for voice-speaker phone operations and/or for voice simulation and recognition by the radio 212. As will be discussed below, although both radios 210 and 212 can be implemented so that they are fully capable of communicating on a cellular system independently, while the radios are intercoupled the vehicle battery 222 is used to supply power to both radios 210 and 212, and the portable antenna (shown in dotted lines) 224 is not used.

The intercoupling provided by the connector 214 allows the portable 210 and the mobile 212 to utilize each other's circuitry and to communicate with each other. In the preferred embodiment, the communication includes signalling transfers such as: intersignalling between the radios to indicate if the intercoupling is present, an actual transfer of programmed information which includes the NAM data, including phone number, system ID, system channel scan data and serial number, and repertory dial information, and intersignalling which permits the portable 210 to utilize circuitry features which are inherent to the mobile 212 such as transceiver characteristics (eg., transmitter power, receiver sensitivity, antenna characteristics, and, when available, speaker phone functions, diversity, and speech synthesis and voice recognition capabilities).

Fig. 3 illustrates details of the connector 214, the portable 210 and the mobile 212. The connector includes only eight electrical connections between the radios. These connections comprise: a speaker connection 310 from the mobile to the portable, a microphone connection 314 from the portable to the mobile, ground 312 for connections 310 and 314, data transfer connections 318, 320 and 322, a 9.5 Volt connection 324 from the mobile to the portable and a chassis ground connection 326.

The connections 310, 312 and 314 are audio connections which allow the portable to act as a handset, with regards to the audio functions, for the mobile while the two radios are intercoupled. A speaker 328 and a microphone 330, conventional in portables, are coupled to the audio connections 310, 312 and 314 through mute gates 332 and 334 to provide this function. The mute gates may be controlled by microcomputers (u-C) 336 and 346 as is conventionally provided in stand alone portables or mobiles. See, for example, Motorola In-

struction Manual Nos. 68P81070E40 and 68P81046E60, entitled "DYNA TAC Cellular Mobile Telephone Instruction Manual" and "DYNA TAC Cellular Portable Telephone Instruction Manual" respectively. Both manuals are available from Motorola C & E Parts, 1313 Algonquin Rd., Schaumburg, Il., 60196, U.S.A.

The audio connections (310, 312, and 314) are coupled to a conventional mobile transceiver (XCVR) 338 for communication with the RSSs 114 (Fig. 1).

Included with the audio connections is the on-off function of the portable. The portable includes an on-off switch 340 which is controlled by the user to enable power to the portable from the mobile, or, in this case where the portable is not intercoupled with the mobile, to enable power to the portable from the portable's internal battery 368. Power is enabled or disabled when the switch 340 is momentarily closed, thereby momentarily grounding the microphone connection 314. A regulator 342 is enabled by switch 340 to provide power to the mobile, and through connection 324, to the portable. Other switches (not shown) may also be connected to activate the regulator 342. Such a combined switch configuration is described in "High Noise Immunity Input Level Detector With Hysteresis", U.S. patent application no. 085444, docket no. CE00397G, filed on 08-13-87, assigned to the same assignee and incorporated herein by reference.

A regulator (9.5 to 5V) 325 in the portable supplies the portable with logic power during the intercoupling with the mobile.

The data transfer connections (data transfer bus) 318, 320 and 322 provide for data communication between the portable and the mobile. Although other data transfer schemes could be used, Motorola's "3-wire bus" protocol, as described in U.S. patent nos. 4,369,516 and 4,654,655, incorporated herein by reference, is preferred. Briefly, the first "3-wire bus" connection (T) 318 and the second "3-wire bus" connection (C) 320 are used to send data from a u-C 344 in the mobile, while the third "3-wire bus" connection (R) 322 is used to return data to the u-C 344.

Data transfer communication between the mobile and the portable includes data transfer between the mobile u-C 344 and the portable u-Cs 336 and 346. The portable u-C 346 is used primarily for interfacing with the radio user. In response to instructions communicated by the mobile u-C 344, the portable u-C 346 transfers keypad entries from a keypad 350 to the mobile u-C 344 and displays specified data to a display 348 for user viewing.

The portable u-C 336 is similar to the mobile u-C 344 in that both contain the gist of their associated radio's intelligence. Both the portable u-C

336 and the mobile u-C 344 access associated program instruction sets through ROMs 352 and 354, respectively. Both access associated NAM information through EEPROMs 356 and 358, respectively, and both access associated repertory dialing information through EEPROMs 360 and 362, respectively.

The portable u-Cs 336 and 346 and the mobile u-C 344 may be implemented using an MC68HC11, available from Motorola, Inc. A detailed functional description of the u-Cs 336 and 344 is provided below with reference to Figs. 4 and 5, respectively.

According to the present invention, differences between the mobile and the portable are significant. One difference is that the mobile includes a specially designated RAM 364. The RAM 364 is used, in response to a request from the u-C 344 over the data transfer bus (318, 320 and 322) for storing the portable's NAM information which is downloaded from EEPROM 356 of the portable. Such a data transfer allows the mobile to assume the portable's identity for subsequent communication on the system.

The mobile also accommodates downloading of the portable's repertory dialing information from EEPROM 360. This is accomplished by providing that the mobile's EEPROM 362 is not only used for storing the mobile's repertory dialing information, but also used, in response to a request from the u-C 344 over the data transfer bus (318, 320 and 322), for storing the portable's repertory dialing information which is downloaded from EEPROM 360 of the portable. Preferably, the EEPROM 362 is portioned into individual memory blocks, each of which is dedicated to the particular radio's repertory information according to the radio's associated unique phone number.

An alternative method for the mobile to access the portable's repertory dialing information in EEPROM 360 is for the portable to transfer only the dialing information that is selected at the portable. This would minimize the amount of data to be transferred in situations where the user only requires the mobile for limited usage. For example, consider a situation where the user desires to have the mobile assume the portable's identity for a single phone call. Once the intercoupling is established, the user selects a particular repertory dialing key on the portable (or corresponding key on the mobile). In response, the portable transfers the necessary dialing information to the mobile for transmission via the mobile's transceiver. When the call is complete, the user removes the portable for independent usage.

According to the present invention in its second aspect by allowing the mobile to employ the portable's NAM and repertory dialing information,

the user may employ the mobile as though it were the portable, thus maintaining the same telephone number and repertory dialing information while preventing simultaneous radio usage of the same phone number.

Another difference between the portable and the mobile is that the transceiver 366, conventional to any portable, may be disabled by the u-C 336. The transceiver 366 is disabled in response to the u-C 336 detecting the availability and selection of the more powerful mobile transceiver 338. The detection is accomplished by the u-c 336 monitoring the 9.5V connection 324 through a line conditioner circuit 374. The line conditioner 374 may be implemented using a bipolar transistor. Its function is to convert the 9.5V signal to a binary signal to indicate whether or not the 9.5V signal is present. The selection of the mobile transceiver 338 automatically occurs after the portable is intercoupled with the mobile and communication is established between the two radios. The selection to employ the mobile transceiver may also be manually implemented by providing for an user code, eg. key sequence, which is programmed into the portable's keypad 350 to instruct the mobile to enable its transceiver accordingly.

A third difference involves the portable power supply. As previously discussed, the switch 340 on the portable actuates a voltage regulator 342 in the mobile to provide power to the portable during the intercoupling mode. Commensurate with this intercoupling, the power which is internal to the portable, battery 368, is disabled. This is accomplished through the use of a protrusion 370 on the connector. When the intercoupling is made, the protrusion 370 opens a switch 372 which disables internal power from being provided to the portable. While the portable is not intercoupled with the mobile, the switch 372 is normally closed. A diode 351 is connected between the battery 372 and the conditioner 374 to prevent the battery 372 from falsely indicating the presence of the 9.5V from the mobile.

As previously discussed, one advantage of the radio intercoupling is that the portable is able to employ a number of mobile features which would not otherwise be available. The manner in which the portable employs the mobile's transceiver circuitry has been discussed above. The manner in which the portable employs the mobile's voice-speaker phone and voice recognition and speech synthesis circuitry is now discussed.

The mobile's voice recognition and speech synthesis circuitry is depicted as 380 of Fig. 3. After the radio intercoupling is established, the user enables the mobile's V/SP 380 by either entering a special key code into the portable's keypad 350 or by speaking a special command into the micro-

phone 220.

Once the mobile's V/SP 380 is enabled, the user employs the speaker 218 and the microphone 220 as normal. The V/SP 380 decodes the speaker's verbal commands and provides the decoded information to the u-C 344, which information initiates data transfers to the transceiver 338 and to the portable's display 348.

The V/SP 380 may be implemented by using a conventional voice recognition/speech synthesis system. Exemplary is "Method and Apparatus for Synthesizing Speech for Speech Recognition Templates", described in U.S. patent application no. 816162, filed on 01/03/86, docket no. CM00282G, assigned to the same assignee and incorporated herein by reference. Although the V/SP 380 is shown communicating with the u-C via an independent connection, the data transfer bus (318, 320 and 322) may alternatively be employed.

The mobile's voice-speaker phone operation is utilized by entering a special key code into the portable's keypad 350. When the special key code is recognized by the u-C 344, the u-C 344 instructs the V/SP to enable the speaker 218 and the microphone 220 for the user's use. The speaker 218 and the microphone 220 are disabled either by a second special key code, by disconnecting the portable from the mobile or by lifting a separate handset (connected to the mobile as shown in Fig. 2) off-hook.

Fig. 4 illustrates a flowchart, in accordance with the present invention, which may be used to implement the operation of the u-C 344 (mobile u-C) of Fig. 3. In both Figs. 4 and 5, references to the portable appear as R1 and references to the mobile appear as R2. The flowchart begins at block 410 where the power to the mobile and/or the portable is activated. As previously discussed, this is accomplished by momentarily closing switch 340 on the portable or by momentarily closing an on/off switch dedicated directly to the mobile.

At block 420, the mobile u-C determines if the portable is connected to the data transfer bus (318, 320 and 322). The mobile u-C accomplishes this by polling peripherals on the bus (see, eg., U.S. patent nos. 4,369,516 and 4,654,655, supra). Each type of peripheral connected to the bus has an associated bus ID code. The mobile u-C requests a response from each possible peripheral that can be connected to the bus. As applied to the present invention, the mobile u-C requests a response from portable u-C 336 or 346.

As previously discussed, the portable has its own NAM information which may or may not be the same as the mobile's NAM information. Because no two radios with the same NAM information can operate on a cellular system at the same time, the operation of the mobile u-C provides arbitration

control to select the radio circuits which are to be shared such that the system's integrity is not disturbed. Once it is established that the portable is connected to the data transfer bus, the remaining steps depicted in the flowchart illustrate the manner in which the mobile u-C provides this arbitration control.

If a response is received from portable u-C 336 or 346, the mobile u-C concludes that an intercoupling between the mobile and portables is established, and flow proceeds from block 420 to block 460 where the mobile begins to assume the portable's identity for subsequent communications on the system.

If a portable u-C does not respond, the mobile u-C concludes that the intercoupling is not established and flow proceeds from block 420 to block 430 where the mobile u-C performs a test to determine if its NAM information is "intact".

The NAM information can be intact in only one circumstance: when the mobile's EEPROM 358 has been pre-programmed with its own NAM information set. Another situation in which the mobile will operate is when the mobile has not been pre-programmed with its own NAM information set, but when the NAM information set of the portable has been downloaded (transferred) into the mobile's RAM memory (364 of Fig. 3).

If the NAM information is not "intact" (not pre-programmed into the EEPROM 358, in which case the mobile's sole purpose is to support the portable), flow proceeds from block 430 to block 440 where the mobile u-C displays an error message to the user via the handset. After sending the error message, the mobile u-C powers down the radio, as indicated at block 440. The NAM information previously stored in the mobile's RAM is lost at power down so that it cannot be used while the portable is not intercoupled.

If the mobile's NAM information is intact, flow proceeds from block 430 to block 450 where standard mobile (stand alone) operation commences.

If the outcome of the intercoupling test performed at block 420 indicates that the portable is intercoupled with the mobile, the mobile u-C requests, via the data transfer bus (318, 320 and 322), for an information transfer by the portable. Such a request is initiated by the mobile so that the portable may take advantage of the mobile characteristics or features.

At block 460, the NAM information which has been pre-programmed into the portable's EEPROM 356 is transferred over the data transfer bus for storage in the mobile's RAM 364. It should be noted that such a transfer could be effected by checking if the data is the same in the RAM 364 and in the EEPROM 356 (eg., via a cyclic redundancy check (CRC) and, if so, rather than sending

the entire data over the bus, sending only a code to inform the u-C of the data integrity.

After the NAM data has been designated for use by the mobile, the repertory dialing information of the portable is transferred in a similar manner. In Fig. 3, the portable repertory dialing information is stored in EEPROM 360. This information is transferred to the mobile's EEPROM 362. Because EEPROM'S are nonvolatile, such storage will permit repeated usage of this information after powering down the mobile, and avoid the necessity of having to transfer the entire repertory dialing information set each time the radios are intercoupled. Where the data is identical, a CRC check, as discussed above, will so indicate. Where the data is almost identical, the necessity of having to transfer the entire repertory dialing information set may be avoided by implementing the portable to mark changes made since the most recent transfer to the mobile and, thereafter, transferring only the changes.

The foregoing discussion establishes that there are a number of ways to transfer the NAM or repertory dialing information over the data transfer bus. In the case where the data was previously stored in the mobile, such a transfer minimally comprises a code (meaning flag, or signal) designating that the previously stored information should be adopted for use by the mobile. Where none of the data was previously stored in the mobile, the code preferably includes the entire information set so as to designate it for use by the mobile. The transferred repertory dialing information set may be inclusive of all stored phone numbers or may include only a single requested phone number.

Where the mobile is pre-programmed with its own NAM information, the mobile and the portable may operate independently on the communication system. During such independent operation, the mobile maintains its own repertory dialing information set in EEPROM 362. Because the mobile will eventually reuse the information set, rather than overwriting, the repertory dialing information set which is transferred from the portable is stored in a separate portion of mobile EEPROM 362.

After the NAM and repertory dialing information has been transferred, flow proceeds from block 460 to block 470 where the intercoupled radios commence operation with the mobile circuitry assuming the portable's identity, depicted at block 480. Periodically, the mobile u-C polls the data transfer bus to ensure that the portable is still intercoupled, depicted at block 490. Once the intercoupling is broken, at block 490, the mobile u-C destroys NAM information which was downloaded from the portable and returns to block 430 to avoid possible system contention with the portable.

Fig. 5 illustrates a flowchart, in accordance with the present invention, which may be used to implement the operation of the u-C 336 of Fig. 3. The flowchart begins at block 510 where the power to the portable is switched on.

At block 512 a test is performed to determine if 9.5 Volts is present at the connection 324. If 9.5 Volts is not present, the portable concludes that it is operating in its stand alone (not intercoupled) mode and employs its internal battery for power, depicted at block 514. If 9.5 Volts is present, then the portable concludes that the intercoupling is established and flow proceeds to block 516.

At block 516, the portable attempts to communicate with the mobile on the data transfer bus. If communication cannot be validly established, the portable operates in its stand alone mode using the 9.5 V power provided at the connection 324, depicted at block 520, thereby operating as a portable with an external supply. If communication is established, flow proceeds to block 522 where the portable monitors the data transfer bus for a request from the mobile to download its NAM information set. Once the request is made, flow proceeds to block 524 where the transfer is made as previously described.

At block 526, the portable monitors the data transfer bus for a request from the mobile to download its repertory dialing information set. Once the request is made, flow proceeds to block 528 where the transfer is made as previously described.

At block 530, the portable inactivates its transceiver so that the more potent mobile transceiver may be utilized.

At block 532, the mobile begins to assume the portable's identity for subsequent communication on the system.

In either of the flowcharts illustrated in Figs. 4 or 5, once power is no longer provided to the radio, radio operation resumes at the top of each flowchart (blocks 410 and 510) where power is reactivated.

The present invention therefore provides a technique for intercoupling a mobile and a portable operating in a radio system such that the various circuits (including the associated stored information) of the radios are shared. The intercoupling technique accommodates the user's need for employing commonly owned portables and mobiles, in which case the mobile may be used solely to support the portable. The technique also accommodates the need for employing the user's portable with another's mobile, in which case the mobile is implemented to operate either by itself or in a support role for any portable having the intercoupling features described herein. In any case, the best features of both the portable and mobile may easily be combined for the convenience of the user.

It will be understood by those skilled in the art that various other modifications and changes may be made to the present invention without departing from the scope thereof.

## Claims

1. A radio arrangement for communicating on a radio system having at least one fixed radio site and a plurality of remote radio units, the arrangement comprising:
  - a first radio unit (R1) having a first radio transceiver (366) for enabling radio communications with the fixed radio site;
  - a second radio unit (R2) having a second radio transceiver (388), the arrangement characterized by:
    - means for intercoupling (214) the first and second radio units such that the first radio unit (R1) employs the second transceiver (338) rather than the first transceiver (366) for radio communications with the fixed radio site during said intercoupling.
2. A radio arrangement in accordance with claim 1, wherein said means for intercoupling further comprises means for transferring at least one information set between said first radio unit (R1) and said second radio unit (R2), which at least one information set is to be used by said second radio unit (R2) for communication with a fixed radio site during said intercoupling.
3. A mobile radio for a radio system including at least one portable radio for communicating with a fixed radio site, the mobile radio (R2) characterized by:
  - means for intercoupling the portable radio and the mobile radio such that signals are transferable between the portable radio and the mobile radio;
  - a transceiver (338) for establishing a radio communications link with the fixed radio site; and
  - means for accepting said signals transferable between the portable radio and the mobile radio and for communicating said accepted signals, at least in representative form, to the fixed radio site through the transceiver while the portable radio and mobile radio are intercoupled.
4. A portable radio for a radio system including at least one mobile radio and at least one fixed radio site, the portable radio (R1) characterized by:
  - means for intercoupling the portable radio to a mobile radio;

means for transferring information to the mobile radio (R2) via the intercoupling means for communication to the fixed radio site via a transceiver of the mobile radio during said intercoupling and

means for inhibiting the transceiver (366) of the portable radio during said intercoupling.

5. A method of using a portable and a mobile in a radio communications system having at least one fixed radio site, where the portable (R1) has a portable transceiver (366) for establishing a communication link with the fixed radio site and the mobile (R2) has a mobile transceiver (338) for transmitting to and receiving from the fixed radio site, the method characterized by the steps of:
  - intercoupling the portable and mobile such that the portable (R1) employs the mobile transceiver (338) for radio communications with the fixed radio site during said intercoupling.
6. A method in accordance with the method of claim 5 further characterized by the step of transferring at least one information set between said portable and said mobile, which at least one information set is, inter alia, used by said mobile (R2) for communication with the fixed radio site during said intercoupling.
7. A radio arrangement for communicating on a radio system having at least one fixed radio site and a plurality of radio telephone units, the arrangement comprising:
  - a portable apparatus (R1) having a micro-computer (336) with a memory (356) storing at least one information set for establishing a communication link with the fixed radio site;
  - a radio telephone unit (R2) having a radio transceiver (338), the arrangement being characterized by:
    - means for intercoupling (214) the portable apparatus (R1) and the radio telephone unit (R2) and for transferring a code related to the information set from the portable apparatus to the radio telephone unit for subsequent use in communication between the radio telephone unit and the fixed radio site.
8. A radio arrangement in accordance with claim 2 or 7 wherein the at least one information set further comprises user identification information uniquely associated with a user.
9. A radio arrangement in accordance with claim 2, 7 or 8, wherein the at least one information set further comprises identification information that includes a telephone number uniquely as-

sociated with a user.

10. A radio arrangement in accordance with claim 2 or any one of claims 7 to 9 wherein the at least one information set further comprises identification information that includes repertory dialling numbers.
11. A radio arrangement in accordance with claim 2 or any one of claims 7 to 10 wherein the at least one information set further comprises information that includes a serial number uniquely associated with the portable apparatus.
12. A radio arrangement in accordance with claim 2 or any one of claims 7 to 11 wherein the at least one information set further comprises information that includes a system identification number uniquely associated with the radio system.
13. A radio arrangement in accordance with claim 2 or any one of claims 7 to 12 wherein the at least one information set includes radio channel data associated with the radio system.
14. A radio arrangement in accordance with claim 7 or any one of claims 8 to 13 when dependent on claim 7, further characterized by a second radio telephone unit (R2) having means for storing (364) the at least one information set on the occurrence of intercoupling of the second radio telephone and the portable apparatus.
15. A radio arrangement in accordance with claim 14 wherein the second radio telephone unit further comprises means for storing a second information set including user identification information uniquely associated with a second user for establishing a radio frequency communications link between the second radio telephone unit and the fixed radio site when the second radio telephone unit is not intercoupled to the portable apparatus.
16. A radio arrangement according to claim 7 or any one of claims 8 to 15 when dependent on claim 7, which is part of a cellular system wherein the fixed radio site is a base station transceiver (114) which is linked with a master cellular switching center (116), which in turn is linked with a local telephone central switching office (118) and wherein the radio telephone unit (R2) is adapted to provide a wireless communication link with the base station transceiver and wherein the identification information set is used for establishing a communica-

tion link on the cellular system.

17. A mobile or portable radio for communicating on a radio system having at least one fixed radio site and a plurality of radio telephone units, the radio comprising  
 a radio transceiver (338,366) and characterized by  
 receptive means for receiving external intercoupling means, said receptive means being adapted to communicate with a microprocessor (344,336) associated with the external intercoupling means, and being adapted to receive a code related to an information set for establishing a communications link with the fixed radio site while said receptive means receive said intercoupling means.
18. A mobile or portable radio according to claim 17, wherein the receptive means are adapted to receive a code related to user identification information uniquely associated with a user.
19. A mobile or portable radio according to claim 17, wherein the receptive means are adapted to receive a code related to a telephone number uniquely associated with a user.
20. A mobile or portable radio according to claim 17, wherein the receptive means are adapted to receive a code related to identification information that includes repertory dialling numbers.
21. A mobile or portable radio according to claim 17, wherein the receptive means are adapted to receive a code related to a serial number uniquely associated with a portable apparatus which includes said microprocessor.
22. A mobile or portable radio according to claim 17, wherein the receptive means are adapted to receive a code related to a system identification number uniquely associated with the radio system.
23. A mobile or portable radio according to claim 17, wherein the receptive means are adapted to receive a code related to radio channel data associated with the radio system.
24. A method of communicating on a radio system having at least one fixed radio site and a plurality of radio telephone units, the method comprising the steps of:  
 storing, in a portable apparatus (R1) having a microcomputer (336) with a memory, at least one information set for establishing a

communications link with the fixed radio site;  
 characterized by:  
 intercoupling the portable apparatus (R1) with a radio telephone unit (R2) having a radio transceiver (338), and  
 transferring a code related to the information set from the portable apparatus (R1) to the radio telephone unit (R2) for subsequent use in communication between the radio telephone unit and the fixed radio site.

### Patentansprüche

1. Eine Funkanordnung zur Übertragungsverbindung in einem Funksystem, das wenigstens einen festen Funkort und eine Mehrzahl entfernter Funkeinheiten aufweist, wobei die Anordnung umfaßt:  
 eine erste Funkeinheit (R1) mit einem ersten Funk-Sender-Empfänger (366), um Funk-Übertragungsverbindungen mit dem festen Funkort zu ermöglichen;  
 eine zweite Funkeinheit (R2), die einen zweiten Funk-Sender-Empfänger (338) aufweist, wobei die Anordnung gekennzeichnet ist durch:  
 eine Einrichtung zum Verbinden (214) der ersten und der zweiten Funkeinheit miteinander derart, daß die erste Funkeinheit (R1) den zweiten Sender-Empfänger (338) vielmehr als den ersten Sender-Empfänger (366) für Funk-Übertragungsverbindungen mit dem festen Funkort während der genannten Verbindungskopplung verwendet.
2. Eine Funkanordnung gemäß Anspruch 1, in der die genannte Einrichtung zur Verbindungskopplung ferner eine Einrichtung zum Übertragen von wenigstens einem Informationssatz zwischen der genannten ersten Funkeinheit (R1) und der genannten zweiten Funkeinheit (R2) umfaßt, wobei der wenigstens eine Informationssatz von der genannten zweiten Funkeinheit (R2) zur Übertragungsverbindung mit einem festen Funkort während der genannten Verbindungskopplung verwendet wird.
3. Ein Mobil-Funkgerät für ein Funksystem, das wenigstens ein tragbares Funkgerät zur Übertragungsverbindung mit einem festen Funkort einschließt, wobei das Mobil-Funkgerät (R2) gekennzeichnet ist durch:  
 eine Einrichtung zur Verbindungskopplung des tragbaren Funkgerätes und des Mobil-Funkgerätes derart, daß Signale zwischen dem tragbaren Funkgerät und dem Mobil-Funkgerät übertragbar sind;  
 einen Sender-Empfänger (338) zum Her-

stellen einer Funkübertragungsverbindung mit dem festen Funkort; und

eine Einrichtung zum Entgegennehmen der genannten zwischen dem tragbaren Funkgerät und dem Mobil-Funkgerät übertragbaren Signale und zum Übertragen der entgegengenommenen Signale, wenigstens in einer repräsentativen Form, zu dem festen Funkort durch den Sender-Empfänger, während das tragbare Funkgerät und das Mobil-Funkgerät miteinander verbunden sind.

4. Ein tragbares Funkgerät für ein Funksystem, das wenigstens ein Mobil-Funkgerät und wenigstens einen festen Funkort einschließt, wobei das tragbare Funkgerät (R1) gekennzeichnet ist durch:

eine Einrichtung zur Verbindungskopplung des tragbaren Funkgerätes mit einem Mobil-Funkgerät;

eine Einrichtung zum Übertragen von Informationen zu dem Mobil-Funkgerät (R2) über die Verbindungskopplungseinrichtung zur Übertragung zu dem festen Funkort über einen Sender-Empfänger des Mobil-Funkgerätes während der genannten Verbindungskopplung, und

eine Einrichtung zum Sperren des Sender-Empfängers (366) des tragbaren Funkgerätes während der genannten Verbindungskopplung.

5. Ein Verfahren zum Verwenden eines Handgerätes und eines Mobilgerätes in einem Funkübertragungssystem, das wenigstens einem festen Funkort aufweist, wobei das Handgerät (R1) einen tragbaren Sender-Empfänger (366) zum Herstellen einer Übertragungsverbindung mit dem festen Funkort und das Mobilgerät (R2) einen Mobil-Sender-Empfänger (338) zum Übertragen zu und Empfangen von dem festen Funkort aufweist, wobei das Verfahren gekennzeichnet ist durch die Schritte:

Verbindungskoppeln des Handgerätes und des Mobilgerätes derart, daß das Handgerät (R1) den Mobilgerät-Sender-Empfänger (338) für Funkübertragungsverbindung mit dem festen Funkort während der genannten Verbindungskopplung verwendet.

6. Ein Verfahren gemäß dem Verfahren des Anspruches 5, das ferner gekennzeichnet ist durch die Schritte des Übertragens von wenigstens einem Informationssatz zwischen dem genannten Handgerät und dem genannten Mobilgerät, wobei wenigstens ein Informationssatz unter anderen von dem genannten Mobilgerät (R2) zur Übertragungsverbindung mit dem festen Funkort während der genannten Verbindungs-

kopplung verwendet wird.

7. Eine Funkanordnung zur Übertragungsverbindung in einem Funksystem mit wenigstens einem festen Funkort und einer Mehrzahl von Funktelefoneinheiten, wobei die Anordnung umfaßt:

ein tragbares Gerät (R1) mit einem Mikrocomputer (336) mit einem Speicher (356), der wenigstens einen Informationssatz zum Herstellen einer Übertragungsverbindung mit dem festen Funkort speichert;

eine Funktelefoneinheit (R2) mit einem Funk-Sender-Empfänger (338), wobei die Anordnung gekennzeichnet ist durch:

eine Einrichtung (214) zur Verbindungskopplung des tragbaren Gerätes (R1) und der Funktelefoneinheit (R2) und zum Übertragen eines Codes, der sich auf den Informationssatz bezieht, von dem tragbaren Gerät zu der Funktelefoneinheit zur nachfolgenden Verwendung bei einer Übertragung zwischen der Funktelefoneinheit und dem festen Funkort.

8. Eine Funkanordnung gemäß Anspruch 2 oder 7, bei der wenigstens ein Informationssatz ferner Benutzerkennzeichnungsinformationen umfaßt, die einzig mit einem Benutzer verbunden sind.
9. Eine Funkanordnung gemäß Anspruch 2, 7 oder 8, bei der wenigstens ein Informationssatz ferner Kennzeichnungsinformationen umfaßt, die eine einzig mit einem Benutzer verbundene Telephonnummer einschließen.
10. Eine Funkanordnung gemäß Anspruch 2 oder irgendeinem der Ansprüche 7 bis 9, bei der wenigstens ein Informationssatz ferner Kennzeichnungsinformationen umfaßt, die Verzeichniswählnummern einschließen.
11. Eine Funkanordnung gemäß Anspruch 2 oder einem der Ansprüche 7 bis 10, bei der wenigstens ein Informationssatz ferner Informationen umfaßt, die eine einzig mit dem Handgerät verbundene Seriennummer einschließen.
12. Eine Funkanordnung gemäß Anspruch 2 oder einem beliebigen der Ansprüche 7 bis 11, bei der wenigstens ein Informationssatz ferner Informationen umfaßt, die eine Systemkennzeichnungszahl einschließen, die einzig mit dem Funksystem verbunden ist.
13. Eine Funkanordnung gemäß Anspruch 2 oder einem beliebigen der Ansprüche 7 bis 12, bei

der der wenigstens eine Informationssatz Funkkanaldaten enthält, die mit dem Funksystem verbunden sind.

14. Eine Funkanordnung gemäß Anspruch 7 oder einem beliebigen der Ansprüche 8 bis 13, wenn diese von dem Anspruch 7 abhängen, ferner gekennzeichnet durch eine zweite Funktelefonieinheit (R2) mit einer Einrichtung (364) zum Speichern von dem wenigstens einen Informationssatz beim Auftreten der Verbindungskopplung des zweiten Funktelefons und des tragbaren Gerätes. 5 10
15. Eine Funkanordnung gemäß Anspruch 14, bei der die zweite Funktelefonieinheit ferner eine Einrichtung zum Speichern eines zweiten Informationssatzes umfaßt, der Benutzerkennzeichnungsinformationen einschließt, die einzig mit einem zweiten Benutzer verbunden sind, um eine Funkübertragungsverbindung zwischen der zweiten Funktelefonieinheit und dem festen Funkort herzustellen, wenn die zweite Funktelefonieinheit nicht mit dem tragbaren Gerät verbunden ist. 15 20
16. Eine Funkanordnung gemäß Anspruch 7, oder einem beliebigen der Ansprüche 8 bis 15, wenn diese von Anspruch 7 abhängen, die Teil eines Zellsystems ist, in dem der feste Funkort ein Basisstation-Sender-Empfänger (114) ist, der mit einem Hauptzellen-Schaltzentrum (116) verbunden ist, das seinerseits mit einem Schaltraum (118) einer örtlichen Telefonzentrale verbunden ist, und in dem die Funktelefonieinheit (R2) eine drahtlose Übertragungsverbindung mit dem Basisstation-Sender-Empfänger bereitstellen kann und in dem der Kennzeichnungsinformationssatz verwendet wird, um eine Übertragungsverbindung in dem Zellsystem herzustellen. 25 30 35 40
17. Ein mobiles oder tragbares Funkgerät zur Übertragungsverbindung in einem Funksystem mit wenigstens einem festen Funkort und einer Mehrzahl von Funktelefonieinheiten, wobei das Funkgerät umfaßt:  
einen Funk-Sender-Empfänger (338, 366) und gekennzeichnet ist durch  
Aufnahmeeinrichtungen zum Aufnehmen einer äußeren Verbindungskopplungseinrichtung, wobei die genannten Aufnahmeeinrichtungen mit einem Mikroprozessor (344, 366) in Verbindung treten können, der mit der äußeren Verbindungskopplungseinrichtung verbunden ist, und einen Code empfangen kann, der sich auf einen Informationssatz zum Herstellen einer Übertragungsverbindung mit dem festen 45 50 55

Funkort bezieht, während die genannten Aufnahmeeinrichtungen die genannte Verbindungskopplungseinrichtung aufnimmt.

18. Ein mobiles oder tragbares Funkgerät gemäß Anspruch 17, bei dem die Aufnahmeeinrichtungen fähig sind, einen auf die Benutzerkennzeichnungsinformationen bezogenen Code zu empfangen, die einzig mit einem Benutzer verbunden sind. 5 10
19. Ein mobiles oder tragbares Funkgerät gemäß Anspruch 17, bei dem die Aufnahmeeinrichtungen fähig sind, einen auf eine Telephonnummer bezogenen Code zu empfangen, die einzig mit einem Benutzer verbunden ist. 15
20. Ein mobiles oder tragbares Funkgerät gemäß Anspruch 17, bei dem die Aufnahmeeinrichtungen fähig sind, einen auf die Kennzeichnungsinformationen bezogenen Code zu empfangen, die Verzeichniswählnummern einschließen. 20
21. Ein mobiles oder tragbares Funkgerät gemäß Anspruch 17, bei dem die Aufnahmeeinrichtungen fähig sind, einen auf eine Seriennummer bezogenen Code zu empfangen, die einzig mit einem tragbaren Gerät verbunden ist, das den genannten Mikroprozessor einschließt. 25
22. Ein mobiles oder tragbares Funkgerät gemäß Anspruch 17, bei dem die Aufnahmeeinrichtungen fähig sind, einen auf eine Systemkennzeichnungsnummer bezogenen Code zu empfangen, die einzig mit dem Funksystem verbunden sind. 30
23. Ein mobiles oder tragbares Funkgerät gemäß Anspruch 17, bei dem die Aufnahmeeinrichtungen fähig sind, einen auf die Funkkanaldaten bezogenen Code zu empfangen, der einzig mit dem Funksystem verbunden sind. 35 40
24. Ein verfahren zur Übertragungsverbindungen in einem Funksystem mit wenigstens einem festen Funkort und einer Mehrzahl von Funktelefonieinheiten, wobei das Verfahren die Schritte umfaßt:  
Speichern von wenigstens einem Informationssatz in einem tragbaren Gerät (R1), das einen Mikrocomputer (336) mit einem Speicher aufweist, zum Herstellen einer Übertragungsverbindung mit dem festen Funkort; gekennzeichnet durch:  
Verbindungskoppeln des tragbaren Gerätes (R1) mit einer Funktelefonieinheit (R2), die einen Funk-Sender-Empfänger (338) aufweist, und 45 50 55

Übertragen eines Codes, der auf den Informationssatz bezogen ist, von dem tragbaren Gerät (R1) zu der Funktelefonieinheit (R2) zur nachfolgenden Verwendung bei der Übertragungsverbindung zwischen der Funktelefonieinheit und dem festen Funkort.

## Revendications

1. Agencement de poste de radio pour communiquer sur un système de radio comportant au moins un site de radio fixe et une pluralité de postes de radio distants, l'agencement comprenant :
  - un premier poste de radio (R1) comportant un premier émetteur-récepteur radio (366) pour établir des communications radio avec le site de radio fixe ;
  - un second poste de radio (R2) comportant un second émetteur-récepteur radio (338), l'agencement étant caractérisé par :
    - un moyen d'interconnexion (214) pour interconnecter les premier et second postes de radio de sorte que, pendant ladite interconnexion, le premier poste de radio (R1) utilise le second émetteur-récepteur (338) au lieu du premier émetteur-récepteur (366) pour des communications radio avec le site de radio fixe.
2. Agencement de poste de radio selon la revendication 1, dans lequel ledit moyen d'interconnexion comprend de plus un moyen de transfert pour transférer au moins un jeu d'informations entre ledit premier poste de radio (R1) et ledit second poste de radio (R2), lequel au moins un jeu d'informations est destiné à être utilisé, pendant ladite interconnexion, par ledit second poste de radio (R2) pour communication avec un site de radio fixe.
3. Poste de radio mobile pour un système de radio incluant au moins un poste de radio portable, pour communiquer avec un site de radio fixe, le poste de radio mobile (R2) étant caractérisé par :
  - un moyen d'interconnexion pour interconnecter le poste de radio portable et le poste de radio mobile de telle manière que des signaux soient transférables entre le poste de radio portable et le poste de radio mobile ;
  - un émetteur-récepteur (338) pour établir une liaison de communication radio avec le site de radio fixe ; et,
  - un moyen pour recevoir lesdits signaux transférables entre le poste de radio portable et le poste de radio mobile et pour communiquer lesdits signaux reçus, au moins sous une


forme représentative, au site de radio fixe par l'intermédiaire de l'émetteur-récepteur, pendant que le poste de radio portable et le poste de radio mobile sont interconnectés.

4. Poste de radio portable pour un système de radio incluant au moins un poste de radio mobile, pour communiquer avec un site de radio fixe, le poste de radio portable (R1) étant caractérisé par :
  - un moyen d'interconnexion pour interconnecter le poste de radio portable à un poste de radio mobile ;
  - un moyen de transfert pour transférer l'information vers le poste de radio mobile (R2) par l'intermédiaire du moyen d'interconnexion pour communication vers le site de radio fixe par l'intermédiaire d'un émetteur-récepteur du poste de radio mobile, pendant ladite interconnexion ; et,
  - un moyen pour bloquer l'émetteur-récepteur (366) du poste de radio portable pendant ladite interconnexion.
5. procédé d'utilisation d'un portable et d'un mobile dans un système de communication radio comportant au moins un site de radio fixe, dans lequel le portable (R1) possède un émetteur-récepteur de portable (366) pour établir une liaison de communication avec le site de radio fixe, et dans lequel le mobile (R2) possède un émetteur-récepteur de mobile (338) pour émettre vers le site de radio fixe et pour recevoir de celui-ci, le procédé étant caractérisé par l'étape :
  - d'interconnexion du portable et du mobile de telle manière que le portable (R1) utilise, pendant ladite interconnexion, l'émetteur-récepteur de mobile (338) pour des communications radio avec le site de radio fixe.
6. Procédé selon le procédé de la revendication 5, caractérisé en outre par l'étape de transfert d'au moins un jeu d'informations entre ledit portable et ledit mobile, lequel au moins un jeu d'informations est, entre autres, utilisé par ledit mobile (R2) pour communication avec le site de radio fixe, pendant ladite interconnexion.
7. Agencement de poste de radio pour communiquer sur un système de radio comportant au moins un site de radio fixe et une pluralité de postes radiotéléphoniques, l'agencement comprenant :
  - un appareil portable (R1) ayant un micro-calculateur (336) avec une mémoire (356) mémorisant au moins un jeu d'informations pour établir une liaison de communication avec le


- site de radio fixe ;  
 un poste radiotéléphonique (R2) comportant un émetteur-récepteur radio (338), l'agencement étant caractérisé par :  
 un moyen d'interconnexion (214) pour interconnecter l'appareil portable (R1) et le poste radiotéléphonique (R2) et pour transférer un code lié au jeu d'informations de l'appareil portable vers le poste radiotéléphonique pour une utilisation ultérieure dans une communication entre le poste radiotéléphonique et le site de radio fixe.
8. Agencement de radio selon la revendication 2 ou 7, dans lequel ledit au moins un jeu d'informations comprend en outre une information d'identification d'utilisateur associée de manière unique avec un utilisateur.
9. Agencement de radio selon la revendication 2, 7 ou 8, dans lequel ledit au moins un jeu d'informations comprend en outre une information d'identification qui inclut un numéro de téléphone associé de manière unique avec un utilisateur.
10. Agencement de radio selon la revendication 2 ou l'une quelconque des revendications 7 à 9, dans lequel ledit au moins un jeu d'informations comprend en outre une information d'identification qui inclut des numéros pour composition par répertoire.
11. Agencement de radio selon la revendication 2 ou l'une quelconque des revendications 7 à 10, dans lequel ledit au moins un jeu d'informations comprend en outre une information qui inclut un numéro de série associé de manière unique avec l'appareil portable.
12. Agencement de radio selon la revendication 2 ou l'une quelconque des revendications 7 à 11, dans lequel ledit au moins un jeu d'informations comprend en outre une information qui inclut un numéro d'identification de système, associé de manière unique avec le système de radio.
13. Agencement de radio selon la revendication 2 ou l'une quelconque des revendications 7 à 12, dans lequel ledit au moins un jeu d'informations comprend une donnée de canal radio associée avec le système de radio.
14. Agencement de radio selon la revendication 7 ou l'une quelconque des revendications 8 à 13, lorsqu'elles dépendent de la revendication 7, caractérisé en outre par un second poste radiotéléphonique (R2) comportant un moyen de mémorisation (364) pour mémoriser ledit au moins un jeu d'informations lors de l'établissement de l'intercommunication du second radiotéléphone et de l'appareil portable.
15. Agencement de radio selon la revendication 14, dans lequel le second poste radiotéléphonique comprend en outre un moyen pour mémoriser un second jeu d'informations incluant l'information d'identification d'utilisateur associée de manière unique avec un second utilisateur pour établir une liaison de communication radioélectrique entre le second poste radiotéléphonique et le site de radio fixe lorsque le second poste radiotéléphonique n'est pas interconnecté à l'appareil portable.
16. Agencement de radio selon la revendication 7 ou l'une quelconque des revendications 8 à 15 lorsqu'elles dépendent de la revendication 7, lequel fait partie d'un système cellulaire dans lequel le site de radio fixe est un émetteur-récepteur (114) de station de base qui est relié avec un centre de commutation cellulaire maître (116), qui à son tour est relié avec un central téléphonique local (118), et dans lequel le poste radiotéléphonique (R2) est conçu pour fournir une liaison de communication sans fil avec l'émetteur-récepteur de station de base, et dans lequel le jeu d'informations d'identification est utilisé pour établir une liaison de communication sur le système cellulaire.
17. Poste de radio mobile ou portable pour communication sur un système de radio comportant au moins un site de radio fixe et une pluralité de postes radiotéléphoniques, le poste de radio comprenant un émetteur-récepteur radio (338, 366) et étant caractérisé par :  
 des moyens de réception pour recevoir un moyen d'interconnexion externe, lesdits moyens de réception étant conçus pour communiquer avec un microprocesseur (344, 336) associé avec le moyen d'interconnexion externe, et étant conçu pour recevoir un code lié à un jeu d'informations pour établir une liaison de communication avec le site de radio fixe, pendant que lesdits moyens de réception reçoivent ledit moyen d'interconnexion.
18. Poste de radio mobile ou portable selon la revendication 17, dans lequel les moyens de réception sont conçus pour recevoir un code lié à une information d'identification d'utilisateur associée de manière unique avec un utilisateur.

19. Poste de radio mobile ou portable selon la revendication 17, dans lequel les moyens de réception sont conçus pour recevoir un code lié à un numéro de téléphone associé de manière unique avec un utilisateur. 5
20. Poste de radio mobile ou portable selon la revendication 17, dans lequel les moyens de réception sont conçus pour recevoir un code lié à une information d'identification qui comprend des numéros pour composition par répertoire. 10
21. Poste de radio mobile ou portable selon la revendication 17, dans lequel les moyens de réception sont conçus pour recevoir un code lié à un numéro de série associé de manière unique avec un appareil portable qui contient ledit microprocesseur. 15  
20
22. Poste de radio mobile ou portable selon la revendication 17, dans lequel les moyens de réception sont conçus pour recevoir un code lié à un numéro d'identification de système associé de manière unique avec le système de radio. 25
23. Poste de radio mobile ou portable selon la revendication 17, dans lequel les moyens de réception sont conçus pour recevoir un code lié à une donnée de canal radio associée avec le système de radio. 30
24. Procédé de communication sur un système de radio comportant au moins un site de radio fixe et une pluralité de postes radiotéléphoniques, le procédé comprenant les étapes de : 35  
 mémorisation, dans un appareil portable (R1) comportant un microcalculateur (336) avec une mémoire, d'au moins un jeu d'informations pour établir une liaison de communication avec le site de radio fixe ; 40  
 caractérisé par :  
 l'interconnexion de l'appareil portable (R1) avec un poste radiotéléphonique (R2) possédant un émetteur-récepteur radio (338) ; et, 45  
 le transfert d'un code lié au jeu d'informations de l'appareil portable (R1) vers le poste radiotéléphonique (R2) pour utilisation ultérieure à des communications entre le poste radiotéléphonique et le site de radio fixe. 50


55

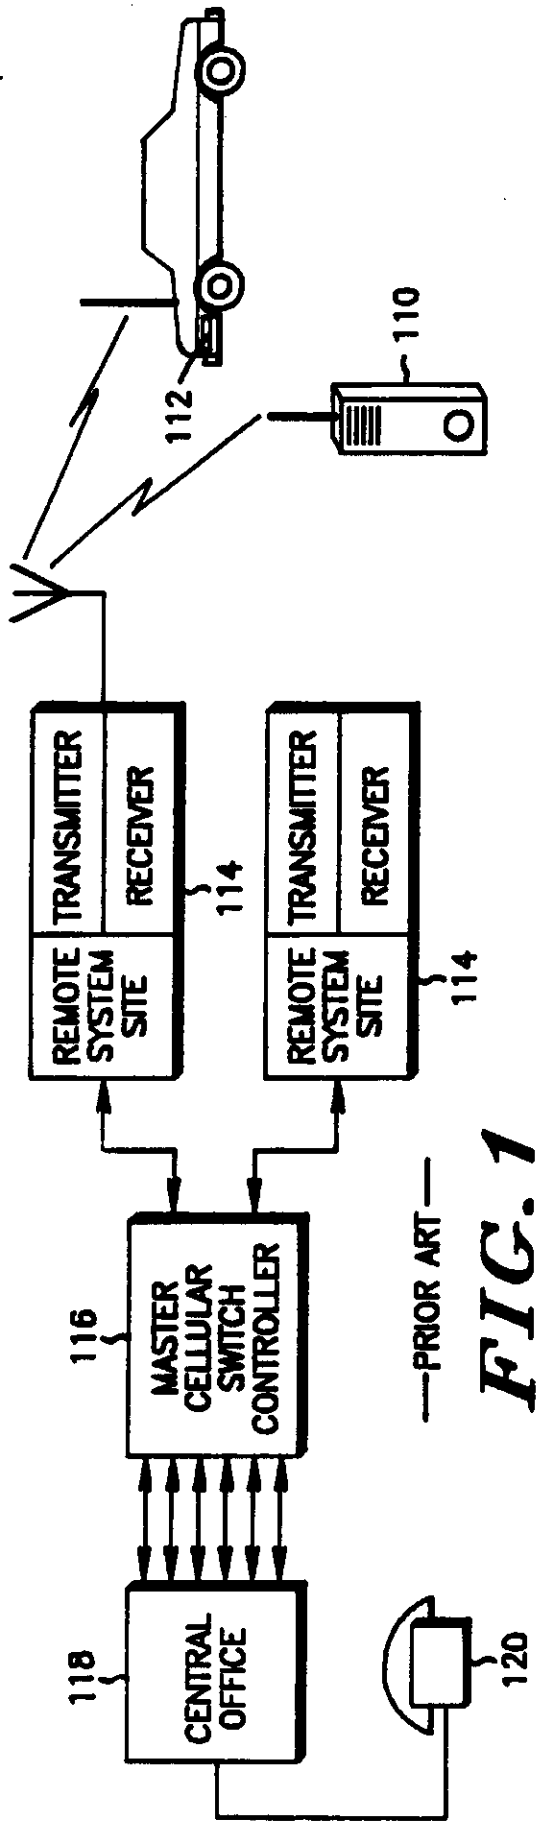

**FIG. 1**

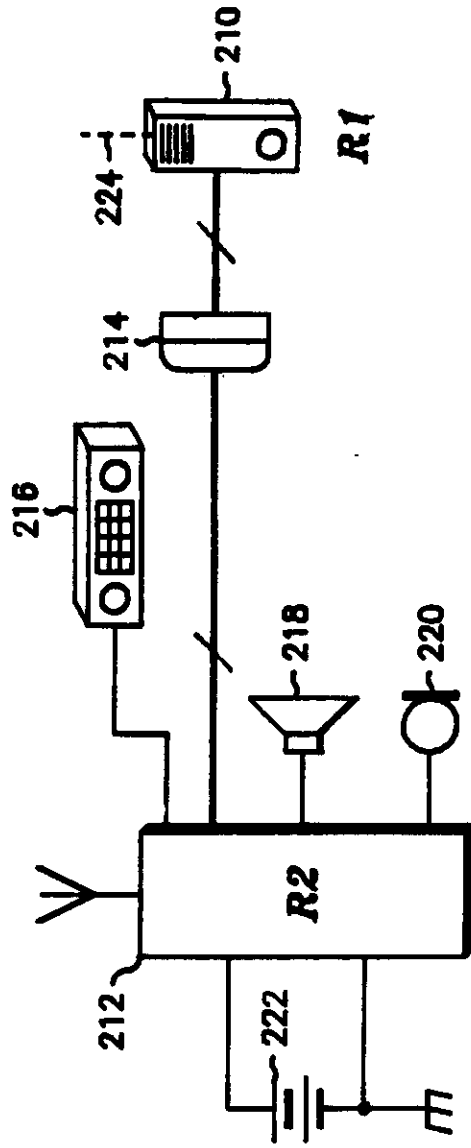


**FIG. 2**

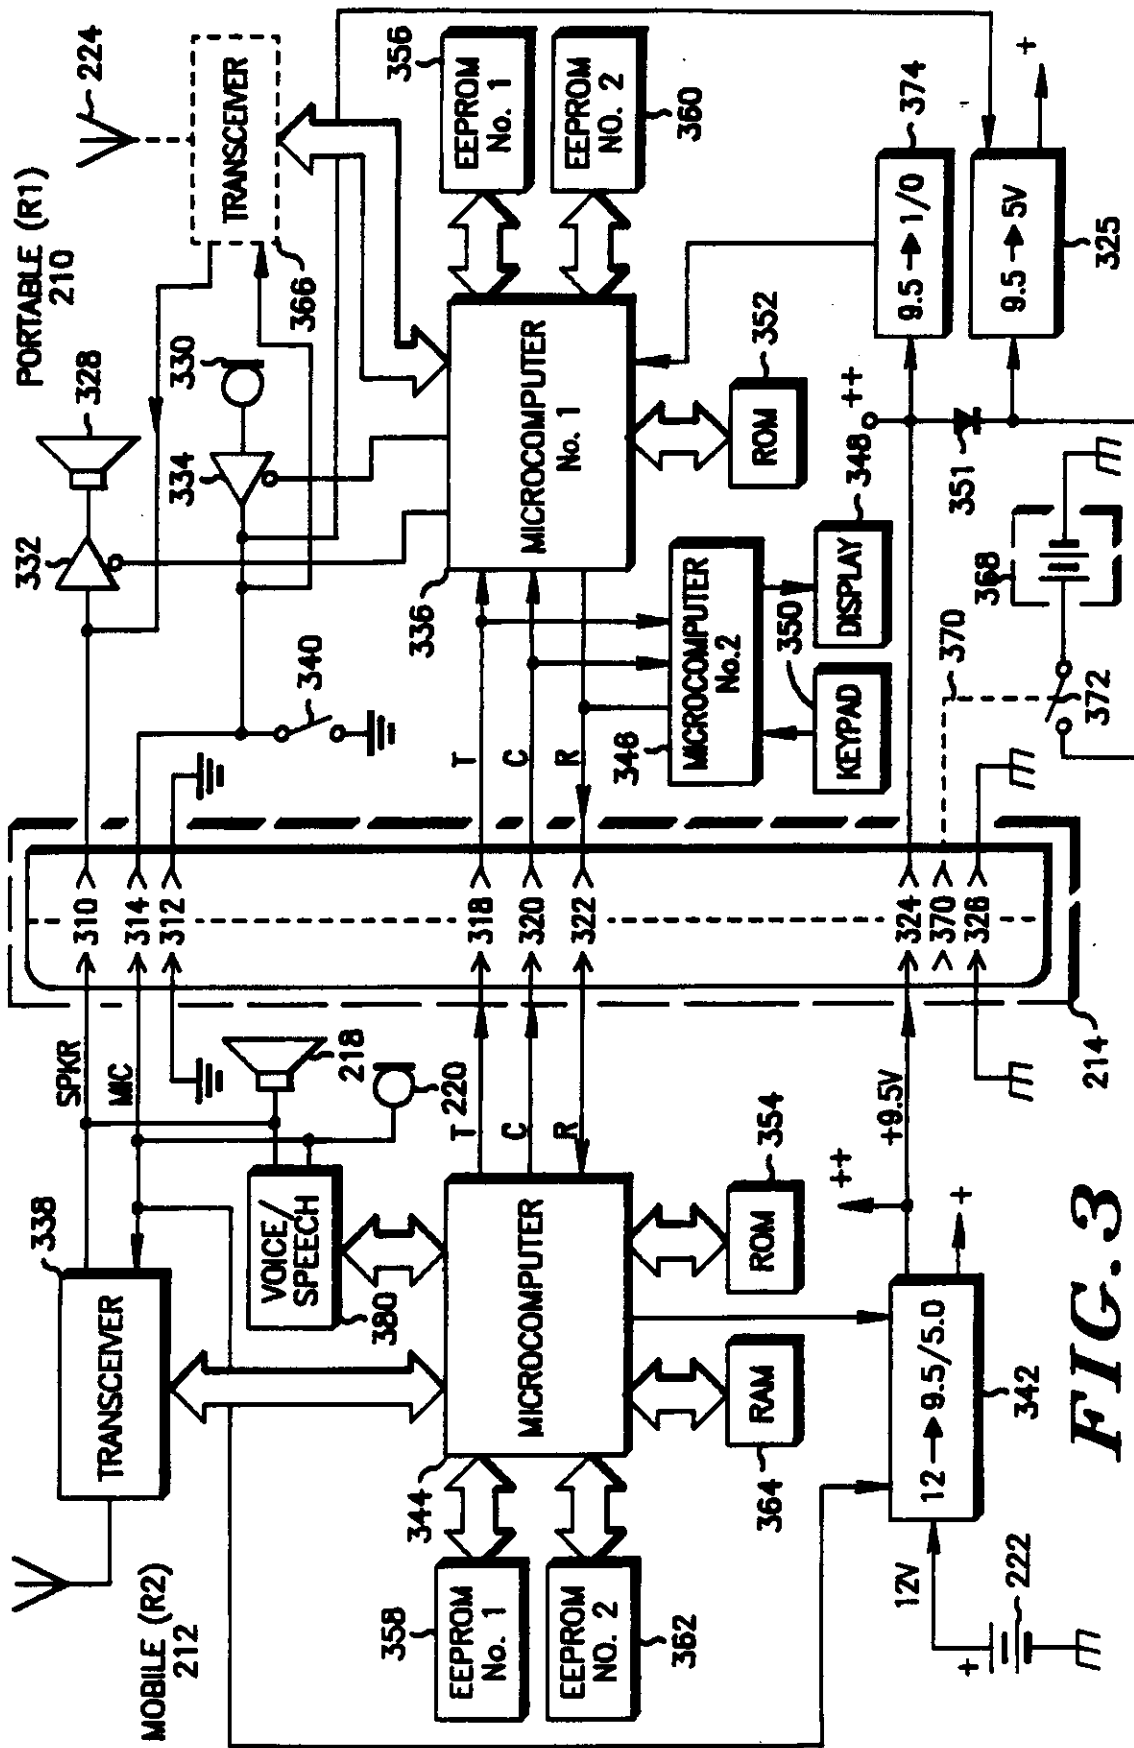


**FIG. 4**

MOBILE

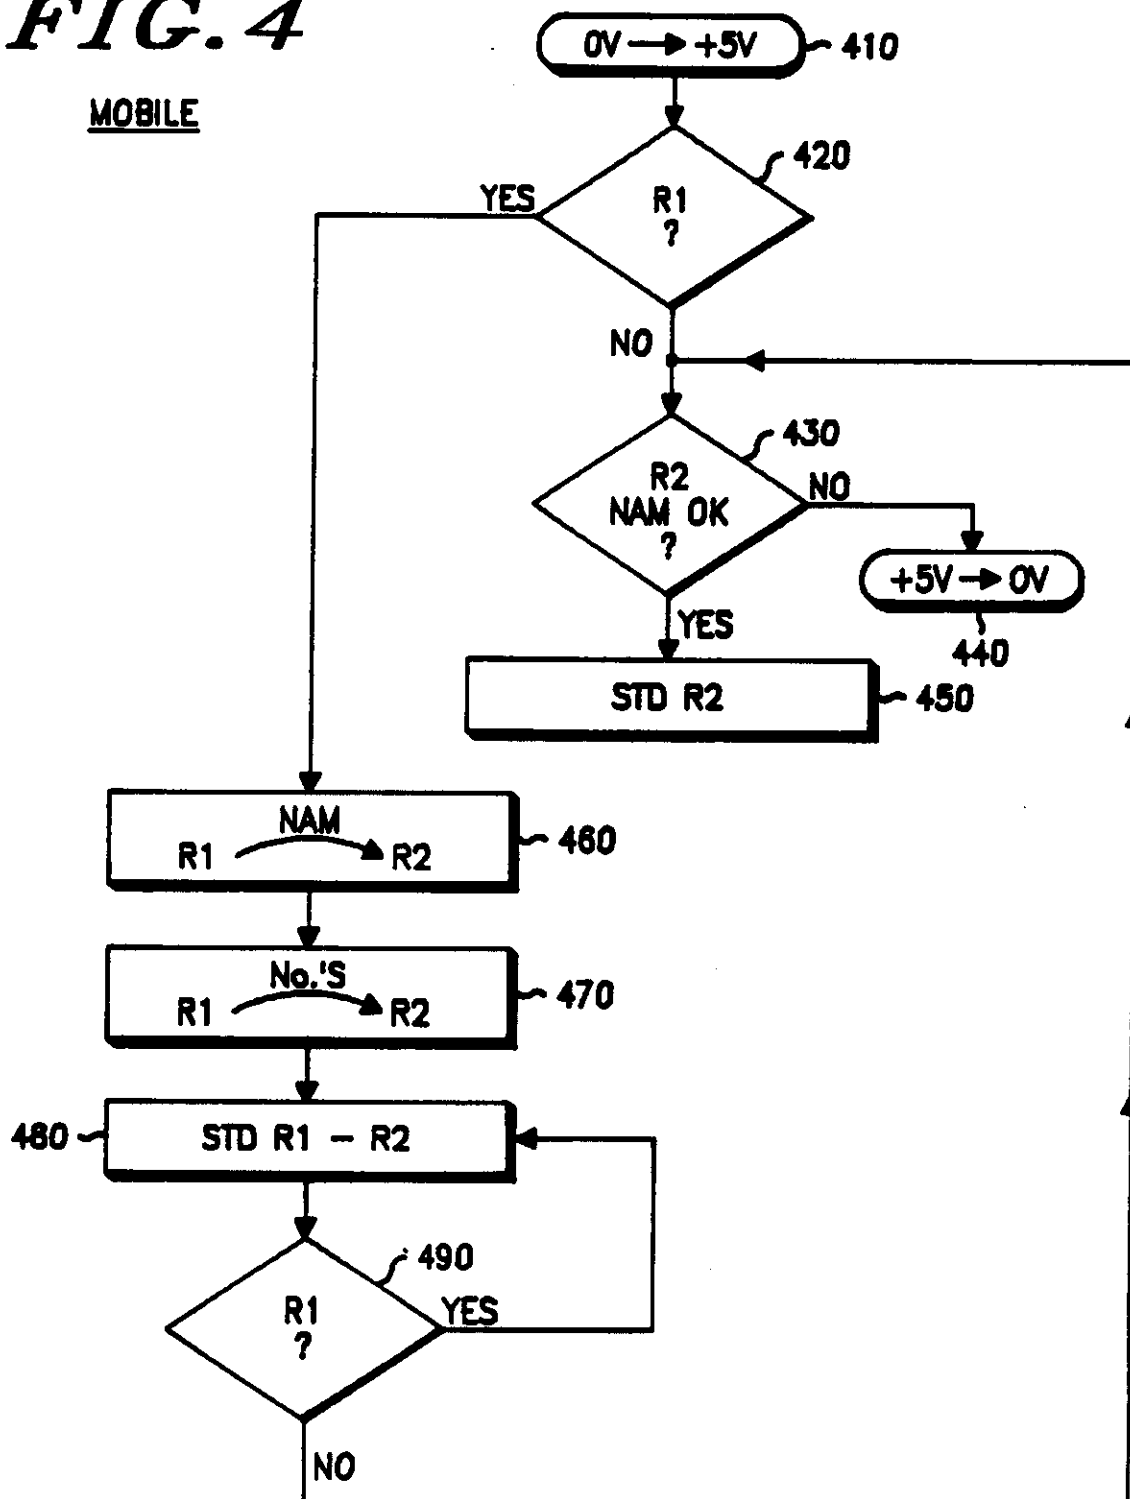

**FIG. 5**

PORTABLE

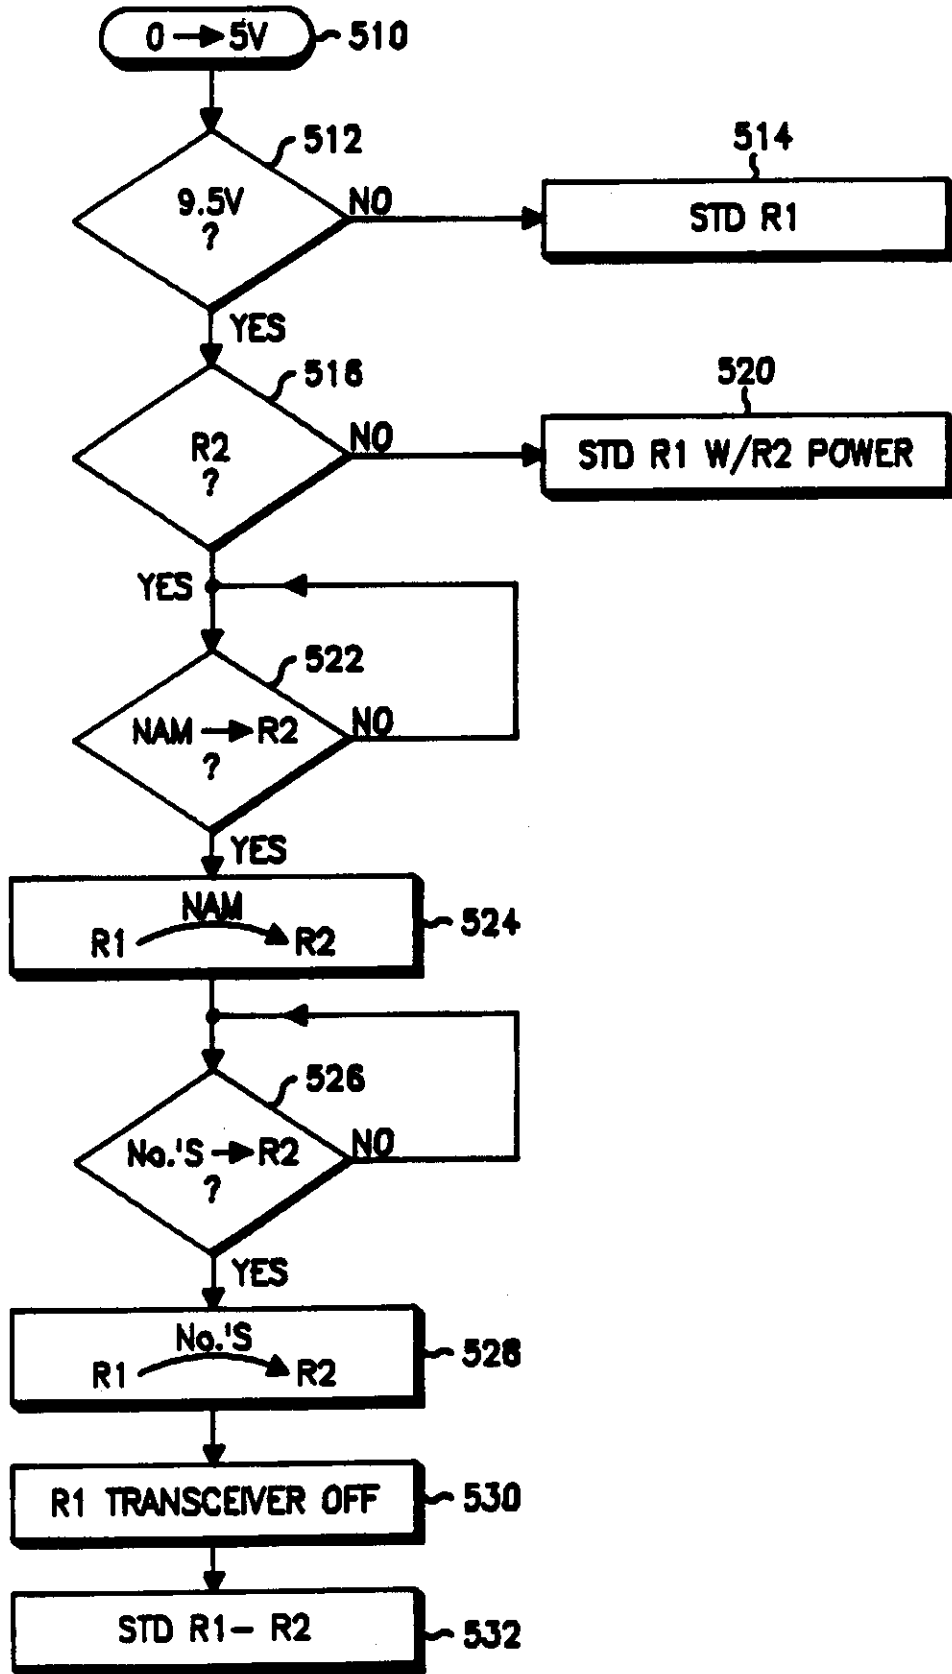

REGISTER ENTRY FOR EP0310876/

European Application No EP88115574.1 filing date 22.09.1988

Priority claimed:

09.10.1987 in United States of America - doc: 107227

Designated States BE CH DE ES FR GB GR IT LI LU NL SE AT

Title RADIO ARRANGEMENT HAVING TWO RADIOS SHARING CIRCUITRY.

Applicant/Proprietor

MOTOROLA, INC., 1303 East Algonquin Road, Schaumburg Illinois 60196,  
United States of America [ADP No. 50019769003]

Inventor

MICHAEL P. METROKA, 730 Oakview Drive, Algonquin Illinois 60102, United  
States of America [ADP No. 56465321001]

Classified to

H04Q H04M

Address for Service

MOTOROLA LIMITED, European Intellectual Property Operation, Jays Close,  
Viables Industrial Estate, BASINGSTOKE, Hampshire, RG22 4PD, United  
Kingdom [ADP No. 00001180001]

EPO Representative

HAROLD IBBOTSON, MOTOROLA European Intellectual Property Operations Jays  
Close Viables Ind. Estate, Basingstoke Hants RG22 4PD, United Kingdom  
[ADP No. 50055342001]

Publication No EP0310876 dated 12.04.1989

Publication in English

Examination requested 15.11.1990

Patent Granted with effect from 04.08.1993/(Section 25(1)) with title RADIO  
ARRANGEMENT HAVING TWO RADIOS SHARING CIRCUITRY.

30.04.1990 EPO: Search report published on 30.05.1990

Entry Type 25.11 Staff ID.

Auth ID. EPT

16.02.1993 MOTOROLA LIMITED, European Intellectual Property Operation, Jays  
Close, Viables Industrial Estate, BASINGSTOKE, Hampshire, RG22 4PD,  
United Kingdom [ADP No. 00001180001]

registered as address for service

Entry Type 8.11 Staff ID. SW2 Auth ID. AA

05.07.1993 Notification from EPO of change of Applicant/Proprietor details  
fromMOTOROLA, INC., 1303 East Algonquin Road, Schaumburg Illinois  
60196, United States of America [ADP No. 50019769003]

to

→ MOTOROLA, INC./1303 East Algonquin Road, Schaumburg, IL 60196,  
United States of America [ADP No. 50019769003]

Entry Type 25.14 Staff ID. RD06 Auth ID. EPT

REGISTER ENTRY FOR EP0310876 (Cont.)

TIMED: 10/01/97 15:59:32

PAGE: 2

\*\*\*\* END OF REGISTER ENTRY \*\*\*\*

OA80-01  
EP

OPTICS - PATENTS

10/01/97

15:59:21

PAGE: 1

RENEWAL DETAILS

PUBLICATION NUMBER EP0310876/

PROPRIETOR(S)

MOTOROLA, INC./ 1303 East Algonquin Road, Schaumburg, IL 60196,  
United States of America/

DATE FILED 22.09.1988/

DATE GRANTED 04.08.1993/

DATE NEXT RENEWAL DUE 22.09.1997

DATE NOT IN FORCE

DATE OF LAST RENEWAL 17.07.1996

YEAR OF LAST RENEWAL 09

STATUS PATENT IN FORCE/

\*\*\*\* END OF REPORT \*\*\*\*