



(22) Date de dépôt/Filing Date: 2002/01/21

(41) Mise à la disp. pub./Open to Public Insp.: 2002/07/23

(30) Priorités/Priorities: 2001/01/23 (60/263,860) US;
2002/01/08 (UNKNOWN) US

(51) Cl.Int.⁷/Int.Cl.⁷ E04G 21/12, E04C 5/16


(71) Demandeur/Applicant:
ERICO INTERNATIONAL CORPORATION, US

(72) Inventeurs/Inventors:
GREGEL, JOHN J., US;
SIRACKI, GLEN T., US

(74) Agent: MACRAE & CO.

(54) Titre : OUTIL DE BARRE D'ARMATURE ET METHODE CONNEXE

(54) Title: REINFORCING BAR TOOL AND METHOD

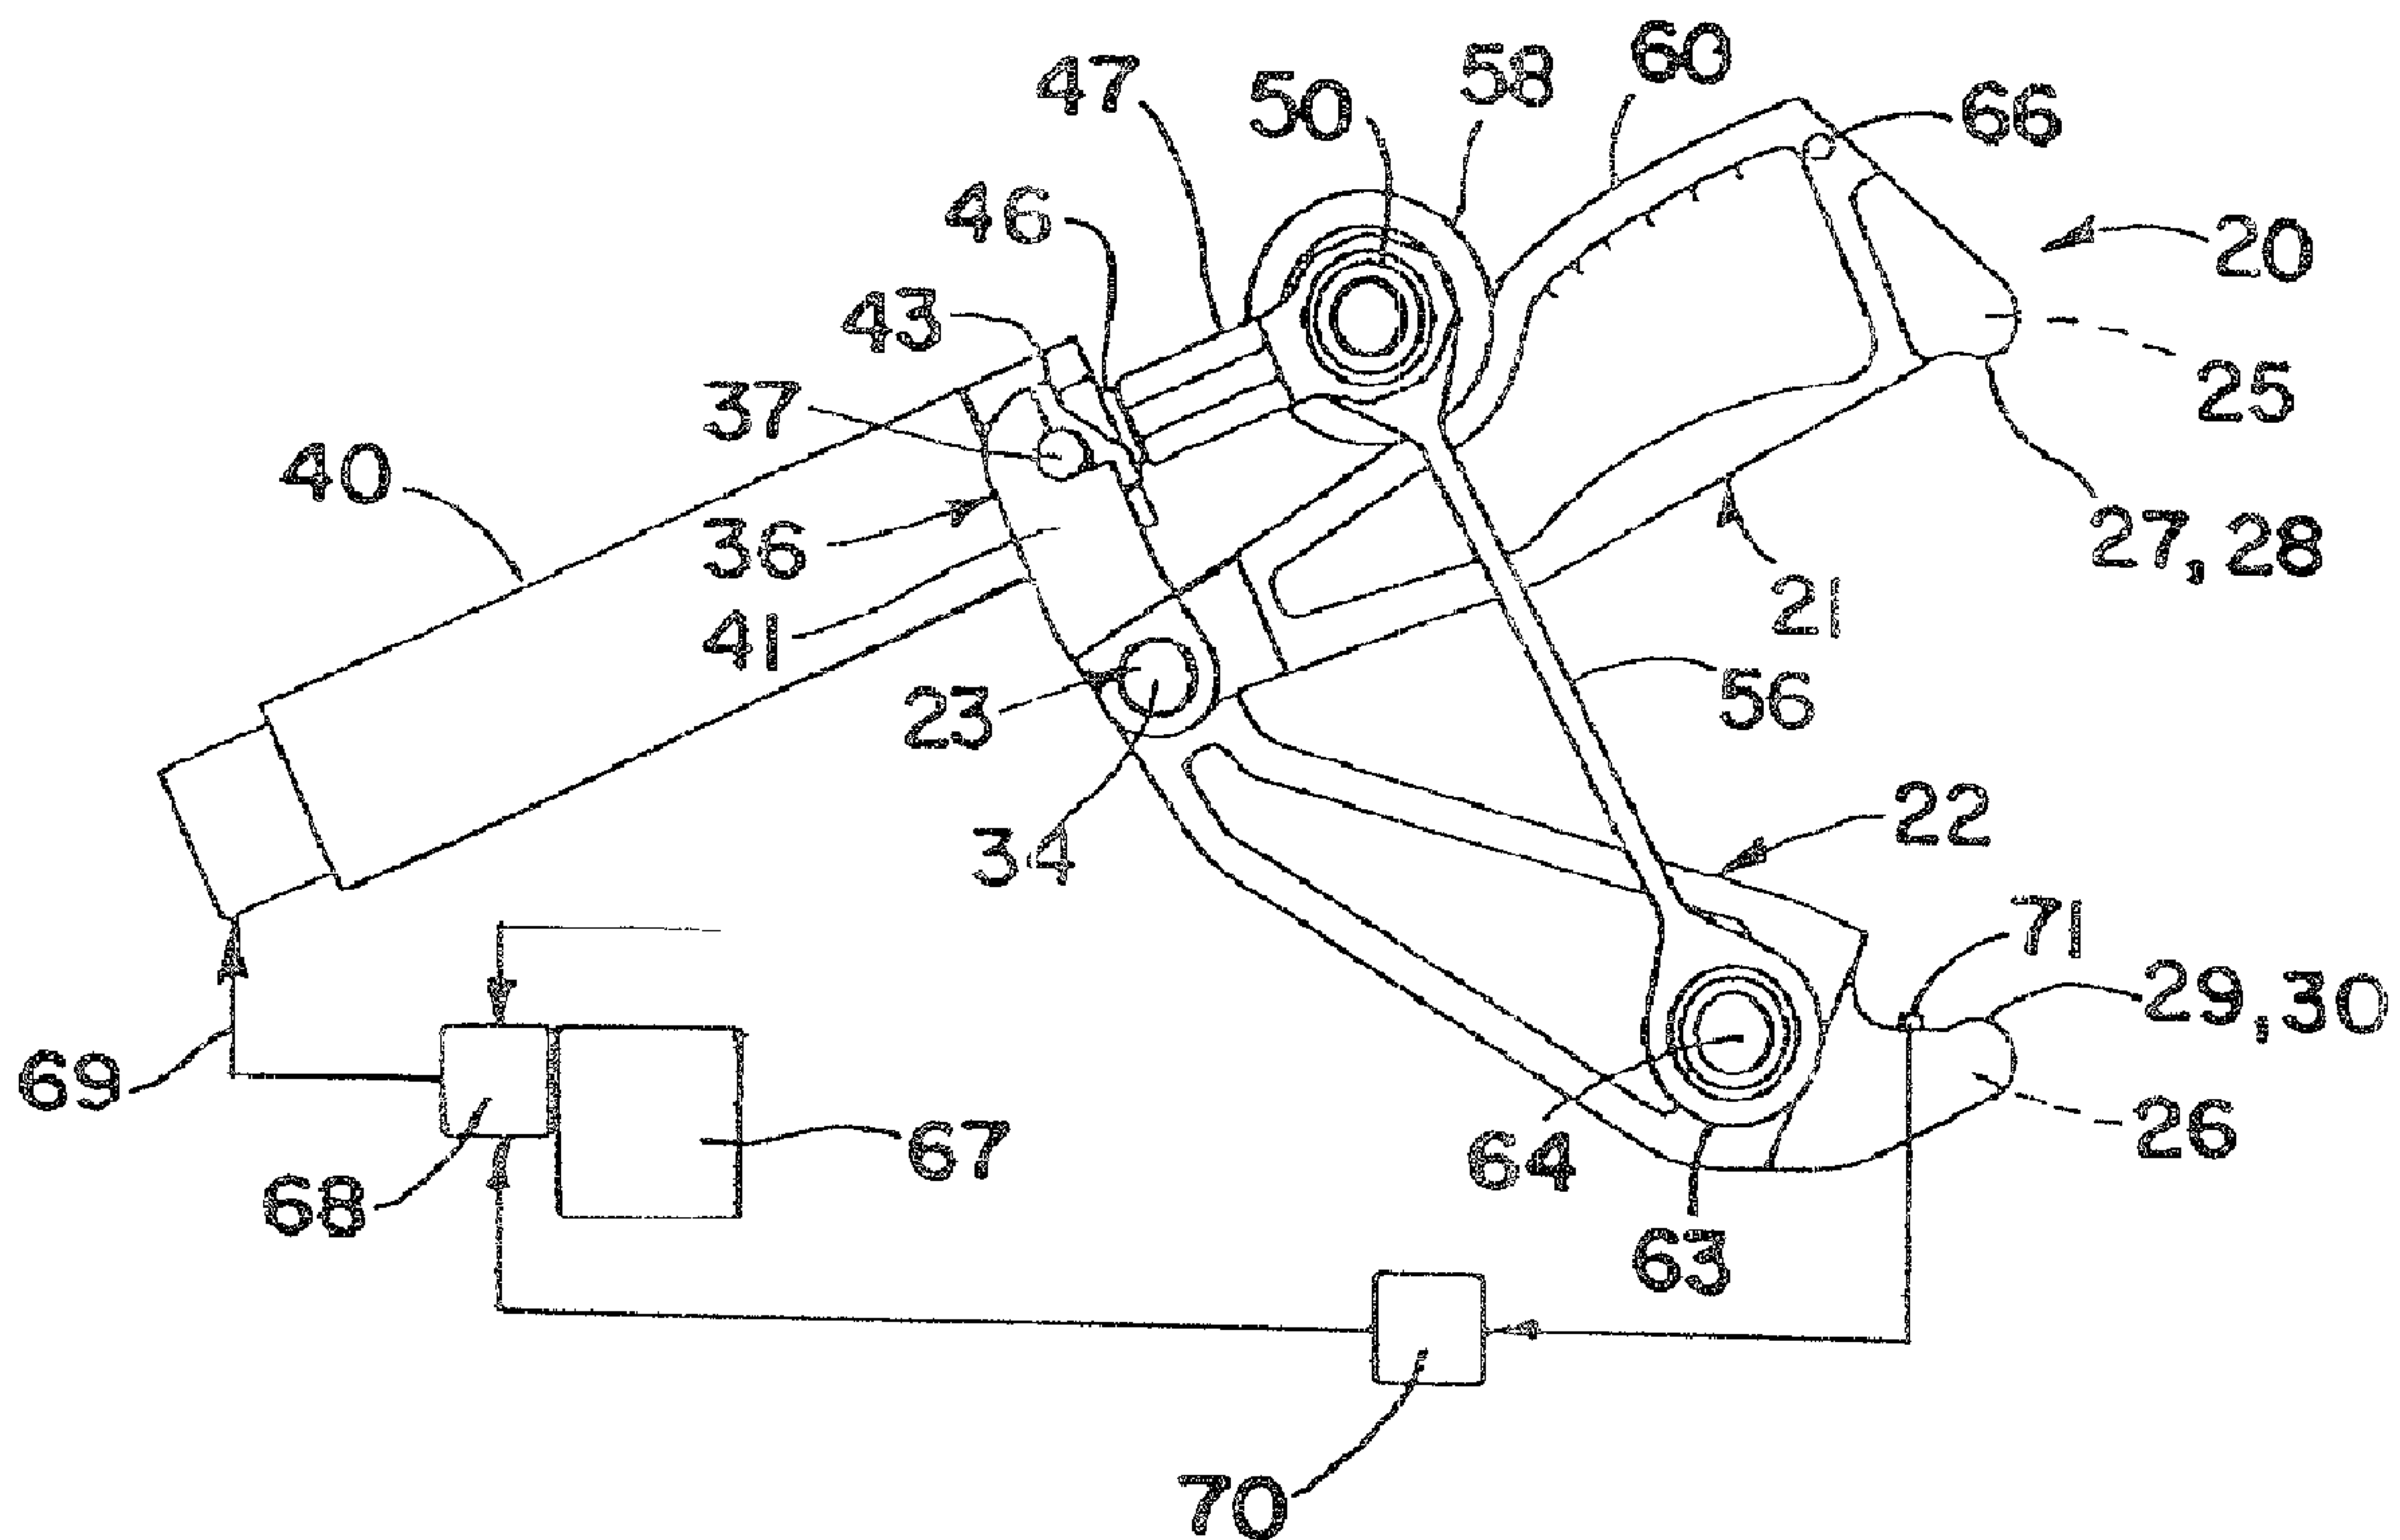

(57) Abrégé/Abstract:

A tool for forming a high strength reinforcing bar coupling driving self- locking wedge sleeves over each end of a contractible jaw assembly bridging the abutting ends of the bar to be joined. The sleeves are seated in collars engaged by the distal ends of arms driven for closure by a piston-cylinder power unit and a cam on at least one arm. In one form the cam on one arm is engaged by a roller connected by a tension link to the other arm. In another form cams are provided on each arm driven by rollers fixed with respect to each other. The collars include self-releasing collets seating the sleeves. The tool has other uses such as bar shearing or forming.

ABSTRACT OF THE DISCLOSURE

A tool for forming a high strength reinforcing bar coupling driving self-locking wedge sleeves over each end of a contractible jaw assembly bridging the abutting ends of the bar to be joined. The sleeves are seated in collars engaged by the distal ends of arms driven for closure by a piston-cylinder power unit and a cam on at least one arm. In one form the cam on one arm is engaged by a roller connected by a tension link to the other arm. In another form cams are provided on each arm driven by rollers fixed with respect to each other. The collars include self-releasing collets seating the sleeves. The tool has other uses such as bar shearing or forming.

Title: REINFORCING BAR TOOL AND METHOD**DISCLOSURE**

This invention relates generally as indicated to reinforcing bar tool and, more
5 particularly, to a tool and method for quickly field or shop cutting, forming or coupling
reinforcing bar..

BACKGROUND OF THE INVENTION

In a prior application there has been developed a reinforcing bar splice or
10 coupling which involves driving a low angle self-locking wedge sleeve over each end of
a contractable jaw assembly causing the jaw assembly to close and engage or grip
abutting bar ends to form a high strength splice or coupling. The jaw assembly
includes teeth which may cold form, engage, and grip the bar ends penetrating the
overall diameter of the bar but not the nominal bar diameter or core. In this manner a
15 high strength connection is formed. When correctly assembled, the bar coupling forms
a high compressive and tensile strength coupling qualifying as a Type 2 mechanical
connection in all United States earthquake zones. The coupling has been developed
by ERICO International Corporation of Solon, Ohio, U.S.A., under the trademark
LENTON® LOCK™. LENTON® is a registered trademark of ERICO.

20 While forming such a high strength coupling is a relatively easy task in a lab or
shop using elaborate power bench equipment such as presses, field forming these high
strength couplings is an entirely different matter. Such couplings can be used
horizontally or vertically in columns, or even diagonally. The installation may be at
considerable height, in very limited space, and in all kinds of weather conditions. There
25 is probably no work environment more confining, complex and difficult than the arduous
installation and erection of steel reinforcing for concrete construction. Laboratory or
plant equipment simply is not suitable in a field application. There is, accordingly, a
need for a tool useful both in the field or shop for forming such high strength
connections or couplings. It would also be desirable if the tool had other uses and
30 applications in the steel reinforced concrete contraction industry.

SUMMARY OF THE INVENTION

It is, accordingly, an object of the inventor to provide a tool which can quickly make high strength couplings in the field as well as in a shop. It is also an object to provide a tool fully field capable of installing multiple reinforcing bar coupling sizes and which may be automated, obtain a mechanical advantage, provide a constant closing force range at the end of the closing stroke, and which may use variable power requirements to adjust the force applied depending on bar size. It is a further object to provide a tool having other uses in reinforced concrete construction such as bar shearing or bending.

It is an aspect of the invention to provide a tool for forming a reinforcing bar connection having opposed drivers each adapted to engage a collar seating a tapered sleeve, with the collars and the tapered sleeves positioned over bar ends, the collars being driven axially of the bar ends to force the sleeves over the opposite ends of a jaw assembly positioned on the bar ends to cause the jaw assembly to contract and grip the bar ends.

It is another aspect to provide a tool for forming a reinforcing bar splice having a pair of pivoting arms, the distal ends of which engage and drive oppositely facing sleeve seats positioned over aligned bar ends, with power means to drive the seats axially of the bar ends to force the sleeves over the jaw assembly positioned on the bar ends to cause the jaw assembly to contract to grip and splice the bar ends.

It is yet another aspect to provide a method of forming a reinforcing bar coupling comprising the step of placing oppositely directed self-locking wedge sleeves over the butting ends of the reinforcing bar to be joined, placing a contractible jaw assembly over the butting ends, seating the sleeves in collars, and then activating a driving tool to force the collars and wedge sleeves toward each other and over the jaw assembly to contract the jaw assembly and form the coupling.

It is also an important aspect of this invention to provide a power operated rebar tool having pivoting arms with the distal end of each arm provided with a notch accommodating reinforcing bar, each distal end also including a bearing section on each side of the notch operative to engage and drive rebar tooling when the arms are closed.

To the accomplishment of the foregoing and related ends, the invention then comprises the features hereinafter fully described and particularly pointed out in the

claims, the following description and the annexed drawings setting forth in detail certain illustrative embodiments of the invention, these being indicative, however, of but a few of the various ways in which the principles of the invention may be employed.

5

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a side elevation of a tool in accordance with the present invention also showing, schematically, a control circuit;

Figure 2 is a top plan view of the tool of Figure 1;

Figure 3 is a perspective view of the tool of Figure 1;

10

Figure 4 is a side elevation of a modified form of tool in accordance with the invention;

Figure 5 is a perspective view of the tool of Figure 4;

Figure 6 is a side elevation of the tool of Figure 1 with the bar and coupling to be formed in position;

15

Figure 7 is a similar side elevation with the tool closed engaging and driving the collars and sleeves toward each other to form the coupling;

Figure 8 is an elevation of a collar segment in the plane of its axis and including a self-releasing collet segment;

Figure 9 is a side elevation of the tool driving a bar shearing fixture;

20

Figure 10 is an end elevation of the tool driving a bar forming or bending fixture;

Figure 11 is a perspective view of a completed LENTON® LOCK™ coupling as formed by the tool of the present invention;

Figure 12 is a similar view with the self-locking wedge collars and one jaw of the jaw assembly removed; and

25

Figure 13 is a perspective view of another embodiment of a rebar tool.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Referring initially to Figures 1 through 3, there is illustrated a tool shown generally at 20 which comprises an upper arm 21 and a lower arm 22 which are coaxially pivoted together at their proximal ends as indicated at 23. A distal or outer end of each arm is provided with a notch, shown at 25 and 26, respectively, the notch extending in the plane of movement of the arms which would be the plane of Figure 1

or normal to Figure 2. When the tool is utilized to form a coupling, the notches accommodate reinforcing bar passing therethrough.

As seen more clearly in Figure 3, the distal end of each arm includes the bearing section on each side of the notch which is operative to engage and drive rebar tooling when the arms are closed. Each bearing section is rounded or curved and for the distal end of the upper arm 21 the bearing sections are shown at 27 and 28. For the distal end of the lower arm the bearing sections are shown at 29 and 30. The bearing sections engage the tooling diametrically opposite any bar or rod passing through the notch and the rounded configuration of the bearing sections maintains the desired contact with the tooling being used with the tool.

As can be seen in Figure 3, the upper arm 21 includes a proximal clevis or fork 33, which accommodates the proximal end of the lower arm 22 and enables the arms to be pivoted together by the pin 34, forming the pivot 23.

Also mounted on the pivot pin 34 is a support bracket shown generally at 36 which provides a pivot support 37 at the rod end piston-cylinder assembly 40. The bracket 36 has two upstanding arms on each side of the cylinder seen at 41 and 42 with the cylinder pivot being held in place by removable keepers 43 at the upper end of each arm. The bracket 36 fits snugly over and under the proximal end of the upper arm 21 and is thus a rigid extension of that arm.

The rod 46 of the piston-cylinder assembly is connected to a clevis 47 which has separated arms 48 and 49 supported by spherical bearings 50 on shaft 51. Also mounted on the shaft, each with its own spherical bearing are the eyes 53 and 54 of tension links 55 and 56, respectively, as well as cam roller 58. The cam roller 58 is in the center of the pivot pin and may be slightly flanged to ride on cam surface 60 on the top of the upper arm 21.

The eyes 62 and 63 at the lower end of the tension links 55 and 56 are supported by spherical bearings on the ends of pivot pin 64 pivotally connecting the tension links to the lower arm 22.

It can now be seen that as the piston-cylinder assembly 40 extends, the roller 58 will ride over the cam 60 causing the arms to pivot about their proximal ends toward each other, closing the tool for a variety of tasks such as forming a rebar coupling, shearing or cutting rebar, or forming or bending rebar.

As seen more clearly in Figure 1 the upper pivoting arm 21 is provided with a hole 66 which may accommodate a handle which may manually open the arms when the piston-cylinder assembly is retracted. Return springs may also be provided if desired. Figure 1 also illustrates schematically a hydraulic circuit for the piston-cylinder assembly 40 which includes a power supply 67 and a pressure regulator 68 supplying fluid pressure to the blind end of the piston-cylinder assembly as indicated at 69. The pressure regulator may also be controlled from a controller 70, in turn controlled by a proximity switch 71 positioned in the receiving end of the distal end of the lower arm 22. The proximity switch is positioned a distance from the diametral bearing surfaces 29 and 30 and is used to sense the size of the reinforcing bar being accommodated by the tool. In this manner the sensor will recognize the reinforcing bar size and through the pressure regulator will automatically adjust the fluid pressure for the size of bar positioned in the tool.

As can be seen, the embodiment of Figure 1 has coaxially pivoted arms and a single cam 60 which is the upper edge of the upper arm 21. The cam 60 is selected so that the concluding portion of the closing stroke generates a constant closing force range. This accommodates variations in reinforcing bar diameter, per nominal size, and the tool automatically stops when appropriate closing force is achieved. A sensor may be provided both to notify the operator when the proper coupling connection has been made and to reverse the piston-cylinder assembly.

Referring now to Figures 4 and 5 there is illustrated another embodiment of a tool in accordance with the present invention shown generally at 75. This illustrated embodiment of the tool includes two pivoting arms 76 and 77 proximally pivoted at pins 78 and 79, respectively, to rod end cylinder bracket 80. The distal ends of the arms are provided with removable projecting receivers indicated at 83 and 84, respectively, each having a notch as seen at 85 and 86. Each receiver also includes the diametrically opposed rounded bearing surfaces seen more clearly in Figure 5 at 87 and 88.

The piston-cylinder assembly 90 is joined to the arms through the bracket 80, and the rod 91 has secured to the end thereof a triangular yoke 92 which supports the apex of two laterally spaced triangular trusses shown generally at 95 and 96. Each truss includes angularly related compression members 97 and 98 and a tension member 99 connecting pins 100 and 101 at each end through the eyes shown at 102 and 103, respectively. Positioned between the eyes of the laterally spaced trusses are

cam rollers shown generally at 104 and 105. The eyes of the spaced trusses as well as the cam rollers may be mounted on the respective pins 100 and 101 each with suitable spherical bearings. The cam rollers 104 and 105 engage cams 107 and 108, respectively, which are removably mounted on the exterior of the pivoting arms 76 and 5 77, respectively.

With the tool of Figures 4 and 5 the proximal ends of the arms are pivoted offset from each other on each side of the piston-cylinder assembly 90, and cams on both arms are engaged by respective rollers on the ends of the trusses to translate the linear movement of the power means to closing movement of the arms. A return spring 10 may be provided between the two arms urging the two arms to an open position. In any event as pressure in the piston-cylinder assembly at the blind end moves the rod 91 to the right as seen in Figures 4 and 5, the two arms pivot toward each other closing the receivers 83 and 84 on the reinforcing bar tooling within the receivers either to form a coupling, cut or shear reinforcing bar, or form it, for example.

15 Referring now to Figures 6, 7 and 8 there is an illustration of the tool forming a LENTON® LOCK™ coupling in accordance with the invention. In Figure 6 the tool is open and the receiver or distal ends of each of the arms is positioned, respectively, above and below collars 112 and 113 positioned at each end of the splice 114 forming the coupling joining the reinforcing bars 115 and 116 end-to-end. The coupling splice 20 114 is shown in greater detail in Figure 11 and 12 hereinafter described.

As seen in Figure 8 the collars 112 and 113 may be formed from half-round collar sections 120 each of which includes a tapered opening 122 which in turn supports a self-releasing collet section shown generally at 123. The collet section is supported in the collar section by a series of sloping surfaces indicated at 124 so that 25 when the pressure of the tool is released, the collet sections will release the self-locking wedge sleeves seen in more detail in Figure 11. The half-round collar sections are provided with slots 125 and 126 on one side and slots 127 and 128 on the other side. These slots are designed to receive keys shown at 129 in Figure 6 and 7 which hold the two halves of the collar together forming the annular seat for the wedge 30 sleeve.

As seen in comparing Figure 6 and 7 the piston-cylinder assembly 40 has been extended and the arms have closed with the round bearing surfaces engaging diametrically opposite sides of the collar formed by the half-round sections driving the

wedge sleeves toward each other and over the coupling jaw assembly 114. This causes the jaw assembly to contract to grip the end-to-end bars 115 and 116 forming a Type 2 splice. When the assembly is completed, the tool is removed and the collars 112 and 113 are disassembled and removed for reuse.

5 Referring now to Figure 9, it will be seen that the same tool 20 is being used to operate a bar shear fixture shown generally at 135. The upper and lower blade assemblies 136 and 137 are connected by two guide rods seen at 138 and 139 each surrounded by a return compression spring 140 and 141. The shearing blade assemblies are provided with oppositely projecting, relatively short rods indicated at
10 143 and 144. The curved bearing areas of the distal ends of the arms engage shoulders 145 and 146 on opposite sides of the rod extension. In this manner the tooling may quickly be driven to a closed or shut position shearing bar 150.

Figure 10 illustrates a bar bending or forming fixture which includes male tooling element 154 and female element 155 positioned in the receiver ends of the arms of the
15 tool. Like the shear tooling, the male tooling 154 includes a rod extension 156 filling in notch 25 providing shoulders 157 and 158 on each side thereof to be engaged by the bearing areas of the distal end of the upper arm. Similarly, the female tool 155 includes rod extension 160 fitting in the notch 26 with shoulders 161 and 162 on each side for engagement by the bearing areas of the distal end of the lower arm. Using the
20 tooling illustrated, the bar 164 may quickly be bent to the desired configuration.

Referring now to Figures 11 and 12 there is illustrated a LENTON® LOCK™ coupling which the tool of the present invention completes. The coupling shown generally at 114 is joining end-to-end axially aligned deformed reinforcing bars 115 and 116. The bars are, of course, shown broken away so that only the ends gripped by the
25 splice or connection are illustrated. The connection comprises a jaw assembly shown generally at 168 which includes three circumferentially interfitting jaw elements shown at 169, 170 and 171. In Figure 12 the jaw element 170 has been removed. The exterior of the jaw elements form oppositely tapering, shallow angle surfaces 172 and 173 on which the tool of the present invention drives the matching taper lock sleeves
30 174 and 175. It is noted that the jaw sections have interfitting portions indicated at 176 keeping the jaw elements properly assembled. When the locking sleeves are driven toward each other by the tool of the present invention, the jaw assembly contracts driving the interior teeth 178 on each jaw element into the deformed, or projecting

portions of the bar such as the longitudinally projecting ribs 179 or the circumferential ribs 180, but not the core 181.

The diameter bar at the core represents the nominal diameter of the bar while the overall diameter includes the longitudinal or circumferential ribs. In any event, the tool
5 of the present invention can quickly complete the coupling seen in Figure 11.

Referring now to Figure 13, there is illustrated another tool shown generally at 190 for completing the splice or connection of the present invention. Although the tool is shown connecting the bars 115 and 116 vertically oriented, it will be appreciated that the bars and splice may be horizontally or even diagonally oriented. The tool includes
10 generally parallel levers 191 and 192 connected by center link 193 pivoted to the approximate mid-point of such levers as indicated at 194 and 195. Connecting the outer or right-hand end of the levers 191 and 192 is an adjustable link shown generally at 196 in the form of a piston-cylinder assembly actuator 197. The rod 198 of the assembly is provided with a clevis 199 pivoted at 200 to the outer end of lever 191.
15 The cylinder 201 of the assembly 197 is provided with a mounting bracket or clevis 202 pivoted at 203 to the outer end of lever 192.

The opposite end of the lever 191 is provided with a C-shaped termination pivoted at 204 to a C-shaped tubular member 205 having an open side 206. A wedge driving collar shown generally at 207 is mounted on the lower end of the open tube
20 205. The collar is formed of hinged semi-circular halves 208 and 209. When closed and locked the wedge collar has an interior taper matching that of the self-locking sleeves 174 and 175.

The lower arm 192 is provided with a C-shaped termination 210 pivoted at 211 to open tube 212 supporting wedge collar 213 formed of pivotally connected
25 semi-circular halves 214 and 215. When the piston-cylinder assembly is extended, the collars are driven toward each other.

In any event, with the various tool embodiments of the present invention the splice as illustrated in Figure 11 can quickly and easily be made.

The tool of the present invention is capable of installing multiple rebar splice
30 sizes and automatically stops when appropriate closing force is achieved. The tool accommodates variations in rebar diameter, per nominal size, by means of a constant closing force range at the concluding portion of the closing stroke and will function with all types and grades of rebar. The tool provides quick installation times for a bar break

coupling in but one actuation of the tool. The tool can, however, perform other tasks in the rebar construction industry such as bar shearing or bar forming or bending.

Although hydraulic piston-cylinder assemblies and controls are preferred, it will be appreciated that other types of power actuators may be employed. The preferred
5 form of tool seen, for example, in Figure 1 provides force multiplication obtained through the combination of the power unit in conjunction with mechanical cam surface and the rotating tension link. Multiplication also can be achieved with the combination of the power unit and mechanical cams with the translating truss assembly of the Figure 4 embodiment.

10 The tool is versatile, light weight, and may have a variety of uses in the steel reinforced concrete construction industry. For example, the components of the tool may be made of 4140 steel and the tool is readily portable at a field or construction site.

To the accomplishment of the foregoing and related ends, the invention then
15 comprises the features particularly pointed out in the claims, these being indicative, however, of but a few of the various ways in which the principles of the invention may be employed.

CLAIMS

What is claimed is:

1. A tool for forming a reinforcing bar connection comprising opposed drivers adapted each to engage a seat supporting a tapered sleeve positioned over bar ends, and means to drive the seats axially of the bar ends to force the sleeves over a jaw assembly positioned on the bar ends to cause the jaw assembly to contract and grip the bar ends.
2. A tool as set forth in claim 1, including a pair of arms each engaging a respective seat for movement toward each other.
3. A tool as set forth in claim 2, including power means to move said arms toward each other.
4. A tool as set forth in claim 3, including cam means translating movement of said power means to said arms.
5. A tool as set forth in claim 2 including a collar forming the respective seats, and a self-releasing collet in each collar.
6. A tool as set forth in claim 3 wherein said power means comprises a piston-cylinder assembly, and a cam roller driven by said piston-cylinder assembly to move said arms.
7. A tool as set forth in claim 6 including a cam on one arm engaging said roller, and a tension link connecting said roller to said other arm.
8. A tool as set forth in claim 7 wherein said arms are coaxially pivoted together.
9. A tool as set forth in claim 8 wherein said piston-cylinder assembly is pivotally supported by a mounting bracket extending from said coaxial pivot and secured to one arm.
10. A tool as set forth in claim 6 including two cam rollers driven by said piston-cylinder assembly, and a cam on each arm engaging a respective roller.
11. A tool as set forth in claim 10 including truss means connecting said rollers and to said piston-cylinder assembly.
12. A tool as set forth in claim 11 wherein said arms are pivoted to said piston-cylinder assembly each on opposite sides thereof.
13. A tool for forming a reinforcing bar splice comprising a pair of pivoting arms, the distal ends of which form oppositely facing drivers adapted to engage seats receiving oppositely facing tapered sleeves positioned over aligned bar ends,

- and power means to drive the seats axially of the bar ends to force the sleeves over a jaw assembly positioned on the bar ends to cause the jaw assembly to contract to grip and splice the bar ends.
14. A tool as set forth in claim 13, including a fluid piston-cylinder assembly operative to pivot said arms to drive the seats axially of the bar ends.
 15. A tool as set forth in claim 13 including cam means driven by said power means to obtain a mechanical advantage in movement of said seats.
 16. A tool as set forth in claim 14, including means to apply pressure to the blind end of the piston-cylinder assembly to force the sleeves over the jaw assembly.
 17. A tool as set forth in claim 15 wherein said cam means is on one arm.
 18. A tool as set forth in claim 15 wherein said cam means is on both arms.
 19. A tool as set forth in claim 15, including roller means driven by said power means engaging said cam means.
 20. A tool as set forth in claim 18 including respective roller means for said cam means driven by said power means.
 21. A tool as set forth in claim 13 including the seats, and means to open and close said seats for positioning on said bar ends.
 22. A method of forming a reinforcing bar coupling comprising the steps of placing oppositely directed wedge sleeves over the butting ends of reinforcing bar to be joined, placing a contractible jaw assembly over the butting ends, seating the sleeves in collars, engaging the collars in a power operated driving tool, and then activating the driving tool to force the wedge sleeves toward each other and over each end of the jaw assembly to contract the jaw assembly and form the coupling.
 23. A method as set forth in claim 22 including the step of using hydraulic pressure power means to drive said sleeves.
 24. A method as set forth in claim 23 including the step of using cam means in combination with said hydraulic pressure power means to achieve a mechanical advantage to drive said sleeves.
 25. A method as set forth in claim 24 including the step of driving said sleeves by engagement of said collars by the distal ends of pivoting arms.
 26. A method as set forth in claim 25 including the step of coaxially pivoting said arms.

27. A method as set forth in claim 26 including the step of driving a roller against a cam surface on one arm, while linked to said other arm.
28. A method as set forth in claim 22 including the step of sensing the size of the bar and adjusting the force of the power operated driving tool.
29. A tooling assembly for driving self-locking wedge sleeves on the ends of a contractible jaw assembly to contract and grip end-to-end reinforcing bars to form a coupling, comprising a pair of oppositely directed collar assemblies surrounding said end-to-end bars and each containing a collet to seat and grip the sleeves, said tooling assembly engaging said collars to drive the collars and thus the sleeves toward each other and onto the ends of said jaw assembly to form the coupling.
30. A tooling assembly as set forth in claim 29 wherein said collets are self-releasing upon retraction of the tool.
31. A tooling assembly as set forth in claim 30 wherein said collets and collars are interconnected by sloping surfaces expanding the collet upon retraction.
32. A tooling assembly as set forth in claim 29 wherein said collars comprise a plurality of segments openable to permit assembly on and removal from the bar ends.
33. A tooling assembly as set forth in claim 32 wherein said segments are semicircular and held closed by removable keys.
34. A tooling assembly as set forth in claim 32 wherein said segments are hinged.
35. A rebar tool comprising power operated pivoting arms, the distal end of each arm being provided with a notch to accommodate bar passing therethrough, each distal end also including a bearing section on each side of the notch operative to engage and drive rebar tooling when said arms are closed.
36. A rebar tool as set forth in claim 35 wherein said bearing section on each side of the notch is slightly rounded to accommodate the swing of the arm.
37. A rebar tool as set forth in claim 36 including bar shear tooling driving by said arms.
38. A rebar tool as set forth in claim 36 including bar forming tooling driven by said arms.
39. A rebar tool as set forth in claim 36 including coupling forming wedge sleeve driving tooling driven by said arms.

40. A rebar tool as set forth in claim 35 including power means to close said arms, and cam means on at least one of said arms to cause said power means to pivot said arms.

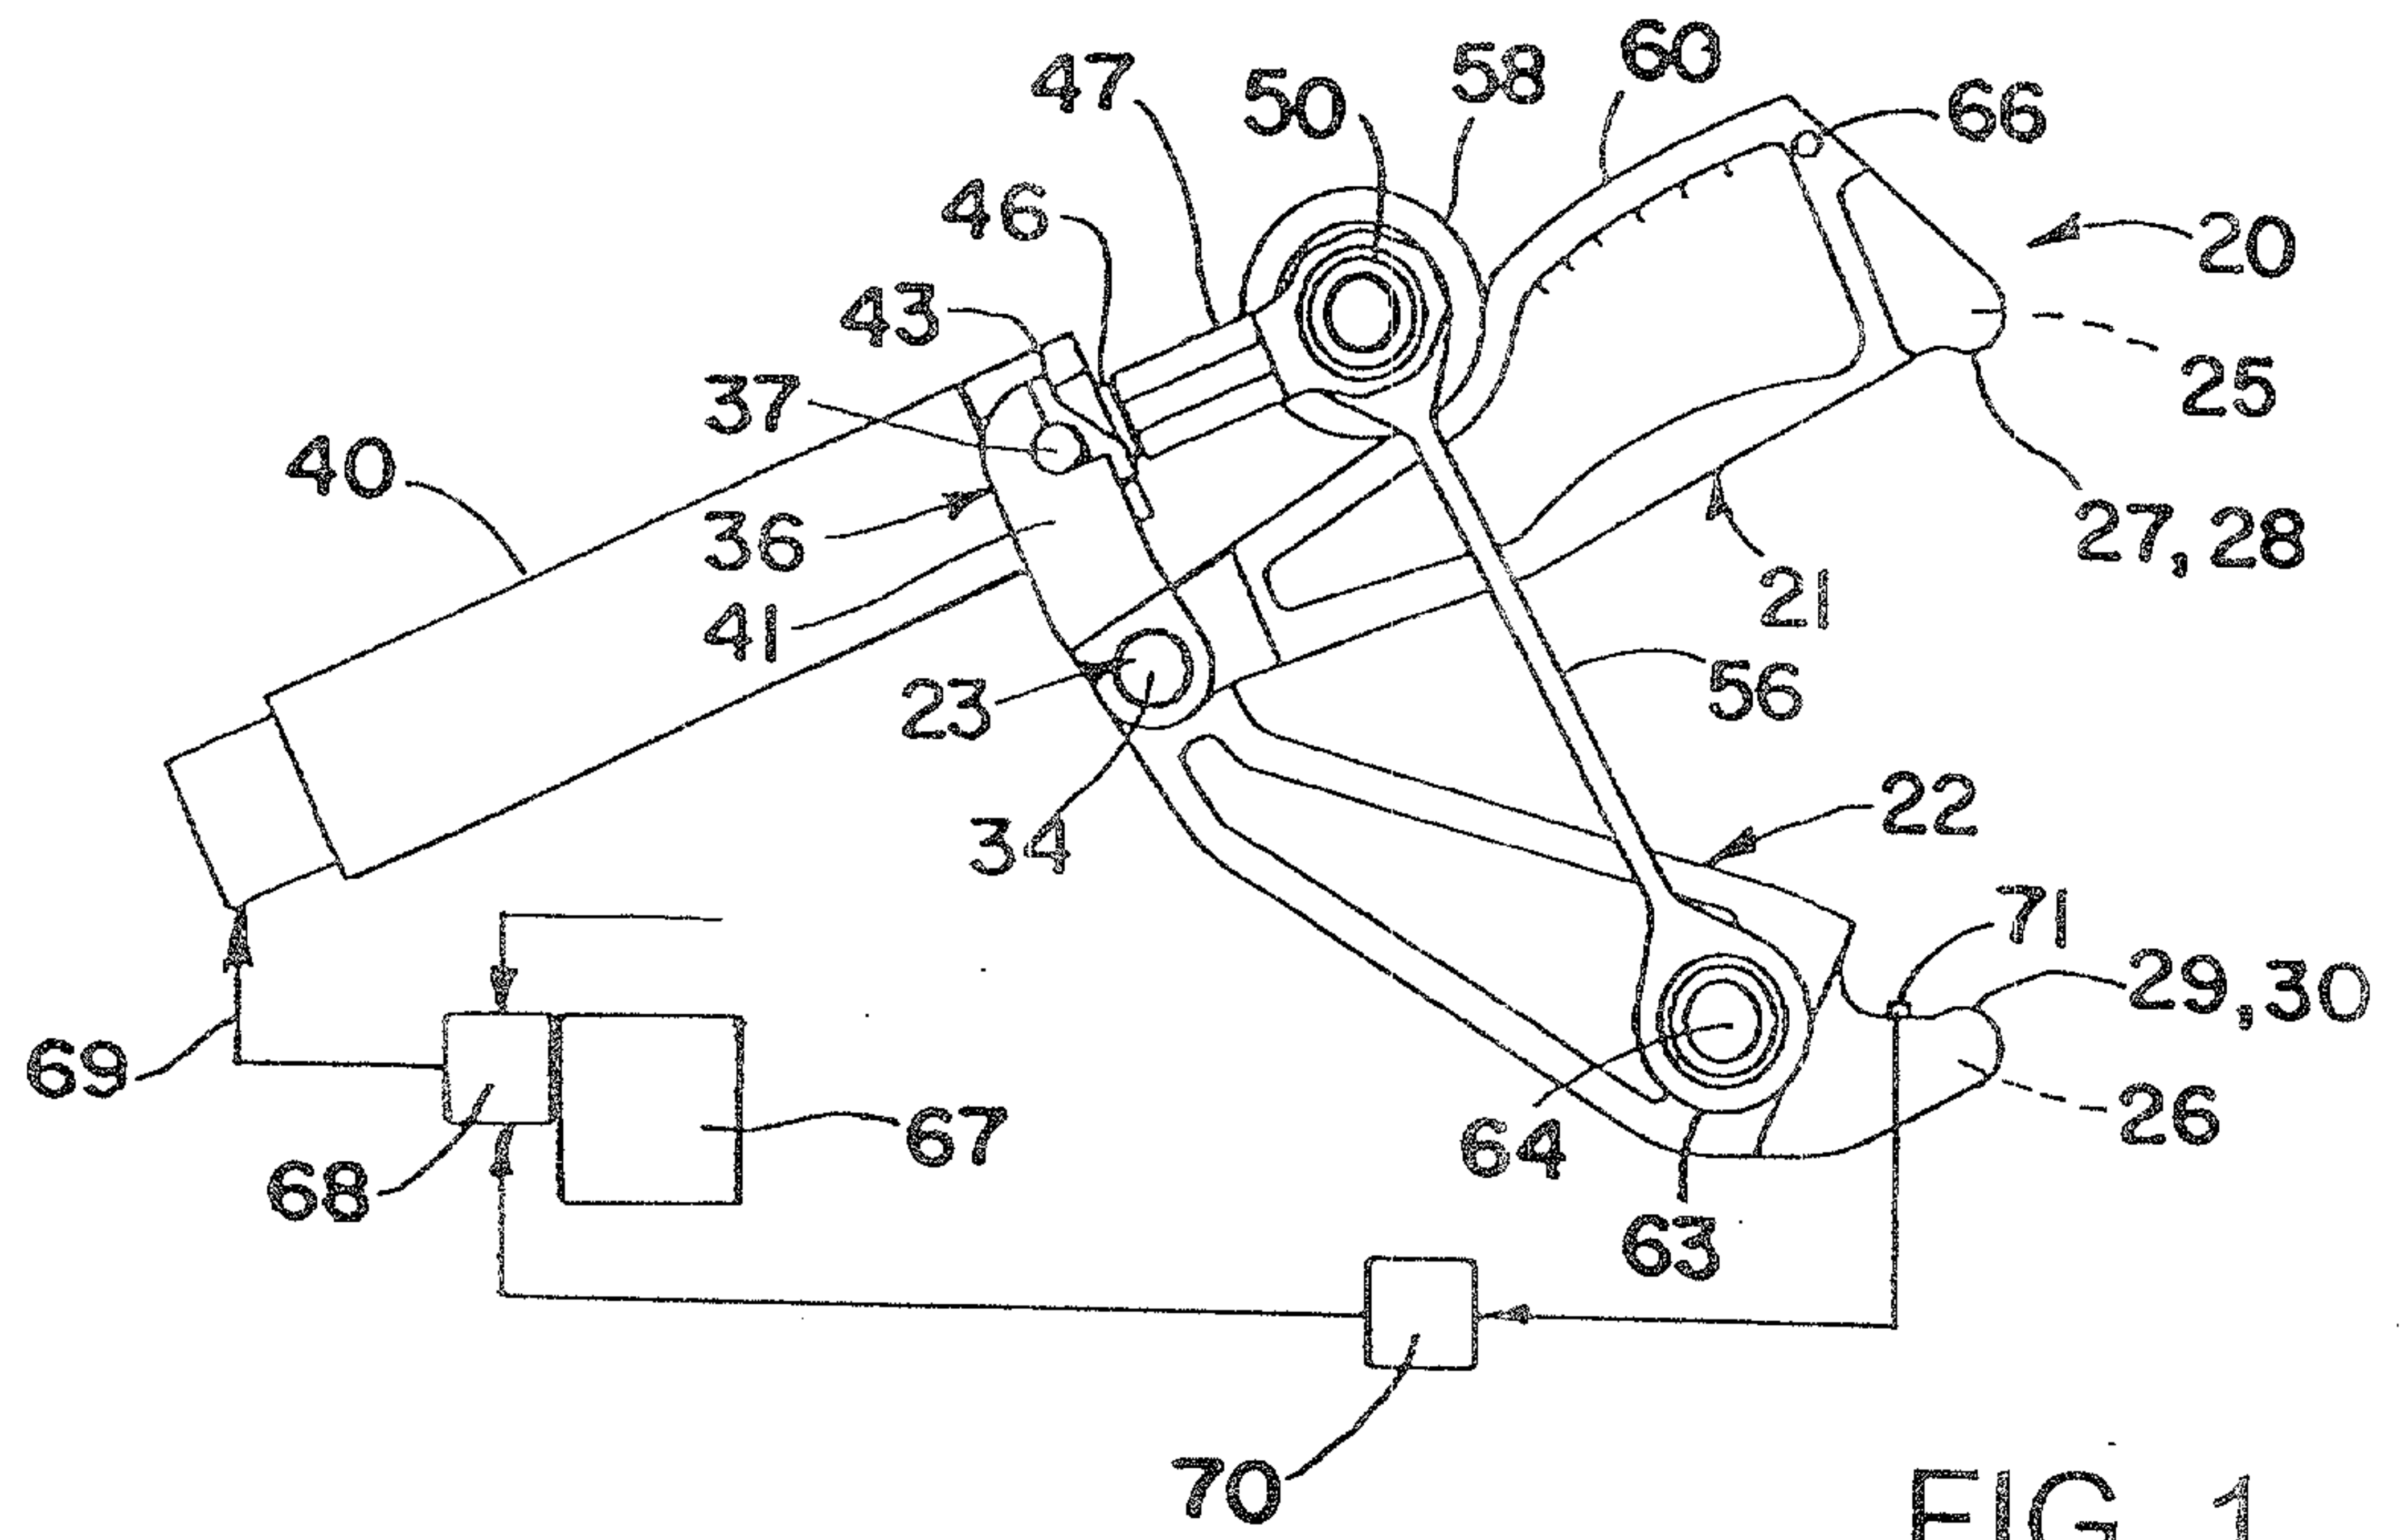


FIG. 1

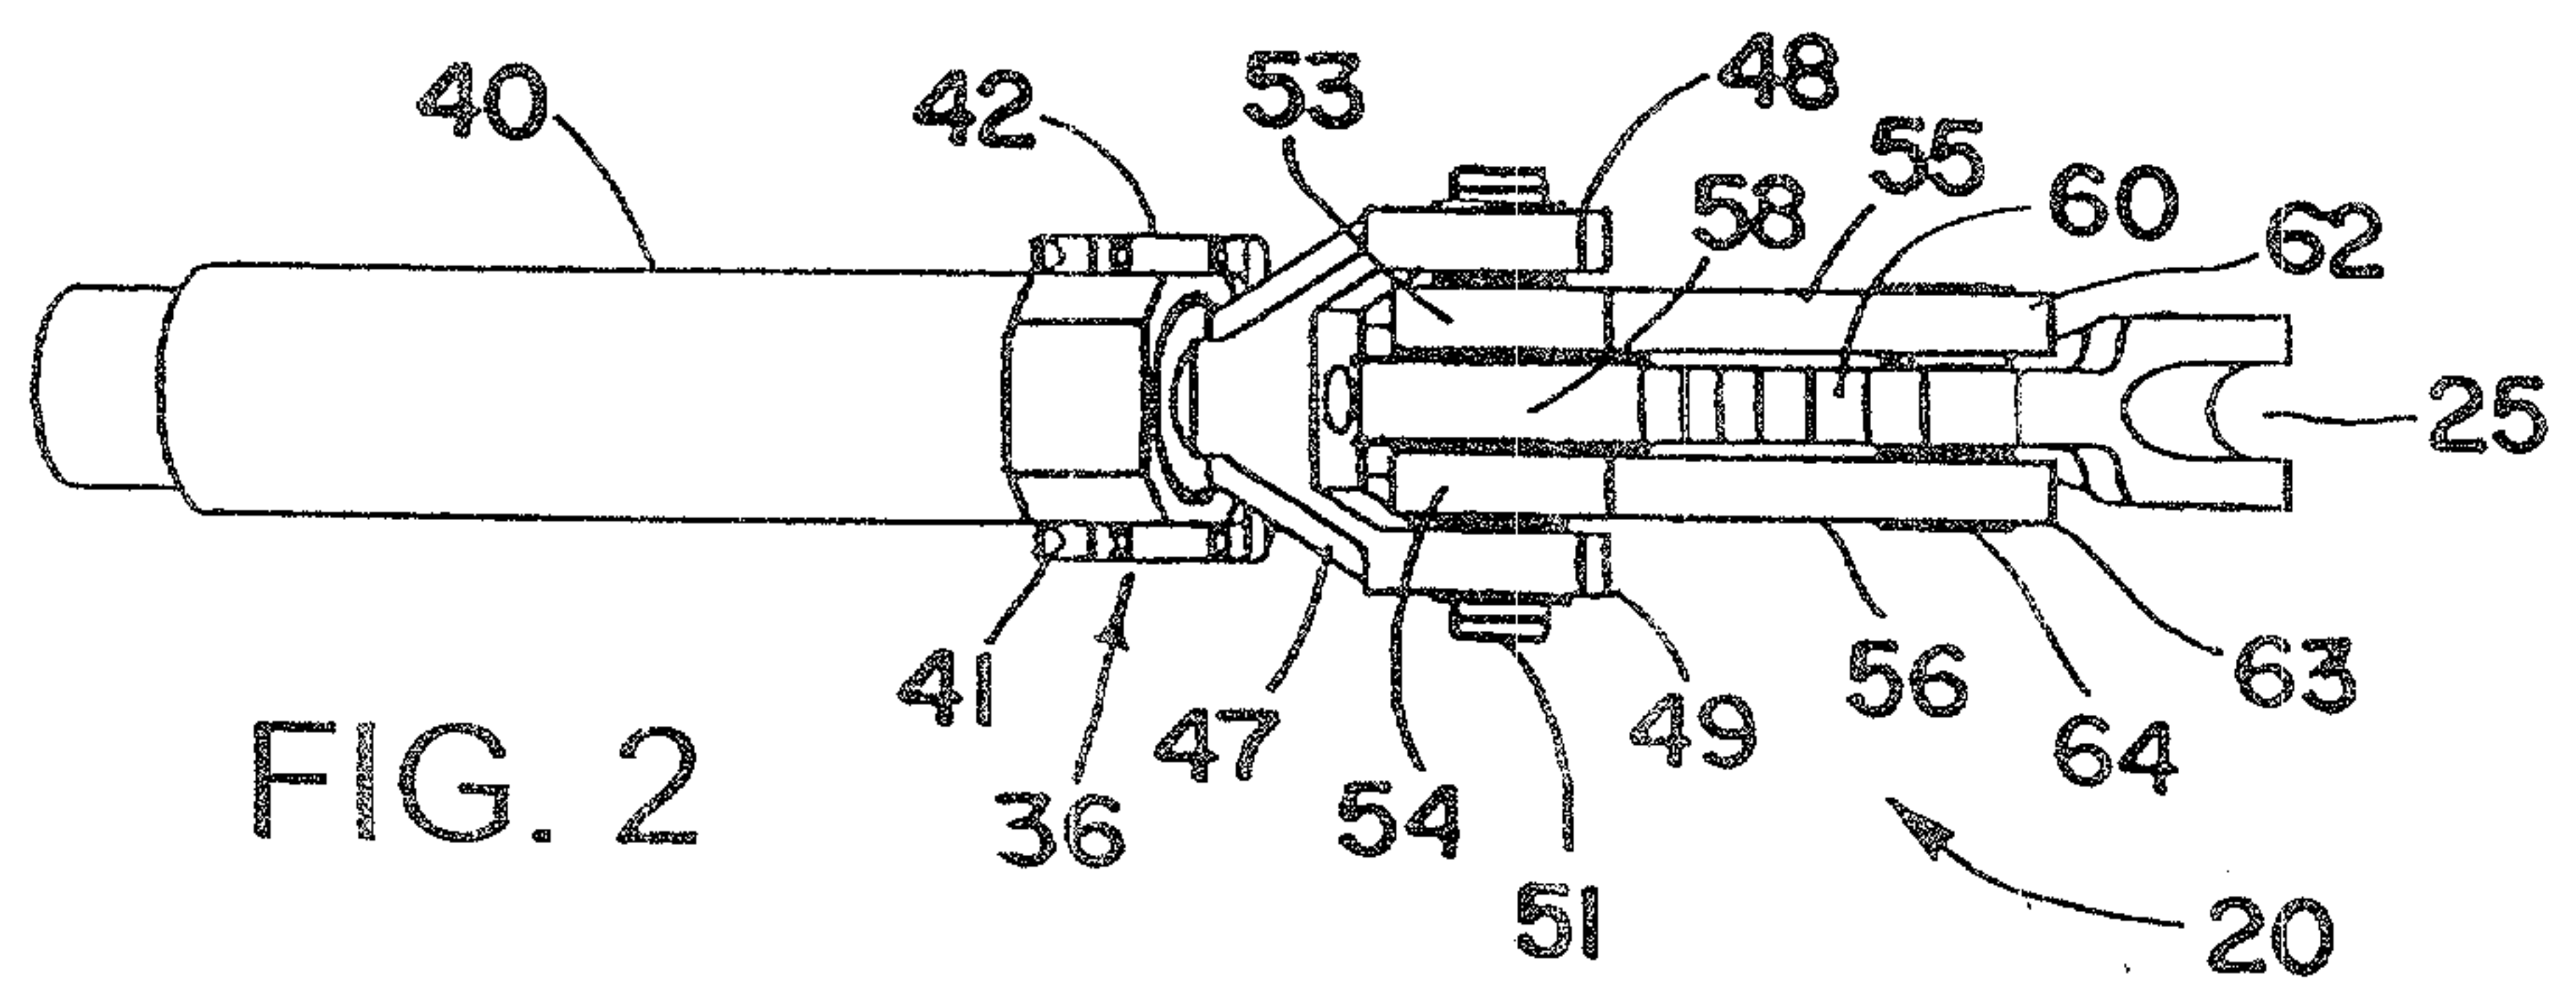


FIG. 2

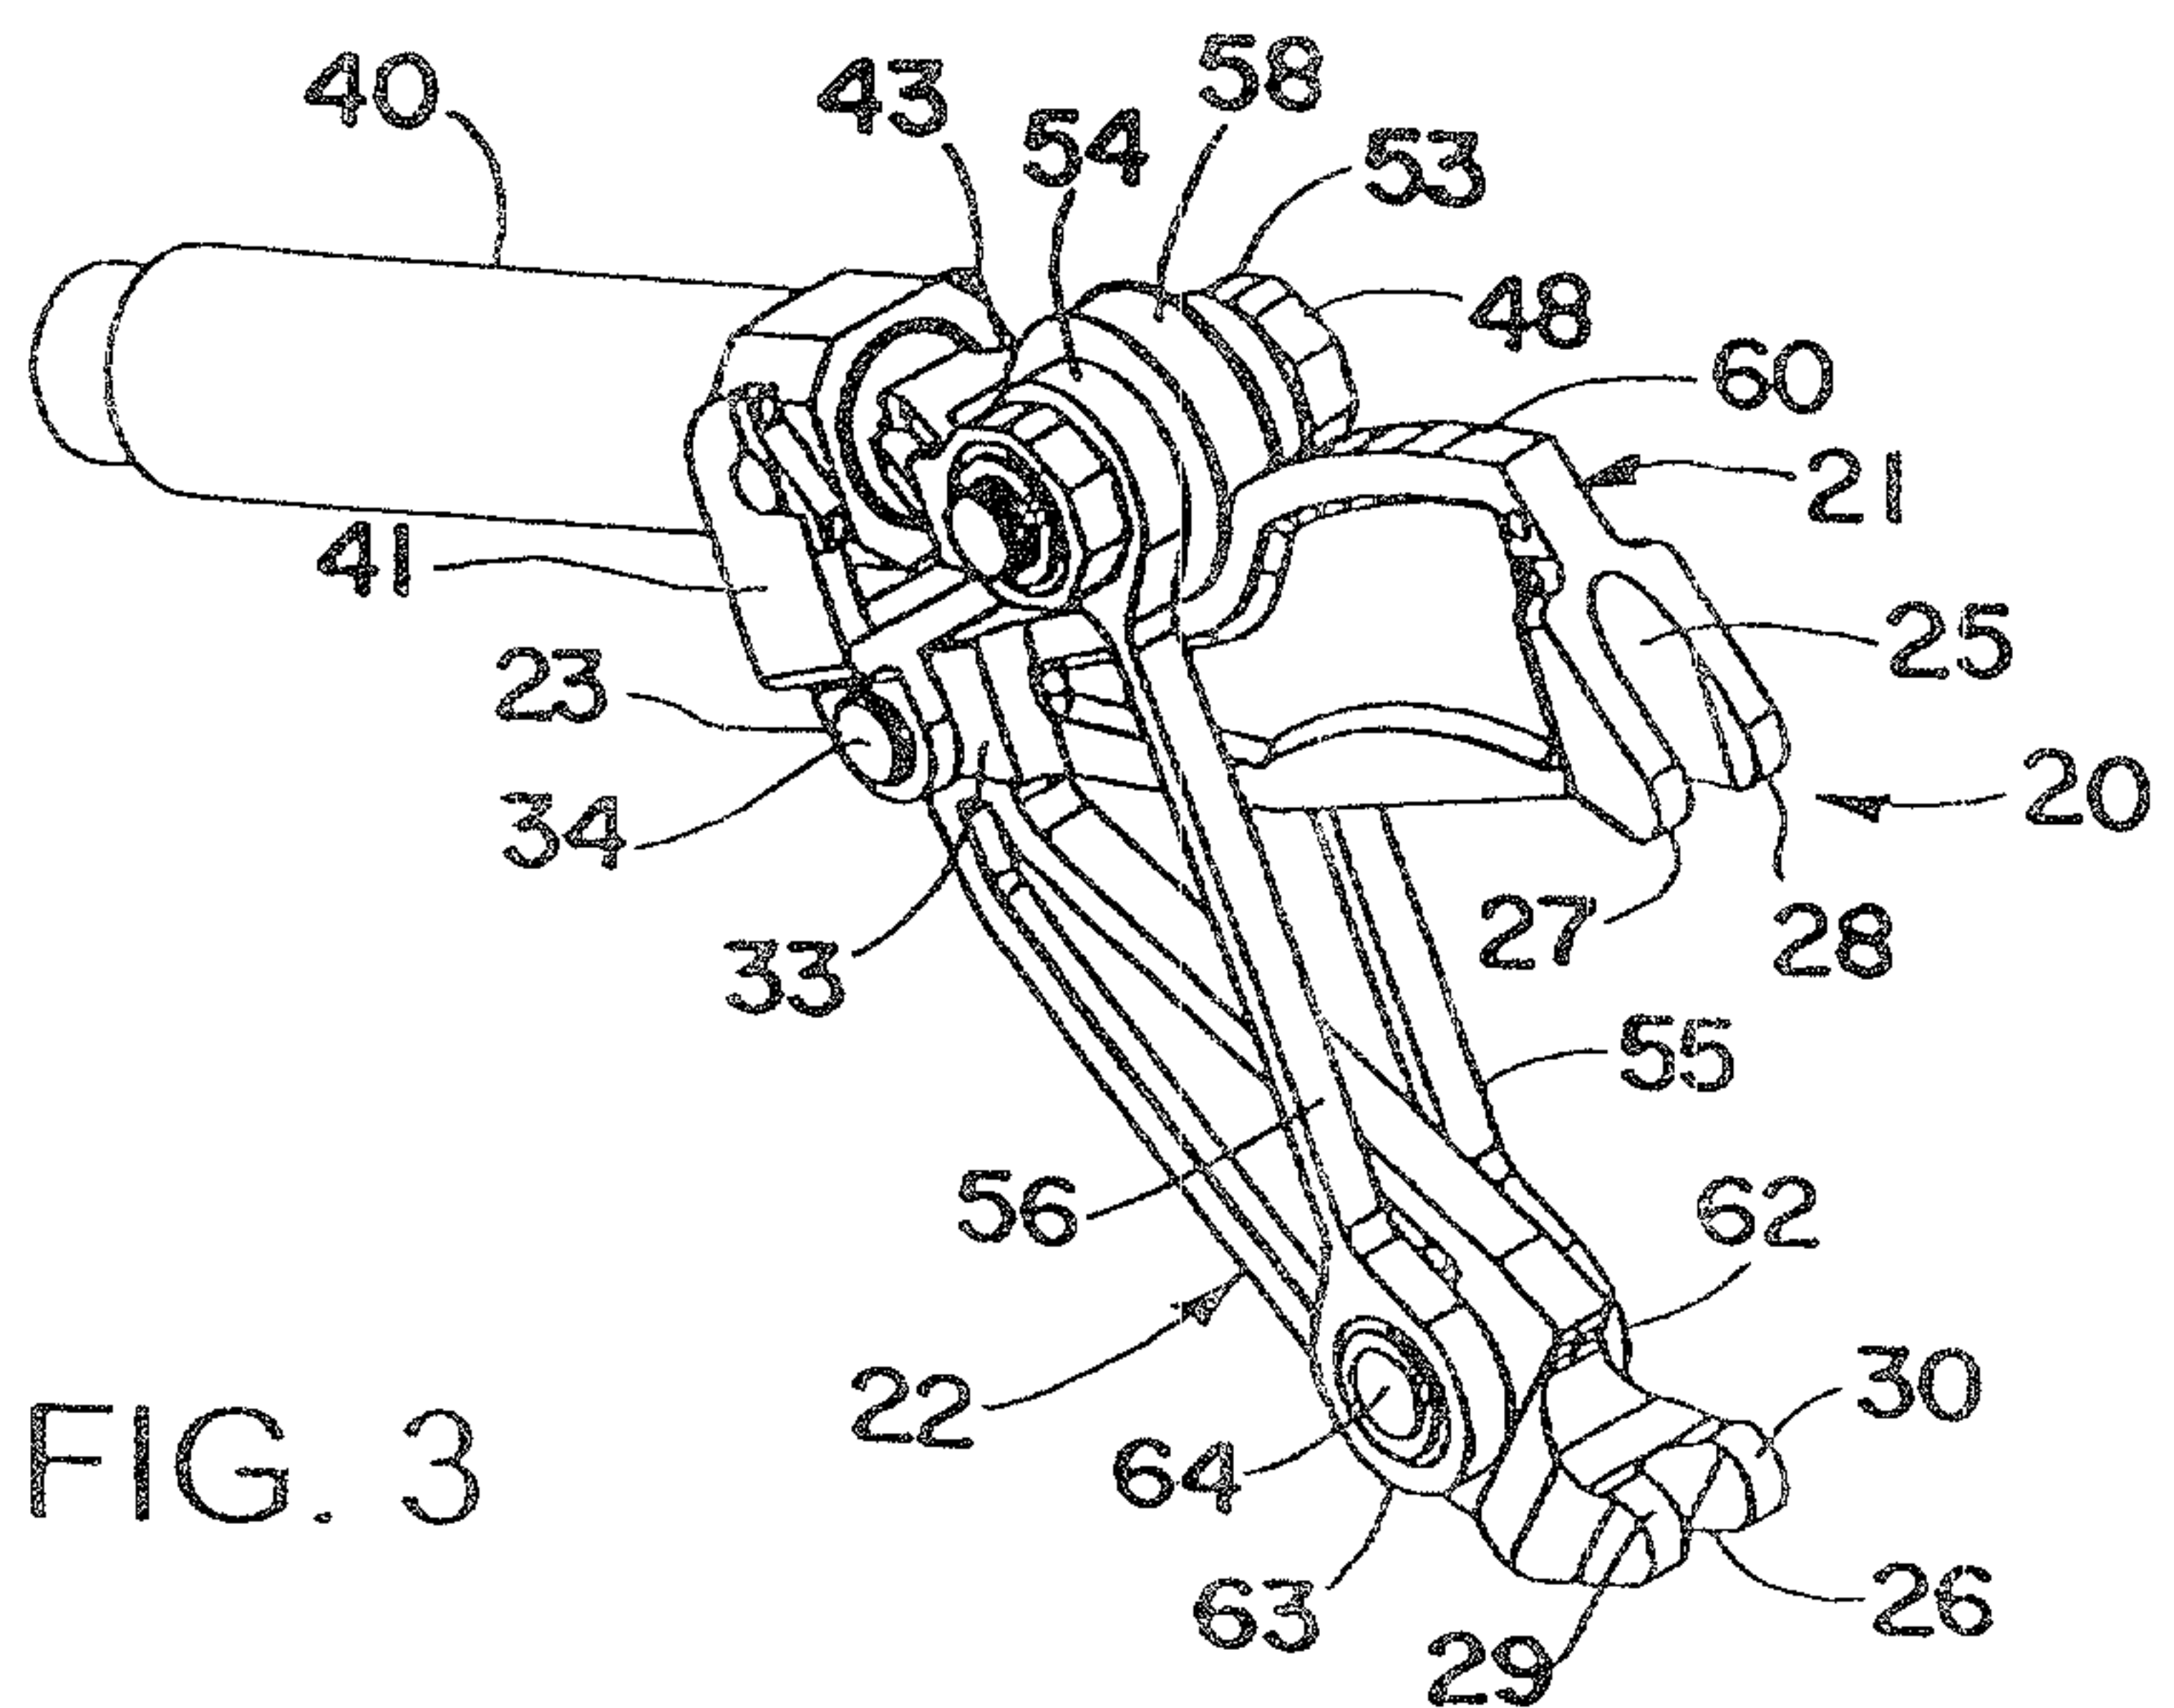
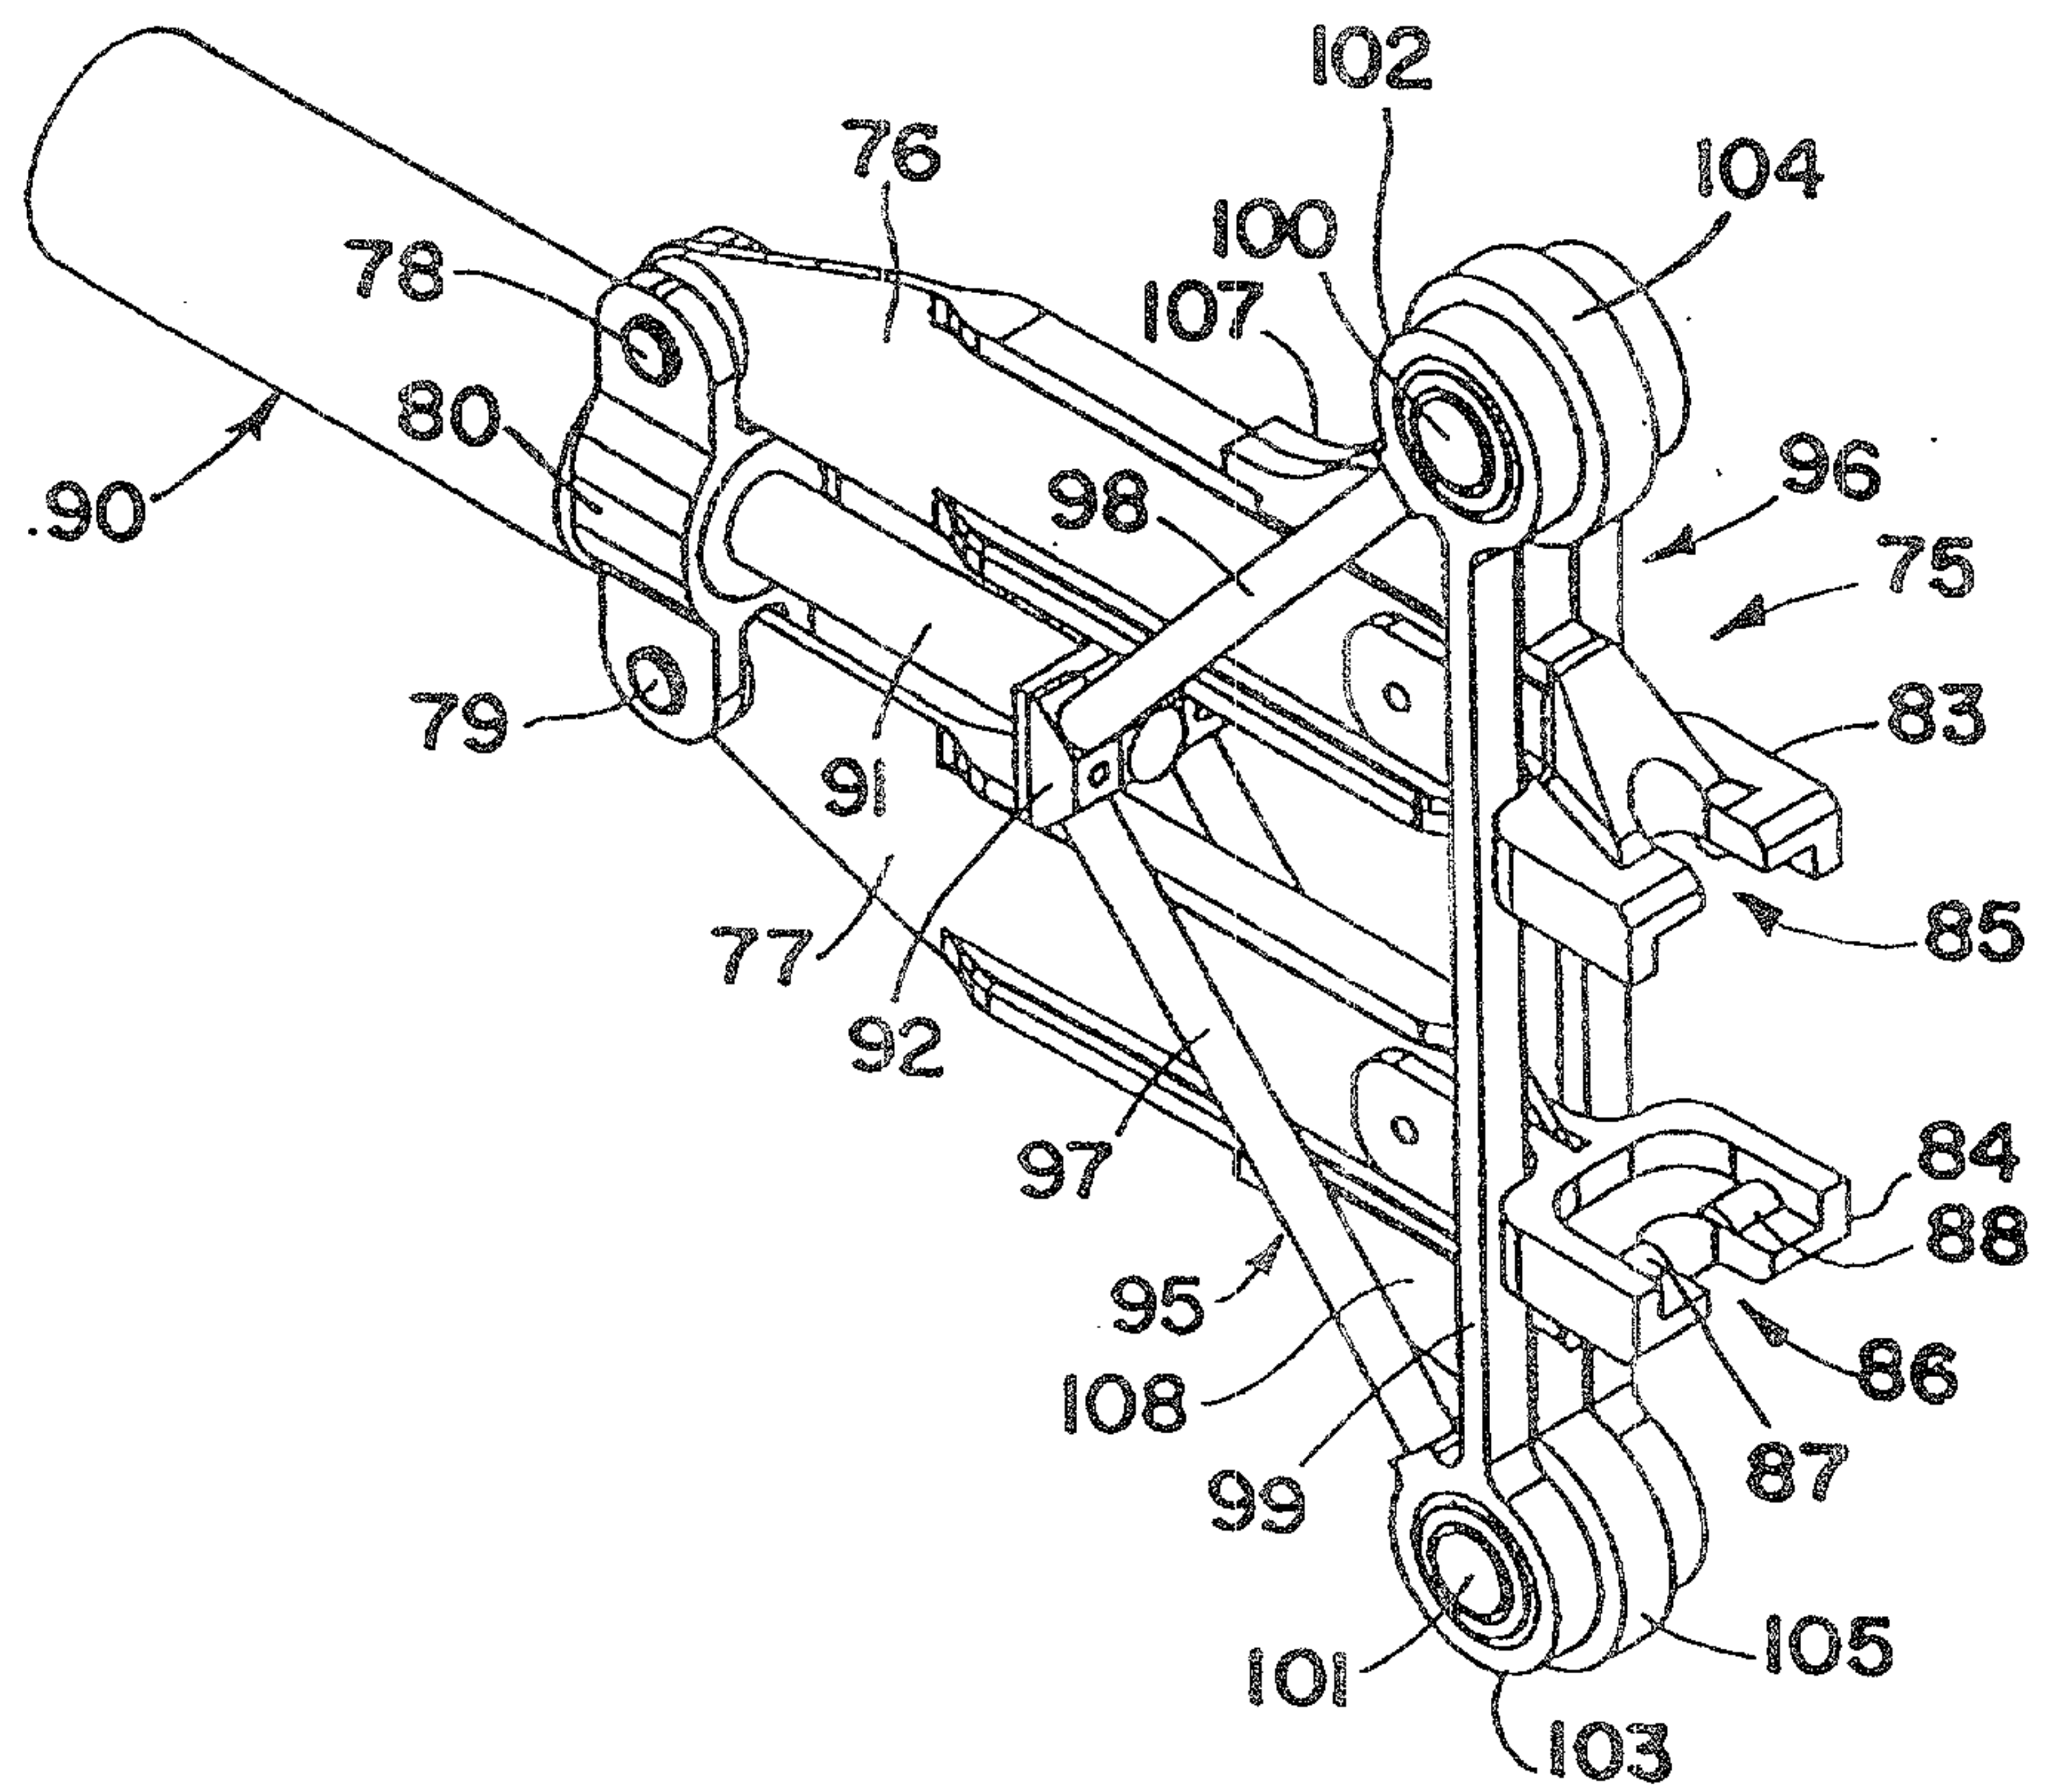
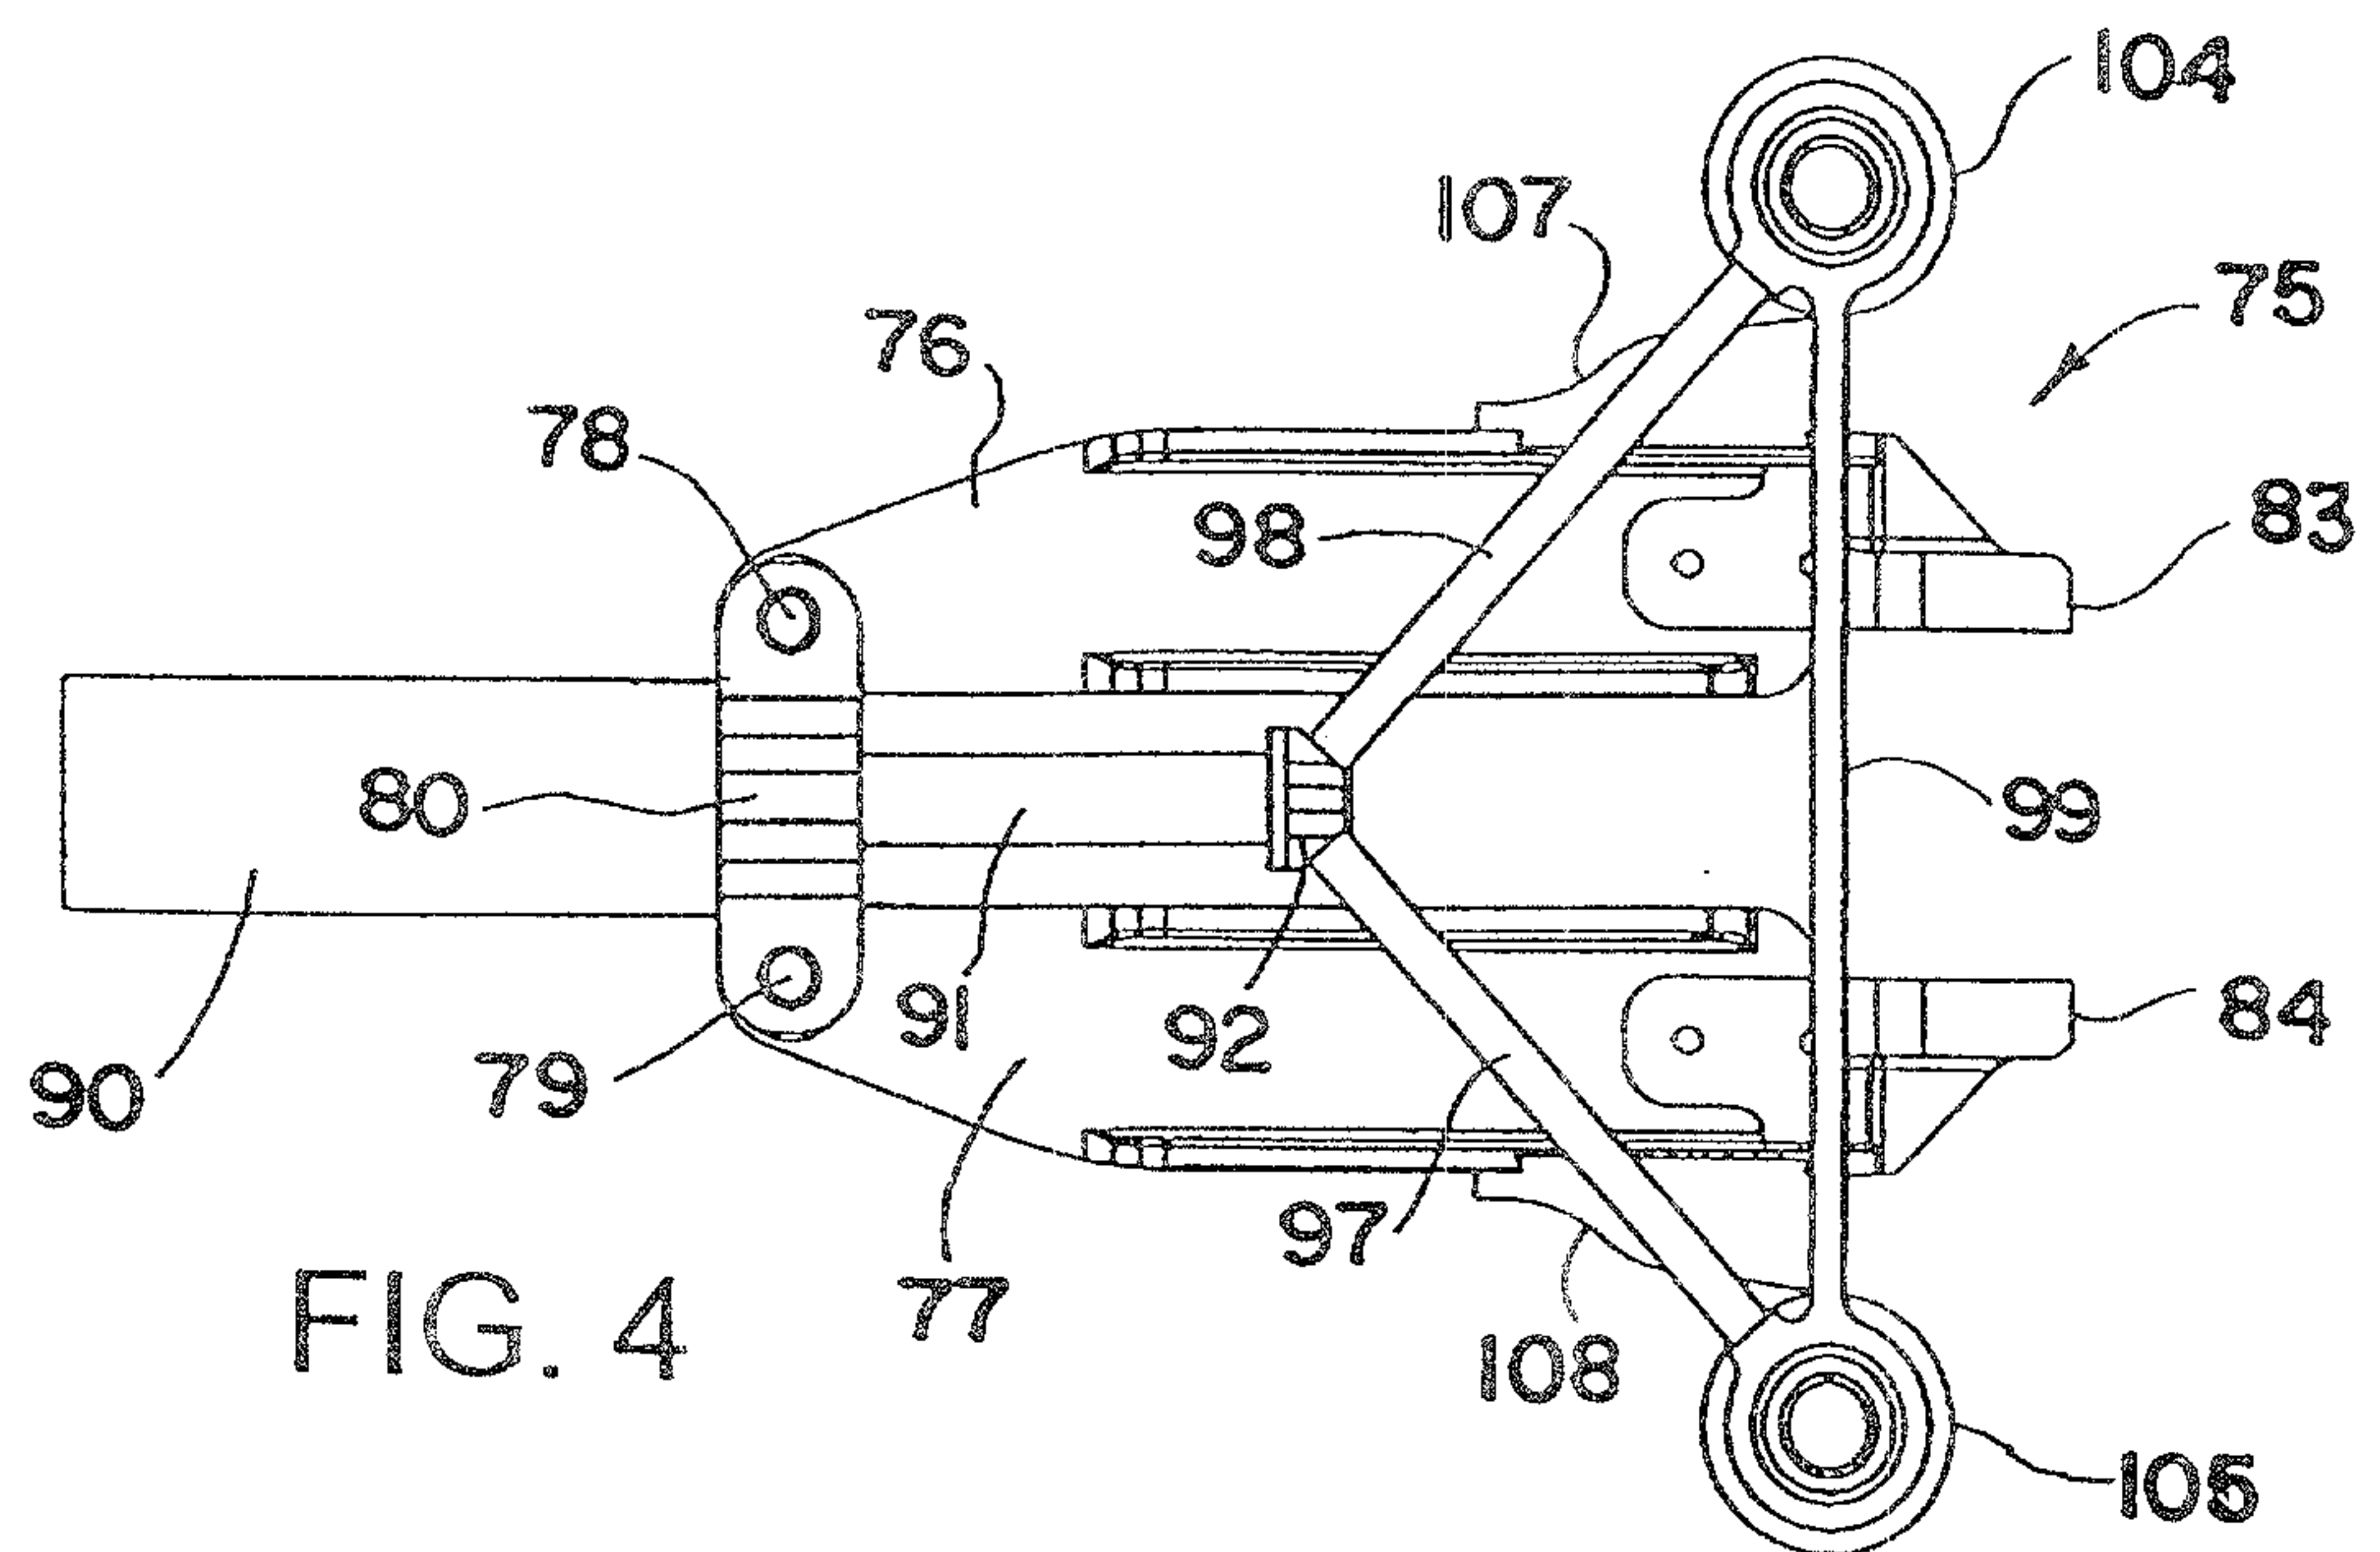
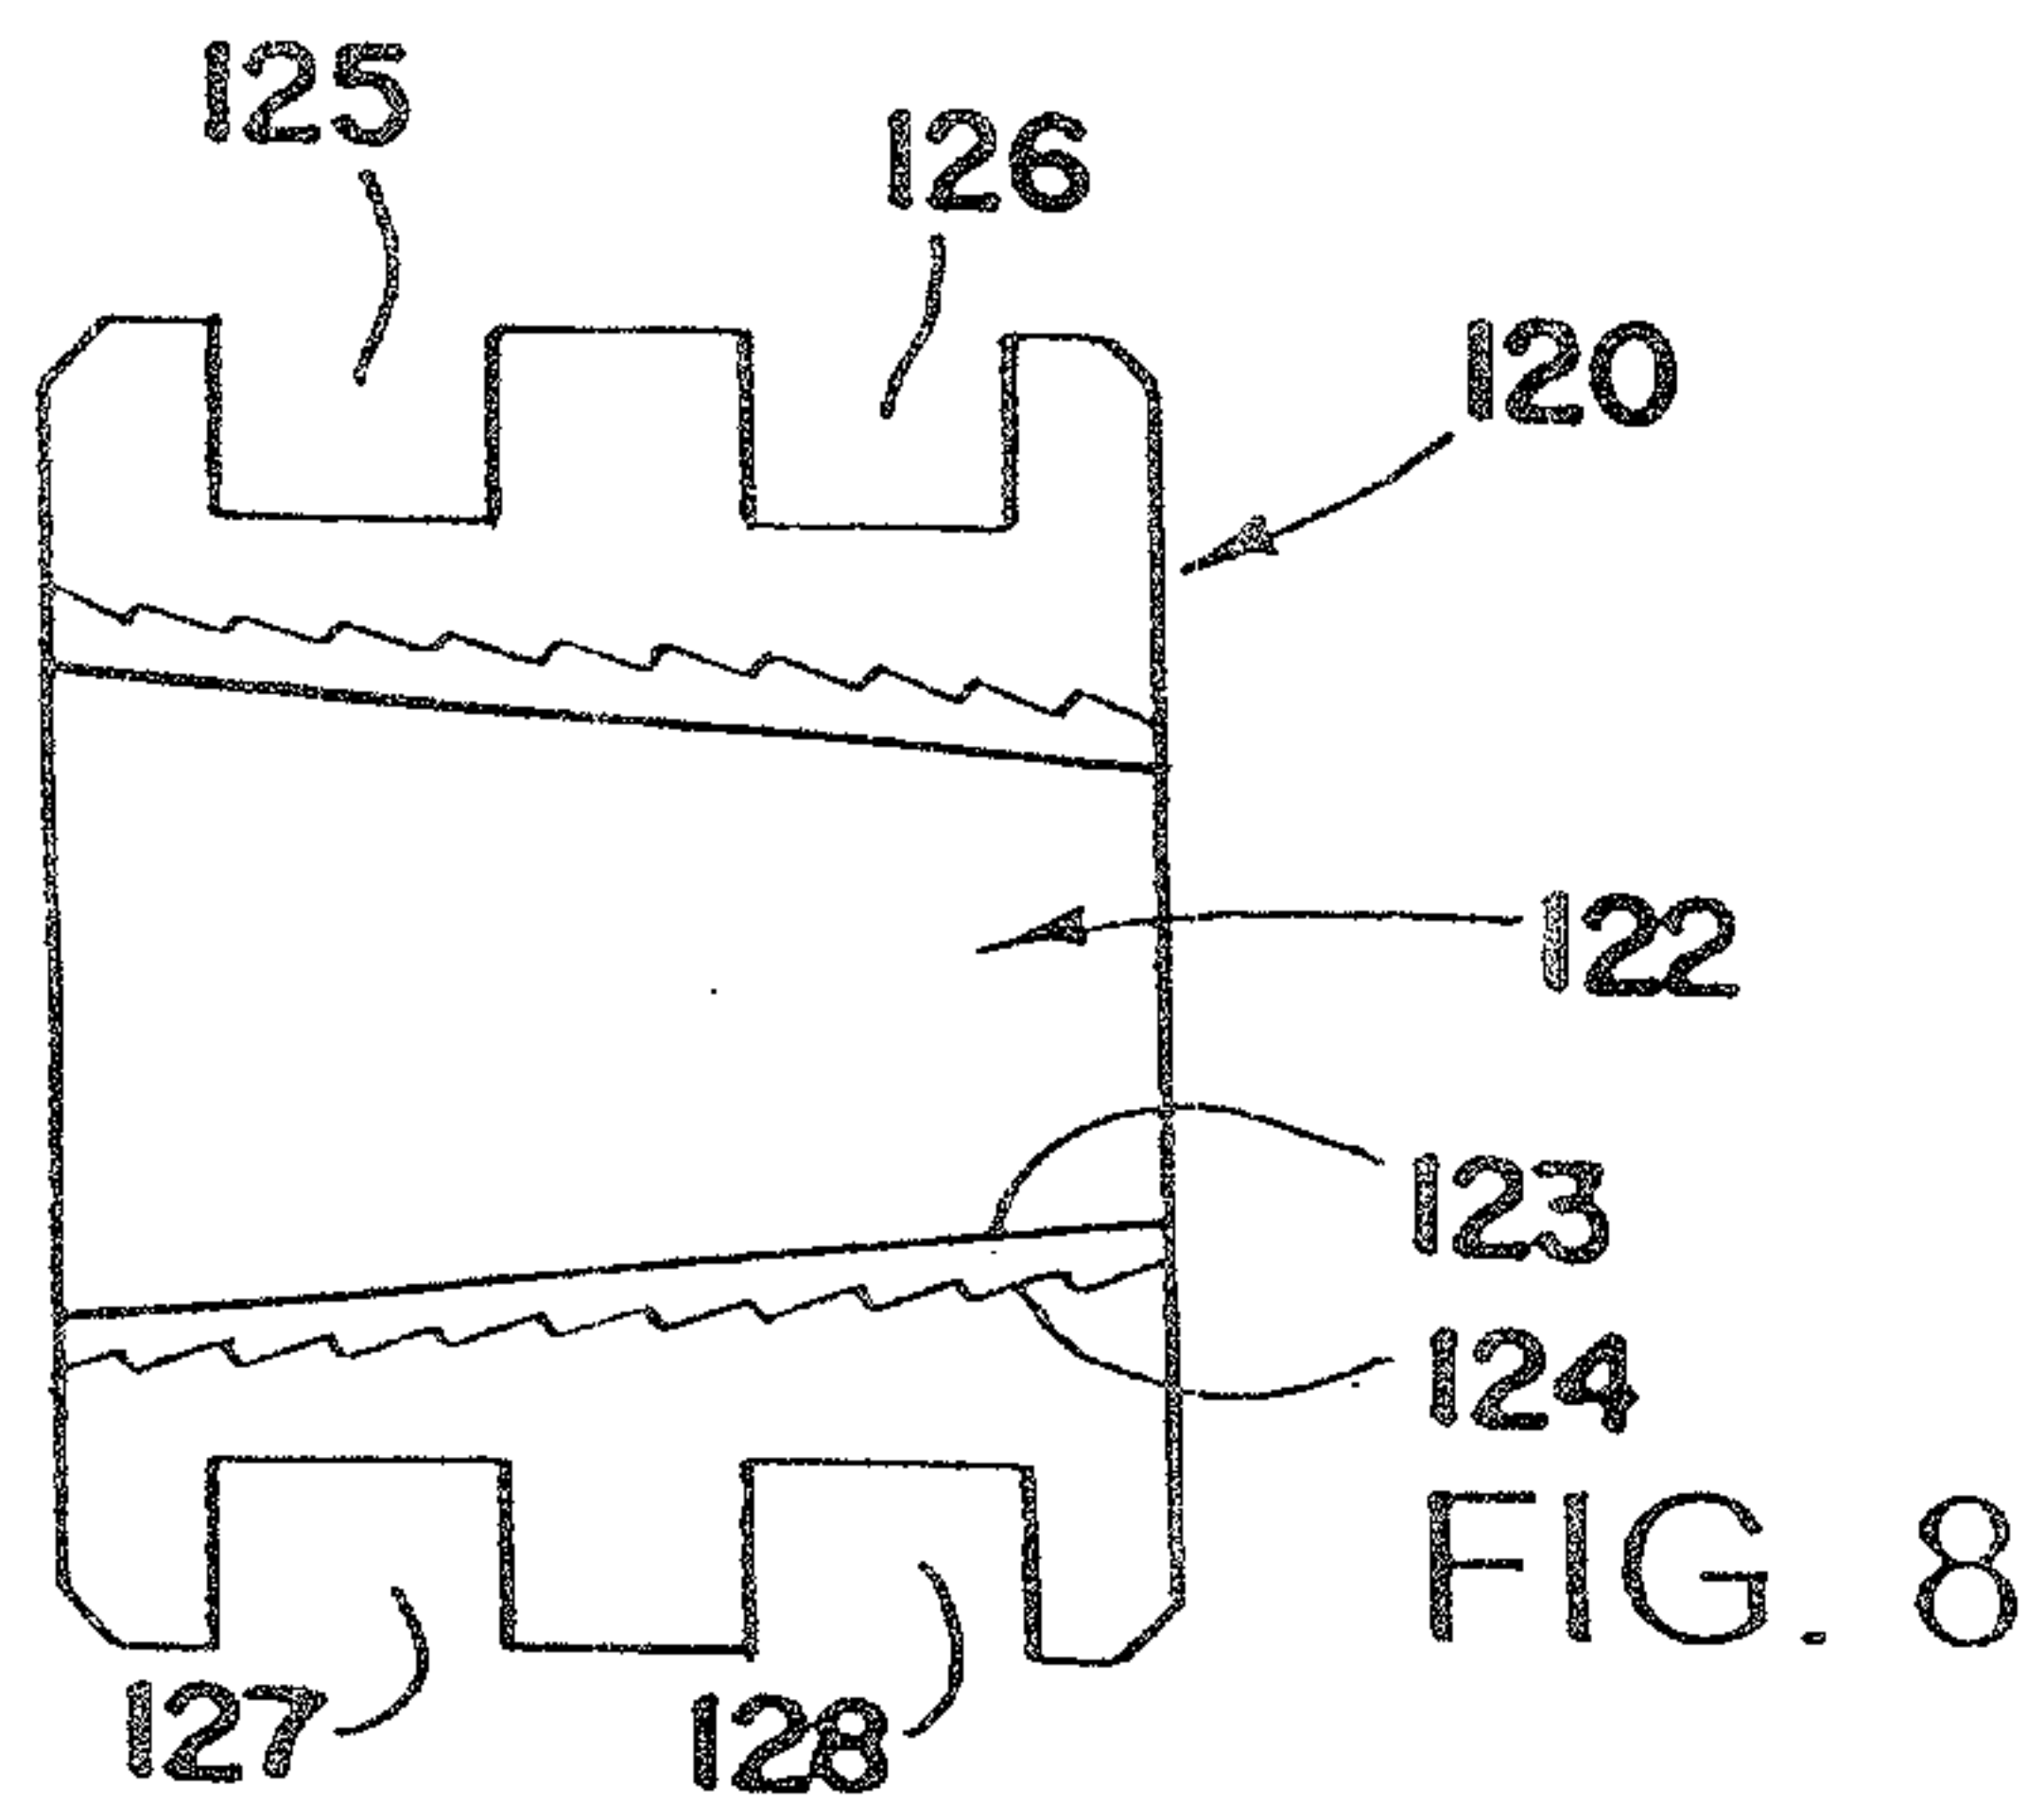
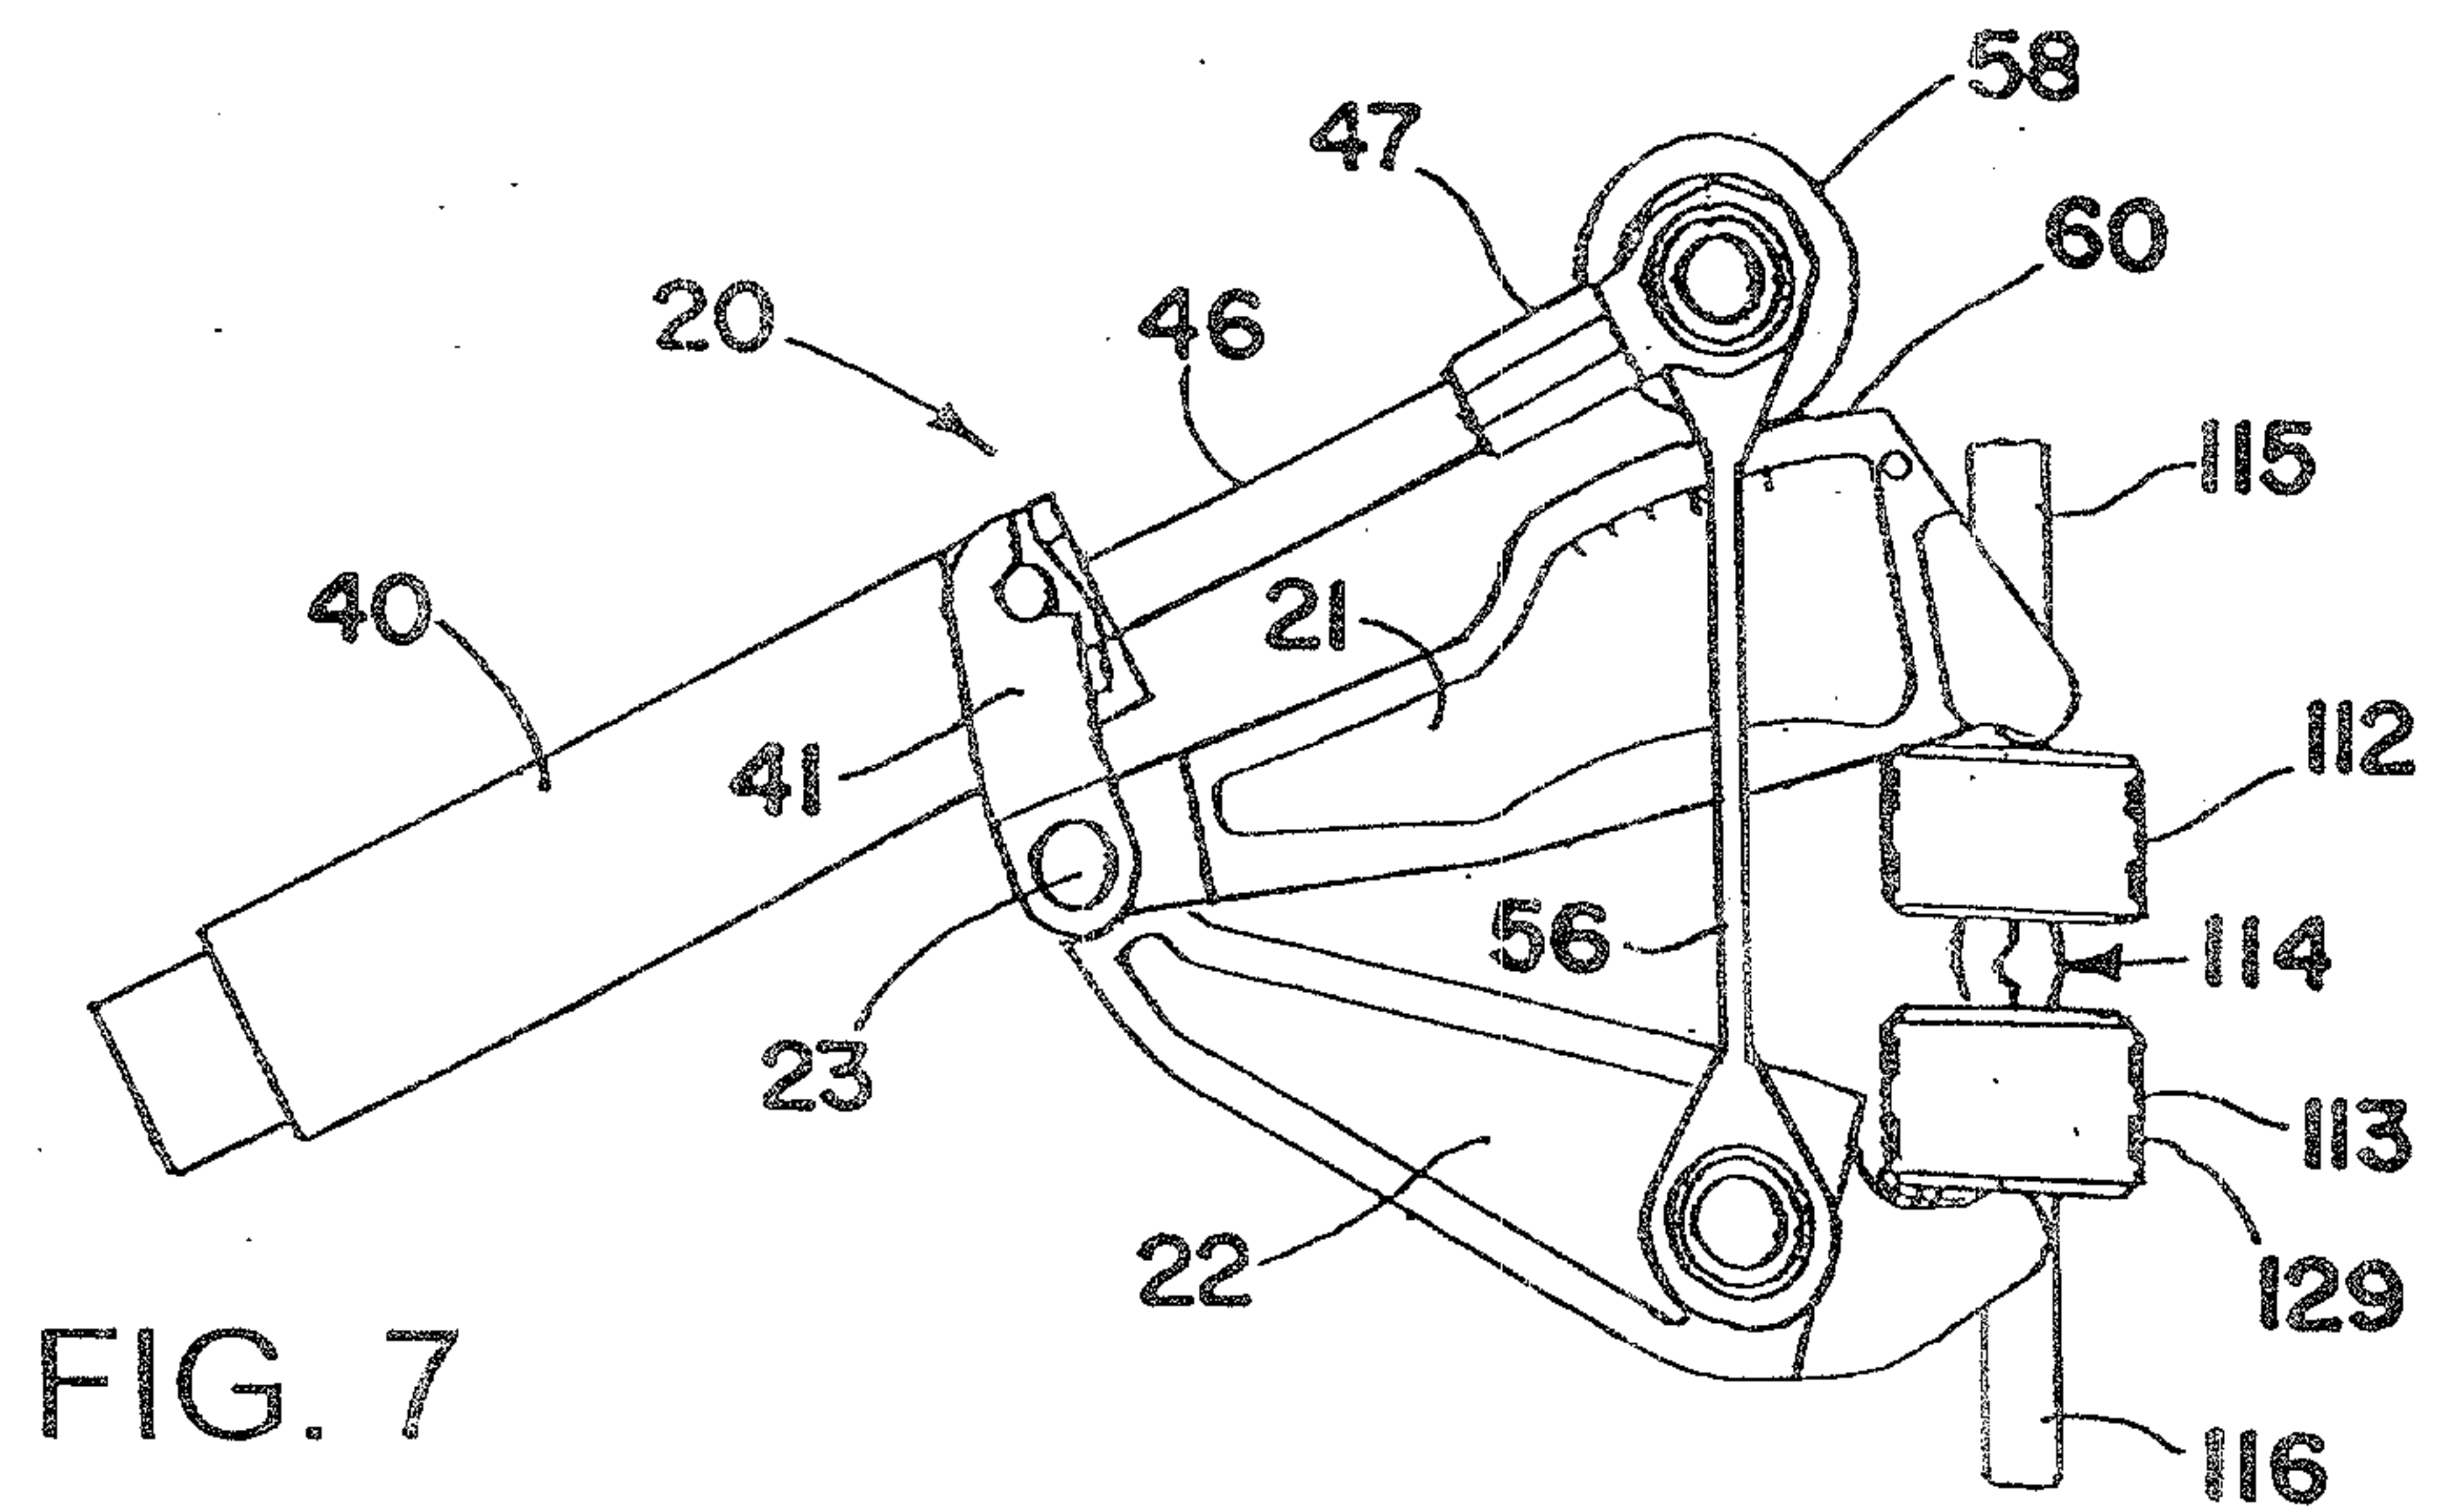
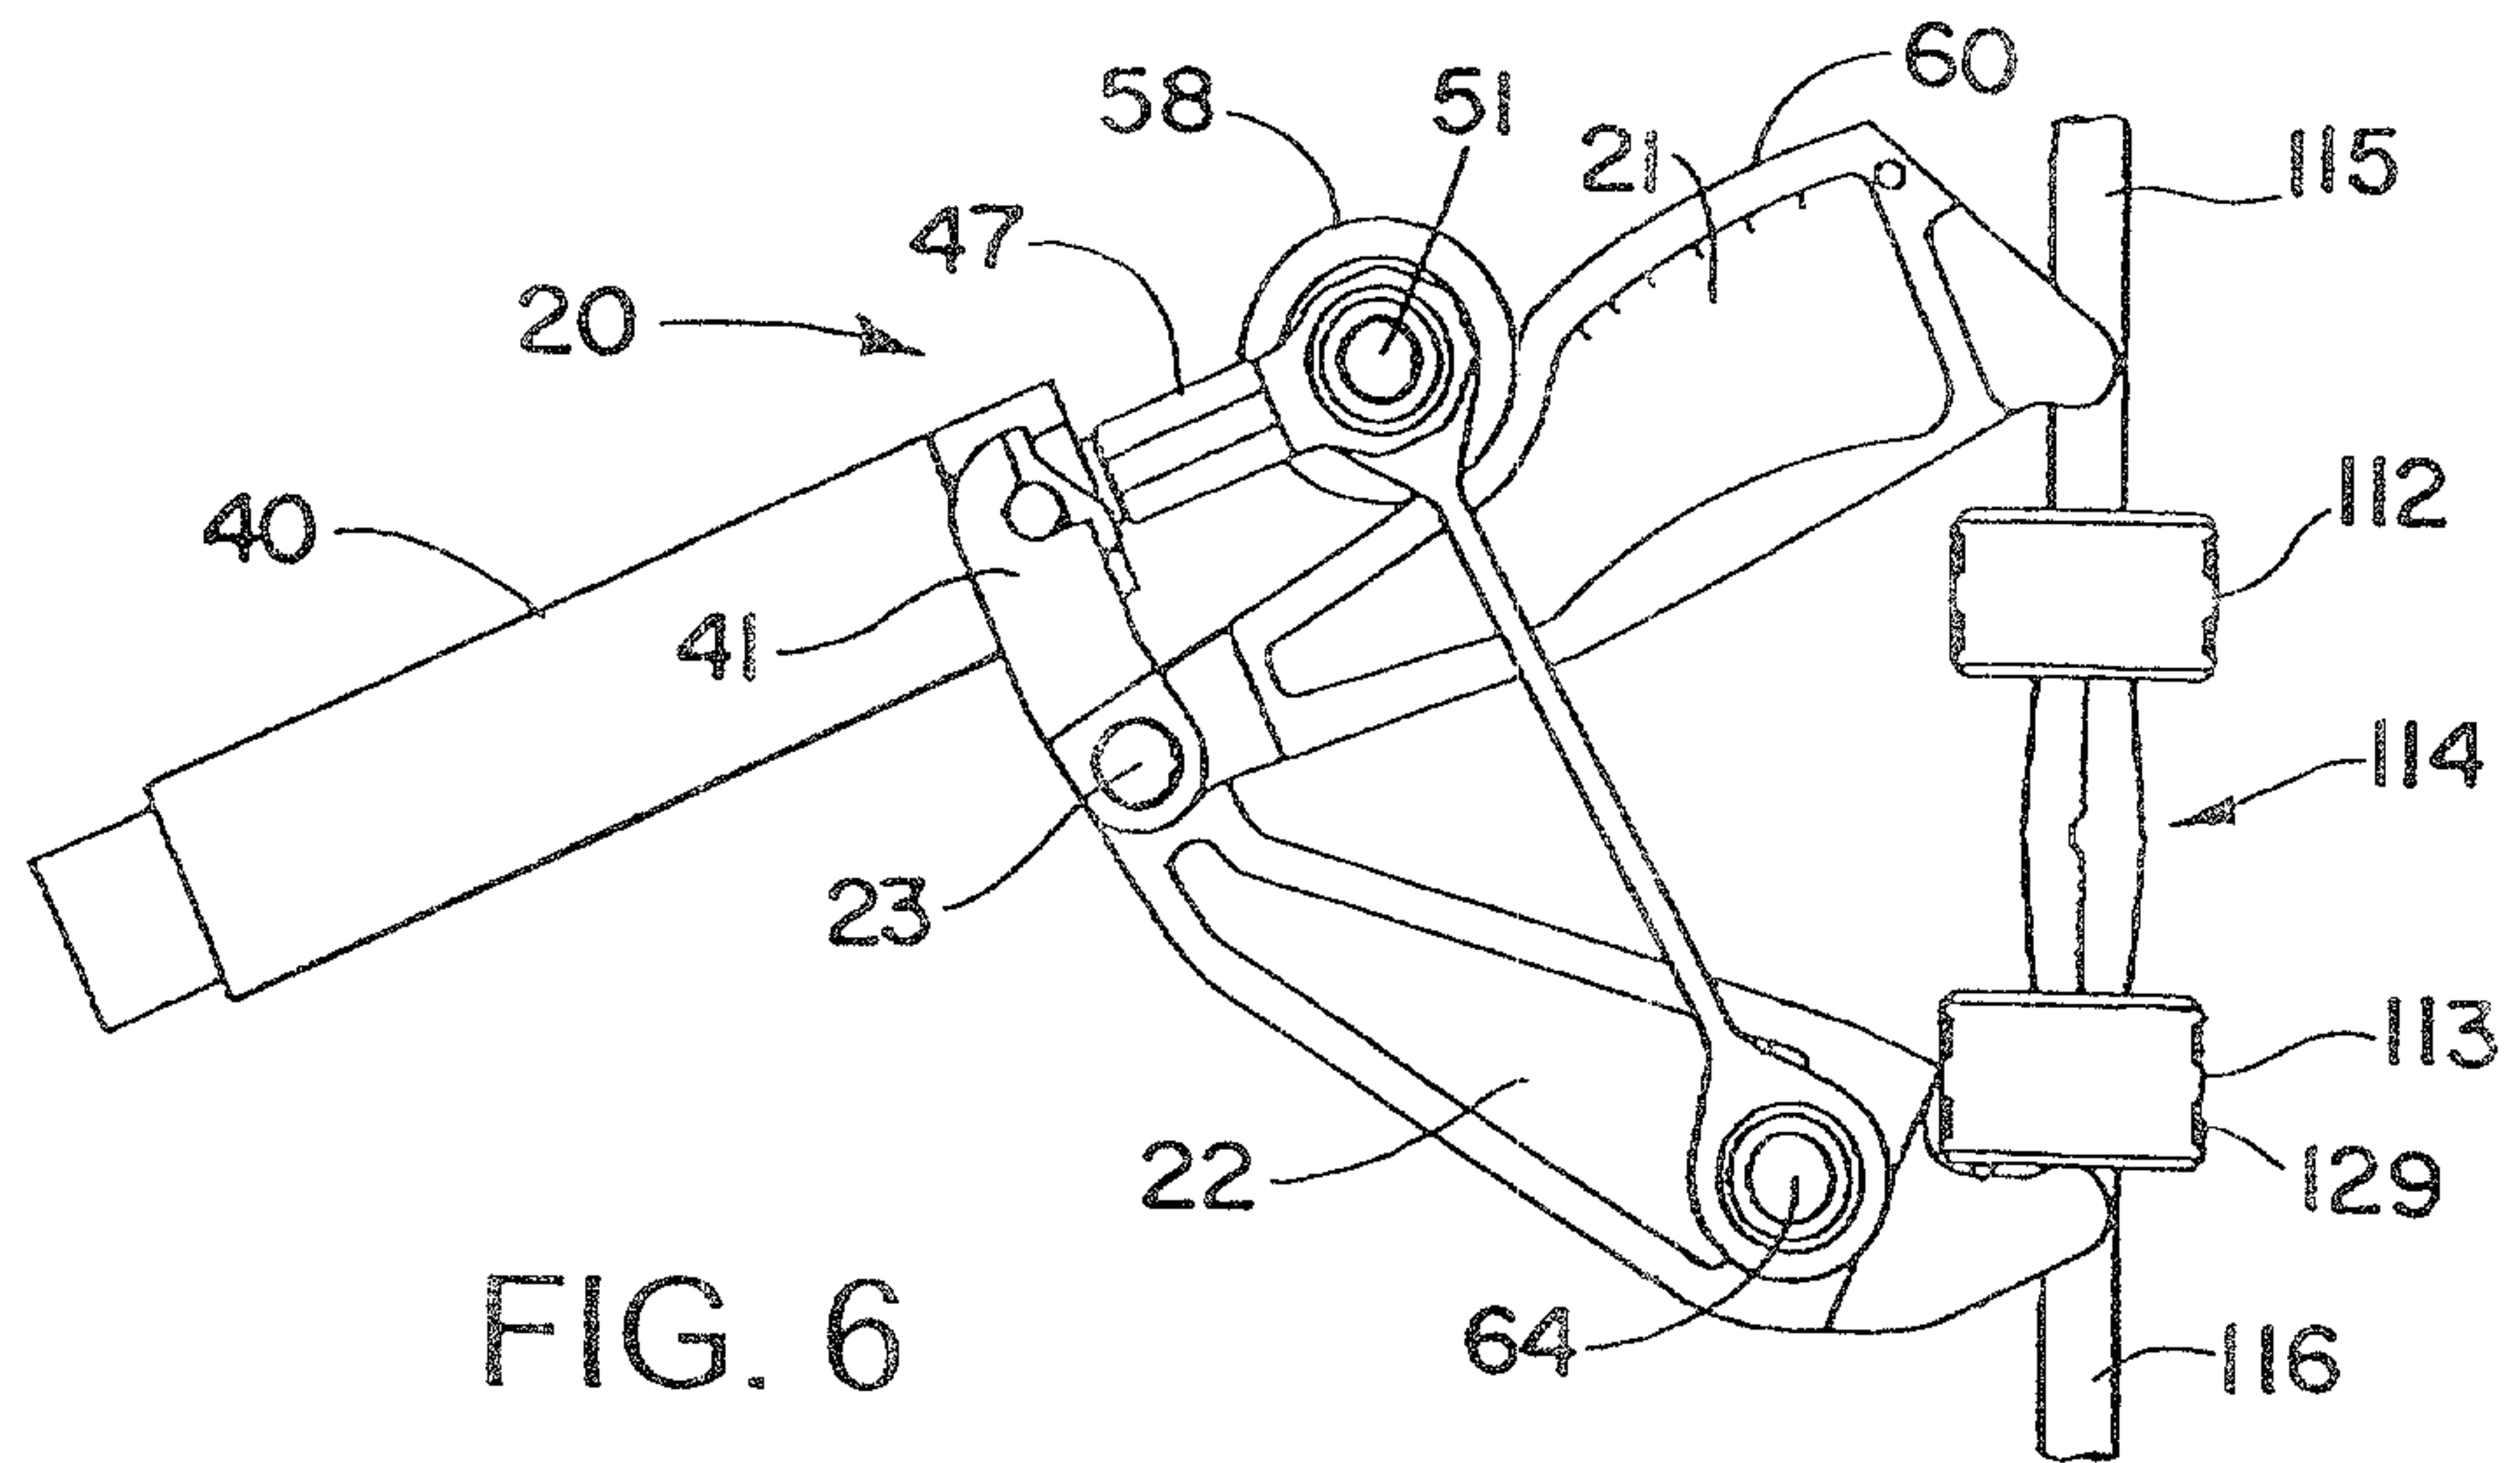


FIG. 3





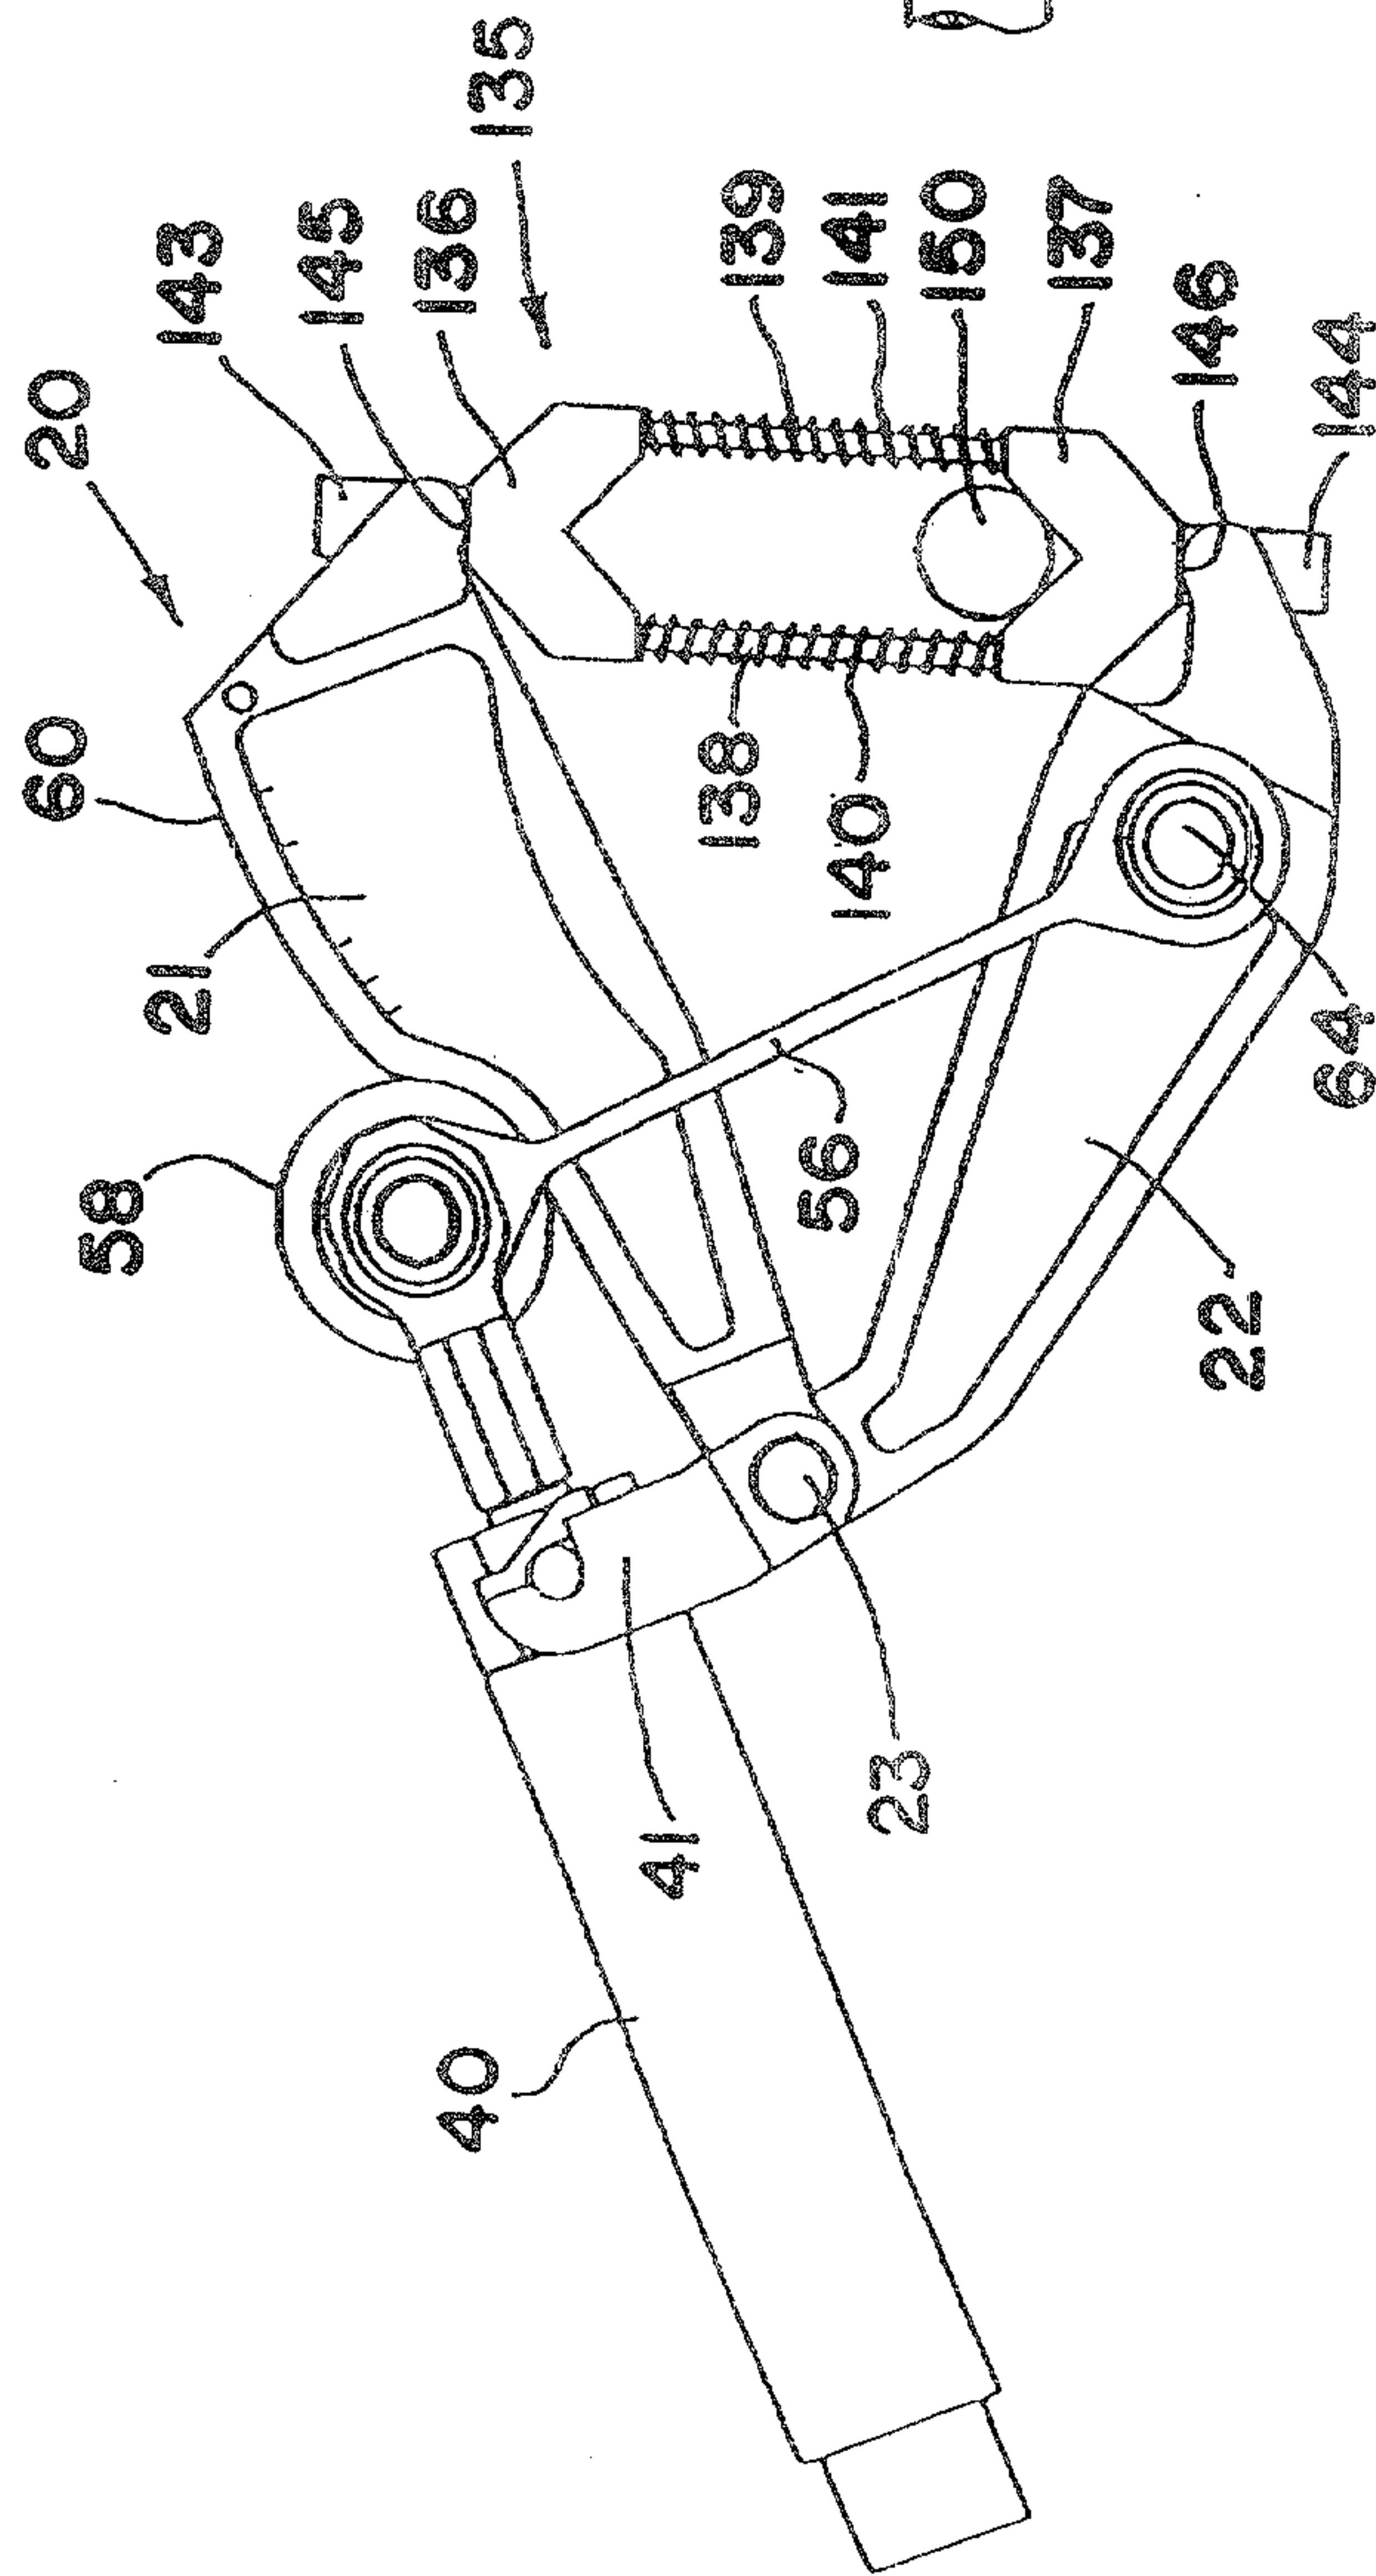


FIG. 9

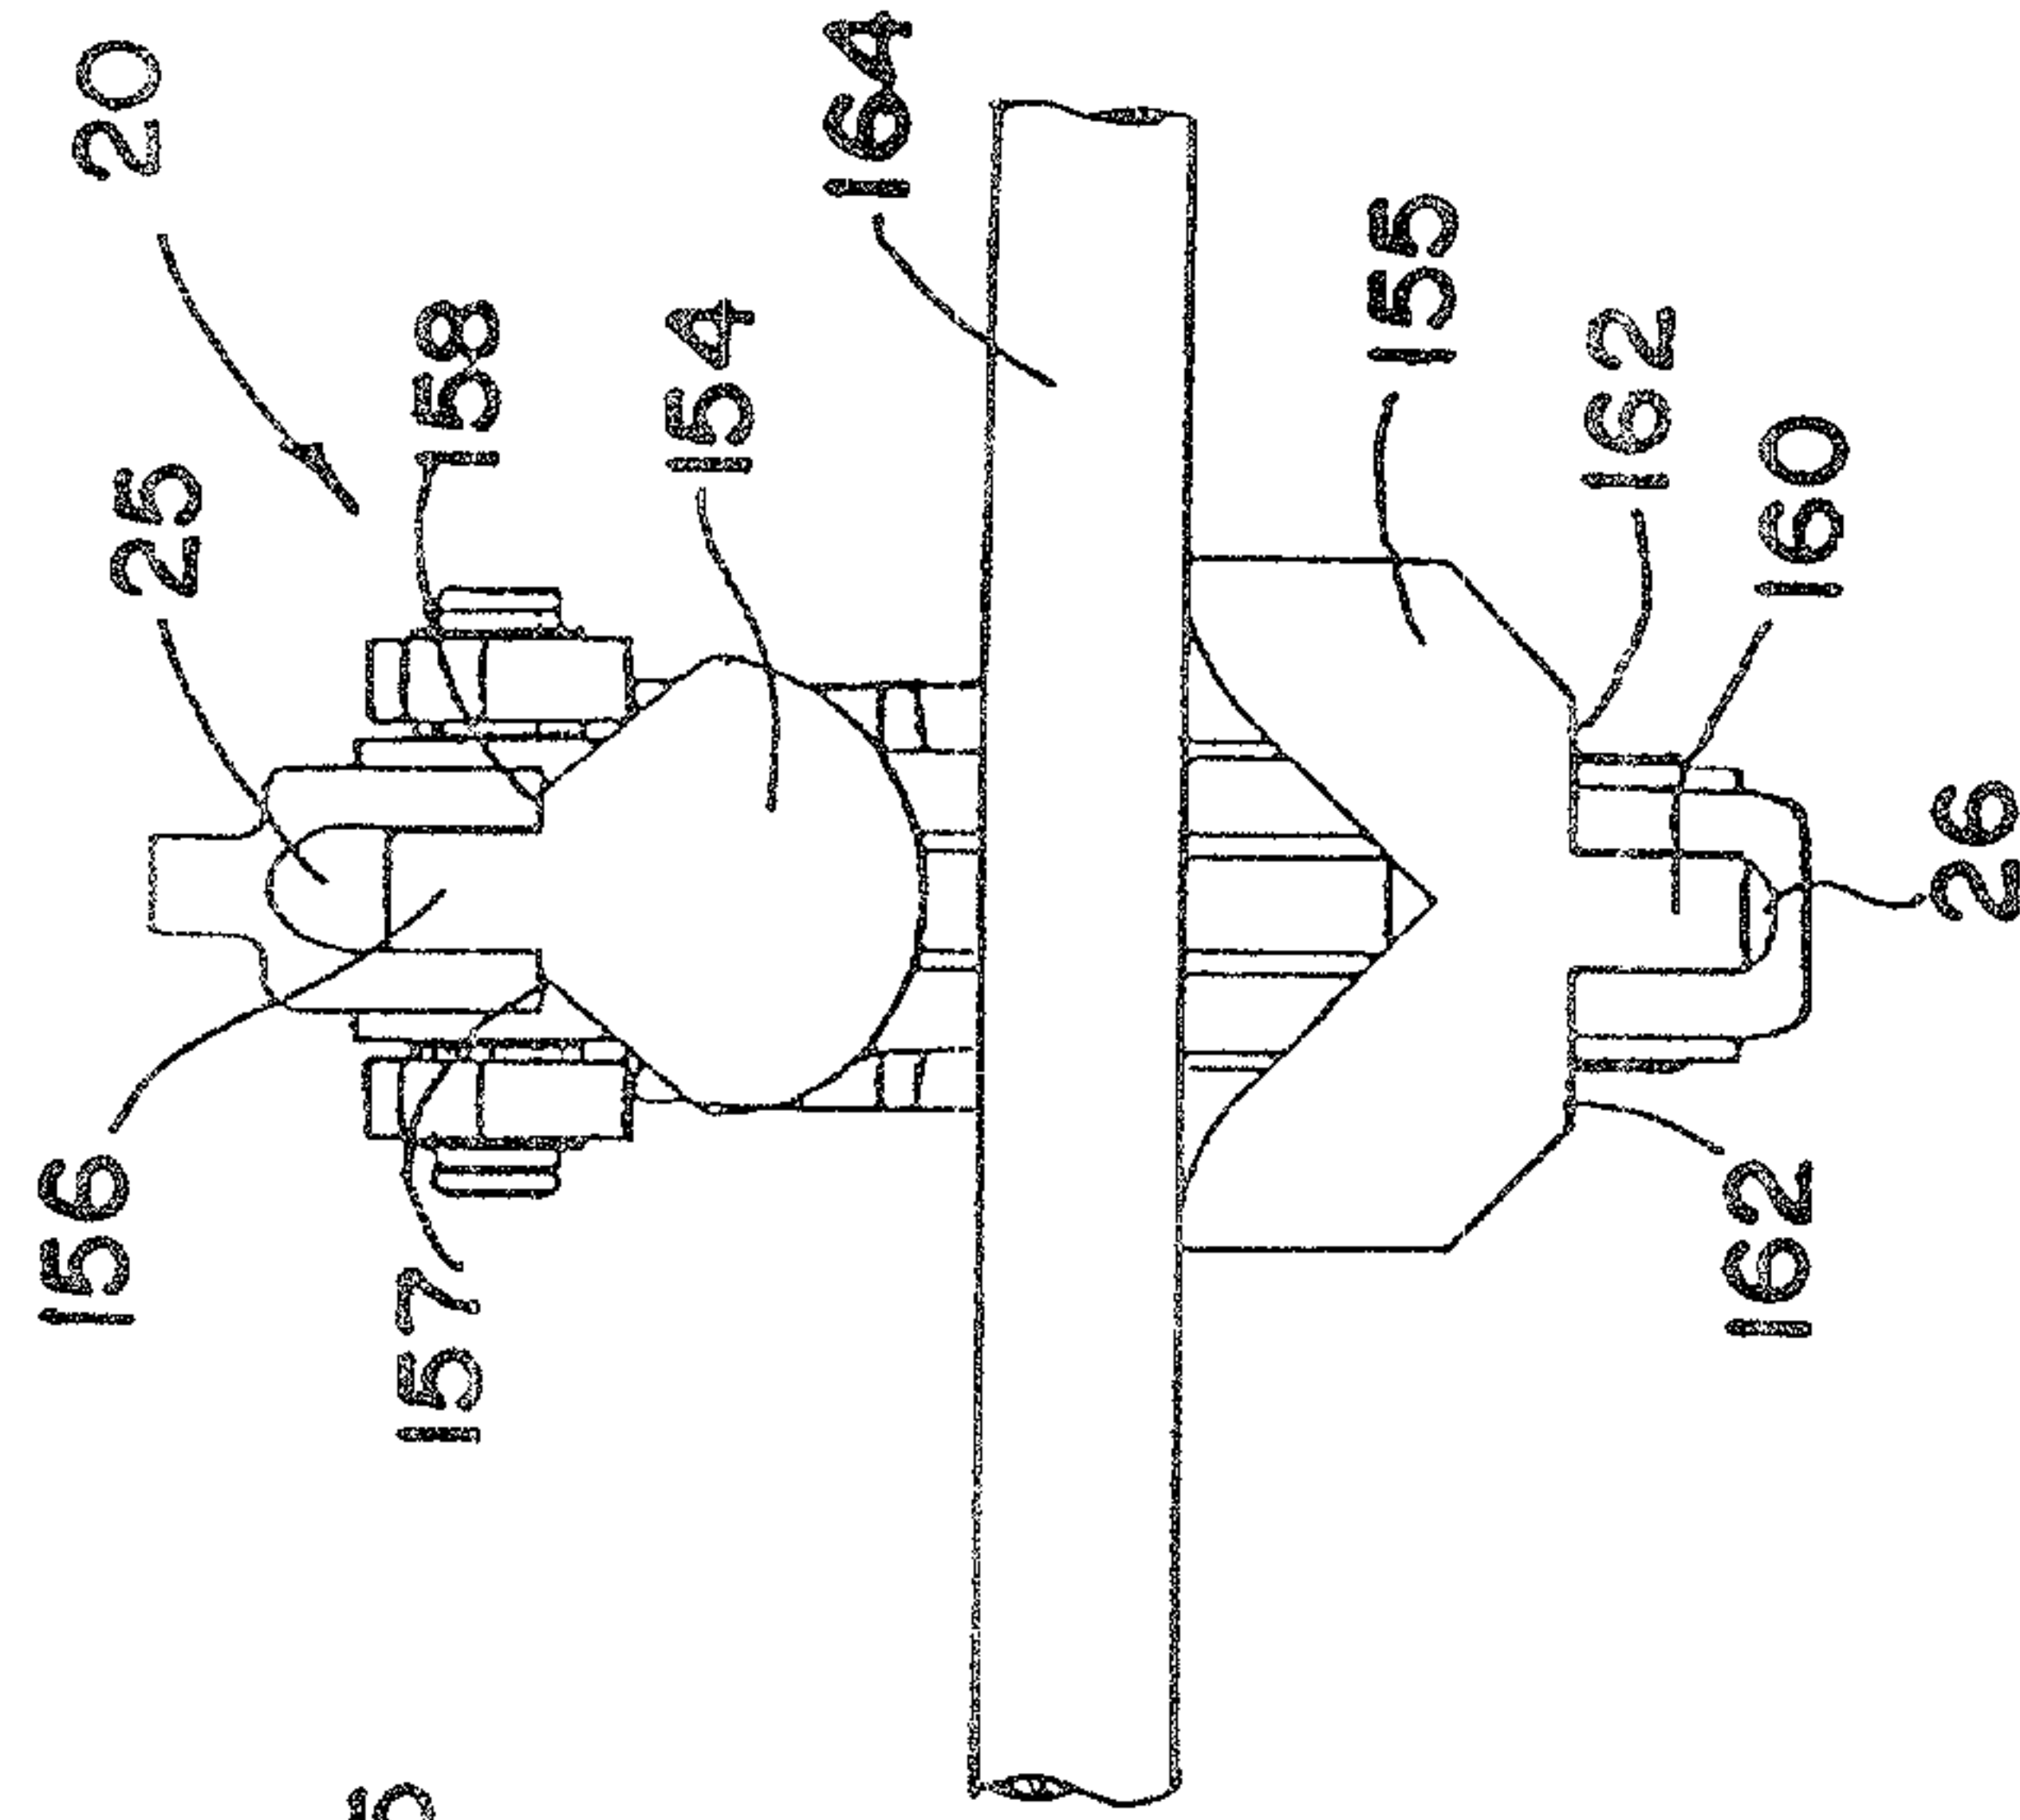


FIG. 10

