

(12) PATENT
(19) AUSTRALIAN PATENT OFFICE

(11) Application No. **AU 199668100 B2**
(10) Patent No. **733187**

(54) Title
Satellite radiodetermination

(51)⁶ International Patent Classification(s)
G01S 005/02 G01S 005/10
G01S 005/06

(21) Application No: **199668100** (22) Application Date: **1996.10.09**

(30) Priority Data

(31) Number (32) Date (33) Country
9521777 1995.10.24 GB

(43) Publication Date : **1997.05.01**
(43) Publication Journal Date : **1997.05.01**
(44) Accepted Journal Date : **2001.05.10**

(71) Applicant(s)
Inmarsat Ltd.

(72) Inventor(s)
George Vladimir Kinal; James Robert Nagle II; Claudio Soddu; Fintan Richard Ryan

(74) Agent/Attorney
DAVIES COLLISON CAVE, 1 Little Collins Street, MELBOURNE VIC 3000

(56) Related Art
US 5323322

ABSTRACT

A satellite radiodetermination system comprises global navigation service (GNSS) satellites 2 such as
5 GPS satellites, which generate GNSS ranging signals R_g ,
geostationary satellites 6 which retransmit ranging
signals R_g generated at a navigation land earth station
(NLES) 8, including augmentation data A, and medium
10 earth orbit (MEO) satellites 10 which generate ranging
signals R_m including regional augmentation data RA
transmitted from a satellite access node (SAN) 14.
The regional augmentation data RA is supplied by
regional augmentation systems 21a, 21b.

A navigation receiver 11 receives the ranging
15 signals R_g , R_m , R_n and calculates ionospheric delay
values for those ranging signals which are provided on
dual frequencies. Using these ionospheric delay
values, and optionally the regional augmentation data
RA and the augmentation data A, the navigation
20 receiver estimates ionospheric delay values for those
ranging signals which are provided on single
frequencies. The navigation receiver uses the ranging
signals, corrected for ionospheric delay and errors
indicated by the augmentation data A and regional
25 augmentation data RA, to calculate position and time
accurately.

[FIG. 1]

AUSTRALIA
PATENTS ACT 1990
COMPLETE SPECIFICATION



NAME OF APPLICANT(S):

~~International Mobile Satellite Organization~~
Inmarsat Ltd.

ADDRESS FOR SERVICE:

DAVIES COLLISON CAVE
Patent Attorneys
1 Little Collins Street, Melbourne, 3000.

INVENTION TITLE:

Satellite radiodetermination

The following statement is a full description of this invention, including the best method of performing it known to me/us:-

This invention relates to methods and apparatus for radiodetermination. Radiodetermination comprises the determination of position and/or time by the use of ranging signals between a terminal and a plurality of beacons. In satellite radiodetermination the beacons are satellites in orbit.

At the present time, two global radiodetermination systems exist. The GPS/NAVSTAR system comprises a constellation of satellites in twelve hour orbits, operated by and for the US Department of Defense. The GLONASS positioning system provides similar facilities under the control of the Russian government (and will not be discussed further herein).

In the GPS/NAVSTAR system, each satellite carries a highly accurate atomic clock and the clocks of all the satellites are synchronised. The orbits of all the satellites are well characterised, and each satellite is therefore able to derive its instantaneous position. The satellites periodically receive information on variations in their orbits from a terrestrial station.

The satellites broadcast regular messages which carry:

1. the time, as indicated by the on-board atomic

clock,

2. the position of the satellite, and
3. status messages.

5 Details of the GPS signal format may be found in the "Global Positioning System Standard Position Service Signal Specification", 2nd edition, 2 June 1995, incorporated herein by reference.

10 A GPS receiver on earth is able to acquire signals from several satellites. The constellation is designed so that, for almost every point on earth at almost every time of day, at least four satellites are simultaneously in view. By noting the different times of arrival of signals from different satellites, using the received clock data, and with knowledge of the
15 satellite positions (transmitted with the signals), the GPS receiver is able to calculate the relative range from each satellite and, from these four relative ranges thus calculated, to calculate its position in three dimensions and calibrate its clock.

20 Changes in the delay caused by variations in the ionosphere can degrade the accuracy of radiodetermination measurements, and accordingly, to enable some compensation for this, each satellite broadcasts on two frequencies (termed L1 and L2). A
25 military GPS receiver is able, by measuring on two frequencies, to estimate and correct the ionospheric delay, since the ionospheric delay varies as a

function of frequency.

Although GPS/Navstar is primarily for military use, receivers are widely available to civilians. However, the civilian receivers cannot decode the "P-code" by which information signals are encrypted on the first and second frequencies and hence cannot perform a two-frequency ionospheric compensation. Also, to limit the accuracy of the service to non military users, the so called "selective availability" feature introduces deliberate minor errors of timing and/or position into the information signals encoded by the "C/A code" and transmitted only on the L1 frequency from various satellites. Military receivers are able to decode signals without these deliberate errors.

It is possible for a ground station of accurately known position to determine which satellites are in error and by how much, and it is known to broadcast a signal which indicates which satellites are in error, and the amount of correction to apply for reception by GPS receivers, to enable them to compensate the errors from a single frequency measurement and thus derive a reliable position signal. Broadcasting such signals via a geostationary satellite is taught in, for example, US 4445110.

However, whilst the correction to be applied can be calculated exactly by the reference ground station

of known position, this correction becomes progressively less accurate further away from the reference ground station, because of differences in the ionosphere (and other layers of the atmosphere such as the troposphere). Accordingly, the usefulness
5 of such "differential GPS" techniques is limited.

Rather than providing a GPS receiver which operates to receive two frequencies in order to compensate for ionospheric variations, or one which
10 receives a differential GPS correction, it is possible to broadcast a signal which includes some data about ionospheric conditions. In recent years, the possibility of a wide area differential system has been discussed. One example is the Wide Area
15 Augmentation System (WAAS) proposed by the US Federal Aviation Authority to provide differential correction information over the US. In such a wide area system, ionosphere correction data for a grid of spaced apart points in an area (e.g. Europe or the US) is broadcast
20 via a geostationary satellite serving that area, and at the receiver, an interpolation is performed between grid points to derive a value for the ionosphere delay correction to be applied to a single frequency signal from each GPS satellite in view. Also broadcast is
25 correction data for compensating for "selective availability" errors. US-A-5323322 describes a satellite radiodetermination system in which

- 5 -

ionospheric data is broadcast.

It has been proposed in the papers "Evolution to civil GNSS taking advantage of geostationary satellites", ION 49th Annual Meeting, June 1993, "Implementation of the GNSS integrity channel and future GNSS growth considerations", INA 18th Annual Meeting, October 1993, and "Global Navigation Satellite System (GNSS) Alternatives for Future Civil Requirements", PLANS '94 Technical Program, April 1994, all by J. R. Nagle, G. V. Kinal and A. J. Van Dierendonck to supplement the GPS/NAVSTAR system by additional civil satellites in low earth, intermediate or geostationary orbits.

The reference to any prior art in this specification is not, and should not be taken as, an acknowledgment or any form of suggestion that that prior art forms part of the common general knowledge in Australia.

The present invention provides satellite radiodetermination apparatus, comprising:

a radio receiver for receiving a multiple frequency ranging signal from a first satellite and a further ranging signal from a second satellite;

deriving means for deriving first ionospheric delay data from said multiple frequency ranging signal; and

estimating means for estimating second ionospheric delay data for the further ranging signal on the basis of said first ionospheric delay data.

The present invention also provides a method of satellite radiodetermination, comprising receiving a multiple frequency ranging signal from a first satellite;

receiving a further frequency ranging signal from a second satellite, deriving first ionospheric delay data from said multiple frequency ranging signal; and

estimating second ionospheric delay data for the further ranging signal on the basis of said first ionospheric delay data.



-5A-

The present invention also provides a satellite payload adapted for a satellite designed for a non-geostationary orbit, comprising:

- a clock for generating a time signal;
- 5 a ranging signal generator for generating a ranging signal including timing data derived from said time signal;
- relaying means for retransmitting data received by the satellite from a ground station; and
- means for selectively activating and deactivating said
- 10 relaying means independently of the activation of the ranging signal generator.

The present invention also provides a satellite payload adapted for a satellite designed for a non-geostationary orbit, comprising:


- 15 a clock for generating a time signal;
- a ranging signal generator for generating a ranging signal including timing data derived from said time signal;
- relaying means for retransmitting received data received by the satellite from a ground station;
- 20 means for detecting an absence of said received data; and
- means for generating dummy data for transmission in response to detection of said absence.

The present invention also provides a Satellite radiodetermination apparatus, comprising:

- 25 means for receiving a plurality of ranging signals from a corresponding plurality of satellites; and
- means for receiving ionospheric delay data, the apparatus being arranged to perform radiodetermination on the basis of
- 30 said plurality of ranging signals and selectively on the basis of said ionospheric delay data in response to validity data received by the apparatus and indicating the validity of the ionospheric delay data.

One embodiment of the invention relates to a satellite radiodetermination receiver which receives a multiple frequency ranging signal and a single frequency ranging





- 6 -

mode, the satellite payload generates autonomous ranging signals which do not include augmentation data received from a ground station. In the second mode, the satellite additionally relays augmentation data received from the
5 ground station.

Another embodiment of the invention relates to a satellite payload which is able to generate an autonomous ranging signal and to broadcast data received from a ground station. If no data is received from the ground station,
10 the satellite payload generates dummy data for broadcast, so as to keep the broadcast channel open.

Another embodiment of the invention relates to apparatus for connection to a satellite access node, which is arranged to receive augmentation data, to determine the
15 position of a satellite accessible by the satellite access node, to determine whether the position of the satellite falls within a predetermined range dependent on the source of the augmentation data and to output augmentation data to the satellite access node if the position of the satellite
20 falls within the predetermined range.

Another embodiment of the invention relates to a satellite navigation receiver which is able to receive ionospheric delay data but is only able to use the ionospheric delay
25



- 7 -

data when performing radiodetermination if access to the ionospheric delay data is enabled, for example by means of a code for decrypting the ionospheric delay data.

A further embodiment of the invention relates to an apparatus for providing augmentation data to a satellite access node which is arranged to encrypt ionospheric delay data without encrypting differential correction data which does not relate to ionospheric delay and to output the encrypted ionospheric delay data and the unencrypted differential correction data to the satellite access node.

Another embodiment of the invention relates to a satellite navigation receiver which is arranged to receive ionospheric delay data and residual error data and to correct the ionospheric delay data using the residual error data.

Another embodiment of the invention relates to a differential correction network which receives ionospheric delay data from another differential correction network, receives ranging signals from navigation satellites and thereby calculates errors in the ionospheric delay data.

Embodiments of the invention will now be illustrated, by way of example only, with reference to the accompanying drawings in which:



Figure 1 is a schematic diagram of a satellite radiodetermination system;

Figure 2 is a schematic diagram of a portion of the satellite radiodetermination system serving North and South America;

Figure 3 is a block diagram of the navigation payload of a MEO satellite;

Figure 4 is a block diagram of a navigation receiver;

Figure 5 is a diagram of a grid used to represent ionospheric information; and

Figure 6 is a diagram to illustrate calculation of ionospheric pierce points.

Navigation System

Figure 1 shows schematically the elements of a satellite radiodetermination system and the relationship between them. Autonomous ranging signals R_n are provided by one or more GNSS (Global Navigation Satellite Service) satellites 2, such as GPS Navstar satellites and/or GLONASS satellites. A plurality of geostationary satellites 6, such as the proposed Inmarsat-3 communications satellites or dedicated geostationary navigation satellites, each carry a navigation transponder for relaying differential correction and other augmentation data A from a navigation land earth station (NLES) 8 to navigation receivers 11, the augmentation data A providing

integrity, error and ionosphere information relating to the GNSS satellites 2 and their ranging signals R_n .

One or more medium earth orbit (MEO) satellites 10, such as the proposed satellites for the ICO (TM) global satellite communications system, relay regional augmentation data RA transmitted by a terrestrial satellite access node (SAN) 14 to the navigation receivers 11 incorporated in autonomous ranging signals R_m synchronised with the ranging signals R_n from the GNSS satellites 2. The proposed satellites for the ICO (TM) system are a constellation of ten satellites in 6 hour orbits in two orbital planes, each carrying a communications and navigation payload.

A network of monitoring stations 16a, 16b and 16c, of accurately known location, receive the ranging signals R_n from the GNSS satellites 2, and the ranging signals R_m from the MEO satellites 10 and calculate errors in the position and time information contained in these ranging signals from the difference between the positions calculated from the ranging signals R and the actual positions of the monitoring stations 16. Differential correction data is transmitted from the monitoring stations 16a, 16b and 16c to a regional control station 18 which derives the augmentation data A, including errors in the reported positions and time signals of the MEO satellites 10, and of the GNSS satellites 2. The monitoring stations 16 may

alternatively be simple receivers with the calculation of differential correction being performed at the regional control station 18.

The position and timing errors in the ranging
5 signals R do not vary between the monitoring stations 16a, 16b and 16c. However, the differential correction data received from the monitoring stations 16a, 16b and 16c will differ because of the difference
10 in ionospheric delay in the signals received by each of the monitoring stations 16, dependent on the quantity of free electrons in the parts of the ionosphere through which the signals travel, together with other delays such as tropospheric delays caused by tropospheric refraction.

15 Therefore, the regional control station 18 is able to derive separately data for errors in the ranging signals R_m , R_n and for values of ionospheric delay in the region of the ionosphere through which the ranging signals travel to reach each of the
20 monitoring stations 16a, 16b and 16c. This data is transmitted to the NLES 8 for transmission as the augmentation data A via the geostationary satellites 6 to the navigation receivers 11.

25 Additionally, the augmentation data is transmitted to a service network 20 accessible by providers of regional augmentation systems 21a, 21b. Such regional augmentation systems 21a, 21b may

include local monitoring stations for calculating differential correction data for specific regions. Regional augmentation data RA, which may for example include more accurate ionospheric data and corrections to the augmentation data A relevant to the specific regions, is input by the service providers at the service network 20. The regional augmentation data RA may include some or all of the augmentation data A. The regional augmentation data RA is transmitted to the SAN 14 for transmission via the MEO satellites 10 and selective reception by the navigation receivers 11.

The satellite radiodetermination system described above provides, in addition to existing satellite radiodetermination services such as GPS and GLONASS, the additional ranging signals R_m from the MEO satellites 10. In this embodiment, the ranging signals R_m are dual-frequency ranging signals similar to the signals available to military users in the GPS system, but are unencrypted and therefore available to any user. The above radiodetermination system also broadcasts augmentation data A over a wide area via the geostationary satellites 6, which is supplemented by additional regional augmentation data RA broadcast by the MEO satellites 10.

The augmentation data A is encoded in ranging signals R_g generated by the NLES 8 and broadcast via

the geostationary satellite 6 to the navigation receivers 11. The location of the geostationary satellite 6 is determined at the NLES 8, which also includes an accurate time reference, such as an atomic clock or a dual frequency satellite radiodetermination apparatus, synchronised to those on board the MEO satellites 10 and the GNSS satellites 2. The delay involved in transmitting the ranging signal R_g from the NLES 8 to the geostationary satellite 6 is determined and the ranging signal R_g includes position and time data calculated so as, when retransmitted by the geostationary satellite 6, accurately to represent the time of retransmission and the position of the geostationary satellite 6.

The signal retransmitted to the NLES 8 by the geostationary satellite 6 provides a timing loop which allows the delay from the NLES 8 to the geostationary satellite 6 to be determined and also allows ionospheric effects to be measured. In this way, the ranging signal R_g is sufficiently precise to be processed as if it were autonomously generated by the geostationary satellite 6.

The satellite radiodetermination system described above may be implemented in stages to provide a progressively enhanced service relative to that provided by the GNSS satellites 2 above, as follows.

Stage 1 - Existing or previously planned geostationary

communication satellites such as the Inmarsat-3 satellites are used as the geostationary satellites 6 to relay ranging signals and augmentation data R_g, A .

5 Stage 2 - Additional dedicated navigation satellites are put into geostationary orbit as additional geostationary satellites 6. These dedicated navigation satellites are able to generate autonomous ranging signals R_g .

10 Stage 3 - The MEO satellites 10 are launched, providing additional ranging signals R_m and relaying regional augmentation data RA.

15 Stage 1 provides wide area augmentation, for example in accordance with the WAAS specification. States 1 to 3 provide more ranging signals, to reduce the reliance on the GNSS satellites 2, which have selective availability.

System Operation Example

20 Figure 2 shows an example of the satellite radiodetermination system of Figure 1 providing a navigation service over North and South America. One of the geostationary satellites 6 broadcasts augmentation data A derived by a first regional control station 18a over both North and South America. In a first service area 24a which covers the US, a
25 first service network 20a provides regional augmentation data RAa which is valid only over the first service area 24a, such as more accurate

ionospheric data concerning the ionosphere above the US. The regional augmentation data RAa is transmitted to a first satellite access node 14a and broadcast via a first MEO satellite 10a over the first service area 24a. Ranging signals R_r are available in the first service area 24a from GNSS satellites 2a and 2b. The number and identity of the GNSS satellites 2 which are visible above a predetermined minimum elevation angle in the first service area 24a will change with time as these satellites 2 progress in their orbits.

A first MEO satellite 10a will also move relative to the first service area 24a until its elevation angle falls below a threshold which is suitable for broadcast reception. The first SAN 14a then selects another MEO satellite 10 having an elevation angle above the threshold for broadcast reception, preferably one that is approaching the first service area 24a. The SAN 14a ceases transmission to the first MEO satellite 10a and begins transmission to the selected MEO satellite 10 instead. To avoid interruption in broadcast of the regional augmentation data RA, the SAN 14a may transmit to both the first MEO satellite 10a and the selected MEO satellite 10 during handover.

A second service area 24b in South America contains a second regional control station 18b which receives information from a monitoring network which

monitors ranging signals received in the second service area 24b. Information from the second regional control station 18b is sent to the first regional control station 18a so that wide area differential correction information is gathered from a monitoring network extending through both North and South America. In this way, the timing and position errors of ranging signals may be determined more accurately. A second service network 20b receives information from the second regional control station 18b and additionally derives more accurate ionospheric information within the area 24b. This information is relayed to a second SAN 14b which transmits the information via a second MEO satellite 10b for broadcast over the second service area 24b.

Hence, augmentation information which is valid over a wide area is broadcast by the geostationary satellite 6, which has a direct line of sight to a wide area. More detailed information of narrower geographic validity is broadcast by the MEO satellites 10 which are able to cover a smaller area of the earth's surface. In this way, the information broadcast by geostationary and MEO satellites is matched with the coverage areas of these satellites.

Navigation Satellite

Figure 3 shows the navigation payload of one of the MEO satellites 10.

The payload includes a frequency standard 30, such as an atomic clock. A highly precise frequency signal f is supplied from the frequency standard 30 to oscillators 32, which provide a time signal t which is
5 referenced to a standard time such as UTC.

The time signal t is supplied to a navigation signal generator 34. The payload also includes a telemetry tracking and control (TT&C) interface 42 which receives encrypted TT&C data from a TT&C ground
10 station (not shown). The TT&C interface 42 supplies tracking information to a processor 44 which generates data containing information on the ephemerides of the MEO satellite 10. The ephemerides are written into a memory 46, which applies error correction to avoid
15 data corruption from external radiation and has a double buffer so that previous ephemerides are not immediately overwritten by new ephemerides until the new ephemerides are verified. The ephemerides are read from the memory 46 by the navigation signal
20 generator 34, which encodes the time signal t and ephemerides using a Gold code of the same family as is used by GPS/Navstar satellites as described in the GPS specification. The Gold code is a pseudo-random noise (PRN) code having low auto-correlation and low cross-
25 correlation with other Gold codes.

Intermediate frequency signals IF containing the encoded ephemerides and time data are supplied to an

up-converter 36 which converts the intermediate frequency signal IF to different frequencies F1 and F2 which are respectively transmitted through broadcast antennas 40 and 38.

5 The frequencies F1 and F2 may be substantially the same as the GPS L1 and L2 frequencies, to maintain compatibility with existing GPS receivers, or they may be offset from the L1 and L2 frequencies so that signals from the MEO satellites 10 may only be
10 received by modified navigation receivers 11. In one embodiment, F1 is 1576 MHz and F2 is 1228 MHz.

15 The operation of the navigation signal generator 34 is controlled by the processor 44, and status information is supplied by the navigation signal generator 34 to the processor 44.

20 The payload also includes a feeder link channel interface 48 which receives regional augmentation information RA from the SAN 14. The processor 44 selectively supplies the regional augmentation information RA to the memory 46 for inclusion in the signal output by the navigation signal generator 34.

25 The processor 44 is operable in both an autonomous navigation mode and a regional augmentation mode. In the autonomous navigation mode, data supplied by the feeder link channel interface 48 is not sent to the memory 46 and therefore the MEO satellite 10 broadcasts only ranging and status

information, at a data rate of 50 bits per second. In the regional augmentation mode, the regional augmentation data RA received from the feeder link channel interface 48 is supplied to the memory 46 for inclusion in the navigation signal. In this mode, the MEO satellite 10 additionally broadcasts information on the integrity and status of the GNSS satellites 2, differential correction information supplied by the service network 20 and alert messages to indicate when satellite radiodetermination may not be possible to a predetermined level of accuracy, at a data rate of 250 bits per second. The processor 44 is switched between these two modes by a command received by the TT&C interface 42. The processor 44 may be switched into autonomous navigation mode when no regional augmentation data is available, for example because no SAN 14 is in view or the SAN 14 is faulty.

Alternatively, the processor 44 may generate dummy data for transmission in the ranging signal R_m , the dummy data indicating to the navigation receivers 11 that no regional augmentation data is available.

Satellite Radiodetermination Terminal

Figure 4 shows a simplified block diagram of a navigation receiver 11 for receiving ranging and augmentation signals in the satellite radiodetermination system described above. The user terminal 11 includes an antenna 50 for receiving the

ranging signals R_g , R_m and R_n , containing the augmentation information A and the regional augmentation information RA. A PRN decoder 56 decodes each ranging signal R and outputs decoded ranging signals R' and timing data t_a relating to the time of arrival of each ranging signal. A data decoder 58 extracts from the decoded ranging signals data D, including the augmentation data A, regional augmentation data RA, the transmission time t of each ranging signal and the ephemerides of the satellites. A radiodetermination section 54 receives the data D and timing data t_a , calculates therefrom the values of ionospheric delays incurred by the dual frequency ranging signals R_m and the approximate position of the navigation receiver 11 and outputs this data to an ionospheric modelling section 60, together with ionospheric data included in the regional augmentation data RA and the augmentation data A.

From this data, the ionospheric modelling section 60 calculates ionospheric pierce points at which each of the ranging signals R passed through the ionosphere and estimates the ionospheric delay thereby incurred by single-frequency ranging signals R, such as the L1 GPS signals, for which the ionospheric delay cannot be measured directly. The ionospheric modelling section 60 outputs an estimated ionospheric delay for each of the single frequency ranging signals R together with

error bounds for the estimated delay.

The radiodetermination section 54 receives the estimated ionospheric delays and subtracts them from the time of arrival t_a of the single-frequency signals.

5 The directly measured delays incurred by the dual frequency ranging signals are subtracted from the times of arrival t_a of these signals. The augmentation data A and regional augmentation data RA include information on errors in the ranging signals, which is

10 used to correct the position and time information in each of the ranging signals. The augmentation data A and regional augmentation data RA also include integrity information which indicates whether any of the satellites has failed or is operating incorrectly;

15 the ranging signals R from such satellites are not used for radiodetermination.

The radiodetermination section 54 then calculates an accurate position P and time T from the corrected ranging signals R and an estimate of the error in the position P and time T from the error bounds in

20 ionospheric delay indicated by the ionospheric modelling section 60 and from error bounds for the ranging signals indicated by the augmentation data RA, A. If the likely error in the position P and time

25 T exceeds a predetermined value, the radiodetermination section 54 may indicate a visual or audible warning, so that users know that the output

should not be relied upon for certain applications.

An explanation of the operation of the ionospheric modelling section 60 will now be given with reference to Figures 5 and 6.

5 The augmentation data A broadcast by the geostationary satellites 6 and the regional augmentation data RA broadcast by MEO satellites 10 includes ionospheric data comprising a set of values for calculating ionospheric delay for points on a grid
10 G mapped onto the earth's surface. The grid is centred on the nadir N of a geostationary satellite position and the ionospheric delay value at each grid point g_i represents the vertical ionospheric delay at that grid point.

15 Information is seldom available for all the grid points g_i and the ionospheric data therefore comprises a list of addresses i of grid points g_i for which ionospheric data is available, together with the associated vertical ionospheric delay and delay error
20 for each of these points. The ionospheric data also includes the position of the nadir N on which the grid of points is centred.

25 The format for ionospheric data described above is designed for broadcast from a geostationary satellite, but is also used for ionospheric information broadcast by the MEO satellites 10. The SAN 14 calculates a hypothetical geostationary

position so that the coverage area of the MEO satellite 10, within which the satellite is visible above 5° elevation, falls within the grid of points g_i based on that position. Ionospheric data is broadcast for some or all of the grid points which fall within the coverage area of the MEO satellite 10. Thus, the ionospheric data broadcast by the geostationary satellite 6 and the MEO satellites 10 have compatible formats.

In order to estimate accurately the ionospheric delay for each ranging signal R, the ionospheric modelling section 60 of the navigation receiver 11 must calculate a pierce point PP at which the ranging signal R passes through the ionosphere on its way to the user and apply the appropriate ionospheric delay value for that pierce point.

As shown in Figure 6, a ranging signal R is transmitted by a satellite, such as one of the MEO satellites 10, at an elevation angle ϵ with respect to the navigation receiver 11. The ranging signal R passes the level of maximum electron density I_0 of the ionosphere at the pierce point PP. The height H of the level I_0 is assumed to be 400km above the earth's surface. The navigation receiver 11 is able to derive its approximate position from the uncorrected ranging signal R, which also contains information on the position of the satellite 10. From this information,

and from the radius r of the earth, the latitude and longitude of the pierce point PP is calculated in a known manner.

The calculated pierce point PP does not usually
 5 coincide with one of the grid points g_i for which ionospheric information is available. The value for ionospheric delay must therefore be interpolated between grid points g_i , g_{i+1} for which ionospheric information is available. The ionospheric modelling
 10 section 60 generates a modelling function which may be varied by one or more parameters so as to fit the ionospheric information at the surrounding grid points g_i and which is used to interpolate the ionospheric delay value at the pierce point PP.

15 A suitable model for interpolating ionospheric delay values has been specified for the WAAS. In this model, the ionospheric delay values for the four grid points at the corners of a cell containing the pierce point PP are used to interpolate an ionospheric delay
 20 value at the pierce point by means of a weighting function which provides a continuous surface as a function of longitude and latitude. Alternatively, a linear interpolation may be taken between pairs of grid points in both the longitudinal and latitudinal
 25 directions.

In addition, the ionospheric delay modelling section 60 may fit the modelling function to the

directly measured ionospheric delay values obtained from the dual frequency ranging signals R_m , by calculating the pierce points PP for these signals and adjusting the parameters of the modelling function to fit the measured ionospheric delay values for these pierce points PP.

The modelling function need not fit the ionospheric information and measured delay values exactly; instead, an approximate fit such as a least squares fit may be calculated.

The vertical ionospheric delay value at the pierce point is thereby calculated. However, the ranging signal R travels a distance l through the ionosphere which is greater than the vertical height h of the ionosphere, as a result of the slant angle α which the path of the ranging signal R makes with the vertical. The vertical ionospheric delay value is therefore multiplied by an obliquity factor, to take into account the greater length of ionosphere traversed.

User Operation Example

A specific example will now be described of the operation of an alternative embodiment of a satellite radiodetermination system which provides a navigation service for Africa in which a geostationary satellite provides a ranging signal R_g and augmentation information A comprising correction messages for the

GNSS satellite ranging signals R_n , but ionospheric correction information is not provided through the geostationary satellites 6 in this embodiment, since insufficient information is available for Africa as a whole.

However, regional monitoring stations are provided by local service providers in Kenya. The monitoring stations monitor the ranging signals from the MEO satellites 10 and the GNSS satellites 2 and additionally receive the augmentation information A broadcast by the geostationary satellites 6. From this information a vertical ionospheric delay value and ionospheric delay error bounds are estimated which are applicable for all users in Kenyan territory and airspace. This information is relayed to a SAN 14 for broadcast through an MEO satellite 10 which covers Kenya at that time.

The navigation satellites visible by a navigation receiver 11 approaching Nairobi are, for example, those shown in Table 1 below.

TABLE 1

<u>Satellite</u>	<u>Azimuth</u>	<u>Elevation</u>
MEO 2	184	27
MEO 9	310	12
MEO 10	40	11.5
AOR-E GEO	269	30

IOR GEO	91	58
GPS 2	250	73
GPS 4	355	24
GPS 13	150	27

5 The satellite AOR-E is an Inmarsat (TM) satellite serving the eastern Atlantic Ocean region, while the satellite IOR serves the Indian Ocean region.

 The navigation receiver is able to determine the approximate positions of all the above satellites from
10 ranging signals generated or relayed by the satellites, without ionospheric correction. Estimates of the ionospheric delay in the ranging signals from each of the satellites are then obtained as follows.

 The ionospheric delay is calculated directly for
15 the dual frequency ranging signals transmitted by the satellites MEO₂, MEO₉, and MEO₁₀. The AOR-E geostationary satellite is identified as being in the same quadrant as the MEO₉ satellite. The ionospheric delay value in the MEO₉ ranging signal is used to
20 estimate the ionospheric delay in the AOR-E GEO ranging signal, by compensating for the difference in elevation angles between the MEO₉ satellite and the AOR-E geostationary satellite. The ionospheric delays for the GPS₄ and GPS₁₃ satellites are estimated in the
25 same way, using the ionospheric delay value measured

for the MEO.

The GPS₂ satellite is approximately overhead and therefore the ionospheric delay information provided by the Kenyan monitoring stations is used, with a
 5 small obliquity factor correction for the difference between the actual elevation angle of 72° and 90°. The ionospheric delay error bound data are applied to each of the estimated ionospheric delays which are not measured directly from a dual frequency ranging
 10 signal.

In this example, the navigation terminal 11 receives ranging signals from eight different satellites and is able to calculate or estimate the ionospheric delay for each ranging signal without
 15 ionospheric data being provided in the augmentation data A. In addition, integrity information received from the geostationary satellites is used to determine whether any of the ranging signals should not be used for satellite radiodetermination. Thus, the result of
 20 the radiodetermination is accurate and reliable.

Regional Augmentation Information

In the above example, ionospheric delay information relevant to Kenya is relayed through one or more of the MEO satellites 10. Each MEO satellite
 25 is able to broadcast over an area much wider than Kenya, for example, and the SAN 14 receives both the data provided by the Kenyan service provider and data

provided by other networks. In the transmission from the SAN 14, the data from each network is assigned a different time slot in a repeating time frame, so that the information from the different monitoring networks is time division multiplexed. Table 2 below shows an example of the allocation of time slots to each of the satellites MEO₂, MEO₉, and MEO₁₀ in the above example.

TABLE 2

Satellite	Slot 1	Slot 2	Slot 3	Slot 4	Slot 5	Slot 6
MEO 2	Kenya	Africa	Other	Other	Africa	Other
MEO 9	Kenya	Other	Europe	Other	Other	Europe
MEO 10	Kenya	Other	Other	Other	Other	Other

The satellite MEO₂ transmits, in slots 2 and 5, regional augmentation data which is valid over the whole of Africa and this information may additionally be used by the navigation receiver 11 in Kenya.

Each slot may for example be a 1 second slot in a 6 second time frame and carry 250 data bits.

Slots may be allocated by the SAN 14 to service providers during a period in which the nadir of the MEO satellite 10 carrying the regional augmentation information passes over a predetermined region, allocated to the service provider, defined for example by longitude and latitude boundaries. For example,

each region may comprise a 5° longitudinal strip of the Northern or Southern Hemisphere.

Each slot may be shared by several service providers, which individually do not supply enough data to occupy a whole slot, so that the full capacity of each slot is used. The data from each service provider within the slot is identified by a code allocated to that service provider. More than one slot may be allocated to service providers which require more capacity than can be provided by one slot. Charging data for calculating a charge to the service provider is generated according to the duration for which capacity on the MEO satellite 10 is allocated to the service provider and according to the proportion of the capacity used during that time.

Alternatively, slots may be allocated to service providers during a period in which the MEO satellite 10 is visible above a minimum elevation angle, such as 5°, from the service area for which the service provider provides regional augmentation data RA.

The regional augmentation data in each time slot is preferably encrypted to ensure that it can only be decoded by licensed navigation receivers 11. All licensed receivers may use the same algorithms for performing radiodetermination using the ionospheric delay data, so that radiodetermination is performed to a common standard.

Additionally, users may be required to purchase a smart card for insertion in the navigation receiver 11 to allow access to some or all of the regional augmentation information RA broadcast by the MEO 5 satellites. In this way, revenue may be collected by the service providers. Alternatively, the user terminals may have a keyboard for entering a code which enables access to one or more of the regional augmentation information slots.

10 In this way, different types of information may be made available to different users, depending on the area for which they need ionospheric information or the level of accuracy which they require, and the users may only be charged for the information which 15 they need.

In the above example, the different types of augmentation information are time division multiplexed. However, the different information channels may be multiplexed together in other ways 20 well known in the art, such as by code division multiplexing or frequency division multiplexing.

The information in each regional augmentation information channel may include data, such as country codes, for identifying the area for which the 25 ionospheric data is valid, data indicating the reliability of ionospheric data and data indicating for what period the ionospheric data is valid.

Since the ionospheric delay modelling section 60 of the navigation receiver 11 is able to combine ionospheric delay information with direct ionospheric delay measurements, a more accurate model of the ionosphere is used to compensate for ionospheric delay. Furthermore, regional augmentation data RA is received which is relevant to the local area in which the navigation terminal 11 is located. Integrity data and error bound data is received both in the regional augmentation data RA and the augmentation data A. In this way, highly accurate position readings P and time readings T may be calculated, together with estimates of the level of accuracy of these readings and warnings if the level of accuracy falls below a predetermined threshold.

Such accurate and reliable radiodetermination greatly extends the potential applications of satellite radiodetermination.

For example, the above described satellite radio-determination system may be used where safety is critical, such as landing aircraft in low visibility conditions. The system also has maritime applications in that it provides sufficient accuracy for harbour approaches in restricted visibility, and may also find applications in train control where sufficient accuracy is needed to determine on which track a train is running. The system may provide accurate time

readings for use by laboratories or communication systems which require precise synchronisation.

Since all of the ranging and augmentation information is provided by satellite, the need to
5 install terrestrial differential correction systems may be overcome.

Although the above embodiments use MEO satellites such as ICO (TM) satellites, other satellite constellations could be used such as those proposed
10 for the ODYSSEY (TM), IRIDIUM (TM), GLOBALSTAR (TM) and TELEDESIC (TM) satellite communications systems. Satellites in low earth orbits (LEO) produce greater Doppler shift in their signals, but this may be overcome by appropriate compensation in the receivers.
15 The satellite configurations described in the embodiments are particularly advantageous, but alternative configurations may be used. For example, autonomous navigation signal generation equipment may be replaced by transponders for retransmitting
20 navigation signals in the non-geostationary satellites. Regional augmentation data may be broadcast by geostationary or non-geostationary satellites having multiple spot beams, with the regional validity of the data broadcast in each spot
25 beam being matched to the coverage area of each that spot beam.

Navigation receivers may determine their altitude

from map data giving altitude as a function of longitude and latitude, or from barometric pressure, so that only three ranging signals are required to determine longitude, latitude and time.

5

Throughout this specification and the claims which follow, unless the context requires otherwise, the word "comprise", and variations such as "comprises" and "comprising", will be understood to imply the inclusion of a stated integer or step or group of integers or steps but not the exclusion of any other integer or step or group of integers or steps.

A 10x10 grid of dots forming the letters 'S' and 'O'. The 'S' is formed by dots at (row, col) coordinates: (1,2), (1,3), (1,4), (1,5), (1,6), (1,7), (1,8), (1,9), (2,1), (2,2), (2,3), (2,4), (2,5), (2,6), (2,7), (2,8), (2,9), (3,1), (3,2), (3,3), (3,4), (3,5), (3,6), (3,7), (3,8), (3,9), (4,1), (4,2), (4,3), (4,4), (4,5), (4,6), (4,7), (4,8), (4,9), (5,1), (5,2), (5,3), (5,4), (5,5), (5,6), (5,7), (5,8), (5,9), (6,1), (6,2), (6,3), (6,4), (6,5), (6,6), (6,7), (6,8), (6,9), (7,1), (7,2), (7,3), (7,4), (7,5), (7,6), (7,7), (7,8), (7,9), (8,1), (8,2), (8,3), (8,4), (8,5), (8,6), (8,7), (8,8), (8,9), (9,1), (9,2), (9,3), (9,4), (9,5), (9,6), (9,7), (9,8), (9,9), (10,1), (10,2), (10,3), (10,4), (10,5), (10,6), (10,7), (10,8), (10,9). The 'O' is formed by dots at (row, col) coordinates: (1,1), (1,2), (1,3), (1,4), (1,5), (1,6), (1,7), (1,8), (1,9), (1,10), (2,1), (2,2), (2,3), (2,4), (2,5), (2,6), (2,7), (2,8), (2,9), (2,10), (3,1), (3,2), (3,3), (3,4), (3,5), (3,6), (3,7), (3,8), (3,9), (3,10), (4,1), (4,2), (4,3), (4,4), (4,5), (4,6), (4,7), (4,8), (4,9), (4,10), (5,1), (5,2), (5,3), (5,4), (5,5), (5,6), (5,7), (5,8), (5,9), (5,10), (6,1), (6,2), (6,3), (6,4), (6,5), (6,6), (6,7), (6,8), (6,9), (6,10), (7,1), (7,2), (7,3), (7,4), (7,5), (7,6), (7,7), (7,8), (7,9), (7,10), (8,1), (8,2), (8,3), (8,4), (8,5), (8,6), (8,7), (8,8), (8,9), (8,10), (9,1), (9,2), (9,3), (9,4), (9,5), (9,6), (9,7), (9,8), (9,9), (9,10), (10,1), (10,2), (10,3), (10,4), (10,5), (10,6), (10,7), (10,8), (10,9), (10,10).



THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:

1. Satellite radiodetermination apparatus,
comprising:

5 a radio receiver for receiving a multiple
frequency ranging signal from a first satellite and a
further ranging signal from a second satellite;

deriving means for deriving first ionospheric
delay data from said multiple frequency ranging
signal; and

10 estimating means for estimating second
ionospheric delay data for the further ranging signal
on the basis of said first ionospheric delay data.

2. Apparatus as claimed in claim 1, further
comprising data receiving means for receiving
15 ionospheric data, said estimating means being operable
to estimate the second ionospheric delay data
additionally on the basis of said ionospheric data.

3. Apparatus as claimed in claim 2, wherein
said data receiving means is arranged to receive said
20 ionospheric data from a satellite.

4. Apparatus as claimed in claim 2 or 3,
wherein said ionospheric data represents a plurality
of ionospheric delay values corresponding to a
plurality of spatially separated points.

25 5. Apparatus as claimed in any preceding claim,
wherein said estimating means includes modelling means
for generating a model of spatial variation of

ionospheric delay on the basis of said first ionospheric delay data, said estimating means being operable to estimate said second ionospheric delay data on the basis of said model.

5 6. Apparatus as claimed in claim 5 when dependent on claim 2, wherein said modelling means is operable to generate said model on the basis of said ionospheric data.

10 7. Apparatus as claimed in claim 5 or claim 6, wherein said model comprises a function which is variable in accordance with one or more parameters, said modelling means being arranged to calculate said one or more parameters such that said function is fitted to said first ionospheric delay data.

15 8. Apparatus as claimed in claim 7 when dependent on claim 6, wherein said modelling means is arranged to calculate said one or more parameters such that said function is additionally fitted to said ionospheric data.

20 9. A method of satellite radiodetermination, comprising receiving a multiple frequency ranging signal from a first satellite;

receiving a further ranging signal from a second satellite, deriving first ionospheric delay data from
25 said multiple frequency ranging signal; and

estimating second ionospheric delay data for the further ranging signal on the basis of said first

- 36 -

ionospheric delay data.

10. A satellite payload adapted for a satellite designed for a non-geostationary orbit, comprising:

- 5 a clock for generating a time signal;
a ranging signal generator for generating a ranging signal including timing data derived from said time signal;
relaying means for retransmitting data received by the satellite from a ground station; and
10 means for selectively activating and deactivating said relaying means independently of the activation of the ranging signal generator.

11. A satellite payload adapted for a satellite designed for a non-geostationary orbit, comprising:

- 15 a clock for generating a time signal;
a ranging signal generator for generating a ranging signal including timing data derived from said time signal;
relaying means for retransmitting received data
20 received by the satellite from a ground station;
means for detecting an absence of said received data; and
means for generating dummy data for transmission in response to detection of said absence.

12. Satellite radiodetermination apparatus, comprising:

- means for receiving a plurality of ranging signals from a corresponding plurality of satellites; and
30 means for receiving ionospheric delay data, the apparatus being arranged to perform radiodetermination on the basis of said plurality of ranging signals and selectively on the basis of said ionospheric delay data in response to validity data received by the apparatus and indicating the validity of the ionospheric delay data.



-37-

13. Apparatus according to claim 12, wherein the validity data indicates the area of validity of the ionospheric delay data.

5 14. Apparatus according to claim 12 or 13, wherein the validity data indicates the period of validity of the ionospheric delay data.

10 15. Apparatus according to any of claims 12 to 14, wherein the validity data indicates the reliability of the ionospheric delay data.

15 16. Apparatus according to any one of claims 12 to 15, wherein the apparatus is arranged to perform radiodetermination selectively on the basis of the ionospheric delay data in response to authorisation data.

20 17. Apparatus as claimed in claim 16, including input means for inputting said authorisation data.

25 18. Apparatus as claimed in claim 16 or 17, wherein said ionospheric delay data is encrypted, and said apparatus includes decryption means for decrypting said ionospheric delay data in response to said authorisation data.

30 19. Apparatus as claimed in any one of claims 12 to 18, further including means for receiving differential correction data which is substantially independent of ionospheric delay. wherein said apparatus is arranged to perform radiodetermination additionally on the basis of said differential correction data.



20. A satellite radiodetermination receiver including apparatus as claimed in any one of claims 1 to 8 and 12 to

- 38 -

21. A satellite including a satellite payload as claimed in claim 10 or 11.

5 22. An apparatus and/or method for radiodetermination, a satellite payload, an apparatus and/or method for providing augmentation data, a method of providing ionospheric delay data and differential correction data, an apparatus for determining residual errors, a satellite
10 radiodetermination receiver or terrestrial station substantially as hereinbefore described with reference to the drawings.

15


DATED this 27th day of February 2001

Inmarsat Ltd.


20 By its Patent Attorneys
DAVIES COLLISON CAVE



041196 68100

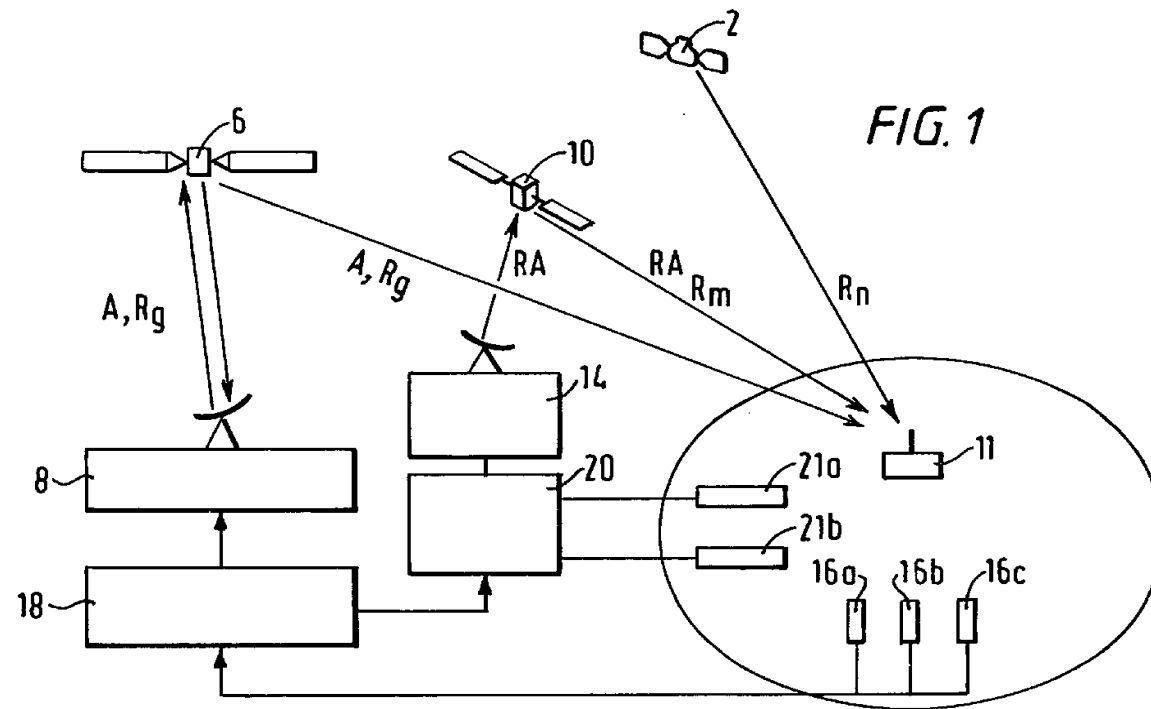


1/6 68100/6

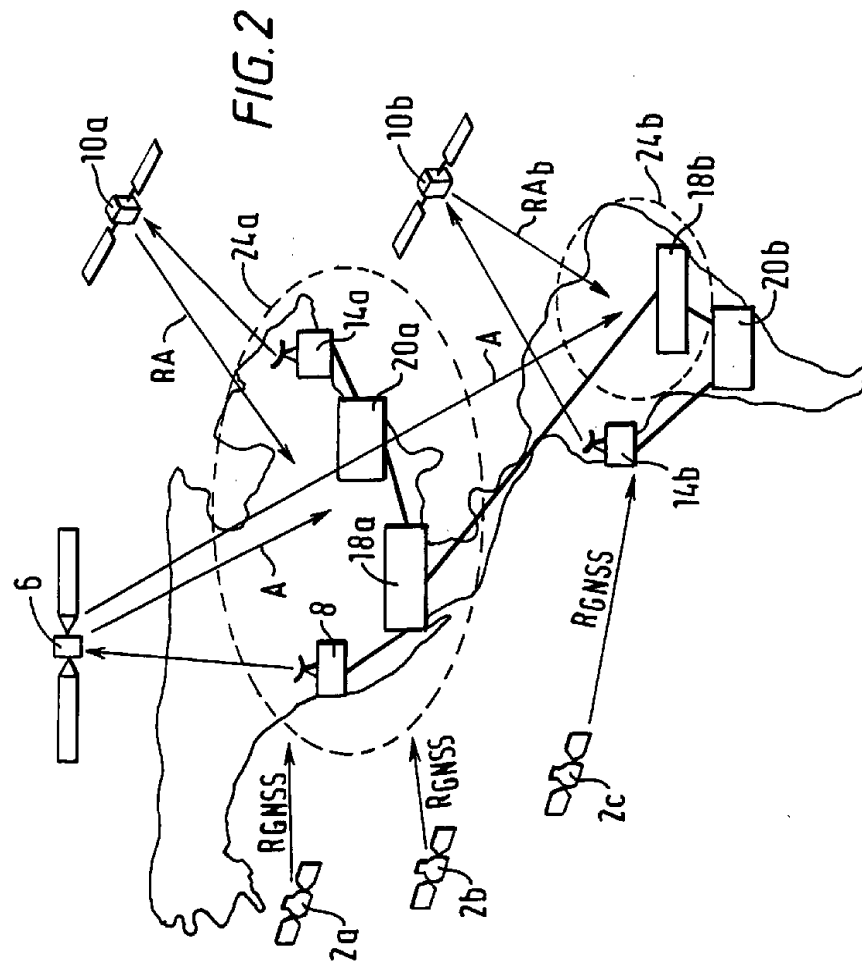


041195 00100

FIG. 3

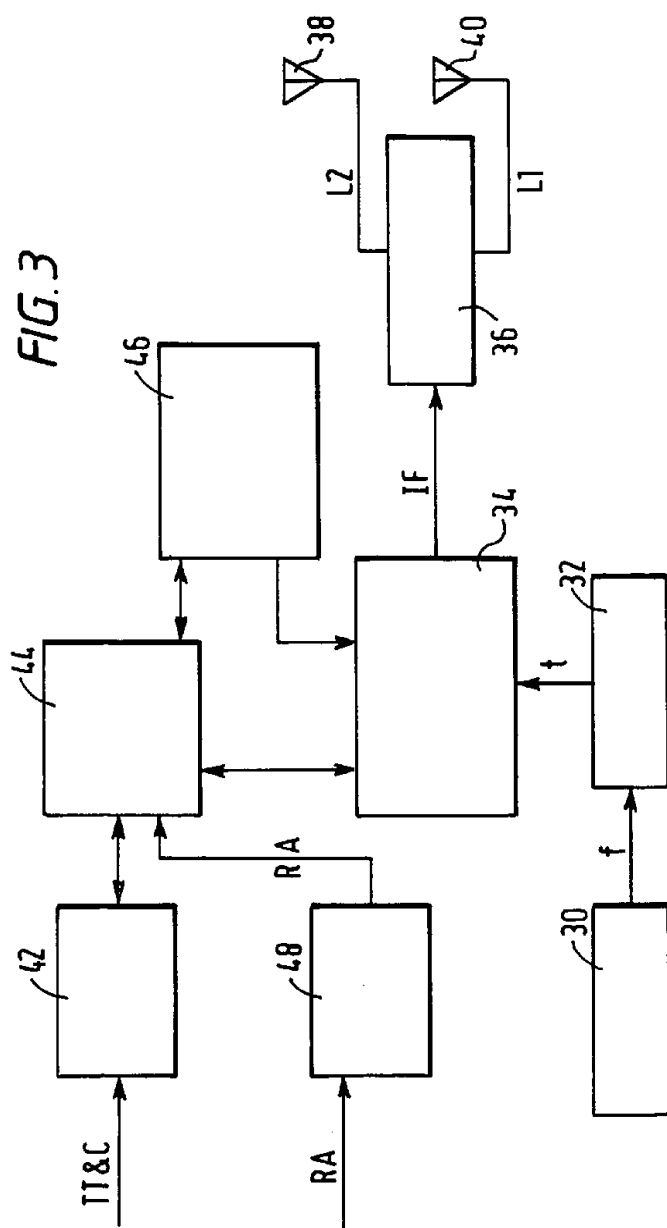

041195 00100

FIG. 4

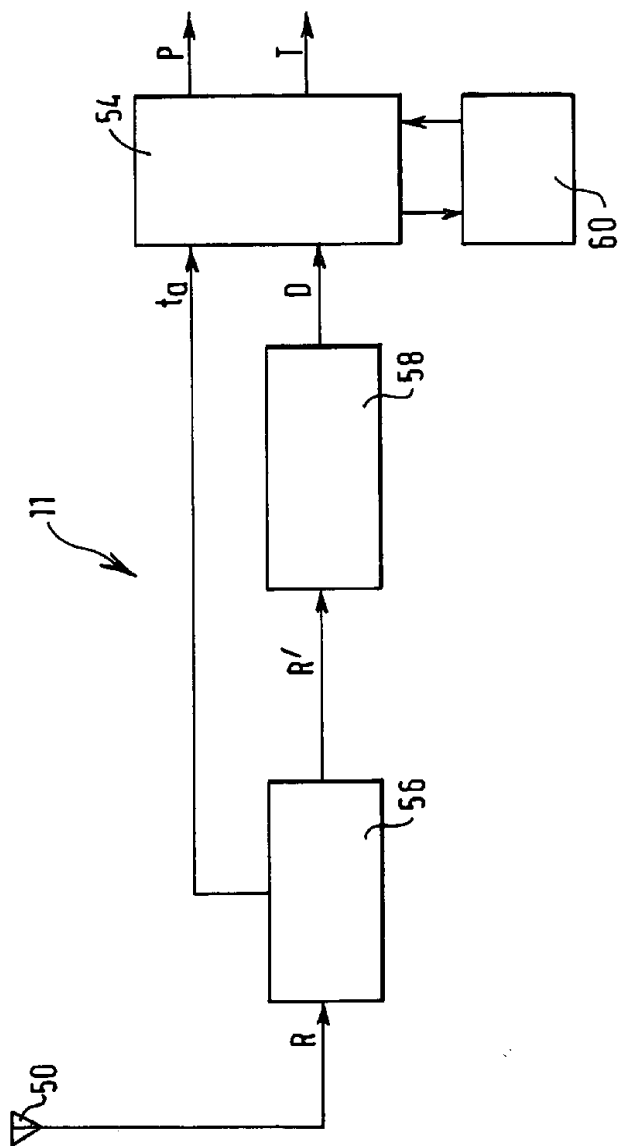

↖ G

