


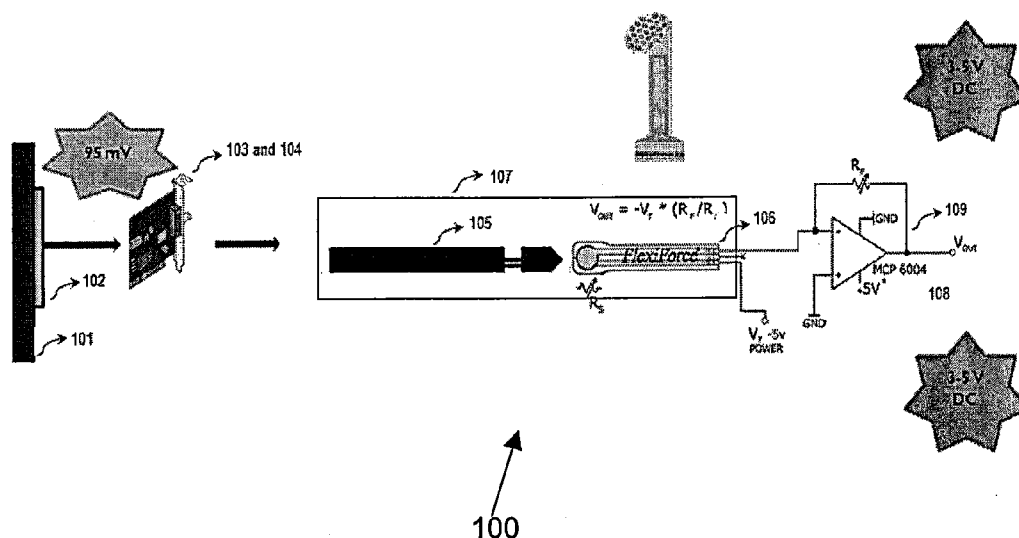

US 20130069486A1

(19) **United States**(12) **Patent Application Publication**
VIJAYAKUMAR(10) **Pub. No.: US 2013/0069486 A1**(43) **Pub. Date: Mar. 21, 2013**(54) **PROCESS OF GENERATING POWER FROM
HARD DISK VIBRATION IN DATA CENTERS**(52) **U.S. Cl.**
USPC 310/339(75) Inventor: **Senthilkumar VIJAYAKUMAR,**
Bangalore (IN)(73) Assignee: **TATA CONSULTANCY SERVICES
LIMITED, Mumbai (IN)**(21) Appl. No.: **13/236,044**(22) Filed: **Sep. 19, 2011****Publication Classification**(51) **Int. Cl.**
H02N 2/18 (2006.01)(57) **ABSTRACT**

The present invention relates to an energy harvesting apparatus capable of converting small magnitude low frequency vibrational energy into useful electrical energy that may be stored and used to power microelectronic devices and rechargeable battery technologies. The energy harvesting apparatus utilizes a piezoelectric device coupled to a pneumatic controller for modulating the vibrational energy received from vibrational energy source into a useful alternating energy waveform. A rectifier is further coupled to the piezoelectric device for converting alternating electrical energy to direct current energy for supporting associated external circuitry.



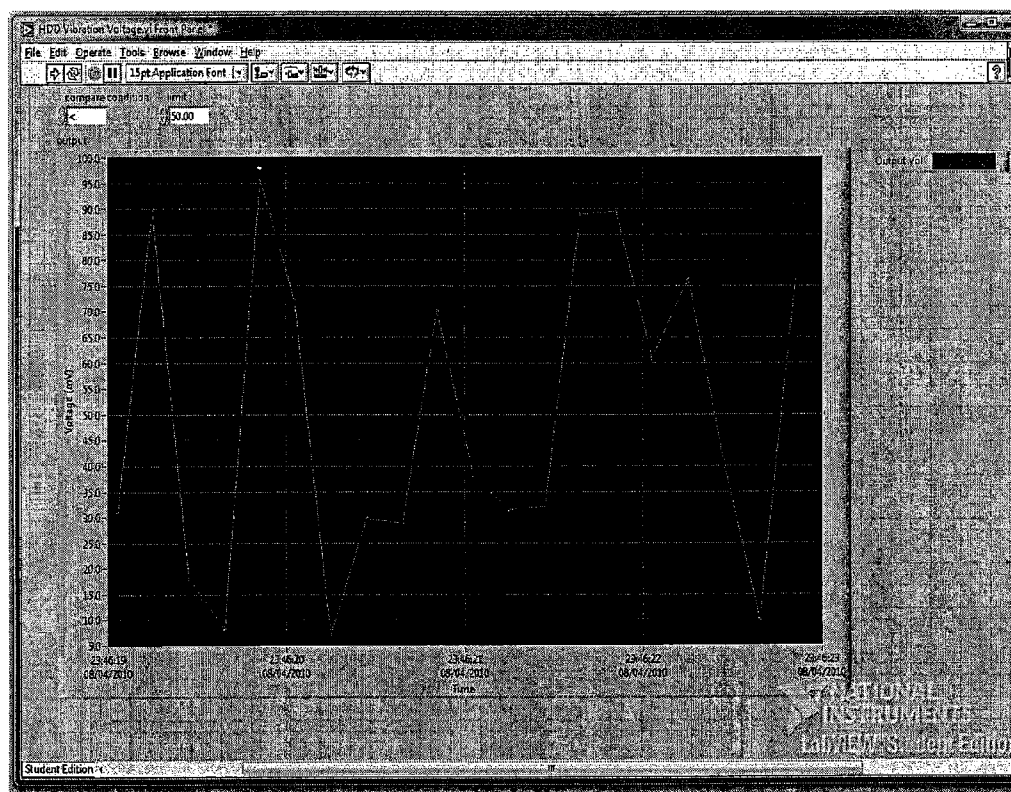


Figure 1

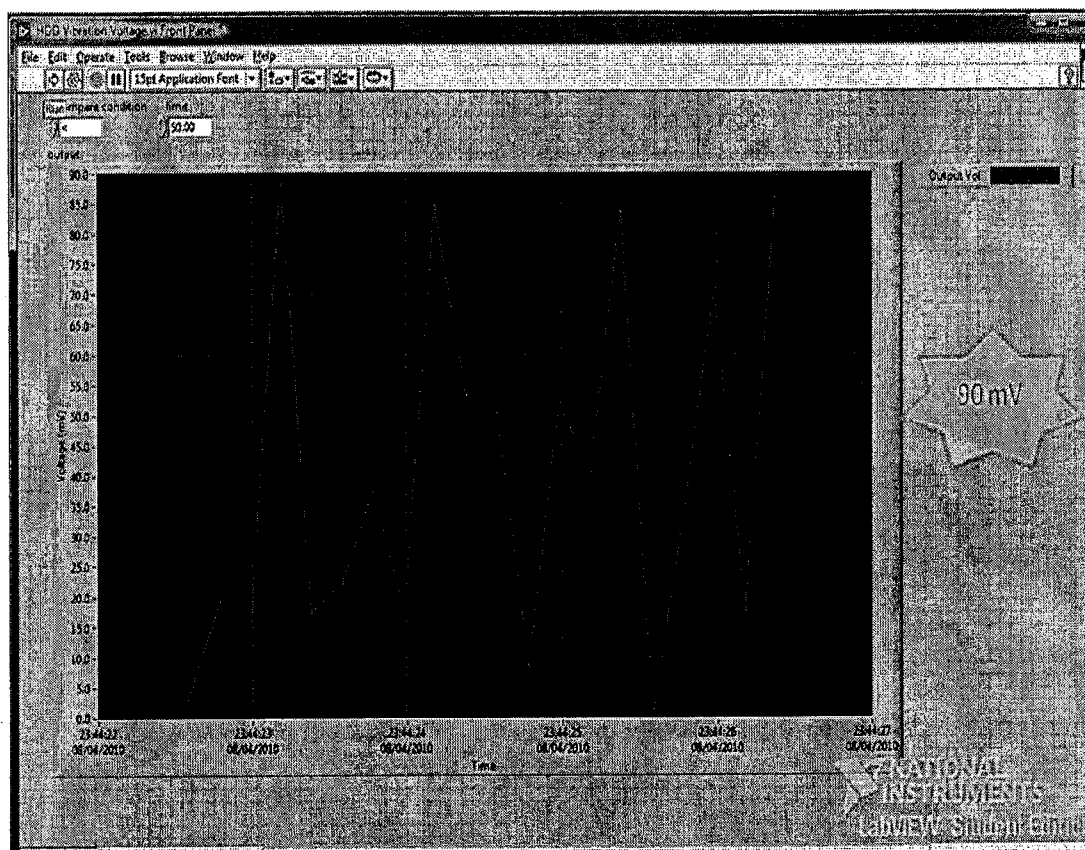


Figure 2

Figure 4



Figure 5

PROCESS OF GENERATING POWER FROM HARD DISK VIBRATION IN DATA CENTERS

FIELD OF THE INVENTION

[0001] The present invention generally relates to a method of harvesting small mechanical movements, such as vibrations and converting it to electrical energy, and more particularly for providing harvested energy to external circuitry from piezoelectric sensor array arrangement.

BACKGROUND OF THE INVENTION

[0002] Small mechanical movements produced during hard disk vibrations can be a promising source of electrical energy that can be harvested and eventually stored for utilization by other associated electronic devices. The selection of energy harvester for converting these low amplitude vibrations or vibrations generated from other mechanical motions into a meaningful electrical energy depends upon the cost effectiveness, reliability and profile of the harvester. Significantly, also important is to consider the low frequency mechanical output of the hard disk drives that is not in the continuous signal form that can be stored and utilized for continual charging or powering devices on power failure or powering the operations of micro-electronics, micro controllers and processors, especially in datacenters.

[0003] Improvising upon the efficiency of energy capture generated in the form of low magnitude local vibrations and converting it into a meaningful electrical energy remains an everlasting challenge. In this light, it will be advantageous to realize an energy harvesting system that could glean ambient power, i.e. power stored in local vibrations and convert this into useful electricity.

OBJECT OF THE INVENTION

[0004] In accordance with the present invention, an energy harvesting apparatus capable of converting mechanical vibrations into useful electrical energy is provided.

[0005] It is an object of the present invention to provide an energy harvesting apparatus that captures low frequency vibrations from hard disk drives in the datacenters to generate electrical energy for powering micro-controllers or micro electronics or processors; or continually charging USB devices or battery powered devices.

[0006] Another objective of the present invention is to provide an energy harvesting mechanism that improves efficiency of energy capture using the piezoelectric energy harvesting apparatus.

[0007] It is an object of the invention to provide an energy harvesting apparatus that can convert very low power of magnitude ranging from 70-90 mV into significant voltage of 3-5V.

[0008] In another aspect of the present invention, the energy harvesting apparatus generates power from small magnitude and low frequency vibrational sources intrinsic to the environment to provide operating power for a host of various devices.

SUMMARY OF THE INVENTION

[0009] The present invention relates generally to the mechanism of capturing small magnitude low frequency vibrational energy from vibrational energy sources and converting it into electrical energy. The electrical energy so obtained is of amplified magnitude and can be directly used

for either powering the operations of micro-electronics or micro controllers or processors; continual charging of USB devices; or for storing energy in capacitors or storage batteries for subsequent use by external circuitry.

[0010] In one exemplary embodiment, the mechanism of harvesting vibrational energy employs an energy harvesting apparatus comprising of: a three dimensional vibrational energy source that is capable of generating vibrational energy of varying energy characteristics; a vibration sensing device configured to sense the vibrations in response to varying energy characteristics of the vibrational energy source; an electronic amplifier coupled to an Optocoupler for modulating the varying energy characteristics to a first signal form of an amplified magnitude; and a modulating means in communication with a cascade amplifier for modulating the first signal form to an amplified second signal form. The modulating means of the energy harvesting apparatus further comprises of a pneumatic controller for converting the first signal form to proportional pneumatic stress; and at least one piezoelectric sensor secured to the said pneumatic controller for generating the said second signal form in response to mechanical stress.

[0011] In each exemplary embodiment, the output of the energy harvesting apparatus is connected to a diode bridge rectifier and a capacitor for converting the output alternating signal form to a direct current signal form for powering host of various devices. The capacitor further reduces the variations of the rectified signal form received from the diode bridge to generate smoothened waveform.

[0012] These and other aspects, features and advantages of the present invention will be described or become apparent from the following detailed description of preferred embodiments, which is to be read in connection with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

[0013] FIGS. 1, 2 and 3 shows vibrational energy characteristics of the vibrations generated during multiple activities performed by a hard disk drive.

[0014] FIG. 4 is a functional block diagram of an energy harvesting apparatus supporting an external circuitry in accordance with one of the preferred embodiments of the present invention.

[0015] FIG. 5 show alternating waveform appearing as the output from piezoelectric sensor.

DETAILED DESCRIPTION OF THE INVENTION

[0016] Before the present method, system and communication enablement are described, it is to be understood that this invention is not limited to the particular methodologies, and hardware and network described, as these may vary within the specification indicated. It is also to be understood that the terminology used in the description is for the purpose of describing the particular versions or embodiments only, and is not intended to limit the scope of the present invention, which will be limited only by the appended claims. The words "comprising," "having," "containing," and "including," and other forms thereof, are intended to be equivalent in meaning and be open ended in that an item or items following any one of these words is not meant to be an exhaustive listing of such item or items, or meant to be limited to only the listed item or items. The disclosed embodiments are merely exemplary methods of the invention, which may be embodied in various

forms. The invention may be described herein in terms of functional and/or logical block components and various processing steps. It should be appreciated that such block components may be realized by any number of hardware, software, and/or firmware components configured to perform the specified functions. For the purposes of conciseness, conventional techniques and systems related to semiconductor processing, transistor theory, packaging, and power modules are not described in detail herein.

[0017] The following description refers to elements or nodes or features being “connected” or “coupled” together. As used herein, unless expressly stated otherwise, “connected” means that one element/node/feature is directly joined to (or directly communicates with) another element, node or other feature in mechanical, logical, electrical or other appropriate sense. Likewise, unless expressly stated otherwise, “coupled” means that one element/node/feature is directly or indirectly joined to (or directly or indirectly communicates with) another element/node/feature in a mechanical, logical, electrical or other appropriate sense. Further, although the figures may depict example arrangements of elements, additional intervening elements, devices, features, or components may be present in a practical embodiment of the invention.

[0018] The present invention is directed to a mechanism of capturing mechanical motions, particularly small magnitude and low frequency vibrations and converting it into a useful electrical form of energy by utilizing an energy harvesting apparatus. The energy harvesting apparatus senses mechanical vibrations generated from a vibrational energy source, like a physical hard disk drive and converts it into a meaningful electrical energy by modulating means that involves an pneumatic controller to apply pneumatic stress upon a piezoelectric sensor to cause necessary deformation of the said element, which in turn, produces the voltage differential across the element. The small magnitude and low frequency vibrations can be produced by a physical disk drive during performance of multiple operations. Though, for the illustrative purposes of the present invention, the low frequency and small magnitude vibrations are considered to be generated by a disk drive, such vibrations can be generated by the operations of any other equipment. Therefore, the energy generated eventually by mechanism of the present invention can be used for diverse applications, like powering of micro-controllers, micro-electronics and processors; for charging of USB devices or powering of other devices on power failure.

[0019] Turning now to FIG. 1, vibrational energy characteristics generated during multiple operations performed on the vibrational energy source is illustrated. Various functional operations performed by/on the hard disk drive may include accessing files from hard disk drives and working on multiple applications which sends read-write operations to hard disk drives; the said activity being capable of generating approximately 90-95 mV of electrical potential difference. Other operations include copying files to hard disk drives that generates voltage differential to the magnitude of 80 mV and also operations like installation of application or during registry whereby a voltage to the tune of 70 mV gets generated (As shown in FIGS. 2 and 3). The vibrational motions produced from hard disk drives are sensed by the vibration sensing device a sensor that converts them into signals of varying energy characteristics depending upon the operations performed by/on the hard disk drive.

[0020] The hard disk drive has very high speed motors and actuators, both of which contribute to the generation of mechanical vibrations. The sensor responsible for sensing these low magnitude vibrations is selected to be of a very high sensitivity that can be used to harvest otherwise wasted energy from these mechanical oscillations. In accordance with one general embodiment of the present invention, a transducer can be employed as a vibration sensing device for desired conversion of energy form. Typically a displacement sensor is capable of measuring such low frequency oscillations with least signal distortions or amplifier overload. The transducer can also be an electrostatic transducer for producing a transducer signal proportional to vibrational motion of the hard disk drive.

[0021] Referring now to FIG. 4, a functional block diagram of an energy harvesting apparatus in accordance with one of the preferred embodiments of the present invention is illustrated at reference numeral 100. The apparatus 100 includes a hard disk drive 101 as a source of vibrational energy that is typically formed of magnetic disks rotated by spindle motor; plurality of heads placed adjacent to disk bearing elements capable of performing separate read or write operations. The plurality of heads are pivoted on a suspension arm for rotation about single axis whereby the suspension arm is further pivotally mounted to an actuator arm that generates vibrations in all three dimensions by rotating back and forth around its axis.

[0022] The head vibrations are sensed by transducer 102 coupled to the suspension assembly of the heads to receive strained vibrations of the head and producing proportional transducer signal. The opposing terminals of the transducer 102 are oriented in a manner to induce voltage signal across the terminals on receiving vibrational modes from any direction. The vibrations of varying energy characteristics are detected and sensed by the transducer for producing transducer signal varying in the range of 70-95 mV. The transducer signal is produced in proportion to the mechanical movement of the head assembly of the hard disk drive 101.

[0023] The signal is now amplified by an electronic amplifier 103 that amplifies the control voltage of 70-90 mV to significant sensible voltage of 2-3V that can be fed as an input to the modulating means 107. The electronic amplifier 103 is further coupled to an optocoupler 104 in order to transfer generated transducer signals by utilizing light waves to provide coupling with electrical isolation between its input and output. The optocoupler 104 is an electronic equipment and signal and power transmission lines can be subjected to voltage surges induced by electrostatic discharge, radio frequency transmissions, switching pulses (spikes) and perturbations in power supply.

[0024] The transducer signal is a highly distorted square waveform, in the form of spikes, with odd harmonics that cannot be fed directly to the external circuitry. The signals are therefore communicated to the optocoupler 104 that reduces the distortions in the square waveform to form the first signal form. The resulting first signal form is a slightly less distorted square form of amplified magnitude (2-3V) that can be fed as an input to a pneumatic controller 105 which has piston type of arrangement which will move and push to produce desired pneumatic stress on the piezoelectric sensor 106.

[0025] The pneumatic controller 105 is capable of producing mechanical deformation (tension, compression and shear) on the piezoelectric sensor 106, whereby the extent of deformation is proportional to the pneumatic stress constant

for the direction of applied force. The pneumatic controller **105** has a cylindrical piston type arrangement wherein the piston diameter is preferably chosen in the range of 0.375 inches (9.53 mm) varying up to 1.5 inches (38.1 mm) while the thickness is preferably chosen as 0.008 inches (0.203 mm). The pressure transmitted by the pneumatic controller generates stress upon impact with the piezoelectric sensor **106**, which gets depressed and deformed. The stress produced by the pneumatic controller is in the range of 75-100 psi to cause the desired deformation. Then there is generated an electric charge corresponding to this stress which is detected in the form of an electrical signal from the electrodes arranged upon the piezoelectric sensor assembly.

[0026] Piezoelectricity is a capability of certain crystalline materials to change their dimensions when subjected to an electrical field or, conversely, to produce electrical signals when mechanically deformed. By combining plurality of sensor elements, a piezoelectric sensor array can be formed. Together, for the purposes of this invention, the combination of pneumatic controller and an array of piezoelectric sensors are defined as the modulating means **107** that is capable of transforming the first signal form received from the optocoupler **104** to the second signal form.

[0027] The piezoelectric sensor **106** comprises of piezoelectric element which further comprises of a piezoelectric body and electrodes and electronic leads. The piezoelectric body is preferentially fabricated from noble crystals and certain ceramics. Several types of piezoelectric materials can be employed to fabricate the piezoelectric elements of the desired type, including BaTiO₃, Pb(Zr_xTi_{1-x})O₃, (Na_xK_{1-x})NbO₃, (Na^{1/2}Bi^{1/2})TiO₃, (K^{1/2}Bi^{1/2})TiO₃, Pb(A^{1/3}B^{2/3})O₃—PbTiO₃ (where A=Zn, Mg, Ni, and B=Nb, Ta), Pb(Yb^{1/2}Nb^{1/2})O₃—PbTiO₃, LiNbO₃, AgNbO₃, and Bi-layered structures. Solid solutions and composite formulations of these materials can also be employed to fabricate the piezoelectric elements. The electronic leads are connected to the electrodes by using any connecting means.

[0028] The stress generated by the pneumatic controller **105** is generally normal to the axis of the piezoelectric sensor **106** which will tend to bend and strain the element thereby generating a voltage across the element generally in a plane defined by the applied stress and the axis of the element. The voltage waveform, referred herein as the second signal form, and as generated from the piezoelectric sensor is perfect square waveform (smoothened) with very low frequency spikes (as shown in FIG. 5). The modulating means **107** comprising of pneumatic controller **105** and piezoelectric sensor array arrangement **106** is further integrated with a cascade amplifier **108** for amplifying the second signal form to significant voltage of magnitude varying in the range of 3-5V (shown in FIG. 5) which stabilized to form a gain histogram of 3-5V. Each sensor within an array of piezoelectric sensor arrangement is capable of generating 3-5V of meaningful energy that can be either stored in a super capacitor or a lithium-ion battery; or for powering the operations of micro-electronics, micro-controllers or processors; or continual charging of USB devices; or for powering of devices on power failure. Thus, multiple voltage paths can be formed using array arrangement for directing the output electrical energy for multiple purposes. Preferably, one path of the piezoelectric sensor array arrangement is used to power the circuitry of the system which nullifies the input voltage consumption of the circuitry, while the other paths can be used for miscellaneous purposes, discussed above.

[0029] The reciprocating motion of the pneumatic controller causes the piezoelectric sensor to produce alternating waveform that is not relatively consistent or continuous and preferably not supplied as a support to external circuitry.

[0030] Therefore, the modulating means **107** is further integrated with diode bridge rectifier and a capacitor to convert and utilize the generated second signal form to DC voltage output to support the electrical functioning of an externally associated circuitry. The capacitor further reduces the variations of the rectified signal form received from the diode bridge to generate smoothened waveform. The outputted DC voltage terminals are either connected in series or parallel or series parallel in order to support the electrical functioning of an externally associated circuitry.

[0031] Although the present invention has been shown and described with respect to several preferred embodiments thereof, various changes, omissions and additions to the form and detail thereof, may be made therein, without departing from the spirit and scope of the invention.

We claim:

1) A vibrational energy harvesting apparatus comprising of:

- a three dimensional vibrational energy source capable of generating varying energy characteristics;
- a vibration sensing device configured to sense the vibrations in response to varying energy characteristics of the vibrational energy source;
- an electronic amplifier coupled to an Optocoupler for modulating the varying energy characteristics to a first signal form of an amplified magnitude; and
- a modulating means in communication with a cascade amplifier for modulating the first signal form to an amplified second signal form, whereby the modulating means further comprises: an pneumatic controller for converting the first signal form to proportional pneumatic stress; and at least one piezoelectric sensor secured to the said pneumatic controller for generating the said second signal form in response to mechanical stress.

2) The apparatus of claim **1**, wherein the vibrational energy source includes a physical disk drive generating vibrations of energy and wherein the varying energy characteristic is voltage varying in the range of 70-95 mV.

3) The apparatus of claim **1**, wherein the vibration sensing device includes an electrical transducer to convert varying vibrational energy to electrical energy of magnitude varying in the range of 70-95 mV.

4) The apparatus of claim **1**, wherein an electronic amplifier is responsible for amplifying the output from vibration sensing device to the magnitude of 2-3V.

5) The apparatus of claim **1**, wherein an electronic amplifier is integrated with an optocoupler for varying the energy characteristics from a highly distorted square waveform to a slightly distorted square waveform of amplified magnitude in order to achieve the first signal form.

6) The apparatus of claim **1**, wherein the first signal form is a slightly distorted square waveform of magnitude varying in the range of 2-3V, and wherein the slightly distorted square waveform comprises of low frequency spikes at its output.

7) The apparatus of claim **1**, wherein the modulating means engages a cascade amplifier for converting the first signal form to an amplified second signal form of magnitude varying in the range of 3-5V.

8) The apparatus of claim 1, wherein the modulating means comprises of a pneumatic controller and at least one piezoelectric sensor, and wherein the piezoelectric sensor optionally comprises of an array of sensors, each sensor capable of generating 3-5V.

9) The apparatus of claim 1, wherein the modulating means is further integrated with a diode bridge rectifier and a capacitor to convert and utilize the generated second signal form to DC voltage output to support the electrical functioning of an externally associated circuitry.

10) The apparatus of claim 1, wherein the pneumatic controller utilizes the first signal form to provide a pneumatic output of up to 75-100 psi for impacting piezoelectric sensor.

11) The apparatus of claim 1, wherein the piston diameter of pneumatic controller is chosen in the range of 0.375 inches to 1.5 inches.

12) The apparatus of claim 1, wherein the piezoelectric sensor generates a second signal form in response to the pneumatic stress, the said second signal form is a smoothened square waveform of amplitude 3-5V.

13) The apparatus of claim 1, wherein the piezoelectric sensor is formed of piezoelectric element selected from the group comprising of piezoelectric ceramics, piezoelectric single crystals, piezoelectric polymers, piezoelectric composites and the like.

14) The apparatus of claim 1, wherein the piezoelectric sensor comprises of plurality of sensors to output DC voltage terminals that are connected in series or parallel or series parallel in order to support the electrical functioning of an externally associated circuitry.

15) The apparatus of claim 1, wherein the DC output voltage from the modulating means is accumulated across a capacitor to store said harvested electrical energy.

16) A method of harvesting energy from a vibrational energy source of varying voltage, the method comprising:

Detecting three dimensional varying vibrational energy characteristics generated from a vibrational energy source by a vibration sensing device;

Communicating the varying vibrational energy to an electronic amplifier coupled to an Optocoupler for modulating the varying energy characteristics to a first signal form of an amplified magnitude; and

Transforming the first signal form into an amplified second signal form by modulating means for subsequent use in an external circuitry, wherein the transformation includes: receiving and converting the first signal form to a proportional pneumatic stress by a pneumatic controller and utilizing the generated stress to deform at least one piezoelectric sensor for generating the second signal form.

17) A method of claim 16, wherein the varying energy characteristic detected by the sensing device is a voltage varying in the range of 70-90 mV.

18) A method of claim 16, wherein the varying vibrational energy communicated to the optocoupler is modulated from a highly distorted square waveform to a slightly distorted square waveform of amplified magnitude in order to achieve the first signal form.

19) A method of claim 16, wherein the optocoupler is integrated with an electronic amplifier to amplify the first signal form to 2-3 V.

20) A method of claim 16, wherein the first signal form is converted to a proportional pneumatic stress of the magnitude 75-100 psi by the pneumatic controller for impacting the piezoelectric sensor.

21) A method of claim 16, wherein the pneumatic stress generated by the pneumatic controller is impacted upon the piezoelectric sensor to cause deformation and generation of a second signal form comprising of smoothened square waveform of magnitude varying from 3-5V.

22) A method of claim 16, wherein the piezoelectric sensor optionally comprises of array of sensors, wherein each sensor is capable of generating second signal form of magnitude varying from 3-5V.

23) A method of claim 16, wherein the transformation of a first signal form to an amplified second signal form, varying in the range of 3-5V, is achieved by modulating means in communication with a cascade amplifier.

24) A method of claim 16, wherein the second signal form is converted to DC voltage output for utilization by an externally associated circuitry by means of modulating means integrated with a bridge rectifier and a capacitor.

* * * * *