



(22) Date de dépôt/Filing Date: 2014/11/18

(41) Mise à la disp. pub./Open to Public Insp.: 2015/05/19

(45) Date de délivrance/Issue Date: 2022/06/14

(30) Priorités/Priorities: 2013/11/19 (US61/906,301);
2014/11/18 (US14/546,644)

(51) Cl.Int./Int.Cl. *H01B 13/22* (2006.01),
H01B 11/06 (2006.01), *H01B 11/18* (2006.01),
H01B 3/18 (2006.01), *H01B 7/285* (2006.01),
H01B 9/02 (2006.01)


(72) Inventeurs/Inventors:
VARKEY, JOSEPH, US;
ALTINTAS, BURCU UNAL, US;
YANG, DONG, US;
CHANG, SHENG, US;
HUANG, QINGDI, US

(73) Propriétaire/Owner:
SCHLUMBERGER CANADA LIMITED, CA

(74) Agent: SMART & BIGGAR LLP

(54) Titre : CABLE ET SON PROCEDE DE FABRICATION

(54) Title: CABLE AND METHOD OF MAKING THE SAME

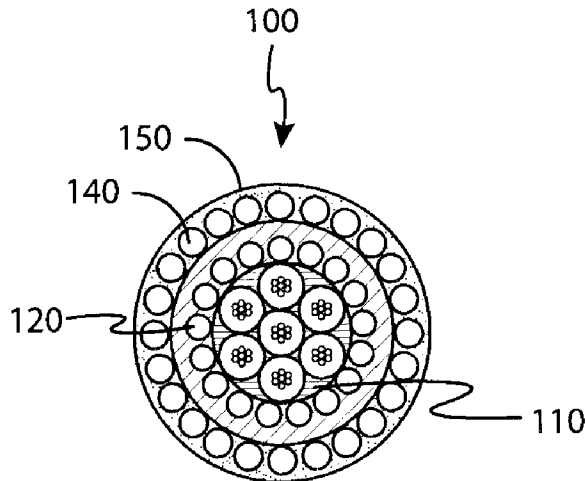

(57) Abrégé/Abstract:

A cable that has a cable core with a first armor wire layer and a second armor wire layer. The second armor wire layer is segregated from the first armor wire layer, and an outer jacket is disposed about the second armor wire layer.

ABSTRACT

A cable that has a cable core with a first armor wire layer and a second armor wire layer. The second armor wire layer is segregated from the first armor wire layer, and an outer jacket is disposed about the second armor wire layer.

CABLE AND METHOD OF MAKING THE SAME

FIELD OF THE DISCLOSURE

[0001] The disclosure generally relates to a cable and method of making a cable.

BACKGROUND

[0002] During well operations cable is used to convey equipment into a wellbore. Often the cable transmits power downhole to downhole equipment and provides communication between downhole equipment and the surface. The cables are often sealed off in packoffs at a wellhead against downhole pressure.

[0003] The sealing capabilities of the cable, however, are reduced if the armor wire cables are not properly segregated from one another. For example, if the armor wire cables are allowed to be in contact a pathway can easily form that allows pressurized gas to travel up the cable.

SUMMARY

[0004] According to an aspect of the present disclosure, there is provided a cable comprising: a cable core; a first armor wire layer, wherein the first armor wire layer is embedded in a first insulating layer disposed about the cable core; a second armor wire layer, wherein the second armor wire layer is segregated from the first armor wire layer, wherein the second armor wire layer is separated from the first armor wire layer by a second insulating layer, wherein the second insulating layer comprises a low-melt-temperature polymer disposed about a high-melt-temperature polymer, a plurality of ridges, a carbon reinforced polymer, a bondable tape, cross-linked polymer bonded with another polymer, a cabled yarn, or combinations thereof; and an outer jacket disposed about the second armor wire layer.

[0004a] According to another aspect of the present disclosure, there is provided a method of making a cable, wherein the method comprises: placing a first armor wire layer about a cable core and a first insulating layer; placing a second insulating layer about the first armor wire layer; shaping the second insulating

layer to have a plurality of ridges or integrating a barrier into the second insulating layer; placing a second armor wire layer about the second insulating layer, thereby, segregating the first armor wire layer from the second armor wire layer; and placing an outer jacket about the second armor wire layer.

[0004b] According to another aspect of the present disclosure, there is provided a method of making a cable, wherein the method comprises: placing a first armor wire layer about a cable core and a first insulating layer; heating the first insulating layer before the first armor wire layer is disposed thereabout, allowing the first armor wire layer to fully embed into the first insulating layer; placing a second armor wire layer about the first armor wire layer, wherein the armor wire layers are separated from one another by a second insulating layer; and placing an outer jacket about one of the armor wire layers.

[0005] An embodiment of a cable includes a cable core. A first armor wire layer and a second armor wire layer are located about the cable core, and the second armor wire layer is segregated from the first armor wire layer. An outer jacket is located about the second armor wire layer.

[0005a] An embodiment of method of making a cable includes placing a first armor wire layer about a cable core and a first insulating layer. The method also includes placing a second insulating layer about the first armor wire layer. The method also includes placing a second armor wire layer about the second insulating layer, thereby, separating the first armor wire layer from, the second armor wire layer. The method also includes placing an outer jacket about the second armor wire layer.

[0006] Another embodiment of making a cable includes placing two armor wire layers about a cable core, and separating the armor wire layers from one another. The method also includes placing an outer jacket about the one of the armor wire layers.

BRIEF DESCRIPTION OF THE DRAWINGS

[0007] FIG. 1A depicts an embodiment of a cable.

[0008] FIG. 1B depicts a cable core, first insulating layer, and first armor wire layer of the cable of FIG. 1A.

[0009] FIG. 1C depicts an inner portion of a second insulating layer disposed about the first armor wire layer of FIG. 1B.

[0010] FIG. 1D depicts an outer portion of the second insulating layer disposed about the inner portion of FIG. 1C.

[0011] FIG. 1E depicts a second armor wire layer disposed about the second insulating layer of FIG. 1D.

[0012] FIG. 2A depicts another example cable.

[0013] FIG. 2B depicts the cable core of the cable of FIG. 2A with a first armor wire layer located thereabout.

[0014] FIG. 2C depicts a first portion of a second layer disposed about the first armor wire layer.

[0015] FIG. 2D depicts a second portion of the second layer disposed about the first portion.

[0016] FIG. 3A depicts yet another embodiment of a cable.

[0017] FIG. 3B depicts a cable core of the cable of FIG. 3A with a first armor wire layer located thereabout.

[0018] FIG. 3C depicts a second insulating layer disposed about the first armor wire layer.

[0019] FIG. 3D depicts a second armor wire layer located about the second insulating layer.

[0020] FIG. 4A depicts an additional embodiment of a cable.

[0021] FIG. 4B depicts a cable core of the cable of FIG. 4A with a first armor layer located thereabout.

[0022] FIG. 4C depicts an inner portion of a second insulating layer disposed about the first armor layer of FIG. 4B.

[0023] FIG. 4D depicts a second armor wire layer located about a second portion of the second insulating layer that is located about the first portion of FIG. 4C.

[0024] FIG. 5A depicts another embodiment of a cable.

[0025] FIG. 5B depicts a cable core of the cable of FIG. 5A with a first armor wire layer located thereabout.

[0026] FIG. 5C depicts the first armor wire layer of FIG. 5B with a second insulating layer located thereabout.

[0027] FIG. 5D depicts a second armor wire layer located about the second insulating layer of FIG. 5C.

[0028] FIG. 6A depicts another embodiment of a cable.

[0029] FIG. 6B depicts the cable core of the cable of FIG. 6A with a first armor wire layer located thereabout.

[0030] FIG. 6C depicts a second insulating layer disposed about the first armor wire layer of FIG. 6B.

[0031] FIG. 6D depicts a second armor wire layer disposed about the second insulating layer of FIG. 6C.

[0032] FIG. 7 depicts a flow diagram of an embodiment of a method of making a cable.

DETAILED DESCRIPTION OF EXAMPLE EMBODIMENTS OF THE INVENTION

[0033] Certain examples are shown in the above-identified figures and described in detail below. In describing these examples, like or identical reference numbers are used to identify common or similar elements. The figures are not necessarily to scale and certain features and certain views of the figures may be shown exaggerated in scale or in schematic for clarity and/or conciseness.

[0034] An example cable includes a cable core. The cable core can be any now known or future known cable core. A first armor wire layer and a second armor wire layer can be disposed about the cable core. The first armor wire layer and the second armor wire layer can have any number of armor wire strands. The armor wire can be made from any material. Illustrative materials include metallic wires, fiber reinforced nylon wires, or other structurally sufficient wires.

[0035] An outer jacket is located about the second armor wire layer. The outer jacket can be any material. Illustrative materials include polymer, carbon-fiber-reinforced polymer, and low-melt-temperature polymer.

[0036] A first insulating layer can be located between the cable core and the first armor wire layer. The first armor wire layer can be embedded into the first insulating layer. The first insulating layer can be any material. Illustrative materials include polymers, low-melt-temperature polymers, carbon-fiber-reinforced polymers or the like.

[0037] A second insulating layer can be located between the first armor wire layer and the second armor wire layer, and the first insulating layer can be bonded with the second insulating layer. The second insulating layer can be any material and construction. For example, the second insulating layer can be a low-melt-temperature polymer disposed about a high-melt-temperature polymer; a polymer with a plurality of ridges; a carbon-fiber-reinforced polymer; a bondable tape embedded in a polymer; a cross-linked polymer bonded with another polymer; a cabled yarn embedded in a polymer; or the like.

[0038] An example method of making a cable can include placing a first armor wire layer about a cable core and a first insulating layer. The method can include heating the first insulating layer prior to placing the first armor wire layer about the first insulating layer, allowing the first armor wire layer to embed into the first insulating layer. The first insulating layer can be heated using any heating source. Illustrative heating sources include an infrared heat source, a hot air heat source, an electric heat source or the like.

[0039] The method can also include placing a second insulating layer about the first armor wire layer. The second insulating layer acts like a barrier between the first armor wire layer and the second armor wire layer. Accordingly, the first armor wire layer and the second armor wire layer are segregated from one another.

[0040] In an embodiment the method can include embedding the second armor wire layer into the second insulating layer by heating an outer portion of the second insulating layer, such as low-melt-temperature polymer, disposed about an inner portion of the second insulating layer, such as a high-melt-temperature polymer. For example, the outer portion can be heated using a heat source, softening the outer portion, and the second armor wire layer can at least partially embed into the softened outer portion. The inner portion is not softened by the heat applied to the outer portion and the inner portion remains hard. As such, the second armor wire layer is prevented from passing through the inner portion of the second insulating layer.

[0041] The method can also include placing an outer jacket about the second armor wire layer. The outer jacket can be a polymer or other suitable material. The outer jacket can have a smooth profile.

[0042] Turning now to the FIGS., FIG. 1A depicts an embodiment of a cable. FIG. 1B depicts a cable core, the first insulating layer, and the first armor wire layer of the cable of FIG. 1A. FIG. 1C depicts an inner portion of a second insulting layer disposed about the first armor wire layer of FIG. 1B. FIG. 1D depicts an outer portion of the second insulating layer disposed about the inner portion of the second

insulating layer of FIG. 1C. FIG. 1E depicts a second armor wire layer disposed about second insulating layer of FIG. 1D.

[0043] Referring to FIGS. 1A to 1D, a cable **100** includes a cable core **110**, a first armor wire layer **120**, a second armor wire layer **140**, and an outer jacket **150**.

[0044] The cable core **110** has a first insulating layer **115** disposed thereabout, and the first armor wire layer **120** is at least partially embedded into the first insulating layer **115**. The first insulating layer **115** can fill interstitial spaces in the first armor wire layer **120**.

[0045] A second insulating layer that includes an inner portion **125** and an outer portion **130** can be disposed about the first armor wire layer **120**. The inner portion **125** can be between the first armor wire layer **120** and the outer portion **130**. The inner portion **125** can bond with the first insulating layer **115**.

[0046] The second armor wire layer **140** is at least partially embedded into the outer portion **130**; the outer jacket **150** is disposed about the second armor wire layer **140**, and the outer jacket **150** is bonded with the outer portion **130**.

[0047] The cable **100** can be made by placing the first insulating layer **115** about the cable core **110**. The first insulating layer **115** can be heated prior to the first armor wire layer **120** being placed thereabout. The first armor wire layer **120** can be cabled helically about the heated first insulating layer **115**, and the first armor wire layer **120** can at least partially embed into the first insulating layer **115**.

[0048] The second insulating layer can then be disposed about the first armor wire layer **120**. The second insulating layer includes the inner portion **125** and the outer portion **130**. Accordingly, the inner portion **125** can be disposed about the first armor wire layer **120**, and the outer portion **130** can be disposed about the inner portion **125**. The inner portion **125** and the outer portion **130** can be bonded with one another using a compatible layer placed between them.

[0049] After the second layer is formed, the outer portion **130** can be heated, and the second armor wire layer **140** can be disposed about the heated outer portion **130**. The second armor wire layer **140** can be at least partially embedded into the outer portion **130**, the outer jacket **150** can be placed about the second armor wire layer **140** and the outer jacket **150** can bond with the outer portion **130**.

[0050] FIG. 2A depicts another example cable. FIG. 2B depicts the cable core of the cable of FIG. 2A with a first armor wire layer located thereabout. FIG. 2C depicts a first portion of a second layer disposed about the first armor wire layer. FIG. 2D depicts a second portion of the second layer disposed about the first portion.

[0051] Referring to FIGS. 2A to 2D, the cable **200** includes a cable core **210**, a first armor wire layer **220**, a second armor wire layer **240**, and an outer jacket **250**.

[0052] The first armor wire layer **220** is at least partially embedded in a first insulating layer **215** located about the core. The first armor wire layer **220** has an inner portion **225** of a second insulating layer located thereabout. The inner portion **225** can bond with the first insulating layer **215**. The inner portion **225** can be made from virgin polymer or other suitable materials.

[0053] An outer portion **228** is disposed about the inner portion **225** to form the second insulation layer. The outer portion **228** can be a carbon-fiber-reinforced polymer, a glass-fiber reinforced polymer or the like. The second armor wire layer **240** can be at least partially embedded into the outer portion **228**, and the outer jacket **250** can be located about the outer portion **228**. The outer jacket **250** can bond with the outer portion **228**.

[0054] The cable **200** can be made by placing the first insulating layer about the cable core **210**. The first insulating layer **215** can be softened by heating the first insulating layer prior to placing the first armor wire layer **220** on the first insulating layer **215**. The first armor wire layer **220** can be cabled helically about the first insulating layer **215**, and the first armor wire layer **220** can at least partially embed into the first insulating layer **215**.

[0055] Then the inner portion **225**, which can be a thick layer of virgin polymer, can be placed about the first armor wire layer **220**. The outer portion **228** can be placed about the inner portion **225**. The outer portion **228** can be a carbon reinforced polymer that is compatible with inner portion **225** and the outer portion **228** and inner portion **225** can form the second insulating layer.

[0056] The outer portion **228** can be heated so that the second armor wire layer **240** can at least partial embed into the outer portion **228** when the second armor wire layer is placed about the outer portion **228**. The second armor wire layer **240** can be placed about the outer portion **228** by counter-helically cabling the second armor wire layer about the outer portion **228**.

[0057] The outer jacket **250**, which can be a carbon-fiber reinforced polymer, can be placed over the second armor wire layer **240**, and the outer jacket **250** and outer portion **228** can bond with one another through the interstitial spaces in the outer armor wire layer **240**.

[0058] FIG. 3A depicts yet another embodiment of a cable. FIG. 3B depicts a cable core of the cable of FIG. 3A with a first armor wire layer located thereabout. FIG. 3C depicts a second insulating layer disposed about the first armor wire layer. FIG. 3D depicts a second armor wire layer located about the second insulating layer.

[0059] Referring to FIGS. 3A to 3D, the cable **300** includes a cable core **310**, a first armor wire layer **320**, a second armor wire **340**, and an outer jacket **350**.

[0060] The first armor wire layer **320** can be at least partially embedded in a first insulating layer **315**. A second insulating layer **330** can be located about the first armor wire layer **320**, and a plurality of ridges can be formed on the outer perimeter of the second insulating layer **330**. The second insulating layer **330** can bond with the first insulating layer **315**.

[0061] A second armor wire layer **340** can be located about the second insulating layer **330**, and the outer jacket **350** can be located about the second armor wire layer **340**. The outer jacket **350** can bond with the second insulating layer **340**. The

second armor wire layer **340** rests on the peaks of the ridges of the second insulating layer **330**.

[0062] The cable **300** can be made by placing the first insulating layer **315**, which can be a carbon-fiber reinforced polymer, about the cable core **310**. The first insulating layer **315** can be heated so that it becomes soft; the first armor wire layer **320** can be placed about the first insulating layer **315**, and the first armor wire layer **320** can be at least partially embedded into the first insulating layer **315**.

[0063] The second insulating layer **330** can be placed about the first armor wire layer **315**, and the second insulating layer **330** can be shaped to have a ridged profile. For example, as the second insulating layer is placed on the first armor wire layer **315**, the second insulating layer can pass through a shaping die that creates the ridged profile. The ridges can be applied straight, at no lay angle or may be applied helically in the same orientation as the inner armor wire layer **320**.

[0064] The second armor wire layer **340** can be placed about the second insulating layer **330**. For example, the second armor wire layer **340** can be cabled counter-helically about the second insulating layer **330**. The second armor wire layer **340** can rest on the peaks of the ridges on the second insulating layer **330**, providing greater distance between the first armor wire layer and the second armor wire layer.

[0065] The outer jacket **350** can be placed about the second armor wire layer, and the outer jacket **350** can fill valleys between the ridges on the second insulating layer. The outer jacket **350** can be shaped to a circular outer profile.

[0066] FIG. 4A depicts an additional embodiment of a cable. FIG. 4B depicts a cable core of the cable of FIG. 4A with a first armor layer located thereabout. FIG. 4C depicts an inner portion of a second insulating layer disposed about the first armor layer of FIG. 4B. FIG. 4D depicts a second armor wire layer located about a second portion of the second insulating layer that is located about the first portion of FIG. 4C.

[0067] Referring to FIGS. 4A to 4D, the cable **400** includes a cable core **410**, a first armor wire layer **420**, a second armor wire layer **440**, a barrier **435**, and an outer jacket **450**.

[0068] The cable core **410** can have a first insulating layer **415** located thereabout. The first armor wire layer **420** can be located about the first insulating layer **415**.

[0069] A second insulating layer **430** can be located about the first armor wire layer **420**. The second insulating layer **430** has a barrier **435**. The second insulating layer **430** can bond with the first insulating layer **415**.

[0070] The barrier **435**, which can be a tape, is integrated into the second insulating layer **430**. The barrier **435** can be a bondable, polymeric tape.

[0071] The second armor layer **440** can be located about the second insulating layer **430**; the outer jacket **450** can be located about the second armor layer **440**, and the outer jacket **450** can bond with the second insulating layer **430**.

[0072] The cable **400** can be made by placing the first insulating layer **415** about the cable core **410**. The first insulating layer **415** can be heated until it becomes soft, and the first armor wire layer **420** can be placed about the soft first insulating layer **415**; thereby, allowing the first armor wire layer **420** to at least partially embed into the first insulating layer **415**.

[0073] The second insulating layer **430** can be placed about the first armor wire layer **420** by first extruding a polymeric material over the first armor wire layer, wrapping the barrier **435** about the polymeric material, and extruding additional polymeric material about the barrier **435**. The barrier **435** can be wrapped about the polymeric material such that it does not overlap.

[0074] The second insulating layer **430** can be heated to make the outer polymeric material soft; the second armor wire layer **440** can be placed about the second insulating layer **430**, and the second armor wire layer **440** can be at least partially embedded into the second insulating layer **430**; however, the depth of embedment is

controlled by the location of the barrier **435**. The second armor wire layer **440** can be placed about the second insulating layer **430** by cabling the second armor wire layer **440** counter-helically about the second insulating layer **430**.

[0075] The outer jacket **450** can be placed about the second armor wire layer **440**, and the outer jacket **450** can bond with the second insulating layer **430**. The outer jacket **450** can be shaped to have a circular outer profile.

[0076] FIG. 5A depicts another embodiment of a cable. FIG. 5B depicts a cable core of the cable of FIG. 5A with a first armor wire layer located thereabout. FIG. 5C depicts the first armor wire layer of FIG. 5B with a second insulating layer located thereabout. FIG. 5D depicts a second armor wire layer located about the second insulating layer of FIG. 5C.

[0077] Referring to FIGS. 5A to 5D, the cable **500** has a cable core **510**, a first armor layer **520**, a second armor layer **540**, a barrier **535**, and an outer jacket **550**.

[0078] The cable core **510** has a first insulating layer **515** located thereabout. The first armor wire layer **520** is located about the first insulating layer **515**.

[0079] A second insulating layer **530** is located about the first armor wire layer **520**. The second insulating layer **530** has the barrier **535** integrated therewith. The barrier **535** can be cross-linked polymer. For example, the barrier can be cross-linked ethene-co-tetrafluoroethene ("ETFE"), cross-linked fluoropolymer, cross-linked fluoroelastomer, or another polymer that is cross-linked. The second insulating layer **530** can be formed by extruding a first layer of polymer about the first armor wire layer, extruding the barrier **535** about the first layer of polymer, and extruding a second layer of polymer **538** about the barrier. The layers of polymer can be virgin polymer or other polymers.

[0080] The second armor wire layer **540** is located about the second insulating layer **530**, and the outer jacket **550** is located about the second armor wire layer **540**. The outer jacket **550** can bond with the second insulating layer **530**.

[0081] The cable **500** can be made by extruding the first insulating layer **515** over the cable core **510**. The first insulating layer **515** can be heated to make it soft, and the first armor wire layer can be helically cabled about the soft first insulating layer **515**, allowing the first armor wire layer **520** to at least partially embed into the first insulating layer **515**.

[0082] The second insulating layer **530** can be placed about the first armor wire layer **520**. For example, a first layer of polymer can be extruded about the first armor wire layer **520**, the barrier **535** can be extruded about the first layer of polymer and a second layer of polymer **538** can be extruded about the barrier **535**. The first layer of polymer can bond with the first insulating layer **515**.

[0083] The second insulating layer **530** can be heated to soften it, and the second armor wire layer **540** can be placed about the softened second insulating layer **530**; thereby, allowing the second armor wire layer **540** to at least partially embed into the second insulating layer **530**. The second armor wire layer **540** can be cabled counter-helically about the second insulating layer **530**. The depth that the second armor wire layer **540** can penetrate into the second insulating layer **530** is controlled by the location of the barrier **535**.

[0084] The outer jacket **550** can be extruded about the second armor wire layer **540**, and the outer jacket **550** can bond with the second insulating layer **530**.

[0085] FIG. 6A depicts another embodiment of a cable. FIG. 6B depicts the cable core of the cable of FIG. 6A with a first armor wire layer located thereabout. FIG. 6C depicts a second insulating layer disposed about the first armor wire layer of FIG. 6B. FIG. 6D depicts a second armor wire layer disposed about the second insulating layer of FIG. 6C.

[0086] Referring to FIGS. 6A to 6D, the cable **600** has a cable core **610**, a first armor layer **620**, a second armor layer **640**, a barrier **635**, and an outer jacket **650**.

[0087] The cable core **610** has a first insulating layer **615** located thereabout. The first insulating layer **615** has the first armor wire layer **620** located thereabout. A second insulating layer **625** is located about the first armor wire layer **620**.

[0088] The second insulating layer **625** has the barrier **635** integrated therewith. The barrier **635** can be helically cabled yarn in a matrix of ETFE, fluoropolymer, or another polymer.

[0089] The second armor wire layer **640** is located about the second insulating layer **625**, and the outer jacket **650** is located about the second armor wire layer **640**.

[0090] The cable **600** can be made by extruding the first insulating layer **615** about the cable core **610**. The first insulating layer **615** can be heated until it is soft, and the first armor wire layer **620** can be placed about the first insulating layer **615**. The first armor wire layer **620** can be helically cabled about the first insulating layer **615**, and the first armor wire layer **620** can at least partially embed into the first insulating layer **615**.

[0091] The second insulating layer **630** can be placed about the first armor wire layer **620**. For example, the second insulating layer **630** can be placed about the first armor wire layer **620** by extruding a first layer of polymer about the first armor wire layer **620**, extruding the barrier **635** about the first layer of polymer and extruding a second layer of polymer about the barrier **635**.

[0092] The second insulating layer **630** can be heated to make it soft, and the second armor wire layer **640** can be placed about the second insulating layer **630**. For example, the second armor layer **640** can be counter-helically cabled about the second insulating layer **630**, and the second armor layer **640** can at least partially embed into the second insulating layer **630**. The barrier **635** limits the penetration depth of the second armor wire layer **640**.

[0093] The outer jacket **550** can be extruded about the second armor wire layer **540**, and the outer jacket **550** can bond with the second insulating layer **630**.

[0094] FIG. 7 depicts a flow diagram of an embodiment of a method of making a cable.

[0095] The method **700** is depicted as a series of operations or blocks.

[0096] The method includes providing a cable core (box **710**). The method also includes applying a first insulating layer to the cable core (box **720**). Then the method includes placing a first armor wire layer about the first insulating layer (box **730**).

[0097] The method can also include applying a second insulating layer about the first armor wire layer (box **740**), and bonding the second insulating layer with the first insulating layer (box **750**). The method further includes placing a second armor wire layer about the second insulating layer (box **760**).

The method further includes placing an outer jacket about the second armor wire layer (box **770**), and bonding the outer jacket with the second insulating layer (box **780**).

[0098] Although example assemblies, methods, systems have been described herein, the scope of coverage of this patent is not limited thereto. On the contrary, this patent covers every method, apparatus, and article of manufacture fairly falling within the scope of the appended claims either literally or under the doctrine of equivalents.

CLAIMS:

1. A cable comprising:
 - a cable core;
 - a first armor wire layer, wherein the first armor wire layer is embedded in a first insulating layer disposed about the cable core;
 - a second armor wire layer, wherein the second armor wire layer is segregated from the first armor wire layer, wherein the second armor wire layer is separated from the first armor wire layer by a second insulating layer, wherein the second insulating layer comprises a low-melt-temperature polymer disposed about a high-melt-temperature polymer, a plurality of ridges, a carbon reinforced polymer, a bondable tape, cross-linked polymer bonded with another polymer, a cabled yarn, or combinations thereof; and
 - an outer jacket disposed about the second armor wire layer.
2. The cable of claim 1, further comprising:
 - a first insulating layer disposed between the cable core and the first armor wire layer.
3. The cable of claim 2, further comprising:
 - a second insulating layer disposed between the first armor wire layer and the second armor wire layer, wherein the first insulating layer is bonded with the second insulating layer.
4. A method of making a cable, wherein the method comprises:
 - placing a first armor wire layer about a cable core and a first insulating layer;
 - placing a second insulating layer about the first armor wire layer;
 - shaping the second insulating layer to have a plurality of ridges or integrating a barrier into the second insulating layer;
 - placing a second armor wire layer about the second insulating layer, thereby, segregating the first armor wire layer from the second armor wire layer; and
 - placing an outer jacket about the second armor wire layer.

5. The method of claim 4, further comprising:
heating the first insulating layer before the first armor wire layer is disposed thereabout, allowing the first armor wire layer to at least partially embed into the first insulating layer.
6. The method of claim 4 or 5, wherein the method further comprising:
embedding the second armor wire layer into the second insulating layer by heating an outer portion of the second insulating layer that is disposed about an inner portion of the second insulating layer.
7. The method of any one of claims 4 to 6, wherein the barrier comprises a bondable tape, a cross-linked polymer, or a cabled yarn.
8. A method of making a cable, wherein the method comprises:
placing a first armor wire layer about a cable core and a first insulating layer;
heating the first insulating layer before the first armor wire layer is disposed thereabout, allowing the first armor wire layer to fully embed into the first insulating layer;
placing a second armor wire layer about the first armor wire layer, wherein the armor wire layers are separated from one another by a second insulating layer; and
placing an outer jacket about one of the armor wire layers.
9. The method of claim 8, further comprising heating the second insulating layer before the second armor wire layer is disposed thereabout, allowing the second armor wire layer to fully embed into the second insulating layer and maintaining separation of the first armor wire layer from the second armor wire layer.
10. The method of claim 8 or 9, wherein the first insulating layer fills interstitial spaces in the first armor wire layer.
11. The method of any one of claims 8 to 10, wherein the second insulating layer comprises a plurality of ridges.

12. The method of any one of claims 8 to 11, wherein the second insulating layer comprises a barrier.

13. The method of any one of claims 8 to 11, wherein the second insulating layer comprises a bondable tape.

14. The method of any one of claims 8 to 13, wherein the outer jacket fills interstitial spaces in the second armor wire layer.

IS13.4473-US-PSP
Varkey et al.

1/7

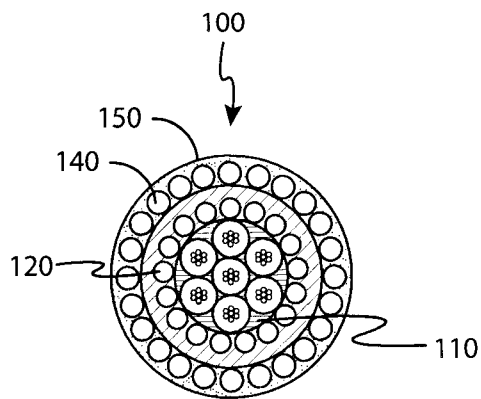


FIG. 1A

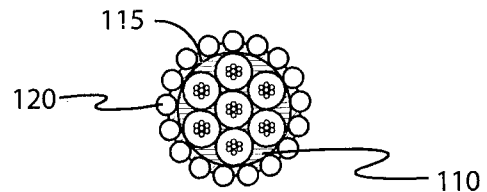


FIG. 1B

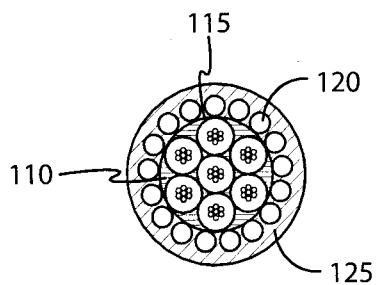


FIG. 1C

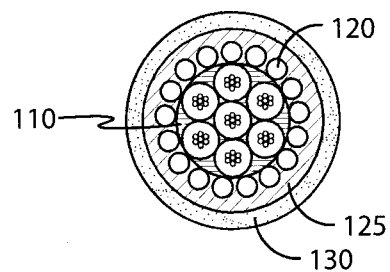


FIG. 1D




FIG. 1E

IS13.4473-US-PSP
Varkey et al.

2/7

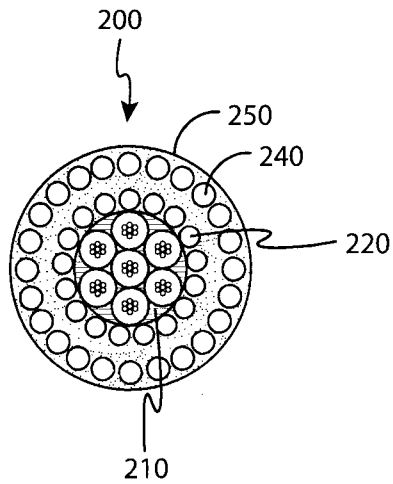


FIG. 2A




FIG. 2B




FIG. 2C

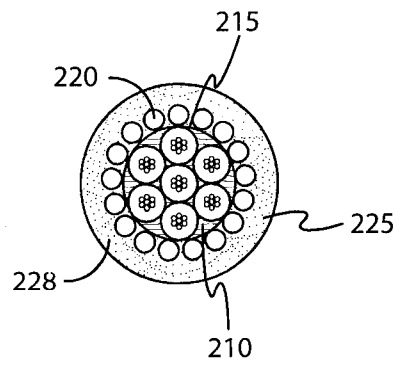


FIG. 2D

IS13.4473-US-PSP
Varkey et al.

3/7

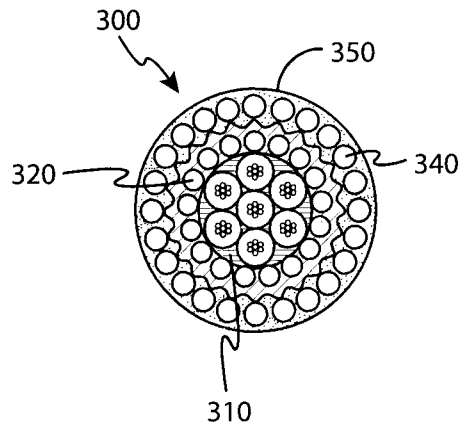


FIG. 3A




FIG. 3B

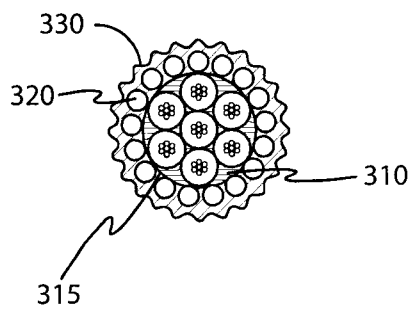


FIG. 3C

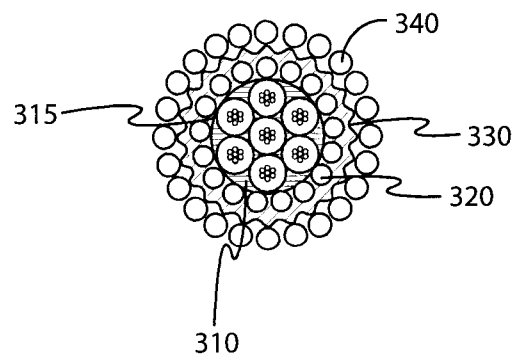


FIG. 3D

IS13.4473-US-PSP
Varkey et al.

4/7

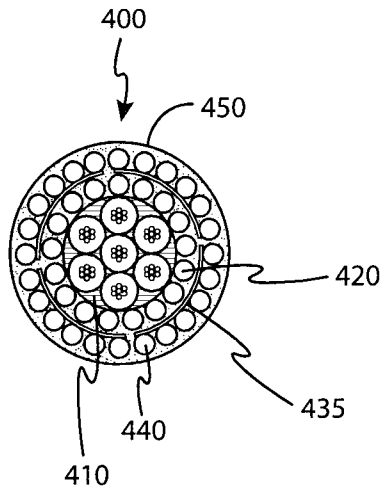


FIG. 4A

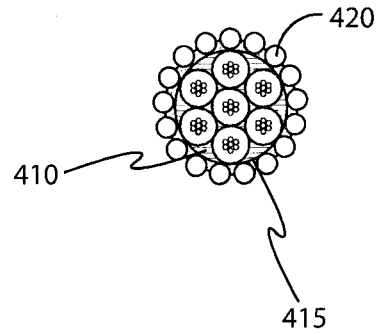


FIG. 4B

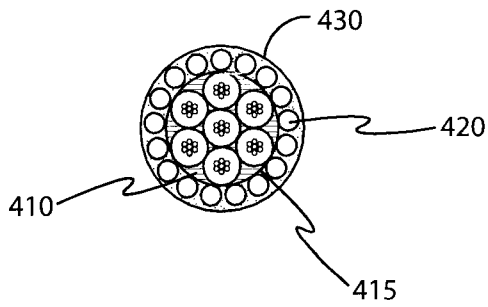


FIG. 4C

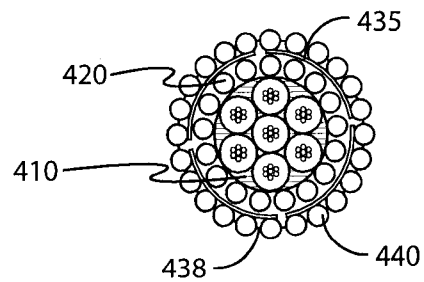


FIG. 4D

IS13.4473-US-PSP
Varkey et al.

5/7

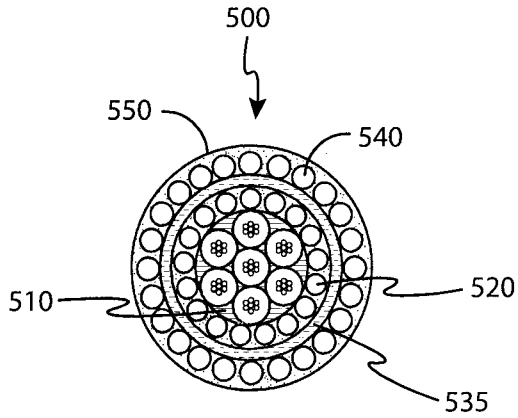


FIG. 5A

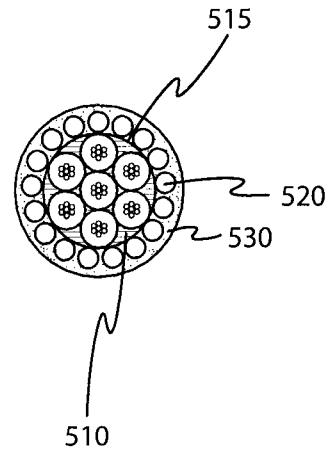


FIG. 5B

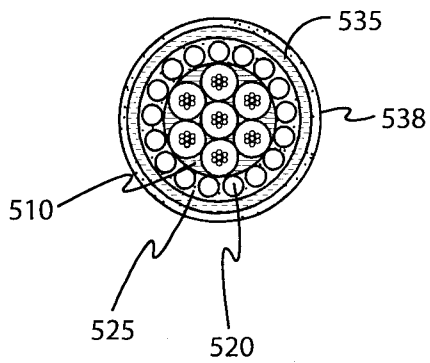


FIG. 5C

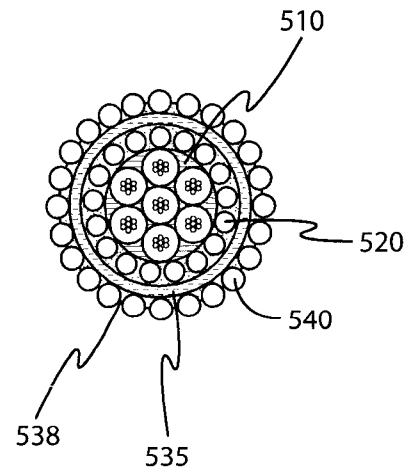


FIG. 5D

IS13.4473-US-PSP
Varkey et al.

6/7

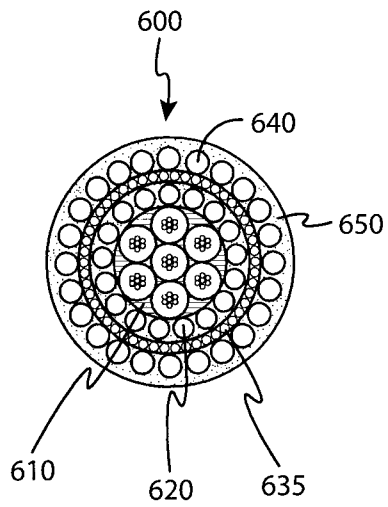


FIG. 6A

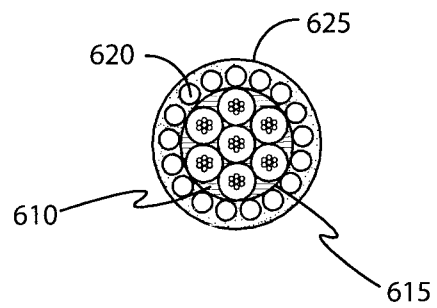


FIG. 6B

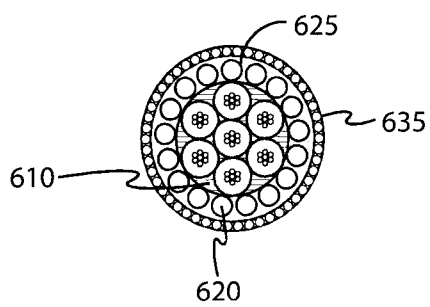


FIG. 6C

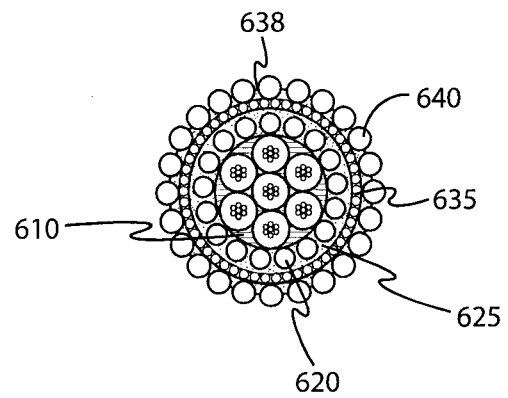


FIG. 6D

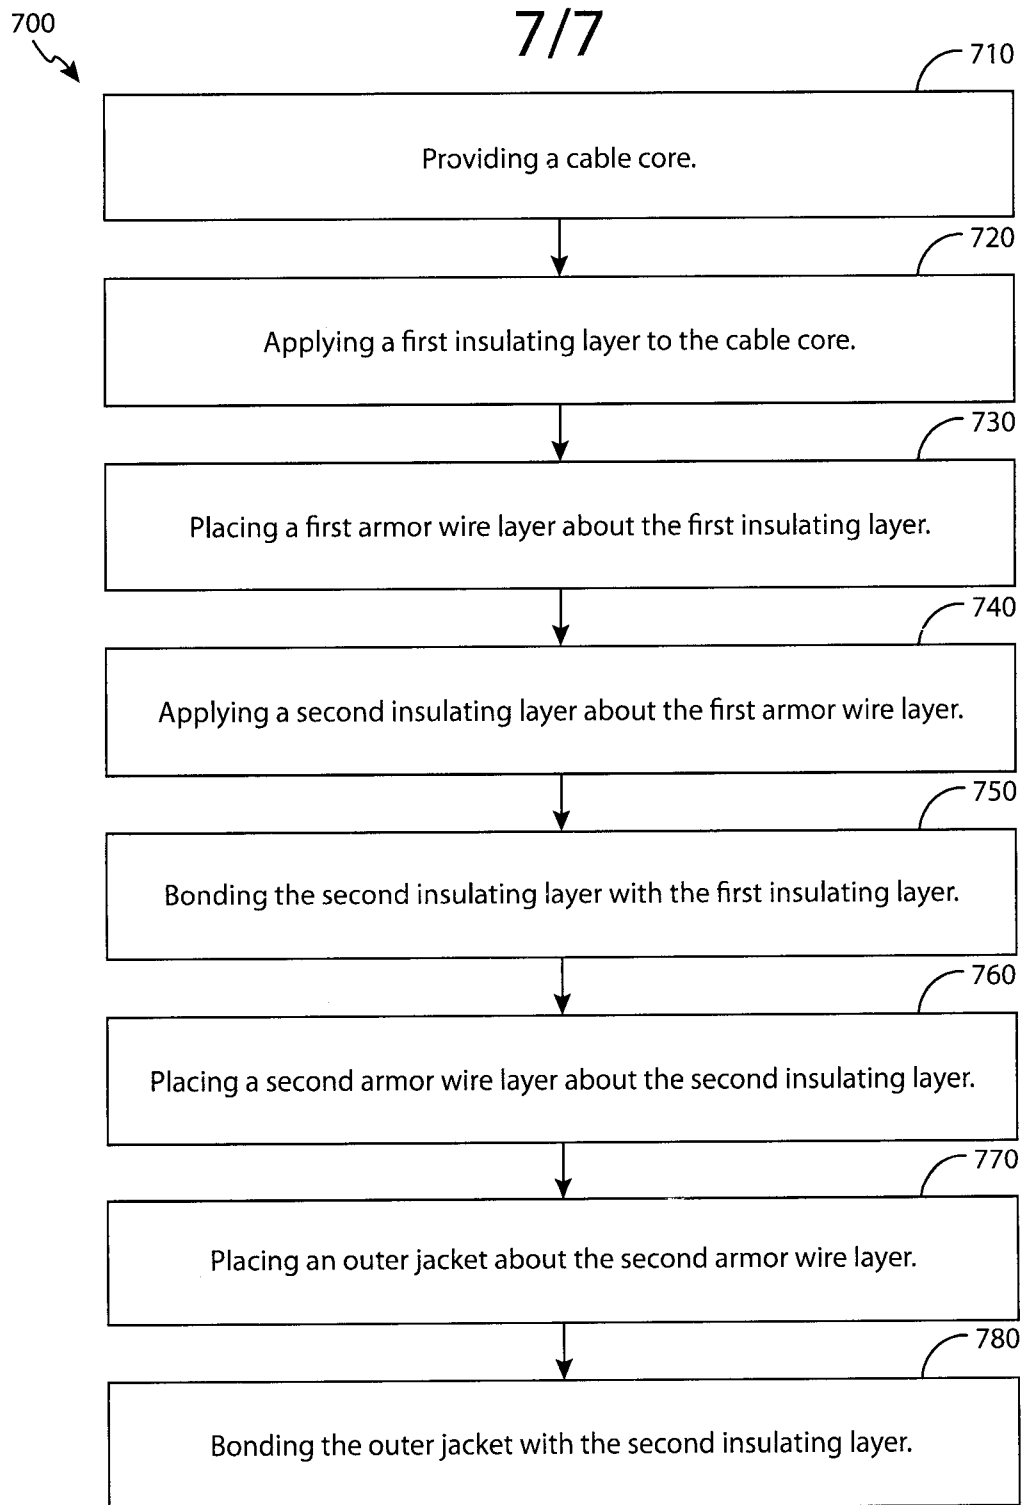
IS13.4473-US-PSP
Varkey et al.

FIG. 7

