

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
24 November 2005 (24.11.2005)

PCT

(10) International Publication Number
WO 2005/111152 A1

(51) International Patent Classification⁷: **C09C 1/00**, 1/64

(21) International Application Number:

PCT/US2005/016163

(22) International Filing Date: 10 May 2005 (10.05.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

60/569,940 11 May 2004 (11.05.2004) US

11/124,655 9 May 2005 (09.05.2005) US

(71) Applicant (for all designated States except US): **ENGELHARD CORPORATION** [US/US]; 101 Wood Avenue, P.O. Box 770, Iselin, NJ 08830-0770 (US).

(72) Inventors: **VENTURINI, Michael**; 2858 Mead Street, Yorktown Heights, NY 10598 (US). **LIU, Wei**; 13 Thomas Speakman Drive, Glen Mills, PA 19342 (US). **SULLIVAN, William**; 1707 Eagle Bay Drive, Ossining, NY 10562 (US).

(74) Agents: **HAMPILOS, Gus, T.** et al.; Engelhard Corporation, 101 Wood Avenue, P.O. Box 770, Iselin, NJ 08830-0770 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: ALUMINUM EFFECT PIGMENT BLENDS

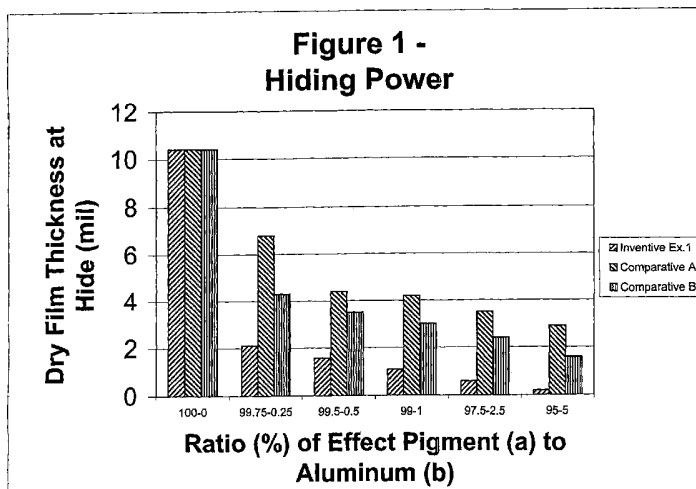

(57) Abstract: The present invention provides a blend which exhibits enhanced hiding power and comprises (a) at least one effect pigment and (b) about 0.01 to about 5 weight percent based on the total weight of said blend of an aluminium flake pigment. The present blend is advantageously used in automotive and industrial paint applications.

ALUMINUM EFFECT PIGMENT BLENDS

This application claims priority from U.S. Provisional Application No. 60/569,940 filed May 11, 2004.

BACKGROUND OF THE INVENTION

5 Effect pigments, also known as nacreous pigments and pearlescent pigments, are lustrous specialty chemical products that are widely used in a variety of high-end applications such as automotive finishes. Effect pigments simulate pearly luster or have effects that range from silky sheen to metallic luster as disclosed in L.M. Greenstein,
10 "Nacreous (Pearlescent) Pigments and Interference Pigments", The Pigment Handbook, Volume 1, Properties & Economics, Second Edition, Edited by Peter A. Lewis, John Wiley & Sons, Inc. (1988). One of the attributes of the effect pigments is that they can generate a range of optical effects depending on the angle at which they are viewed.

15 Pearlescent or nacreous pigments simulate the effect of natural pearl and are composed of thin platelets which are transparent in the visible region of the spectrum. The platelets are very smooth and part of the light which strikes the platelets is reflected and part is transmitted through the platelets. That part of the light that is transmitted is subsequently reflected
20 by other layers of platelets. The result is that multiple reflections from many layers occur and this results in depth of sheen since the eye cannot focus on one particular layer.

 The reflection that occurs is specular in that the angle of incidence equals the angle of reflection. The amount of light reflected at non-specular
25 angles is small and the amount of light reflected diminishes very quickly as the specular angle is passed. The result is that pearlescent pigments are extremely sensitive to viewing angle. In order for the maximum amount of light to be reflected, the platelets must be extremely smooth. Any surface roughness causes light to be scattered in a non-specular manner and
30 diminishes the lustrous effect.

The platelets must be aligned parallel to each other and to the substrate for maximum reflectivity. If not so aligned, light will be reflected randomly and again, luster will diminish. The amount of light that is reflected depends on the index of refraction. As the index of refraction increases, the amount of reflected light increases.

However, in a number of applications, the effect materials have a lesser degree of hiding power than desired. To remedy this problem, a variety of materials have been incorporated in effect pigment formulations.

Effect pigments are often based on platelet shaped particles. Because the optical effect is the result of multiple reflections and transmission of light, it is desirable to provide particles that will align in the medium in which they are found and to optimize the desired effect. The presence of either misaligned particles or particles of an additive, or both, interferes with this objective and diminishes the optical effect of the pigment. It is therefore generally considered to be desirable for any additive being used for increased hiding to be somehow bound to the platelets rather than present as part of a physical mixture.

Effect pigments, particularly pigments based on mica, have long been used in automotive top coats in order to achieve a colored metallic effect, among other reasons. That metallic effect can be characterized by the flip-flop of light to dark as the viewing angle is changed. In the case of mica pigments, that flip-flop is from the reflection color of the mica to dark. Most automotive top coats are required to be opaque to ultraviolet light and also to visible light when applied at a conventional thickness of about 0.5 to 1.2 mils (about 12.7-30.5 μm) for a variety of reasons. It has been a challenge to maintain the "face" or reflection color which is contributed by the mica pigment while at the same time developing hiding in that it is known that opaque pigments greatly reduce the color/effect of the mica pigments.

Metallic flake pigments such as aluminum are opaque to light, i.e.,

no light is transmitted. Because of the preceding property, metallic flake pigments cover well and thus, the substrate over which they are coated can be completely hidden. This property is known as hiding power.

Blends of aluminum metal pigments with mica pigments (such as TiO₂-coated mica pigment) are well known. For instance, U.S. Patent 6,503,965 teaches an ink which can contain a non-fluorescent pigment alone or a mixture of two or more non-fluorescent pigments which can be selected from a long list of such pigments, including aluminum flake pigments (with thickness ranging from about 0.1 to about 2 microns) and TiO₂- and Fe₂O₃-coated mica pigments. U.S. Patent 2,278,970 teaches that thin mica flakes are suitable for use as an inert filler in combination with aluminum flake pigment to extend the covering quality of the latter. U.S. Patent 6,331,326 teaches coating a primer and/or a first metallic paint containing a non-leafing type aluminum flake, and then applying a second metallic paint containing small thin flakes. The primer can be blended with a flat pigment, such as the thin aluminum flakes as well as flaky mica, to increase hiding power or hiding sand scratches on the substrate.

US Patent 6,306,931 teaches the use of preferred aluminum flake pigments that have median particle size of about 100 microns or less or especially 10 microns or less for incorporation into a coating. US Patent 6,398,861 teaches the use of an aluminum flake pigment having a diameter range of 6 microns to 600 microns for coatings.

Silberline.com advertises that its vacuum metallized aluminum flake can be used in cosmetics to achieve a smooth, mirror-like metallic effect and to deliver highly reflective, brilliant finishes.

Blends of aluminum with non-effect materials are also known. For example, U.S. Patent 4,937,274 teaches mixing aluminum flake pigments with ultrafine materials such as titanium dioxide. This coating composition does not include any interference (effect) mica pigments but is said to be still capable of providing an effect like those coatings containing the interference mica pigments and aluminum flake.

US Patent 6,267,810 teaches the use of a pigment comprising 15 grams of Cromal IV (Eckart) Al 14-18 microns and 15 grams of Fe₂O₃-coated Al₂O₃ flakes of particle size 5-60 microns in a printing ink in Example 2. No mention is made as to the effect, if any, provided by this pigment.

On May 11, 2004, www.eckartamerica.com reported that **METALURE®** pigments are microscopically thin aluminum platelets manufactured in a physical vapor deposition process to provide pigments with uniform thickness and homogeneous smooth surface. The average particle size range was 10-13 microns. On May 11, 2004, www.cosmetics.com reported that Eckart's **METALURE®** ultra brilliant aluminum dispersion when mixed with pearlescent provides polychromatic effects. The article is silent on the thickness of the aluminum pigment or the percentage of aluminum pigment used in combination with pearlescent.

The provision of new high hiding power compositions is still desired and it is the object of the present invention is to provide such compositions. This and other objects of the invention will become apparent to those skilled in this art from the following detailed description.

SUMMARY OF THE INVENTION

This invention relates to an effect pigment composition which exhibits enhanced hiding power. More particularly, the invention relates to an effect pigment composition which exhibits enhanced hiding power containing effect pigment and aluminum pigment. This invention also provides compositions using such formulations as a pigment. The improved hiding power is achieved while maintaining the face color of the effect pigment. Thus, the present invention provides a blend comprising: (a) at least one effect pigment; and (b) about 0.01 to about

5 weight percent based on the total weight of the blend of an aluminum metal pigment having a mirror-like appearance.

5 **BRIEF DESCRIPTION OF THE DRAWINGS**

Figure 1 illustrates the hiding power of Comparatives A and B and Inventive Example 1.

Figure 2 illustrates the chroma for Inventive Example 1.

Figure 3 illustrates the brightness for Inventive Example 1.

10 Figure 4 illustrates the brightness of the same dry film thickness at hide for Comparative B and Inventive Example 1.

Figure 5 illustrates the color intensity of the same dry film thickness at hide for Comparative B and Inventive Example 1.

15 Figure 6 illustrates the color travel of the same dry film thickness at hide for Comparative B and Inventive Example 1.

DESCRIPTION OF THE INVENTION

The present invention exhibits enhanced hiding power and comprises: (a) at least one effect pigment and (b) aluminum pigment.

20

Effect Pigment (a):

The effect pigments which may be employed in the present invention may be any known effect pigment, preferably based on mica, which is optionally coated with a wide variety of inorganic coloring agents. The different materials or substrates used in the present invention may have any morphology including platelet, spherical, cubical, acicular, whiskers, or fibrous. A mixture of different substrate materials or different substrate morphologies or both may be used in the present invention. Examples of useful platy materials include platy aluminum oxide, platy glass, platy titanium dioxide, aluminum, mica, bismuth oxychloride, platy iron oxide, platy graphite, platy silica, bronze, stainless steel, natural pearl, boron nitride, silicon dioxide, copper flake, copper

25

30

alloy flake, zinc flake, zinc alloy flake, zinc oxide, enamel, china clay, porcelain, gypsum, titanium silicate, and the like. Mica is desirable because of its high transparency, strong reflectance and strong chroma, primarily due to the presence of small, coated flakes. Glass flakes have the attributes of high transparency, very white bulk color and a sparkle effect in strong light.

Examples of useful spherical materials include glass, plastic, ceramic, metal, or an alloy and the spheres may be solid or hollow. Useful glass spheres are disclosed in US Patent 5,217,928, incorporated in its entirety herein by reference.

Useful cubical material includes glass cubes.

One useful metal oxide-coated glass platelets is described in commonly assigned U.S. Patent 5,753,371, the disclosure of which is hereby incorporated by reference. That patent discloses the coating of C glass in preference to A or E glasses. A glass is a soda-lime glass, commonly used to make windows and contains more sodium than potassium and also contains calcium oxide. C glass, also known as chemical glass, is a form which is resistant to corrosion by acid and moisture. E or electrical glass is, as the name implies, designed for electronic applications and although it is very stable at high temperatures, it can be susceptible to chemical attack. See also commonly assigned U.S. Patent 6,045,914. Engelhard **FIREMIST®** pearlescent pigment (calcium sodium borosilicate substrate with tin oxide and titanium dioxide) may be used in the present invention.

The metal oxide in most widespread use is titanium dioxide, followed by iron oxide. Other usable oxides include (but are not limited to) tin, chromium and zirconium oxides as well as mixtures and combinations of oxides. Other useful combinations of metal oxides include SiO₂ on calcium aluminum borosilicate and then TiO₂ thereon; substrate/SiO₂/Fe₂O₃; substrate/TiO₂/SiO₂; substrate/TiO₂/SiO₂/TiO₂;

substrate/TiO₂/SiO₂/Fe₂O₃; substrate/TiO₂/SiO₂/Cr₂O₃;
substrate/Fe₂O₃/SiO₂; substrate/Fe₂O₃/SiO₂/Fe₂O₃;
substrate/Fe₂O₃/SiO₂/TiO₂; substrate/Fe₂O₃/SiO₂/Cr₂O₃;
substrate/Cr₂O₃/SiO₂/Cr₂O₃; and substrate/Cr₂O₃/SiO₂/Fe₂O₃. Other
5 combinations of the above mentioned layers are obvious to one skilled
in the art. SnO₂ may also be used on the calcium aluminum
borosilicate.

An interlayer to enhance performance attributes may also be used.

Useful interlayer materials include the hydroxides and oxides of Al, Ce,
10 Cr, Fe, Mg, Si, Ti, and Zr. Essentially any organic or inorganic substance
may be a useful interlayer for adhesion promotion, mechanical integrity,
product enhancement, or other desirable attributes.

Most preferred are the well-known metal-oxide-coated mica effect
pigments. The metal oxide-coated substrate nacreous pigments are well
15 known and are exemplified by titanium dioxide- and/or iron oxide-coated
mica. Such pigments are described, for example, in U.S. Patents No.
3,437,513; 3,418,146; and 3,087,828 incorporated herein by reference
in their entireties. A preferred nacreous pigment is titanium dioxide-
coated mica. The mica flake substrates generally have a length of about
20 1 to about 75 microns, preferably about 5 to about 35 microns, and a
thickness between about 0.3 and about 3 microns, but both larger and
smaller dimensions can also be employed. Usually, the titanium dioxide
or other metal oxide will be coated on the substrate surface to a
thickness of about 20-350 nanometers or such that it is about 50 to 500
25 mg/m², depending on the specific surface area of the substrate in m²/g.
Depending on the thickness of the metal oxide coating, the pigments can
exhibit interference or reflection colors of blue, green, yellow, red, etc.

The metal oxide-coated pigment can be optionally coated with a
wide variety of inorganic and organic coloring agents or dyestuffs.
30 Examples are described, for instance, in U.S. Patent Nos. 4,084,983;

4,755,229; 4,968,351; and 6,436,538.

The metal oxide-coated pigment may, if desired, contain absorption pigments, which are water insoluble, transparent (i.e. substantially non-light scattering) and which cannot be formed in situ
5 from a water soluble reactant(s) but which may be highly dispersed in water or water-alcohol containing anionic polymer. These include, for example, organic pigments in the following groups: azo compounds, anthraquinones, perinones, perylenes, pyrroles such as diketopyrrolo pyrroles, quinacridones, thioindigos, dioxazines and phthalocyanines and
10 their metal complexes. The absorption pigments, depending on their color intensity, are used in a concentration range of about 0.01% to about 30% based on the weight of platy substrate, preferably 0.1% to 10%.

Colors may be adjusted if desired by mixing combination pigments.
15 In general, it is preferred to mix pigments of the same or similar reflection color, since reflection colors mix additively and color intensity is reduced when very different reflection colors are mixed. The absorption pigment components mix subtractively, and the usual pigment blending procedures are followed.

20

Aluminum Pigment (b):

The aluminum flake pigments used in the present invention act like a non-leafing grade by distributing themselves throughout the final product. The particle size, i.e., the greatest dimension, of the pigments
25 typically ranges in size from about 1 to about 200 μm . Preferably, the average particle size of the aluminum flake pigment is not greater than about 20 μm . Preferably, the aluminum flake pigments used in the present invention have a thickness of about 0.01 to about 0.05 μm . Such pigments are often referred to as a vacuum metallized flakes or
30 VMF type of aluminum pigments due to their manner of manufacture,

namely, vacuum metallization or physical vapor deposition on a substrate. Conventional aluminum flake pigments typically have a thickness of about 0.1 micron to about 0.5 micron and thus, the present aluminum flake pigments are considerably thinner. Compared with
5 conventional aluminum flake pigments, the present aluminum flake pigment has an extremely smooth surface and thus, a mirror-like appearance. One commercially available useful aluminum flake is **STARBRITE®** aluminum flake from Silberline.

The results achieved with the VMF-type aluminum flake pigments
10 of the present invention are surprising and unexpected. Due to the fact that these VMF-type aluminum flake pigments are much thinner than the conventional aluminum flake pigments, there are more flakes per unit of weight. Using conventional aluminum flakes, the more flakes present, the greater the loss of color of the effect pigment as shown in
15 Comparative B below. Since for any given weight of aluminum pigment, there are more VMF flakes than conventional flakes, it is expected that the decrease in the face color of the mica pigments should be achieved more quickly. That, however, is the opposite of what happens provided that the VMF-type aluminum pigment is present in an amount that does
20 not exceed about 5% of the total weight of the blend of the VMF-type aluminum flake pigment and effect pigment. Preferably the aluminum pigment constitutes about 0.1 to about 5 weight percent of the total weight of the blend and more preferably about 0.25 to about 0.5 weight percent.

25 The aluminum flake pigment and effect pigments used in the present invention can be mixed in any convenient fashion. No special procedures are required. One useful method is disclosed in Silberline US Patent 4,725,317 incorporated herein by reference in its entirety.

The preparation process comprises forming a coherent paste
30 comprising an organic binder medium, an organic liquid vehicle and the

metal pigment, in powder or flake form, the paste being formed by mixing a first component comprising the organic binder medium and a second component comprising the metal pigment with either or both of the first and second components comprising organic liquid vehicle and
5 the paste containing from 1 to 70% preferably from 3 to 45%, especially from 5 to 30%, of the organic binder medium based on the weight of the metal pigment, and removing substantially all of the organic liquid vehicle(s) from the coherent paste, optionally after sub-dividing the coherent paste into particles, such as pellets, tablets or granules, each
10 containing a plurality of the metal pigment particles dispersed in a matrix of organic binder medium.

The resulting solid metal pigment composition comprises the metal pigment particles dispersed in a matrix of the organic binder material, the relative proportions of the binder material and metal in the solid product
15 being substantially the same as in the coherent paste. The coherent paste preferably is sub-divided, as by pelletizing, granulating or tableting for example, to assist removal of the organic liquid vehicle(s) and the solid metal pigment composition is then in a physical form which is easy to handle, non-explosive, and simple to use in a variety of applications.
20 The organic liquid vehicle(s) may be removed from the coherent paste, for example, in a vacuum oven at elevated temperature.

Those binder materials that form a stable concentrated solution in the same organic liquids as are used for the preparation of metal flake, e.g. mineral spirits, may be used as this greatly simplifies the recovery of
25 the organic liquid for re-use. In principle, however, any organic liquid or mixture of liquids that is chemically inert with respect to the metal powder and the binder material and which has a boiling point which is below the boiling point of any liquid binder used as such or formed by melting during removal of organic liquid vehicle may be employed as
30 organic liquid vehicle.

Apparatus suitable for use in the preparation of these easily handled physical forms is well known to those skilled in the art. Pellets may be formed by forcing the precursor coherent paste through a number of suitably sized holes in a plate. The organic liquid vehicle is again removed such as by evaporation.

Utility:

The products of the present invention can be used in any application where pearlescent pigments have been used heretofore. Thus, the products of this invention have an unlimited use in all types of automotive and industrial paint applications, especially in the organic color coating and inks field where deep color intensity is required. For example, these pigments can be used in mass tone or as styling agents to spray paint all types of automotive and non-automotive vehicles. Similarly, they can be used on all clay/formica/wood/ glass/metal/ enamel/ceramic and non-porous or porous surfaces. The pigments can be used in powder coating compositions. They can be incorporated into plastic articles geared for the toy industry or the home. The present blends may also be incorporated into polymeric containers or packages such as personal care and cosmetics containers such as for skin care products such as facial mask, UV protective lotion, liquid soap, and antimicrobial product; hair care products such as shampoo, conditioner, hair spray or fixative, and hair colorant; makeup products such as nail polish, mascara, eye shadow, and perfume; shaving cream, deodorant, and baby oil. These pigments can be impregnated into fibers to impart new and esthetic coloring to clothes and carpeting. They can be used to improve the look of shoes, rubber and vinyl/marble flooring, vinyl siding, and all other vinyl products. In addition, these colors can be used in all types of modeling hobbies.

The above-mentioned compositions in which the compositions of this invention are useful are well known to those of ordinary skill in the art. Examples include printing inks, nail enamels, lacquers, thermoplastic and thermosetting materials, natural resins and synthetic resins. Some non-limiting examples include polystyrene and its mixed polymers, polyolefins, in particular, polyethylene and polypropylene, polyacrylic compounds, polyvinyl compounds, for example polyvinyl chloride and polyvinyl acetate, polyesters and rubber, and also filaments made of viscose and cellulose ethers, cellulose esters, polyamides, polyurethanes, polyesters, for example polyglycol terephthalates, and polyacrylonitrile.

For a well-rounded introduction to a variety of pigment applications, see Temple C. Patton, editor, *The Pigment Handbook*, volume II, *Applications and Markets*, John Wiley and Sons, New York (1973). In addition, see for example, with regard to ink: R.H. Leach, editor, *The Printing Ink Manual*, Fourth Edition, Van Nostrand Reinhold (International) Co. Ltd., London (1988), particularly pages 282-591; with regard to paints: C.H. Hare, *Protective Coatings*, Technology Publishing Co., Pittsburgh (1994), particularly pages 63-288. The foregoing references are hereby incorporated by reference herein for their teachings of ink, paint and plastic compositions, formulations and vehicles in which the compositions of this invention may be used including amounts of colorants. For example, the pigment may be used at a level of 10 to 15% in an offset lithographic ink, with the remainder being a vehicle containing gelled and ungelled hydrocarbon resins, alkyd resins, wax compounds and aliphatic solvent. The pigment may also be used, for example, at a level of 1 to 10% in an automotive paint formulation along with other pigments that may include titanium dioxide, acrylic lattices, coalescing agents, water or solvents. The pigment may also be used, for example, at a level of 20 to 30% in a plastic color concentrate in polyethylene.

In the cosmetic and personal care field, these pigments can be used in the eye area and in all external and rinse-off applications. Thus, they can be used in hair sprays, face powder, leg-makeup, insect repellent lotion, mascara cake/cream, nail enamel, nail enamel remover, 5 perfume lotion, and shampoos of all types (gel or liquid). In addition, they can be used in shaving cream (concentrate for aerosol, brushless, lathering), skin glosser stick, skin makeup, hair groom, eye shadow (liquid, pomade, powder, stick, pressed or cream), eye liner, cologne stick, cologne, cologne emollient, bubble bath, body lotion (moisturizing, 10 cleansing, analgesic, astringent), after shave lotion, after bath milk and sunscreen lotion.

Analytical Methods:

15 Dry film thickness at hide is determined by preparing the samples according to ASTM D6762-02a Standard Test Method for Determining the Hiding Power of Paint by Visual Evaluation of Spray Applied Coatings and then testing the prepared samples according to ASTM D1400-00 20 Standard Test Method for Non-Destructive Measurement of Dry Film Thickness of Non-Conductive Coatings Applied to Non-Ferrous Metal Base.

The presence of aluminum metal pigment may be determined by optical microscopic analysis.

25 The presence of a blend may be determined by optical microscopic analysis.

In order to further illustrate the present invention, a number of non-limiting examples are set forth below. In these, as well as throughout this specification and claims, all parts and percentages are by 30 weight and all temperatures are in degrees centigrade, unless otherwise indicated.

Faced with the automotive industry need for a new hiding power

composition, we proceeded as follows.

Comparative A

TUFFLAKE® 3650 pigment is an aluminum flake that is supplied
5 by Silberline, has a thickness of one micron, is made by ball milling, and
as a result, has a rough surface finish and dull appearance. **LUMINA®**
green pigment is an effect pigment that is supplied by Engelhard
Corporation and comprises about 66 weight percent TiO₂ and 31 weight
percent mica. Blends of **TUFFLAKE®** 3650 pigment and **LUMINA®**
10 green pigment were made at ratios of 99.75% to 0.25%; 99.5% to
0.5%; 99% to 1%; 97.5% to 2.5%; and 95% to 5%. The hiding power
of these blends and 100% **LUMINA®** green pigment was determined and
is set forth in the following Table and Figure 1.

Comparative B

SPARKLE SILVER® pigment is an aluminum flake that is supplied
by Silberline, has a thickness of 0.1 micron, and has a polished surface
finish and brighter appearance. Blends of **SPARKLE SILVER®** pigment
and **LUMINA®** green pigment as described in Comparative A above were
20 made at ratios of 99.75% to 0.25%; 99.5% to 0.5%; 99% to 1%;
97.5% to 2.5%; and 95% to 5%. The hiding power of these blends and
100% **LUMINA®** green pigment was determined and is set forth in the
following Table and Figure 1.

Inventive Example 1

We then stumbled upon the following unexpected result.
STARBRITE® pigment is an aluminum flake that is supplied by Silberline,
is made by vacuum metallization, has a thickness of from about 0.01
micron to about 0.5 micron, and has a smooth surface finish and mirror-
30 like appearance. Blends of **STARBRITE®** pigment and **LUMINA®** green

pigment as described in Comparative A above were made at ratios of 99.75% to 0.25%; 99.5% to 0.5%; 99% to 1%; 97.5% to 2.5%; and 95% to 5%. The hiding power of these blends and 100% **LUMINA®** green pigment was determined and is set forth in the following Table and Figure 1. These blends yielded desirable dry film thickness at hide. Color data for these ratios are in Figures 2 and 3.

Since VMF-type aluminum flakes are thinner than conventional aluminum flakes, one would have expected that more flakes per gram for VMF would result in more opacifying power while decreasing the face color of the effect pigments. Unexpectedly, we observed the opposite. At the same dry film thickness at hide of about 1.6 mils, Inventive Example 1 (ratio of effect pigment to aluminum of 99.5 to 0.5) had unexpectedly better brightness, color intensity, and color travel than Comparative B (ratio of effect pigment to aluminum of 95 to 5) as shown in Figures 4, 5, and 6. Thus, since Comparative B required more than 10X (ten times) the amount of conventional aluminum flake to achieve the same opacity as the present invention, the improved hiding power of Inventive Example 1 while maintaining the face color of the effect pigment was unexpected.

Ratio of Effect Pigment (a) to Aluminum Pigment (b)	100:0	99.75:0.25	99.5:0.5	99:1	97.2:2.5	95:5
Comparative A Hiding Power (dry film thickness at hide (mils))	10.4	6.8	4.4	4.2	3.5	2.9
Comparative B Hiding Power (dry film	10.4	4.3	3.5	3.0	2.4	1.6

thickness at hide (mils))						
Inventive Example 1 Hiding Power (dry film thickness at hide (mils))	10.4	2.1	1.6	1.1	0.6	0.2

Inventive Example 2

The metal oxide-coated material employed in Inventive Example 1
 5 is replaced with the same effect pigment further treated with a
 weatherability treatment in accordance with commonly assigned U.S.
 Patent 5,759,255 incorporated herein by reference.

Inventive Example 3

10 The blend of Inventive Example 1 is incorporated into a powder
 eye shadow of the following formulation:

	Ingredients	wt parts
	Talc	19.4
	Mearlmica SVA	15.0
15	Magnesium Myristate	5.0
	Silica	2.0
	Preservatives	0.5
	Product of example 1	50.0
	Octyl Palmitate	7.0
20	Isostearyl Neopentanoate	1.0
	BHT	0.1

Inventive Example 4

The blend of Inventive Example 1 is incorporated into a nail enamel
 25 of the following formulation:

	<u>Ingredients</u>	<u>wt parts</u>
	Suspending lacquer SLF-2	82.0
	Product of Inventive Example 1	3.0
	Lacquer 127P	10.5
5	Polynex B-75	2.5
	Ethyl Acetate	2.0

Inventive Example 5

10 A charge of 1.0 wt% of the product of Inventive Example 1 is added to polypropylene and dispersed therein and injected molded into a flat plaque.

Inventive Example 6

15 The blend of Inventive Example 1 is incorporated into a water based paint composition at a pigment/paint ratio of 0.13. The paint is sprayed onto a primed steel panel to about 15- 20 microns. This base coat is allowed to flash for at least 10 minutes, and then baked at 85°C for 6.5 minutes before cooling. A clearcoat is then applied to a thickness of 40-45 microns and the resulting panel is baked at 140°C for
20 30 minutes.

Inventive Example 7

The effect material blend of Inventive Example 1 is sprayed at 3.5 wt% loading in a polyester TGIC power coating using a corona gun over
25 a RAL 9005 black powder sprayed base.

Inventive Example 8

The pigment of this invention can be formulated into a powder eye shadow by thoroughly blending and dispersing the following materials:

30

Ingredients

wt parts

	MEARLTALC TCA® (Talc)	18
	MEARLMICA ® SVA (Mica)	20
	Magnesium Myristate	5
	Silica	2
5	CLOISONNÉ ® Red 424C (red TiO ₂ -coated mica)	20
	CLOISONNÉ ® Violet 525C (violet TiO ₂ -coated mica)	13
	CLOISONNÉ ® Nu-Antique Blue 626CB (TiO ₂ -coated mica/iron oxide-coated mica)	2
	CLOISONNÉ ® Cerise Flambé 550Z (iron oxide-coated mica)	2
10	Preservatives & Antioxidant	q.s.

Then 7 parts of octyl palmitate and 1 part of isostearyl neopentanoate are heated and mixed until uniform, at which time the resulting mixture is sprayed into the dispersion and the blending continued. The blended material is pulverized and then 5 parts of Cloisone Red 424C and 5 parts of the pigment blend of this invention added and mixed until a uniform powder eye shadow is obtained.

Inventive Example 9

The pigment blend can be formulated into a lipstick by placing the following amounts of the listed ingredients into a heated vessel and raising the temperature to $85 \pm 3^{\circ}\text{C}$:

	Ingredients	wt parts
	Candelilla Wax	2.75
	Carnauba Wax	1.25
	Beeswax	1.00
25	Ceresine Wax	5.90
	Ozokerite Wax	6.75
	Microcrystalline Wax	1.40
	Oleyl Alcohol	3.00
	Isostearyl Palmitate	7.50
30	Isostearyl Isostearate	5.00

	Caprylic/Capric Triglyceride	5.00
	Bis-Diglycerylpolyalcohol Adipate	2.00
	Acetylated Lanolin Alcohol	2.50
	Sorbitan Tristearate	2.00
5	Aloe Vera	1.00
	Castor Oil	37.50
	Red 6 Lake	0.25
	Tocopheryl Acetate	0.20
	Phenoxyethanol, Isopropylparaben, and butylparaben	1.00
10	Antioxidant	q.s.

A mixture of 13 parts of the pigment blend of Inventive Example 1 and 1 part of kaolin are added and mixed until all of the pigment is well dispersed. Fragrance is added as desired and mixed with stirring. The resulting mixture is poured into molds at $75 \pm 5^{\circ}\text{C}$ allowed to cool and
15 flamed into lipsticks.

Various changes and modifications can be made in the process and products of the present invention without departing from the spirit and scope thereof. The embodiments described and illustrated herein
20 were for the purpose of further illustrating the invention but were not intended to limit it.

WHAT IS CLAIMED IS:

1. Blend comprising:

(a) at least one effect pigment; and

5 (b) about 0.01 to about 5 weight percent based on the total weight of said blend of an aluminum metal pigment having a mirror-like appearance.

2. The blend of claim 1 wherein said effect pigment (a) comprises mica.

3. The blend of claim 2 wherein said effect pigment (a) is metal oxide-coated mica.

15 4. The blend of claim 3 wherein said effect pigment (a) is titanium dioxide-coated mica.

5. The blend of claim 3 wherein said effect pigment (a) is iron dioxide-coated mica.

20

6. The blend of claim 1 wherein at least two of said effect pigments are present.

7. The blend of claim 1 wherein said aluminum metal pigment
25 (b) is present at about 0.25 to about 0.5 weight percent.

8. The blend of claim 1 wherein said aluminum metal pigment (b) is made by vacuum metallization.

30 9. The blend of claim 1 wherein said aluminum metal pigment (b)

is made by vapor deposition.

10. The blend of claim 1 wherein said aluminum metal pigment (b) has a thickness of less than or equal to about 0.1 micron.

**Figure 1 -
Hiding Power**

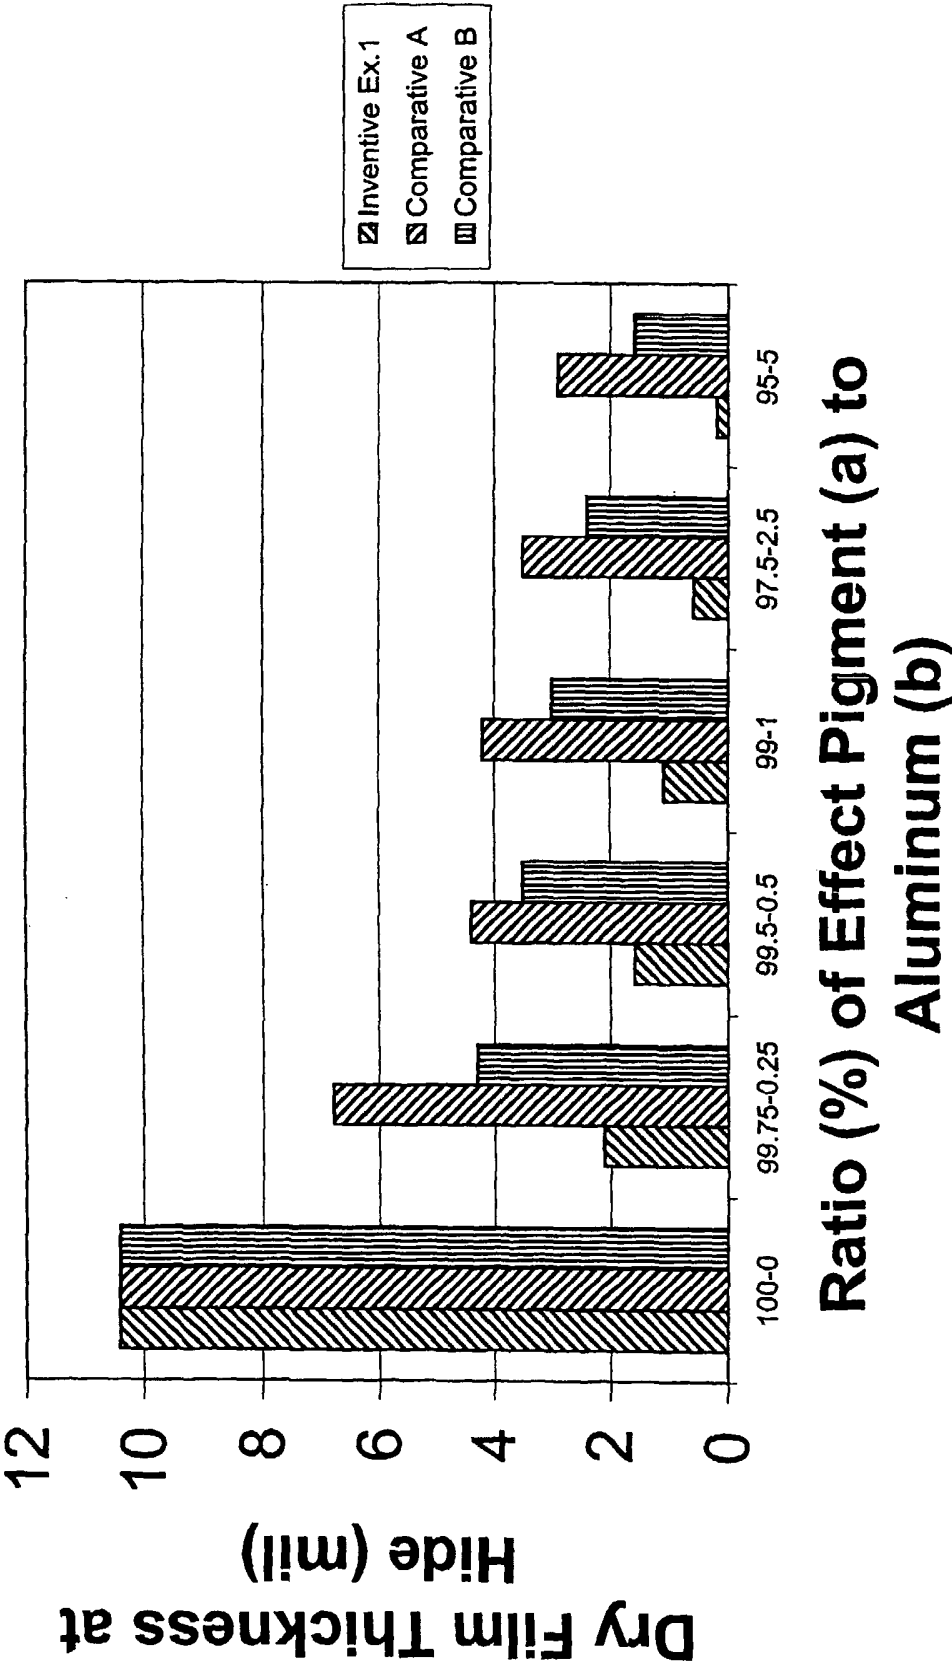


Figure 2 - Chroma

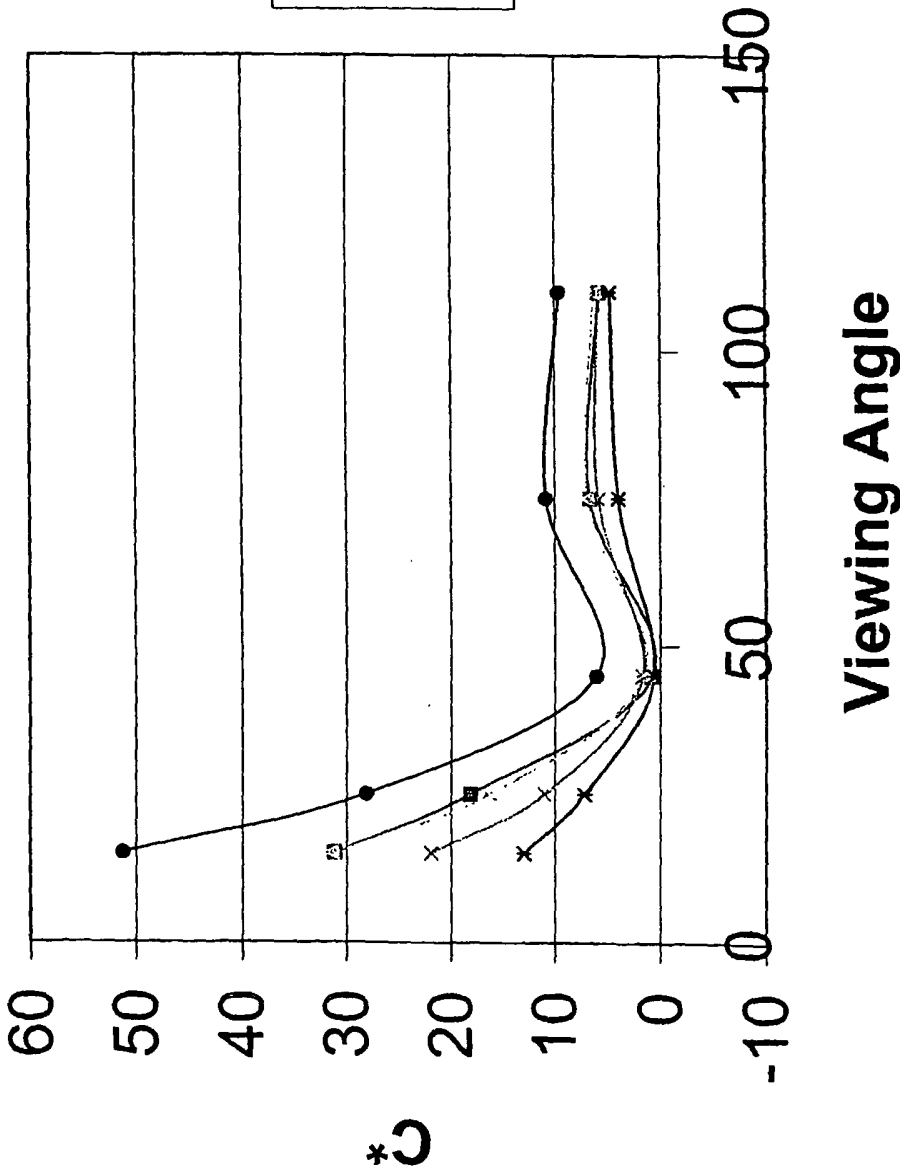


Figure 3 - Brightness

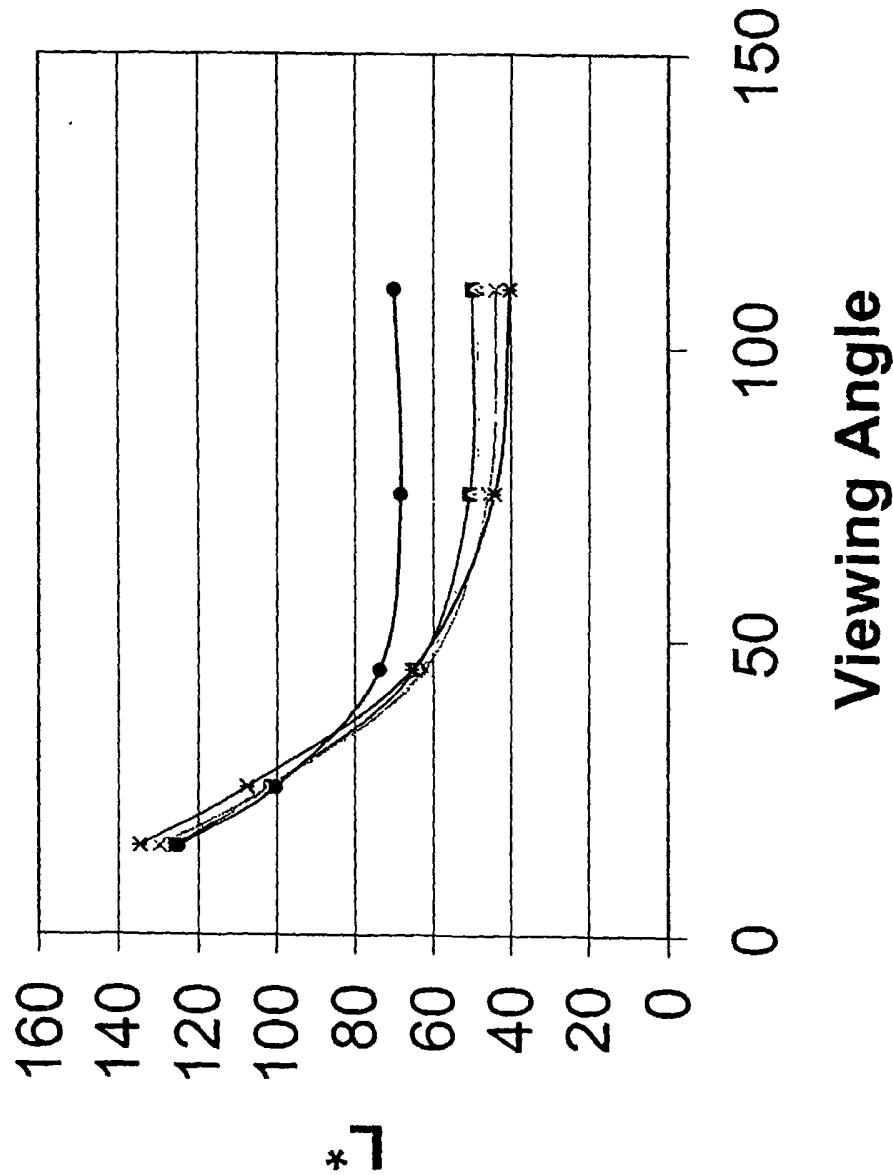


Figure 4 - Brightness

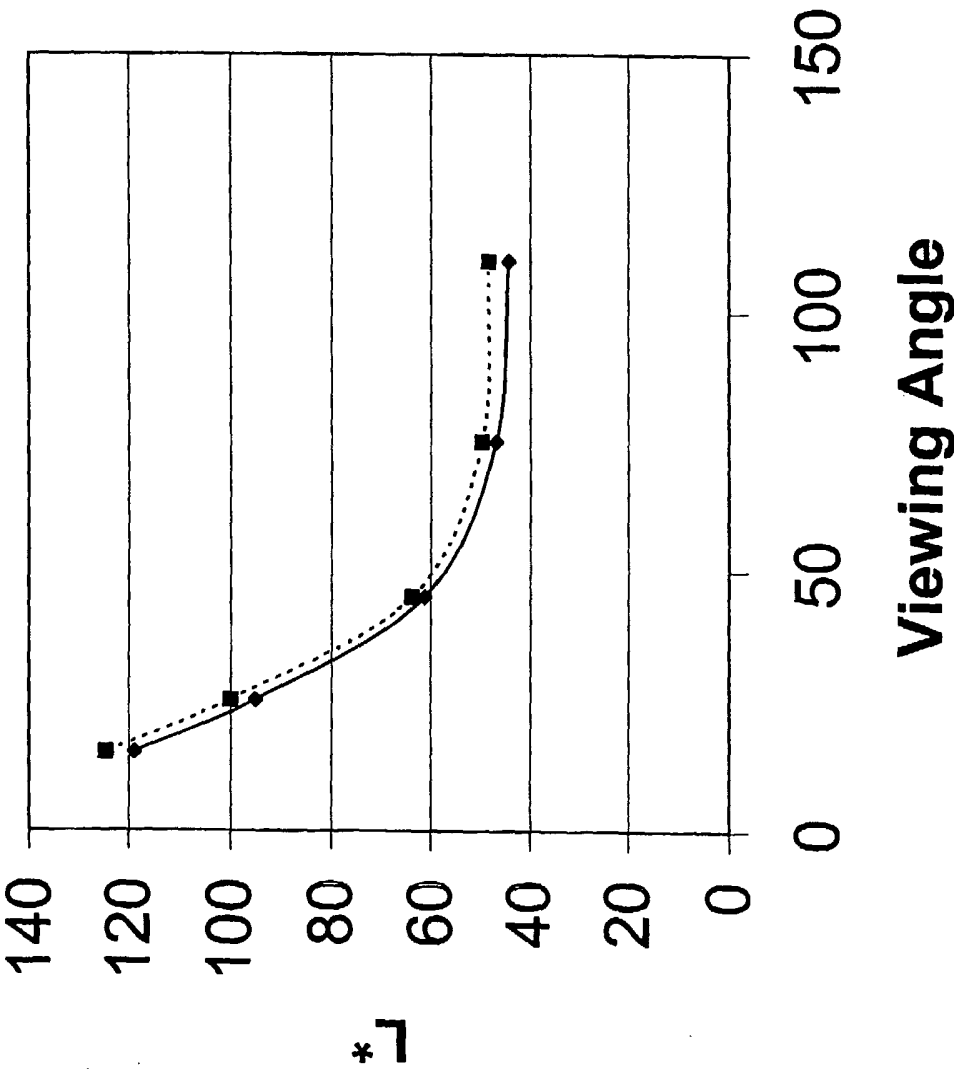


Figure 5 - Color Intensity


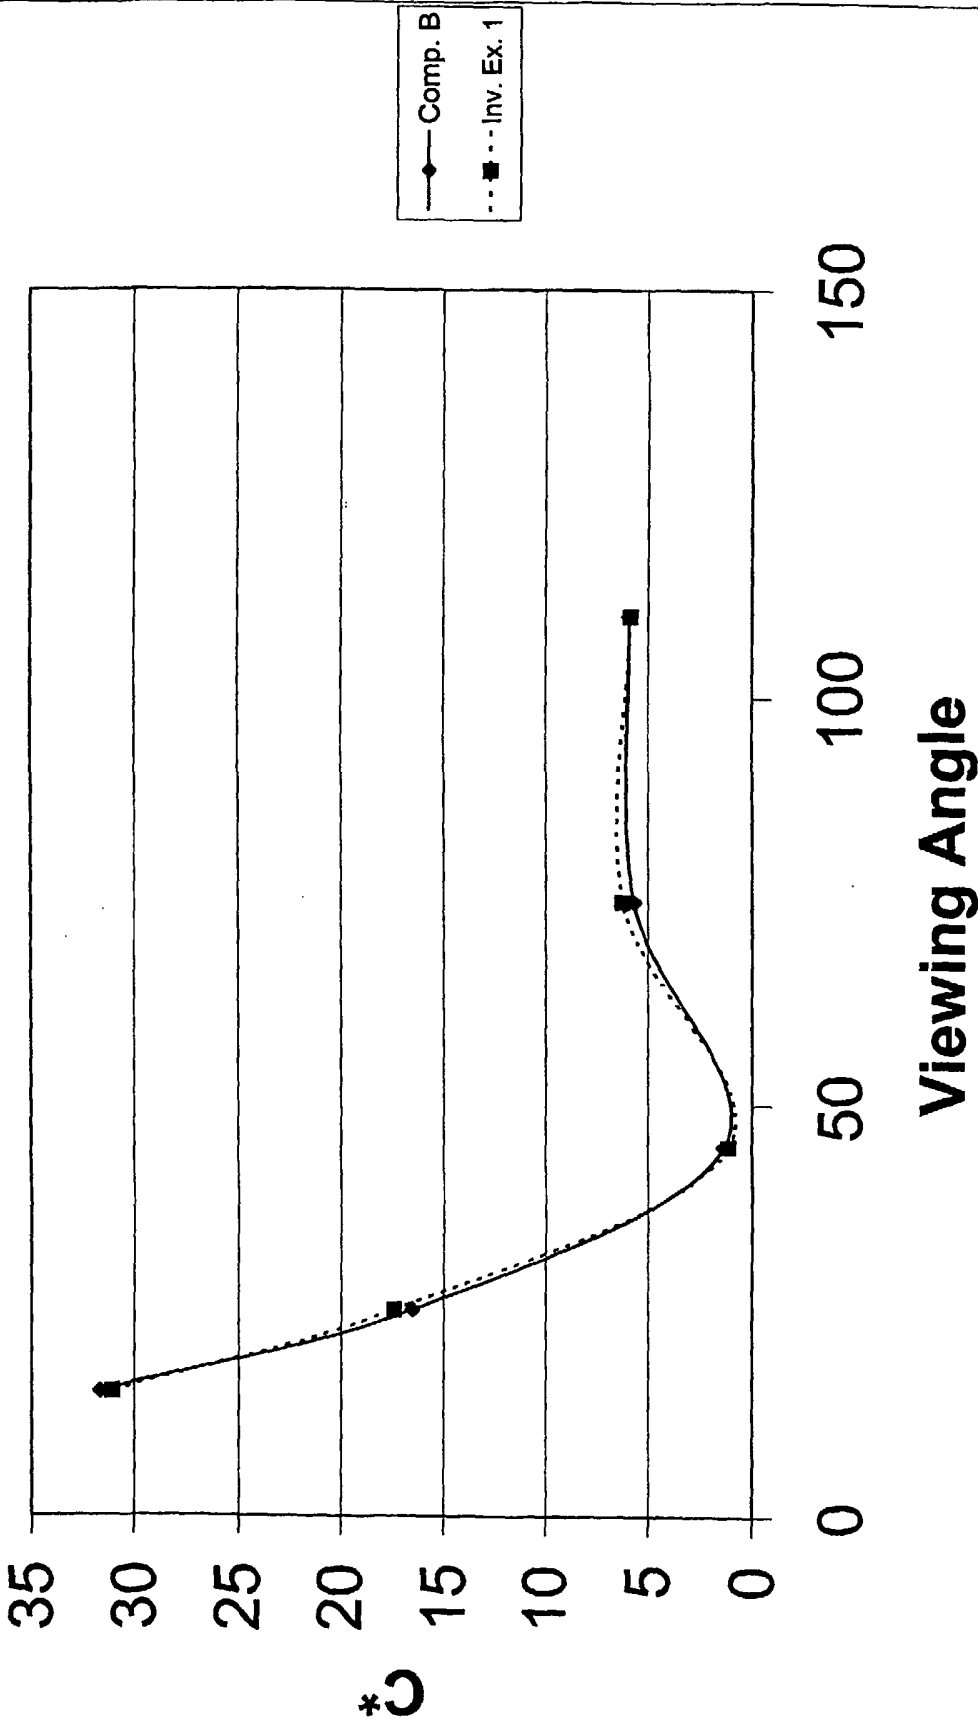


Figure 6 - Color Travel

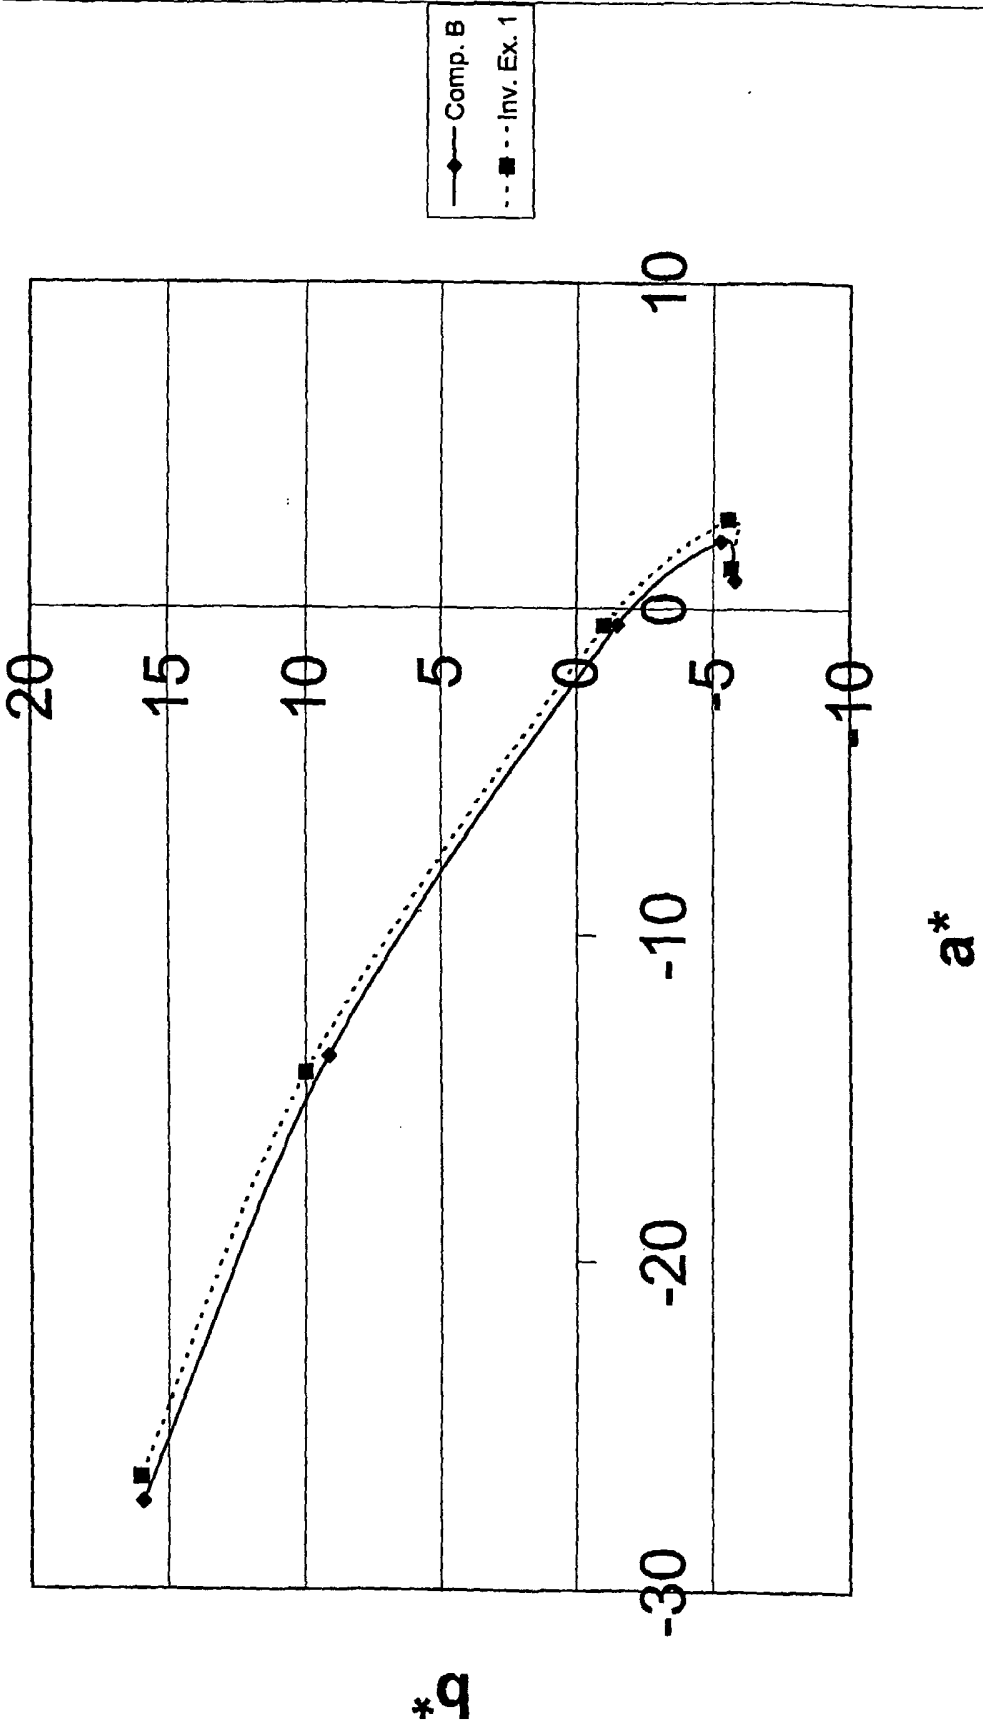

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US2005/016163

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 C09C1/00 C09C1/64

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 C09C C09D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, CHEM ABS Data, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 277 711 A (SCHMIDT ET AL) 11 January 1994 (1994-01-11) column 1, line 4 - line 10 column 2, line 24 - line 31	1-3, 5, 6, 8, 9
X	EP 0 404 378 A (TODA KOGYO CORP; DAINICHISEIKA COLOR & CHEMICALS MFG. CO. LTD) 27 December 1990 (1990-12-27) page 3, line 49 - line 53 page 4, line 14 - line 19	1, 2, 6, 8, 9
X	EP 1 338 628 A (ASAHI KASEI KABUSHIKI KAISHA) 27 August 2003 (2003-08-27) paragraphs '0038!', '0078!'	8, 9
A	US 2 278 970 A (ATWOOD FRANCIS CLARKE) 7 April 1942 (1942-04-07) the whole document	1

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

Z document member of the same patent family

Date of the actual completion of the international search

6 September 2005

Date of mailing of the international search report

13/09/2005

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Nobis, B

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US2005/016163

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5277711	A	11-01-1994	DE 4209242 A1	23-09-1993
			DE 59300363 D1	24-08-1995
			EP 0562329 A1	29-09-1993
			FI 931229 A	22-09-1993
			JP 6016965 A	25-01-1994
EP 0404378	A	27-12-1990	JP 2727230 B2	11-03-1998
			JP 3007779 A	14-01-1991
			DE 69008622 D1	09-06-1994
			DE 69008622 T2	25-08-1994
			EP 0404378 A1	27-12-1990
			US 5112403 A	12-05-1992
			US 5143548 A	01-09-1992
EP 1338628	A	27-08-2003	AU 1097702 A	15-05-2002
			EP 1338628 A1	27-08-2003
			US 2004007159 A1	15-01-2004
			CN 1473179 A	04-02-2004
			WO 0236689 A1	10-05-2002
US 2278970	A	07-04-1942	NONE	