




- (51) **International Patent Classification:**  
*H01L 21/66* (2006.01) *G01Q 90/00* (2010.01)
- (21) **International Application Number:**  
PCT/US2018/044596
- (22) **International Filing Date:**  
31 July 2018 (31.07.2018)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**  
62/539,799 01 August 2017 (01.08.2017) US  
62/626,847 06 February 2018 (06.02.2018) US
- (71) **Applicants:** **APPLIED MATERIALS ISRAEL LTD.** [IL/IL]; 9 Oppenheimer Street, 76705 Rehovot (IL). **APPLIED MATERIALS, INC.** [US/US]; 3050 Bowers Avenue, Santa Clara, California 95054 (US).
- (72) **Inventors:** **SHEMESH, Dror**; c/o Applied Materials Israel LTD., 9 Oppenheimer Street, 76705 Rehovot (IL). **KUCHIK, Vadim**; c/o Applied Materials Israel LTD., 9 Oppenheimer Street, 76705 Rehovot (IL). **BREIL, Nicolas L.**; c/o Applied Materials, Inc., 3050 Bowers Avenue, Santa Clara, California 95050 (US).
- (74) **Agent:** **CATMULL, Kelvin, B.**; Kilpatrick Townsend And Stockton LLP, Mailstop: IP Docketing-22, 1100 Peachtree Street, Suite 2800, Atlanta, Georgia 30309 (US).
- (81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

(54) **Title:** METHOD FOR DETECTING VOIDS AND AN INSPECTION SYSTEM

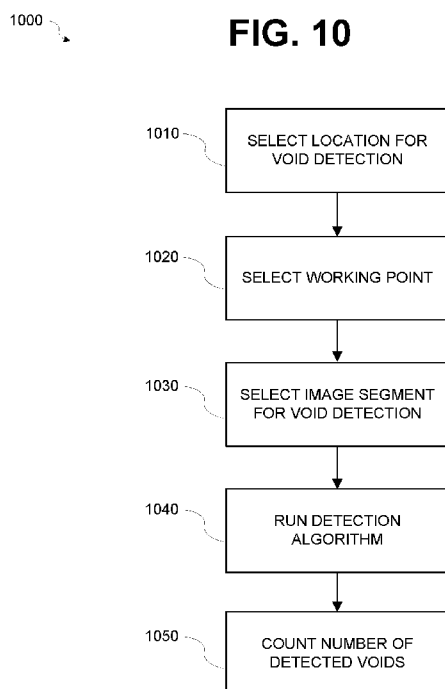

(57) **Abstract:** A method for detecting voids in a metal line of a semiconductor device die includes: scanning an electron beam upon a selected location on the die containing the metal line; determine gray levels in an image produced by collected electrons of the electron beam backscattered from the selected location on the die; and identifying one or more voids in the metal line based on differences between the gray levels in the image.

**Published:**

— *with international search report (Art. 21(3))*

## METHOD FOR DETECTING VOIDS AND AN INSPECTION SYSTEM

### CROSS-REFERENCES TO RELATED APPLICATIONS

[0001] This application claims the benefit of U.S. Provisional Application No. 62/539,799, filed August 1, 2017, and this application claims the benefit of U.S. Provisional Application No. 62/626,847, filed February 6, 2018, the contents, including appendices, of each of which are hereby incorporated herein by reference in their entireties.

### BACKGROUND

[0002] Unless otherwise indicated herein, the materials described in this section are not prior art to the claims in this application and are not admitted to be prior art by inclusion in this section.

[0003] The requirements for performance and yield in the Middle-Of-Line (MOL) metallization have made the replacement of tungsten by the low resistivity cobalt a necessity at smaller semiconductor device geometries. However, the shrinking geometries in turn place elevated demands on the metallization process. One of the most common defects found in copper and cobalt conducting elements is buried voids, which is known as a major source of yield loss and reliability degradation.

[0004] The ability to detect failure modes as early as possible and non-destructively provides a critical advantage for accelerating process development learning cycles. A typical defect analysis is done using electrical measurements coupled with and extensive use of Transmission Electron Microscope (TEM) analysis. TEM analysis is a lengthy, expensive, and destructive process. Further, a typical defect analysis takes weeks from processing to electrical testing.

### SUMMARY

[0005] Apparatuses and methods for detecting voids in metal lines are provided.

[0006] According to various aspects there is provided a method for detection of voids in a semiconductor device during fabrication. In some aspects, the method may include: selecting or receiving a selection of locations within a semiconductor device die for void detection; with an electron beam imaging system, collecting electrons emanating from the semiconductor device die in response to impinging a high energy primary particle beam onto an area of the semiconductor device die and creating a corresponding void image where the voids are to be found; determining if differences in gray level values exist in one or more of the selected locations to thereby identify the presence of voids in the selected locations.

[0007] Some embodiments may also include providing a reference image and comparing the reference image with the void image to identify the voids in the defect image. The differences in gray level values may be determined by comparing the void image with the reference image that is substantially free of voids. The number of voids detected per location may be counted to create a wafer map of metal voids. The voids may be metal voids, and creating the void image may include segmenting an image of the selected locations into metal lines and dielectric spaces.

[0008] The differences in gray level values may be determined by analyzing gray level values in segments of the void image corresponding to the metal lines. The energy of a primary particle beam may be determined in response to void material, void depth, void size, and/or feature information.

[0009] According to various aspects there is provided electron beam imaging system. The electron beam imaging system may carry out the method.

[0010] According to various aspects there is provided a computer program. In some aspects, the computer program may include code portions for performing the method.

[0011] According to various aspects there is provided a method for detecting voids in a metal line of a semiconductor device die. In some aspects, the method may include: scanning an electron beam upon a selected location on the die containing a metal line; determining gray levels in an image produced by collected electrons of the electron beam backscattered from the selected location on the die; comparing the gray levels in the image to gray levels in a reference image; and determining one or more voids in the metal line based on differences between the gray levels in the image and the gray levels in the reference image.

[0012] The reference image may be an image of a metal line of a semiconductor device die substantially free of voids. The depth of the voids detected may vary with the energy of the electron beam impinging on the selected location on the die.

[0013] The method may further include performing a plurality of scans with the electron beam upon the selected location on the die using a different electron beam energy (e.g., landing energy) for each scan; and determining one or more voids in the metal line at different depths of the metal line based on the electron beam energy for each scan and differences between the gray levels in the image and the gray levels in the reference image.

An electron beam having a first energy may be used to detect a first void in the metal line close to a surface of the metal line and an electron beam having a second energy greater than the first energy may be used to detect a second void in the metal line deeper than the first void.

[0014] According to various aspects there is provided an apparatus for detecting voids in a metal line of a semiconductor device die. In some aspects, the apparatus may include: an electron source configured to generate a charged particle beam directed to a selected location on the die containing a metal line; a backscattered electron (BSE) detector configured to detect electrons backscattered from the die, and a processor.

[0015] The processor may be configured to: receive one or more signals from the BSE detector; process the one or more signals to generate a void image of the metal line; compare the void image to a substantially void-free reference image; and determine whether voids exist in the metal line based on a comparison of the void image and the reference image.

[0016] The processor may be configured to compare a gray level signature of the void image to a gray level signature of the reference image. The processor may also be configured to control the electron source to perform a plurality of scans with the electron beam upon the selected location on the die using a different electron beam energy for each scan. The processor is configured to determine a depth of the detected voids in the metal line based at least in part on an energy of the electron beam impinging on the selected location on the die.

[0017] The processor may be configured to control the electron source to generate a first electron beam having a first energy and a second electron beam having a second energy greater than the first energy, and detect a first void in the metal line close to a surface of the metal line using the first electron beam and detect a second void in the metal line deeper than the first void using the second electron beam. The processor may also be configured to

determine a number of voids detected at each selected location on each die on a wafer, and create a wafer map of metal voids.

[0018] Numerous benefits are achieved by way of the various embodiments over conventional techniques. For example, the various embodiments provide apparatuses and methods that can be used to circumvent lengthy, destructive defect analysis process. In some embodiments, defect analysis may be nondestructively performed with an improved Scanning Electron Microscope (SEM) imaging technique. These and other embodiments along with many of its advantages and features are described in more detail in conjunction with the text below and attached figures.

#### BRIEF DESCRIPTION OF THE DRAWINGS

[0019] Aspects and features of the various embodiments will be more apparent by describing examples with reference to the accompanying drawings, in which:

[0020] FIG. 1A is a cross-section TEM image of trench structures filled with as-deposited CVD Co film according to various aspects of the present disclosure;

[0021] FIG. 1B is a cross-section TEM image of the trench structures filled after annealing the CVD Co film according to various aspects of the present disclosure;

[0022] FIG. 2 is a secondary-ion mass spectrometry (SIMS) plot of the Co film illustrated in FIGS. 1A and 1B according to various aspects of the present disclosure;

[0023] FIG. 3 is a diagram illustrating the interaction range between an electron beam and a metal target according to various aspects of the present disclosure; and

[0024] FIG. 4 is a diagram illustrating an example of 2-way e-beam paths according to various aspects of the present disclosure;

[0025] FIG. 5A is a BSE image of a test wafer having Co trench line widths between 13 and 40nm produced using a conventional void detection technique;

[0026] FIG. 5B is a BSE image of a test wafer having Co trench line widths between 13 and 40nm produced using a void detection technique according to various aspects of the present disclosure

[0027] FIG. 6A is a cross-section of the Co trench line shown in FIG. 5B showing the detected voids according to various aspects of the present disclosure;

[0028] FIG. 6B is a top-down BSE image of the Co trench line shown in FIG. 5B highlighting the detected voids according to various aspects of the present disclosure;

5 [0029] FIG. 6C is a plot illustrating a gray level signature of the detected voids of the Co trench line shown in FIG. 5B according to various aspects of the present disclosure;

[0030] FIGS. 7A and 7B are diagrams illustrating a simulation model developed to validate experimental results according to various aspects of the present disclosure;

10 [0031] FIG. 8 is a series of plots 800 illustrating simulation results of void contrast calculations as a function of beam energy and void size according to various aspects of the present disclosure;

[0032] FIG. 9 is a diagram illustrating the influence of void depth on interaction volume according to various aspects of the present disclosure;

15 [0033] FIG. 10 is a flowchart of a method for detecting voids according to various aspects of the present disclosure;

[0034] FIG. 11 is an image illustrating a golden reference and a defect image according to various aspects of the present disclosure;

20 [0035] FIG. 12 is an image illustrating segmentation of metal lines for void detection and voids in the metal lines detected by a void detection algorithm according to various aspects of the present disclosure;

[0036] FIG. 13 is a diagram illustrating an example of die-based a defect map according to various aspects of the present disclosure; and

[0037] FIG. 14 is a block diagram illustrating charged particle beam system according to various aspects of the present disclosure.

25

## DETAILED DESCRIPTION

[0038] While certain embodiments are described, these embodiments are presented by way of example only, and are not intended to limit the scope of protection. The apparatuses, methods, and systems described herein may be embodied in a variety of other forms.

Furthermore, various omissions, substitutions, and changes in the form of the example methods and systems described herein may be made without departing from the scope of protection.

**[0039]** Apparatuses and methods for detecting voids in metal lines are provided. In accordance with various aspects of the present disclosure, feedback on process quality may be obtained in a matter of hours and is a non-destructive process. An improved scanning electron microscope (SEM) imaging technique may enable accurate non-destructive detection of voids embedded inside MOL metal trenches.

**[0040]** Cobalt (Co) metal fill of trench structures of a semiconductor device may start with a metal organic atomic layer deposition (MO-ALD) of a titanium nitride (TiN) liner having a thickness of a few nanometers. The Co deposition that follows may be performed using a combination of physical vapor deposition (PVD), chemical vapor deposition (CVD), and a plasma enhanced (PE) CVD. A Co reflow annealing may also be used in order to more perfectly fill the trenches. The key parameters involved to achieve a void-free gap fill are the control of the interface between the underlying TiN and the Co, as well as the parameters of the CVD and anneal processes.

**[0041]** FIG. 1A is a cross-section TEM image of trench structures filled with as-deposited CVD Co film according to various aspects of the present disclosure. FIG. 1B is a cross-section TEM image of the trench structures filled after annealing the CVD Co film according to various aspects of the present disclosure. As illustrated in FIGS. 1A and 1B, the above process may produce a film of Co with large grains, no seams, and ideally no voids.

**[0042]** FIG. 2 is a secondary-ion mass spectrometry (SIMS) plot 200 of the Co film illustrated in FIGS. 1A and 1B. As can be seen in FIG. 2 by the high Co concentration curve 210, the above process may produce a nearly pure film of Co.

**[0043]** In accordance with various aspects of the present disclosure, an electron beam (e-beam) detection technique for detecting voids in metal lines is provided. To detect voids in a Co film, the e-beam should be able to penetrate deep enough in the Co-filled trenches. The e-beam interaction range,  $R$ , i.e., the depth to which the e-beam may penetrate, can be described by equation (1):

$$R = k \frac{E^{1.5}}{\rho} \quad (1)$$

where  $\rho$  is the material density and E is the e-beam energy.

[0044] FIG. 3 is a diagram 300 illustrating the interaction range between an electron beam with energies ranging from 0.5 to 30kV and a metal target. In FIG. 3, a well characterized iron material is used as a proxy to Co due to the chemical similarities of both elements. As can be seen in FIG. 3, the interaction depth between the e-beam and the metal target ranges from 35 Angstroms to 3.1 $\mu$ m depending on the e-beam energy.

[0045] To detect information on the phenomenon happening below the surface of the metal, the e-beam should be scattered through the bulk material. FIG. 4 is a diagram 400 illustrating an example of two-way e-beam paths according to aspects of the present disclosure. The mean free path of an electron increases with energy. Referring to FIG. 4, a high energy e-beam 410 may be used to generate signal from voids 420 in the metal 430 such that high energy scattered electrons 440 have the energy to travel to the detection system.

[0046] Since voids in Co are usually smaller than the Co line width, detection of voids as small as 5nm may be beneficial. A spot size smaller than 3nm may be needed to detect sub-10nm voids in the metal. Scattered electrons detected with a backscattered electron (BSE) detector indicate that a maximum information depth of the emitted electrons is between about 60nm to 100nm. Although the interaction depth between the e-beam and the metal is higher, fewer electrons are generated deeper than 100nm, and the spot size may be too big to detect small voids.

[0047] FIG. 5A is a BSE image 500 of a test wafer having Co trench line widths between 13nm and 40nm produced using a conventional void detection technique. FIG. 5B is a BSE image (or void image) 550 of a test wafer having Co trench line widths between 13nm and 40nm produced using a void detection technique according to various aspects of the present disclosure. As can be seen in FIG. 5B, the BSE image 550 produced by the improved detection technique according to the present disclosure clearly shows dark spots 552 indicating embedded voids along the thin Co line 554. Verification of the void detection was performed by cross-sectioning the Co trench line shown in FIG. 5B.

[0048] FIG. 6A is a cross-section 600 of the Co trench line shown in FIG. 5B showing the detected voids according to various aspects of the present disclosure. FIG. 6B is a top-down BSE image 625 of the Co trench line shown in FIG. 5B highlighting the detected voids (1, 2, 3, 4) according to various aspects of the present disclosure. FIG. 6C is a plot 650 illustrating a gray level signature 660 of the detected voids of the Co trench line shown in FIG. 5B

according to various aspects of the present disclosure. FIGS. 6A-6C show the correlation between the gray level variations (FIG. 6C) on the top-down void image (FIG. 6B), and the voids found in the cross-section image (FIG. 6A). The dark spots (1, 2, 3, 4) on the cross-section image 600 indicate voids. The gray levels (1, 2, 3, 4) shown in FIG. 6C are correlated with the voids found in the cross-section image 600 of FIG. 6A. As illustrated in FIG. 6C, the contrast measurement (i.e., gray level) is a function of void depth and size. Voids down to 70nm deep may be detected.

**[0049]** In accordance with various aspects of the present disclosure, the detection method may use gray level signatures or other signatures to identify voids. The detection method may search for a signature of a void within an acquired image. The signatures may be provided to the inspection system by an external source or may be generated by the inspection system. It may be assumed that voids differ from each other and that a comparison between gray levels of one conductor (or one area of an inspected article) to gray levels of nearly identical other conductor (or another area of another inspected article) may be used to detect the voids. Comparison methods such as cell to cell comparison, die to die comparison, computer aided design (CAD) based comparisons, golden image based comparison, or other comparison may be used. In the context of cell to cell comparison, the cells may be different parts of the same conductor, different parts of different conductors, etc.

**[0050]** FIGS. 7A and 7B are diagrams illustrating a simulation model 700 developed to validate experimental results according to various aspects of the present disclosure. FIG. 7A illustrates a cross-section 710 of the model 700 while FIG. 7B illustrates a top-down view 720 of the model. For various simulation conditions of voids having different volumes and buried under different Co thicknesses, contrast was calculated for scattered signals at energies of 10, 15, 20, 25, and 30kV according to equation 2:

$$Contrast = \frac{Signal-Background}{Signal+Background} \quad (2)$$

where *Signal* indicates a number of electrons generated from a location of a void and *Background* indicates a number of electrons generated when no voids exist.

**[0051]** FIG. 8 is a series of plots 800 illustrating simulation results of void contrast calculations as a function of beam energy and void size according to various aspects of the present disclosure. As illustrated in FIG. 8, beam energy that yields maximum void contrast depends on how deep the void is buried. When the void is close to the surface (e.g., buried

under 20nm of cobalt), a relatively small energy may produce the maximum contrast. However, when the void is deeper, a higher energy may be required. For example, referring to FIG. 8, an energy of 20kV may be required to generate the maximum contrast and detect voids buried 60nm below the surface. Energy needed to generate the maximum contrast may have a weaker dependency of the size of voids. The beam energy may be adapted to maximize detection of voids, i.e., deeper voids may be detected with higher energies, while shallower voids favor lower energies. Void detection may involve scanning the same conductor multiple times using different amounts of energy.

**[0052]** Voids located closer to the surface may produce a higher contrast compared to voids buried deeper under the surface, which may make those voids easier to detect. FIG. 9 is a diagram 900 illustrating the influence of void depth on interaction volume according to various aspects of the present disclosure. Referring to FIG. 9, while the e-beam 910 is well concentrated when it is close to the surface, the existence of a void 920 close to the surface may shift the interaction volume 930 down. On the other hand, a deeper void 940 may have a smaller influence on the interaction volume 950 as the void size can be relatively small compared to the overall interaction volume 950. The shift in the interaction volume may be smaller for deeper voids making the contrast lower and more challenging to detect.

**[0053]** Inspection and metrology equipment configured with a BSE detector for metal void measurements having high resolution and capable of advanced imaging techniques, such as see through, high aspect ratio, topography and electron detection may be used for void detection. When combined with high precision measurements and extensive sampling capability, they may reveal hidden process signatures within dice and across entire wafers.

**[0054]** In accordance with various aspects of the present disclosure, an algorithm for detection of voids may use parallel computing and advanced data processing. FIG. 10 is a flowchart of a method 1000 for detecting voids in a semiconductor device die according to various aspects of the present disclosure. Referring to FIG. 10, at block 1010, a location for void detection within the semiconductor device die may be selected. The selection may be done in any manner, for example, based on previously located voids, based on critical parts of the integrated circuit, based on failure analysis, etc. At block 1020, a working point of an electron beam imaging system may be selected. A working point that uses high energy and collects electrons emanating from the semiconductor device die, for example an e-beam energy in a range of 0.5 to 30kV may be selected.

[0055] Referring again FIG. 10, at block 1030, an image segment of the semiconductor device die where voids may be found is selected. For example, a metal line portion of the image may be segmented out from a dielectric space portion of an image and only the metal line portion of the image used for void detection. At block 1040, a detection algorithm may be used to find the metal voids. For example, the detection algorithm may perform a gray scale analysis, and differences in the gray level values may be identified in one or more locations to identify the presence of voids.

[0056] In some embodiments, a reference image may be obtained. The reference image may be, for example, but is not limited to, a “golden” image, an image of an ideally identical or substantially similar cell or die, a CAD based image, etc. The reference image may be created or obtained from another source. For example, FIG. 11 is an image 1100 illustrating a golden reference 1110 and a defect image 1120 according to various aspects of the present disclosure. Referring to FIG. 11, the reference image 1110 may be created, for example, using either average gray level of multiple defect-free images or by using median gray level of multiple defect-free images. In the defect image 1120, voids appear dark in bright metal lines. The detection algorithm may compare the reference image to the void image to identify the voids.

[0057] FIG. 12 is an image 1200 illustrating segmentation of metal lines 1210 for void detection and voids in the metal lines 1220 detected by a void detection algorithm according to various aspects of the present disclosure. Referring to FIG. 12, the metal line segmentation 1210 is shown in the left-hand panel and voids in the metal line segments 1220 detected with the void detection algorithm are shown in the right-hand panel.

[0058] Referring to FIG. 10, at block 1050, the number of detected voids per location may be counted. A wafer map of metal void defects may be constructed. FIG. 13 is a diagram illustrating an example of a die-based defect map 1300 according to various aspects of the present disclosure. In FIG. 13, darker shading on the defect map 1300 indicates a higher number of defects (i.e., voids in the metal line segments of the die).

[0059] The method 1000 may be embodied on a non-transitory computer readable medium, for example, but not limited to, a memory or other non-transitory computer readable medium known to those of skill in the art, having stored therein a program including computer executable instructions for making a processor, computer, or other programmable device execute the operations of the methods.

[0060] FIG. 14 is a block diagram illustrating a charged particle beam system 1400 according to various aspects of the present disclosure. Referring to FIG. 14, the charged particle beam system 1400 may include a processor 1410, a memory unit 1415, a controller 1420, an image acquisition module 1425, and a mechanical stage 1455. The mechanical stage 1455 may be configured to move an object 1500 in relation to the image acquisition module 1425.

[0061] The image acquisition module 1425 may include an electron source 1430, a supply unit 1435 for feeding the electron source 1430, one or more electron optic components, for example, but not limited to, one or more lenses 1440, 1445, and a backscattered electron (BSE) detector 1450. The one or more lenses 1440, 1445 may be deflecting and/or focusing lenses, objective lenses or any other type of lenses. The one or more lenses 1440, 1445 may be magnetic lenses, electrostatic lenses or a combination of both electrical and magnetic lenses.

[0062] FIG. 14 shows a charged particle beam 1432 that is not deflected before reaching one or more lenses 1440, 1445. It is noted that the charged particle beam 1432 may be deflected any number of times before impinging on the object 1500. Backscattered electrons 1434 may be detected by the BSE detector 1450. Detection signals 1437 generated by the BSE detector 1450 may be sent, directly or indirectly, to the processor 1410 in order to be processed and detect voids in interconnects. One of ordinary skill in the art will appreciate that the image acquisition module 1425 may include more than a one BSE detector, one or more additional detectors, one or more secondary electron detectors, etc.

[0063] The detection of voids may involve using image processing, for example, but not limited to, identifying a conductive line and identifying gray-level fluctuations along the line. The detection of voids may also include generating information about the voids, for example, but not limited to, detecting the presence of the voids, the locations of the voids, the distribution of the voids, the number of voids, etc.

[0064] While examples have been provided describing the detection of voids in Cobalt – these are merely exemplary and one of ordinary skill in the art will appreciate that the above-described solutions may be used for finding voids in other materials, for example, but not limited to, copper.

[0065] The various embodiments may also be implemented in a computer program for running on a computer system, at least including code portions for performing steps of a

method according to the invention when run on a programmable apparatus, such as a computer system or enabling a programmable apparatus to perform functions of a device or system according to the invention. The computer program may cause the storage system to allocate disk drives to disk drive groups.

5   **[0066]**   A computer program is a list of instructions such as a particular application program and/or an operating system. The computer program may for instance include one or more of: a subroutine, a function, a procedure, an object method, an object implementation, an executable application, an applet, a servlet, a source code, an object code, a shared library/dynamic load library and/or other sequence of instructions designed for execution on a  
10   computer system.

**[0067]**   The computer program may be stored internally on a non-transitory computer readable medium. All or some of the computer program may be provided on computer readable media permanently, removable or remotely coupled to an information processing system. The computer readable media may include, for example and without limitation, any  
15   number of the following: magnetic storage media including disk and tape storage media; optical storage media such as compact disk media (e.g., CD-ROM, CD-R, etc.) and digital video disk storage media; nonvolatile memory storage media including semiconductor-based memory units such as flash memory, EEPROM, EPROM, ROM; ferromagnetic digital memories; MRAM; volatile storage media including registers, buffers or caches, main  
20   memory, RAM, etc.

**[0068]**   A computer process may include an executing (running) program or portion of a program, current program values and state information, and the resources used by the operating system to manage the execution of the process. An operating system (OS) is the software that manages the sharing of the resources of a computer and provides programmers  
25   with an interface used to access those resources. An operating system may process system data and user input, and respond by allocating and managing tasks and internal system resources as a service to users and programs of the system.

**[0069]**   The computer system may include, for example, but not limited to, at least one processing unit, associated memory and a number of input/output (I/O) devices. When  
30   executing the computer program, the computer system may process information according to the computer program and produce resultant output information via I/O devices.

[0070] In the foregoing disclosure, various embodiments have been described with reference to specific examples. It will, however, be evident that various modifications and changes may be made therein without departing from the broader spirit and scope of the disclosure as set forth in the appended claims. Additionally, further details of the various  
5 embodiments are set forth in the appendices to the provisional applications, the contents of which have been incorporated herein by reference.

[0071] Moreover, the terms “front,” “back,” “top,” “bottom,” “over,” “under” and the like in the description and in the claims, if any, are used for descriptive purposes and not necessarily for describing permanent relative positions. It is understood that the terms so  
10 used are interchangeable under appropriate circumstances such that the various embodiments described herein are, for example, capable of operation in other orientations than those illustrated or otherwise described herein.

[0072] The connections as discussed herein may be any type of connection suitable to transfer signals from or to the respective nodes, units or devices, for example via intermediate  
15 devices. Accordingly, unless implied or stated otherwise, the connections may for example be direct connections or indirect connections. The connections may be illustrated or described in reference to being a single connection, a plurality of connections, unidirectional connections, or bidirectional connections. However, different embodiments may vary the implementation of the connections. For example, separate unidirectional connections may be  
20 used rather than bidirectional connections and vice versa. Also, a plurality of connections may be replaced with a single connection that transfers multiple signals serially or in a time multiplexed manner. Likewise, single connections carrying multiple signals may be separated out into various different connections carrying subsets of these signals. Therefore, many options exist for transferring signals.

25 [0073] Although specific conductivity types or polarity of potentials have been described in the examples, it will be appreciated that conductivity types and polarities of potentials may be reversed.

[0074] Each signal described herein may be designed as positive or negative logic. In the case of a negative logic signal, the signal is active low where the logically true state  
30 corresponds to a logic level zero. In the case of a positive logic signal, the signal is active high where the logically true state corresponds to a logic level one. Note that any of the signals described herein may be designed as either negative or positive logic signals.

Therefore, in alternate embodiments, those signals described as positive logic signals may be implemented as negative logic signals, and those signals described as negative logic signals may be implemented as positive logic signals.

[0075] Furthermore, the terms "assert" or "set" and "negate" (or "deassert" or "clear") may be used herein when referring to the rendering of a signal, status bit, or similar apparatus into its logically true or logically false state, respectively. If the logically true state is a logic level one, the logically false state is a logic level zero. If the logically true state is a logic level zero, the logically false state is a logic level one.

[0076] Those skilled in the art will recognize that the boundaries between logic blocks are merely illustrative and that alternative embodiments may merge logic blocks or circuit elements or impose an alternate decomposition of functionality upon various logic blocks or circuit elements. Thus, it is to be understood that the architectures depicted herein are merely exemplary, and that in fact many other architectures may be implemented which achieve the same functionality.

[0077] Any arrangement of components to achieve the same functionality is effectively "associated" such that the desired functionality is achieved. Hence, any two components herein combined to achieve a particular functionality may be seen as "associated with" each other such that the desired functionality is achieved, irrespective of architectures or intermedial components. Likewise, any two components so associated can also be viewed as being "operably connected," or "operably coupled," to each other to achieve the desired functionality.

[0078] Furthermore, those skilled in the art will recognize that boundaries between the above described operations are merely illustrative. The multiple operations may be combined into a single operation, a single operation may be distributed in additional operations and operations may be executed at least partially overlapping in time. Moreover, alternative embodiments may include multiple instances of a particular operation, and the order of operations may be altered in various other embodiments.

[0079] Also for example, in one embodiment, the illustrated examples may be implemented as circuitry located on a single integrated circuit or within a same device. Alternatively, the examples may be implemented as any number of separate integrated circuits or separate devices interconnected with each other in a suitable manner.

[0080] Also, for example, the examples, or portions thereof, may be implemented as soft or code representations of physical circuitry or of logical representations convertible into physical circuitry, such as in a hardware description language of any appropriate type.

[0081] Also, the invention is not limited to physical devices or units implemented in non-programmable hardware but can also be applied in programmable devices or units able to perform the desired device functions by operating in accordance with suitable program code, such as mainframes, minicomputers, servers, workstations, personal computers, notepads, personal digital assistants, and other embedded systems, commonly denoted in this application as “computer systems.”

[0082] However, other modifications, variations and alternatives are also possible. The specifications and drawings are, accordingly, to be regarded in an illustrative rather than in a restrictive sense.

[0083] In the claims, any reference signs placed between parentheses shall not be construed as limiting the claim. The word ‘comprising’ does not exclude the presence of other elements or steps than those listed in a claim. Furthermore, the terms “a” or “an,” as used herein, are defined as one or more than one. Also, the use of introductory phrases such as “at least one” and “one or more” in the claims should not be construed to imply that the introduction of another claim element by the indefinite articles “a” or “an” limits any particular claim containing such introduced claim element to inventions containing only one such element, even when the same claim includes the introductory phrases “one or more” or “at least one” and indefinite articles such as “a” or “an.” The same holds true for the use of definite articles. Unless stated otherwise, terms such as “first” and “second” are used to arbitrarily distinguish between the elements such terms describe. Thus, these terms are not necessarily intended to indicate temporal or other prioritization of such elements. The mere fact that certain measures are recited in mutually different claims does not indicate that a combination of these measures cannot be used to advantage.

[0084] One of ordinary skill in the art will appreciate that while embodiments described in the present disclosure referred to the detection of voids in cobalt, the disclosed apparatuses and methods may be extended to use for finding voids in other materials, for example, but not limited to, copper or other materials, without departing from the scope of protection of the present disclosure.

**[0085]** The examples and embodiments described herein are for illustrative purposes only. Various modifications or changes in light thereof will be apparent to persons skilled in the art. These are to be included within the spirit and purview of this application, and the scope of the appended claims, which follow.

## WHAT IS CLAIMED IS:

1                   1.       A method for detecting voids in a semiconductor device substrate  
2 during fabrication, the method comprising:  
3                   selecting or receiving a selection of locations within a semiconductor device  
4 substrate for void detection;  
5                   with an electron beam imaging system, collecting electrons emanating from  
6 the semiconductor device substrate in response to impinging a high energy primary particle  
7 beam onto areas of the semiconductor device substrate corresponding to the selection of  
8 locations;  
9                   generating a corresponding void image of the areas of the semiconductor  
10 device substrate;  
11                   segmenting the void image into portions corresponding to metal lines on the  
12 semiconductor device substrate and portions corresponding to areas outside the metal lines on  
13 the semiconductor device substrate; and  
14                   analyzing the portions of the void image corresponding to the metal lines to  
15 detect the voids by identifying differences in gray level values.

1                   2.       The method according to claim 1, further comprising:  
2                   providing a reference image; and  
3                   comparing the reference image with the void image to detect the voids in the  
4 metal lines, wherein the differences in gray level values are determined by comparing the  
5 void image with the reference image.

1                   3.       The method according to claim 2, wherein the reference image is a  
2 portion of the void image, and comparing the reference image with the void image comprises  
3 comparing different portions of the void image corresponding to different areas of the  
4 semiconductor device substrate.

1                   4.       The method according to claim 1, wherein the voids are metal voids,  
2 and wherein creating the void image comprises segmenting the void image into portions  
3 corresponding to the metal lines on the semiconductor device substrate and portions  
4 corresponding to dielectric spaces on the semiconductor device substrate.

1                   5.       The method according to claim 4, wherein the differences in gray level  
2 values are determined by analyzing the portions of the void image corresponding to the metal  
3 lines.

1                   6.       The method according to claim 1, further comprising:  
2 counting a number of voids identified per location to create a wafer map of the  
3 voids.

1                   7.       The method according to claim 1, further comprising:  
2 selecting a working point by determining an energy of a primary particle beam  
3 in response to at least one of the following: void material, void depth, void size, feature  
4 information.

1                   8.       An electron beam imaging system adapted to carry out the method  
2 according to claim 1.

1                   9.       A computer program for running on a computer system, at least  
2 including code portions for performing steps of the method according to claim 1.

3                   10.      A method for detecting voids in a metal line of a semiconductor device  
4 die, the method comprising:

5                   scanning an electron beam upon a selected location on the die containing the  
6 metal line;

7                   identifying gray levels in an image produced by collected electrons of the  
8 electron beam backscattered from the selected location on the die;

9                   comparing the gray levels in the image to gray levels in a reference image; and

10                  determining one or more voids in the metal line based on differences between  
11 the gray levels in the image and the gray levels in the reference image.

1                   11.      The method of claim 10, wherein the reference image is an image of a  
2 metal line of a semiconductor device die substantially free of voids.

1                   12.      The method of claim 10, wherein a depth of the voids detected varies  
2 with an energy of the electron beam impinging on the selected location on the die.

1                   13.      The method of claim 10, further comprising:

2 performing a plurality of scans with the electron beam upon the selected  
3 location on the die using a different electron beam energy for each scan; and  
4 identifying one or more voids in the metal line at different depths of the metal  
5 line based on the electron beam energy for each scan and differences between the gray levels  
6 in the image and the gray levels in the reference image.

1 14. The method of claim 13, wherein an electron beam having a first  
2 energy is used to detect a first void in the metal line close to a surface of the metal line and an  
3 electron beam having a second energy greater than the first energy is used to detect a second  
4 void in the metal line deeper than the first void.

1 15. An apparatus for detecting voids in a metal line of a semiconductor  
2 device die, the apparatus comprising:  
3 an electron source configured to generate a charged particle beam directed to a  
4 selected location on the die containing a metal line;  
5 a backscattered electron (BSE) detector configured to detect electrons  
6 backscattered from the die; and  
7 a processor configured to:  
8 receive one or more signals from the BSE detector;  
9 process the one or more signals to generate a void image of the metal  
10 line;  
11 compare the void image to a substantially void-free reference image;  
12 and  
13 determine whether voids exist in the metal line based on a comparison  
14 of the void image and the reference image.


1 16. The apparatus of claim 15, wherein the processor is configured to  
2 compare a gray level signature of the void image to a gray level signature of the reference  
3 image.

1 17. The apparatus of claim 15, wherein the processor is configured to  
2 control the electron source to perform a plurality of scans with the electron beam upon the  
3 selected location on the die using a different electron beam energy for each scan.


1                   18.     The apparatus of claim 17, wherein the processor is configured to  
2     determine a depth of the detected voids in the metal line based at least in part on an energy of  
3     the electron beam impinging on the selected location on the die.

1                   19.     The apparatus of claim 15, wherein the processor is configured to  
2     control the electron source to generate a first electron beam having a first energy and a  
3     second electron beam having a second energy greater than the first energy, and  
4                   wherein the processor detects a first void in the metal line close to a surface of  
5     the metal line using the first electron beam and detects a second void in the metal line deeper  
6     than the first void using the second electron beam.

1                   20.     The apparatus of claim 15, wherein the processor is configured to  
2     determine a number of voids detected at each selected location on each die on a wafer, and  
3                   create a wafer map based on the number of voids.

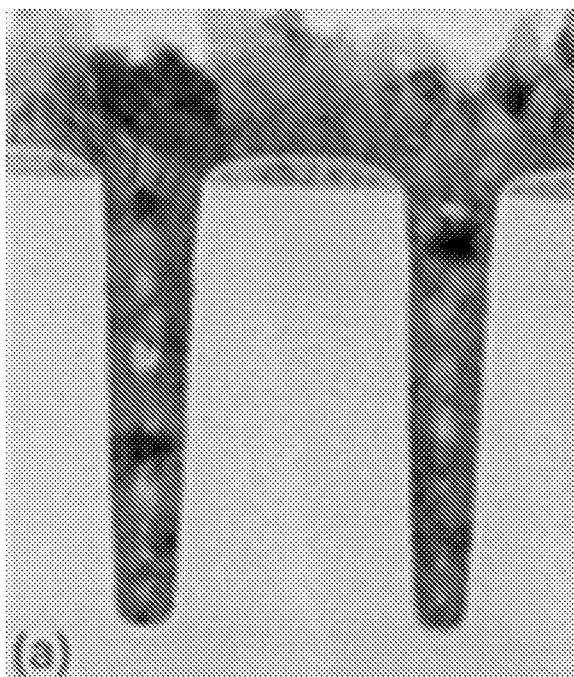

**FIG. 1A**

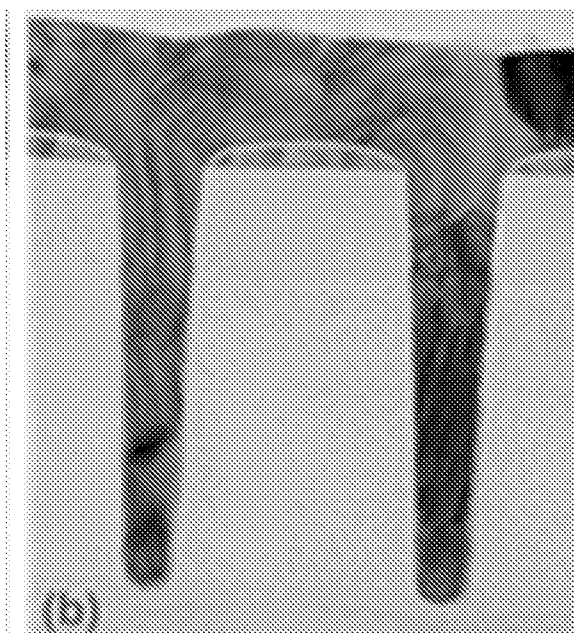

**FIG. 1B**

2/11

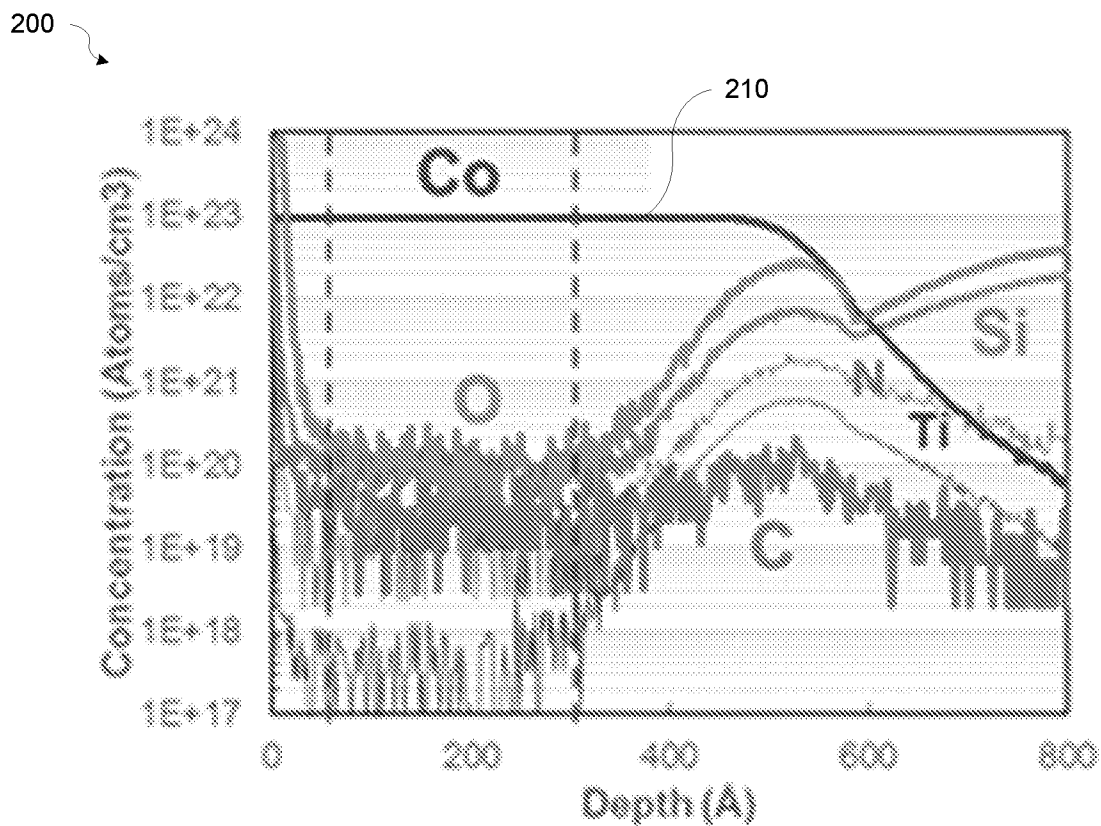


FIG. 2



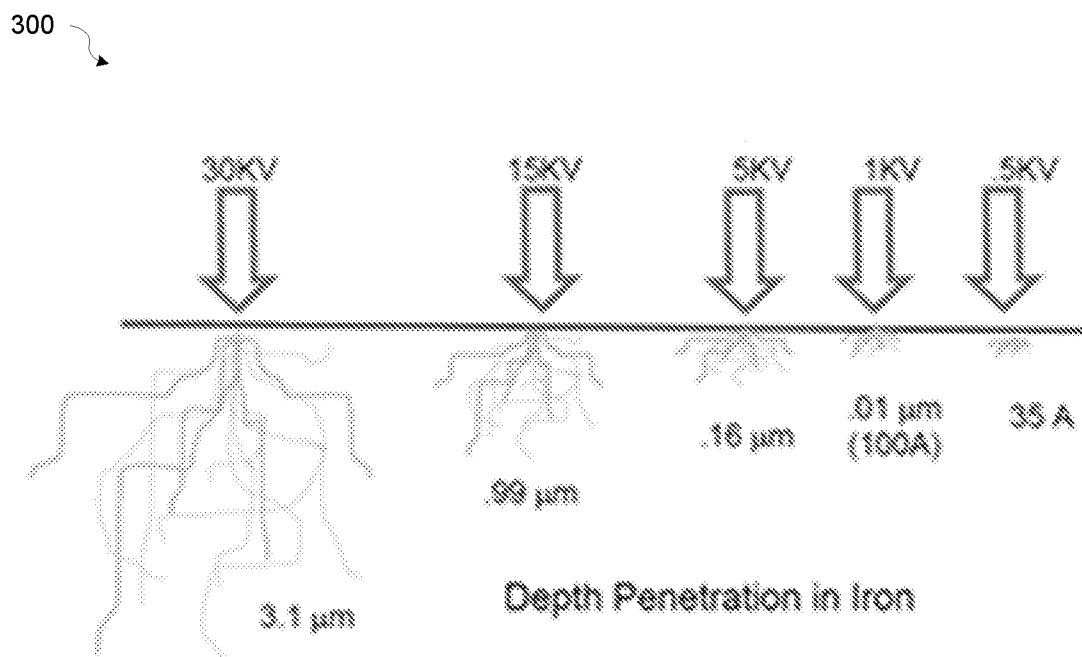



FIG. 3

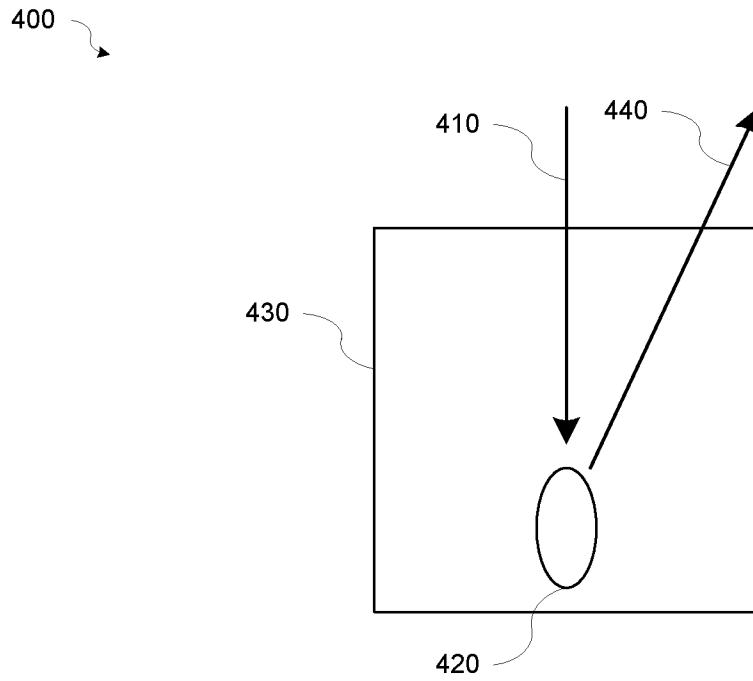




**FIG. 4**

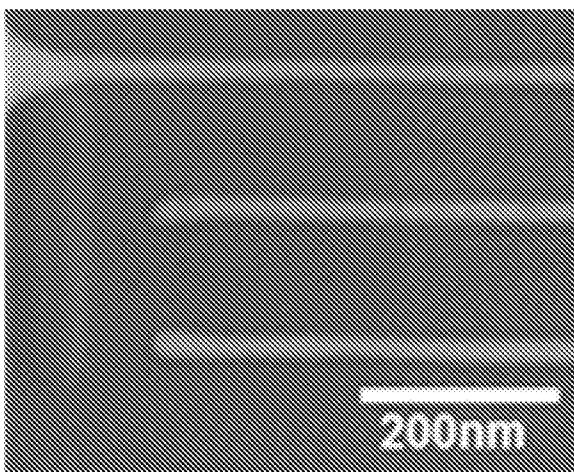

**FIG. 5A**

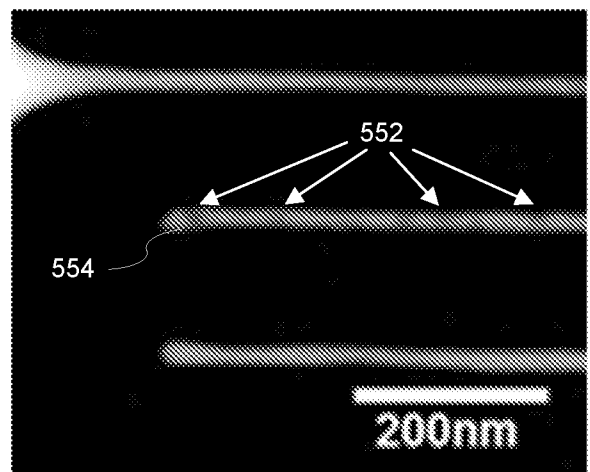

**FIG. 5B**

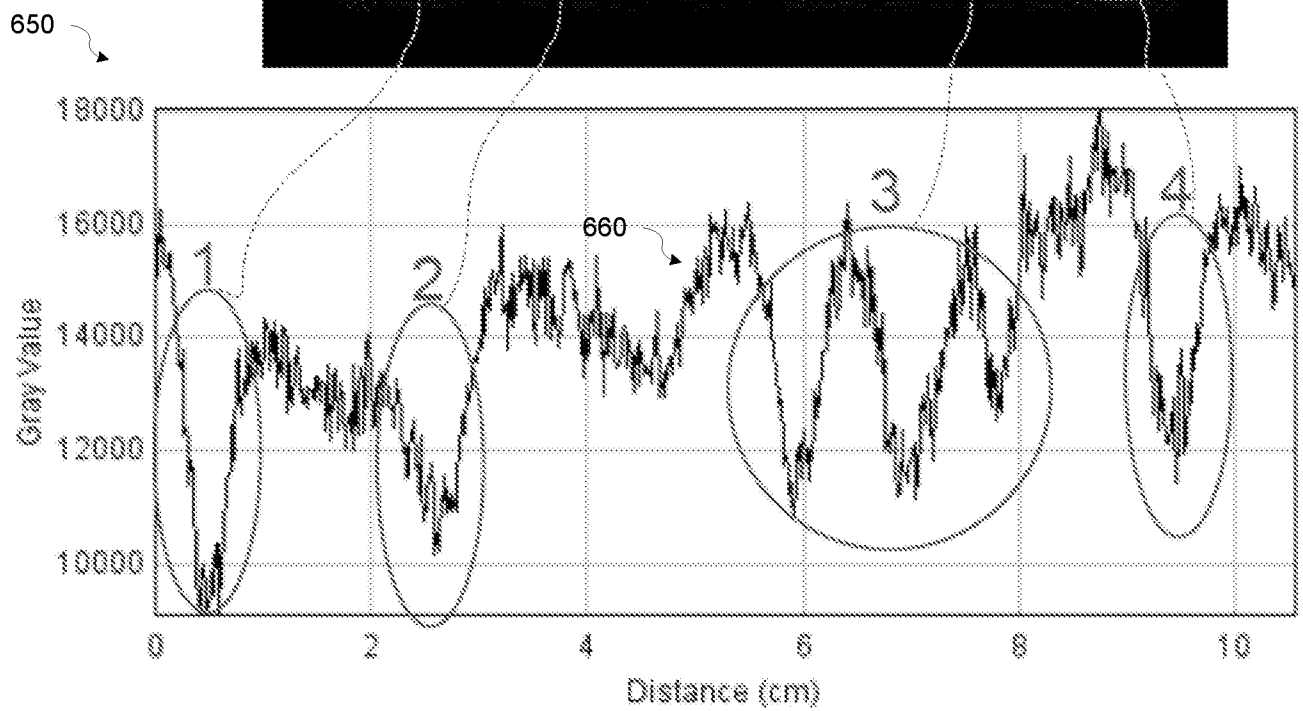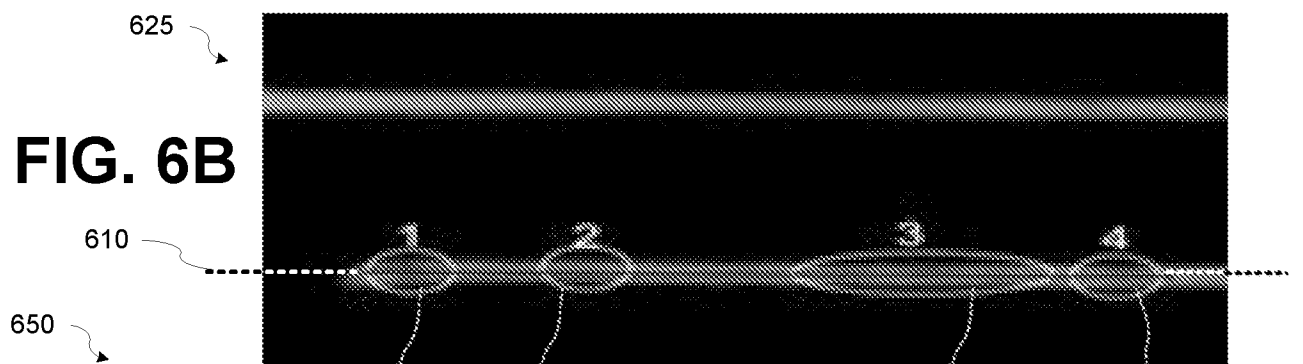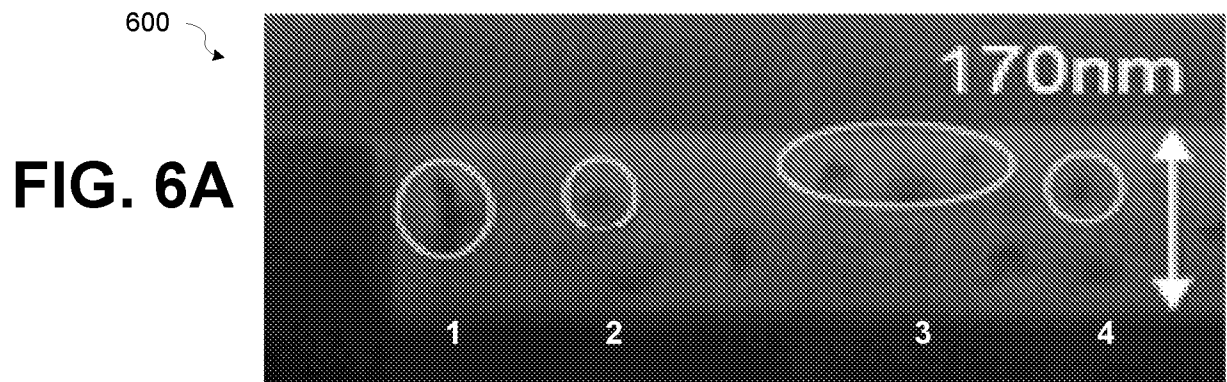

**FIG. 6C**

700

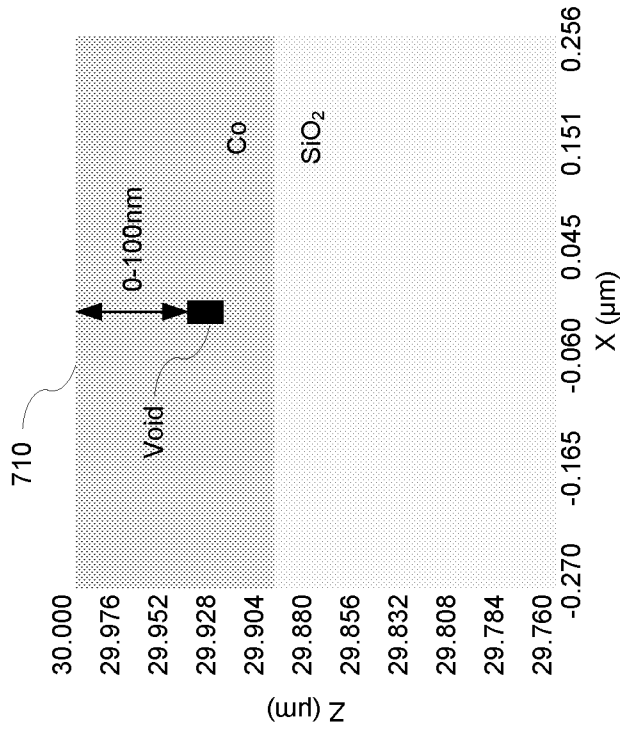


FIG. 7A

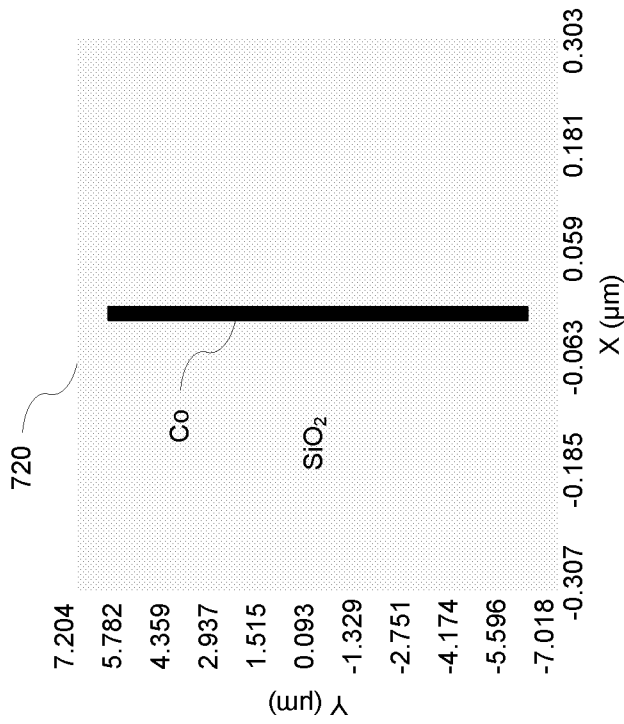


FIG. 7B

800




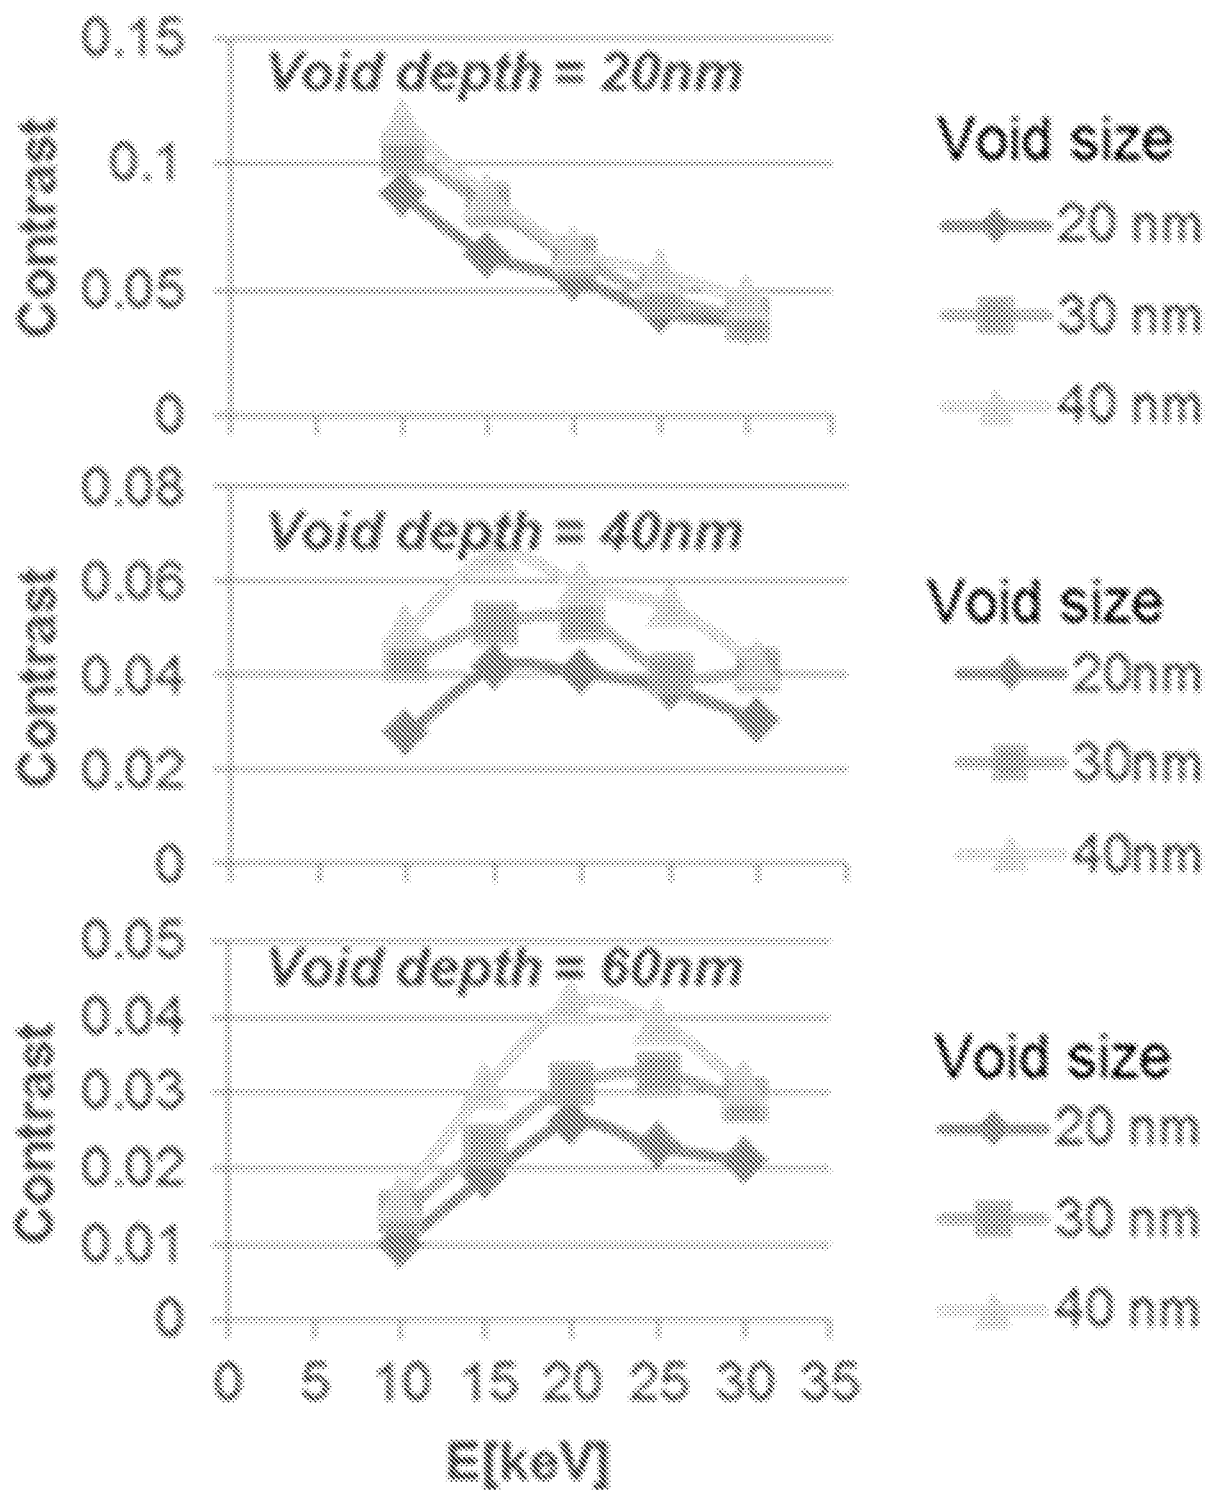


FIG. 8


**FIG. 9**

1000 **FIG. 10**


9/11

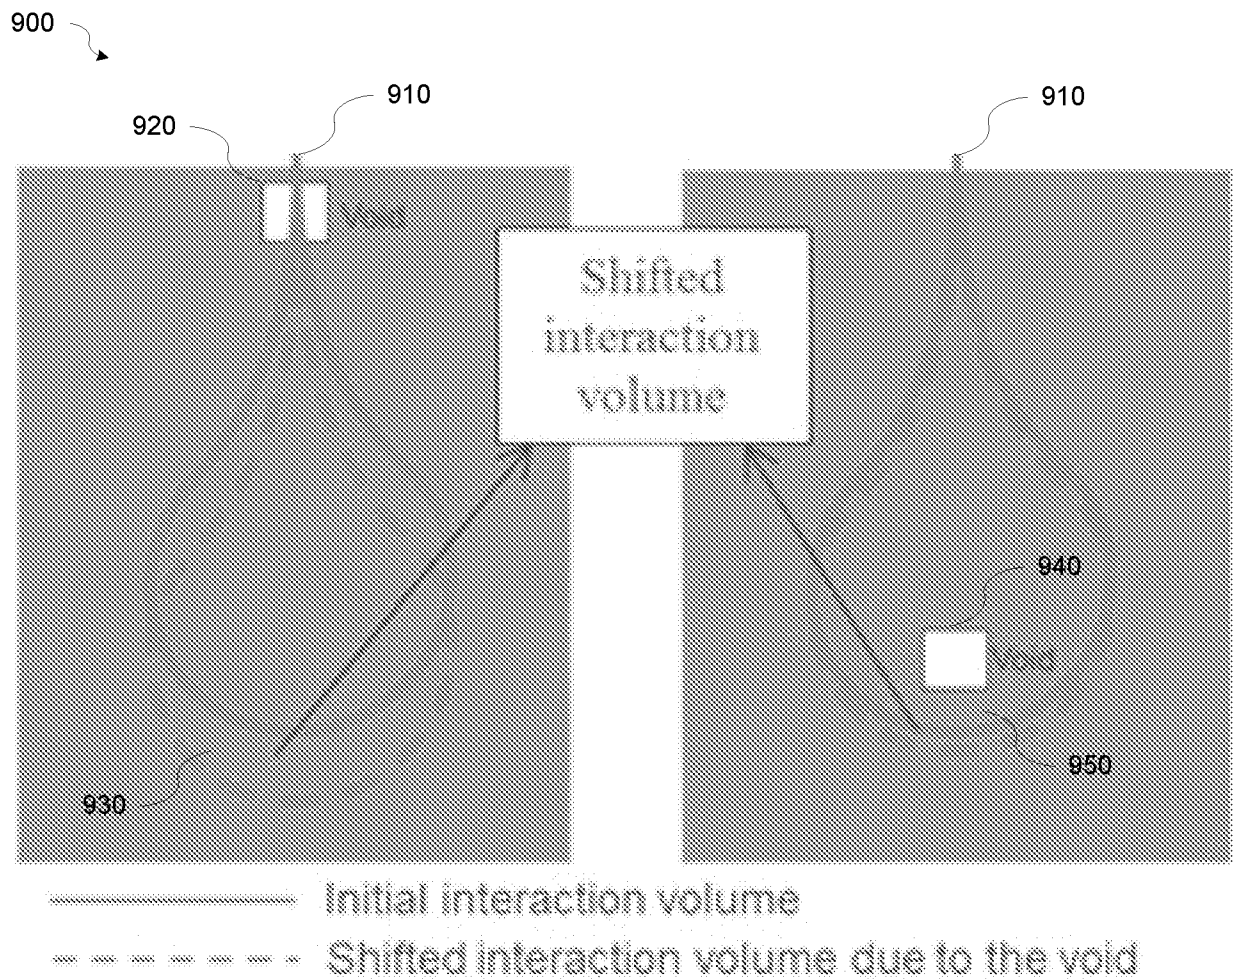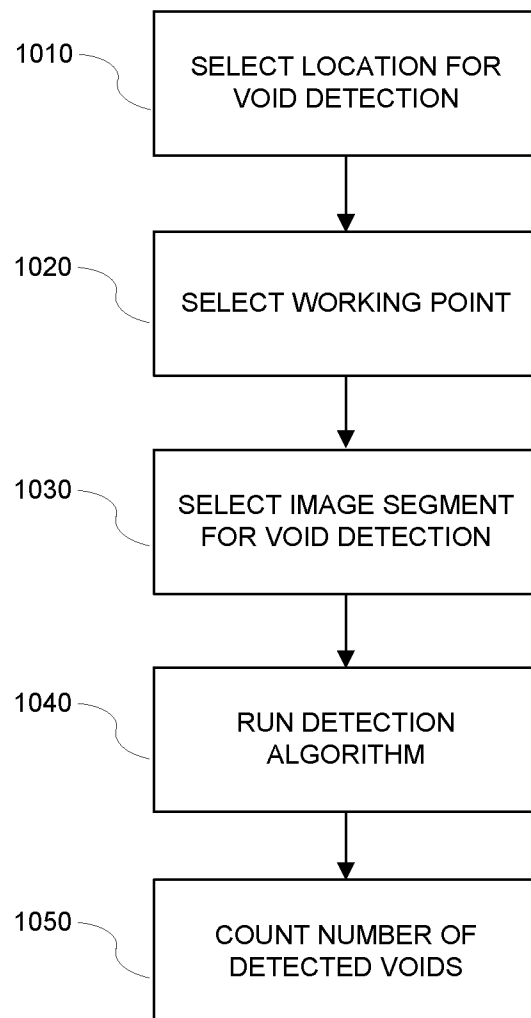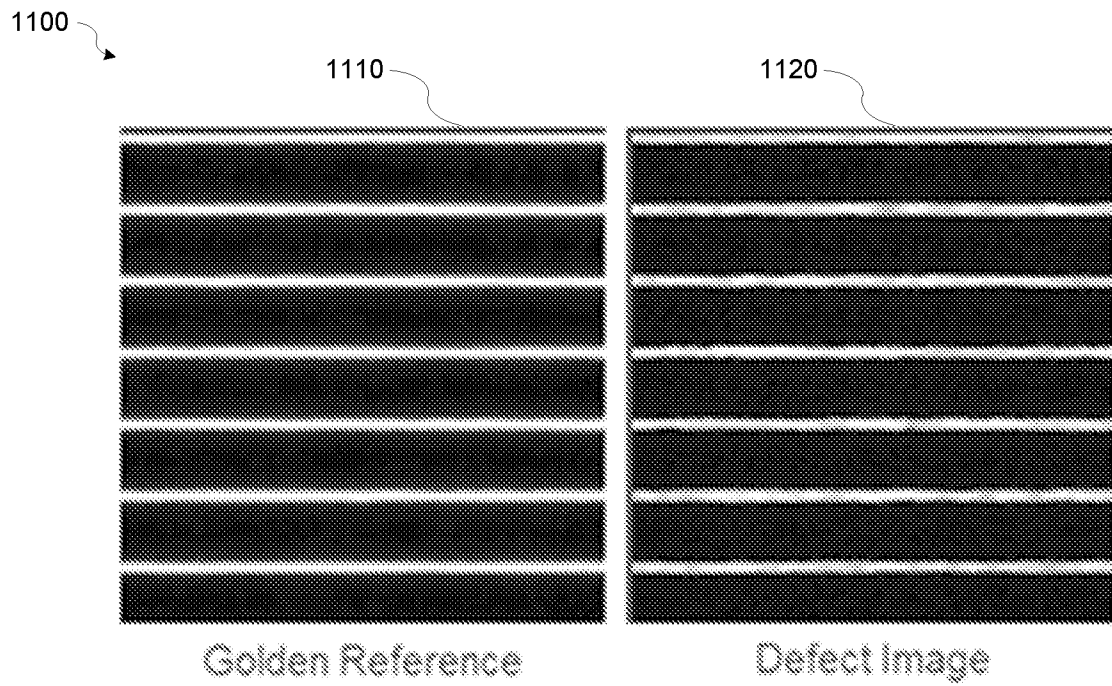


**FIG. 11**

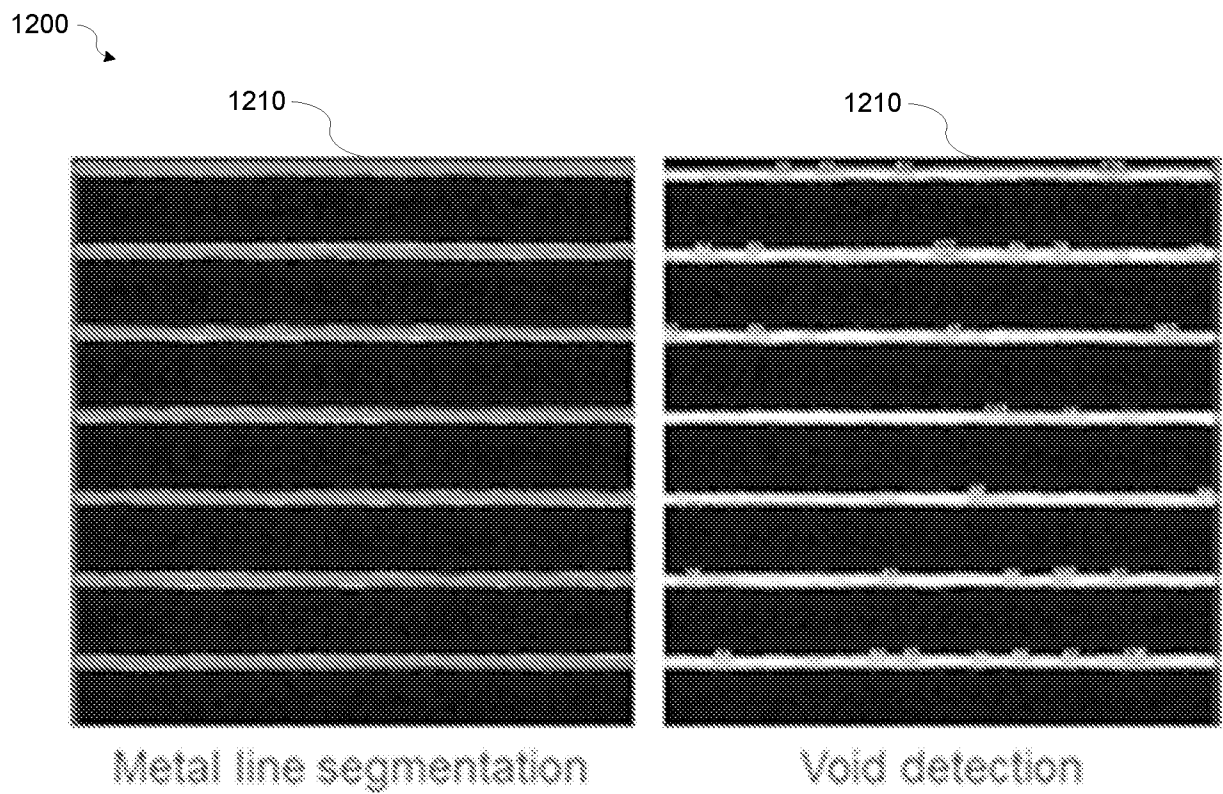

**FIG. 12**

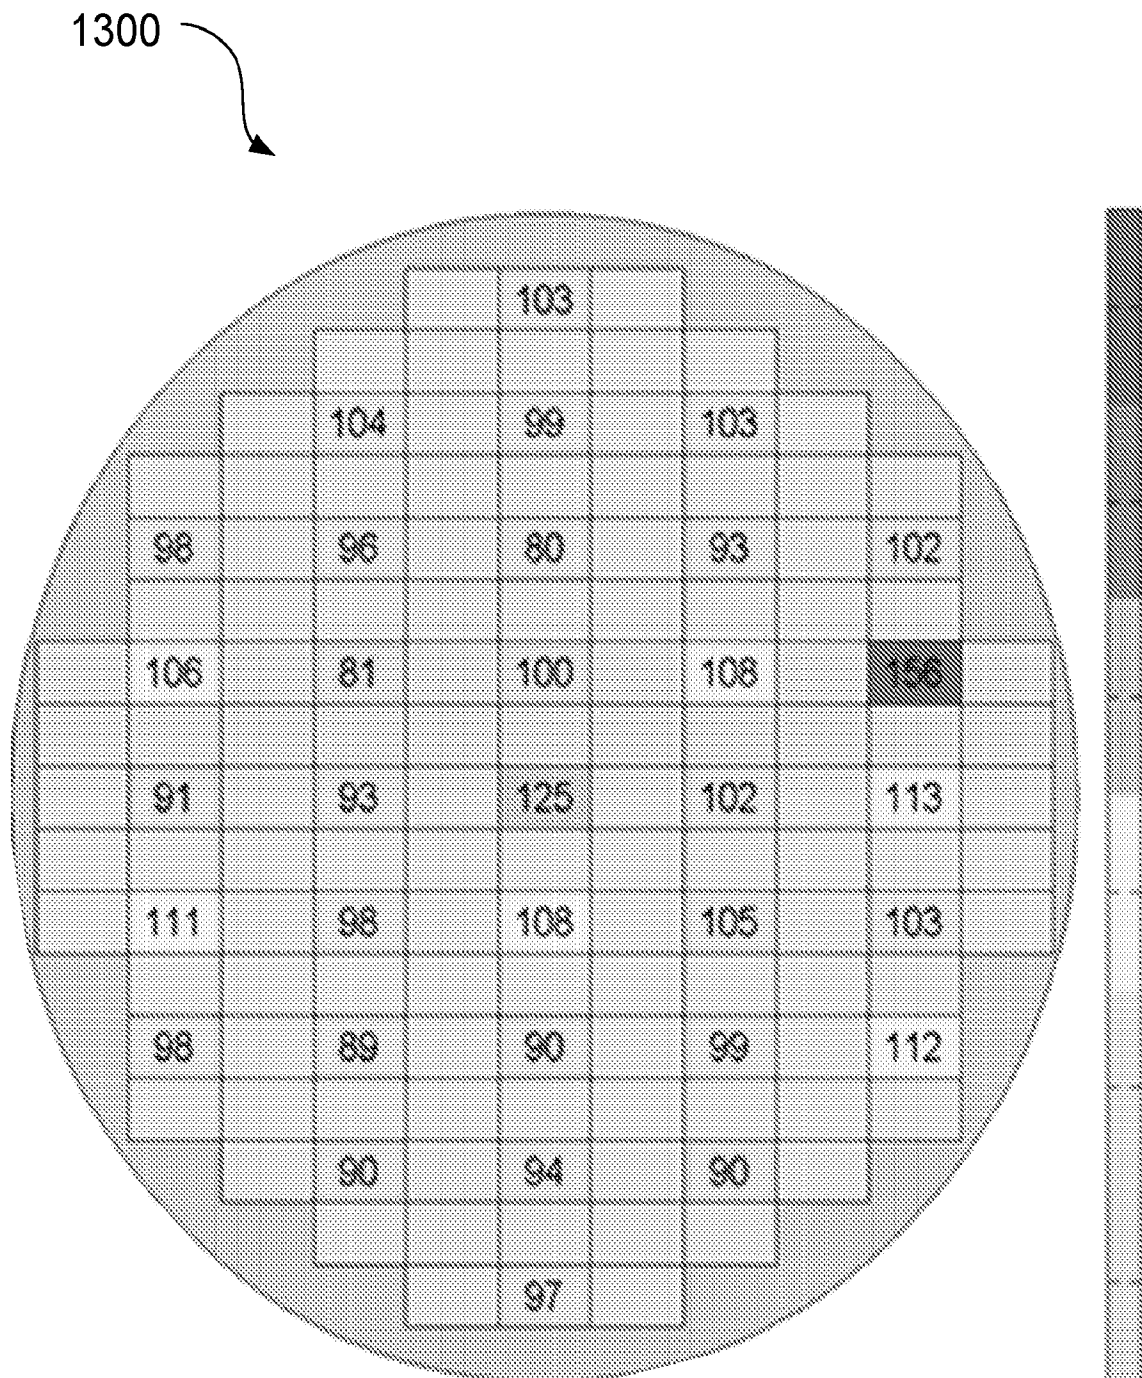

**FIG. 13**

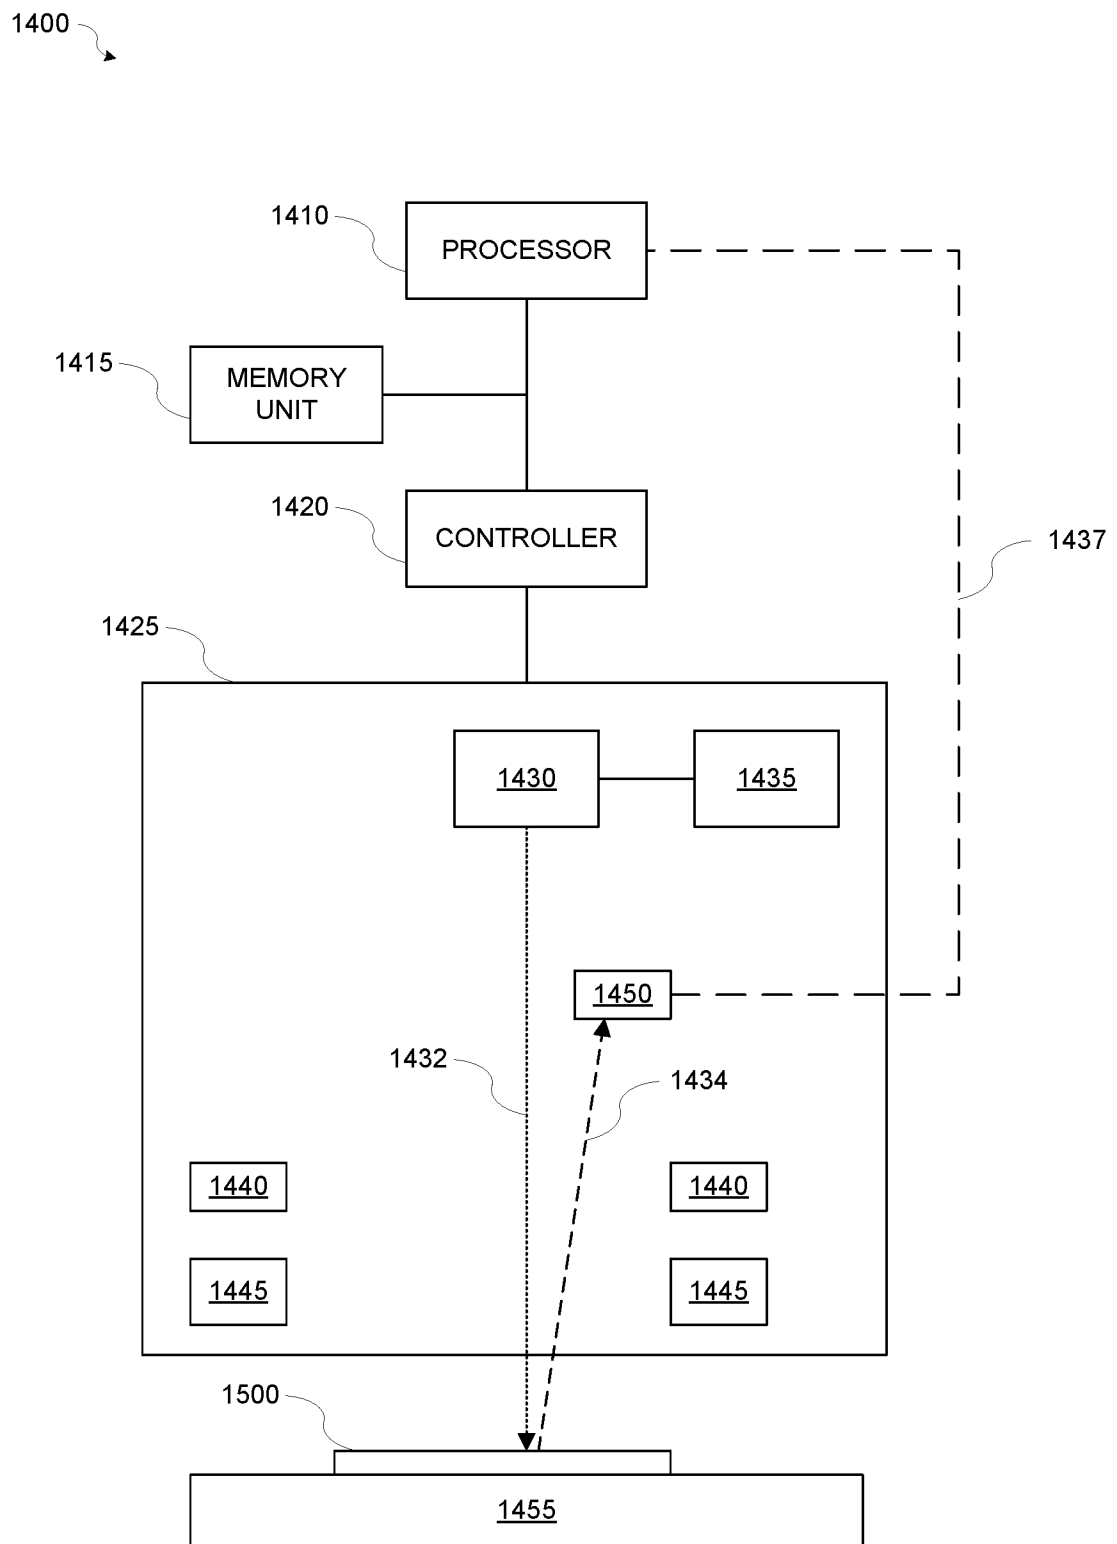

**FIG. 14**

**A. CLASSIFICATION OF SUBJECT MATTER****H01L 21/66(2006.01)i, G01Q 90/00(2010.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

H01L 21/66; G01N 21/88; G01N 23/00; G21K 7/00; H01J 37/04; H01J 37/22; H01J 37/26; G01Q 90/00

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) &amp; Keywords: electron beam, metal line, void, reference, gray level

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

| Category* | Citation of document, with indication, where appropriate, of the relevant passages                                       | Relevant to claim No. |
|-----------|--------------------------------------------------------------------------------------------------------------------------|-----------------------|
| X         | US 2013-0256528 A1 (HONG XIAO et al.) 03 October 2013<br>See paragraphs [0014]–[0042] and figures 1–3.                   | 10, 11, 15, 16        |
| Y         |                                                                                                                          | 1–9, 12–14, 17–20     |
| Y         | US 2015-0170875 A1 (HITACHI HIGH-TECHNOLOGIES CORPORATION) 18 June 2015<br>See paragraphs [0028]–[0049] and figures 1–6. | 1–9                   |
| Y         | US 2006-0049349 A1 (DROR SHEMESH) 09 March 2006<br>See paragraphs [0024]–[0080] and figures 1–10.                        | 3, 6, 12–14, 17–20    |
| A         | US 2006-0232768 A1 (PETER G. BORDEN et al.) 19 October 2006<br>See paragraphs [0037]–[0088] and figures 2–13D.           | 1–20                  |
| A         | US 2009-0218490 A1 (SHINICHI SUZUKI et al.) 03 September 2009<br>See paragraphs [0023]–[0035] and figures 1–9.           | 1–20                  |



Further documents are listed in the continuation of Box C.



See patent family annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&amp;" document member of the same patent family

Date of the actual completion of the international search

19 November 2018 (19.11.2018)

Date of mailing of the international search report

**19 November 2018 (19.11.2018)**

Name and mailing address of the ISA/KR

International Application Division

Korean Intellectual Property Office

189 Cheongsa-ro, Seo-gu, Daejeon, 35208, Republic of Korea




Facsimile No. +82-42-481-8578

Authorized officer

CHOI, Sang Won

Telephone No. +82-42-481-8291



**INTERNATIONAL SEARCH REPORT**

Information on patent family members

International application No.

**PCT/US2018/044596**

| Patent document<br>cited in search report | Publication<br>date | Patent family<br>member(s) | Publication<br>date |
|-------------------------------------------|---------------------|----------------------------|---------------------|
| US 2013-0256528 A1                        | 03/10/2013          | CN 104321856 A             | 28/01/2015          |
|                                           |                     | EP 2831908 A1              | 04/02/2015          |
|                                           |                     | IL 234852 A                | 31/12/2014          |
|                                           |                     | KR 10-2015-0001772 A       | 06/01/2015          |
|                                           |                     | SG 11201406092 A           | 27/11/2014          |
|                                           |                     | TW 201346254 A             | 16/11/2013          |
|                                           |                     | TW I582416 B               | 11/05/2017          |
|                                           |                     | US 2014-0319340 A1         | 30/10/2014          |
|                                           |                     | US 8723115 B2              | 13/05/2014          |
|                                           |                     | US 9116109 B2              | 25/08/2015          |
|                                           |                     | WO 2013-148608 A1          | 03/10/2013          |
| US 2015-0170875 A1                        | 18/06/2015          | JP 2014-032833 A           | 20/02/2014          |
|                                           |                     | JP 5836221 B2              | 24/12/2015          |
|                                           |                     | KR 10-1730919 B1           | 27/04/2017          |
|                                           |                     | KR 10-2015-0014994 A       | 09/02/2015          |
|                                           |                     | TW 201415013 A             | 16/04/2014          |
|                                           |                     | TW I484169 B               | 11/05/2015          |
|                                           |                     | US 9177757 B2              | 03/11/2015          |
|                                           |                     | WO 2014-021019 A1          | 06/02/2014          |
| US 2006-0049349 A1                        | 09/03/2006          | AU 2003-277329 A1          | 04/05/2004          |
|                                           |                     | AU 2003-279904 A1          | 04/05/2004          |
|                                           |                     | CN 1720445 A               | 11/01/2006          |
|                                           |                     | CN 1720445 B               | 16/06/2010          |
|                                           |                     | CN 1720446 A               | 11/01/2006          |
|                                           |                     | US 2006-0054811 A1         | 16/03/2006          |
|                                           |                     | US 7312446 B2              | 25/12/2007          |
|                                           |                     | US 7365320 B2              | 29/04/2008          |
|                                           |                     | WO 2004-034043 A2          | 22/04/2004          |
|                                           |                     | WO 2004-034043 A3          | 01/07/2004          |
|                                           |                     | WO 2004-034044 A1          | 22/04/2004          |
| US 2006-0232768 A1                        | 19/10/2006          | AU 1999-44328 A1           | 30/12/1999          |
|                                           |                     | AU 2003-217866 A1          | 16/09/2003          |
|                                           |                     | AU 4432899 A               | 30/12/1999          |
|                                           |                     | EP 1118005 A1              | 25/07/2001          |
|                                           |                     | JP 2002-517915 A           | 18/06/2002          |
|                                           |                     | TW 200305241 A             | 16/10/2003          |
|                                           |                     | TW 277163 A                | 21/03/2007          |
|                                           |                     | TW I277163 B               | 21/03/2007          |
|                                           |                     | US 2002-0125905 A1         | 12/09/2002          |
|                                           |                     | US 2003-0085730 A1         | 08/05/2003          |
|                                           |                     | US 2004-0119978 A1         | 24/06/2004          |
|                                           |                     | US 2005-0112788 A1         | 26/05/2005          |
|                                           |                     | US 2005-0186776 A1         | 25/08/2005          |
|                                           |                     | US 6049220 A               | 11/04/2000          |
|                                           |                     | US 6489801 B1              | 03/12/2002          |
|                                           |                     | US 6885444 B2              | 26/04/2005          |

**INTERNATIONAL SEARCH REPORT**

Information on patent family members

International application No.

**PCT/US2018/044596**

| Patent document<br>cited in search report | Publication<br>date | Patent family<br>member(s) | Publication<br>date |
|-------------------------------------------|---------------------|----------------------------|---------------------|
|                                           |                     | US 6906801 B2              | 14/06/2005          |
|                                           |                     | US 7064822 B2              | 20/06/2006          |
|                                           |                     | US 7088444 B2              | 08/08/2006          |
|                                           |                     | US 7301619 B2              | 27/11/2007          |
|                                           |                     | WO 03-074974 A2            | 12/09/2003          |
|                                           |                     | WO 2003-074974 A3          | 04/03/2004          |
|                                           |                     | WO 99-64880 A1             | 16/12/1999          |
| US 2009-0218490 A1                        | 03/09/2009          | JP 2009-206295 A           | 10/09/2009          |