



(12) UK Patent (19) GB (11) 2 167 666 (13) B

(54) Title of Invention

Disposable waste-containment garment

(51) INT CL⁴; A61F 13/00 // A41B 13/02, A61F 13/16

(21) Application No
8522916

(22) Date of filing
17 Sep 1985

(30) Priority data

(31) 651374

(32) 17 Sep 1984

(33) United States of
America (US)

(43) Application published
4 Jun 1986

(45) Patent published
16 Nov 1988

(52) Domestic classification
(Edition J)
A5R PG
A3V 1B3B

(56) Documents cited
GB 1480926
GB 1438412
EP A2 0211815
US 4147580
US 3913579

(58) Field of search
A5R
Selected US
specifications from
IPC sub-class A61F

(73) Proprietor(s)
The Procter & Gamble
Company

(Incorporated in USA-
Ohio)

One Procter & Gamble
Plaza
Cincinnati
Ohio 45202
United States of America

(72) Inventor(s)
James A Minetola
David Richard Tucker

(74) Agent and/or
Address for Service
Tony Nicholas Gibson
Procter and Gamble (NTC)
Limited
P O Box
Forest Hall No 2
Whitley Road
Longbenton
Newcastle NE12 9TS

1/1
Fig. 1


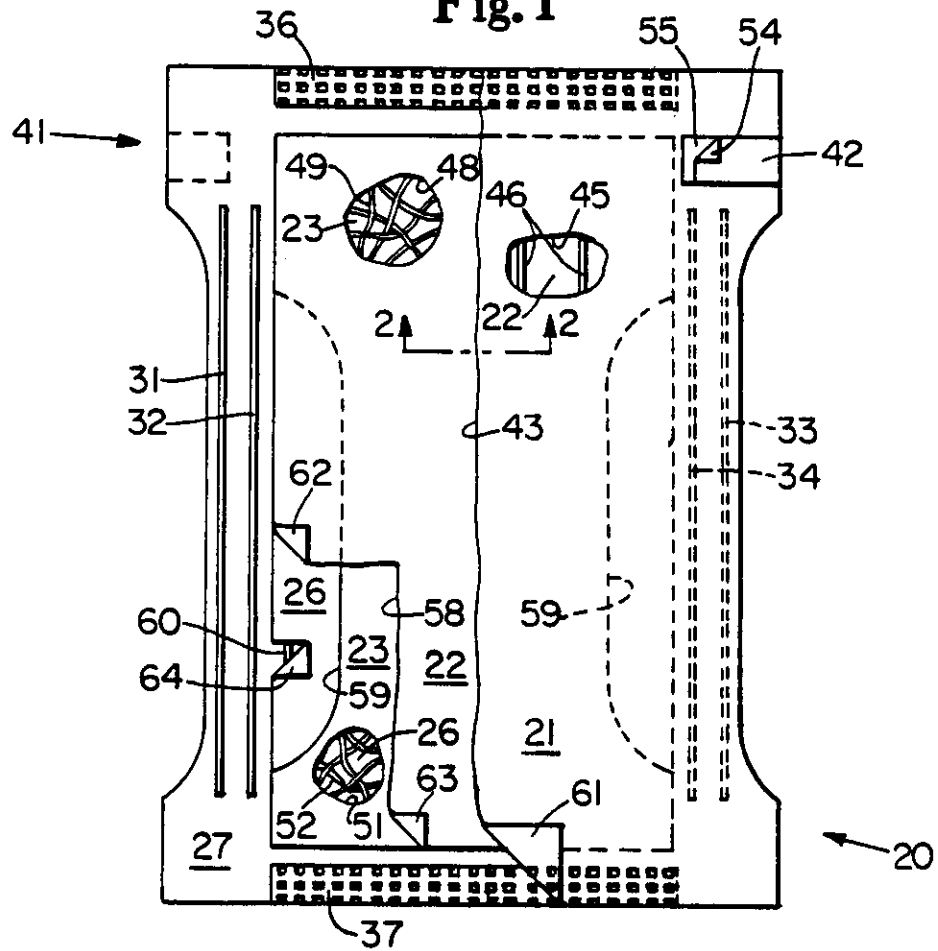


Fig. 2

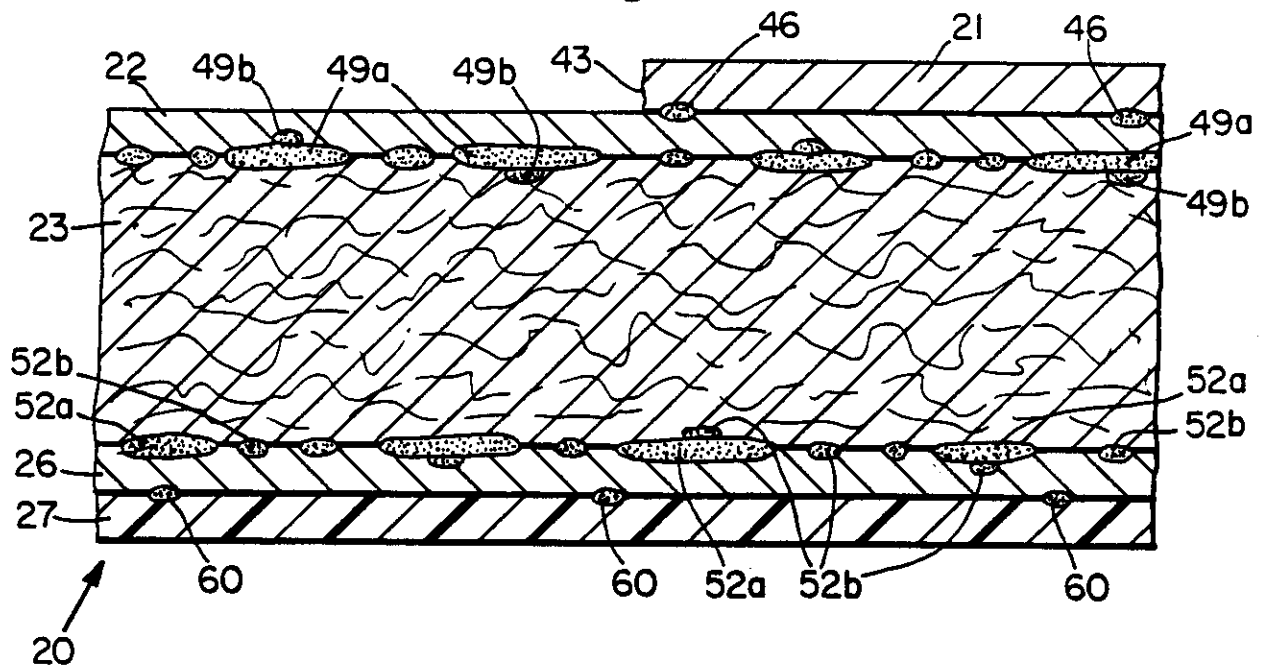

DISPOSABLE WASTE-CONTAINMENT GARMENT

JAMES A. MINETOLA

and

DAVID RICHARD TUCKER

This invention relates to disposable waste-containment or collection garments, and pads and the like: in particular, disposable diapers, disposable external incontinent protection garments for adults which are broadly referred to as adult incontinent products such as briefs, liners for such diapers and briefs, and external catamenial pads. More specifically, this invention pertains to such garments which comprise absorbent cores comprising a mass of fibers substantially devoid of interfiber bonds (e.g. airlaid cores and airfelt cores and the like), and are laminated, and wherein particular laminae are adhesively secured together with particular patterns, quantities, and types of adhesives to achieve faster absorbency; less core slumping, cracking and roping; and increased tensile strength without substantially reducing either the softness or overall absorbency of such garments. The invention is particularly effective, for example, in elasticized laminated disposable diapers having elasticized leg cuffs and/or elasticized waistband regions, inasmuch as unbonded laminae of such structures tend to separate from their respective absorbent cores and adopt a pillow-like configuration to an even greater extent than in non-elasticized disposable diapers. This results in substantially greater impairment of urine absorption directly into the absorbent core of an elasticised disposable diaper relative to that occurring in a non-elasticized disposable diaper.

U.S. Patent 4,147,580 which issued April 3, 1979 to Kenneth B. Buell discloses a Method Of Bonding A Porous Fibrous Web To A Substrate: for example, a method of partially laminating a disposable diaper wherein hot melt adhesive globules are applied to the back surface of the diaper's topsheet by causing hot-melt adhesive to be wiped from a controlled thickness, contacting-type adhesive source. U.S. Patent

3,978,257 which issued August 31, 1976 to David F. Ring discloses an Internally Adhesively Bonded Fibrous Web: i.e., plural fibrous webs such as airlaid fibrous webs which are suitable for absorbent cores of disposable diapers are joined together in face to face relation so that the adhesive forms a scrim which is internal of the cores, and leaves the outwardly facing surfaces of the cores substantially free of adhesive. While these background patents have solved some of the problems related to core/diaper integrity of laminated, disposable waste-containment garments and the like, they have not solved the problems to the extent nor in the manner of the present invention, particularly with respect to the lamina separation phenomenon described above, although it is not intended to thereby limit the present invention.

According to the present invention there is provided a disposable waste-containment garment comprising an absorbent core, a liquid permeable lamina, and a liquid impermeable backsheet, said absorbent core comprising a mass of fibers substantially devoid of interfiber bonds, said absorbent core being disposed intermediate said lamina and said backsheet, and being adhesively secured to said lamina by means of an open pattern of adhesive on the surface of said core in face to face relation with said lamina, said pattern having an average weight of from 0.8 g/m^2 to 4.7 g/m^2 , said pattern comprising a reticulated network of filaments or a fine pattern of small globules, said filaments or globules having individual effective diameters that are approximately of the same order of magnitude as the effective average diameter of the fibers which constitute the absorbent core.

Preferably the open pattern of adhesive has an average weight of from 2 g/m^2 to 3.6 g/m^2 .

The adhesive may be of the hot melt type or of the pressure sensitive type or both and the quantity of adhesive lies in the range of from 0.8 g/m^2 to 4.7 g/m^2 , preferably from 2 g/m^2 to 3.6 g/m^2 , most preferably approximately 3.1 g/m^2 . An additional lamina may also be disposed between the absorbent core and the backsheet. The absorbent core may further comprise highly absorbent matter which is generically referred to and described hereinafter as supersorber material and which is present in an amount in the range of from 10% to 25% by weight of said absorbent core.

The laminae may be associated to form an envelope which contains the absorbent core and obviates the sifting of the core components from out of the garment. Other open patterns of adhesive - preferably of the same type and level of adhesive as that constituting the open pattern of adhesive between the liquid permeable lamina and the absorbent core - may be incorporated in the garment intermediate other adjacent elements thereof.

An embodiment of the invention is illustrated in the accompanying drawings in which:

Figure 1 is a plan view of an elasticized disposable diaper embodiment of the present invention in which view a number of portions are torn away and folded back to more clearly show the interior construction thereof.

Figure 2 is a fragmentary transverse sectional view taken along section line 2-2 of Figure 1, and in which view the thickness of the laminae and the sizes of the adhesive formations are exaggerated for clarity.

Disposable diaper 20, Figure 1, which is an exemplary embodiment of the present invention is shown to comprise a liquid permeable topsheet 21, a top wet-strength tissue 22, an absorbent core 23, a back wet-strength tissue 26, a liquid impermeable backsheet 27, elastic strands 31 through 34 which elasticize the leg cuff portions of the diaper, elastic bands 36 and 37 which elasticize the waistband regions of the diaper, and tape fasteners 41 and 42 (only a portion of fastener 41 being shown due to the left half of topsheet 21 having been torn away along line 43). For further clarity; a hole defined by edge 45 has been torn in the top sheet 21 to reveal a plurality of longitudinally extending hot melt glue beads 46 which secure the topsheet 21 to an underlying portion of top wet-strength tissue 22; a hole defined by edge 48 has been torn in top wet-strength tissue 22 to reveal an underlying portion of absorbent core 23 and a network 49 of filaments of a hot melt adhesive which is preferably pressure sensitive adhesive; a hole defined by edge 51 has been torn through the absorbent core 23 to show an underlying portion of the back wet-strength tissue 26 and a network 52 of filaments of hot melt adhesive which is also preferably pressure sensitive; a corner 54 of tape fastener 42 is folded back to reveal a portion of

the underlying release tape 55 of the fastener assembly; a portion of the top wet-strength tissue 22 is torn away along line 58 to show underlying portions of the absorbent core 23, a notched side edge 59 of absorbent core 23, and underlying portions of the back wet-strength tissue 26, the backsheet 27, and a glue bead 60 which is one of a plurality of glue beads which adhere the backsheet 27 to the back wet-strength tissue 26; and corner 61 of topsheet 21, corners 62 and 63 of the top wet-strength tissue 22, and corner 64 of the back wet-strength tissue 26 are turned back to further elucidate the construction of diaper 20.

In Figure 2 -- a fragmentary sectional view of diaper 20, Figure 1 -- the filament portions of the networks 49 and 52 of adhesive which are essentially longitudinally sectioned are designated 49a and 52a, respectively, and the filament portions which are essentially transversely sectioned are designated 49b and 52b, respectively. The abutting pairs of 49a/49b and 52a/52b depict inter-filament junctures in the networks of adhesive. The relative sizes of the adhesive filaments, the adhesive beads 46 and 60, and the thicknesses of the laminae are exaggerated for clarity of the invention but also depict an exaggerated degree of closedness of the interface between the top wet-strength tissue 22 and the absorbent core 23 when, preferably, that interface is eighty (80) percent or greater open area and, more preferably, at ninety (90). Additionally, Figure 2 does not show the relative size relationship between the fibers which constitute absorbent core 23 and the filaments of the adhesive networks 49 and 52, Figure 1. In fact,

the adhesive filaments have diameters about equal in order of magnitude to the diameters of the fibers; and the crossovers or junctures of the networks are substantially more closely spaced than the average length of the fibers of the core 23.

Basically, the low level of adhesive constituting the open pattern of adhesive 49 precipitates improved garment integrity in general, and more core integrity in particular without unduly negatively affecting absorbency or softness. More specifically,

embodiments of the present invention have improved resistance to core cracking, slumping, and roping.

Of course, further improvement is realized in embodiments of the invention which comprise the additional elements and open patterns of adhesive delineated hereinabove.

Referring again to Figure 1, an exemplary disposable diaper of this configuration comprises the following. The topsheet is a nonwoven hydrophobic polypropylene having a basis weight of from fifteen (15) to thirty (30) grams per square meter. The top and back wet-strength tissues 22 and 26, respectively, are portions of a sheet of wet-strength tissue which is wrapped about the core 23 to form an envelope thereabout, and which tissue sheet has overlapped longitudinally extending edge portions disposed between the core and the backsheet; and the wet-strength tissue has a basis weight of from sixteen (16) to twenty-three (23) grams per square meter, and machine and cross-machine wet tensile strengths of from one-hundred-fifty (150) to four-hundred (400) grams per sample having a width of two-and-fifty-four-hundredths (2.54) centimeters, and from seventy-five (75) to one-hundred-twenty-five (125) grams per sample having a width of two-and-fifty-four-hundredths (2.54) centimeters, respectively. Such tissue paper is excellent for obviating sifting out of the fibers of the absorbent core and, in embodiments comprising supersorber particulate, for also obviating sifting out of such particulate matter. The core 23 is an airlaid matt of cellulosic fibers which are substantially unbonded to each other through the thickness of the core, and the matt has a basis weight of from three-hundred-ten (310) grams per square meter to twelve-hundred-forty (1240) grams per square meter; and density of seven-hundredths (0.07) grams per cubic centimeter in its crotch region and three-hundredths (0.03) grams per cubic centimeter in its end regions. The backsheet 27 is matte-finish polyethylene having a nominal

thickness of one mil (about 0.0254 mm). The adhesive used for glue beads 46 and 60 is hot melt adhesive; and the adhesive used for adhesive networks 49 and 52 is also preferably hot melt adhesive of the pressure sensitive type. It is, however, not intended to limit the present invention to these materials or weights or the like inasmuch as such parameters may be changed to provide embodiments of the invention in a variety of sizes, and capacities, and the like.

A preferred pressure sensitive hot melt adhesive for constituting adhesive networks 49 and 52, Figure 1, is identified by Adhesive Specification No. 990-374 of Findley Adhesives Inc. and a preferred non-pressure sensitive hot melt adhesive for constituting adhesive networks 49 and 52 is Stock No. 34-2857 which is available from National Starch Company.

Core slumping as used hereinbefore is, briefly, determined by drawing horizontal lines on the leading and trailing edges of the core of a disposable diaper. The flat diaper is submerged in water for two (2) minutes, U-folded in half, removed from the water, and allowed to hang from its waistband edges in the U-folded configuration for twenty-four to forty-eight hours. The slumping distance between the original horizontal lines and the receded edges of the core are then measured.

Core roping as used hereinbefore is determined by securing a disposable diaper on an articulated dummy which has a walking motion. The articulated dummy is caused to have a walking type motion for five (5) minutes. The diaper is then removed from the apparatus, and the core is measured for width reduction, tears and hard spots. The width reduction of the core is its degree of roping.

Referring now to the absorbent particulate matter which has been referred to hereinbefore as supersorbers, hydrogel materials are very effective. By "hydrogel" as used herein is meant an inorganic or organic compound capable of absorbing aqueous fluids and retaining them under moderate pressures. For good results, the hydrogels should be water insoluble. Examples are inorganic materials such as silica gels and organic compounds such as cross-linked polymers. Cross-linking may be by covalent, ionic, vander Waals, or hydrogen bonding. Examples of polymers include polyacrylamides, polyvinyl alcohol, ethylene maleic anhydride copolymers, polyvinyl ethers, hydroxypropyl cellulose, carboxymethyl cellulose, polyvinyl morpholinone, polymers and copolymers of vinyl sulfonic acid, polyacrylates, polyacrylamides, and polyvinyl pyridine. Other suitable hydrogels are those disclosed in U.S. Patent 3,901,236, issued to Assarsson et al., August 26, 1975,

Particularly preferred polymers for use herein are hydrolyzed acrylonitrile grafted starch, acrylic acid grafted starch, polyacrylates, and isobutylene maleic anhydride copolymers, or mixtures thereof.

For the purpose of utilizing hydrogels in the present invention, it is essential that relatively dry hydrogel particles be used. Also, neither the fibers, the particles nor the mixture of fibers and particles should be exposed to water in its liquid form, or another solvent, at any time during this process or subsequent thereto. When wet hydrogel particles are used, the fibers tend to become entangled and/or bonded with the particles which result in undesirable stiffness of the absorbent structure. Additionally, wet hydrogel particles would obviously have less absorbency efficacy in the product inasmuch as their potential absorbency would already be diminished.

As used herein, "dry" does not mean "absolutely water-free". For example, under normal storage and handling conditions, hydrogel particles take up some moisture. The hydrophilic fibers also take up some moisture during storage. Furthermore, it may be desirable to use humidified air for air transport of the fibers and the hydrogel particles, to avoid dusting. Under such process conditions, the hydrogel particles and the fibers will take up even more moisture, but such should be limited so that it does not unduly affect the practice of the present invention.

Additional alternate embodiments may omit the top wet-strength tissue 22 in which case the topsheet is the liquid permeable lamina; otherwise, of course, the "liquid permeable lamina" of the claims is an internal lamina and is preferably wet-strength tissue as described above. Furthermore the arrays of glue beads 46 and 60 may, in alternate embodiments, be replaced by open patterns of networks of filaments of adhesive or hosts of small globules of adhesive as described above in similar amounts. Such open patterns of adhesive obviate the stress concentrations and stiffness precipitated by such glue beads.

The disposable waste containment garments of the present invention also display surprisingly good rewet characteristics, i.e. there is a relatively low tendency for liquid absorbed and held in the absorbent core to pass back through the body-contacting liquid permeable lamina, so as to wet the skin of the wearer.

CLAIMS

1. A disposable waste-containment garment comprising an absorbent core, a liquid permeable lamina, and a liquid impermeable backsheet, said absorbent core comprising a mass of fibers substantially devoid of interfiber bonds, said absorbent core being disposed intermediate said lamina and said backsheet, and being adhesively secured to said lamina by means of an open pattern of adhesive on the surface of said core in face to face relation with said lamina, said pattern having an average weight of from 0.8g/m^2 to 4.7g/m^2 , said pattern comprising a reticulated network of filaments or a fine pattern of small globules, said filaments or globules having individual effective diameters that are approximately of the same order of magnitude as the effective average diameter of the fibers which constitute the absorbent core.
2. A disposable waste-containment garment according to claim 1 wherein said open pattern of adhesive has an average weight of from 2g/m^2 to 3.6g/m^2 .
3. A disposable waste-containment garment according to any one of claims 1 and 2 wherein the outwardly facing surface of said lamina is the surface of said garment intended for contact with the skin of a wearer of said garment and is denominated the topsheet of said garment.
4. A disposable waste-containment garment according to either one of claims 1 and 2, said garment further comprising a liquid permeable topsheet, and said lamina being disposed intermediate said topsheet and said absorbent core.
5. A disposable waste-containment garment according to claim 4 wherein said lamina and said topsheet are secured together in face to face relation with another open pattern of adhesive.

6. A disposable waste-containment garment according to claim 5 wherein the edges of said liquid permeable lamina are also adhesively secured to said backsheet with said absorbent core sealed therebetween.
7. A disposable waste-containment garment according to any one of the preceding claims wherein said adhesive is a hot melt adhesive.
8. A disposable waste-containment garment according to any one of the preceding claims wherein said adhesive is a pressure sensitive adhesive.
9. A disposable waste-containment garment according to any one of the previous claims wherein the lamina comprises at least one wall of an envelope which encloses said absorbent core, said absorbent core further comprising elements of dry, highly liquid-absorbent, matter.
10. A disposable waste-containment garment according to claim 9 wherein the weight of said highly liquid absorbent matter is in the range of from ten to twenty-five percent by weight of said absorbent core.
11. A disposable waste-containment garment according to any one of the preceding claims further comprising an additional open pattern of adhesive which is disposed to adhesively secure said absorbent core in face to face relation to said backsheet, said additional open pattern being a reticulated network of filaments of adhesive.

12. A disposable waste-containment garment according to any one of claims 1-10 further comprising another liquid permeable lamina which is disposed intermediate said absorbent core and said backsheet, and which said other liquid permeable lamina is adhesively secured in face to face relation with said absorbent core with a first additional open pattern of adhesive.

13. A disposable waste-containment garment according to claim 12 wherein said other liquid permeable lamina are also adhesively secured to said backsheet with said absorbent core sealed therebetween.

REGISTER ENTRY FOR GB2167666

Form 1 Application No GB8522916.9 filing date 17.09.1985

Priority claimed:

17.09.1984 in United States of America - doc: 651374

Title DISPOSABLE WASTE-CONTAINMENT GARMENT

Applicant/Proprietor

THE PROCTER & GAMBLE COMPANY, Incorporated in USA - Ohio, One Procter &
Gamble Plaza, Cincinnati, Ohio 45202, United States of America

[ADP No. 00889519003]

Inventors

JAMES A MINETOLA, 956 W Galbraith Road, Cincinnati, Ohio 45231, United
States of America

[ADP No. 03662673001]

DAVID RICHARD TUCKER, 7125 Cheyenne Way, Mason, Ohio 45040, United States
of America

[ADP No. 03662681001]

Classified to

A5R A3V

A61F

Address for Service

TONY NICHOLAS GIBSON, Procter and Gamble (NTC) Limited, Whitley Road,
Longbenton, P O Box Forest Hall No 2, Newcastle NE12 9TS, United Kingdom

[ADP No. 00065938001]

Publication No GB2167666 dated 04.06.1986

Examination requested 17.09.1985

Patent Granted with effect from 16.11.1988 (Section 25(1)) with title
DISPOSABLE WASTE-CONTAINMENT GARMENT

**** END OF REGISTER ENTRY ****

0A80-01
FG

OPTICS - PATENTS

04/04/91 09:37:57
PAGE: 1

RENEWAL DETAILS

PUBLICATION NUMBER GB2167666

PROPRIETOR(S)

The Procter & Gamble Company, Incorporated in USA - Ohio, One
Procter & Gamble Plaza, Cincinnati, Ohio 45202, United States of
America

DATE GRANTED 16.11.1988

DATE NEXT RENEWAL DUE 17.09.1991

DATE NOT IN FORCE

DATE OF LAST RENEWAL 03.08.1990

YEAR OF LAST RENEWAL 06

STATUS PATENT IN FORCE