

(19) **DANMARK**

(10) **DK/EP 3765674 T3**



(12) **Oversættelse af  
europæisk patentskrift**

Patent- og  
Varemærkestyrelsen

- 
- (51) Int.Cl.: **E 01 F 15/08 (2006.01)** **E 01 F 15/14 (2006.01)**
- (45) Oversættelsen bekendtgjort den: **2024-01-22**
- (80) Dato for Den Europæiske Patentmyndigheds bekendtgørelse om meddelelse af patentet: **2023-12-27**
- (86) Europæisk ansøgning nr.: **19715876.9**
- (86) Europæisk indleveringsdag: **2019-04-01**
- (87) Den europæiske ansøgnings publiceringsdag: **2021-01-20**
- (86) International ansøgning nr.: **EP2019058179**
- (87) Internationalt publikationsnr.: **WO2019192955**
- (30) Prioritet: **2018-04-04 EP 18165619**
- (84) Designerede stater: **AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR**
- (73) Patenthaver: **ROCKWOOL A/S, Hovedgaden 584, Fløng, 2640 Hedehusene, Danmark**
- (72) Opfinder: **EMBORG, Michael, c/o Rockwool International A/S Hovedvejen 584, 2640 Hedehusene, Danmark**
- (74) Fuldmægtig i Danmark: **Novagraaf Brevets, Bâtiment O2, 2 rue Sarah Bernhardt CS90017, F-92665 Asnières-sur-Seine cedex, Frankrig**
- (54) Benævnelse: **SIKKERHEDSBARRIERE FREMSTILLET AF MINERALULD FYLDBAR MED EN VÆSKE**
- (56) Fremdragne publikationer:  
**EP-A2- 0 962 399**  
**WO-A1-02/096756**  
**WO-A1-2013/113410**  
**US-A1- 2004 141 807**  
**US-A1- 2017 175 349**  
**US-B1- 7 275 888**



## DESCRIPTION

**[0001]** The present invention relates to a security barrier for providing protection in a public space and a method of manufacturing such security barrier.

**[0002]** Barriers of such kind may be provided as concrete blocks which are placed at entrances or the like to block vehicles from entering a public space around a potential terror target and thereby prevent vehicles being used for terror. Further security barriers or anti-terror safeguards may be provided in composite materials so that the barrier block may also provide ballistic protection. The barriers may be needed temporarily at sites for public events where large crowds are gathered and some security barriers are therefore designed for not only durability but also reusability. Examples of such security barriers are known from e.g. US 2009/0092443 A1, US 2008/0047418 and US 2010/0300275. Since such security barriers are generally large and are placed in the public space at generally visibly noticeable positions, it is also desired that the security barriers are provided with at least some degree of aesthetic appearance. From US 2004/0076468 an example of such type of security barrier is known.

**[0003]** US2017/0175349 discloses a barrier, which includes recycled rubber portions molded around a core infrastructure. The core infrastructure may itself include recycled rubber in a containment body. The containment body may include baled recycled or other waste material. The barriers may be stacked or connected to form a barrier structure useful in environmental control and other applications. The method for making the barriers includes molding rubber portions and a binder around a core infrastructure.

**[0004]** US2004/0141807 discloses a traffic control device including at least one barrier unit comprising a top wall formed with at least two openings, a bottom wall having post boots which align with the openings in the top wall, opposed end walls, and, opposed side walls interconnected to form a hollow interior. A post is releasably inserted into the hollow interior of the barrier unit through each opening in its top wall so that an inner portion of each post is received within an aligning post boot on the bottom wall. An outer portion of the posts protrude from the top wall of the barrier unit and support horizontally oriented panels, the uppermost one of which mounts a sign.

**[0005]** US7,275,888 discloses a stackable interlocking barrier system, which includes a first barrier having a front wall and a back wall each extending between a top wall and a floor, at least a portion of the front wall being sloped relative to the back wall. A second barrier also has a front wall and a back wall each extending between a top wall and a floor, at least a portion of the front wall being sloped relative to the back wall. The second barrier is inverted relative to the first barrier with the front wall of the second barrier seated against the front wall of the first barrier. A first connector is removably mounted on the first barrier and the second barrier so as to secure the first barrier to the second barrier.

**[0006]** It is required for the security barrier to be heavy so that it is not easily moved and

pushed aside by even a large vehicle, such as a truck. In order to provide adequate blockage it is also required that the security barriers have a relatively large size e.g. to absorb projectiles from firearms or fragments from explosives or the like. However, it is also desired that the security barriers can be moved from usage at a temporary site and then stored and reused again. This handling in order to recycle the security barriers for reuse, however, is difficult and cumbersome due to the size and the weight of the security barriers.

**[0007]** It is therefore an object of the present invention to provide a security barrier which is suitable for reuse, is stable and easier to handle during transport, storage and installation without compromising the anti-terror blockage effect which such security barrier is also required to provide.

**[0008]** This object is achieved by providing a security barrier, said barrier comprising a mineral wool assembly comprising at least one mineral wool element having an outer liquid impermeable covering and wherein the at least one mineral wool element is adapted for being filled with a liquid, wherein the covering comprises an opening for filling the security barrier with a liquid.

**[0009]** It is found advantageous that the security barrier according to the invention has a relatively low weight for transport and handling and then can be made heavy by filling the mineral wool element(s) with a liquid, preferably water. By using mineral wool fibre elements for the security barriers it is found advantageous since this material has very good ballistic dampening properties and experiments have shown that a projectile fired from a firearm can be stopped and only penetrate about 40 cm into the mineral wool material. Besides this ballistic dampening property, the mineral wool element fills the space inside the covering and thereby provides additional stability to the barrier, in particular preventing collapse of the space of the security barrier prior to filling.

**[0010]** The security barrier according to the invention is also found attractive from an aesthetic aspect. Since security barriers are used in public spaces it is found attractive that the security barriers according to the invention may be provided in different colours and with selected surface textures and even in different shapes, whereby a community council, an event organiser or the like can have the required security barriers custom made for the specific event.

**[0011]** In a particular aspect of the invention it is realised that a security barrier according to the invention may be provided in an indoor public space, such as for establishing security zones in an airport or a railway station.

**[0012]** The liquid impermeable covering may be in the form of a coating or a covering foil and/or laminate made of glass fibre webs or a carbon fibre webs. By applying a covering it is also advantageous that an individual security barrier may be both decorated and re-decorated, e.g. by (re-)spraying, according to its actual temporary use.

**[0013]** The mineral wool elements may have a pore volume of up to 97% and can therefore contain a relatively high amount of water, assuming the mineral wool has a binder weight fraction of 3.5 %, binder density of 1346 kg/m<sup>3</sup> and fibre density of 2800 kg/m<sup>3</sup>. Preferably the density of the mineral wool element in its dry state is 75-200 kg/m<sup>3</sup>, preferably 75-150 kg/m<sup>3</sup>, more preferably 90-120 kg/m<sup>3</sup>. To further increase the water capacity of the element(s), the at least one mineral wool element may comprise a wetting agent.

**[0014]** In a preferred embodiment, a plurality of mineral wool elements are provided adjacent each other. This is advantageous since the security barrier can be made in a simple manner by providing a multiple of mineral wool elements adjacent each other in an assembly and then covering the assembly. To facilitate the handling during manufacture, the mineral wool elements are adhered to each other at discrete spots so the liquid can flow from one element to the other and the interior liquid volume inside the liquid impermeable covering is thus one common volume, whereby the filling of water into the security barrier is not compromised.

**[0015]** In this embodiment, the mineral wool elements form a common base surface of the mineral wool assembly with two opposite end surfaces substantially perpendicular to the base surface, and wherein the top surfaces of the mineral wool elements are at different distances from the base surface. In a preferred embodiment, the mineral wool elements can be made of mineral wool batts of 2000x600 mm with different heights whereby the length of the barrier will be 2 meters and with a dry weight of such barrier of up to 500 kg depending on the height of each of the elements.

**[0016]** In a preferred embodiment, the covering is a coating. Hereby the mineral wool assembly can be provided with a liquid impermeable cover in a simple manner. More preferably, the coating may be sprayed onto the surface, such as the entire surface, of the mineral wool assembly comprising the one or more mineral wool elements. This coating material is advantageous as it provides a liquid tight resilient seal around the surface of the mineral wool elements assembly. The coating material provides a rubber-like surface coating preferably of 3-5 mm in thickness whereby the coating is sufficiently strong to withstand the internal pressure of the liquid and also to provide a good protection against impacts on the exterior of the security barrier.

**[0017]** Moreover, said coating may be of a material selected from a group consisting of polystyrene (PS) foam, including expanded polystyrene (EPS) and extruded polystyrene foam (XPS), styrofoam, and polyurethane (PU) foam. Such polymeric foam coverings, such as spray foams are well suited for making an impermeable lightweight covering, which is easy and cheap to apply.

**[0018]** Alternatively, the covering of the mineral wool elements can be made of any liquid impermeable material, such as metal, polymers or the like in the form of a foil, a film, a glass or carbon fibre web or laminates thereof. Depending on the choice of covering material, this can be applied by shaping, dipping (immersing) or spraying onto the surface of the mineral wool

element.

**[0019]** Accordingly, in an embodiment, the liquid impermeable covering may be a covering foil and/or fibre web laminate, such as glass fibre laminate or a carbon fibre laminate, said laminate preferably having 2-8 layers, more preferably 4-6 layers, more preferably 5 layers. It may be advantageous to use a fibre reinforced laminate, such as a glass fibre laminate with a multiple of layers as such laminate covering may provide good ballistic dampening and impact resistant properties to the covering. Glass fibre webs may be applied to the surface of the mineral wool elements by roller or the like where the web is wetted with resin which impregnates the fibres and bonds to the mineral wool elements as well.

**[0020]** In a particular embodiment, the outermost layer of the laminate may be a covering foil. This outer foil of the liquid impermeable covering may be provided with a predetermined colour scheme, such as printings of logos or the like. Hereby, the security barrier can be provided with an appearance which is adapted to the present environment in which the security barrier is applied. Accordingly, the security barriers according to the invention may be dressed as advertisements both by the colour scheme, logo prints as well as the shape in which the security barrier is provided.

**[0021]** In preferred embodiments, the foil or laminate is adhered to the mineral wool element(s) by an adhesive, such as a liquid adhesive or a powder adhesive, which is insoluble by the liquid to be filled into the security barrier. Preferably, the adhesive is water insoluble.

**[0022]** In the embodiments where the liquid impermeable covering is provided by multi-layered glass or carbon fibre webs, it may be advantageous that the laminate is adhered to the mineral wool element(s) by the resin of the fibre reinforced laminate. By the invention, it is realised that although specific references to glass fibre laminate or a carbon fibre laminates are made, any other material of fibre reinforcement may be used.

**[0023]** Preferably, an opening for liquid filling is provided in the covering, such as in the upper portion of the mineral wool assembly, for instance in the top surface thereof. Hereby a filling opening is provided so that the security barrier can be filled with water through this opening. Preferably, there is then provided a cover, such as a lid, covering the top surface at the highest distance from the base surface. There is preferably also provided a liquid filling cover covering the opening, for instance at the top surface at the highest distance from the base surface in order to prevent the liquid from evaporating.

**[0024]** In an embodiment of the security barrier according to the invention, a metal sheet cover is provided on one or more of the sides of the barrier. Hereby, an extra impact protection can be provided.

**[0025]** In order to monitor the security barrier when in use, it is found advantageous to provide a moisture detection sensor in the mineral wool assembly, preferably in the upper half thereof. Hereby, any leaks in the coating or evaporation of water through the top surface can be

detected.

**[0026]** To facilitate removal of the security barrier, it is found useful to provide a drainage arrangement, such as a hole and a plug, in the covering, preferably in the vicinity of the base surface. Hereby, the security barrier can be drained of liquid for easier removal as the weight thereby is decreased. The draining can be performed in a simple manner by removing a plug, drilling a hole in the covering or the like.

**[0027]** According to another aspect of the invention there is provided a method of manufacturing a security barrier according to any of the preceding claims, said method comprising the steps of providing a mineral wool assembly comprising at least one mineral wool element, and mounting an outer liquid impermeable covering around the mineral wool assembly.

**[0028]** Hereby, the security barrier can be manufactured off-site and stored in a "dry-weight" state where it is easier to handle. It is then a simple operation to transport one or more security barriers to a site and then fill them up once the barrier or barriers are provided on the predetermined location.

**[0029]** Preferably, the method of manufacturing also involves the step of mounting an outer liquid impermeable covering in the form of spray coating of the outer surface of the mineral wool assembly.

**[0030]** In order to achieve a desired shape of the security barrier, the method preferably also involves providing a plurality of mineral wool elements adjacent each other and adhering them to each other to form the mineral wool assembly, and whereby the mineral wool elements are secured to each other in discrete spots prior to the covering. This facilitates the handling of the mineral wool assembly during manufacture, and as the mineral wool elements are adhered to each other at discrete spots the liquid can flow from one element to the other since the interior liquid volume inside the liquid impermeable covering is thus one common volume. This ensures that the filling of water into the security barrier is not compromised.

**[0031]** In a further aspect of the invention, a method of preparing a security barrier is provided, wherein the method comprises the steps of positioning the security barrier manufactured by a method as explained above, and then filling the security barrier with a liquid, preferably water.

**[0032]** As explained above, this provides for a larger security barrier, which is nevertheless relatively easy to store and to move from a storage to a temporary position in the public space.

**[0033]** In the following the invention is disclosed in more detail with reference to the accompanying drawings, in which:

Figures 1 to 5 show steps in the manufacture of a security barrier according to an embodiment of the invention;

Fig. 6 shows a schematic view of a security barrier according to an embodiment of the invention, and

Fig. 7 shows a schematic a security barrier according to another embodiment of the invention with an individualised shape.

**[0034]** With reference to the figures 1 to 5, a security barrier 1 according to one embodiment of the invention is shown. In this embodiment, the security barrier 1 comprises three mineral wool elements 1', 1'', 1'''. As shown in the figures these three mineral wool elements have different heights and are placed adjacent each other and preferably adhered to each other at discrete spots (not shown) to form a mineral wool elements assembly.

**[0035]** Since the mineral wool elements are adhered to each other at discrete spots a liquid, preferably water, can flow from one mineral wool element 1', 1'', 1''' to the other and the interior liquid volume inside a coating 5 applied to the exterior surface of the mineral wool assembly 1. Thus, there is formed one common volume, which can be filled with to make the security barrier heavy and thereby very difficult to move.

**[0036]** The mineral wool elements 1', 1'', 1''' preferably form a common base surface (not visible in the figures) and end surfaces 2 at opposite side of the base surface but form individual top surfaces 10 at different distances from the base surface.

**[0037]** As shown in the figures the security barrier is given a stepwise increasing shape by providing the mineral wool elements 1', 1'', 1''' in different heights. The mineral wool elements 1', 1'', 1''' may have a pore volume of at least 95 % and can therefore contain a relatively high amount of water. The mineral wool may have a binder weight fraction of 3.5 %, binder density of 1346 kg/m<sup>3</sup> and fibre density of 2800 kg/m<sup>3</sup>. The density of the mineral wool elements 1', 1'', 1''' in its dry state is 75-200 kg/m<sup>3</sup>, preferably 75-150 kg/m<sup>3</sup>, more preferably 90-120 kg/m<sup>3</sup>. To further increase the water capacity of the elements, the mineral wool elements 1', 1'', 1''' are preferably hydrophilic.

### **Mineral wool fibres**

**[0038]** The mineral wool elements for the security barrier are made of man-made vitreous fibres (MMVF) which can be glass fibres, ceramic fibres, basalt fibres, slag wool, stone wool and others, but are usually stone wool fibres, bonded with a binder. Stone wool generally has a content of iron oxide at least 3% by weight and content of alkali earth metals such as calcium oxide and magnesium oxide from 10 to 40% by weight along with the other usual oxide constituents of MMVF. These are silica; alumina; alkali metals such as sodium oxide and potassium oxide which are usually present in low amounts; and can also include titania and other minor oxides. Fibre diameter is often in the range of 2 to 10 µm, preferably 3 to 5µm.

The MMVF material is in the form of a coherent mass. That is, the MMVF material is generally a coherent matrix of MMVF, which has been produced as such and formed into mineral wool elements for the security barrier.

### **Hydrophilicity**

**[0039]** Normally the MMVF material for mineral wool insulation contain oil for making the products hydrophobic and prevent them from absorbing moisture. The MMVF material for the security barrier elements is however, manufactured without adding of oil to make the elements less hydrophobic, and may even be hydrophilic that it attracts water, provided water is used to fill the security barrier. The MMVF material for the elements can be hydrophilic due to the binder system used, the binder itself may be hydrophilic and/or a wetting agent is used.

**[0040]** The hydrophilicity of a sample of MMVF can be measured by determining the sinking time of a sample. A sample of MMVF material having dimensions of 100x100x65mm is required for determining the sinking time. A container with a minimum size of 200x200x200mm is filled with water. The sinking time is the time from when the sample first contacts the water surface to the time when the test specimen is completely submerged. The sample is placed in contact with the water in such a way that a cross-section of 100x100mm first touches the water. The sample will then need to sink a distance of just over 65mm in order to be completely submerged. The faster the sample sinks, the more hydrophilic the sample is. The MMVF material is considered hydrophilic if the sinking time is less than 120 seconds. Preferably, the sinking time is less than 60 s. In practice, the MMVF material may have a sinking time of a few seconds, such as less than 10 seconds.

**[0041]** When the binder is hydrophobic, a wetting agent is additionally included in the MMVF material in order to ensure that the material is hydrophilic. A wetting agent will increase the amount of water that the MMVF material can absorb. The use of a wetting agent in combination with a hydrophobic binder results in a hydrophilic MMVF material.

**[0042]** The wetting agent used may be any of the wetting agents known for use in MMVF material that are used as growth substrates. For instance, it may be a non-ionic wetting agent such as Triton X-100 or Rewopal. Other wetting agents may be used, for instance anionic wetting agents such as linear alkyl benzene sulphonate or sodium lauryl ether sulphate (also called SLES). An example of an anionic SLES is Disponil FES27A supplied by BASF.

**[0043]** The binder of the MMVF material can be hydrophilic. The hydrophilic binder does not require the use of a wetting agent. A wetting agent can nevertheless be used to increase the hydrophilicity of a hydrophilic binder in a similar manner to its action in combination with a hydrophobic binder. This means that the MMVF material will absorb a higher volume of water than if the wetting agent is not present. Any hydrophilic binder known per se can be used.

### **Binder**

**[0044]** The binder may be any binders known for use as binders for coherent MMVF products. The binder may be an aldehyde based resin such as phenol formaldehyde resin (PF), phenol urea formaldehyde resin (PUF), urea formaldehyde resin (UF), melamine formaldehyde resin (MF), melamine urea formaldehyde resin (MUF), melamine phenol formaldehyde resin (MPF), and melamine urea phenol formaldehyde resin (MUPF). This type of binder can be economically produced for use as a binder in many applications including security barrier elements.

**[0045]** The binder may be a formaldehyde-free aqueous binder composition comprising: a binder component (A) obtainable by reacting at least one alkanolamine with at least one carboxylic anhydride and, optionally, treating the reaction product with a base; and a binder component (B) which comprises at least one carbohydrate, as disclosed in WO2004/007615. Binders of this type are hydrophilic.

**[0046]** Further formaldehyde-free binder compositions such as those comprising:

1. a) a sugar component, and
2. b) a reaction product of a polycarboxylic acid component and an alkanolamine component,

wherein the binder composition prior to curing contains at least 42% by weight of the sugar component based on the total weight (Dry matter) of the binder components may be used in the present invention, preferably in combination with a wetting agent. The binder may be a furan binder, as disclosed in WO97/07664, which lends its hydrophilic properties to the material. The use of furan resin allows for not adding a wetting agent. Binders of this type may be used in the present invention.

**[0047]** The mineral wool elements are made by melting the raw materials in large cupola furnaces at a temperature of about 1500°C. The melt is directed onto a series of fast rotating wheels spinning (if stone wool) and formed into rock fibres with an average diameter of about 2 to 10 microns. A binding agent is added and, for hydrophilic products, an additional wetting agent can be introduced (see above). The wool is then cured in special curing ovens. Between the interconnected fibres a constant void volume is maintained, which void volume will be filled with the liquid when the security barrier is in use.

**[0048]** Light mineral wool consists of air in an amount of 99% by weight and bound fibres in an amount of 1 % by weight. It follows that the heavier the product (higher density) the lower the amount of voids. The quantity of fibres in heavier mineral wool materials may be as high as 6%. With a density of 100 kg/m<sup>3</sup>, the mineral wool fibre products contain approx. 95-97% voids, where the mineral wool may have a binder weight fraction of approx. 3.5 %, binder density of approx. 1346 kg/m<sup>3</sup> and fibre density of approx. 2800 kg/m<sup>3</sup>.

**[0049]** As shown in fig. 3, a covering such as a coating 5 is applied, preferably by spraying.

**[0050]** The covering of the mineral wool elements can be made of any liquid impermeable material such as metal, polymers or the like. Depending on the choice of covering material, this can be applied by shaping, dipping (immersing) or spraying onto the surface of the mineral wool element.

**[0051]** Polymer materials can be in the form of a foil, a film or a liquid coating. Especially polymeric foam coverings, such as spray foams are well suited for making an impermeable lightweight covering, which is easy and cheap to apply. By the term "spray foam" is understood a chemical product created by two materials, isocyanate and polyol resin, which react when mixed with each other and expand up to 30-60 times its liquid volume after it is sprayed in place. This expansion makes it useful as a coating material which forms to the shape of the product being coated and produces a liquid impermeable coating with high thermal insulating value and virtually no air infiltration.

**[0052]** Preferred spray foams may include:

- polystyrene (PS) foam, including expanded polystyrene (EPS) and extruded polystyrene foam (XPS),
- styrofoam, or
- polyurethane (PU) foam.

**[0053]** Examples of polyurethane spray foams are S-35RGB/ECO polyurethane spray from Synthesia Internacional s.l.u. or the two-component watertight membrane named MasterSeal M 689 from BASF.

**[0054]** Any openings arising in a covering made of a rigid material, i.e. metal, foil or film coverings, which openings are originating from the fitting or adapting of the cover to the mineral wool elements, can be made impermeable (moisture or liquid tight) by welding or gluing or by (re-)spraying of the polymeric foam.

**[0055]** As shown in fig. 3, the coating material may be sprayed onto the entire surface of the mineral wool assembly 1 except the top surface 10 at the highest distance from the base surface. This coating material is advantageous as it provides a liquid tight resilient seal around the surface of the mineral wool elements assembly 1. The coating material provides a rubber-like surface coating preferably of 3-5 mm in thickness so that the coating, which is an impermeable covering 5 is sufficiently strong to withstand the internal pressure of the liquid and also to provide a good protection against impacts on the exterior of the security barrier.

**[0056]** As can be seen in fig. 4, the top surface 10 of the mineral wool element 1" is left open so that the security barrier can be filled with water through this opening 3. Preferably, as shown in fig. 5, there is then provided a cover 4 covering the top surface 10 at the highest distance

from the base surface.

**[0057]** In fig. 6, the finished security barrier is shown. In this configuration with a security barrier in the dimensions as indicated in the example below, it is found virtually impossible to move the security barrier by a vehicle. Furthermore with a surface coating of 3-5 mm. the rubber-like coating and the mineral wool elements provide a good impact resistance and it has been found that the energy absorption capability is very good to stop projectiles and thus provides a very good barrier block and ballistic protection.

**[0058]** Fig. 7 shows another embodiment, where the security barrier 1 is provided with an individualised shape, in the example shown a cylinder form. The security barrier comprises a mineral wool element (not visible in the figure) which is provided with a liquid impermeable covering 5, which is preferably a multi-layered laminate of glass fibres, such as chopped strand webs of glass fibres, which is provided on the exterior surfaces of the mineral wool element and wetted and impregnated with a resin and then left to cure. The top surface 10 is also covered by the laminate and with opening 3 for the filling of water into the interior of the security barrier. Several layers of glass fibre webs are provided to provide the security barrier with a resilient and impact resistant covering. An example the laminate has five layers and a thickness of 6 mm. The outermost layer is a foil 12 with printed features, such as a logo or the like.

**[0059]** As indicated by the figures 2 and 7, the mineral wool elements 1 may be assembled to any suitable form in order to meet any aesthetic and/or commercial requests for the public space in which the security barrier is to be utilised.

### **Example**

**[0060]** In an example, the mineral wool assembly is made of three mineral wool elements forming a step-like configuration. The dimensions are:

First element (ref. No. 1' in figs 1-3):	600x600x2000 mm
Second element (ref. No. 1'' in figs 1-3):	600x900x2000 mm
Third element (ref. No. 1''' in figs 1-3):	600x1200x2000 mm

**[0061]** The volumes of each of the three mineral wool elements are 0.72 m<sup>3</sup>, 1.08 m<sup>3</sup> and 1.44 m<sup>3</sup>, respectively. This gives a total volume of 3.24 m<sup>3</sup>.

**[0062]** The mineral wool elements are made with a density of 100 kg/m<sup>3</sup>. Mineral wool fibre products contain an amount of voids. With this density the mineral wool is approx. 95-97% voids. With the volume calculated above, the overall weight of the mineral wool assembly is thus 324 kg.

**[0063]** The overall surface area is 15.24 m<sup>2</sup>. The mineral wool assembly is spray coated with a liquid polymer to provide watertight membrane. In an example a two-component polyurethane spray foam MasterSeal M 689 from BASF is used. The density of such polymer spray coating is typically 1.1 g/cm<sup>3</sup>. With a coating of 5 mm applied the weight of the coating is approx. 84 kg.

**[0064]** This means that the total dry weight of the security barrier is approx. 408 kg.

**[0065]** With a total volume of the mineral wool elements of 3.24 m<sup>3</sup> and with a mineral wool having at least 95% voids, this means that the mineral wool assembly of the security barrier of the example is capable of absorbing up to 3,078 litres of water.

**[0066]** This means that when installed on site the security barrier having a footprint on the ground of merely 3.6 m<sup>2</sup> has a total weight of up to 3,486 kg, which is approx. 8.5 times the weight in its dry state.

## **REFERENCES CITED IN THE DESCRIPTION**

### Cited references

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

### **Patent documents cited in the description**

- [US20090092443A1](#) **[0002]**
- [US20080047418A](#) **[0002]**
- [US20100300275A](#) **[0002]**
- [US20040076468A](#) **[0002]**
- [US20170175349A](#) **[0003]**
- [US20040141807A](#) **[0004]**
- [US7275888B](#) **[0005]**
- [WO2004007615A](#) **[0045]**
- [WO9707664A](#) **[0046]**

## PATENTKRAV

1. Sikkerhedsbarriere, **kendetegnet ved, at** barrieren omfatter en mineraluldskonstruktion (1) omfattende mindst ét mineraluldselement (1', 1'', 1''') med en ydre væskeimpermeabel afdækning (5), og hvor det mindst ene  
5 mineraluldselement (1', 1'', 1''') er indrettet til at blive fyldt med en væske, hvor afdækningen (5) omfatter en åbning (3) til fyldning af sikkerhedsbarrieren med en væske.
2. Sikkerhedsbarriere ifølge krav 1, hvor sikkerhedsbarrieren er fyldt med en væske, hvilken væske fortrinsvis er vand.
- 10 3. Sikkerhedsbarriere ifølge krav 1 eller 2, hvor densiteten af det mindst ene mineraluldselement (1', 1'', 1''') i sin tørre tilstand er 75-200 kg/m<sup>3</sup>, fortrinsvis 75-150 kg/m<sup>3</sup>, mere fortrinsvis 90-120 kg/m<sup>3</sup>.
4. Sikkerhedsbarriere ifølge et hvilket som helst af krav 1 til 3, hvor det mindst ene mineraluldselement (1', 1'', 1''') omfatter et befugtningsmiddel.
- 15 5. Sikkerhedsbarriere ifølge et hvilket som helst af de foregående krav, hvor en flerhed af mineraluldselementer (1', 1'', 1''') er tilvejebragt på en måde, så de støder op til hinanden.
6. Sikkerhedsbarriere ifølge krav 5, hvor mineraluldselementerne (1', 1'', 1''') udgør en fælles bundflade for mineraluldskonstruktionen (1) med to modsatstillede  
20 endeflader (2), der i det væsentlige befinder sig vinkelret på bundfladen, og hvor mineraluldselementernes (1', 1'', 1''') øvre flader (10) befinder sig i forskellige afstande fra bundfladen.
7. Sikkerhedsbarriere ifølge et hvilket som helst af de foregående krav, hvor afdækningen (5) er en belægning.
- 25 8. Sikkerhedsbarriere ifølge krav 7, hvor belægningen er af et materiale valgt fra en gruppe bestående af
  - polystyren (PS), herunder ekspanderet polystyren (EPS) og ekstruderet polystyrenskum (XPS),

- styrofoam og
- polyurethan (PU).

9. Sikkerhedsbarriere ifølge et hvilket som helst af de foregående krav, hvor den væskeimpermeable afdækning (5) er en afdækningsfolie (12) og/eller et  
5 fiberlaminat, f.eks. et glasfiberlaminat eller et kulfiberlaminat, hvilket laminat fortrinsvis har 2-8 lag, mere fortrinsvis 4-6 lag, mere fortrinsvis 5 lag.

10. Sikkerhedsbarriere ifølge krav 9, hvor fiberlaminatets yderste lag er en afdækningsfolie (12).

11. Sikkerhedsbarriere ifølge krav 9 eller 10, hvor folien (12) eller laminatet er  
10 klæbet til mineraluldselementet/-elementerne (1', 1'', 1''') ved hjælp af et klæbemiddel, f.eks. et flydende klæbemiddel eller et pulverklæbemiddel, som er uopløselig af den væske, der skal fyldes i sikkerhedsbarrieren.

12. Sikkerhedsbarriere ifølge krav 9 eller 10, hvor laminatet er klæbet til  
15 fiberforstærkede laminat. mineraluldselementet/-elementerne (1', 1'', 1''') ved hjælp af harpiksen i det

13. Sikkerhedsbarriere ifølge et hvilket som helst af de foregående krav, hvor den væskeimpermeable afdækning (5) er tilvejebragt med en på forhånd fastsat farvesætning, f.eks. tryk af logoer eller lignende.

14. Sikkerhedsbarriere ifølge et hvilket som helst af de foregående krav, hvor  
20 åbningen (3) til væskepåfyldning er tilvejebragt i den væskeimpermeable afdækning (5), f.eks. i mineralulds konstruktionens (1) øvre del, f.eks. i den øvre flade (10) deraf.

15. Sikkerhedsbarriere ifølge krav 14, hvor der er tilvejebragt en væskepåfyldningsafdækning (4), der dækker åbningen (3).

25 16. Sikkerhedsbarriere ifølge et hvilket som helst af de foregående krav, hvor en metalpladeafdækning er tilvejebragt på én eller flere sider af barrieren.

17. Sikkerhedsbarriere ifølge et hvilket som helst af de foregående krav, hvor en fugtdetekteringsensor er tilvejebragt i mineraluldsstrukturen (1), fortrinsvis i den øvre halvdel deraf.

18. Sikkerhedsbarriere ifølge et hvilket som helst af de foregående krav, hvor en afløbsanordning, f.eks. et hul og en prop, er tilvejebragt i den ydre væskeimpermeable afdækning, hvor afdækningen er en beklædning, fortrinsvis i nærheden af bundfladen.

19. Fremgangsmåde til fremstilling af en sikkerhedsbarriere ifølge et hvilket som helst af de foregående krav, hvilken fremgangsmåde omfatter følgende trin:

- 10 - tilvejebringelse af en mineraluldsstrukturen (1) omfattende mindst ét mineraluldselement (1', 1'', 1'''), og
- montering af en ydre væskeimpermeabel afdækning (5) omkring mineraluldsstrukturen.

20. Fremgangsmåde ifølge krav 19, hvor trinnet bestående af montering af en ydre væskeimpermeabel afdækning (5) involverer sprøjtebelægning af mineraluldsstrukturens (1) ydre overflade.

21. Fremgangsmåde ifølge krav 19 eller 20, hvor en flæthed af mineraluldselementer (1', 1'', 1''') er tilvejebragt på en sådan måde, at de støder op til hinanden og klæber til hinanden på en sådan måde, at de frembringer mineraluldsstrukturen (1), og hvor mineraluldselementerne (1', 1'', 1''') er fastgjort til hinanden på individuelle steder inden belægningen.

22. Fremgangsmåde til fremstilling af en sikkerhedsbarriere, hvilken fremgangsmåde omfatter følgende trin:

- 25 - positionering af sikkerhedsbarrieren fremstillet ved en fremgangsmåde ifølge et hvilket som helst af krav 19 til 21, og derefter
- fyldning af sikkerhedsbarrieren med en væske, fortrinsvis vand.

23. Anvendelse af en sikkerhedsbarriere ifølge et hvilket som helst af krav 1 til 18, hvilken sikkerhedsbarriere er tilvejebragt i et indendørs offentligt område, f.eks. en lufthavn eller en jernbanestation.

# DRAWINGS

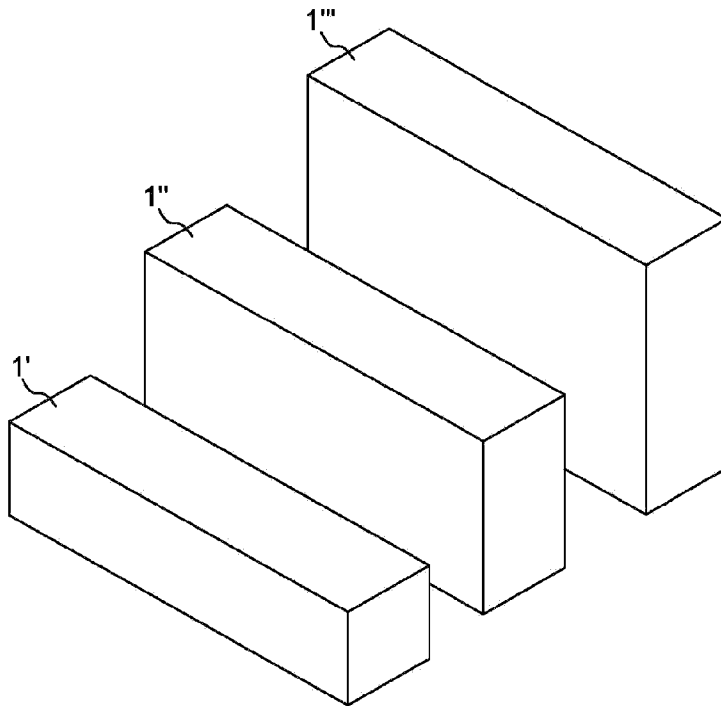


FIG. 1

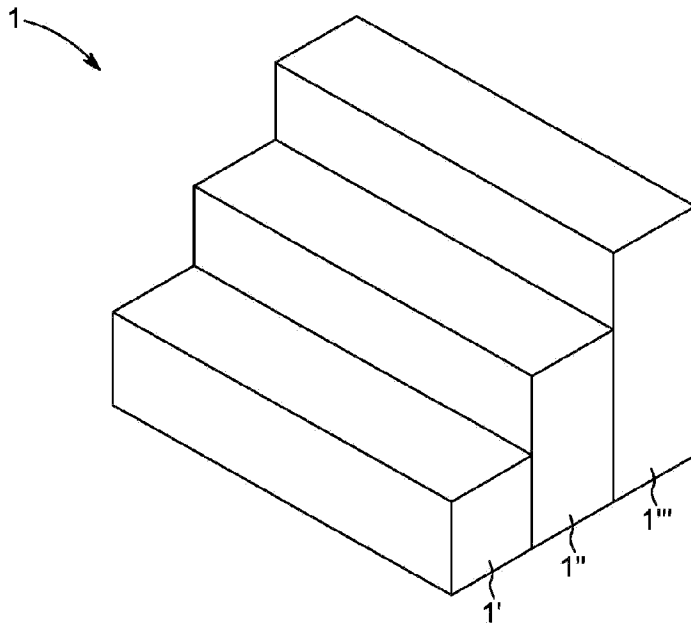


FIG. 2

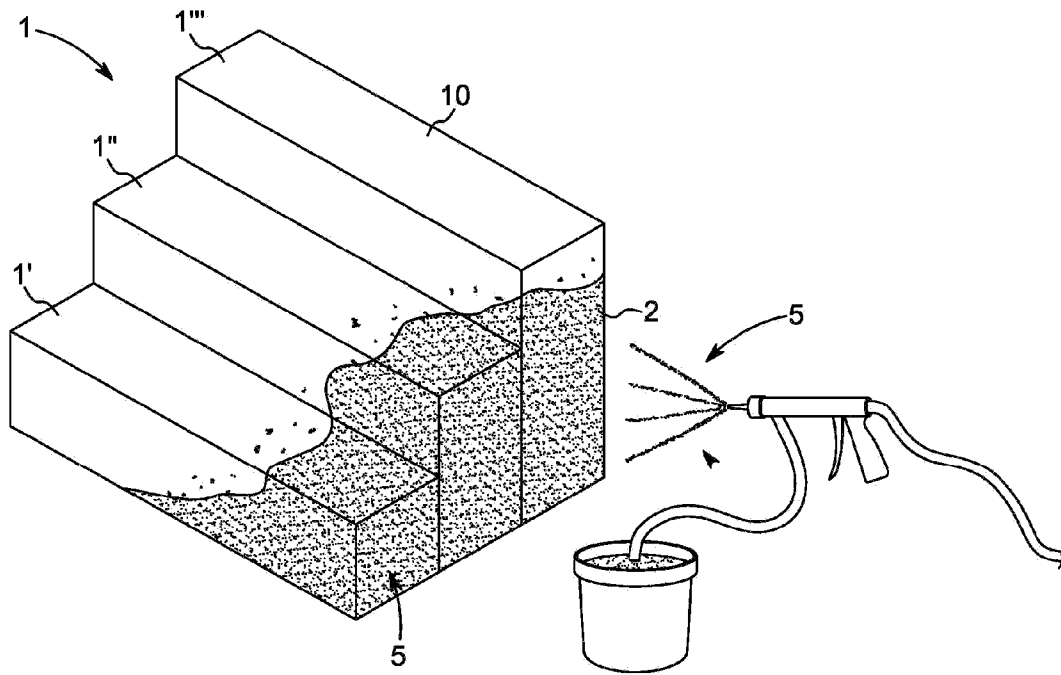


FIG. 3

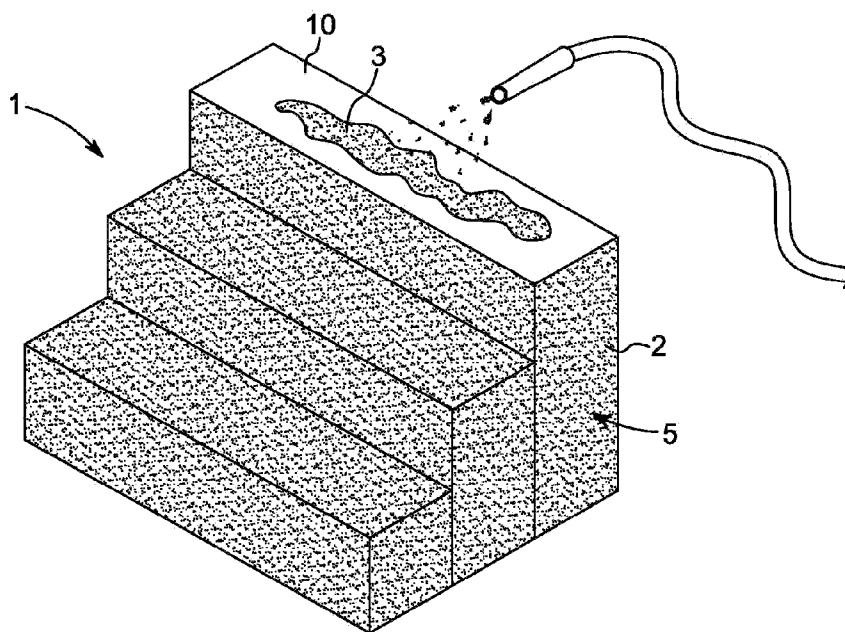


FIG. 4

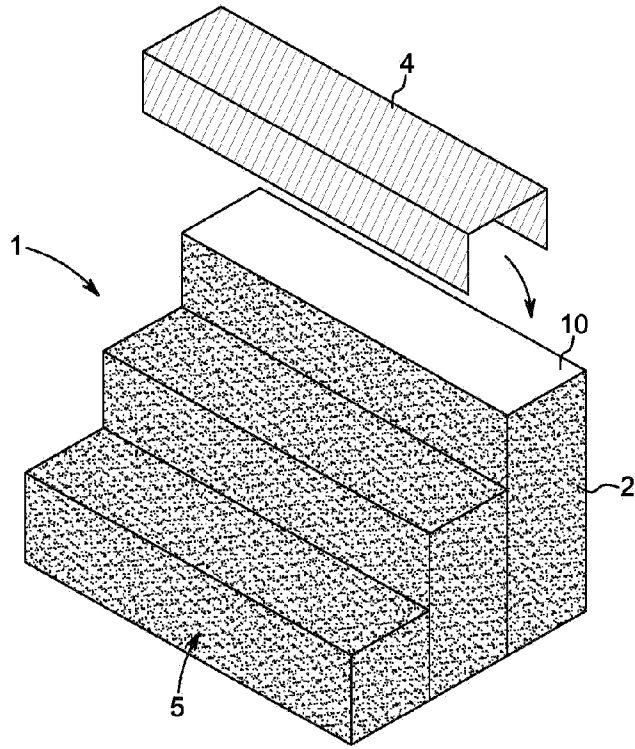


FIG. 5

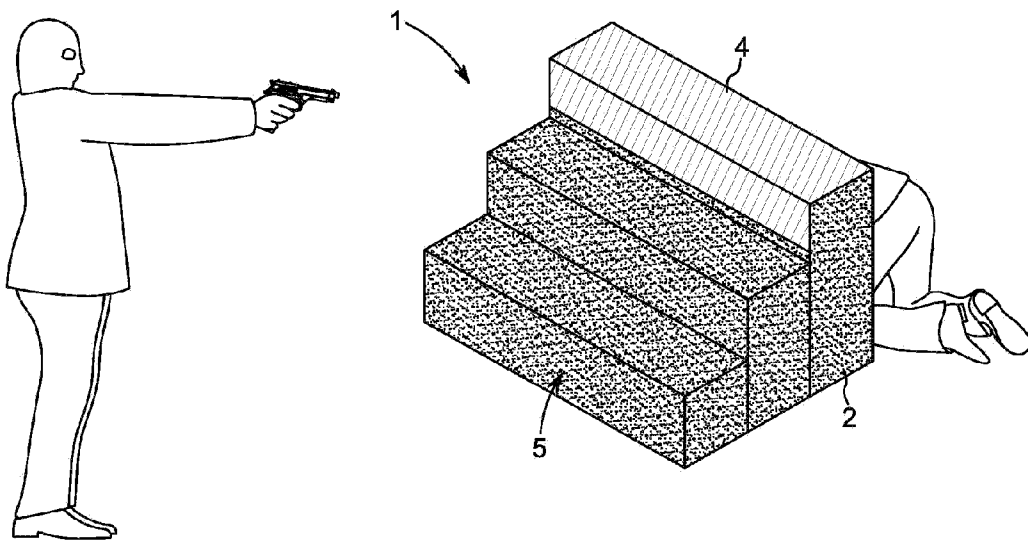


FIG. 6

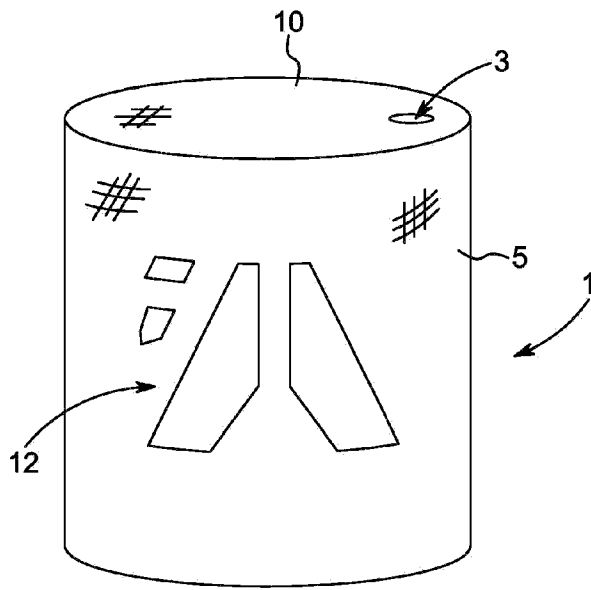


FIG. 7