



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)


<p>(51) International Patent Classification ⁶ : F01L</p>	<p>A2</p>	<p>(11) International Publication Number: WO 99/10629 (43) International Publication Date: 4 March 1999 (04.03.99)</p>
--	------------------	---

<p>(21) International Application Number: PCT/US98/17831 (22) International Filing Date: 28 August 1998 (28.08.98)</p> <p>(30) Priority Data: 60/056,089 28 August 1997 (28.08.97) US 60/067,559 5 December 1997 (05.12.97) US 60/078,113 16 March 1998 (16.03.98) US</p> <p>(71) Applicant: DIESEL ENGINE RETARDERS, INC. [US/US]; Suite 105, 509 Silverside Road, Wilmington, DE 19809 (US).</p> <p>(72) Inventors: VORIH, Joseph, M.; 1669 Mountain Road, West Suffield, CT 06093 (US). KINERSON, Kevin, J.; 10 Crown Street, Vernon, CT 06066 (US). ISRAEL, Mark, A.; 53 Country Corners Road, Amherst, MA 01002 (US). VANDERPOEL, Richard, E.; 1 Musket Trail, Bloomfield, CT 06002 (US).</p> <p>(74) Agent: COYNE, Patrick, J.; Collier, Shannon, Rill & Scott, PLLC, Suite 400, 3050 K Street, N.W., Washington, DC 20007 (US).</p>	<p>(81) Designated States: BR, JP, KR, MX, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).</p> <p>Published <i>Without international search report and to be republished upon receipt of that report.</i></p>
--	--

(54) Title: ENGINE VALVE ACTUATOR WITH VALVE SEATING CONTROL

(57) Abstract

The present invention provides a hydraulic actuator for operating an engine valve, which includes a means for controlling the seating velocity of the valve. The design allows for free, unrestricted movement of the actuator piston during opening of the engine valve, and an unrestricted return of the piston and valve until the valve is within a predetermined distance of the valve seat. Once within this predetermined range, the return velocity of the actuator piston and engine valve are limited by the rate at which a fluid may escape through a restriction. The restriction is calibrated to provide the desired maximum valve seating velocity. The invention also provides for automatic lash adjustment.

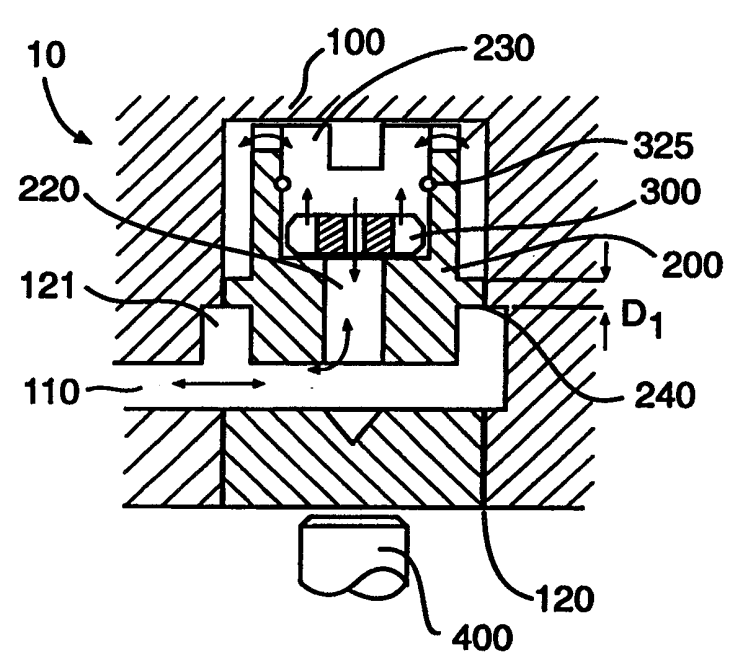

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

ENGINE VALVE ACTUATOR WITH VALVE SEATING CONTROL

Cross Reference to Related Applications

This application relates and claims priority to the following U.S. Provisional Applications:

	<u>Serial No.</u>	<u>Title</u>	<u>Filing Date</u>
5	60/078,113	Fixed Stroke Piston with Hydraulic Damping	3/16/98
	60/_____	Method and Apparatus for Hydraulic Engine Valve Seating Control	12/5/97
10	60/056,089	Limited-Range, Lash-Independent Hydraulic Engine Valve Seating Control Apparatus and Method	8/28/97

Field of Invention

This invention relates to the control of engine valves associated with the combustion chamber of an internal combustion engine. In particular, the present invention is directed to an apparatus for controlling the seating of engine valves.

Background of the Invention

Engine combustion chamber valves, such as intake and exhaust valves, are almost universally of a poppet type. These engine valves are typically spring loaded toward a valve closed position. A number of means exist for opening such valves, including hydraulic pressure. In many systems, hydraulic pressure acts on an actuator piston within a housing or cylinder. The piston may be operatively connected to the valve stem of an engine valve. In response to hydraulic pressure on the top of the piston, the piston translates downward, forcing the engine valve open against the force of a valve spring, opening the engine valve. This hydraulic piston arrangement is commonly referred to as a hydraulic actuator.

A variety of systems exist to regulate the timing of engine valve opening by controlling the hydraulic pressure within the actuator at the top of the actuator piston. These systems include "common rail" systems in which a solenoid control valve, or other valve, opens a path from a source of high pressure fluid to the top of the slave piston at precisely timed instants. One such common rail system is described in Cosma et al., U.S. Patent No. 5,619,964, assigned to the assignee of the present application.

Another type of system for applying hydraulic pressure to the actuator piston is a hydraulically linked master and slave piston arrangement. In such systems, a cam or other device causes motion of a master piston. Master piston motion is transferred to the actuator ("slave") piston by means of the hydraulic link between the two pistons. The motion of the slave piston, in relation to the basic cam motion imparted to the master piston, may be modified by draining and filling fluid from the hydraulic link at precise times. In this way, only selected portions of the cam-driven motion may be transferred to the slave piston. These systems are sometimes therefore called "lost motion" systems. One such lost motion system is described in Hu, U.S. Patent No. 5,537,976, assigned to the assignee of the present application, and opened against the spring bias by hydraulic pressure.

Engine valves are required to open and close very quickly, therefore the valve spring is typically very stiff. When the valve closes, it impacts the valve seat at a velocity that can create forces which may eventually erode the valve or the valve seat or even fracture or break the valve. In mechanical valve actuation systems that use a valve lifter to follow a cam profile, the cam lobe shape provides built-in valve-closing velocity control. In common rail hydraulically actuated valve assemblies, however, there is no cam to self-dampen the closing velocity of an engine valve. Likewise, in hydraulic lost motion systems, a rapid draining of fluid from the hydraulic link between the master and slave pistons may allow an engine valve to "free fall" and seat with an unacceptably high velocity.

As a result, in engine valve and cylinder head design, there is a need to limit valve seating velocities. With hydraulically actuated systems, however, this need for restriction is in conflict with the need for unrestricted valve opening rates. Some attempts have been made to solve the problem by providing separate fill and drain ports. U.S. Patent No. 5,577,468 discloses a system for limiting valve seating velocity, however, the system disclosed is both costly and inaccurate. Other existing methods for controlling engine valve seating velocity do so for the entire range of valve closing. These methods may cause excessive valve closing variations. Existing systems also fail to accommodate the need for adjustments due to variations in engine valve lash between cylinders.

In addition to excessive valve closing speed, piston overtravel can also cause severe engine damage. It is therefore necessary, to precisely control and limit the return stroke of the engine valve and the actuator piston during engine operation. There are several methods of controlling piston stroke: mechanical stops, mechanisms that cut off the flow of fluid to the

piston, and mechanisms that apply high pressure oil to the backside of the piston. Each of these designs, however, have shortcomings. Mechanical stops have durability problems unless seating velocity is controlled. Systems that cut off the oil supply may allow overtravel due to the formation of vapor or the evolution of gas bubbles. Systems that bleed high pressure oil behind
5 the piston place an excessive load on the oil pump.

Accordingly, there is a need for a simple and effective stroke-limiting design that is fail-safe. For mechanical stop methods of stroke-limiting, there is a particular need for a design that reduces the risk of damage to the stops. Furthermore, existing systems do not fill the need for valve seating velocity control which allows free, unrestricted return of the engine valve for a set
10 distance and restricted, controlled return as the valve approaches the valve seat.

The present invention meets the aforementioned needs and provides other benefits as well.

Objects of the Invention

15 It is therefore an object of the present invention to provide a hydraulic engine valve control system which allows free valve return over the majority of the valve's return distance, and provides velocity control over a limited range of the valve's travel just prior to seating.

A further object of the present invention is to provide faster, more consistent controlled valve seating.

20 It is a further object of the present invention to provide a method of free valve return with controlled seating velocity.

Another object of the present invention is to provide an adjustable range over which valve seating velocity is controlled.

25 It is another object of the present invention to provide an engine valve actuator which allows free, unrestricted opening of an engine valve.

Still another object of the present invention is to provide a means for adjusting, either manually or automatically, an engine valve hydraulic actuation system for variations in engine valve height or lash.

30 It is also an object of the present invention to provide an improved apparatus for limiting the stroke of the actuator piston.

It is another object of the present invention to provide a piston stroke-limiting means that is fail-safe and low-cost.

It is another object of the present invention to provide slave piston stroke-limiting without a separate stroke-controlling piston.

It is another object of the present invention to provide slave piston stroke-limiting means comprising at least one fixed mechanical stop.

5 It is another object of the present invention to provide a hydraulic damper that controls the valve seating velocity and thereby reduces damage to the mechanical stop(s).

Additional objects and advantages of the invention are set forth, in part, in the description which follows and, in part, will be apparent to one of ordinary skill in the art from the description and/or from the practice of the invention.

10

Brief Summary of the Invention

In response to this challenge, applicants have developed an innovative, economical apparatus for controlling the seating velocity of an engine valve. The present invention includes a hydraulic valve actuator for operating an engine valve comprising: an
15 actuator housing; an actuator piston having upper and lower ends, wherein the piston is reciprocally disposed within the housing and is adapted to be moved upward and downward in response to hydraulic pressure; the lower end of the actuator piston is operatively connected to the engine valve so that the engine valve opens when the actuator piston is displaced downward in response to hydraulic pressure upon the upper end, and when the hydraulic pressure is
20 removed from the upper end the actuator piston returns upward and the engine valve shuts; a feed and drain passage in the housing to allow hydraulic fluid to move to and from the upper end of the actuator piston; and a control element disposed within the actuator housing, wherein the control element provides a restriction in hydraulic fluid flow during a portion of the return stroke of the actuator piston thereby limiting the velocity of the actuator piston. The control element
25 may be a disc which includes a central orifice to restrict fluid flow. The disc may include a plurality of orifices to restrict fluid flow.

The actuator piston may include longitudinal and transverse passages which allow fluid to move from the feed and drain passage to the upper end of the piston. The longitudinal passage may include an upper fluid chamber area at the upper end of the actuator piston, and the control
30 element may be disposed within the upper fluid chamber. The actuator piston may further include a protruding exterior annular ring located above the transverse passage and below the upper fluid chamber.

The hydraulic actuator may include a means for adjusting for engine valve lash. The means for adjusting for engine valve lash may comprise: an adjustable sleeve disposed between the actuator piston and the housing and a lash adjustment screw threaded into the housing and contacting the sleeve for adjusting the position of the adjusting sleeve within the housing.

5 Alternatively, the means for adjusting for engine valve lash may comprise: a lash piston disposed reciprocally within the lower end of the actuator piston; a lash compression spring disposed above the lash piston for biasing the lash piston toward the engine valve; and a lash adjustment chamber located within the actuator piston above the lash piston for establishing an hydraulic link between the actuator piston and the lash piston. The actuator piston may further
10 include an internal lower vertical passage for connecting the lash adjustment chamber with the feed and drain passage. The means for adjusting for engine valve lash may further include a check valve between the lower vertical passage and the lash adjustment chamber and wherein the check valve only permits flow into the chamber from the lower vertical passage.

The hydraulic actuator may also comprise: a pin; a pin body; and a piston body; wherein
15 the pin is reciprocally disposed within the pin body and the pin body is disposed within and fixed to the piston body, and the piston body is reciprocally disposed within the housing. The pin body may extend downward from the piston body and be operatively connected to the engine valve. The pin may be biased upward away from the engine valve. The piston body may further include a longitudinal passage and an transverse passage and the pin may extend through the
20 longitudinal passage at the upper end of the piston body. The pin may include a large diameter section so that during the return stroke of the actuator piston the large diameter section of the pin contacts the housing and is forced into the longitudinal passage creating a flow restriction and slowing the velocity of the actuator piston. Alternatively, the pin may include a longitudinal passage and an upper and lower orifice connecting the longitudinal passage to the exterior of the
25 pin. The pin may also include a large diameter section so that during the return stroke of the actuator piston the large diameter section of the pin contacts the housing and is forced into the longitudinal passage substantially cutting off the flow of hydraulic fluid between the piston body and the pin so that fluid flows through the upper and lower orifices thereby creating a flow restriction and slowing the velocity of the actuator piston.

30 In an alternative embodiment the hydraulic actuator of the present invention the control element is a seating piston reciprocally disposed partially within the longitudinal passage at the upper end of the actuator piston. The seating piston may include a vertical passage through

which fluid flows from the upper fluid chamber to the feed and drain passage. The actuator may further include a spring disposed in the longitudinal passage below the seating piston, wherein the spring biases the seating piston upward away from the engine valve. The seating piston may include a notch at its upper end so that during the return stroke of the actuator piston when the seating piston contacts the housing and is forced downward further into the longitudinal passage a restricted flow path is established from the upper fluid chamber through the notch and the vertical passage to the feed and drain passage.

A further embodiment of the present invention includes a hydraulic valve actuator for operating an engine valve comprising: an actuator housing; an actuator piston having upper and lower ends, wherein the piston is reciprocally disposed within the housing and is adapted to be moved upward and downward in response to hydraulic pressure; the lower end of the actuator piston is operatively connected to the engine valve so that the engine valve opens when the actuator piston is displaced downward in response to hydraulic pressure upon the upper end, and when the hydraulic pressure is removed from the upper end the actuator piston returns upward and the engine valve shuts; a feed and drain passage in the housing to allow hydraulic fluid to move to and from the upper end of the actuator piston; and a snubber plunger disposed within the actuator housing above the actuator piston, wherein the snubber plunger provides a restriction in hydraulic fluid flow during a portion of the return stroke of the actuator piston thereby limiting the velocity of the actuator piston. The snubber plunger may be reciprocally disposed within a plunger housing and may be biased downward toward the actuator piston by a spring. The actuator may further include a plunger chamber located above the snubber plunger. The snubber plunger may also include a vertical passage providing a flow path from the plunger chamber through the snubber plunger. The snubber plunger may be disposed within the plunger housing so that during the upward motion of the snubber plunger fluid may flow out of the plunger chamber through the clearance between the snubber plunger and the plunger housing. The snubber plunger may include a vertical passage and a horizontal passage providing a flow path from the plunger chamber through the snubber plunger.

The present invention may also be a hydraulic valve actuator for operating an engine valve comprising: an actuator housing having a vertically aligned central bore; an actuator piston having upper and lower ends, wherein the piston is reciprocally disposed within the central bore and is adapted to be moved upward and downward in response to hydraulic pressure; the lower end of the actuator piston is operatively connected to the engine valve so that the

engine valve opens when the actuator piston is displaced downward in response to hydraulic pressure upon the upper end, and when the hydraulic pressure is removed from the upper end the actuator piston returns upward and the engine valve shuts; an end cap located above the actuator piston position to seal off the upper end of the central bore and retain the actuator piston; a feed and drain passage in the housing to allow hydraulic fluid to move to and from the upper end of the actuator piston; and a dampening assembly comprising a cavity on the downward side of the end cap, wherein the cavity is capable of receiving the upper end of the actuator piston so that during the return stroke of the actuator piston hydraulic fluid is trapped in the cavity forming a cushion and reducing the velocity of the actuator piston. The upper end of the actuator piston may include a projection section capable of fitting within the cavity. The lower end of the central bore may include a reduced diameter section and the actuator piston includes a projection capable of fitting within the reduced diameter section of the central bore so that during the opening of the engine valve a cushion is formed which limits the movement of the engine valve. The actuator may further include a means for adjusting the actuator for variations in engine valve lash. The means for adjusting may comprise: a vertically aligned central passage located within the actuator piston; an adjustable pin threaded into the central passage projecting downward from the actuator piston to operatively connect with the engine valve; and a locking pin located in the central passage above the adjustable pin to secure the adjustable pin in position.

It is to be understood that both the foregoing general description and the following detailed description are exemplary and explanatory only, and are not restrictive of the invention as claimed. The accompanying drawings, which are incorporated herein by reference, and which constitute a part of the specification, illustrate certain embodiments of the invention, and together with the detailed description serve to explain the principles of the present invention.

25 **Brief Description of the Drawings**

Fig. 1 is a cross-sectional view of a valve actuation system according to the present invention with the engine valve in its seated position.

Fig. 2 is a cross-sectional view of the embodiment shown in Fig. 1 during free return of the engine valve.

30 Fig. 3 is a cross-sectional view of an embodiment of the present invention including a lash adjustment means.

Fig. 4 is a cross-sectional view of an embodiment of the present invention including an automatic lash adjustment means.

Fig. 5 is a cross-sectional view of the embodiment of the present invention shown in Fig. 1 with the engine valve in the at rest position.

5 Fig. 6 is a cross-sectional view of the embodiment of the present invention shown in Fig. 1 during free return of the engine valve.

Fig. 7 is a cross sectional view of the embodiment of the present invention shown in Fig. 1 during snubbed return of the engine valve.

10 Fig. 8 is a graph of engine valve position versus time resulting from operation according to the present invention.

Fig. 9 is a cross-sectional view of an alternative embodiment of the present invention which includes a valve seating pin within the actuator piston.

Fig. 10 is a cross-sectional view of a further alternative embodiment of the present invention which includes a valve seating pin within the actuator piston.

15 Fig. 11 is a cross-sectional view of an embodiment of the present invention with a valve seating piston and an automatic lash adjustment means.

Fig. 12 is a cross-sectional view of the embodiment of the present invention shown in Fig. 11 during filling of the hydraulic actuator

20 Fig. 13 is a cross-sectional view of the embodiment of the present invention shown in Fig. 11 during snubbed return of the engine valve.

Fig. 14 is a cross-sectional view of an embodiment of the present invention in which the plunger and the actuator piston have internal passageways, and the engine valve in the at rest position.

25 Fig. 15 is a cross-sectional view of the embodiment of the invention shown in Fig. 14 during free return of the engine valve.

Fig. 16 is a cross-sectional view of the embodiment of the invention shown in Fig. 14 during snubbed return of the engine valve.

30 Fig. 17 is a cross-sectional view of an alternative embodiment of the invention having a plunger with internal passageways and a solid actuator piston, with the engine valve in the at rest position.

Fig. 18 is a cross-sectional view of the embodiment of the invention shown in Fig. 17 during free return of the engine valve.

Fig. 19 is a cross-sectional view of the embodiment of the invention shown in Fig. 17 during snubbed return of the engine valve.

Fig. 20 is a cross-sectional view of an alternate embodiment of the invention having a solid plunger and a solid actuator piston, with the engine valve in the at rest position.

5 Fig. 21 is a cross-sectional view of the embodiment of the invention shown in Fig. 20 during free return of the engine valve.

Fig. 22 is a cross-sectional view of the embodiment of the invention shown in Fig. 21 during snubbed return of the engine valve.

10 Fig. 23 is a cross-sectional view of an alternate embodiment of the invention which includes automatic lash adjustment with the engine valve in the at rest position.

Fig. 24 is a cross-sectional view of the embodiment of the invention shown in Fig. 23 during free return of the engine valve.

Fig. 25 is a cross-sectional view of the embodiment of the invention shown in Fig. 23 during snubbed return of the engine valve.

15 Fig. 26 is a cross-sectional view of an embodiment of the invention which includes a dampening mechanism to limit the maximum travel of the actuator piston assembly.

Fig. 27 is a cross-sectional view of an embodiment of the invention which includes a dampening mechanism to limit the maximum and minimum travel of the actuator piston assembly.

20

Detailed Description of the Invention

An embodiment of the hydraulic actuator **10** of the present invention is shown in Fig. 1. The hydraulic actuator **10** controls the engine valve **400**. The actuator **10** of Fig. 1 includes a housing **100**, an actuator piston **200**, and a control element **300**. The engine valve **400** is typically spring loaded toward a valve closed position and opened against the spring bias by hydraulic pressure. When the actuator piston **200** is forced downward by oil pressure, the biasing of the valve spring (not shown) is overcome and the engine valve **400** opens. When the oil pressure is removed, the actuator piston **200** returns and the engine valve **400** moves upward and closes.

30 The hydraulic actuator described in this application may function with a variety of types of hydraulic valve actuation systems. In one embodiment the actuator **10** may be part of a "lost motion" system. The actuator piston **200** may be connected through passageway **110** via a

hydraulic link to a master piston (not shown). The master piston reciprocates within a cylinder in response to a rotating cam. The motion generated by the cam profile causes corresponding motion, via the hydraulic link, of actuator piston **200**. Hydraulic fluid may be drained and added to the hydraulic link between the master piston and actuator piston **200** in order to achieve a
5 variable timing effect.

Alternatively, actuator **10** may be connected via passageway **110** to a source of high pressure hydraulic fluid controlled by a solenoid control valve. This type of system is commonly referred to as a "common rail" system.

The engine valve is a poppet type well known in the art. The engine valve may be an
10 intake or exhaust valve of conventional construction. The engine valve generally includes a valve head, valve stem, and valve spring. The valve spring is preferably a coil spring disposed about stem of the engine valve. Valve spring biases the engine valve in an upward direction to seat against its valve seat. For simplicity, the engine valve is shown in the figures of this application as contacting the actuator **10** directly. Alternatively, the engine valve may be
15 connected to a valve stem and stem shank, and the stem shank may contact the actuator. However, any arrangement in which the engine valve is operatively connected to the actuator piston **200** is within the scope of the invention.

The actuator piston **200** may have a generally cylindrical body which is appropriately sized for reciprocation within bore **120**. The actuator **10** and its components are preferably
20 formed from metallic materials, but may also be made of any of a variety of high-strength plastics, composite materials, or any suitable material.

The housing **100** includes a fluid feed and drain passage **110**. The passage **110** allows hydraulic fluid to pass to and from the actuator **10**. The housing further includes a housing bore **120** for receiving the actuator piston **200**. The bore **120** includes an area **121** with an increased
25 diameter in the vicinity of the passage **110**.

The actuator piston **200** is slidably disposed within the bore **120** of the actuator housing **100**. The actuator piston **200** and housing **100** form an upper fluid chamber **230**. The piston **200** further includes a radial, transverse or horizontal passage **210** and a longitudinal or vertical passage **220**. The vertical passage **220** is disposed along the longitudinal axis of the actuator
30 piston **200**. The horizontal and vertical passages provide a flow path for fluid from the feed and drain passage **110** to the upper fluid chamber **230**. The actuator piston **200** further includes an annular ring **240** located on the exterior of the piston **200**. The height of the annular ring **240** is

designated by the letter "D₁," in Fig. 1. The annular ring **240** is positioned on the actuator piston **200** so that with the valve **400** in the closed ("at rest") position, the top of the annular ring **240** is above the area **121** of increased diameter in the housing bore **120**.

The control element disc **300** is slidably located within the upper chamber **230**. The control disc **300** may include side orifices **320** and a central orifice **310**. Upward travel of the control disc **300** may be limited by a retaining ring **325**.

The operation of the actuator **10** will now be described. Figs. 1 and 5 show the engine valve **400** in the seated position and the actuator piston **200** at rest in the housing bore **120**. Fig. 5 discloses the beginning of the engine valve stroking process. Oil from passage **110** flows into the horizontal passage **210** of the actuator piston **200**. The oil flows through the vertical passage **220** and into the upper chamber **230**. Initially, the oil flows through the central orifice **310** in the control disc **300**, the flow of oil pushes the control disc **300** up allowing the free flow of oil through both the center **310** and side orifices **320**. As oil fills the upper chamber **230**, the actuator piston **200** is forced downward, overcoming the biasing of the valve spring and opening the valve **400**.

At the appropriate time, the oil pressure within the actuator **10** and actuator piston **200** is vented through passage **110** allowing the valve spring to force the valve **400** shut. The seating velocity of the engine valve is proportional to the rate of return of the actuator piston **200**. Initially, the seating velocity of the valve **400** is not limited. Figs. 2 and 6 show the initial free return of the actuator piston **200** and the engine valve **400**. The flow of oil out of the actuator piston **200** toward the passage **110** causes a flow reversal within the upper chamber **230**. The control disc **300** is forced downward, blocking the side orifices **320**. The center orifice **310** is calibrated to correspond to the appropriate valve seating velocity. However, during the free return period shown in Figs. 2 and 6, valve seating velocity is not limited by the central orifice **310** since oil may flow freely around the outside of the piston until the annular ring **240** reaches the housing **100** thereby blocking flow around the actuator piston **200**.

Fig. 7 discloses the snubbed return of the actuator piston **200**. During the snubbed return period, valve seating velocity is limited because oil flow past the piston **200** is blocked by the annular ring **240**. When the annular ring **240** has blocked the return flow of oil around the outside of the piston, oil must flow through the calibrated central orifice **310** in disc **300**. During this period, the actuator piston **200** returns at a controlled rate until the valve **400** seats. The limited range of valve seating is determined by the distance from the top of the piston **200** to the

top of the bore **120** after the annular ring **240** has blocked external flow. In the embodiment shown in Fig. 7, this distance is D_2 .

Fig. 8 discloses a graph of engine valve position versus time. The slope of the line corresponds to the valve velocity. For the limited range corresponding to distance D_2 , just prior to valve seating, the reduced valve seating velocity is apparent by the change in the slope of the curve.

Fig. 3 discloses an alternative embodiment of the present invention, which includes a lash adjustment means. The lash adjustment means includes an adjustable sleeve **720**, located between the housing **100** and the actuator piston **200**. The position of sleeve **720** within the housing **100** is changed by adjusting a lash adjustment screw **710**. The sleeve **720** is positioned so that the distance in which valve seating velocity is reduced corresponds to the distance just prior to the seating of engine valve **400**. The present invention may also include sealing rings **122** disposed between the housing **100** and the adjustable sleeve **720**.

Fig. 4 discloses an alternative embodiment of a lash adjustment means **600**. The actuator piston **200** shown in Fig. 4 includes a lower passage **250** connecting the horizontal passage **210** with the lash adjustment means **600**. The lash adjustment means **600** may include a ball check valve **640**; a lash compression spring **630**; a lash piston **610**; and a lash piston retaining ring **620**. The lash adjustment means functions to adjust the lash automatically while keeping the distance D_2 constant.

The lash is adjusted during the initial fill of fluid into the piston **200**. When fluid enters the actuator piston **200**, it flows into the lower passage **250** and unseats the ball check valve **640**. Fluid fills the lash adjustment chamber **650** taking up the lash between the lash piston **610** and the valve **400**. Once chamber **650** is full, ball check valve **640** seats due to the biasing of spring **630** creating a hydraulic link between the lash piston **610** and the actuator piston **200**.

A further embodiment of the hydraulic actuator **10** of the present invention is shown in Fig. 9. The actuator **10** shown in Fig. 9, includes a housing **100** and an actuator piston **200**. The actuator piston **200** is comprised of an actuator piston body **270** and a valve seating pin body **260**. The valve seating pin body **260** is threaded into the actuator piston body **270** which in turn is slidably disposed within the housing **100**. The valve seating pin body **260** extends outward from the actuator piston body **270** toward the engine valve **400**. The embodiment shown in Fig. 10 further includes a valve seating pin **261** slidably disposed within valve seating pin body **260**. The valve seating pin **261** extends away from the engine valve **400** and into the housing **100**.

passing through an opening **203** in the actuator piston body **270**. The valve seating pin **261** is biased outward by a spring **262** located within the valve seating pin body **260**. The valve seating pin **261** is retained within the valve seating pin body **260** by a snap ring **263**. Fluid passes back and forth from the upper fluid chamber **230** to the high pressure passage **110** through opening **203** and a passage **204** located in the side of the actuator piston body **270**.

Fig. 9 shows the present invention with the engine valve **400** open and the actuator piston **200** extended in its downward position. When it is desired to shut the engine valve **400**, the high pressure fluid in passage **110** is vented. Actuator piston **200** returns freely until the valve seating pin **261** contacts the housing **100**. As the actuator piston **200** continues to rise, valve seating pin **261** is forced into opening **203** in the actuator piston body **270**. When valve seating pin **261** resides within opening **203**, the effective size of opening **203** is reduced, causing a reduction in the flow of fluid escaping from upper fluid chamber **230**. The reduced flow rate of fluid will continue until the valve **400** closes. The embodiment shown in Fig. 9 may be further modified to include a tapered valve seating pin **261**. Tapering the valve seating pin **261** imposes a variable restriction during the controlled range of valve seating and, as a result, variable valve seating velocity.

Fig. 10 shows a further embodiment of the present invention. The device shown in Fig. 10 functions in a similar manner to the device shown in Fig. 9 described above. Unlike the pin shown in Fig. 9, the valve seating pin **261** disclosed in Fig. 10 includes a notch **264** and a side orifice **263**. During valve seating, the high pressure fluid in passage **110** is vented and actuator piston **200** returns freely as fluid escapes from chamber **230** through passage **203**. As the actuator piston **200** continues to rise, valve seating pin **261** contacts the housing **100** and is forced into opening **203** in the actuator piston body **270**. Flow through passage **203** is substantially blocked causing the flow of fluid out of the upper fluid chamber **230** to pass through seating restriction **264** and into the interior of the pin. Fluid then escapes through side orifice **263** and out of the actuator piston through passage **204**. The tortuous flow path created by the notch **264** and side orifice **263** reduces the flow rate of the escaping fluid and limits the valve seating velocity correspondingly. The devices shown in Figs. 9 and 10 both include a lock nut **265** which is used to adjust the relative position of the actuator piston body **270** and the valve seating pin body **260** to account for differences between the seating lengths of different engine valves. The embodiments of the present invention shown in Figs. 9 and 10 may also include either of the lash adjustment devices disclosed in Figs. 3 and 4.

Figs. 11, 12 and 13 disclose a similar embodiment of the present invention during various stages of operation. The actuator shown in Fig. 11 includes an actuator piston **200** and a valve seating piston **350**. The valve seating piston **350** includes a central passage **360** and a notch **355**. The valve seating piston **350** is biased upwardly by valve seating pin spring **365**. The device shown in Fig. 11 further includes a lash adjustment means **600** similar to that shown in Fig. 4 described above.

Fig. 11 shows actuator **10** with the valve **400** closed. High pressure fluid passes through passage **110** and into the actuator piston **200**. The fluid will pass upward through passage **360** and through notch **355** into the upper fluid chamber **230**. The incoming fluid fills the chamber **230** and forces actuator piston **200** downward. The downward travel of actuator piston **200** overcomes the spring biasing and opens the valve **400**.

Fig. 12 shows the flow of high pressure fluid through the upper passage **360** within the valve seating piston **350**. Initially, fluid also flows toward lash adjustment means **600**. Fluid flows into the lower passage **250** and unseats the ball check valve **640**. Fluid fills the lash adjustment chamber **650** taking up the lash between the lash piston **610** and the valve **400**. Once chamber **650** is full, ball check valve **640** seats, and a hydraulic link is established between the lash piston **610** and the valve **400**.

Fig. 13 discloses the actuator **10** during the valve seating stroke. When the valve **400** is to be closed, high pressure fluid in the actuator **10** is vented through passage **110**. The actuator piston **200** begins its free return until such time as the valve seating piston **350** contacts the housing **100**. After valve seating piston **350** contacts the housing **100**, the flow of oil is limited by the notch **355**. Therefore, valve seating velocity is correspondingly limited until the valve closes.

A further embodiment of the present invention is disclosed in Figs. 14-16. Figs 14-16 disclose a hydraulic valve actuator comprising a housing **100**; an actuator piston **200**, a snubber plunger **380**, a plunger housing **385** and plunger return spring **390**. The actuator operates to force the actuator piston **200** downward in order to actuate engine valve **400**. Housing **100** includes a passage **110** to allow hydraulic fluid to move to and from the actuator **10**.

Plunger housing **385** is a generally cylindrical, hollow body disposed in and projecting through housing **100**. Plunger housing **385** is rigidly mounted to the top of housing **100**. Preferably the plunger housing **385** is threaded into housing **100** in order to provide a tight connection. Plunger housing **385** includes a chamber **395** in which the plunger **380** and plunger

return spring 390 are located. Plunger housing 385 may further comprise a stop (not shown) which projects into chamber 395 and retains snubber plunger 380 in plunger housing 385. The use of a threaded connection between plunger housing 385 and the housing 100, allows the position of the plunger housing 385 relative to the housing 100 to be varied. The plunger housing 385 may be manually rotated to place it in the desired position. Varying the vertical position of plunger housing 385 varies the vertical position of snubber plunger 380 and as a result provides a means for adjusting the range during which the engine valve 400 seating velocity is controlled. Plunger return spring 390 acts to bias snubber plunger 380 in a downward direction.

Snubber plunger 380 may be a generally cylindrical body. Snubber plunger 380 is biased downward against stop by plunger return spring 390. When snubber plunger 380 is fully displaced downward, it projects out from the snubber housing 385 a distance D_3 . Snubber plunger 380 includes an internal passage 398. Passage 398 provides a controlled fluid flow path between the plunger chamber 395 and the hydraulic fluid passage 110.

The operation of the embodiment disclosed in Figs. 14-16 will now be described. Fig. 14 shows actuator piston 200 at rest with no hydraulic pressure in chamber 230 applied against top surface of actuator piston 200. The engine valve is shut. Actuator piston 200 is abutting the bottom of snubber plunger 380. When actuator piston 200 is at its minimum stroke, snubber plunger 380 is at its minimum stroke. Actuator piston 200 forces snubber plunger 380 into the snubber housing 385 against the bias of plunger return spring 390. The relative position of actuator piston 200 within housing 100 may be adjusted by rotation of the threaded plunger housing 385. In this way, the actuator 10 may be adjusted for variations in engine valve lash. In addition, the actuator shown in Figs. 15-16 may be modified to accommodate a lash adjustment means as disclosed in Fig. 4.

Referring again to Fig. 14, in order to actuate the engine valve, hydraulic fluid under pressure may be admitted to chamber 230 through passageway 110. The hydraulic fluid acts against the top surface of actuator piston 200 to move actuator piston 200 downward. Actuator piston 200 acts against the engine valve 400 forcing the engine valve downward against the bias of valve spring opening the engine valve.

As actuator piston 200 moves downward to actuate the engine valve, snubber plunger 380 follows actuator piston 200 downward under the bias of plunger return spring until the downward motion of snubber plunger 380 is arrested by a stop in plunger housing 385. The

snubber plunger **380** is displaced outward from snubber housing **385** a distance D_3 . Initially, hydraulic fluid enters chamber **230** through the clearance gap between the snubber plunger **380** and plunger housing **385**. Once the downward motion of snubber plunger **380** has been arrested by the mechanical stop, actuator piston **200** separates from snubber plunger **380** as actuator
5 piston **200** continues to stroke downward under the force of the hydraulic fluid entering chamber **230**. During valve actuation, valve opening is not restricted. Snubber plunger **380** acts as a check valve, allowing unrestricted flow from passage **110** to chamber **230**.

When it is desired to close the engine valve, the valve actuation system releases the hydraulic fluid from chamber **230** through passage **110**. When the bias of valve spring
10 overcomes the downward force of actuator piston **200**, actuator piston **200** begins to move upward as the engine valve closes. Actuator piston **200** is then in a condition of "free return," as depicted in Fig. 15.

Referring to Fig. 16, as the engine valve moves toward a closed position and begins to approach the valve seat, actuator piston **200** eventually comes within a distance D_3 of the plunger
15 housing and contacts the bottom of snubber plunger **380**. From that point on, until the engine valve is seated, actuator piston **200** and the engine valve are in a condition of "snubbed return," as depicted in Fig. 16. In snubbed return, the upward speed of actuator piston **200** is limited by the snubber plunger **380** and the size of passage **398**.

During snubbed return, the upward motion of snubber plunger **380** displaces hydraulic
20 fluid from chambers **395** and **230**. The hydraulic fluid exits chamber **395** through passage **398**. During snubbed return, the upward speed of snubber plunger **380** and the engine valve is limited to the rate at which hydraulic fluid is discharged from chamber **395** and **230** in plunger housing **390**. The snubbing of actuator piston **200** reduces the seating velocity of engine valve **400** to a desired value.

Actuator **10** shown in Figs. 14-16, may be adjusted for lash by adjusting the position of
25 plunger housing **385** in housing **100**. As discussed above, the position of plunger housing **385** may be adjusted by manually rotating the threaded plunger housing **385** in the housing **100**. The vertical position of snubber plunger **380** relative to plunger housing **385** (D_3), may also be varied to adjust the snubbed distance during valve seating. When the engine valve is closed, actuator
30 piston **200** will again be at its at rest position, as shown in Fig. 14. The actuation cycle of the engine valve may then begin anew.

Referring now to Figs. 17-19, in an alternate embodiment of the invention, snubber plunger **380** is provided with vertical internal passageway **398** and horizontal internal passageway **399**. Vertical internal passageway **398** in conjunction with horizontal internal passageway **399** provide a fluid communication path between chamber **395** in plunger housing **385**, and chamber **230**. In this embodiment of the invention, valve seating velocity is controlled by the size of passages **398** and **399**.

The functioning of the embodiment disclosed in Figs. 17-19 is similar to that described above with reference to Figs. 14-16. In this embodiment, however, the seating velocity of engine valve **400**, is limited by the flow rate of hydraulic fluid out of chamber **395** through vertical internal passageway **398** and horizontal internal passageway **399** as snubber plunger **380** moves upward. This is in contrast to the embodiment shown in Fig. 16 in which seating velocity of engine valve **400** is limited by the flow rate of hydraulic fluid out of chambers **395** and **230** through passageway **398**.

The seating velocity of the engine valve is determined by the dimensions of vertical internal passageway **398** and horizontal internal passageway **399** in snubber plunger **380**. As described in reference to the embodiment of the invention shown in Figs. 14-16, the actuator **10** may be adjusted for lash by rotating the threaded plunger housing **385** in housing **100**.

Referring now to Figs. 20-22, in another alternate embodiment of the invention, a solid snubber plunger **380** is provided with no internal passageways. Similar to Figs. 17-19, actuator piston **200** is also a solid piece. The hydraulic fluid flows from chamber **395** through clearances **396** around snubber plunger **380** as shown in Fig. 22. Snubber housing **385** has a chambered edge in chamber **230** in order to allow smoother flow of hydraulic fluid out of chamber **395**.

The function of the embodiment of the invention shown in Figs. 20-22 is similar to the embodiment of the invention described above in reference to Figs. 17-19 and 14-16. In this embodiment, however, the seating velocity of the engine valve is controlled by the discharge rate of hydraulic fluid through the clearance **396** between snubber housing **395** and snubber plunger **380**. Reference is now made to Figs. 23-25 which disclose another embodiment of the invention. In this embodiment, actuator piston **200** is preferably a cylindrical annular member with chamber **365** formed therein. Snubber plunger **380** is slidably disposed in actuator piston **200**. Plunger return spring **390** is disposed with actuator piston **200** and biases snubber plunger **380** upward out of actuator piston **200**. Actuator piston **200** may further include a lash

adjustment means **600**. Lash adjustment means **600** is configured as disclosed in Figs. 11-13 and functions as described above.

Actuator housing **100** is provided with passageway **110** which, as in the embodiments previously described, provides fluid communication path to a hydraulic fluid source which is part
5 of a hydraulic valve actuation circuit.

Actuator housing **100** further includes passageway **115** which supplies fluid to lash adjustment means **600**. Passageway **115** is preferably connected to a supply of low pressure fluid. For example, passageway **115** may be connected to engine supply oil at bearing lubrication pressure. Alternatively, passageway **115** may be connected to other supplies of
10 relatively low pressure hydraulic fluid. Actuator piston **200** is provided with an internal radial, horizontal or transverse passage **210**. Passage **210** provides a fluid communication path between passageway **115** and lash adjustment means **600**.

Snubber plunger **380** is preferably biased upward against a stop (not shown) by plunger return spring **390**. When snubber plunger **380** abuts the stop, the snubber plunger **380** projects
15 out from actuator piston **200** a distance of D_3 . Snubber plunger **380** is sized to form an annular clearance gap **351** between the plunger and the actuator piston **200**. Clearance gap **351** provides the path for controlled fluid flow between chamber **365** and chamber **230**.

The operation of this embodiment of the invention may be explained with further reference to Figs. 23-25. Fig. 23 shows actuator piston **200** and snubber plunger **380** at rest.
20 Due to the bias of the valve spring, the engine valve is seated, and actuator piston **200** is at its minimum stroke. As shown in Fig. 23, there is insufficient hydraulic pressure in chamber **230** to force actuator piston **200** downward against the upward bias of the valve spring. With actuator piston **200** at its at-rest position, as shown in Fig. 23, passageway **115** is aligned with horizontal passage **210**. The communication path for low pressure hydraulic fluid to the lash adjustment
25 means **600** is thus established. In this condition, lash adjustment means **600** may automatically take up any slack clearance between the actuator piston **200** and the engine valve **400**.

Referring again to Fig. 23, when it is desired to actuate engine valve **400**, hydraulic fluid under pressure is admitted to chamber **230** above actuator piston **200** through passageway **110**. The hydraulic fluid acts against top surface of actuator piston **200** to move actuator piston **200**
30 downward. Engine valve **400** also moves downward opening against the bias of the valve spring.

As actuator piston **200** moves downward to actuate engine valve **400**, snubber plunger **380** moves upward relative to actuator piston **200**. Hydraulic fluid entering chamber **230** flows through clearance gap **351** to fill the expanding volume of chamber **365**.

Snubber plunger **380** continues to move upward relative to actuator piston **200**,
5 expanding the volume of chamber **365**, until the motion of snubber plunger **380** is arrested by the mechanical stop (not shown). Once the motion of snubber plunger **380** relative to actuator piston **200** is arrested by the stop, snubber plunger **380** travels downward in concert with actuator piston **200** as actuator piston **200** continues to stroke downward under the force of the hydraulic fluid entering chamber **230**.

10 Referring next to Fig. 24, at the appropriate time the valve actuation system will release the hydraulic fluid from chamber **230** above actuator piston **200**. When the bias of the valve spring overcomes the downward force of the hydraulic fluid, actuator piston **200** begins to move upward and begins to close the engine valve **400**. Fig. 24 depicts the actuator piston **200** in a condition of "free return."

15 Referring now to Fig. 25 which discloses that as engine valve **400** moves toward a closed position and begins to close, actuator piston **200** eventually comes within a distance D_3 of the housing **100**. When actuator piston **200** reaches this point, the snubber plunger **380** contacts the housing **100**. From that point on, until the engine valve closes, actuator piston **200**, and with it engine valve **400**, are in a condition of snubbed return. During snubbed return, snubber plunger
20 **380** is forced against the bias of snubber plunger return spring **390** into chamber **365** in actuator piston **200**. The speed of upward motion of actuator piston **200** is limited to that of snubber plunger **380** relative to actuator piston **200**.

During snubbed return, the snubber plunger **380** moves further into chamber **365** of actuator piston **200**. Snubber plunger **380** displaces hydraulic fluid from chamber **365**. The
25 hydraulic fluid exits chamber **365** through clearance gap **351**. During snubbed return, the rate of movement of snubber plunger **380** into chamber **365** is limited to the rate of which hydraulic fluid from chamber **365** is discharged through clearance **351**. The return velocity of actuator piston **200** and seating velocity of engine valve **400** is thus limited by the rate of fluid discharge from chamber **365** through clearance **351**.

30 When engine valve **400** is closed, actuator piston **200** will again be at its rest position, as shown in Fig. 23. The actuation cycle of the engine valve may then begin anew.

Reference will now be made to Fig. 26 which discloses a further embodiment of the present invention. The actuator **10** disclosed in Fig.26 comprises a housing **100** and an actuator piston **200** slidably disposed therein.

A housing **100** is provided with a first passageway **110**. Housing **100** further includes an internal bore **120** for receiving actuator piston **200**. Passageway **110** is fluidically connected to bore **120** and provides high pressure fluid to the area above the actuator piston **200**. The high pressure fluid may be hydraulic fluid. An end cap assembly **125** is secured to the housing **100** and closes the upper end of the bore **120**. A further passageway **115** is provided within the housing **10** and is fluidically connected to the lower end of bore **120**. The passageway **115** provides a low-pressure supply and drain of hydraulic fluid to the bore **120**.

An actuator piston **200** is slidably located within the bore **120** in the housing **100**. The actuator piston **200** includes a lash adjusting assembly **290**. The lash adjusting assembly **290** includes a lash adjusting pin **285** that is movably mounted within a central passageway **280** within the actuator piston **200**. The lash adjusting assembly **290** further includes a locking pin **295** to secure the lash adjusting pin **285** in a desired location.

The lash adjuster **290** extends from the lower end of the actuator piston assembly **200**. The lash adjuster **285** is capable of contacting a follower assembly **420** that is reciprocally located in a lower extended portion of the bore **120**. The follower assembly **420** transfers motion from the actuator piston **200** to an engine valve **400** which activates at least one exhaust valve. The follower assembly **420** also prevents the drainage of hydraulic fluid from the lower end of the second passageway **120**.

The actuator piston **200** further comprises a first damping assembly **800**. The first damping assembly **800** limits the maximum or downward travel of the actuator piston **200**. This prevents overtravel of the engine valve **400**. Furthermore, the first damping assembly **800** reduces wear and prevents damage to the actuator piston **200** because it provides a cushion to prevent the lower end of the actuator piston **200** from contacting the end of the bore **120**.

The first damping assembly **800** includes a reduced diameter projection **215** extended from the lower end of the actuator piston **200**. The reduced diameter projection **215** is sized to be received within a reduced diameter portion **121** of the bore **120**, as shown in Fig. 26.

A second damping assembly **850** is illustrated in Fig. 27. The second damping assembly **850** limits the minimum or upward travel of the actuator piston **200** within the bore **120**. The second damping assembly **850** controls the seating velocity of the actuator piston **200** as well as

the initial velocity of the actuator piston at the start of the lift of actuator piston **200**. The second damping assembly **850** includes a reduced diameter projection **216** extended from an upper end of the actuator piston **200**. The reduced diameter projection **216** is sized to be received within a cavity **123** within the end cap **125**.

5 The operation of the first damping assembly **800** and the second damping assembly **850** will now be described. Hydraulic fluid is supplied through the first passageway **110** to the area in bore **120** above the actuator piston **200** in order to initiate downward movement of the actuator piston **200**. The first part of the stroke of actuator piston **200** may be restricted due to the configuration of the second dampening assembly **850**. As hydraulic fluid enters the bore **120**, the
10 actuator piston **200** is moved downward. This movement causes hydraulic fluid located in the lower end of the bore **120** to drain through passageway **115**. When the reduced diameter projection **215** is received within the reduced diameter portion **121** of the bore **120**, hydraulic fluid is trapped in area **225** between the lower end of the actuator piston **200** and the surface of the bore **120**. The trapped hydraulic fluid forms a cushion in area **225** to limit the downward
15 travel of the actuator piston **200**.

During the upward stroke of the actuator piston **200**, hydraulic fluid from the passageway **115** and the upward movement of the follower **420** move the actuator piston **200** in an upward direction. Hydraulic fluid located above the actuator piston **200** is permitted to drain through the passageway **110**. The reduced diameter projection **216** then enters the cavity **123** in the end cap
20 **120**. At this point, hydraulic fluid located within the cavity **123** must pass through restricted clearance between **216** and **123** to get to the passageway **110**. This hydraulic fluid within the cavity **123** forms a cushion to control the upward movement of the actuator piston **200** and limits the seating velocity of the engine valve **400**.

It will be apparent to those skilled in the art that various modifications and variations can
25 be made in the construction and configuration of the present invention without departing from the scope or spirit of the invention. The invention may comprise part of a lost motion, common rail, or other hydraulic valve actuation system. Various modification and variations can be made in the construction of the actuator **10** described above without departing from the scope or spirit of the invention. For example, actuator piston **200** and housing **100** may be of a variety of sizes
30 and cross-sectional shapes as long as actuator piston **200** is slidably disposed within housing **100**. Likewise, snubber plunger **380** and plunger housing **385** may be of a variety of mutually compatible sizes and cross-sectional shapes. The flow of hydraulic fluid should be properly

metered to provide the desired snubbing of actuator piston **200** and engine valve **400**. Further, it may be appropriate to make additional modifications, such as including different types of lash adjustment means for means of connection to an engine valve, or other valves, depending on the engine or system in which the invention is to be used. Thus, it is intended that the present

5 invention cover the modifications and variations of the invention provided they come within the scope of the appended claims and their equivalents.

What is claimed is:

1. A hydraulic valve actuator for operating an engine valve comprising: an actuator housing; an actuator piston having upper and lower ends, wherein said piston is reciprocally disposed within said housing and is adapted to be moved upward and downward in response to hydraulic pressure; said lower end of said actuator piston is operatively connected to the engine valve so that the engine valve opens when said actuator piston is displaced downward in response to hydraulic pressure upon said upper end, and when the hydraulic pressure is removed from said upper end said actuator piston returns upward and the engine valve shuts; a feed and drain passage in said housing to allow hydraulic fluid to move to and from said upper end of said actuator piston; and a control element disposed within said actuator housing, wherein said control element provides a restriction in hydraulic fluid flow during a portion of the return stroke of said actuator piston thereby limiting the velocity of the actuator piston.
2. The hydraulic actuator of claim 1, wherein said control element is a disc.
3. The hydraulic actuator of claim 2, wherein said disc includes a central orifice to restrict fluid flow.
4. The hydraulic actuator of claim 2, wherein said disc includes a plurality of orifices to restrict fluid flow.
5. The hydraulic actuator of claim 1, wherein said actuator piston includes longitudinal and transverse passages which allow fluid to move from said feed and drain passage to the upper end of said piston.
6. The hydraulic actuator of claim 5, wherein said longitudinal passage includes an upper fluid chamber area at said upper end of said actuator piston.
7. The hydraulic actuator of claim 6, wherein said control element is disposed within said upper fluid chamber.

8. The hydraulic actuator of claim 5, wherein said actuator piston includes a protruding exterior annular ring located above said transverse passage and below said upper fluid chamber.

9. The hydraulic actuator of claim 1, wherein said actuator further includes a means for adjusting for engine valve lash.

10. The hydraulic actuator of claim 9, wherein said means for adjusting for engine valve lash comprises: an adjustable sleeve disposed between said actuator piston and said housing and a lash adjustment screw threaded into said housing and contacting said sleeve for adjusting the position of said adjusting sleeve within said housing.

11. The hydraulic actuator of claim 9, wherein said means for adjusting for engine valve lash comprises: a lash piston disposed reciprocally within said lower end of said actuator piston; a lash compression spring disposed above said lash piston for biasing said lash piston toward the engine valve; and a lash adjustment chamber located within said actuator piston
5 above said lash piston for establishing an hydraulic link between said actuator piston and said lash piston.

12. The hydraulic actuator of claim 11, wherein said actuator piston further includes an internal lower vertical passage for connecting said lash adjustment chamber with said feed and drain passage.

13. The hydraulic actuator of claim 12, wherein said lash adjustment means further includes a check valve between said lower vertical passage and said lash adjustment chamber and wherein said check valve only permits flow into said chamber from said lower vertical passage.

14. The hydraulic actuator of claim 1, wherein said actuator piston comprises: a pin; a pin body; and a piston body; wherein said pin is reciprocally disposed within said pin body and said pin body is disposed within and fixed to said piston body, and said piston body is reciprocally disposed within said housing.

15. The hydraulic actuator of claim 14, wherein said pin body extends downward from said piston body and is operatively connected to the engine valve.

16. The hydraulic actuator of claim 14, wherein said pin is biased upward away from the engine valve.

17. The hydraulic actuator of claim 14, wherein said piston body includes a longitudinal passage and an transverse passage.

18. The hydraulic actuator of claim 17, wherein said pin extends through said longitudinal passage at said upper end of said piston body.

19. The hydraulic actuator of claim 18, wherein said pin includes a large diameter section so that during the return stroke of the actuator piston said large diameter section of said pin contacts said housing and is forced into said longitudinal passage creating a flow restriction and slowing the velocity of the actuator piston.

20. The actuator of claim 18, wherein said pin includes a longitudinal passage and an upper and lower orifice connecting the longitudinal passage to the exterior of the pin.

21. The actuator of claim 20, wherein said pin includes a large diameter section so that during the return stroke of the actuator piston said large diameter section of said pin contacts said housing and is forced into said longitudinal passage substantially cutting off the flow of hydraulic fluid between the piston body and the pin so that fluid flows through the upper and lower orifices thereby creating a flow restriction and slowing the velocity of the actuator piston.

22. The hydraulic actuator of claim 14, wherein said actuator further includes a means for adjusting for engine valve lash.

23. The hydraulic actuator of claim 22, wherein said means for adjusting for engine valve lash comprises: an adjustable sleeve disposed between said actuator piston and said

housing and a lash adjustment screw threaded into said housing and contacting said sleeve for adjusting the position of said adjusting sleeve within said housing.

24. The hydraulic actuator of claim 22, wherein said means for adjusting for engine valve lash comprises: a lash piston disposed reciprocally within said lower end of said actuator piston; a lash compression spring disposed above said lash piston for biasing said lash piston toward the engine valve; and a lash adjustment chamber located within said actuator piston
5 above said lash piston for establishing an hydraulic link between said actuator piston and said lash piston.

25. The hydraulic actuator of claim 6, wherein said control element is a seating piston reciprocally disposed partially within said longitudinal passage at the upper end of said actuator piston.

26. The hydraulic actuator of claim 25, wherein said seating piston includes a vertical passage through which fluid flows from said upper fluid chamber to said feed and drain passage.

27. The hydraulic actuator of claim 25, further comprising a spring disposed in said longitudinal passage below said seating piston, wherein said spring biases said seating piston upward away from said engine valve.

28. The hydraulic actuator of claim 27, wherein said seating piston includes a notch at its upper end so that during the return stroke of said actuator piston when said seating piston contacts said housing and is forced downward further into said longitudinal passage a restricted flow path is established from said upper fluid chamber through said notch and said vertical
5 passage to said feed and drain passage.

29. The hydraulic actuator of claim 25, wherein said actuator further includes a means for adjusting for engine valve lash.

30. The hydraulic actuator of claim 29, wherein said means for adjusting for engine valve lash comprises: an adjustable sleeve disposed between said actuator piston and said

housing and a lash adjustment screw threaded into said housing and contacting said sleeve for adjusting the position of said adjusting sleeve within said housing.

31. The hydraulic actuator of claim 29, wherein said means for adjusting for engine valve lash comprises: a lash piston disposed reciprocally within said lower end of said actuator piston; a lash compression spring disposed above said lash piston for biasing said lash piston toward the engine valve; and a lash adjustment chamber located within said actuator piston
5 above said lash piston for establishing an hydraulic link between said actuator piston and said lash piston.

32. A hydraulic valve actuator for operating an engine valve comprising: an actuator housing; an actuator piston having upper and lower ends, wherein said piston is reciprocally disposed within said housing and is adapted to be moved upward and downward in response to hydraulic pressure; said lower end of said actuator piston is operatively connected to the engine
5 valve so that the engine valve opens when said actuator piston is displaced downward in response to hydraulic pressure upon said upper end, and when the hydraulic pressure is removed from said upper end said actuator piston returns upward and the engine valve shuts; a feed and drain passage in said housing to allow hydraulic fluid to move to and from said upper end of said actuator piston; and a snubber plunger disposed within said actuator housing above said actuator
10 piston, wherein said snubber plunger provides a restriction in hydraulic fluid flow during a portion of the return stroke of said actuator piston thereby limiting the velocity of the actuator piston.

33. The hydraulic actuator of claim 32, wherein said snubber plunger is reciprocally disposed within a plunger housing.

34. The hydraulic actuator of claim 33, wherein said snubber plunger is biased downward toward said actuator piston by a spring.

35. The hydraulic actuator of claim 34, wherein said plunger housing includes a plunger chamber located above said snubber plunger.

36. The hydraulic actuator of claim 35, wherein said snubber plunger includes an internal passage providing a flow path from said plunger chamber through said snubber plunger.

37. The hydraulic actuator of claim 35, wherein said snubber plunger is disposed within said plunger housing so that during the upward motion of said snubber plunger fluid may flow out of said plunger chamber through the clearance between said snubber plunger and said plunger housing.

38. The hydraulic actuator of claim 35, wherein said snubber plunger includes a vertical passage and a horizontal passage providing a flow path from said plunger chamber through said snubber plunger.

39. A hydraulic valve actuator for operating an engine valve comprising: an actuator housing having a vertically aligned central bore; an actuator piston having upper and lower ends, wherein said piston is reciprocally disposed within said central bore and is adapted to be moved upward and downward in response to hydraulic pressure; said lower end of said actuator piston is
5 operatively connected to the engine valve so that the engine valve opens when said actuator piston is displaced downward in response to hydraulic pressure upon said upper end, and when the hydraulic pressure is removed from said upper end said actuator piston returns upward and the engine valve shuts; an end cap located above said actuator piston position to seal off the upper end of said central bore and retain said actuator piston; a feed and drain passage in said
10 housing to allow hydraulic fluid to move to and from said upper end of said actuator piston; and a dampening assembly comprising a cavity on the downward side of said end cap, wherein said cavity is capable of receiving the upper end of said actuator piston so that during the return stroke of said actuator piston hydraulic fluid is trapped in said cavity forming a cushion and reducing the velocity of said actuator piston.

40. The hydraulic actuator of claim 39, wherein said upper end of said actuator piston includes a projection section capable of fitting within said cavity.

41. The hydraulic actuator of claim 39, wherein said lower end of said central bore includes a reduced diameter section and said actuator piston includes a projection capable of

fitting within said reduced diameter section of said central bore so that during the opening of said engine valve a cushion is formed which limits the movement of said engine valve.

42. The hydraulic actuator of claim 39, further comprising a means for adjusting the actuator for variations in engine valve lash.

43. The hydraulic actuator of claim 42, wherein said means for adjusting comprises: a vertically aligned central passage located within in said actuator piston; an adjustable pin threaded into said central passage projecting downward from said actuator piston to operatively connect with the engine valve; and a locking pin located in said central passage above said
5 adjustable pin to secure said adjustable pin in position.

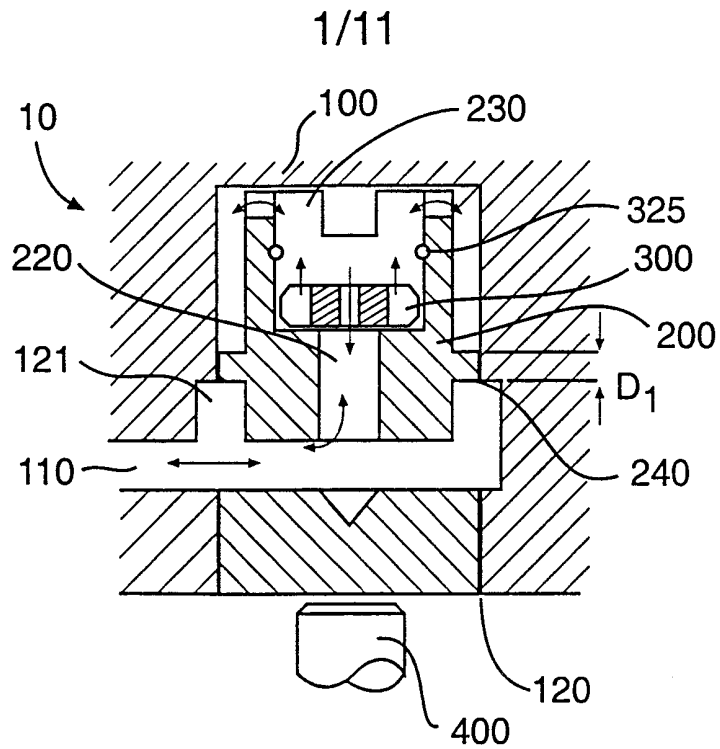


FIG. 1

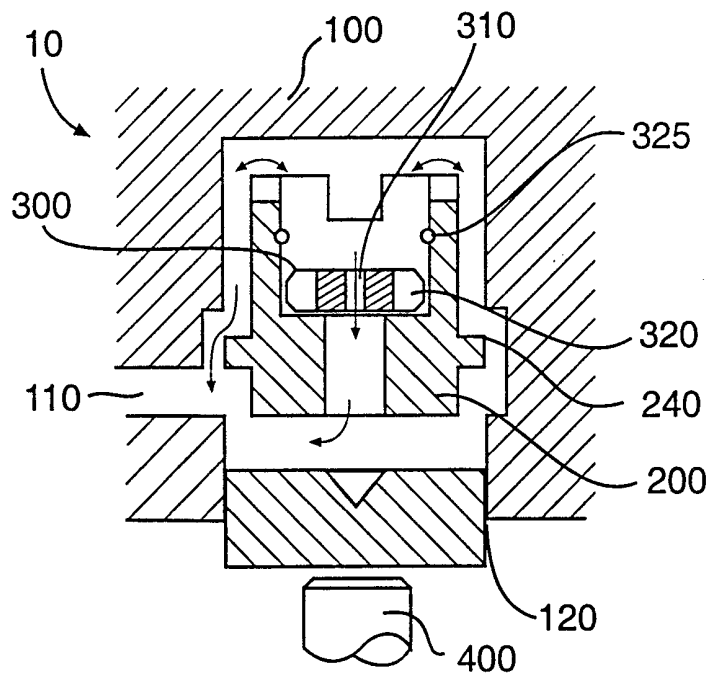


FIG. 2

2/11

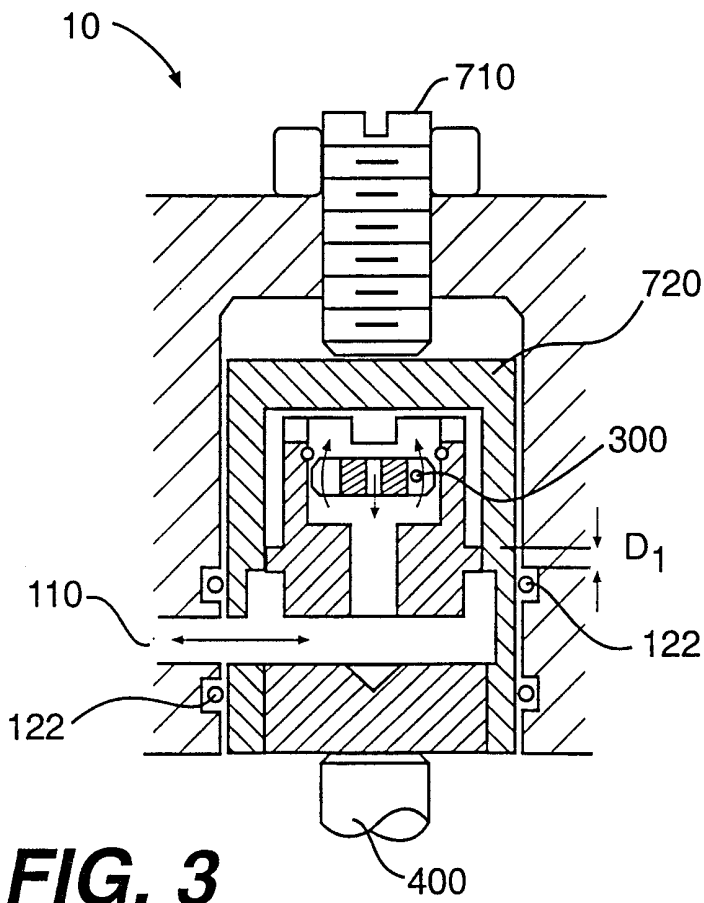


FIG. 3

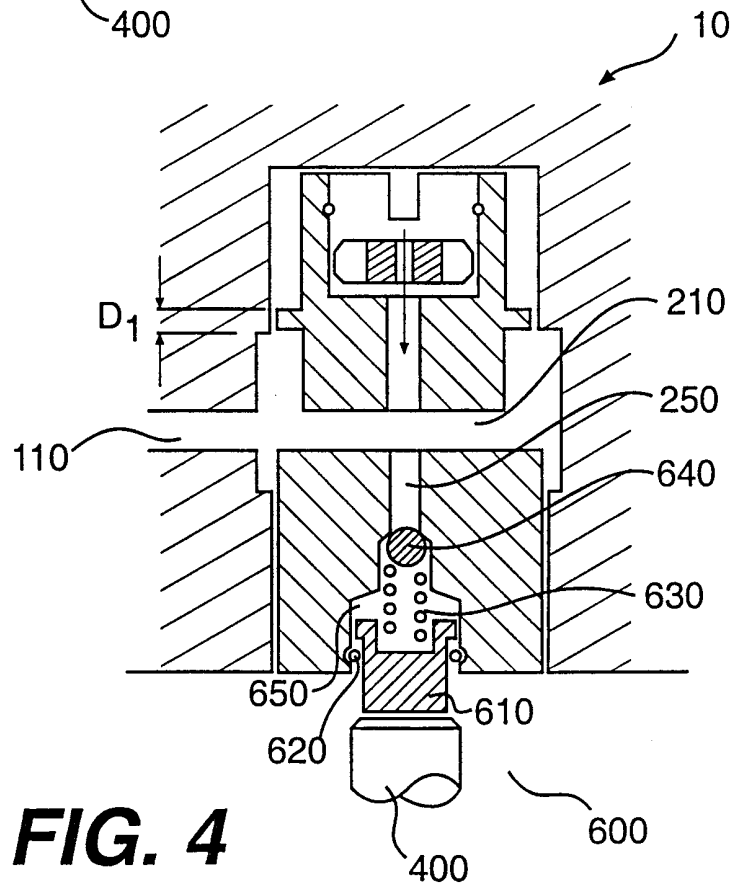


FIG. 4

3/11


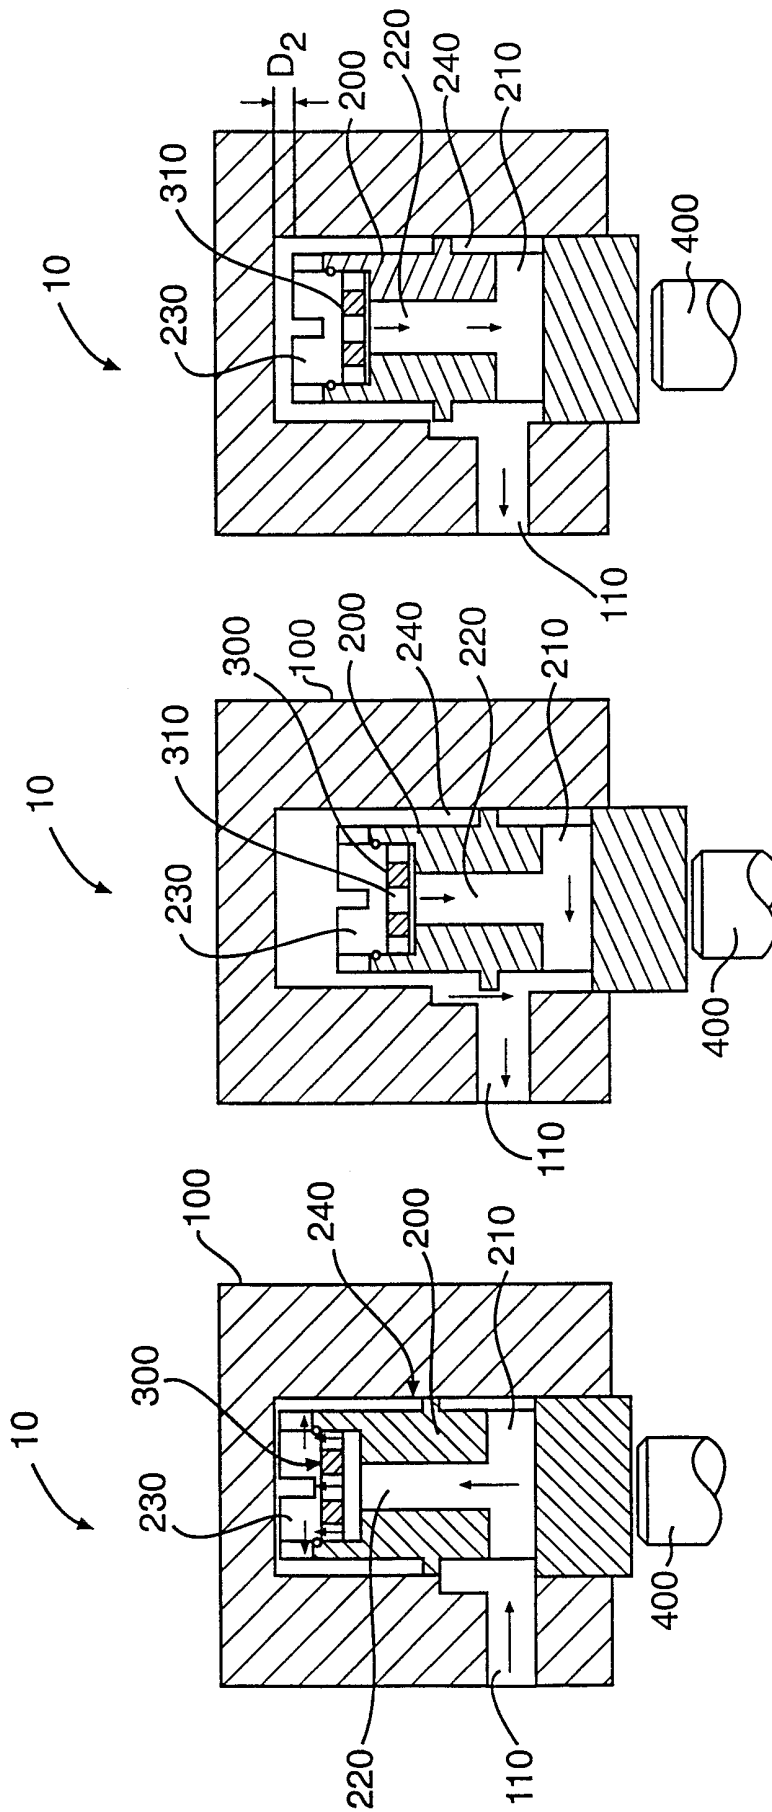


FIG. 7

FIG. 6

FIG. 5

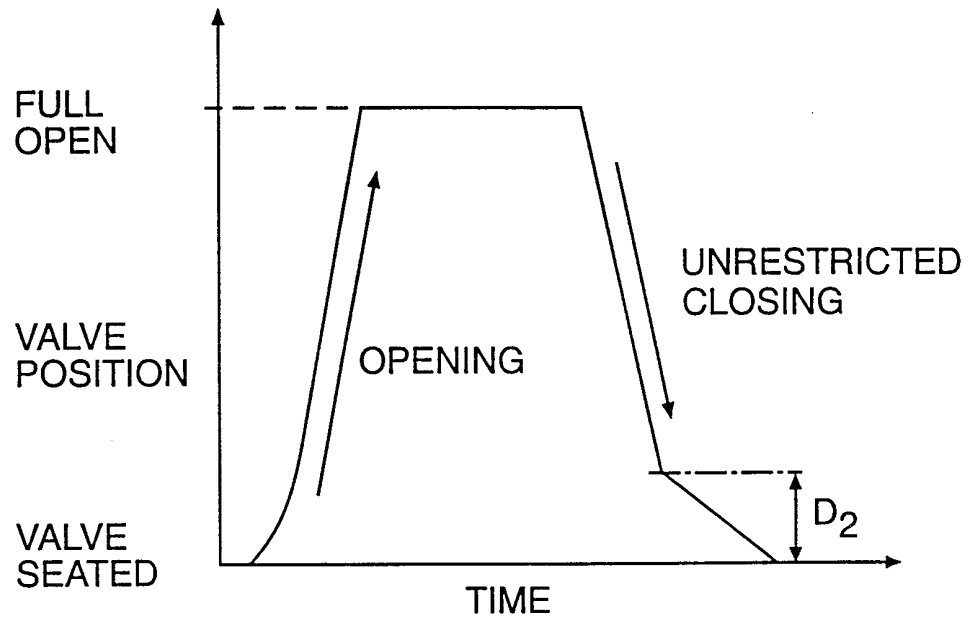

D_2 = RANGE OF CONTROLLED SEATING

FIG. 8

5/11

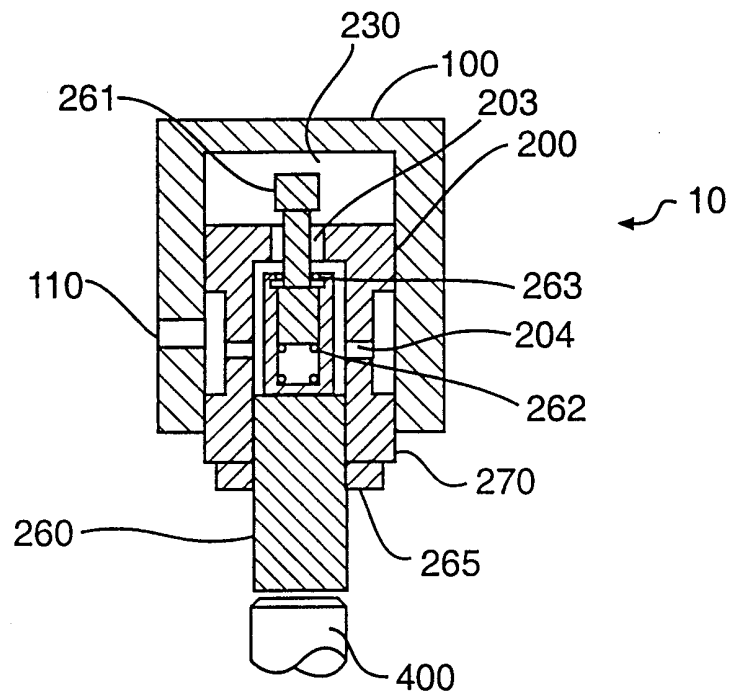


FIG. 9

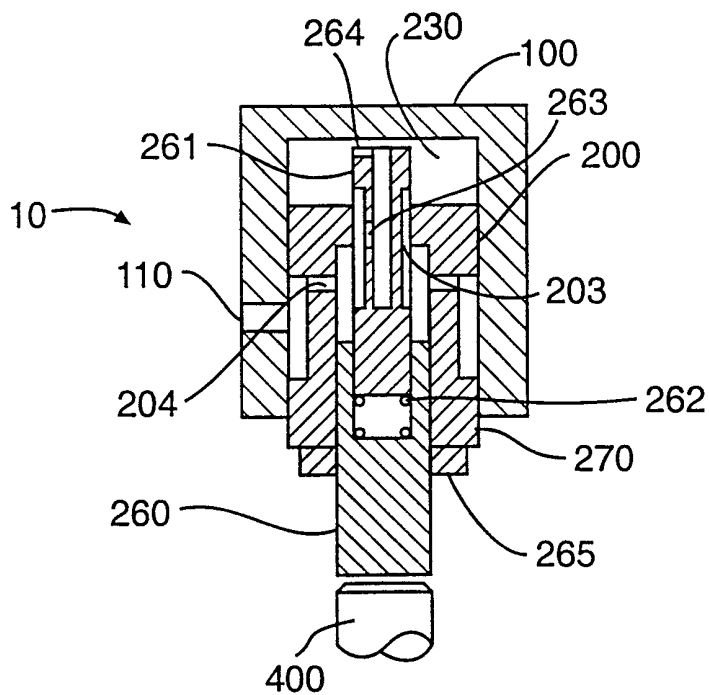


FIG. 10

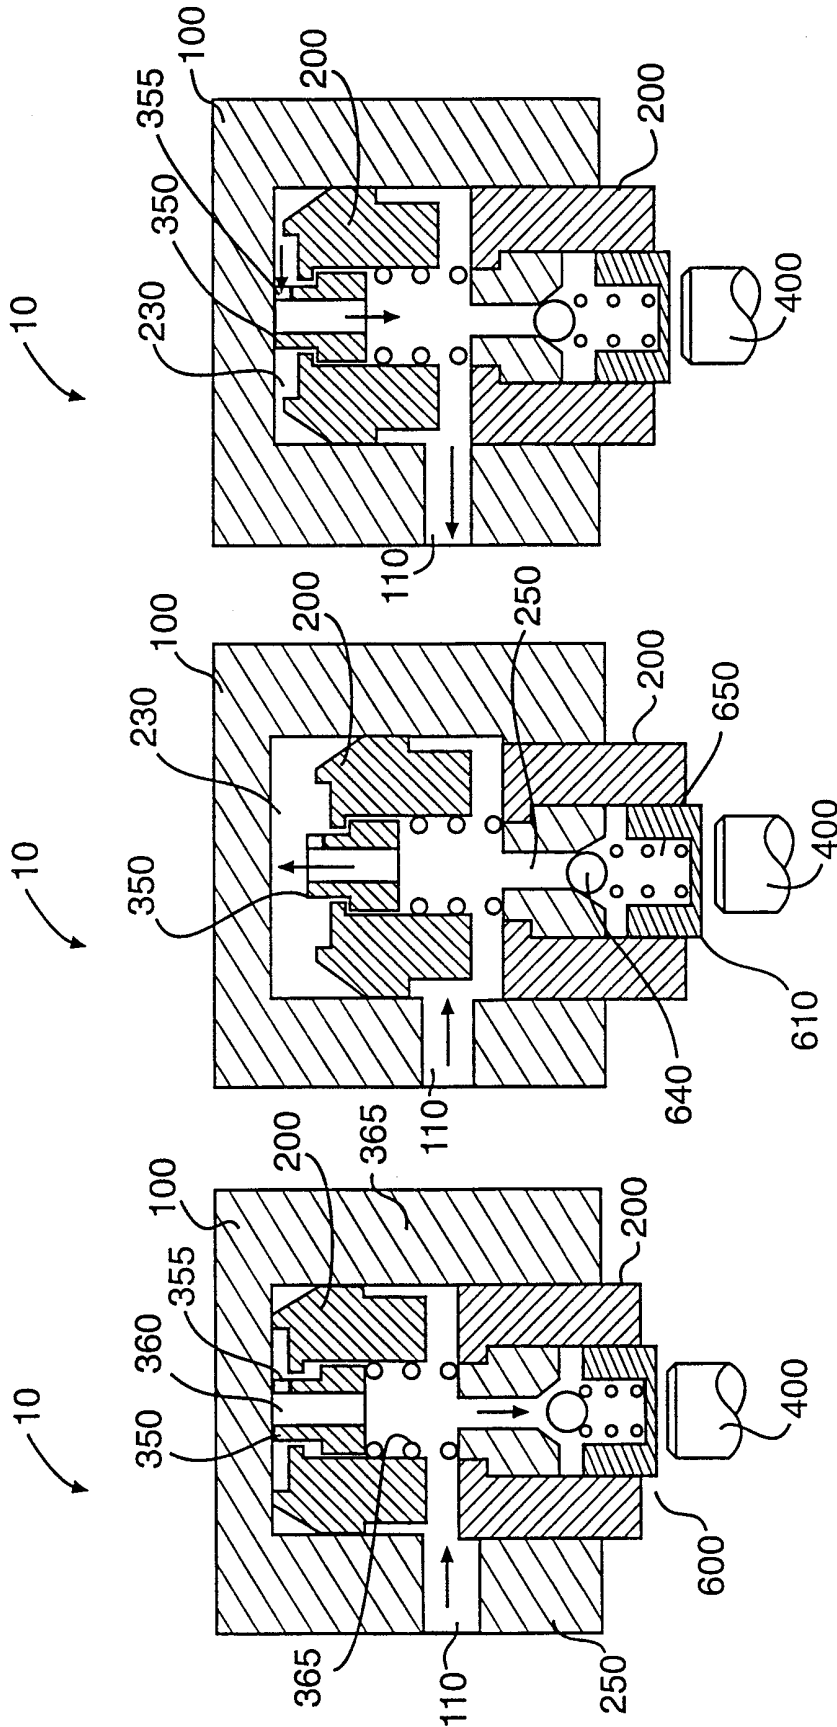


FIG. 13

FIG. 12

FIG. 11

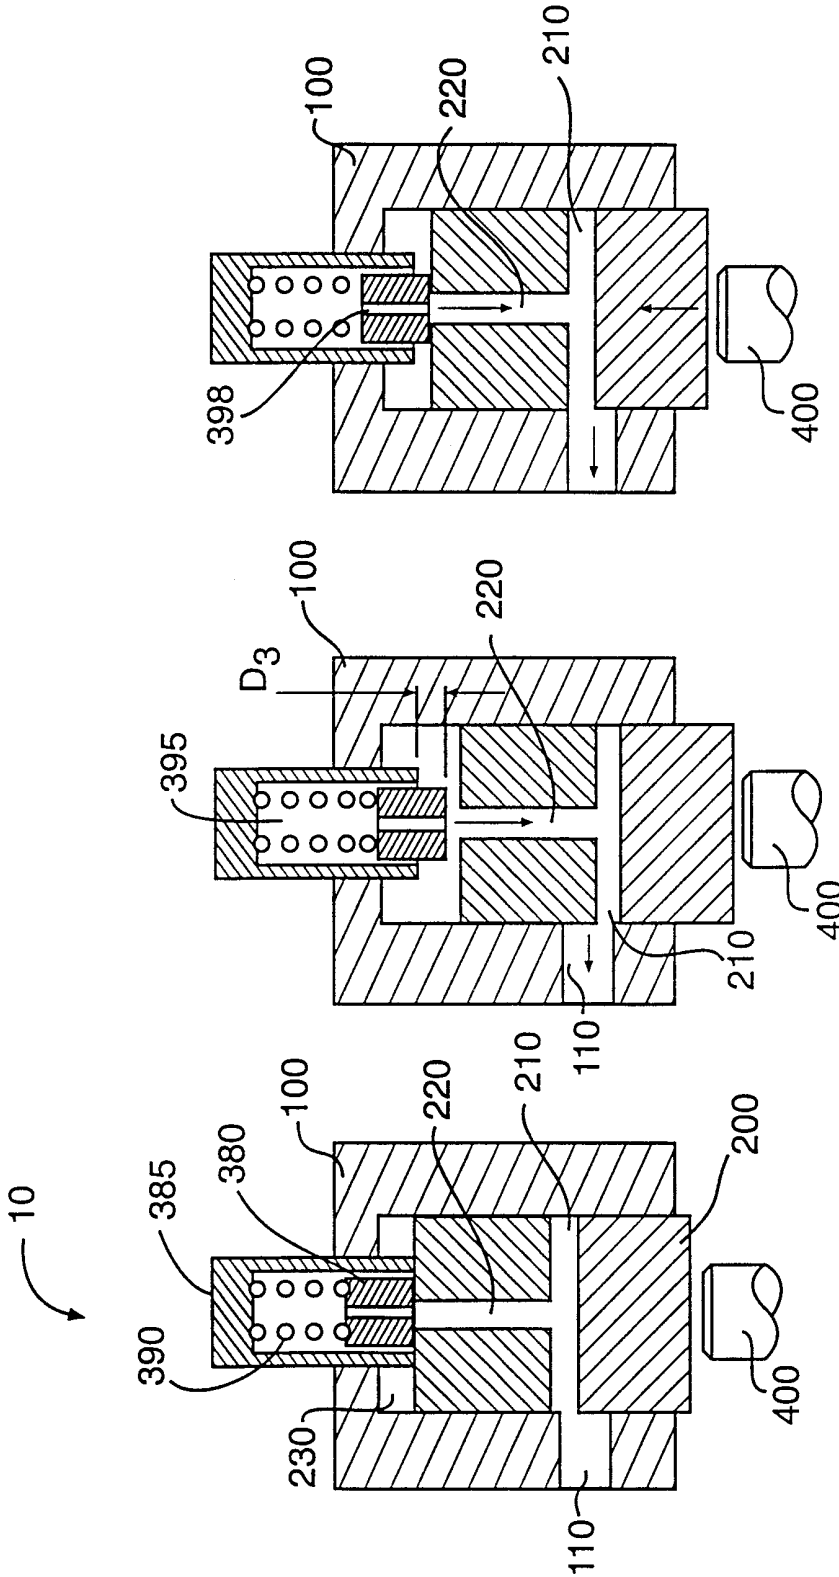


FIG. 16

FIG. 15

FIG. 14

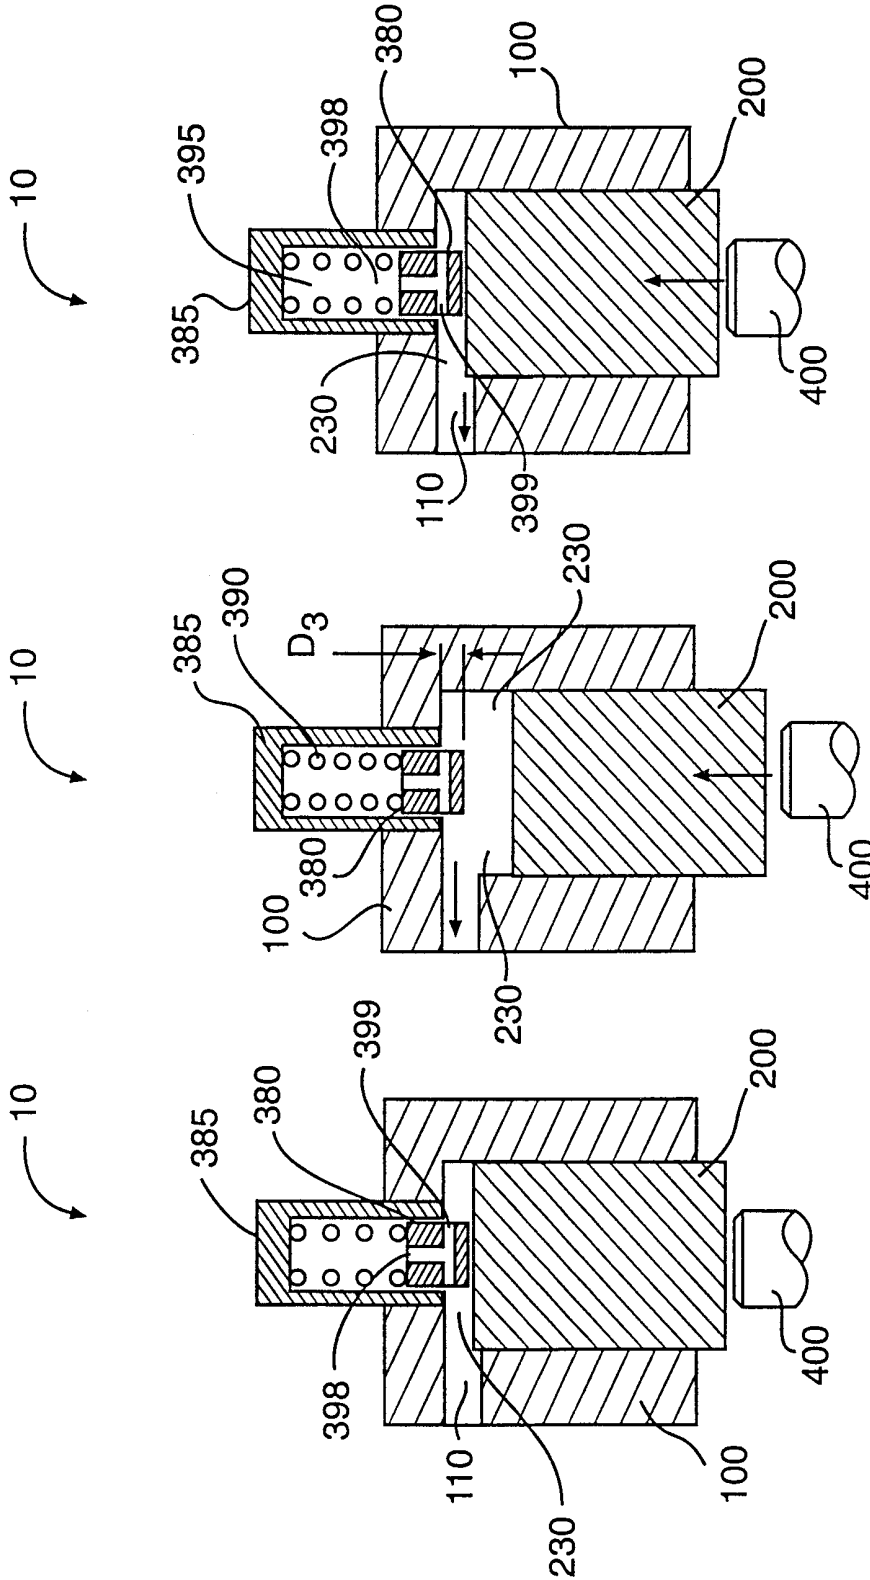


FIG. 19

FIG. 18

FIG. 17

9/11

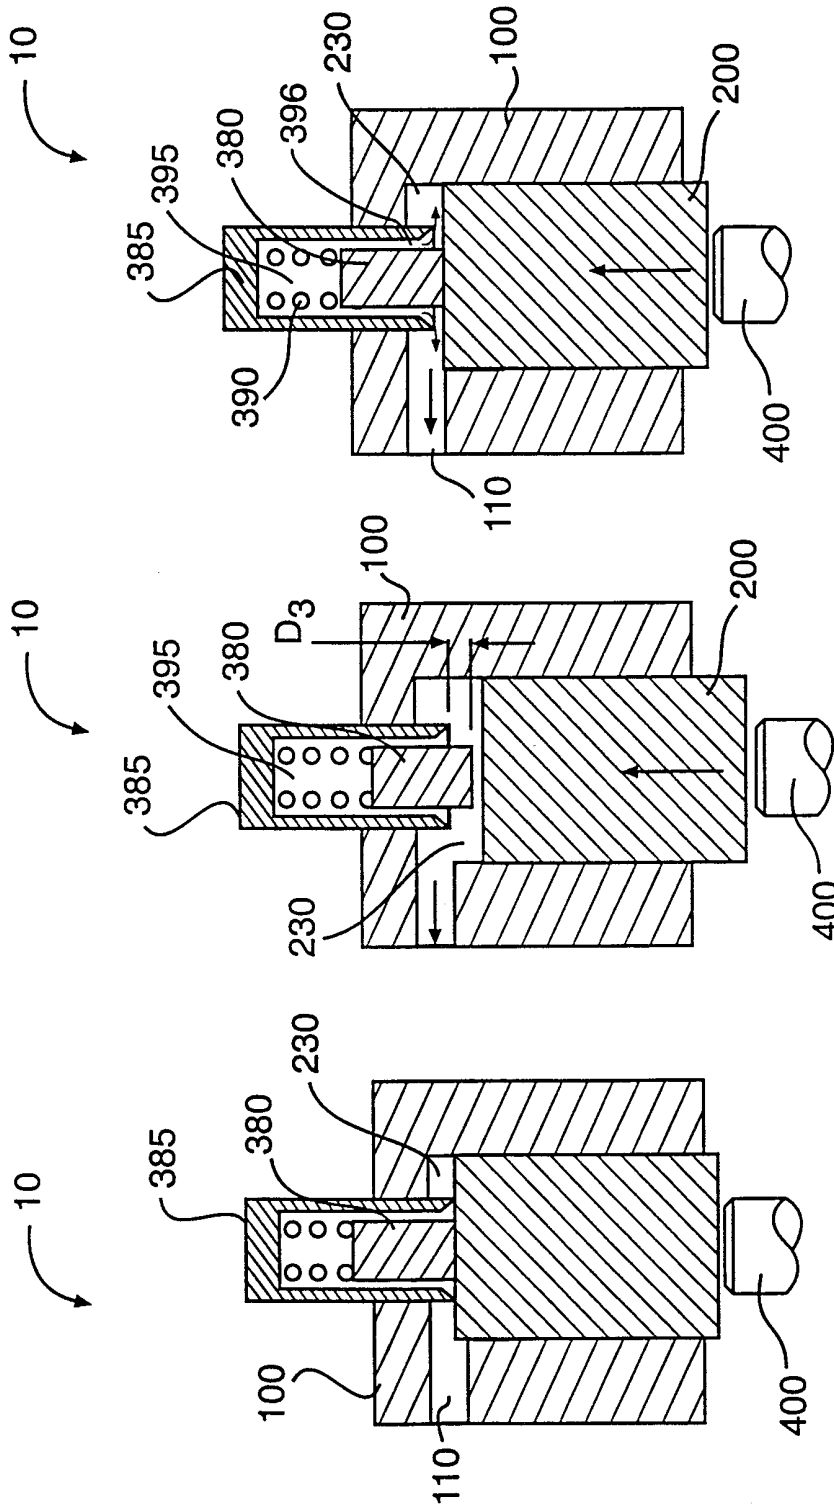


FIG. 22

FIG. 21

FIG. 20

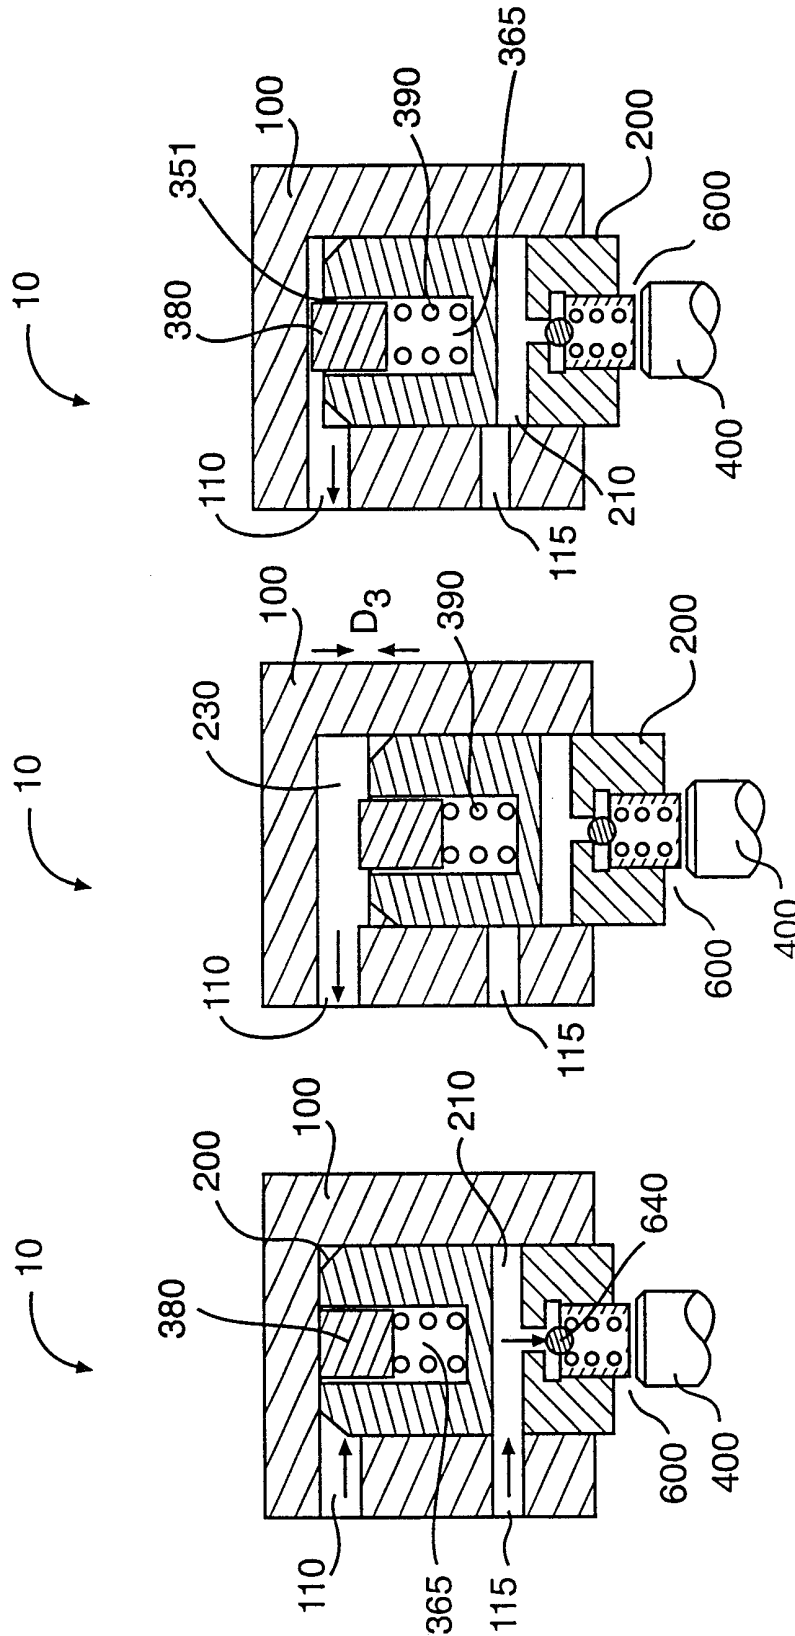


FIG. 25

FIG. 24

FIG. 23

11/11

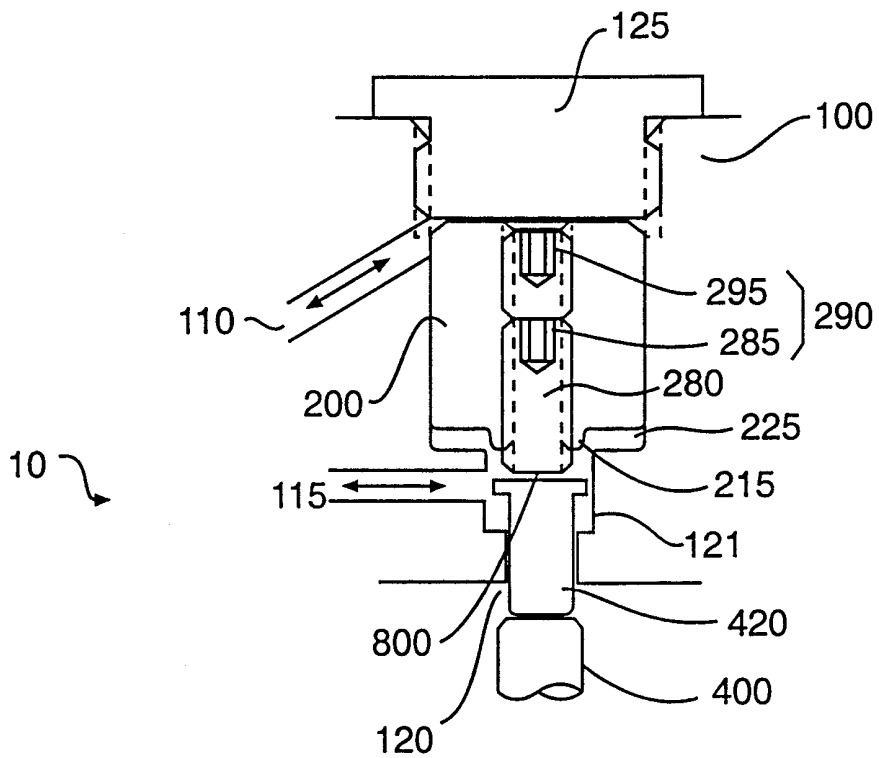


FIG. 26

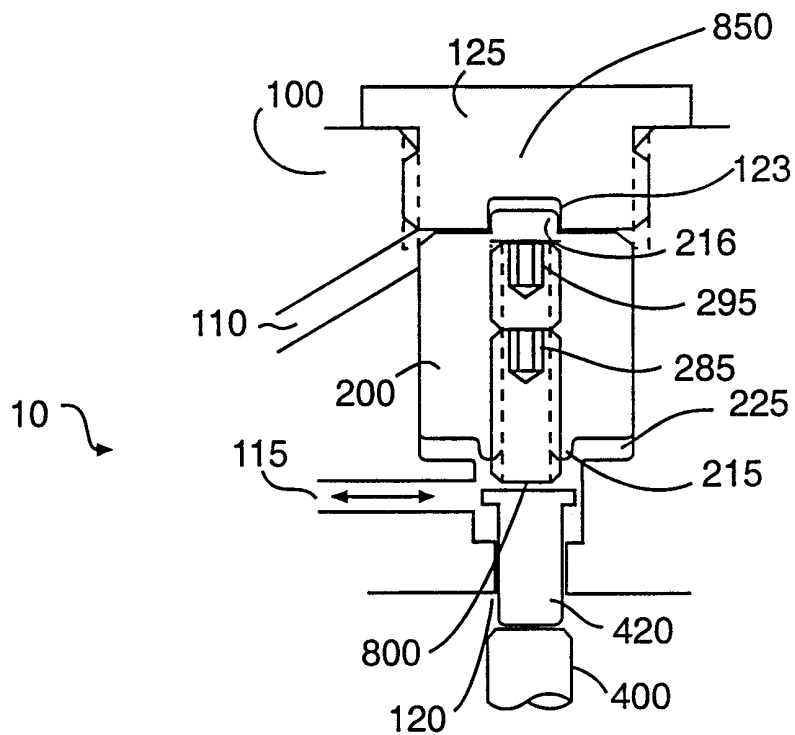


FIG. 27