

(19)



(11)

EP 3 838 003 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
07.09.2022 Bulletin 2022/36

(51) International Patent Classification (IPC):
A24C 5/30 (2006.01) **A24D 3/02** (2006.01)
B26D 5/00 (2006.01) **B26D 7/12** (2006.01)

(21) Application number: **20207783.0**

(52) Cooperative Patent Classification (CPC):
B26D 5/00; A24C 5/30; A24D 3/0254; B26D 7/12;
B26D 1/14

(22) Date of filing: **16.11.2020**

(54) **CUTTING DEVICE OF THE TOBACCO INDUSTRY**

SCHNEIDVORRICHTUNG DER TABAKINDUSTRIE

DISPOSITIF DE DÉCOUPE DE L'INDUSTRIE DU TABAC

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR

(30) Priority: **17.12.2019 IT 201900024220**

(43) Date of publication of application:
23.06.2021 Bulletin 2021/25

(73) Proprietor: **G.D S.p.A.**
40133 Bologna (IT)

(72) Inventors:
• **DATTILO, Giancarlo**
40133 Bologna (IT)

- **COCCOLINI, Davis**
40133 Bologna (IT)
- **MENGOLI, Fausto**
40133 Bologna (IT)
- **GAMBERINI, Giuliano**
40133 Bologna (IT)

(74) Representative: **Bianciardi, Ezio**
Bugnion S.p.A.
Via di Corticella, 87
40128 Bologna (IT)

(56) References cited:
EP-A1- 3 366 439 EP-A2- 2 030 515
EP-A2- 2 524 608 EP-B1- 2 524 608
GB-A- 2 123 324

EP 3 838 003 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] This invention relates to a cutting device.

[0002] More specifically, the invention addresses the sector of the processing of bar- or rod-shaped semi-products of the tobacco industry used for making smoking articles.

[0003] Typically, in machines of the tobacco sector, semi-products - specifically, bar- or rod-shaped semi-products - are fed to machines designed to process them to make smoking articles.

[0004] These processes may, for example, involve cutting the semi-products into sections or segments used to make up the smoking article.

[0005] In particular, to be able to cope with the high production volumes required in this sector, the cutting means used consist of cutting discs having a sharp peripheral portion configured to engage and cut the semi-products.

[0006] In order to sharpen the blade of the cutting disc to keep it in an optimal working state, automatic sharpening devices are used which comprise abrasive elements configured to engage the cutting disc while the disc is in operation so as to keep it at a predetermined level of sharpening.

[0007] In particular, the prior art devices involve implementing a rotary grinding disc placed in contact with a peripheral portion of the cutting disc; thus, while the cutting disc is being used, it is sharpened continuously so it is kept in an optimal working state.

[0008] The action of the abrasive element, however, inevitably causes the peripheral portion of the cutting disc to wear down, reducing the pressure between the two and eventually cancelling the sharpening action altogether. It is therefore necessary to periodically move the abrasive element to keep it in optimal contact with the cutting disc during its entire working life, in particular by applying pressure sufficient to achieve the desired sharpening action.

[0009] Document EP2524608 discloses a similar arrangement, in particular it describes a cutting apparatus wherein the sharpening tools are kept in contact with the knives during operation of the device.

[0010] This operation is extremely complex, however, and requires the utmost care: if the abrasive element does not apply sufficient pressure on the cutting disc, it will not be able to keep the cutting disc correctly sharpened, thus reducing cutting performance and quality; if the abrasive element applies too much pressure, on the other hand, there will be excessive wear on the cutting disc and its working life will consequently be shorter. Moreover, excessive pressure between the abrasive element and the cutting disc can lead to sparking, which is extremely dangerous because the sparks are generated near highly inflammable materials (dust and scraps of paper or fibre).

[0011] In this context, the technical purpose which forms the basis of the present invention is to propose a

cutting device which overcomes at least some of the above mentioned disadvantages of the prior art.

[0012] More specifically, the aim of this invention is to provide a cutting device capable of ensuring both safety and high performance.

[0013] The technical purpose indicated and the aims specified are substantially achieved by a cutting device, comprising the technical features described in one or more of the appended claims.

[0014] This invention discloses a cutting device of the tobacco industry, comprising a rotary cutting member, at least one abrasive element adapted to engage and sharpen a peripheral cutting portion of the rotary cutting member, first motor means associated with the rotary cutting member to set the rotary cutting member in rotation about its axis of rotation, second motor means, associated with the abrasive element to set the abrasive element in rotation about its axis of rotation and actuating means associated with the abrasive element and/or with the rotary cutting member to keep them in contact with each other. The cutting device also comprises, or is operatively associated with, an adjustment unit connected to the first and/or the second motor means and configured to detect directly or indirectly the electric power absorbed by the first and/or the second motor means and to drive the actuating means as a function of the electric power detected in order to keep the abrasive element and the rotary cutting member in contact with each other at a contact pressure whose value is within a predetermined interval. In a first embodiment, usable particularly (but not only) for cutting a continuous cigarette or filter rod or, more generally speaking, for cutting a continuous (bar-shaped) semi-product of the tobacco industry, fed longitudinally, the actuating means operate on the rotary cutting member to move it towards the abrasive element. This movement towards may be in a direction parallel to the axis of rotation of the rotary cutting member or, more preferably, transversely or perpendicularly thereto. More specifically, the rotary cutting member is in the form of a rotary blade holder on which one or more blades are mounted radially, each blade being capable of radial feed motion to compensate for blade wear. In this situation, the actuating means may be coupled to, or may themselves define, specific means for radially feeding the blade.

[0015] In a second embodiment, usable particularly (but not only) for cutting a continuous cigarette or filter rod or, more generally speaking, for cutting a succession of rod-shaped semi-products of the tobacco industry, fed transversely, specifically on drums, the actuating means operate on the at least one abrasive element to move it towards the cutting member. This movement towards may be in a direction parallel to the axis of rotation of the abrasive element or, alternatively, transversely or perpendicularly thereto. More specifically, the rotary cutting member is in the form of a cutting disc whose axis is parallel to the axis of rotation of the drum that carries the articles to be cut. In this situation, the feed motion of the

abrasive element towards the cutting disc is defined by the actuating means. Advantageously, therefore, the proposed cutting device comprises a system for controlling the relative position between the abrasive element and the rotary cutting member to ensure that they are correctly positioned relative to each other at all times and to eliminate the risk of their being positioned too far from each other or pressed too hard against each other. In other words, the control system determines the desired value of the feed step and/or the frequency of the feed steps such as to obtain optimum sharpening.

[0016] Another object of this invention is a filter tip attachment machine of the tobacco industry comprising the cutting device disclosed herein.

[0017] In particular, the cutting device is disposed to face a conveyor drum so as to cut rod sections into segments while the rod sections are being fed transversely on the conveyor drum. The conveyor drum is, for example, connected to a hopper or line for feeding multiple-length rod sections and is associated with one or more cutting devices facing the drum so as to cut each rod section into segments of shorter length, specifically of unit length. This invention also relates to a machine for making rod-shaped semi-products of the tobacco industry and comprising the cutting device.

[0018] More specifically, the cutting device is located downstream of a beam for forming a continuous strand or rod of filter or tobacco to cut it continuously into sections of predetermined length.

[0019] In other variant embodiments, the cutting device may be disposed in association with other components for cutting segments of a different type: for example, sections of a continuous tube or other semi-product. Advantageously, the machines described here ensure that the semi-products are processed in optimum manner and reduce the risk of producing defective articles because they comprise a cutting device capable of operating in conditions of high efficiency and safety at all times, ensuring that the cutting disc is correctly sharpened and thus capable of correctly cutting the semi-products they are responsible for processing, while at the same time eliminating the risks of fires breaking out on account of accidental sparking.

[0020] Another object of this invention is a method, according to claim 7, for sharpening at least one cutting edge of a rotary cutting member in a cutting device of the tobacco industry.

[0021] More specifically, the method of this invention comprises the following steps:

- detecting directly or indirectly the electric power absorbed by the first motor means and/or by the second motor means;
- driving the actuating means as a function of the absorbed electric power detected to move the abrasive element and the rotary cutting member relative to each other in order to keep them in contact with each other at a contact pressure whose value is within a

predetermined interval. Advantageously, the proposed method allows optimizing the control of the movement between the abrasive element and the rotary cutting member, thus ensuring that they are correctly positioned relative to each other at all times.

[0022] The dependent claims, which are incorporated herein by reference, correspond to different embodiments of the invention.

[0023] Further features and advantages of the invention are more apparent in the non-limiting description which follows of a preferred but non-exclusive embodiment of a cutting device as illustrated in the accompanying drawings, in which:

- Figure 1 schematically represents the cutting device according to this invention;
- Figures 2A-2B are detail views showing two possible embodiments of an adjustment operation performed by the device according to this invention.

[0024] The reference numeral 1 in the accompanying drawing generically denotes a cutting device of the tobacco industry, hereinafter in this description simply referred to as "device 1". In the embodiment illustrated, the device 1 is applied on a drum for transversely feeding a succession of rod-shaped semi-products (rod sections) and forming part of a filter tip attachment machine.

[0025] More specifically, the device 1 comprises a rotary cutting member 2 (for example, a cutting disc 2), at least one abrasive element 3, first motor means, second motor means 4 and an adjustment unit 5.

[0026] The rotary cutting member 2 is configured to make a transverse cut on a bar- or rod-shaped semi-product of the tobacco industry. More in detail, the rotary cutting member 2 has a circular peripheral portion 2a with a sharp cutting edge and configured to engage and cut the semi-products.

[0027] The rotary cutting member 2 is driven by first motor means associated therewith to drive it in rotation about its axis of rotation X.

[0028] The peripheral portion 2a of the rotary cutting member 2 is kept sharp by the at least one abrasive element 3 which is adapted to engage the peripheral portion 2a while the rotary cutting member 2 is being used. More specifically, the abrasive element 3 is driven (by actuating means of known type, hence not illustrated) according to a sharpening motion by which it is made to slide against the peripheral portion 2a of the rotary cutting member 2 in such a way that the pressure between the two promotes the sharpening process.

[0029] In other words, the actuating means are configured to keep the abrasive element 3 and the rotary cutting member 2 in contact with each other. Preferably, the abrasive element 3 comprises a grinding disc configured to be driven in rotation about its central axis to sharpen the rotary cutting member 2.

[0030] Advantageously, the use of a grinding disc al-

lows optimizing the sharpening process in that the disc wears down uniformly and has a constant behaviour for its entire working life.

[0031] According to this aspect, the sharpening motion is a rotational motion of the grinding disc about its axis, driven by the aforementioned second motor means 4.

[0032] The use of a grinding disc driven in rotation also allows reducing the total thermal stress the abrasive element 3 is subjected to.

[0033] According to a particular aspect of this invention, the grinding disc is movable towards and away from the rotary cutting member 2, preferably in a direction at right angles to the axis of rotation of the rotary cutting member, under the action of the actuating means to produce a feed movement intended to compensate for the wear on the grinding disc itself and/or on the rotary cutting member 2.

[0034] More specifically, the actuating means are configured to move the grinding disc towards and away from the rotary cutting member 2 in a transverse direction, preferably at right angles to the axis of rotation X of the rotary cutting member 2 (Figures 2A and 2B).

[0035] In an embodiment in which the rotary cutting member 2 has a V-shaped cutting edge, as shown schematically in Figure 2A, the device 1 comprises two abrasive elements 3 acting on respective opposite surfaces of the V-shaped cutting edge and each driven in rotation by respective second motor means, preferably controllable independently of each other.

[0036] In this context, the actuating means are associated with each of the abrasive elements 3 and are configured to move them simultaneously or independently according to a feed movement towards the peripheral portion 2a of the rotary cutting member 2. In particular, the actuating means operate independently in the case where the two abrasive elements 3 are mounted on respective, distinct slides or simultaneously on both the abrasive elements 3 in the case where they are mounted on a single slide.

[0037] In the different configuration shown in Figure 2B, on the other hand, there is a single abrasive element 3 to operate on a single lateral surface of the rotary cutting member 2. The single abrasive element 3 may be mounted on a single slide and driven by corresponding actuating means not illustrated.

[0038] According to the invention, the adjustment unit 5 is connected to the first motor means and/or the second motor means 4 and is configured to detect directly or indirectly the electric power absorbed by the first motor means and/or by the second motor means 4 and to drive the actuating means as a function of the absorbed electric power detected in order to keep the abrasive element 3 and the rotary cutting member 2 in contact with each other at a contact pressure whose value is within a predetermined interval. In other words, the adjustment unit continuously measures the power that is used to drive the abrasive element 3 in rotation about its axis, hence to overcome the resistance created by the contact be-

tween the grinding disc and the rotary cutting member 2 and uses this information to determine whether or not it is necessary to activate the actuating means to move the abrasive element 3 closer to the rotary cutting member 2 and, if it is, to determine the extent and/or the frequency of the steps by which to feed the abrasive element 3, in particular along the axis of the grinding disc. Operatively, the pressure generated between the rotary cutting member 2 and the abrasive element 3 during the sharpening process produces an increase in the power required to keep the abrasive element moving. Therefore, if the power delivered by the motor means 4 drops below a certain threshold, it means the pressure between the rotary cutting member 2 and the abrasive element 3 has fallen on account of progressive wear on the former and/or the latter, which in turn means that the sharpening process is becoming less effective.

[0039] On detecting this drop, the adjustment unit 5 accordingly activates the actuating means to move the abrasive element 3 towards the rotary cutting member 2 until the pressure between them returns to the right level to ensure optimum sharpening performance.

[0040] If there is more than one abrasive element 3, the adjustment unit 5 is configured to activate the actuating means selectively as a function of the power absorbed by the second actuating means 4 associated with the same abrasive element 3, so as to move, when necessary, only the specific abrasive elements 3 which are no longer in the optimum sharpening position relative to the rotary cutting member 2 on account of progressive wear. Preferably, the adjustment unit is configured to move the at least one abrasive element 3 discretely: that is to say, in steps of suitably predetermined length.

[0041] In other words, each time the adjustment unit 5 detects that the value of the power delivered by the motor means 4 indicates that the rotary cutting member 2 and the abrasive element 3 are not close enough together, it activates the actuating means associated with the abrasive element 3 to move the abrasive element 3 by a specific distance towards the rotary cutting member 2.

[0042] More specifically, this distance and/or a respective feed frequency is determined (preferably continuously or at specific time intervals) as a function of the instantaneous value of the absorbed power measured by the adjustment unit 5.

[0043] In a first possible embodiment, the adjustment unit 5 is configured to measure the instantaneous power of the second motor means 4 based on the electric power they absorb.

[0044] Alternatively, in a different embodiment, the adjustment unit 5 is configured to measure the instantaneous power of the second motor means 4 based on their values of resistant torque and angular speed.

[0045] In a different embodiment, not illustrated, the drive power from the actuating means may be applied on the cutting member and not on the abrasive element. This is the case, preferably, where the cutting device is used for cutting a continuous strand or rod in a machine

for making rod-shaped semi-products. In effect, under these circumstances, the cutting member comprises a rotary blade holder on which there are mounted two or more radial blades which may be fed in a radial direction in a controlled manner defining a radial feed system to all intents and purposes.

[0046] In yet another embodiment, not illustrated, the drive power from the actuating means may be applied on both the cutting member and on the abrasive element, simultaneously for example.

[0047] Advantageously, this invention achieves the aim of overcoming the abovementioned drawbacks of the prior art by providing a cutting device 1 which operates efficiently and in optimum manner at all times because the rotary cutting member 2 is always properly sharpened.

[0048] In effect, the abrasive element 3 is driven by the motor means 4, under the control of the adjustment unit 5, so that it is always correctly positioned to perform the sharpening operation in the best possible manner. This control is based on the instantaneous power requirement of the abrasive element, which is substantially equal to the power absorbed by the contact between the rotary cutting member 2 and the abrasive element and thus optimally approximates this value. In effect, the abrasive element (with the exception of its rotary supporting means) is not subject to other power losses that would alter the estimate of the power it absorbs when it comes into contact with the rotary cutting member 2, since the abrasive element comes into contact only with the rotary cutting member 2.

[0049] Also an object of this invention is a machine for making or processing bar or rod-shaped semi-products of the tobacco industry, comprising a cutting device according to this invention.

[0050] Another object of this invention is a method for sharpening a rotary cutting member 2 of a cutting device of the tobacco industry.

[0051] More specifically, the method described herein may be used to sharpen a cutting device having one or more of the features described in the foregoing. The method comprises detecting directly or indirectly the electric power absorbed by the first motor means and/or by the second motor means 4. As a function of the absorbed electric power detected, the actuating means are driven to move the abrasive element 3 and the rotary cutting member 2 relative to each other in order to keep the abrasive element 3 and the rotary cutting member 2 in contact with each other at a contact pressure whose value is within a predetermined interval.

[0052] The adjusting action is thus very precise because it can be set as a function of the power actually absorbed by the sharpening action, measurable independently of the braking action applied by cutting.

Claims

1. A cutting device of the tobacco industry, comprising:

- a rotary cutting member (2) configured to make a transverse cut on a bar- or rod-shaped semi-product of the tobacco industry;
- at least one abrasive element (3) adapted to engage and sharpen a peripheral cutting portion (2a) of the rotary cutting member (2);
- first motor means, associated with the rotary cutting member (2) to set the rotary cutting member (2) in rotation about its axis of rotation (X);
- second motor means (4), associated with the abrasive element (3) to set the abrasive element (3) in rotation about its axis of rotation;
- actuating means associated with the abrasive element (3) and/or with the rotary cutting member (2) to keep the abrasive element (3) and the rotary cutting member (2) in contact with each other;

characterized in that it comprises an adjustment unit (5) connected to the first motor means and/or the second motor means (4) and configured to detect directly or indirectly the electric power absorbed by the first motor means and/or by the second motor means (4) and to drive the actuating means as a function of the absorbed electric power detected in order to keep the abrasive element (3) and the rotary cutting member (2) in contact with each other at a contact pressure whose value is within a predetermined interval.

2. The device according to claim 1, comprising two abrasive elements (3) configured to engage respective, axially opposed peripheral cutting portions of the rotary cutting member (2).

3. The device according to claim 2, wherein the actuating means are associated with the two abrasive elements (3) and are configured to independently adjust the contact pressure between each abrasive element (3) and the rotary cutting member (2).

4. The device according to one or more of the preceding claims, wherein the abrasive element (3) comprises a grinding disc.

5. The device according to claim 4, wherein the actuating means are configured to move the grinding disc towards and away from the rotary cutting member (2) in a direction at right angles to the axis of rotation (X) of the rotary cutting member (2).

6. A machine for making or processing bar- or rod-shaped semi-products of the tobacco industry, comprising a cutting device (1) according to one or more

of the preceding claims.

7. A method for sharpening a rotary cutting member (2) of a cutting device of the tobacco industry according to one or more of the preceding claims, comprising the following steps:
 - detecting directly or indirectly the electric power absorbed by the first motor means and/or by the second motor means (4);
 - driving the actuating means as a function of the absorbed electric power detected to move the abrasive element (3) and the rotary cutting member (2) relative to each other in order to keep the abrasive element (3) and the rotary cutting member (2) in contact with each other at a contact pressure whose value is within a predetermined interval.
8. The method according to claim 7, wherein the step of detecting directly or indirectly the electric power absorbed by the first motor means and/or by the second motor means (4) is accomplished by detecting the instantaneous power absorbed by the second motor means (4) associated with the abrasive element (3).
9. The method according to claim 8, wherein the step of detecting the instantaneous power absorbed by the second motor means (4) is carried out by measuring the instantaneous electric current absorbed by the second motor means (4).

Patentansprüche

1. Schneidvorrichtung der Tabakindustrie, umfassend:
 - ein rotatorisches Schneidelement (2), das ausgelegt ist, um einen quer verlaufenden Schnitt auf einem stangen- oder stabförmigen Halbfertigerzeugnis der Tabakindustrie auszubilden;
 - mindestens ein Schleifelement (3), das dazu bestimmt ist, mit einem Umfangsschneidabschnitt (2a) des rotatorischen Schneidelements (2) in Eingriff zu gelangen und diesen zu schleifen;
 - erste Motormittel, die mit dem rotatorischen Schneidelement (2) assoziiert sind, um das rotatorische Schneidelement (2) um seine Rotationsachse (X) in Drehung zu versetzen;
 - zweite Motormittel (4), die mit dem Schleifelement (3) assoziiert sind, um das Schleifelement (3) um seine Rotationsachse in Drehung zu versetzen;
 - Antriebsmittel, die mit dem Schleifelement (3) und/oder dem rotatorischen Schneidelement (2) assoziiert sind, um das Schleifelement (3) und

das rotatorische Schneidelement (2) in Kontakt zueinander zu halten, **dadurch gekennzeichnet, dass** sie eine Regeleinheit (5) umfasst, die mit den ersten Motormitteln und/oder den zweiten Motormitteln (4) verbunden und ausgelegt ist, um direkt oder indirekt die elektrische Leistung zu erkennen, die von den ersten Motormitteln und/oder den zweiten Motormitteln (4) aufgenommen wird, und die Antriebsmittel als eine Funktion der erkannten aufgenommenen elektrischen Leistung zu steuern, sodass das Schleifelement (3) und das rotatorische Schneidelement (2) in Kontakt zueinander bei einem Kontaktdruck gehalten werden, dessen Wert innerhalb eines vorgegebenen Intervalls liegt.

2. Vorrichtung nach Anspruch 1, umfassend zwei Schleifelemente (3), die ausgelegt sind, um jeweils mit gegenständigen Umfangsschneidabschnitten des rotatorischen Schneidelements (2) in Eingriff zu gelangen.
3. Vorrichtung nach Anspruch 2, wobei die Antriebsmittel mit den zwei Schleifelementen (3) verbunden und ausgelegt sind, um unabhängig den Kontaktdruck zwischen einem jeden Schleifelement (3) und dem rotatorischen Schneidelement (2) zu regeln.
4. Vorrichtung nach einem oder mehreren der vorhergehenden Ansprüche, wobei das Schleifelement (3) eine Schleifscheibe umfasst.
5. Vorrichtung nach Anspruch 4, wobei die Antriebsmittel ausgelegt sind, um die Schleifscheibe hinführend zum und wegführend vom rotatorischen Schneidelement (2) in eine Richtung im rechten Winkel zur Rotationsachse (X) des rotatorischen Schneidelements (2) zu bewegen.
6. Maschine zur Herstellung oder Verarbeitung von stangen- oder stabförmigen Halbfertigerzeugnissen der Tabakindustrie, umfassend eine Schneidvorrichtung (1) nach einem oder mehreren der vorhergehenden Ansprüche.
7. Verfahren zum Schleifen eines rotatorischen Schneidelements (2) einer Schneidvorrichtung der Tabakindustrie nach einem oder mehreren der vorhergehenden Ansprüche, umfassend die folgenden Schritte:
 - direktes oder indirektes Erkennen der von den ersten Motormitteln und/oder den zweiten Motormitteln (4) aufgenommenen elektrischen Leistung;
 - Steuern der Antriebsmittel als eine Funktion der erkannten aufgenommenen elektrischen Leistung, um das Schleifelement (3) und das ro-

tatorische Schneidelement (2) relativ zueinander zu bewegen, um das Schleifelement (3) und das rotatorische Schneidelement (2) in Kontakt zueinander bei einem Kontaktdruck zu halten, dessen Wert innerhalb eines vorgegebenen Intervalls liegt.

8. Verfahren nach Anspruch 7, wobei der Schritt zum direkten oder indirekten Erkennen der von den ersten Motormitteln und/oder den zweiten Motormitteln (4) aufgenommenen elektrischen Leistung vollzogen wird, indem die von den zweiten Motormitteln (4), die mit dem Schleifelement (3) assoziiert sind, aufgenommene Momentanleistung erkannt wird.
9. Verfahren nach Anspruch 8, wobei der Schritt zum Erkennen der von den zweiten Motormitteln (4) aufgenommenen Momentanleistung durch Messen des von den zweiten Motormitteln (4) aufgenommenen Momentanstroms durchgeführt wird.

Revendications

1. Dispositif de découpe de l'industrie du tabac, comprenant :

- un organe de découpe rotatif (2) configuré pour effectuer une découpe transversale sur un semi-produit en forme de barre ou de tige de l'industrie du tabac ;
- au moins un élément abrasif (3) adapté pour engager et affûter une partie de découpe périphérique (2a) de l'organe de découpe rotatif (2) ;
- des premiers moyens moteurs, associés à l'organe de découpe rotatif (2) pour mettre l'organe de découpe rotatif (2) en rotation autour de son axe de rotation (X) ;
- des seconds moyens moteurs (4), associés à l'élément abrasif (3) pour mettre l'élément abrasif (3) en rotation autour de son axe de rotation ;
- des moyens d'actionnement associés à l'élément abrasif (3) et/ou à l'organe de découpe rotatif (2) pour maintenir l'élément abrasif (3) et l'organe de découpe rotatif (2) en contact l'un avec l'autre ;

caractérisé en ce qu'il comprend une unité de réglage (5) reliée aux premiers moyens moteurs et/ou aux seconds moyens moteurs (4) et configurée pour détecter directement ou indirectement la puissance électrique absorbée par les premiers moyens moteurs et/ou par les seconds moyens moteurs (4) et pour piloter les moyens d'actionnement en fonction de la puissance électrique absorbée détectée afin de maintenir l'élément abrasif (3) et l'organe de découpe rotatif (2) en contact l'un avec l'autre à une pression de contact dont la valeur est comprise dans

un intervalle prédéterminé.

2. Dispositif selon la revendication 1, comprenant deux éléments abrasifs (3) configurés pour engager des parties de découpe périphériques respectives, axialement opposées, de l'organe de découpe rotatif (2).
3. Dispositif selon la revendication 2, dans lequel les moyens d'actionnement sont associés aux deux éléments abrasifs (3) et sont configurés pour régler indépendamment la pression de contact entre chaque élément abrasif (3) et l'organe de découpe rotatif (2).
4. Dispositif selon une ou plusieurs des revendications précédentes, dans lequel l'élément abrasif (3) comprend un disque de meulage.
5. Dispositif selon la revendication 4, dans lequel les moyens d'actionnement sont configurés pour rapprocher et éloigner le disque de meulage de l'organe de découpe rotatif (2) dans une direction perpendiculaire à l'axe de rotation (X) de l'organe de découpe rotatif (2).
6. Machine pour la fabrication ou le traitement de semi-produits en forme de barre ou de tige de l'industrie du tabac, comprenant un dispositif de découpe (1) selon une ou plusieurs des revendications précédentes.
7. Procédé d'affûtage d'un organe de découpe rotatif (2) d'un dispositif de découpe de l'industrie du tabac selon une ou plusieurs des revendications précédentes, comprenant les étapes suivantes :
 - détecter directement ou indirectement la puissance électrique absorbée par les premiers moyens moteurs et/ou par les seconds moyens moteurs (4) ;
 - commander les moyens d'actionnement en fonction de la puissance électrique absorbée détectée pour déplacer l'élément abrasif (3) et l'organe de découpe rotatif (2) l'un par rapport à l'autre afin de maintenir l'élément abrasif (3) et l'organe de découpe rotatif (2) en contact l'un avec l'autre à une pression de contact dont la valeur est comprise dans un intervalle prédéterminé.
8. Procédé selon la revendication 7, dans lequel l'étape de détecter directement ou indirectement la puissance électrique absorbée par les premiers moyens moteurs et/ou par les seconds moyens moteurs (4) est accomplie en détectant la puissance instantanée absorbée par les seconds moyens moteurs (4) associés à l'élément abrasif (3) .
9. Procédé selon la revendication 8, dans lequel l'étape

de détection de la puissance instantanée absorbée par les seconds moyens moteurs (4) est réalisée en mesurant le courant électrique instantané absorbé par les seconds moyens moteurs (4).

5

10

15

20

25

30

35


40


45

50

55

Fig.1

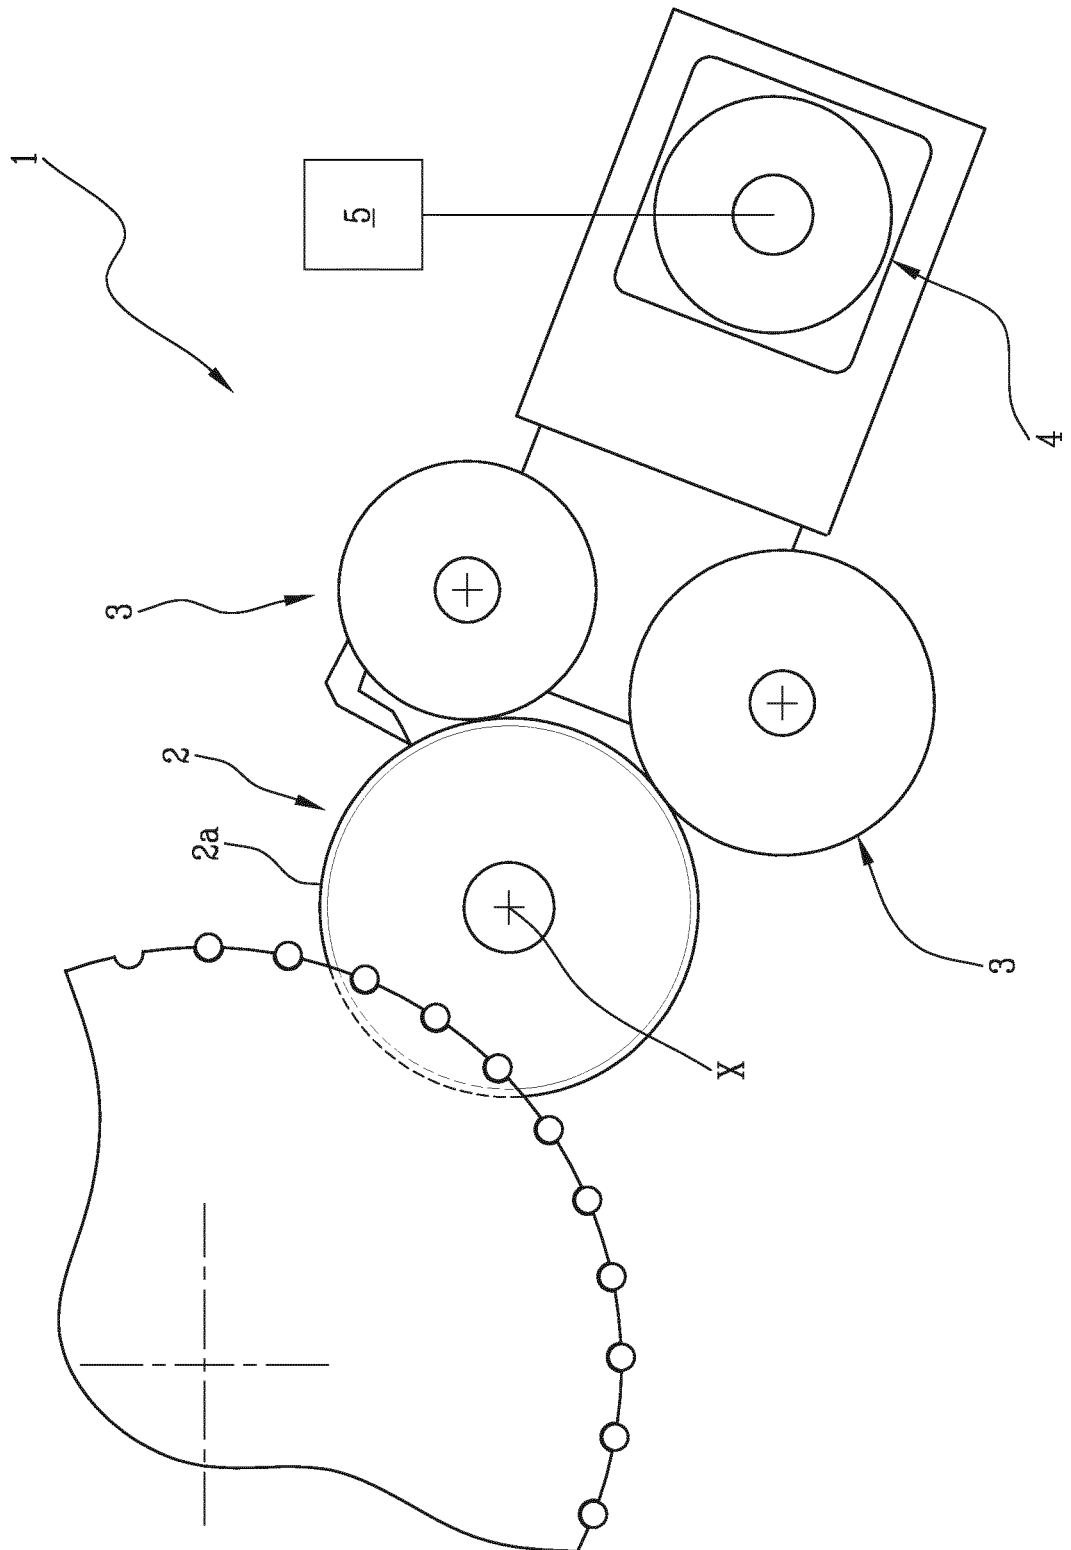

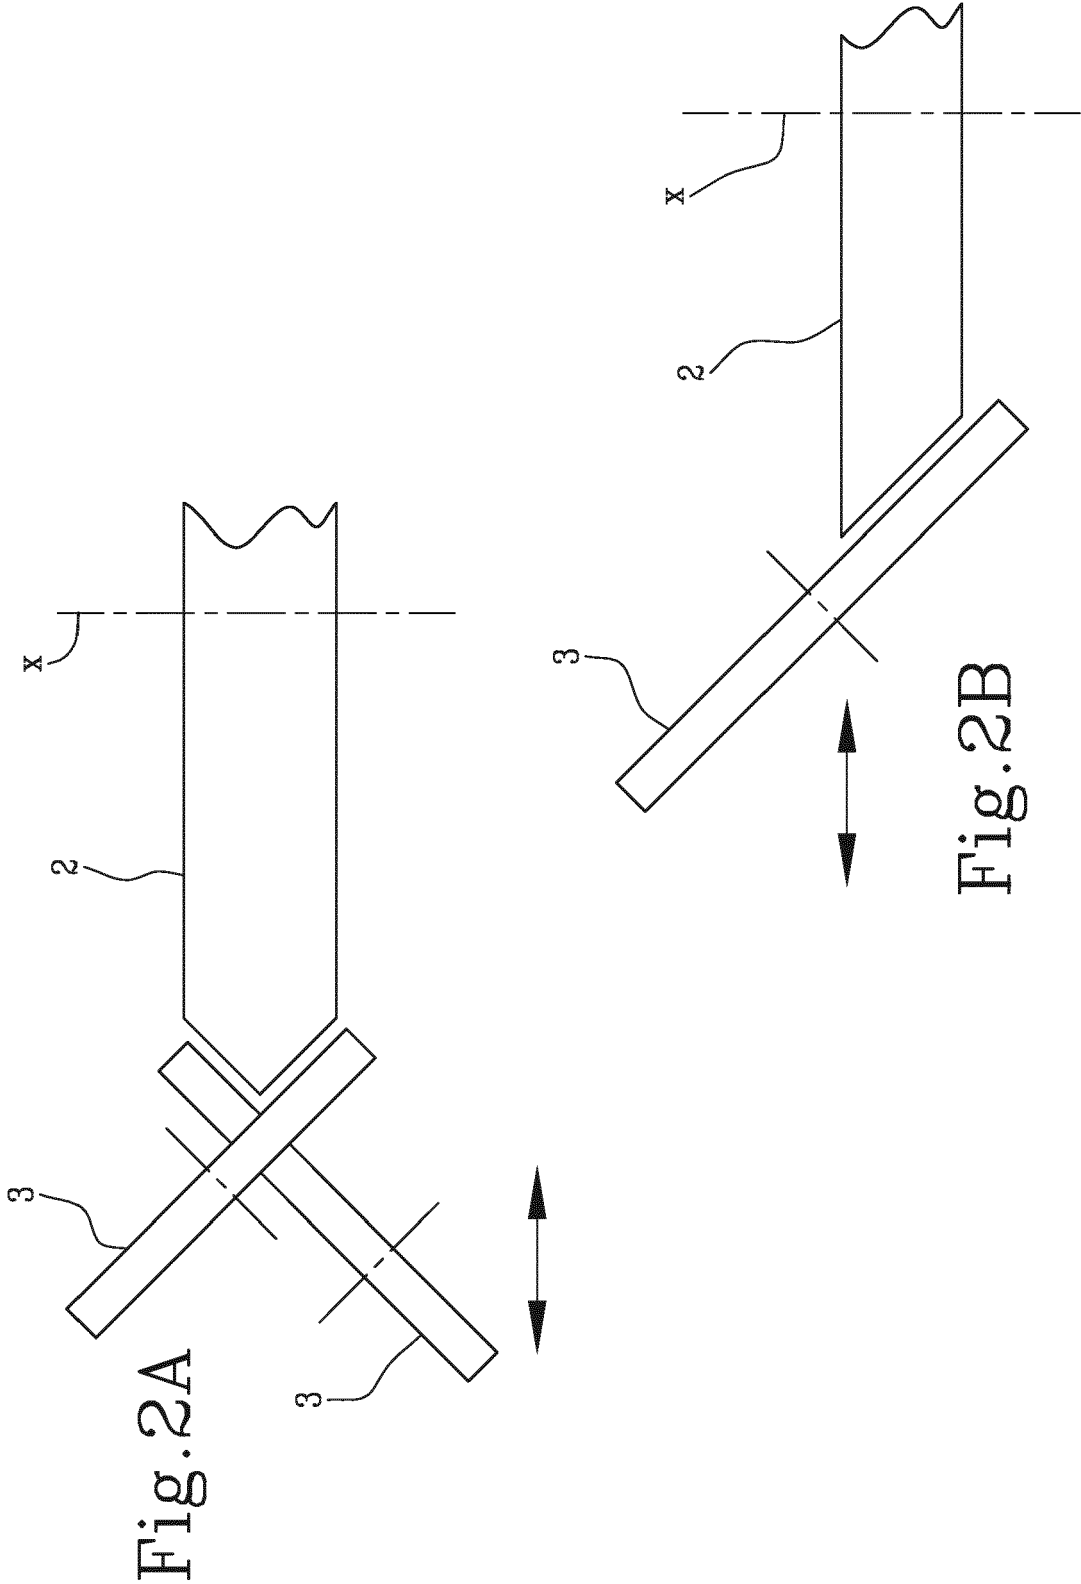

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- EP 2524608 A [0009]