(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
13 December 2007 (13.12.2007)

PCT

(10) International Publication Number
WO 2007/141300 A1

(51) International Patent Classification:
B41N 1/08 (2006.01) *C23G 1/22* (2006.01)
B41N 3/03 (2006.01)

(21) International Application Number:
PCT/EP2007/055586

(22) International Filing Date: 6 June 2007 (06.06.2007)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
06115002.5 6 June 2006 (06.06.2006) EP

(71) Applicant *(for all designated States except US)*: **Hydro Aluminium Deutschland GmbH** [DE/DE]; Ettore-Bugatti-Str. 6-14, 51149 Köln (DE).

(72) Inventors; and
(75) Inventors/Applicants *(for US only)*: **KERNIG, Bernhard** [DE/DE]; Höninger Weg 145, 50969 Köln (DE). **BRINKMAN, Henk-Jan** [NL/DE]; Am Kreuter 7, 53117 Bonn (DE).

(74) Agent: **COHAUSZ & FLORACK**; Bleichstrasse 14, 40211 Düsseldorf (DE).

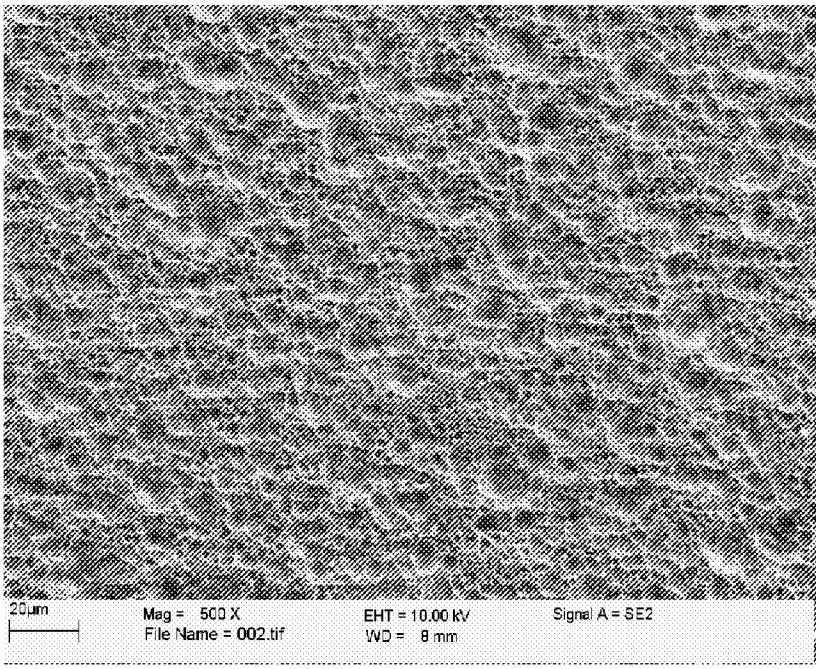
(81) Designated States *(unless otherwise indicated, for every kind of national protection available)*: AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States *(unless otherwise indicated, for every kind of regional protection available)*: ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— *with international search report*
— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) **Title:** METHOD FOR CLEANING AN ALUMINIUM WORKPIECE



(57) **Abstract:** The invention relates to a method of conditioning the surface of a work piece, in particular of a litho- strip or litho-sheet, consisting of an aluminium alloy. The object of the invention to provide a method for conditioning the surface of a work piece and a work piece consisting of an aluminium alloy enabling an increasing manufacturing speed in surface roughening while maintaining a high quality of the electro-chemical grained surface of the work piece with relative low effort related to facility equipment, is solved in that the method of conditioning comprises at least the step of degreasing the surface of the work piece with a degreasing medium, wherein the aqueous degreasing medium contains at least 1,5 to 3 % by weight of a composite of 5 - 40 % sodium tripolyphosphate, 3 - 10 % sodium gluconate, 3 - 8 % of a composite of non-ionic and anionic surfactants and optionally 0,5 to 70 % soda, preferably 30 - 70 % soda, wherein sodium hydroxide is added to the aqueous degreasing medium such that the concentration of sodium hydroxide in the aqueous degreasing medium is 0, 01 to 5 % by weight, preferably 0, 1 to 1,5 % by weight, more preferably 1 to 2,5 % per weight .

WO 2007/141300 A1

Method for cleaning an aluminium workpiece

The invention relates to a method of conditioning the surface of a work piece, in particular of a litho-strip or litho-sheet, consisting of an aluminium alloy.

Work pieces such as strips or sheets consisting of an aluminium alloy are often surface treated after finishing rolling to prepare them for the next manufacturing step. In particular strips or sheet for lithographic printing are conditioned to achieve a predetermined surface roughness in a subsequent graining process. Litho-strips or sheets are usually degreased after finishing rolling. As known from the US-patent specification US 5,997,721, degreasing respectively cleaning of the surface is done in one step by anodising the aluminium alloy sheet with AC current in an acidic electrolyte bath. Another way to degrease or clean aluminium slivers is known from the German patent DE 43 17 815 C1 namely the use of an alkaline medium. But from the use of alkaline media it is known that they do not remove every features of the subsurface microcrystalline layer, in particular oxide particles, which are present on or near the surface of the rolled aluminium strips.

However, prior electro-chemical graining the litho-strips are usually subjected to sodium hydroxide in a pre-treatment to degrease and clean the surface again, which process together with the electro-chemical graining is herein further called surface roughening process of litho-

strips. In principle surface roughening is done by the manufacture of lithographic printing plates. Due to the increasing manufacturing speed of surface roughening of the litho-strips time for the pre-treatment of the surface of the litho-strips and for the electro-chemical graining decreases. It has been found that due to the increasing manufacturing speed the pre-treatment with sodium hydroxide is not sufficient enough to remove all contaminants from the surface of the litho-strip. As a consequence, the results in electro-chemical graining are not stable and surface defects occur on electro-chemically grained litho-strips or sheets. However, a reduction of the manufacturing speed causes higher production costs for lithographic printing plates.

Furthermore, methods of conditioning the surface of a litho-strip including two steps require relative high expenses related to facility equipments.

Hence, it is an object of the invention to provide a method for conditioning the surface of a work piece and a work piece consisting of an aluminium alloy enabling an increasing manufacturing speed in surface roughening and maintaining at the same time a high quality of the grained surface of the work piece with relative low effort related to facility equipment.

According to a first teaching of the present invention the above mentioned object is solved by a method of conditioning the surface of an aluminium work piece consisting of an aluminium alloy, which method comprises at least the step of degreasing the surface of the work piece with a degreasing medium, wherein the aqueous degreasing medium contains at least 1,5 to 3 % by weight

of a composite of 5 - 40 % sodium tripolyphosphate, 3 - 10 % sodium gluconate, 3 - 8 % of a composite of non-ionic and anionic surfactants and optionally 0,5 % to 70 % soda, preferably 30 - 70 % soda, wherein sodium hydroxide is added to the aqueous degreasing medium such that the concentration of sodium hydroxide in the aqueous degreasing medium is 0,01 to 5 % by weight, preferably 0,1 to 1,5 % by weight, more preferably 1 to 2,5 % by weight.

It has been surprisingly found that the combination of the use of the degreasing medium together with added sodium hydroxide ensures an increased manufacturing speed during surface roughening including electro-chemical graining with sufficient results despite of the fact that oxide particles are not removed completely during degreasing. The reason for the good results is seen in the fact that due to the addition of sodium hydroxide the degreasing medium has an increased pickling rate which removes more aluminium from the surface at the same time. In combination with the described pre-treatment of for example litho-strips it has been surprisingly found that the electro-chemical graining process of litho-strips can be done with a lower charge entry therefore enabling a higher manufacturing speed. While the addition of 0,1 % to 1,5 % by weight sodium hydroxide is suitable even for lower manufacturing speeds during degreasing, with the addition of 1 % to 2,5 % by weight sodium hydroxide highest manufacturing speeds during degreasing are achievable ensuring at the same time high manufacturing speeds during plate manufacturing, i.e. during electro-chemical graining. The optional addition of soda in an amount of 0,5 - 70 %, preferably 30 to 70 % by weight allows to control pH-value of the degreasing medium.

According to a preferred embodiment of the invention the time of application of the degreasing medium to the surface of the aluminium work piece is at maximum 1 to 7 s, preferably at maximum 2 to 5 s. These application times ensure high production speeds at the same time ensuring that the oxide islands can easily be removed by surface roughening.

To increase pickling effect of the degreasing medium the temperature of the degreasing medium is 50 to 85 °C, preferably 65 °C to 75 °C.

More preferably, the pH-value of the aqueous degreasing medium is from 10 to 14, preferably 10 to 13,5.

According to a next advantageous embodiment, the work piece is a strip or a sheet, in particular a litho-strip or a litho-sheet. In this case the necessary electro-chemical graining process for manufacturing litho-strips or litho-sheets can be accomplished thoroughly within less time and the printing plate manufacturing speed can be increased. Furthermore, the charge entry needed can be reduced while providing a fully grained strip or sheet surface.

More preferably, the inventive conditioning method is accomplished subsequent the manufacturing of a strip, in particular a litho-strip, and the conditioned strip is reeled on a coil. In this case a coil of a conditioned litho-strip can be provided comprising an optimum performance in further surface roughening processes used to manufacture lithographic printing plates.

According to a second teaching of the present invention the above mentioned object is solved by a work piece consisting of an aluminium alloy conditioned by the inventive method. As outlined before, the inventive work piece provides a cleaned surface with an optimum performance for a subsequent electro-chemical graining process.

More preferably, the work piece is a strip or a sheet, in particular a litho-strip or a litho-sheet. Litho-strip or sheets are produced for lithographic printing plates and differ from ”normal” sheets due to the aluminium alloy they consist of and their specific thickness, which is typically less than 1 mm, preferably 0,14 to 0,5 mm, more preferably 0,25 to 0,3 mm. Furthermore, the surface of litho-strips and sheets has to be prepared for a roughening process, since manufacturing of lithographic printing plates generally comprises an electro-chemical graining process to prepare the surface of the lithographic printing plates for the printing process. With the inventive sheets or strips, in particular with the inventive litho-sheets or litho-strips, the necessary electro-chemical graining of the surface can be accomplished in shorter time with a reduced charge entry.

Beside an optimised surface of the inventive work piece the mechanical features and an improved graining structure during electro-chemical graining can be provided if the aluminium alloy of the work piece is one of the aluminium alloys AA1050, AA1100, AA3103 or AlMg0,5. These aluminium alloys provide the mechanical strength needed for lithographic printing plates while enabling due to the low amount of alloying constituents a homogeneous graining of

the surface. However, work pieces consisting of other aluminium alloys may provide the same advantages.

According to a more preferably embodiment of the inventive work piece the aluminium alloy contains the following alloying constituents in percent by weight:

0,05 % ≤ Si ≤ 0,15 %,
0,3 % ≤ Fe ≤ 0,4 %,
Cu ≤ 0,01 %,
Mn ≤ 0,05 %,
Mg ≤ 0,01 %,
Zn ≤ 0,015 %,
Ti ≤ 0,015 %,

impurities each less than 0,005 % in sum max. 0,15 %, rest Al

or

0,05 % ≤ Si ≤ 0,25 %,
0,30 % ≤ Fe ≤ 0,40 %,
Cu ≤ 0,04 %,
Mn ≤ 0,05 %,
0,1 % ≤ Mg ≤ 0,3 %,
Ti ≤ 0,04 % and

impurities each less than 0,005 % in sum max. 0,15 %, rest Al

or

0,05 % ≤ Si ≤ 0,5 %,

0,40 % ≤ Fe ≤ 1 %,

Cu ≤ 0,04 %,

0,08 % ≤ Mn ≤ 0,3 %,

0,05 % ≤ Mg ≤ 0,3 %,

Ti ≤ 0,04 % and

impurities each less than 0,005% in sum max. 0,15 %, rest Al.

Work pieces consisting of one of the three aluminium alloys and conditioned with the inventive method have state of the art mechanical and graining properties, in particular if the work pieces are litho-strips which are grained electro-chemically after conditioning. It was surprisingly observed that in particular the latter aluminium alloys conditioned with the inventive conditioning method show a higher sensitivity in subsequent surface roughening processes. As a result despite of the inventive single step conditioning method, which reduces the expenses for the conditioning equipment significantly, an increase in plate manufacturing speed for litho-strips and sheets is achievable.

There are a lot of possibilities to develop further the invention. Hereunto it is refer to the dependent claims of claim 1 and claim 6 as well as to embodiments of the invention in combination with the drawings. The drawings show in

Fig. 1 a microscopic view of the surface of a litho-strip degreased conventionally and

Fig. 2 a microscopic view of the surface of a litho-strip degreased with the inventive method.

To verify the inventive method four strips made of two different aluminium alloys were tested on the one hand with different degreasing parameters and on the other with different strip velocities during electro-chemical graining on different plate manufacturing lines. The different aluminium alloys have the following compositions of alloying constituents in weight percent:

alloy A:

0,05 % ≤ Si ≤ 0,25 %,
0,3 % ≤ Fe ≤ 0,40 %,
Cu ≤ 0,04 %,
Mn ≤ 0,05 %,
0,1 % ≤ Mg ≤ 0,3 %,
Ti ≤ 0,04 %, and

impurities each less than 0,005 % in sum max. 0,15 %, rest Al.

alloy B:

0,05 % ≤ Si ≤ 0,15 %,
0,3 % ≤ Fe ≤ 0,4 %,
Cu ≤ 0,01 %,
Mn ≤ 0,05 %,

Mg ≤ 0,01 %,

Zn ≤ 0,015 %,

Ti ≤ 0,015 %,

impurities each less than 0,005 % in sum max. 0,15 %, rest Al

Litho-strips made from the aluminium alloys mentioned above where tested with regard to their graining behaviour on industrial plate manufacturing lines.

For the inventive examples the degreasing medium used contains at least 1,5 to 3 % by weight of a composite of 5 to 40 % sodium tripolyphosphate, 3 to 10 % sodium gluconate, 30 to 70 % soda and 3 to 8 % of a composite of non-ionic and anionic surfactants, with an addition of sodium hydroxide in the amount of 1 % by weight. The comparative examples were degreased with the same conditions without the addition of sodium hydroxide to the degreasing medium. The results of the examples are shown in table 1

Strip	Al Alloy	$T_{Degr.}$ (°C)	$t_{Degr.}$ (s)	$v_{Graining}$ (m/min.)	Type	Appearance after graining
Strip 1	A	75	3,4	55	prior art	0
				50	prior art	+
Strip 2	A	75	3,4	55	invention	+
				50	invention	+
Strip 3	B	75	3,4	> 60	prior art	0
Strip 4	B	75	3,4	> 60	invention	++

with T_{Degr} as the temperature during degreasing, t_{Degr} the contact time of the degreasing medium with the strip surface and $v_{Graining}$ the velocity of the strips in the plate manufacturing lines, i.e. the velocity during electro-chemical graining. Strip 1 and 2 produced from one mother strip were tested on the same plate manufacturing line. The same applies to strip 3 and 4. The different values of $v_{Graining}$ for strip 1,2 and strip 3,4 are caused by different characteristics of the plate manufacturing lines.

As can be derived from table 1 the litho-strips degreased with the inventive method generally show a good appearance after electro-chemical graining even if the graining velocity was increased. However, litho-strips degreased with the inventive method show even better graining results, because the surface of the litho-strip grained with the inventive method have a finer, more homogeneous and more shallow graining structure. This graining structure provides improved printing characteristics of the inventive litho-strips. Additionally, the inventive method provides said improved graining structure even at higher manufacturing speeds, as can be derived from the results of strip 1 and strip 2. Strip 1 degreased conventionally shows merely good appearance results after electro-chemical graining at a graining velocity of 50 m/min. However, strip 2 degreased with the inventive method allows 55 m/min graining velocity.

The different graining structures of the conventional and inventive degreasing method are shown in Fig. 1 and Fig. 2. Fig. 2 shows, as already mentioned, a microscopic view of the surface of a litho-strip consisting of the aluminium alloy A degreased with the inventive method after electro-chemical graining. Fig. 1 shows the graining

result of the same litho-strip degreased conventionally. The graining pattern achieved with the inventive method is finer and more shallow compared to the graining pattern achieved with a conventionally degreased litho-strip. As a result, the printing characteristics of the inventive litho-strips are improved significantly.

The present embodiments of the invention has been achieved by the addition of 1 % per weight sodium hydroxide. It is expected that a higher concentration of sodium hydroxide combined with an decreased contact time of the strip with the degreasing medium will lead to similar results.

C L A I M S

1. Method of conditioning the surface of an aluminium work piece consisting of an aluminium alloy, in particular of a litho-sheet or litho-strip, which method comprises at least the step of degreasing the surface of the work piece with a degreasing medium, wherein the aqueous degreasing medium contains at least 1,5 to 3 % by weight of a composite of 5 - 40 % sodium tripolyphosphate, 3 - 10 % sodium gluconate, 3 - 8 % of a composite of non-ionic and anionic surfactants and optionally 0,5 - 70 % soda, preferably 30 - 70 % soda, wherein sodium hydroxide is added to the aqueous degreasing medium such that the concentration of sodium hydroxide in the aqueous degreasing medium is 0,01 to 5 % by weight, preferably 0,1 to 1,5 %, more preferably 1 to 2,5 % by weight.

2. Method according to claim 1, wherein the time of application the degreasing medium is at maximum 1 to 7 s, preferably at maximum 2 to 5 s.

3. Method according to claim 1 or 2, wherein the temperature of the degreasing medium is 50 to 85 °C, preferably 65 °C to 75 °C.

4. Method according to claim 1 to 3, wherein the pH-value of the aqueous degreasing medium is from 10 to 14, preferably 10 to 13,5.

5. Method according to claim 1 to 4, wherein a litho-strip is conditioned and the conditioning is accomplished subsequently to manufacturing, respectively rolling of the strip whereby the conditioned strip is reeled on a coil.

6. Work piece conditioned by a method according to claim 1 to 5.

7. Work piece according to claim 6, wherein the aluminium alloy is one of the aluminium alloys AA1050, AA1100, AA3103 or AlMg0,5.

8. Work piece according to claim 6, wherein the aluminium alloy contains the following alloying constituents in percent by weight:

0,05 % ≤ Si ≤ 0,15 %,
0,3 % ≤ Fe ≤ 0,4 %,
Cu ≤ 0,01 %,
Mn ≤ 0,05 %,
Mg ≤ 0,01 %,
Zn ≤ 0,015 %,
Ti ≤ 0,015 %,

impurities each less than 0,005 % in sum max. 0,15 %, rest Al

or

0,05 % ≤ Si ≤ 0,25 %,
0,30 % ≤ Fe ≤ 0,40 %,
Cu ≤ 0,04 %,

Mn ≤ 0,05 %,

0,1 % ≤ Mg ≤ 0,3 %,

Ti ≤ 0,04 % and

impurities each less than 0,005 % in sum max. 0,15 %, rest Al

or

0,05 % ≤ Si ≤ 0,5 %,

0,40 % ≤ Fe ≤ 1 %,

Cu ≤ 0,04 %,

0,08 % ≤ Mn ≤ 0,3 %,

0,05 % ≤ Mg ≤ 0,3 %,

Ti ≤ 0,04 % and

impurities each less than 0,005 % in sum max. 0,15 %, rest Al.

9. Work piece according claim 6 to 8, wherein the work piece is a litho-strip or litho-sheet.

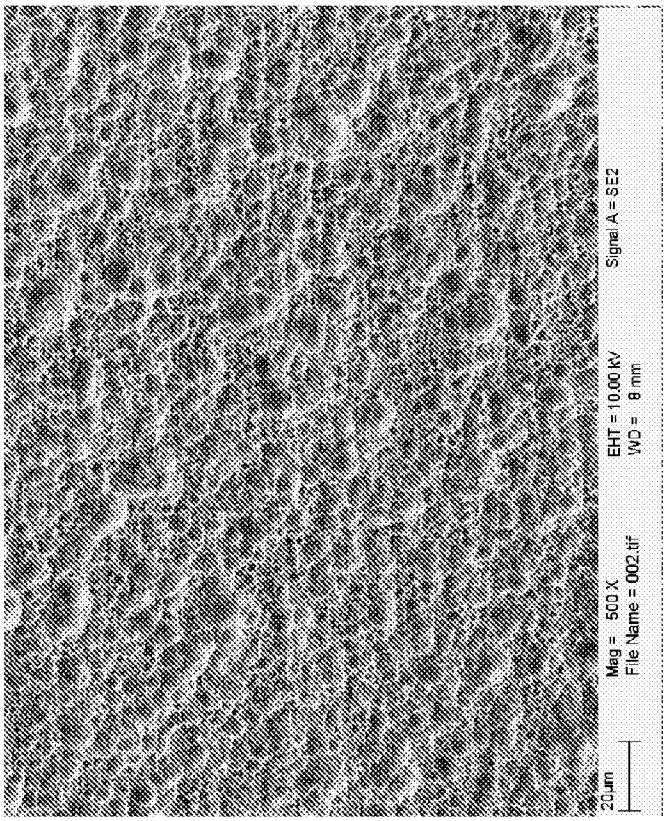

Mag = 500 X
File Name = 002.tif
EHT = 10.00 kV
WD = 8 mm
Signal A = SE2
20µm

Fig. 2

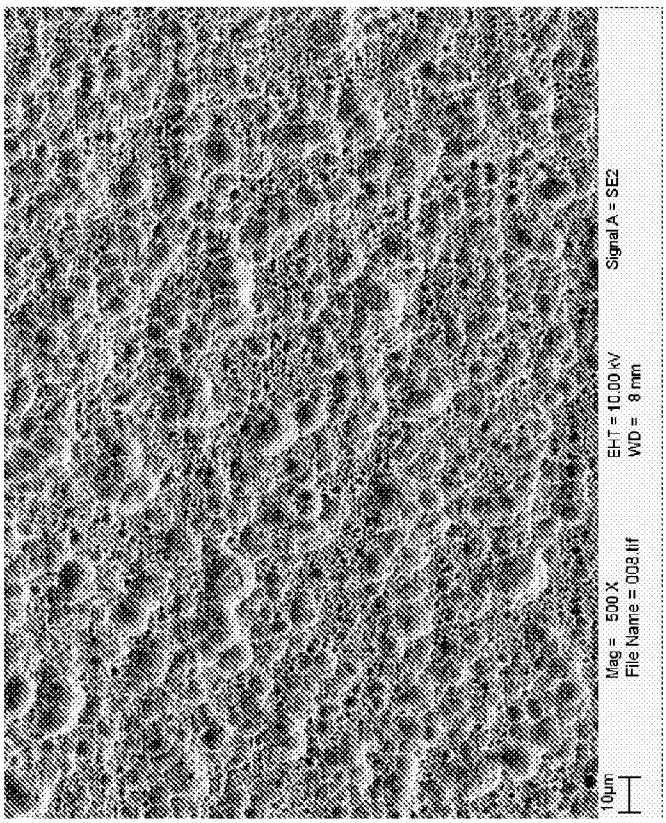

Mag = 500 X
File Name = 003.tif
EHT = 10.00 kV
WD = 8 mm
Signal A = SE2
10µm

Fig. 1

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2007/055586

A. CLASSIFICATION OF SUBJECT MATTER
INV. B41N1/08 B41N3/03 C23G1/22

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
B41N C23G

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)
EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5 114 607 A (DECK PHILIP D [US] ET AL) 19 May 1992 (1992-05-19) column 2, line 34 - column 3, line 5 column 3, lines 50-65 claim 1	1-9
Y	US 4 602 963 A (PIATKOWSKI TADEUSZ L [US]) 29 July 1986 (1986-07-29) column 3, line 48 - column 4, line 7 column 4, lines 45-51 column 5, lines 50-57	1-9
Y	DE 43 17 815 C1 (VAW VER ALUMINIUM WERKE AG [DE]) 1 June 1994 (1994-06-01) cited in the application	2-5,9
A	column 3, lines 15-31	1,6-8

-/--

[X] Further documents are listed in the continuation of Box C.

[X] See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
2 October 2007	19/10/2007

Name and mailing address of the ISA/	Authorized officer
European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016	Patosuo, Susanna

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2007/055586

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5 997 721 A (LIMBACH PETER KARL FERDINAND [DE] ET AL) 7 December 1999 (1999-12-07) cited in the application column 3, line 30	7
Y	US 6 447 982 B1 (VON ASTEN WOLFGANG [DE] ET AL) 10 September 2002 (2002-09-10) column 4, lines 57-61; table 1	7,8
A	US 5 520 841 A (BLOCK CHRISTIAN [DE] ET AL) 28 May 1996 (1996-05-28) column 7, line 25 - column 8, line 35	1-9
A	DE 36 00 415 A1 (CANNING GMBH W [DE]) 16 July 1987 (1987-07-16) column 4, lines 16-51 column 4, line 65 - column 5, line 23	1-9
A	EP 0 201 864 A2 (AMCHEM PROD [US]) 20 November 1986 (1986-11-20) page 2, lines 24-35 page 4, lines 17-27	1-9
A	US 5 795 541 A (TANIGAWA MASAKI [JP] ET AL) 18 August 1998 (1998-08-18) tables A-2,L-2	1-9
A	US 4 945 004 A (SPRINTSCHNIK GERHARD [DE] ET AL) 31 July 1990 (1990-07-31) column 3, lines 54-64	1-9
P,X	WO 2006/122852 A (HYDRO ALUMINIUM DEUTSCHLAND [DE]; KERNIG BERNHARD [DE]; BRINKMAN HENK) 23 November 2006 (2006-11-23) page 3, line 18 - page 4, line 6 page 5, line 4 - page 7, line 8 page 5, line 21 - page 9, line 17	6-9

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No
PCT/EP2007/055586

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5114607 A	19-05-1992	NONE	
US 4602963 A	29-07-1986	NONE	
DE 4317815 C1	01-06-1994	EP 0626470 A1	30-11-1994
US 5997721 A	07-12-1999	AT 190678 T	15-04-2000
		AU 4267096 A	10-07-1996
		DE 69515691 D1	20-04-2000
		DE 69515691 T2	20-07-2000
		ES 2143085 T3	01-05-2000
		WO 9619596 A1	27-06-1996
		JP 10510881 T	20-10-1998
		JP 3647461 B2	11-05-2005
US 6447982 B1	10-09-2002	BR 0002955 A	03-04-2001
		DE 29924474 U1	28-08-2003
		EP 1065071 A1	03-01-2001
		ES 2232347 T3	01-06-2005
		JP 2001049373 A	20-02-2001
		JP 2004250794 A	09-09-2004
		KR 20010049633 A	15-06-2001
US 5520841 A	28-05-1996	AT 151457 T	15-04-1997
		AU 660546 B2	29-06-1995
		AU 4066393 A	13-12-1993
		CA 2136172 A1	25-11-1993
		DE 4216405 A1	25-11-1993
		WO 9323522 A1	25-11-1993
		EP 0642575 A1	15-03-1995
		ES 2100533 T3	16-06-1997
		JP 7506608 T	20-07-1995
DE 3600415 A1	16-07-1987	NONE	
EP 0201864 A2	20-11-1986	AU 582437 B2	23-03-1989
		AU 5734386 A	20-11-1986
		CA 1291014 C	22-10-1991
		CN 86103274 A	04-02-1987
		DE 3684810 D1	21-05-1992
		GR 861252 A1	10-09-1986
US 5795541 A	18-08-1998	CN 1160772 A	01-10-1997
		DE 19700117 A1	17-07-1997
		GB 2308850 A	09-07-1997
US 4945004 A	31-07-1990	DE 3714059 A1	17-11-1988
		EP 0289844 A2	09-11-1988
		ES 2033990 T3	01-04-1993
		JP 1051992 A	28-02-1989
		JP 2911454 B2	23-06-1999
		US 5009722 A	23-04-1991
WO 2006122852 A	23-11-2006	NONE	