



(51) International Patent Classification:

*B32B 5/26* (2006.01)      *B28B 23/00* (2006.01)  
*B32B 5/02* (2006.01)

(21) International Application Number:

PCT/US2018/066203

(22) International Filing Date:

18 December 2018 (18.12.2018)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/607,794      19 December 2017 (19.12.2017) US

(71) Applicant: **SAINT-GOBAIN ADFORS CANADA, LTD.** [CA/US]; 1795 Baseline Road, Grand Island, New York 14072 (US).

(72) Inventors: **BROWN, Nancy E.**; 51 Hilton Drive, New Braintree, Massachusetts 01531 (US). **GOLDHAWK, Matthew S.**; 129 Ivyhurst Road, Amherst, New York 14226 (US). **LI, Zhenpeng**; 100 Bethesda Place, Pitney Flats, Tennessee 37686 (US). **ROSSELER, Olivier**; 64 Wyman Street, Arlington, Massachusetts 02474 (US).

(74) Agent: **BENNETT, Bernadette, M.** et al.; Abel Law Group, LLP, 8911 N. Capital of Texas Hwy, Bldg. 4, Suite 4200, Austin, Texas 78759 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,

OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available):

ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).


Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))

Published:

- with international search report (Art. 21(3))
- with amended claims (Art. 19(1))

(54) Title: A REINFORCING LAYER, A CEMENTITIOUS BOARD, AND METHOD OF FORMING THE CEMENTITIOUS BOARD

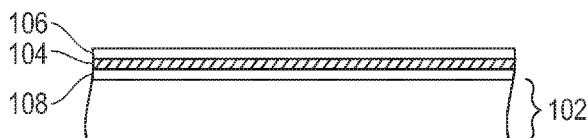

100

FIG. 1

(57) Abstract: A reinforcing layer for a cementitious board includes an alkali-resistant fabric and a non-porous membrane. The cementitious board includes (a) a cementitious core; and (b) the reinforcing layer disposed on at least one face of the cementitious core, the reinforcing layer including the alkali-resistant fabric and the non-porous membrane.



# A REINFORCING LAYER, A CEMENTITIOUS BOARD, AND METHOD OF FORMING THE CEMENTITIOUS BOARD

## TECHNICAL FIELD

5 This disclosure, in general, relates to a reinforcing layer for cementitious boards.

## BACKGROUND ART

Cementitious boards useful in the construction industry are known to contain inorganic, hydraulically setting material, such as a modified cement or gypsum. Hydraulic gypsum and cement, once set, have very little tensile strength and are usually reinforced with facing materials which improve the resistance to tensile and flexural loads. This has been the basis for using paper facing on conventional gypsum wall board and glass fiber scrim in cement boards.

Glass fiber meshes have been popular as a facing sheet in cement boards because they provide greater mechanical properties. Current glass scrim reinforcements typically include a coating of PVC plastisol. When placed in cement boards, the glass scrim reinforcement is embedded within the cementitious board to provide strength and offset the brittleness of the cement.

As such, an improved reinforcing composite for cementitious boards is desired.

## SUMMARY

20 In a particular embodiment, a reinforcing layer for a cementitious board includes an alkali-resistant fabric and a non-porous membrane.

In another exemplary embodiment, a cementitious board includes (a) a cementitious core; and (b) a reinforcing layer disposed on at least one face of the cementitious core; the reinforcing layer including an alkali-resistant fabric and a non-porous membrane.

25 In another embodiment, a method of making a cementitious board includes (a) providing a reinforcing layer including an alkali-resistant fabric and a non-porous membrane; (b) depositing a cementitious slurry on the reinforcing layer; and (c) forming the cementitious slurry and the reinforcing layer into the cementitious board.

## BRIEF DESCRIPTION OF THE DRAWINGS

30 The present disclosure may be better understood, and its numerous features and advantages made apparent to those skilled in the art by referencing the accompanying drawings.

FIG. 1 includes a side cross-sectional view of an exemplary reinforcing composite.

FIG. 2 includes a side cross-sectional view of an exemplary cementitious board showing an embedded reinforcing composite.

The use of the same reference symbols in different drawings indicates similar or identical items.

5 DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT(S)

The following description in combination with the figures is provided to assist in understanding the teachings disclosed herein. The following discussion will focus on specific implementations and embodiments of the teachings. This focus is provided to assist in describing the teachings and should not be interpreted as a limitation on the scope or  
10 applicability of the teachings. However, other teachings can certainly be used in this application.

Before addressing details of the embodiments described below, some terms are defined or clarified. The term “degradation” is intended to mean a process or technique by which one or more properties of a product, such as a polymer- and/or glass-based product, is  
15 degraded under the influence of one or more environmental factors, such as exposure to heat, light, or chemicals. The term “ASTM” is intended to refer to the American Society for Testing and Materials (ASTM) Standard. The term “psi” is intended to refer to the measurement unit of pounds per square inch.

As used herein, the terms “comprises”, “comprising”, “includes”, “including”, “has”,  
20 “having”, or any other variation thereof, are intended to cover a non-exclusive inclusion. For example, a method, article, or apparatus that comprises a list of features is not necessarily limited only to those features but may include other features not expressly listed or inherent to such method, article, or apparatus. Further, unless expressly stated to the contrary, “or” refers to an inclusive-or and not to an exclusive-or. For example, a condition A or B is  
25 satisfied by any one of the following: A is true (or present) and B is false (or not present), A is false (or not present) and B is true (or present), and both A and B are true (or present).

Also, the use of “a” or “an” is employed to describe elements and components described herein. This is done merely for convenience and to give a general sense of the scope of the invention. This description should be read to include one or at least one and the  
30 singular also includes the plural, or vice versa, unless it is clear that it is meant otherwise. For example, when a single item is described herein, more than one item may be used in place of a single item. Similarly, where more than one item is described herein, a single item may be substituted for that more than one item.

Unless otherwise defined, all technical and scientific terms used herein have the same meaning as commonly understood by one of ordinary skill in the art to which this invention belongs. The materials, methods, and examples are illustrative only and not intended to be limiting. To the extent not described herein, many details regarding specific materials and processing acts are conventional and may be found in reference books and other sources within the structural arts and corresponding manufacturing arts.

A reinforcing layer, a cementitious board and methods of making a cementitious board having the reinforcing layer are provided. The reinforcing layer includes an alkali-resistant fabric and a non-porous membrane. In a particular embodiment, the non-porous membrane has a water vapor permeance of less than about 0.5 perm as measured by ASTM E49 Method E. The alkali-resistant fabric in combination with the non-porous membrane provides a reinforcing layer with desirable physical properties, particularly when used in a cementitious board. In particular, the use of the non-porous membrane with the alkali-resistant fabric provides desirable placement of the reinforcing layer in the cementitious board and improved desirable physical properties to the resulting cementitious board.

The non-porous membrane of the reinforcing layer may be any reasonable material that has a water vapor permeance of less than 0.5 perm as measured by ASTM E49 Method E. In an embodiment, the non-porous membrane provides waterproofing properties. In a particular embodiment, the non-porous membrane includes at least one continuous polymeric film. "Continuous film" as used herein refers to a film that is substantially uniform in thickness and has a width and length that spans across a total width and length of the reinforcing composite. "Substantially uniform" as used herein refers to a thickness that does not vary by more than 2% across the entire width and length of the continuous film. Any thickness of the continuous polymeric film is envisioned. In an embodiment, the thickness of the continuous polymeric film may be dependent upon the polymer chosen. In an example, the thickness of the at least one continuous polymeric film may be, for example, such as greater than 1 mil, such as greater than 3 mils, such as about 3 mils to about 15 mils, such as about 3 mils to about 10 mils, such as about 3 mils to about 5 mils. In an embodiment, the polymer film has a minimum thickness. Any minimum thickness is envisioned. In an embodiment, the minimum thickness is at least about 3 mils thick. In another embodiment, the minimum thickness may be less than 3 mils thick with the proviso that the polymer film meets ANSI 118.10 criteria. In an embodiment, the at least one continuous polymeric film provides water vapor permeance and a membrane breaking strength that meets ANSI 118.10

criteria. The membrane shall not support mold growth when tested according to ANSI 118.10 for fungus and micro-organism resistance.

In an embodiment, any polymer is envisioned for the at least one continuous polymeric film with the proviso that the polymer provides a water vapor permeance as described. In an embodiment, the polymer is a thermoplastic or a thermoset material. In a particular embodiment, the polymer includes a polyolefin such as, for example, a high density polyethylene (HDPE), a polypropylene, or combination thereof. In a more particular embodiment, the at least one continuous polymeric film is a high density polyethylene. In a particular embodiment, the non-porous membrane has a breaking strength of greater than 170 psi as measured by ASTM D751.

In an embodiment, the polymer film has a low filler content. "Low filler" as used herein refers to less than about 5 weight %, such as less than about 3 weight %, or even less than about 2 weight % based on the total weight of the polymer film. In a particular embodiment, the polymer film is substantially free of filler. "Substantially free of filler" as used herein refers to less than about 1.0 weight %, or less than about 0.1 weight % of filler, based on the total weight of the polymer film. In a particular embodiment, it has been discovered that a polymer film with low filler or substantially free of filler has improved performance for the reinforcing layer compared to a polymer film with filler content greater than 10 weight % based on the total weight of the polymer film. For instance, the polymer film with low filler or substantially free of filler is stronger compared to a polymer film with filler content greater than 10 weight % based on the total weight of the polymer film for the same film thickness. For instance, the polymer film with low filler or substantially free of filler has a breaking strength that is at least two-fold greater (breaking strength of 980 psi) than a polymer film with filler content greater than 10 weight% based on the total weight of the polymer film (breaking strength of 420 psi), as measured via ASTM D751 procedure B.

In an embodiment, the reinforcing layer further includes at least one layer of an alkali-resistant fabric. Any reasonable alkali-resistant fabric is envisioned. An "alkali-resistant fabric" as used herein includes a material that provides resistance to an alkali environment without substantial degradation of the reinforcing layer. Exemplary alkali-resistant materials for the alkali-resistant fabric include a polyester, a polyvinyl alcohol, a polypropylene, a polyethylene, an alkali-resistant glass, a non-alkali resistant glass, or combination thereof. In an embodiment, the alkali-resistant material includes a non-alkali-resistant glass such as, for example, E-glass that includes an alkali-resistant coating.

The alkali-resistant fabric includes a fiber. The term “fiber” as used herein refers to filamentary materials. Often, “fiber” is used synonymously with “filament”. The term “filament” is intended to mean an elongated structure or fiber of any suitable length. It is generally accepted that a filament routinely has a finite length that is at least 100 times its diameter. An assemblage of filaments may also be known as a “yarn”. In an embodiment, the fibers are provided at any length envisioned. In a particular embodiment, the fibers are assembled into a yarn which may be generally described as an assemblage of twisted filaments, fibers, or strands, either natural or manufactured, to form a continuous length suitable for use in weaving or interweaving into a fabric. In another embodiment, the fibers, yarn, and the like, are provided in any assemblage and at any length envisioned.

Any assembly of the alkali-resistant material into an alkali-resistant fabric is envisioned. In an embodiment, the alkali-resistant material may be formed into the alkali-resistant fabric in the form of a scrim, a woven fabric, a braided fabric, a knitted fabric, or combination thereof. A “knitted fabric” typically includes fabrics produced by interloping chains of filaments, roving, or yarn. The term “scrim” is intended to generally mean a fabric that includes at least two filaments oriented in two different directions, including but not limited to a mesh. A scrim may also be known as a “laid-scrim” and describes a fabric that is nonwoven with warp yarns and weft yarns. The warp yarns refer to yarns, fibers, or roving running lengthwise in long lengths and approximately parallel. The weft yarns refer to the threads that transverse the warp yarns. In a particular embodiment, the weft yarns run perpendicular to the warp and are also called fill, filling, yarn or woof. The term “laid scrim” is intended to mean a scrim in which at least one filament overlies at least one other filament to create the scrim. In a particular embodiment, the alkali-resistant fabric is in the form of a scrim. A “woven fabric” describes a fabric have warp yarns and weft yarns that are intertwined at an intersection point. The alkali-resistant material may be converted to fabric form by a conventional weaving operation, such as a loom, or a non-weaving operation.

Any other construction can also be envisioned for the alkali-resistant fabric. In an embodiment, constructions include stitchbonding or warp knitting. Any conventional means include plain weaving, twill or satin weaving, unidirectional weaving, knitting or stitchbonding. In an embodiment, fine-fiber strands of yarn from the forming operation can be air dried on forming tubes to provide sufficient integrity to undergo a twisting operation. Twist provides additional integrity to yarn before it is subjected to the weaving process. Any twist is envisioned. A typical twist includes up to about 0.7 turns/inch to about 1.0 turns/inch. In many instances, heavier yarns may be used for the weaving operation. This is normally

accomplished by twisting together two or more single strands, followed by a plying operation. Plying typically includes retwisting the twisted strands in the opposite direction from the original twist. Any type of twist is envisioned. The two types of twist normally used are known as S and Z, which indicate the direction in which the twisting is done. Typically, two or more strands twisted together with an S twist are plied with a Z twist in order to give a balanced yarn. Thus, the yarn properties, such as strength, bundle diameter, and yield, can be manipulated by the twisting and plying operations. Zero twist-yarns may also be used. This input can offer the ease of spreading of (twistless) roving with the coverage of fine-filament yarns.

10 The major characteristics of the knit or woven embodiments of the alkali-resistant fabric include its style or weave pattern, fabric count, and the construction of warp yarn and weft yarn. As used here, "fabric count" identifies the number of warp and weft yarns per inch. In combination, these major characteristics contribute to the fabric properties such as tensile strength, drapability and performance of the final board.

15 The alkali-resistant fabric has a desirable areal weight. For instance, the areal weight is about 100 grams/m<sup>2</sup> to about 500 grams/m<sup>2</sup>, such as about 125 grams/m<sup>2</sup> to about 450 grams/m<sup>2</sup>. In an embodiment, the alkali-resistant fabric has a thickness of about 5 mils to about 22 mils, such as about 10 mils to about 15 mils prior to coating. The linear density of fibers of the alkali-resistant fabric is typically about 50 tex where yarns are employed, to about 2,500 tex where rovings are employed. In an embodiment, the alkali-resistant fabric may also possess an ASTM D309 tensile strength of at least about 50 pounds per inch (lbs/in), such as at least about 85 pounds per inch to about 95 pounds per inch, such as at least about 100 pounds per inch to about 130 pounds per inch, or even greater in the machine direction and in the cross-machine direction.

25 The alkali-resistant fabric further includes the binder to adhere the fibers that form the alkali-resistant fabric. Any reasonable binder is envisioned. For instance, the binder can include a polymer. Exemplary polymer binder includes, but is not limited to, an acrylic, a styrene butadiene rubber, a polyvinyl chloride, the like, or combinations thereof to provide desirable adhesion to the cement based mortar. In a particular embodiment, the binder can include a polyvinyl chloride. The binder is present in an amount to bind the alkali-resistant fabric. Any reasonable amount of the polymer is present in the binder, such as at least about 1.0 weight %, such as at least about 5.0 weight %, such as at least about 10.0 weight %, or even greater, based on the total weight of the binder composition. In a particular embodiment, the polymer is a polyvinyl chloride in a solution of plasticizer, such as wherein the polyvinyl

chloride is greater than 50% by weight of the total binder solution. In an embodiment, the binder may be coated on individual strands of fiber, filaments, or yarn. In an embodiment, the binder coats the front surface, the back surface, or combination thereof of the alkali-resistant fabric. In an embodiment, the binder coats a combination of both the front surface and the back surface of the alkali-resistant fabric. In a particular embodiment, the alkali-resistant material is coated with the binder without any exposed surface of the alkali-resistant material. In a more particular embodiment, the binder provides a homogenous, continuous coating on the alkali-resistant fabric without any exposed surface of the alkali-resistant material. For instance, the binder is present at an amount of about 30% by weight to about 250% by weight of the total weight % of the alkali-resistant fabric, such as about 40% by weight to about 70% by weight of the total weight of the alkali-resistant fabric. Typically, the binder is coated on the alkali-resistant fabric at any reasonable thickness. In an embodiment, the thickness of the alkali-resistant fabric with the binder coating is about 0.008 inch to about 0.018 inch, such as about 0.010 inch to about 0.012 inch.

Additionally, the binder can be provided with any reasonable additive. Exemplary additives include viscosity modifiers, additives for improved heat resistance, defoaming, re-wetting agents, mold inhibitors, fire retardants, coloring agents, and the like. In an embodiment, the additive may include, for example, a solvent, a plasticizer, or combinations thereof. Any reasonable amount of additive is envisioned. In an embodiment, additives to the binder can promote greater affinity to set gypsum, or to modified cement-based mortars, for example. In an embodiment, the binder is substantially free of additives. "Substantially free" as used herein refers to less than about 0.01 weight% of the total weight% of the binder composition.

The binder can be applied to the alkali-resistant fabric by any reasonable method. The alkali-resistant material may be coated with the binder before forming the alkali-resistant fabric (i.e. by coating the alkali-resistant fiber, filament, or yarn), in-line concurrently with formation of the alkali-resistant fabric, or off-line coating after formation of the alkali-resistant fabric. In an embodiment, the binder can be applied in at least one layer or at least one pass. The number of layers or passes of the binder typically depends on the material chosen for the alkali-resistant fabric as well as its construction. The number of applications of the binder may be dependent upon the desired amount of coating to provide a reinforced fabric. Furthermore, the number of applications of the binder may be dependent on the desired final properties for the final alkali-resistant fabric. Typically, a high porosity may be desired to aid in the embedding of the alkali-resistant fabric in the cementitious board.

“Porosity” as used herein may be dependent upon the intersections of the yarns to allow for openings between the spacing of the yarns as well as dependent on the amount of binder applied on the yarns. For instance, less spacing between the yarns provides lower porosity compared to greater spacing between the yarns.

5 In an embodiment, the alkali-resistant fabric may have an optional coating to impart further properties to the alkali-resistant fabric. In a particular embodiment, the optional coating may provide, for example, reduced porosity, increased adhesion to the cementitious material, resistance to slurry penetration, reduced corrosion, improved strength or fire resistance, reduced water resistance, reduced “fuzziness” of the surface, or any combination  
10 thereof. The optional coating is distinguished from the binder used to bond the alkali-resistant material together but may be the same or different composition. Any reasonable composition for the optional coating is envisioned. In an embodiment, the optional coating may be a resinous mixture containing one or more resins. For instance, the resin may be a thermoplastic resin or a thermoset resin. In a particular embodiment, the optional coating may  
15 include a UV stabilizer, a mold retardant, an alkali-resistant formulation, a water repellent, a flame retardant, a dispersant, a catalyst, a filler, the like, and combinations thereof.

In an embodiment, the non-porous membrane is adjacent to, and in a particular embodiment, directly in contact with the alkali-resistant fabric. In a particular embodiment, the non-porous membrane may be placed in direct contact with the alkali-resistant fabric in  
20 any reasonable manner and typically depends on the materials chosen for the non-porous membrane and the alkali-resistant fabric. In a more particular embodiment, the non-porous membrane is laminated to the alkali-resistant fabric. For instance, the non-porous membrane is laminated to the alkali-resistant fabric using a polymer resin, for instance, polyvinyl chloride, as the binder. In an alternative embodiment, the non-porous membrane is adhered to  
25 the alkali-resistant fabric with any reasonable adhesive, such as a heat-activated adhesive.

In an embodiment, the reinforcing layer may further include at least one nonwoven mat. In an embodiment, a “nonwoven mat” may have filaments, fibers, or swirled continuous filament that are randomly-oriented or oriented in a specified configuration. In an  
embodiment, the fiber for the nonwoven mat is alkali-resistant. Any alkali-resistant fiber is  
30 envisioned. In a particular embodiment, the fiber for the nonwoven mat includes a polymeric fiber, a glass fiber, or combination thereof. In an example, the fiber for the nonwoven mat is a polymeric fiber such as a polyolefin. In an embodiment, the polymeric fiber is polypropylene. In a particular embodiment, the nonwoven mat is adjacent to the non-porous membrane. In a more particular embodiment, the nonwoven mat is directly in contact with at least one surface

of the non-porous membrane. When present, the nonwoven mat may be in any configuration relative to the non-porous membrane depending on the final properties desired for the reinforcing layer and cementitious board. In an embodiment, a nonwoven mat facing an inside of a cementitious board may be used to provide anchoring of the reinforcing layer in a cementitious slurry due to the porosity of the nonwoven mat. In an embodiment, the nonwoven mat may be present with the reinforcing layer and facing an outer face of a cementitious board. In an exemplary instance, the non-woven mat provides anchoring of a tile with a mortar. For instance, the non-woven mat may provide the failing interface during a shear test (shearing the tile from the cement board).

In a particular embodiment, the non-porous membrane includes the at least one continuous polymer film directly in contact with the at least one non-woven mat. In an embodiment, the continuous polymer film is configured between two non-woven mats. Any number of films and non-woven mats are envisioned for the reinforcing layer. When multiple films are used, they may be the same or different materials, depending on the final properties desired for the reinforcing layer. When multiple non-woven mats are used, they may be the same or different materials, depending on the final properties desired for the reinforcing layer. In an embodiment, the reinforcing layer has any total thickness envisioned, such as, for example, 8 mils to about 35 mils, such as about 10 to about 35 mils.

In an embodiment, the reinforcing layer includes the nonwoven mat positioned between the non-porous membrane and the alkali-resistant fabric. Although not to be bound by theory, the nonwoven mat between the non-porous membrane and the alkali-resistant fabric may have desirable porosity to allow cementitious slurry penetration and subsequently, improved placement of the reinforcing layer within a cementitious board. In an embodiment, the nonwoven mat is placed on the alkali-resistant fabric and the non-porous membrane is subsequently placed on the nonwoven mat. In another embodiment, the nonwoven mat is placed on the non-porous membrane and the alkali-resistant fabric is subsequently placed on the nonwoven mat. Any reasonable conditions such as heat, pressure, and the like may be used to position the nonwoven mat between the alkali-resistant fabric and the non-porous membrane. Although described as between the alkali-resistant fabric and the non-porous membrane, any reasonable configuration of the nonwoven mat adjacent to the alkali-resistant fabric and the non-porous membrane is envisioned.

The reinforcing layer is a facing material which may be embedded partially within a cementitious layer on at least one face of a cementitious board. In a particular embodiment, the reinforcing layer with the non-porous membrane provides desirable placement of the

reinforcing layer on the at least one face of the cementitious board. For instance, the placement can be set at a precise and targeted depth, such as within about 0.006 inches to about 0.1 inches, such as 0.006 inches to 0.03 inches, such as 0.006 inches to 0.02 inches, or even 0.008 inches to 0.01 inches from an outer surface of the cementitious board. In a particular embodiment, the reinforcing layer has a consistent and uniform depth of embedment within the cementitious board. In particular, the non-porous membrane provides an outer surface of the cementitious board. Although not to be bound by theory, the non-porous membrane is not porous and does not allow cementitious slurry penetration to an outer surface of the non-porous membrane and subsequently, provides improved placement of the reinforcing layer within a cementitious board. In particular, the reinforcing layer including the non-porous membrane helps with the precise and consistent placement of the reinforcing layer at the surface of the cement board, maximizing its distance to the neutral axis in bending mode. It ensures a maximal efficiency of the reinforcing layer during board handling and improves consistency in the cement board mechanical performance. In another embodiment, a cementitious layer may be provided on the non-porous membrane where the cementitious layer provides an outer surface of the cementitious board.

Any cementitious material is envisioned for the cementitious board. The cementitious board typically includes a cementitious matrix material, such as cement paste, mortar or concrete. In an embodiment, the cementitious material may include other types of materials such as gypsum, and geopolymers (inorganic resins). In an embodiment, the cementitious material includes gypsum. If gypsum is used, the material may be formed by mixing water with powdered anhydrous calcium sulfate or calcium sulfate hemihydrate ( $\text{CaSO}_4 \cdot 1/2\text{H}_2\text{O}$ ), also known as calcined gypsum, to form a slurry and thereafter allowing the slurry to set into calcium sulfate dihydrate ( $\text{CaSO}_4 \cdot 2\text{H}_2\text{O}$ ), a relatively hard material. The cementitious material of the cementitious board will in general include at least about 85 weight % set cement, based on the total weight % of the cementitious material. In an embodiment, the cementitious material is substantially free of gypsum. "Substantially free of gypsum" as used herein refers to less than 1% by weight of gypsum.

In an embodiment, the cementitious material further includes at least one additive that improves the performance of the resulting cementitious board. Additives include chopped fibers dispersed throughout the cement. In an embodiment, the chopped fibers are AR-glass fibers but may also include, for example, other types of glass fibers, aramids, polyolefins, carbon, graphite, polyester, PVA, polypropylene, natural fibers, cellulosic fibers, rayon, straw, paper and hybrids thereof. The cementitious material may include other ingredients or

additives such as, for example, fly ash, latex, slag and metakaolin, resins, such as acrylics, polyvinyl acetate, or the like, ceramics, including silicon oxide, titanium oxide, and silicon nitrite, setting accelerators, water and/or fire resistant additives, such as siloxane, borax, fillers, setting retardants, dispersing agents, dyes and colorants, light stabilizers and heat stabilizers, shrinkage reducing admixtures, air entraining agents, setting accelerators, defoaming agents, or combinations thereof. In an embodiment, the cementitious material may contain curing agents. In an embodiment, materials that improve the water-resistant properties of the cementitious product are also included.

As seen in FIG. 1, an exemplary reinforcing layer 100 is provided. The reinforcing composite includes an alkali-resistant fabric 102 and a non-porous membrane 104. The non-porous membrane 104 includes a continuous polymeric film. In an exemplary embodiment, the non-porous membrane 104 is directly adjacent to a first layer of a nonwoven mat 106 and a second layer of a nonwoven mat 108. Although two layers of the nonwoven mats 106 and 108 are illustrated, the reinforcing layer 100 may include just one layer of a nonwoven mat or more than two layers of nonwoven mat. As illustrated, the non-porous membrane 104 and the alkali-resistant fabric 102 are adjacent with the nonwoven mat 108 being directly in contact with the alkali resistant fabric 102 and non-porous membrane 104. In an alternative embodiment, a nonwoven mat is not included in the reinforcing layer 100. Further, other layers may be envisioned for the reinforcing layer 100 such as paper, glue, a release liner, and the like. In an alternative embodiment, the reinforcing layer 100 is free of any other layers, such as paper.

In FIG. 2, a cementitious board 200 is provided, including a cementitious core 202, a reinforcing layer 100, and a separate reinforcing layer 120. An exterior surface 204 of the cementitious core 202 is faced with one or more of the reinforcing layer 100 and separate reinforcing layer 120. Any number of layers of reinforcing layer 100 and separate reinforcing layer 120 is envisioned. Although not illustrated, a single reinforcing layer 100 may be used that reinforces an entire perimeter of the cementitious board 200.

The reinforcing layer 100 and separate reinforcing layer 120 may be the same or a different material. In an embodiment, the reinforcing layer 100 provides the exterior surface 204 of the cementitious board 200, as illustrated on side A. In particular, the reinforcing layer 100 has a depth of embedment that is precisely and consistently placed at the exterior surface 204 of the cementitious board 200. For instance, the non-porous membrane 104 of reinforcing layer 100 does not allow cementitious slurry penetration to an outer surface of the non-porous membrane. In an embodiment, a thin cementitious layer 206 is on the exterior

surface 204 of the cementitious board 200, as illustrated on side B, for instance, when the thin cementitious layer 206 is placed on reinforcing layer 120. In a particular embodiment, the non-porous membrane 104 of the reinforcing layer 100 is facing the exterior surface 204 of the cementitious board with the alkali-resistant fabric 102 closer to the cementitious core 202.

5 The cementitious core 202 can further include performance additives 208 which can be added to the slurry precursor of the cementitious core 202.

Any method of manufacturing the cementitious board 200 is envisioned, including molding, extrusion, and semi-continuous processes. Typically, the cementitious board 200 can be made by forming an aqueous cementitious slurry which contains excess water and placing the cementitious slurry on the facing material, such as reinforcing layer 100. The reinforcing layer 100 may be folded around the perimeter of the cementitious board 200 before final setting of the cementitious core 202. Folding can be accomplished by any reasonable method such as a combination of guide flanges and rollers which embed the reinforcing layer 100 within the board 200. In a particular embodiment, the reinforcing layer 100 may be precisely placed within a desired depth in the cementitious board 200. Furthermore, separate reinforcing layer 120 may be disposed within the aqueous cementitious slurry before final setting of the cementitious core 202.

The reinforcing layer provides a board product with advantageous properties such as desirable waterproofness, dimensional stability, alkali resistance, and modulus of rupture. In an embodiment, the reinforcing layer provides a desirable dimensional stability. In an embodiment, the non-porous membrane has a dimensional stability is less than 0.7% as measured by ASTM D1204. In an embodiment, the modulus of rupture and break deflection is increased for a cementitious board with a reinforcing layer compared to a reinforcing scrim that does not contain a non-porous membrane. In an embodiment, an initial and aged modulus of rupture (MOR) is greater than 750 psi as measured by ASTM C947 for a cementitious board with the reinforcing layer. Although not to be bound by theory, the advantageous placement of the reinforcing layer with the non-porous membrane within a cementitious board provides beneficial bending performance of the resulting cementitious board. Further, the reinforcing composite has a Gurley Stiffness measurement such that the reinforcing layer is sufficiently flexible such that it is drapable and lacking in shape memory so as to be curved around the edge of a product to be reinforced, such as a cement board, during manufacture of the same. In an embodiment, the reinforcing layer provides a cementitious board that also has desirable abrasion resistance and UV resistance. In a particular embodiment, the reinforcing layer should also be markable to add, for example, regulatory information, manufacturer

information, and the like. This can be either done when the reinforcing layer is produced or when the cement boards are made.

Applications for the reinforcing layer are numerous. The reinforcing layer can be employed in many end-use reinforcement applications, such as, for example, cement boards, gypsum boards, roofing applications, polymer-matrix reinforcement, and as stand-alone coated fabrics. In a particular embodiment, the reinforcing layer and cementitious board of this invention are useful in all sorts of building construction applications. The reinforcing layer may be used in any cement board end-product envisioned. In an embodiment, the reinforcing layer may be employed as a tape. In a particular embodiment, the tape is a self-adhesive tape. In an embodiment, the tape may be used to cover seams between two adjacent surfaces, cover or repair a damaged surface, cover fastener heads and other penetrating installations on the board. Any configuration of the reinforcing layer is envisioned. For instance, the reinforcing layer may be continuous or die cut.

In a particular embodiment, the reinforcing layer may be present where moisture and water are problematic, i.e. moisture-rich environments. Due to the water vapor permeance and waterproofness of the non-porous membrane, the reinforcing layer is particularly desirable for moisture-rich environments, such as, for example, a bathroom, kitchen, etc. In particular, the reinforcing layer and cementitious board of the invention can be used with ceramic tile and mortar, stone or brick veneer, and the like. In an embodiment, the non-porous membrane has a waterproofness that holds for 48 hours with a 2 inch water column as measured by ASTM D4068. Furthermore, the reinforcing layer and resulting cementitious board has a shear strength to ceramic tile and mortar of greater than 50 psi before and after water immersion as measured by ASTM C482. Additionally, the reinforcing layer provides a cementitious board that is resistant to fungus and microorganisms with no mold growth as tested by ANSI 118.10. In an embodiment, the laminate adhesion and Z-pull adhesion between the non-porous membrane and alkali-resistant fabric is advantageous. Further, since the reinforcing layer provides desirable water vapor permeance and waterproofness, installation of a cementitious board with the reinforcing layer is faster than installation of a conventional cementitious board with the subsequent installation of a separate waterproofing product. For example, the installer does not need a separate and extra step of waterproofing any surface adjacent the cementitious board with the reinforcing layer.

The reinforcing layer and cementitious board of this invention are strong, having a screw strength of at least about 20 lbs., for cementitious cores of conventional densities and compositions. Some examples include shaft wall assemblies for elevators and stairways, fire

doors and fire walls, roofing and siding substrates, with or without insulation, exterior stucco systems, and tile backer boards. Some of the most desirable and useful applications for this invention tile backer boards.

5 Many different aspects and embodiments are possible. Some of those aspects and embodiments are described herein. After reading this specification, skilled artisans will appreciate that those aspects and embodiments are only illustrative and do not limit the scope of the present invention. Embodiments may be in accordance with any one or more of the embodiments as listed below.

10 Embodiment 1. A reinforcing layer for a cementitious board includes an alkali-resistant fabric and a non-porous membrane.

Embodiment 2. A cementitious board includes: (a) a cementitious core; and (b) a reinforcing layer disposed on at least one face of the cementitious core; the reinforcing layer including an alkali-resistant fabric and a non-porous membrane.

15 Embodiment 3. A method of making a cementitious board includes: (a) providing a reinforcing layer including an alkali-resistant fabric and a non-porous membrane; (b) depositing a cementitious slurry on the reinforcing layer; and (c) forming the cementitious slurry and the reinforcing layer into the cementitious board.

20 Embodiment 4. The reinforcing layer, the cementitious board, or the method of making the cementitious board of any one of the preceding embodiments, wherein the non-porous membrane includes at least one continuous polymeric film.

Embodiment 5. The reinforcing layer, the cementitious board, or the method of making the cementitious board of embodiment 4, wherein the at least one continuous polymeric film includes a polyolefin.

25 Embodiment 6. The reinforcing layer, the cementitious board, or the method of making the cementitious board of embodiment 1, wherein the non-porous membrane has a water vapor permeance of less than about 0.5 perm as measured by ASTM E49 Method E.

Embodiment 7. The reinforcing layer, the cementitious board, or the method of making the cementitious board of embodiment 1, wherein the reinforcing layer further includes at least one nonwoven mat.

30 Embodiment 8. The reinforcing layer, the cementitious board, or the method of making the cementitious board of embodiment 7, wherein the nonwoven mat includes a polymeric fiber

Embodiment 9. The reinforcing layer, the cementitious board, or the method of making the cementitious board of embodiment 8, wherein the polymeric fiber includes a polyolefin.

5 Embodiment 10. The reinforcing layer, the cementitious board, or the method of making the cementitious board of embodiment 7, wherein the at least one continuous polymer film is directly in contact with the at least one nonwoven mat.

Embodiment 11. The reinforcing layer, the cementitious board, or the method of making the cementitious board of any one of preceding embodiments, wherein the non-porous membrane has a thickness of about 3 mils to about 5 mils.

10 Embodiment 12. The reinforcing layer, the cementitious board, or the method of making the cementitious board of any one of the preceding embodiments, wherein the alkali-resistant fabric is adjacent to the non-porous membrane.

Embodiment 13. The reinforcing layer, the cementitious board, or the method of making the cementitious board of any one of the preceding embodiments, further including a  
15 nonwoven mat directly in contact with the alkali-resistant fabric.

Embodiment 14. The reinforcing layer, the cementitious board, or the method of making the cementitious board of any one of the preceding embodiments, wherein the alkali-resistant fabric includes a polyester, a polyvinyl alcohol, a polypropylene, an alkali-resistant glass, or combination thereof.

20 Embodiment 15. The reinforcing layer, the cementitious board, or the method of making the cementitious board of any one of the preceding embodiments, wherein the alkali-resistant fabric includes a scrim, a woven fabric, a braided fabric, a knitted fabric, or combination thereof.

Embodiment 16. The reinforcing layer, the cementitious board, or the method of  
25 making the cementitious board of embodiment 15, wherein the alkali-resistant fabric includes a scrim.

Embodiment 17. The reinforcing layer, the cementitious board, or the method of making the cementitious board of any one of the preceding embodiments, wherein the alkali-resistant fabric further includes a binder.

30 Embodiment 18. The reinforcing layer, the cementitious board, or the method of making the cementitious board of embodiment 17, wherein the binder includes polyvinyl chloride.

Embodiment 19. The reinforcing layer, the cementitious board, or the method of making the cementitious board of any of the preceding embodiments, wherein the alkali-resistant fabric has an areal weight of about 100 grams/m<sup>2</sup> to about 500 grams/m<sup>2</sup>.

5 Embodiment 20. The reinforcing layer, the cementitious board, or the method of making the cementitious board of any one of the preceding embodiments, wherein the non-porous membrane has a breaking strength of greater than 170 psi as measured by ASTM D751.

10 Embodiment 21. The reinforcing layer, the cementitious board, or the method of making the cementitious board of any one of the preceding embodiments, wherein the non-porous membrane has a waterproofness that holds for 48 hours with a 2 inch water column as measured by ASTM D4068.

15 Embodiment 22. The reinforcing layer, the cementitious board, or the method of making the cementitious board of any one of the preceding embodiments, wherein the cementitious board has a shear strength to ceramic tile and mortar of greater than 50 psi before and after water immersion as measured by ASTM C482.

Embodiment 23. The reinforcing layer, the cementitious board, or the method of making the cementitious board of any one of the preceding embodiments, wherein the non-porous membrane has a dimensional stability of less than 0.7% as measured by ASTM D1204.

20 Embodiment 24. The reinforcing layer, the cementitious board, or the method of making the cementitious board of any one of the preceding embodiments, wherein the cementitious board has an initial and aged modulus of rupture (MOR) of greater than 750 psi as measured by ASTM C947.

25 Embodiment 25. The reinforcing layer of embodiments 1 and 4-24, wherein the reinforcing layer is disposed on at least one face of a cementitious core.

Embodiment 26. The reinforcing layer, the cementitious board, or the method of making the cementitious board of any one of the preceding embodiments, wherein the reinforcing layer provides an exterior surface of the cementitious board.

30 Embodiment 27. The reinforcing layer, the cementitious board, or the method of making the cementitious board of embodiment 26, wherein the reinforcing layer is within about 0.006 inches to about 0.1 inches, such as 0.006 inches to 0.03 inches, such as 0.006 inches to 0.02 inches, or even 0.008 inches to 0.01 inches from the exterior surface of the cementitious board.

Embodiment 28. The cementitious board or the method of making the cementitious board of any one of embodiments 2-27, wherein the cementitious core includes a cement matrix.

Embodiment 29. The method of making the cementitious board of any one of  
5 embodiments 3-28, further including heating the cementitious slurry to provide a set cement.

Note that not all of the activities described above in the general description or the examples are required, that a portion of a specific activity may not be required, and that one or more further activities may be performed in addition to those described. Still further, the order in which activities are listed are not necessarily the order in which they are performed.

10 In the foregoing specification, the concepts have been described with reference to specific embodiments. However, one of ordinary skill in the art appreciates that various modifications and changes can be made without departing from the scope of the invention as set forth in the claims below. Accordingly, the specification and figures are to be regarded in an illustrative rather than a restrictive sense, and all such modifications are intended to be  
15 included within the scope of invention.

Benefits, other advantages, and solutions to problems have been described above with regard to specific embodiments. However, the benefits, advantages, solutions to problems, and any feature(s) that may cause any benefit, advantage, or solution to occur or become more pronounced are not to be construed as a critical, required, or essential feature of any or  
20 all the claims.

After reading the specification, skilled artisans will appreciate that certain features are, for clarity, described herein in the context of separate embodiments, may also be provided in combination in a single embodiment. Conversely, various features that are, for brevity, described in the context of a single embodiment, may also be provided separately or  
25 in any subcombination. Further, references to values stated in ranges include each and every value within that range.

## WHAT IS CLAIMED IS:

1. A reinforcing layer for a cementitious board comprising an alkali-resistant fabric and a non-porous membrane.
2. The reinforcing layer of claim 1, wherein the non-porous membrane comprises at least one continuous polymeric film.
3. The reinforcing layer of claim 2, wherein the at least one continuous polymeric film comprises a polyolefin.
4. The reinforcing layer of claim 1, wherein the non-porous membrane has a water vapor permeance of less than about 0.5 perm as measured by ASTM E49 Method E.
5. The reinforcing layer of claim 1, wherein the reinforcing layer further comprises at least one nonwoven mat.
6. The reinforcing layer of claim 5, wherein the nonwoven mat comprises a polymeric fiber.
7. The reinforcing layer of claim 5, wherein the at least one continuous polymer film is directly in contact with the at least one nonwoven mat.
8. The reinforcing layer of claim 1, wherein the non-porous membrane has a thickness of at least about 3 mils.
9. The reinforcing layer of claim 5, wherein the alkali-resistant fabric is adjacent to the non-porous membrane.
10. The reinforcing layer of claim 1, further comprising a nonwoven mat directly in contact with the alkali-resistant fabric.
11. The reinforcing layer of claim 1, wherein the alkali-resistant fabric comprises a polyester, a polyvinyl alcohol, a polypropylene, an alkali-resistant glass, or combination thereof.
12. The reinforcing layer of claim 1, wherein the alkali-resistant fabric comprises a scrim, a woven fabric, a braided fabric, a knitted fabric, or combination thereof.
13. The reinforcing layer of claim 1, wherein the reinforcing layer is disposed on at least one face of a cementitious core.

14. A cementitious board comprising:
  - (a) a cementitious core; and
  - (b) a reinforcing layer disposed on at least one face of the cementitious core; the reinforcing layer comprising an alkali-resistant fabric and a non-porous membrane.
15. A method of making a cementitious board comprising:
  - (a) providing a reinforcing layer comprising an alkali-resistant fabric and a non-porous membrane;
  - (b) depositing a cementitious slurry on the reinforcing layer; and
  - (c) forming the cementitious slurry and the reinforcing layer into the cementitious board.

## AMENDED CLAIMS

received by the International Bureau on 10 June 2019 (10.06.2019)

## WHAT IS CLAIMED IS:

1. A reinforcing layer for a cementitious board comprising an alkali-resistant fabric and a non-porous membrane.
2. The reinforcing layer of claim 1, wherein the non-porous membrane comprises at least one continuous polymeric film.
3. The reinforcing layer of claim 2, wherein the at least one continuous polymeric film comprises a polyolefin.
4. The reinforcing layer of claim 1, wherein the non-porous membrane has a water vapor permeance of less than about 0.5 perm as measured by ASTM E49 Method E.
5. The reinforcing layer of claim 1, wherein the reinforcing layer further comprises at least one nonwoven mat.
6. The reinforcing layer of claim 5, wherein the nonwoven mat comprises a polymeric fiber.
7. The reinforcing layer of claim 5, wherein the non-porous membrane is directly in contact with the at least one nonwoven mat.
8. The reinforcing layer of claim 1, wherein the non-porous membrane has a thickness of at least about 3 mils.
9. The reinforcing layer of claim 5, wherein the alkali-resistant fabric is adjacent to the non-porous membrane.
10. The reinforcing layer of claim 1, further comprising a nonwoven mat directly in contact with the alkali-resistant fabric.
11. The reinforcing layer of claim 1, wherein the alkali-resistant fabric comprises a polyester, a polyvinyl alcohol, a polypropylene, an alkali-resistant glass, or combination thereof.
12. The reinforcing layer of claim 1, wherein the alkali-resistant fabric comprises a scrim, a woven fabric, a braided fabric, a knitted fabric, or combination thereof.
13. The reinforcing layer of claim 1, wherein the reinforcing layer is disposed on at least one face of a cementitious core.

14. A cementitious board comprising:
- (a) a cementitious core; and
  - (b) a reinforcing layer disposed on at least one face of the cementitious core; the reinforcing layer comprising an alkali-resistant fabric and a non-porous membrane.
15. A method of making a cementitious board comprising:
- (a) providing a reinforcing layer comprising an alkali-resistant fabric and a non-porous membrane;
  - (b) depositing a cementitious slurry on the reinforcing layer; and
  - (c) forming the cementitious slurry and the reinforcing layer into the cementitious board.

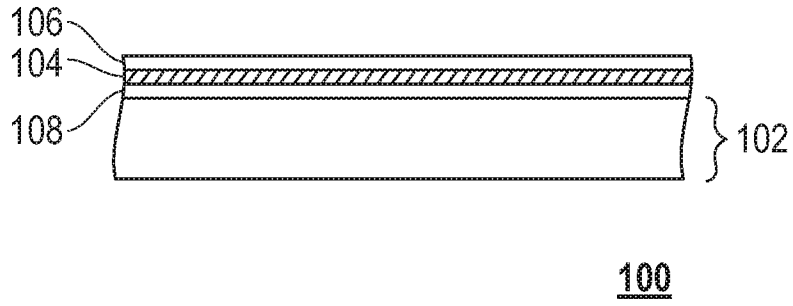


FIG. 1

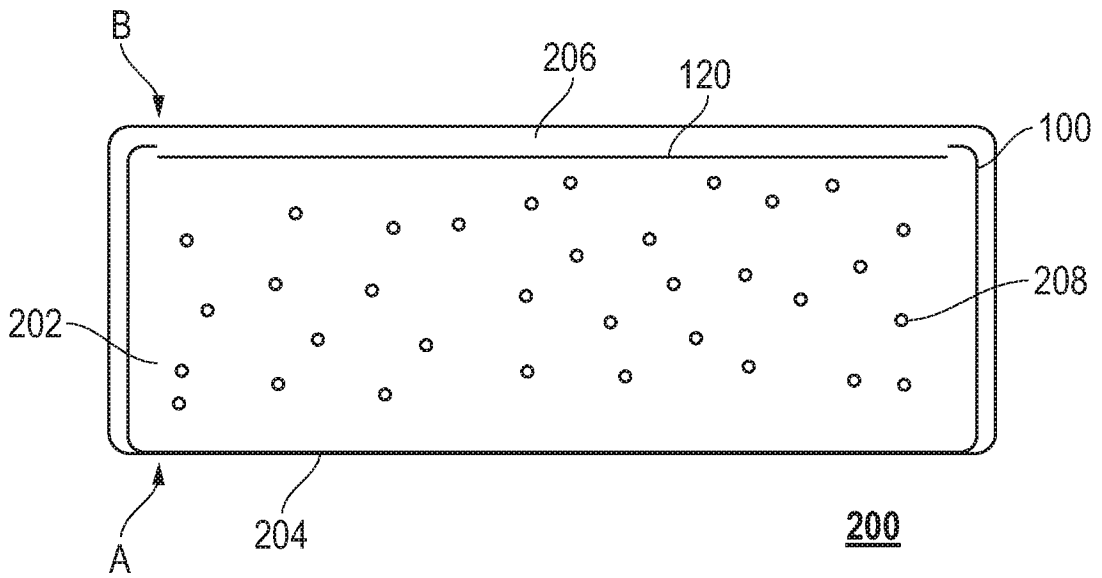


FIG. 2

**A. CLASSIFICATION OF SUBJECT MATTER****B32B 5/26(2006.01)i, B32B 5/02(2006.01)i, B28B 23/00(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

B32B 5/26; B29B 7/00; B32B 27/20; B32B 31/12; B32B 5/16; C04B 16/06; D03D 19/00; D06B 3/10; D06M 15/333; E04C 5/07; B32B 5/02; B28B 23/00

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) &amp; Keywords: reinforcing layer, cementitious board, alkali resistant fabric, nonporous membrane, nonwoven mat

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2002-0170648 A1 (DINKEL, J.) 21 November 2002 See paragraphs [0026]-[0028]; claims 8, 9, 11, 26, 31; and figures 3, 4.	1-4, 8, 11-15
Y		5-7, 9, 10
Y	US 2014-0242862 A1 (SAINT-GOBAIN ADFORS CANADA, LTD.) 28 August 2014 See paragraphs [0022], [0031]; claims 1, 2; and figure 1.	5-7, 9, 10
A	WO 2013-155477 A1 (SAINT-GOBAIN ADFORS CANADA, LTD.) 17 October 2013 See claims 1-3; and figure 1.	1-15
A	US 2005-0009428 A1 (PORTER, J. F. et al.) 13 January 2005 See paragraphs [0093], [0094]; claims 10, 15; and figure 7.	1-15
A	US 2005-0233656 A1 (ROYER, J. R. et al.) 20 October 2005 See paragraph [0066]; claim 1; and figure 3.	1-15

 Further documents are listed in the continuation of Box C. See patent family annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&amp;" document member of the same patent family

Date of the actual completion of the international search

10 April 2019 (10.04.2019)

Date of mailing of the international search report

**10 April 2019 (10.04.2019)**

Name and mailing address of the ISA/KR

International Application Division

Korean Intellectual Property Office

189 Cheongsa-ro, Seo-gu, Daejeon, 35208, Republic of Korea

Facsimile No. +82-42-481-8578

Authorized officer

LEE, Ki Cheul

Telephone No. +82-42-481-3353



**INTERNATIONAL SEARCH REPORT**

Information on patent family members

International application No.

**PCT/US2018/066203**

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2002-0170648 A1	21/11/2002	US 2010-0146788 A1 US 2013-0231019 A1 US 8413333 B2	17/06/2010 05/09/2013 09/04/2013
US 2014-0242862 A1	28/08/2014	AU 2929101 A CA 2396362 A1 CN 1416390 A EP 1250222 A1 MX PA02006662 A US 2002-0182953 A1 US 2002-0182954 A1 US 2004-0084127 A1 US 2011-0053445 A1 US 7846278 B2 US 9017495 B2 WO 01-49484 A1	16/07/2001 12/07/2001 07/05/2003 23/10/2002 10/09/2004 05/12/2002 05/12/2002 06/05/2004 03/03/2011 07/12/2010 28/04/2015 12/07/2001
WO 2013-155477 A1	17/10/2013	EP 2836636 A1 EP 2836636 A4 US 2013-0295360 A1 WO 2013-155477 A4	18/02/2015 06/01/2016 07/11/2013 17/10/2013
US 2005-0009428 A1	13/01/2005	CA 2530912 A1 CA 2530912 C US 2006-0013950 A1 US 2008-0200086 A1 US 7354876 B2 US 7615178 B2 US 7615504 B2 WO 2005-007988 A2 WO 2005-007988 A3	27/01/2005 26/10/2010 19/01/2006 21/08/2008 08/04/2008 10/11/2009 10/11/2009 27/01/2005 24/03/2005
US 2005-0233656 A1	20/10/2005	AU 2005-216293 A1 AU 2005-216293 B2 BR PI0508089 A CA 2551911 A1 CN 1922348 A CN 1922348 B EP 1718789 A2 JP 2007-523779 A NZ 548790 A RU 2006133908 A US 2005-0186409 A1 US 6960394 B2 US 7914884 B2 WO 2005-082065 A2 WO 2005-082065 A3	09/09/2005 27/08/2009 17/07/2007 09/09/2005 28/02/2007 21/09/2011 08/11/2006 23/08/2007 30/04/2009 27/03/2008 25/08/2005 01/11/2005 29/03/2011 09/09/2005 06/10/2005