



(51) International Patent Classification:

H01T 13/50 (2006.01) H01T 13/44 (2006.01)

H01T 21/02 (2006.01) H01T 13/56 (2006.01)

(21) International Application Number:

PCT/US2018/024418

(22) International Filing Date:

27 March 2018 (27.03.2018)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/477,299 27 March 2017 (27.03.2017) US

15/935,540 26 March 2018 (26.03.2018) US

(71) Applicant: FEDERAL-MOGUL LLC [US/US]; 27300 West Eleven Mile Road, Southfield, MI 48034 (US).

(72) Inventors: MIXELL, Kristopher, I.; 48089 Edinburgh Drive, Plymouth, MI 48170 (US). NEEMUCHWALA, Yusuf, Esmail; 20426 Purlingbrook Street, Livonia, MI 48152 (US). MILLER, John, E.; 3960 West Samaria Road, Temperance, MI 48182 (US). LYKOWSKI, James, D.; 1609 West Dean Road, Temperance, MI 48182 (US). BURROWS, John, Antony; 2 Ashlands Road, Timperley, Altrincham, Cheshire WA15 6AL (GB).

(74) Agent: STEARNS, Robert, L. et al.; Dickinson Wright PLLC, 2600 W. Big Beaver Road, Suite 300, Troy, MI 48064-3312 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

(54) Title: IGNITER ASSEMBLY WITH IMPROVED INSULATION AND METHOD OF INSULATING THE IGNITER ASSEMBLY

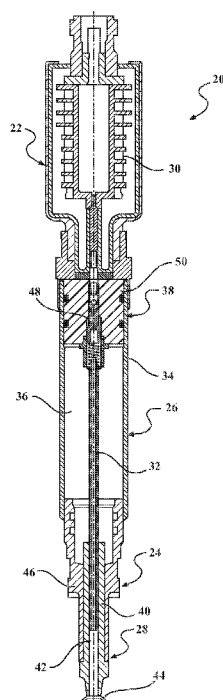


FIG. 1

(57) Abstract: An igniter assembly comprising an ignition coil assembly connected to a firing end assembly by an extension, with a valve assembly disposed in a pressure chamber of the extension, is provided. The valve assembly includes a valve stem biased toward the ignition coil assembly by a spring to seal the pressure chamber. The valve assembly is used to evacuate contents from the pressure chamber by pressing the valve stem toward the spring and allowing contents of the pressure chamber to travel through and past the valve stem and out of the pressure chamber. The valve assembly is also used to fill the pressure chamber with an insulating medium by pressing the valve stem toward the spring and allowing the insulating medium to travel through and past the valve stem and into the pressure chamber after evacuating the contents out of the pressure chamber.

Published:

— *with international search report (Art. 21(3))*

IGNITER ASSEMBLY WITH IMPROVED INSULATION AND METHOD OF INSULATING THE IGNITER ASSEMBLY

CROSS REFERENCE TO RELATED APPLICATIONS

[0001] This PCT Application claims the benefit of U.S. Provisional Patent Application Serial No. 62/477,299, filed March 27, 2017, and U.S. Utility Patent Application Serial No. 15/935,540, filed March 26, 2018, the entire disclosure of the applications being considered part of the disclosure of this application, and hereby incorporated by reference.

BACKGROUND

1. Field of the Invention

[0002] This invention relates generally to corona ignition assemblies, and methods of manufacturing the corona ignition assemblies.

2. Related Art

[0003] Corona discharge ignition systems typically include a corona igniter assembly typically with a firing end assembly and an ignition coil assembly attached to one another and inserted into a combustion chamber of an engine. The firing end assembly includes a central electrode charged to a high radio frequency voltage potential, creating a strong radio frequency electric field in a combustion chamber. The electric field causes a portion of a mixture of fuel and air in the combustion chamber to ionize and begin dielectric breakdown, facilitating combustion of the fuel-air mixture. The electric field is preferably controlled so that the fuel-air mixture maintains dielectric properties and corona discharge occurs, also referred to as non-thermal plasma. The ionized portion of the fuel-air mixture forms a flame front which then becomes self-sustaining and combusts the remaining portion of the fuel-air mixture. The electric field is also preferably controlled so that the fuel-air mixture does not lose all dielectric properties, which would create a thermal plasma and an electric arc between the electrode and grounded cylinder walls, piston, or other portion of the igniter. Ideally, the field is also controlled so that the corona discharge only forms at the

firing end and not along other portions of the corona igniter assembly. However, such control is oftentimes difficult to achieve.

[0004] For example, a significant amount of energy that should be transferred from the coil of the ignition coil assembly to the igniter of the firing end assembly through an insulating medium can be lost through the insulating medium used to connect the coil and the igniter, referred to as an extension. The energy loss can occur due to capacitive and dissipative losses and loss due to formation of corona in the extension.

SUMMARY

[0005] One aspect of the invention provides an igniter assembly, for example a corona igniter assembly. The igniter assembly comprises an ignition coil assembly including a coil, a firing end assembly including an igniter and coupled to the ignition coil assembly by an extension, and the extension contains a pressure chamber. A central conductor is disposed between the ignition coil assembly and the firing end assembly for transferring energy from the coil to the igniter. A valve assembly is disposed in the pressure chamber of the extension for allowing evacuation of contents of the pressure chamber and allowing the pressure chamber to be filled with an insulating medium. The valve assembly seals the insulating medium in the pressure chamber. The valve assembly includes a valve stem, and the valve stem is biased toward the ignition coil assembly by a spring to maintain the sealing of the pressure chamber.

[0006] The valve assembly together with the ignition coil assembly, extension and firing end assembly can provide for improved sealing, reduced packaging, and thus lower energy loss in the extension, as well as a compact packaging of the igniter with the coil. The valve assembly can also contribute to improved electrical fields and can mitigate problems that typically occur using an external fill valve.

[0007] Another aspect of the invention provides a method of manufacturing an igniter assembly. The method comprises the steps of coupling a central conductor to a firing end assembly including an igniter, coupling the firing end assembly to an extension containing a pressure chamber, and disposing a valve assembly in the pressure chamber of the extension. The valve assembly includes a valve stem, and the valve stem and/or a sealing device located around the valve stem seals the pressure chamber when the valve stem is biased away from the firing end assembly by a spring. The method also includes evacuating contents of the pressure chamber by pressing the valve stem toward the spring and allowing contents of the pressure chamber to travel past the valve stem and out of the pressure chamber, and filling the pressure chamber with an insulating medium by pressing the valve stem toward the spring and allowing the insulating medium to travel past the valve stem and into the pressure chamber after evacuating the contents out of the pressure chamber. The method further includes biasing the valve stem away from the firing end assembly with the spring so that the valve stem maintains a seal of the pressure chamber containing the insulating medium, and coupling an ignition coil assembly including a coil to the central conductor and the extension.

[0008] Yet another aspect of the invention provides a method for providing an insulating medium to an igniter assembly. The igniter assembly comprises a firing end assembly including an igniter, and the igniter is coupled to a central conductor and an extension containing a pressure chamber with a valve assembly disposed in the pressure chamber of the extension. The method comprises the steps of pressing a valve stem of the valve assembly into a spring, providing the insulating medium past the valve stem to fill the pressure chamber of the extension with the insulating medium, and sealing the pressure chamber containing the insulating medium with the valve stem and/or a sealing device located around the valve stem.

BRIEF DESCRIPTION OF THE DRAWINGS

[0009] Other advantages of the present invention will be readily appreciated, as the same becomes better understood by reference to the following detailed description when considered in connection with the accompanying drawings wherein:

[0010] Figure 1 is a cross-sectional view of a corona igniter assembly including an ignition coil extension, firing end assembly, extension, and valve assembly according to an example embodiment;

[0011] Figure 2 is an enlarged view of the valve assembly of the example embodiment;

[0012] Figure 3 is another enlarged view of the valve assembly of the example embodiment in a closed configuration (left) and an open configuration (right);

[0013] Figure 4 illustrates a vacuum and pressurizing assembly fixture connected to the valve assembly according to an example embodiment in a closed configuration (left) and an open configuration (right);

[0014] Figure 5-9 include FEA models showing the electrical field of example embodiments;

[0015] Figure 10A illustrates a valve stem of the valve assembly and an upper connector according to an example embodiment;

[0016] Figure 10B shows the valve stem and the upper connector and illustrates gas flow through the valve stem when pressurizing a pressure chamber of the extension;

[0017] Figure 10C is a cross-section of the valve stem and the upper connector and illustrates gas flow through the valve stem when vacuuming the pressure chamber; and

[0018] Figure 10D is another cross-section of the valve stem and the upper connector.

DETAILED DESCRIPTION OF EXEMPLARY EMBODIMENTS

[0019] One aspect of the invention provides an igniter assembly for an internal combustion engine, such as a corona igniter assembly **20** as shown in Figures 1. The corona igniter assembly **20** includes an ignition coil assembly **22** producing a high radio frequency and high voltage electrical field, and a firing end assembly **24** distributing the electrical field in the combustion chamber for fuel ignition. An extension **26** connects the ignition coil assembly **22** to the firing end assembly **24**. The firing end assembly **24** includes a corona igniter **28**, the ignition coil assembly **22** includes a coil **30**, and energy is transferred from the coil **30** to the corona igniter **28** through a central conductor **32**. In the example embodiment, the central conductor **32** is formed of brass. The extension **26** includes a tube **34** containing a sealed pressure chamber **36** which surrounds the central conductor **32**. The tube **34** could be rigid or flexible made of any impermeable material. In the example embodiment, the tube **34** is formed of steel.

[0020] A valve assembly **38** is connected to the central conductor **32** and the tube **34** for evacuating contents of the sealed pressure chamber of the tube **34**, and then filling the sealed pressure chamber **36** of the tube **34** with an insulating medium, such as pressurized gas. The ignition coil assembly **22** is also typically connected to the valve assembly **38** after the sealed pressure chamber **36** is filled with the insulating medium. Although the valve assembly **38** is described in connection with the corona igniter assembly **20**, it is noted that the valve assembly **38** could be used with other types of igniter assemblies.

[0021] In the example embodiment shown in Figure 1, the firing end assembly **24** includes an insulator **40**, typically formed of ceramic, disposed around a bottom portion of the central conductor **32** and around a central electrode **42** of the corona igniter **28**. The central electrode **42** is coupled to the central conductor **32** for receiving energy from the coil **30**. In the example embodiment, the corona igniter **28** includes a firing tip **44** including a

plurality of prongs at a firing end of the central electrode **42**. The firing end assembly **24** of this embodiment also includes a metal shell **46** surrounding the insulator **40** and connected to the tube **24** of the extension **26**. The ignition coil assembly **22** and the firing end assembly **24** shown in Figure 1 are only example embodiments, and the ignition coil assembly **22** and the firing end assembly **24** can have various other designs and include various other components.

[0022] The valve assembly **38** is shown in the Figures and includes a valve stem **48** surrounded by a valve housing **50**. The valve housing **50** can be formed of a single piece, or more than one piece. The valve housing **50** can also include an inner portion, referred to as a valve body, which is sealed to an outer portion of the valve housing **50**. The valve housing **50** is disposed in the sealed pressure chamber **36** of the extension **26** adjacent an upper end of the extension **26** and is also connected to the ignition coil assembly **22**.

[0023] Figure 2 is an enlarged view of the valve assembly **38** according to the example embodiment. The valve assembly **28** of this embodiment includes the valve housing **50** which is typically formed of a plastic or other insulating material. The valve stem **48** is typically formed of metal, such as brass, or other highly conductive material, and is disposed in a bore of the valve housing **50**. A conductive coating can be applied along the bore of the valve housing **50** to further reduce electric field. In the example embodiment, an O-ring **51**, in this case a male static O-ring seal, is disposed around the valve stem **48** to seal the valve stem **48** against the valve housing **50**. One or more additional O-rings are also disposed around the valve housing **50** to seal the valve housing **50** against the tube **34**.

[0024] A lower end of the valve stem **48** is connected to a spring **52** formed of metal. The spring **52** can be a coil spring, as shown in the drawings, or another type of spring. Although the spring **52** is coupled to the central conductor **32**, the spring **52** is not directly connected to the central conductor **32**, but rather is electrically connected to the central conductor **32** through a spring seat **54** on which it rests, which is explained further

below. In the example embodiment, the spring seat **54** is located adjacent an upper end of a sleeve **56** which surrounds the central conductor **32**. The sleeve **56** is typically made of conductive silicon, PTFE, or any other low dielectric insulating material. The spring seat **54** is preferably conductive. The spring seat **54** extends upward from the sleeve **56** and surrounds the spring **52**. The spring seat **54** is preferably conductive and helps mitigate corona formation in a cavity formed between the spring **52** and the valve housing **50**.

[0025] A lower connector **58**, referred to as a slip connector, is disposed along the spring seat **54** between the spring **52** and the sleeve **56**. The central conductor **32** is attached to the lower portion of the spring seat **54** by the lower connector **58**. In the example embodiment, a spring seat cover **60** formed of plastic or other insulating material is disposed around the spring **52**. A top end of the spring seat cover **60** is received in the bore of the valve housing **50**, and a bottom end of the spring seat cover **60** is located near the base of the spring seat **54**. In an another example embodiment, the bore of the valve housing **50** could have a conductive plating to further reduce corona formation losses and failure paths initiating in a cavity formed between the spring **52** and the valve housing **50**. The spring seat **54** could then be made of an insulating material with a conductive bore and will help eliminate the spring seat cover **60**. In the example embodiment of the Figures, an upper connector **62** connects the valve stem **48** to the ignition coil assembly **22**.

[0026] In the example embodiment, the valve stem **48** is free to move axially only, concentrically sliding against the bore in the valve housing **50**. The spring **52** helps to hold or bias the valve stem **48** in its closed position, which is away from the igniter assembly **20** and toward the ignition coil assembly **22**. The spring **52** is supported by the spring seat **54** which is press fitted and bonded to the valve housing **50**. As discussed above, the valve assembly **38** sits in the sealed pressure chamber **36** of the tube **34**. The extension **26**, with the valve assembly **38** attached, is attached to the firing end assembly **24**. More specifically, a lower

end of the tube **34** is attached to the metal shell **46** of the corona igniter **28** with the help of a weld and O-rings **51** to seal the sealed pressure chamber **36**.

[0027] The valve stem **48** according to an example embodiment is shown in Figures 10A-10D. The valve stem **48** has an axial hole **67** in which the upper connector **62** is fitted. Two holes **66**, orthogonally offset, are cross-drilled perpendicular to the axis of the valve stem **48** in a manner such that they intersect with the axial hole **67** of the valve stem **48**. In this embodiment, the O-ring **51** on the valve stem **48** seals against the valve housing **50** and is located below the cross drilled holes **66**. Once the valve stem **48** is assembled in the valve housing **50**, and when put in the open configuration (right, Figure 3), these three holes **66**, **67** together create a passage way for gas to flow from the top of the valve assembly **38** into the pressure chamber **36** or for gas from the pressure chamber **36** to flow out through the valve assembly **38**. The passageway is sealed off to the pressure chamber **36** by the O-ring **51** in the closed position (left, Figure 3). Figure 10A illustrates the valve stem **48** with the holes **66**, **67** and the upper connector **62**. Figure 10B shows the valve stem **48** and the upper connector **62** and illustrates the gas flow through the valve stem **48** when pressurizing the pressure chamber **36**. Figure 10C is a cross-section of the valve stem **48** and the upper connector **62** and illustrates the gas flow through the valve stem **48** when vacuuming the pressure chamber **36**. Figure 10D is another cross-section of the valve stem **48** and upper connector **62**.

[0028] The valve assembly **38** and a vacuum and pressurizing fixture assembly **64** are used to provide the insulating medium in the sealed pressure chamber **36**. The example embodiment is shown in Figures 3 and 4. In its closed position, the O-ring **51** located around the valve stem **48** seals pressure chamber **36** formed in the tube **34**. Alternatively, the valve stem **48** and/or another sealing device seals off the pressure chamber **36**. The valve stem **48** and O-ring could also together seal the pressure chamber **36**. During the vacuuming or

pressurizing process, the valve assembly **38** is set to its open position, as shown on the right side of Figures 3 and 4, by pushing the valve stem **48** down against the spring **52** to a defined position which exposes at least one opening, for example the cross drilled holes **66** and axial hole **67** in the valve stem **48**, to a cavity in a seat region **68**. This cavity connects the pressure chamber **36** in the tube **34** below (to be vacuumed or pressurized) to an opening **70** on the top face of the valve housing **50**. Once the insulating medium is provided and the pressure chamber **36** is pressurized, the differential force of the spring **52** along with the pressure in the sealed pressure chamber **36** forces the spring **52** upward and closes the valve assembly **38** shut. The valve assembly **38** in the closed position is shown in the left side of Figures 3 and 4. The valve stem **38** is coupled to the coil assembly **22**. In the example embodiment, the upper connector **62** on the top of the valve stem **48** is attached to the coil **30** via a pin **72** and acts as another central conductive element. The central conductor **32** is allowed to have floating contact in the bore of the insulator **40** of the corona igniter **28**, providing for movement of the valve stem **48**, thermal expansion, and electrical continuity.

[0029] As shown in Figure 4, the combined vacuum and pressurizing assembly fixture **64** of the example embodiment is made up of an aluminum manifold **74**, a steel push screw **76**, and brass fixture stem **78**. The vacuum and pressurizing assembly fixture **64** is screwed on to a coil receptacle nut **80** for operation. The push screw **76** is attached to the brass fixture stem **78** via a snap ring arrangement **82**. When tightened to a stop, the push screw **76** pushes the brass fixture stem **78** to an open position, as shown in the right side of Figure 4. This in turn pushes the valve stem **48** in the open position, as shown on the right side of Figure 3. When the vacuum and pressurizing assembly fixture **64** is in the open position, all ports are open and the vacuum and pressurizing operation is carried out. In the open position, a pressurized gas inlet **84** is located along a first valve connector **86**, and a vacuum outlet **88** is located along a second valve connector **86**. Once the vacuum and

pressurizing operation is done, the push screw **76** is brought to its original position and all ports are now in the closed sealed position, as shown on the left side of Figure 4.

[0030] The design described above can provide numerous advantages, including a very low loss, low dielectric constant fluid insulating medium in the extension **26** used to transfer of energy from the coil **30** to the corona igniter **28**. The unique valve assembly **38** which is incorporated in the central conducting element of the extension **26** facilitates compact packaging of the corona igniter **28** with the coil **30**, which in the example embodiment is detachable.

[0031] The valve assembly **38** can also improve electrical fields and mitigate problems arising by attaching an external fill valve. The single vacuum and pressurizing assembly fixture **64** is designed to evacuate contents of the extension **26** and then fill the extension **26** with pressurized gas, such as nitrogen, through the valve assembly **38** (two-way application). More specifically, the advantages include reduced electric field in the valve assembly **38** and components surrounding the valve assembly **38**. The valve assembly **38** is able to operate without moving the central conductor **32** where it passes out of the valve assembly **38**, such that the central conductor **32** and center electrode **42** can be covered with insulating medium from top to bottom and occurrence of corona from the surfaces of the central conductor **32** and the central electrode **42** is reduced.

[0032] As indicated above, the improved design provides for reduced electrical fields in the valve assembly **52** and immediately surrounding the valve assembly **52**. In addition, the valve assembly **52** can operate without moving the central conductor **32** where it passes out of the valve assembly **52**. Thus, it is possible to surround the entire central conductor **32** in the tube **34** with the insulating medium and reduce the occurrence of corona discharge from the surface of the central conductor **32**.

[0033] In comparative designs, a significant amount of energy transferred from the coil 30 to the corona igniter 28 is lost through the insulating medium and the extension 26 used to connect the coil 30 and the corona igniter 28. This can occur due to capacitive and dissipative losses, and possible loss due to formation of corona in the extension 26. Highly pressurized gas or fluid, such as greater than 30 bar, preferably having a low dielectric constant and loss factor, can suppress formation of corona or discharges from the central conductor 32 to ground. Thus, the pressurized gas or fluid can be used as the insulating medium in the extension 26. One example of such a gas is dry nitrogen gas at a pressure of greater than 30 bar, which is known to have a very low dielectric constant (such as ~1 or near 1). It is not trivial to pressurize and hold pressure in the extension 26 over the lifetime of the coil 30, extension 26, and corona igniter 28. By incorporating the pressurizing valve assembly 38 in to the central conductor 32 in the extension 26, the sealing surfaces are reduced and overall packaging of the corona igniter 28 is made compact which helps in better sealing of the components. The dual purpose of the valve assembly 38 as another centralized conductor lends to electrical field improvements when compared to attaching an external fill valve. As designed, the insulating medium, such as the pressurized gas, can fill the minutest of the crevices in the extension 26 and provides optimal insulation. The assembly can be made impermeable by using a combination of O-rings 51, sealant, and a rubber puck 90. In the example embodiment, the O-rings 50 are formed of a silicon-based material. The extension 26 is designed in such a way that the coil 30 is attached after the extension 26 is pressurized. The coil 30 is also detachable from the valve assembly 38 without depressurizing the extension 26. This feature enables improved maintenance capabilities of the igniter 28, such as removal, cleaning and replacement of the coil 30 without changing other components, and improved installation through the coil 30.

[0034] Figures 5-9 include FEA models showing the effects of the reduced electrical field provided by the valve assembly **38** design. It is noted that the metal components of Figures 5-9, which are not conductors, are not modeled in the FEA results.

[0035] The designs of Figures 7-9 are preferred over the design of Figures 5 and 6 because the design of Figures 5 and 6 typically has movement of the central conductor **32** and higher electrical field throughout the valve assembly **38**.

[0036] In the design of Figures 5 and 6, the valve stems **48** move up and down when the valve assembly **38** operates. Hence, the central conductor **32** and the sleeve **56** also move up and down, and the sleeve **56** cannot completely cover the central conductor **32** as it approaches and goes into the firing end assembly **24**. This can lead to flashover at the lower joint between the central conductor **32** and the firing end assembly **24**. Also, the design of Figures 5 and 6 typically has a higher electrical field than the designs of Figure 7-9 because of the clearances in the valve assembly **38**, and the high electric field typically appears in these small clearances or gaps. Due to the electrical field level, the O-rings **51** typically have a reduced life and higher parasitic loss, compared to the O-rings **51** of Figures 7-9.

[0037] In the designs of Figures 7 and 8, movement of the central conductor **32** is avoided, and the electric field is reduced throughout the valve assembly **38**. In these embodiments, the valve stem **48** moves up and down inside of the stationary valve housing **50**. Thus, the central conductor **32** remains completely covered by the sleeve **56** and electric field throughout the valve assembly **38** is reduced, including everywhere inside the valve housing **50**. It has been found that the electric field in the valve assembly **38** of Figures 7 and 8 is actually zero in the valve housing **50**. An electrical field does remain above the valve housing **50**. It is noted that in the design of Figures 7 and 8, the plastic valve housing **50** can include a conductive coating along the bore of the plastic valve housing **50**. A FEA analysis of this design is shown on the right side of Figure 8. In this case, the electric field is reduced,

as shown by the FEA model. For example, the peak electric field can be approximately 3 times less when the conductive coating is applied, as in the design on the right of Figure 8, compared to the design on the left side of Figure 8.

[0038] In the design of Figure 9, the conductive valve housing **50** completely covers the valve mechanism. The valve housing **50** can be one or more pieces. In the embodiment of Figure 9, the valve housing **50** includes the inner portion **50a**, in this case a plastic valve body, which completely covers the valve mechanism and is sealed to the outer portion **50b** of the valve housing **50**. For example, the inner and outer portions **50a**, **50b** of the valve housing **50** can be co-molded. In the design of Figure 9, the electric field is reduced everywhere inside the valve housing **50**, compared to other designs. The FEA model shows the electric field is actually zero inside the valve housing **50** of Figure 9. In addition, the peak electric field drops throughout the design of Figure 9. It was found the peak electric field is about three times less than a similar design without the elongated plastic valve body **50a**, similar to the embodiment of Figure 8 with the conductive coating along the bore.

[0039] The design described above can be translated to work over various sizes of extension **26** length and corona igniter **28** sizes without significant modifications to the assembly. As discussed above, either a rigid or flexible air tight tube **34** could be used for the extension **26**. The single vacuum and pressurizing assembly fixture **64** facilitates pulling a vacuum in the extension **26** and pressurizing the extension **26** by connecting to the valve assembly **38** in the same location where the coil **30** will be attached to the extension **26**. This helps reduce assembly fixturing and components and expedites the assembly process.

[0040] The design described above includes a combination of metallic and plastic or other non metallic components. The valve assembly **38** is incorporated in to part of the central conductive element and is spring loaded. It is also noted that the valve assembly **38** can be used with the extension **26** when the extension **26** is flexible, the fluid medium is used

as insulation, and the extension **26** can be of any overall length without modifications to the connecting features or the valve assembly **38**. The coil **30** is detachable without depressurizing the assembly, and evacuation of the sealed pressure chamber **36** of the tube **34** and pressurizing of the tube **34** are carried out with the same vacuum and pressurizing assembly fixture **64**. The valve assembly **38** is also scalable to different sized corona igniters **28**.

[0041] It is noted that the extension **26**, the valve assembly **38**, and the combined vacuum and pressurizing assembly fixture **64** described herein are only example embodiments, and modifications of the example extension **26**, the valve assembly **38**, and the vacuum and pressurizing assembly fixture **64** described herein can be made.

[0042] Another aspect of the invention provides a method of manufacturing the corona igniter assembly **20**. The method includes connecting the metal shell **46** of the firing end assembly **24** to the tube **34** of the extension **26**, disposing the valve assembly **38** in the tube **34** of the extension **26**, and connecting the valve assembly **38** to the central conductor **32**. The method further includes connecting the valve assembly **38** to the ignition coil assembly **22** after filling the sealed pressure chamber **36** of the tube **34** with the insulating medium.

[0043] Yet another aspect of the invention provides a method for providing the insulating medium around the central conductor **32** of the corona igniter assembly **20**. The extension **26** contains the sealed pressure chamber **36** which surrounds the central conductor **32**. The valve assembly **38** is connected to the central conductor **32** and the extension **26**. The method includes evacuating contents of the sealed pressure chamber **36**, and then filling the sealed pressure chamber **36** with the insulating medium using the vacuum and pressurizing fixture **64** and the valve assembly **38**. After filling the sealed pressure chamber **36**, the vacuum and pressurizing fixture **64** and the valve assembly **38** is disconnected from

the valve assembly **38**, and the ignition coil assembly **22** is connected to the valve assembly **38**.

[0044] Obviously, many modifications and variations of the present invention are possible in light of the above teachings and may be practiced otherwise than as specifically described while within the scope of the invention. It is contemplated that all features of all claims and of all embodiments can be combined with each other, so long as such combinations would not contradict one another.

CLAIMS

What is claimed is:

1. An igniter assembly, comprising:
an ignition coil assembly including a coil,
a firing end assembly including an igniter and coupled to said ignition coil assembly
by an extension, said extension containing a pressure chamber,
a central conductor disposed between said ignition coil assembly and said firing end
assembly for transferring energy from said coil to said igniter,
a valve assembly disposed in said pressure chamber of said extension for allowing
evacuation of contents of said pressure chamber and allowing said pressure chamber to be
filled with an insulating medium,
said valve assembly sealing the insulating medium in said pressure chamber,
said valve assembly including a valve stem, and
said valve stem being biased toward said ignition coil assembly by a spring to
maintain the sealing of said pressure chamber.
2. An igniter according to claim 1, wherein said igniter is a corona igniter.
3. An igniter according to claim 2, wherein said corona igniter includes a central
electrode coupled to said central conductor, an insulator disposed around said central
conductor and said central electrode, a firing tip disposed at a firing end of said central
electrode, and a metal shell surrounding said insulator and connected to said extension.

4. An igniter according to claim 1, wherein said valve stem includes at least one opening for allowing said insulating medium to travel therethrough and to said pressure chamber when said valve stem is pressed against said spring.
5. An igniter according to claim 1, wherein said valve stem is movable in an axial direction.
6. An igniter according to claim 1, wherein said valve assembly includes a valve housing disposed in said extension and connected to said ignition coil assembly, said valve housing being formed of an insulating material, and said valve housing including a bore containing said valve stem.
7. An igniter according to claim 1 including a coating formed of a conductive material disposed along said bore of said valve housing.
8. An igniter according to claim 1 including a ring sealing said valve stem against said valve housing.
9. An igniter according to claim 1, wherein said spring is a coil spring.
10. An igniter according to claim 1, wherein said central conductor is not movable in the axial direction.
11. An igniter according to claim 1, wherein said extension is a tube formed of metal.

12. A method of manufacturing an igniter assembly, comprising the steps of:
coupling a central conductor to a firing end assembly including an igniter,
coupling the firing end assembly to an extension containing a pressure chamber,
disposing a valve assembly in the pressure chamber of the extension, the valve assembly including a valve stem, and the valve stem and/or a sealing device located around the valve stem sealing the pressure chamber when the valve stem is biased away from the firing end assembly by a spring,
evacuating contents of the pressure chamber by pressing the valve stem toward the spring and allowing contents of the pressure chamber to travel past the valve stem and out of the pressure chamber,
filling the pressure chamber with an insulating medium by pressing the valve stem toward the spring and allowing the insulating medium to travel past the valve stem and into the pressure chamber after evacuating the contents out of the pressure chamber,
biasing the valve stem away from the firing end assembly with the spring so that the valve stem maintains a seal of the pressure chamber containing the insulating medium, and
coupling an ignition coil assembly including a coil to the central conductor.
13. A method according to claim 12, wherein the igniter is a corona igniter.
14. A method according to claim 12, wherein the central conductor is not movable in an axial direction.
15. A method for providing an insulating medium to an igniter assembly, the igniter assembly comprising a firing end assembly including an igniter, the igniter being coupled to a

central conductor and an extension containing a pressure chamber with a valve assembly disposed in the pressure chamber of the extension, the method comprising the steps of:

pressing a valve stem of the valve assembly into a spring,

providing the insulating medium past the valve stem to fill the pressure chamber of the extension with the insulating medium, and

sealing the pressure chamber containing the insulating medium with the valve stem and/or a sealing device located around the valve stem.

16. A method of claim 15 including evacuating contents from the pressure chamber by pressing the valve stem into the spring before filling the pressure chamber with the insulating medium.

17. A method according to claim 15 including coupling a vacuum and pressurizing fixture to the valve assembly, and using the vacuum and pressurizing fixture to press the valve stem into the spring and fill the pressure chamber with the insulating medium.

18. A method according to claim 15, wherein the central conductor is not movable in the axial direction.

19. A method according to claim 15, wherein the valve stem includes at least one opening for allowing the insulating medium to travel therethrough and enter the pressure chamber.

20. A method according to claim 15, wherein the igniter is a corona igniter.

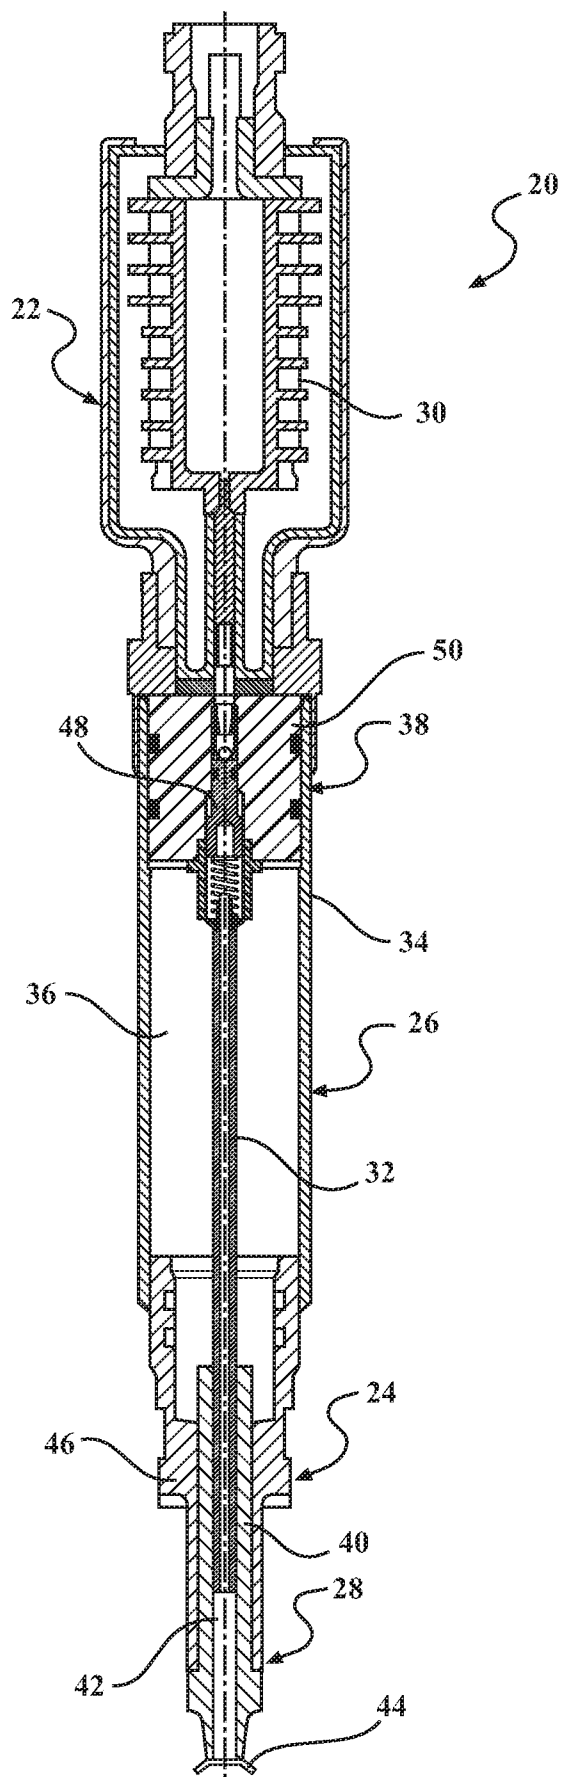


FIG. 1

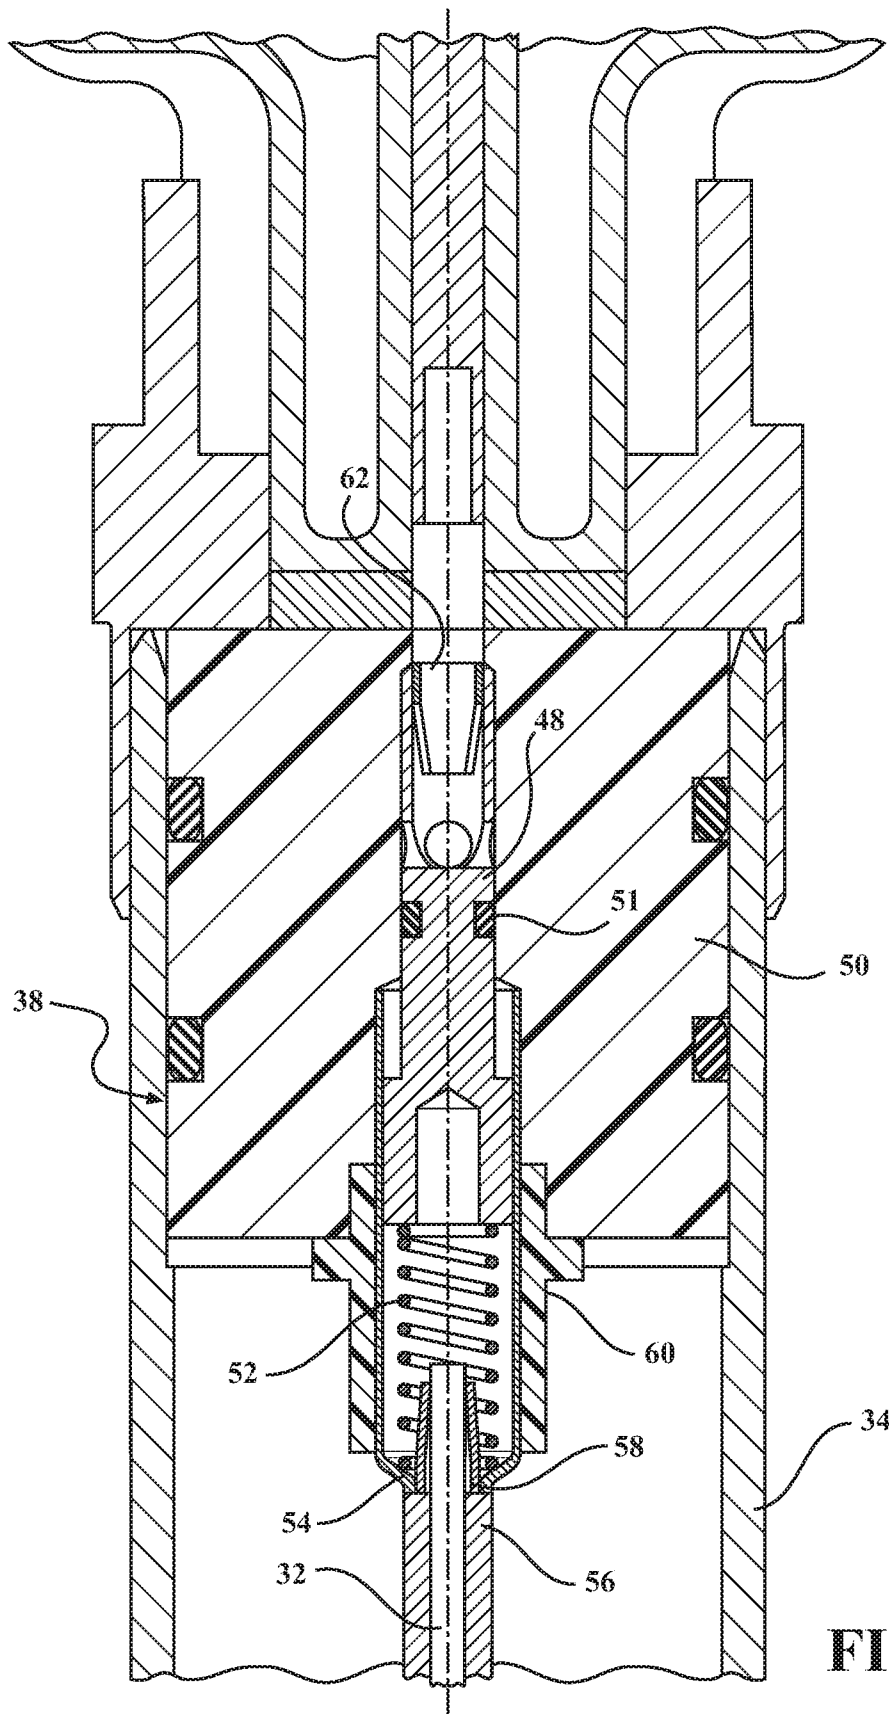


FIG. 2

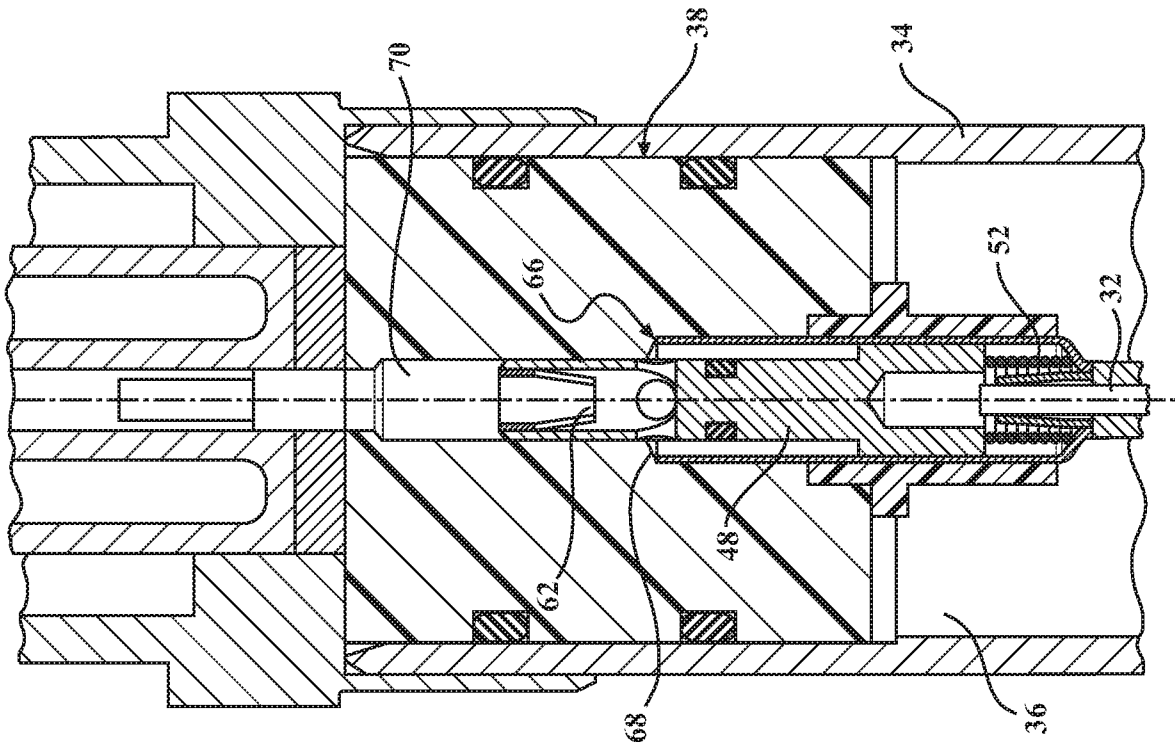


FIG. 3B

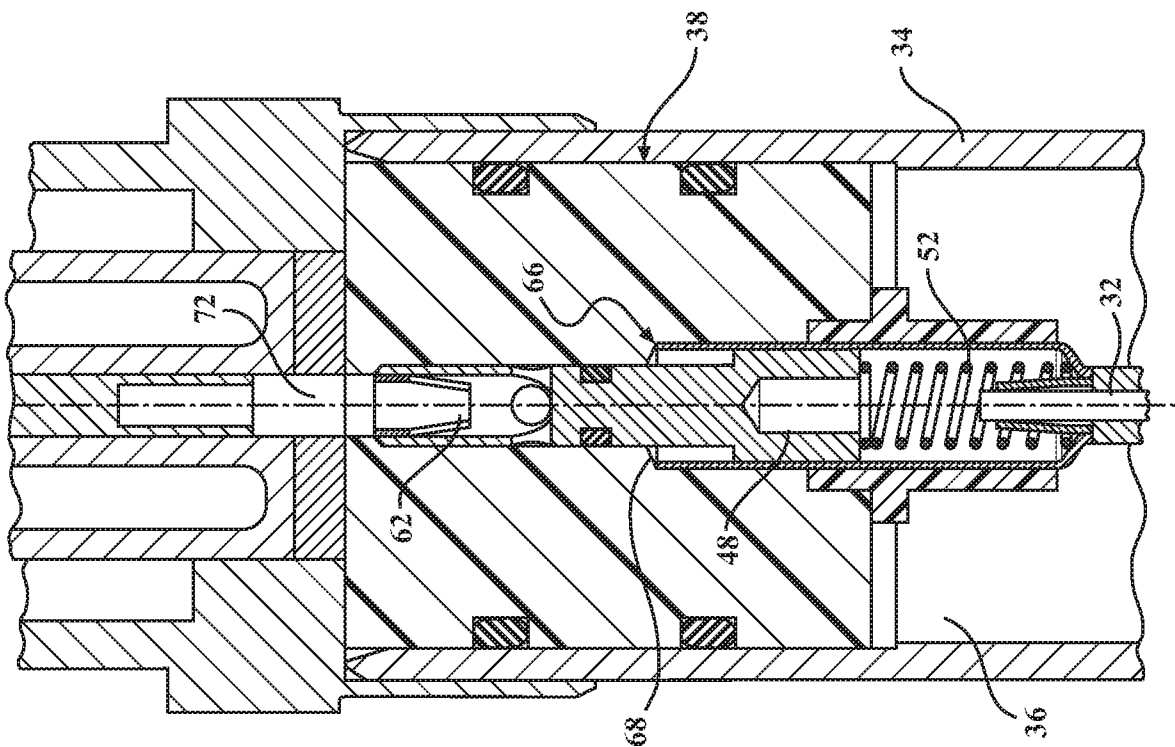


FIG. 3A

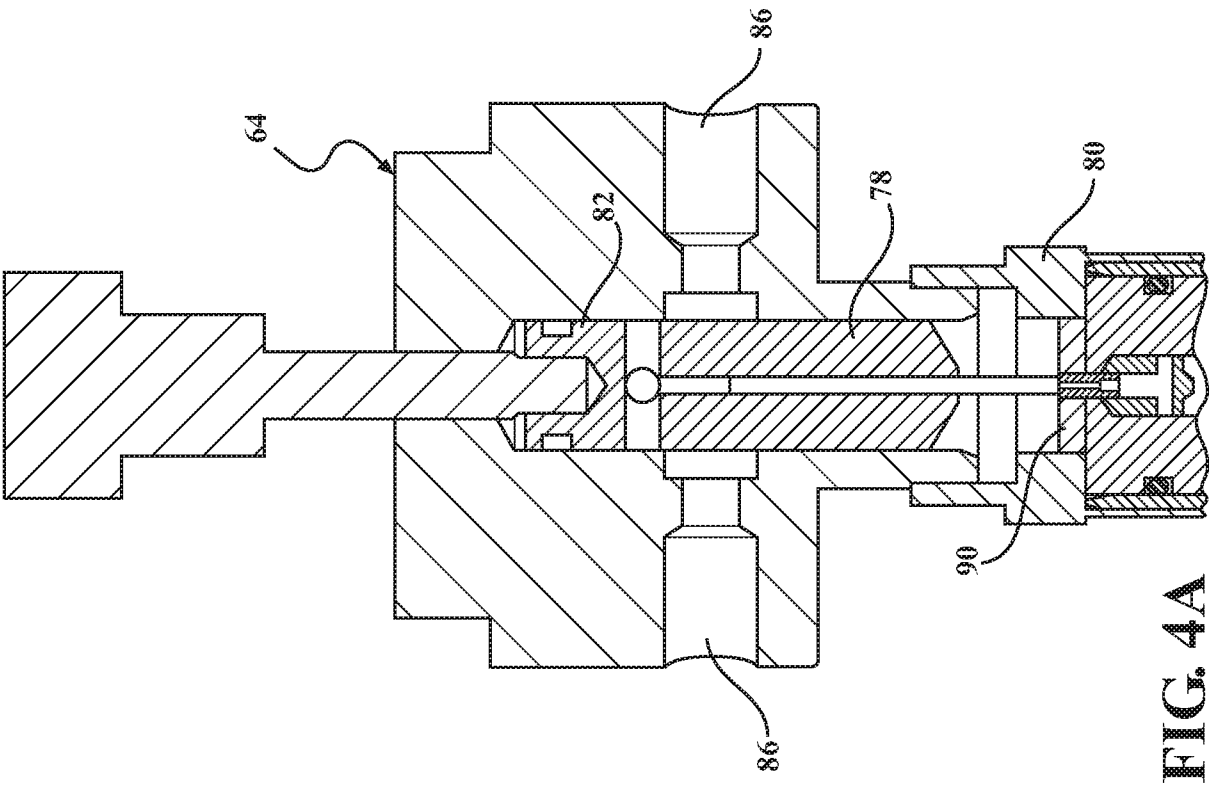


FIG. 4A

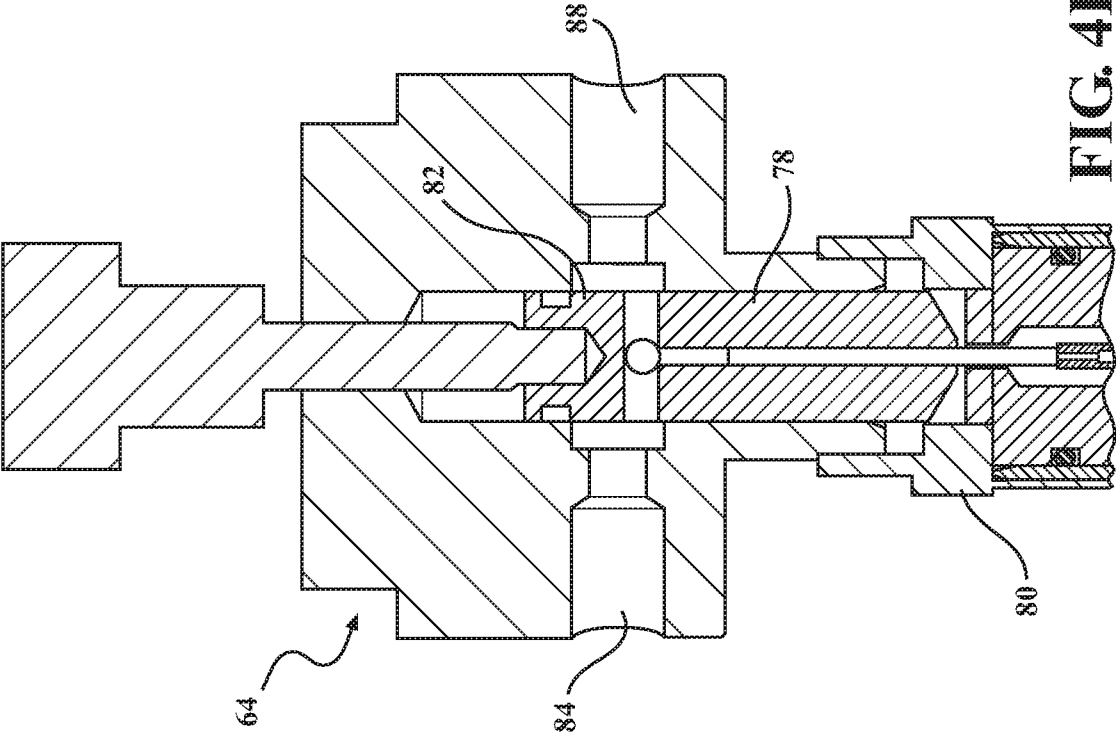


FIG. 4B

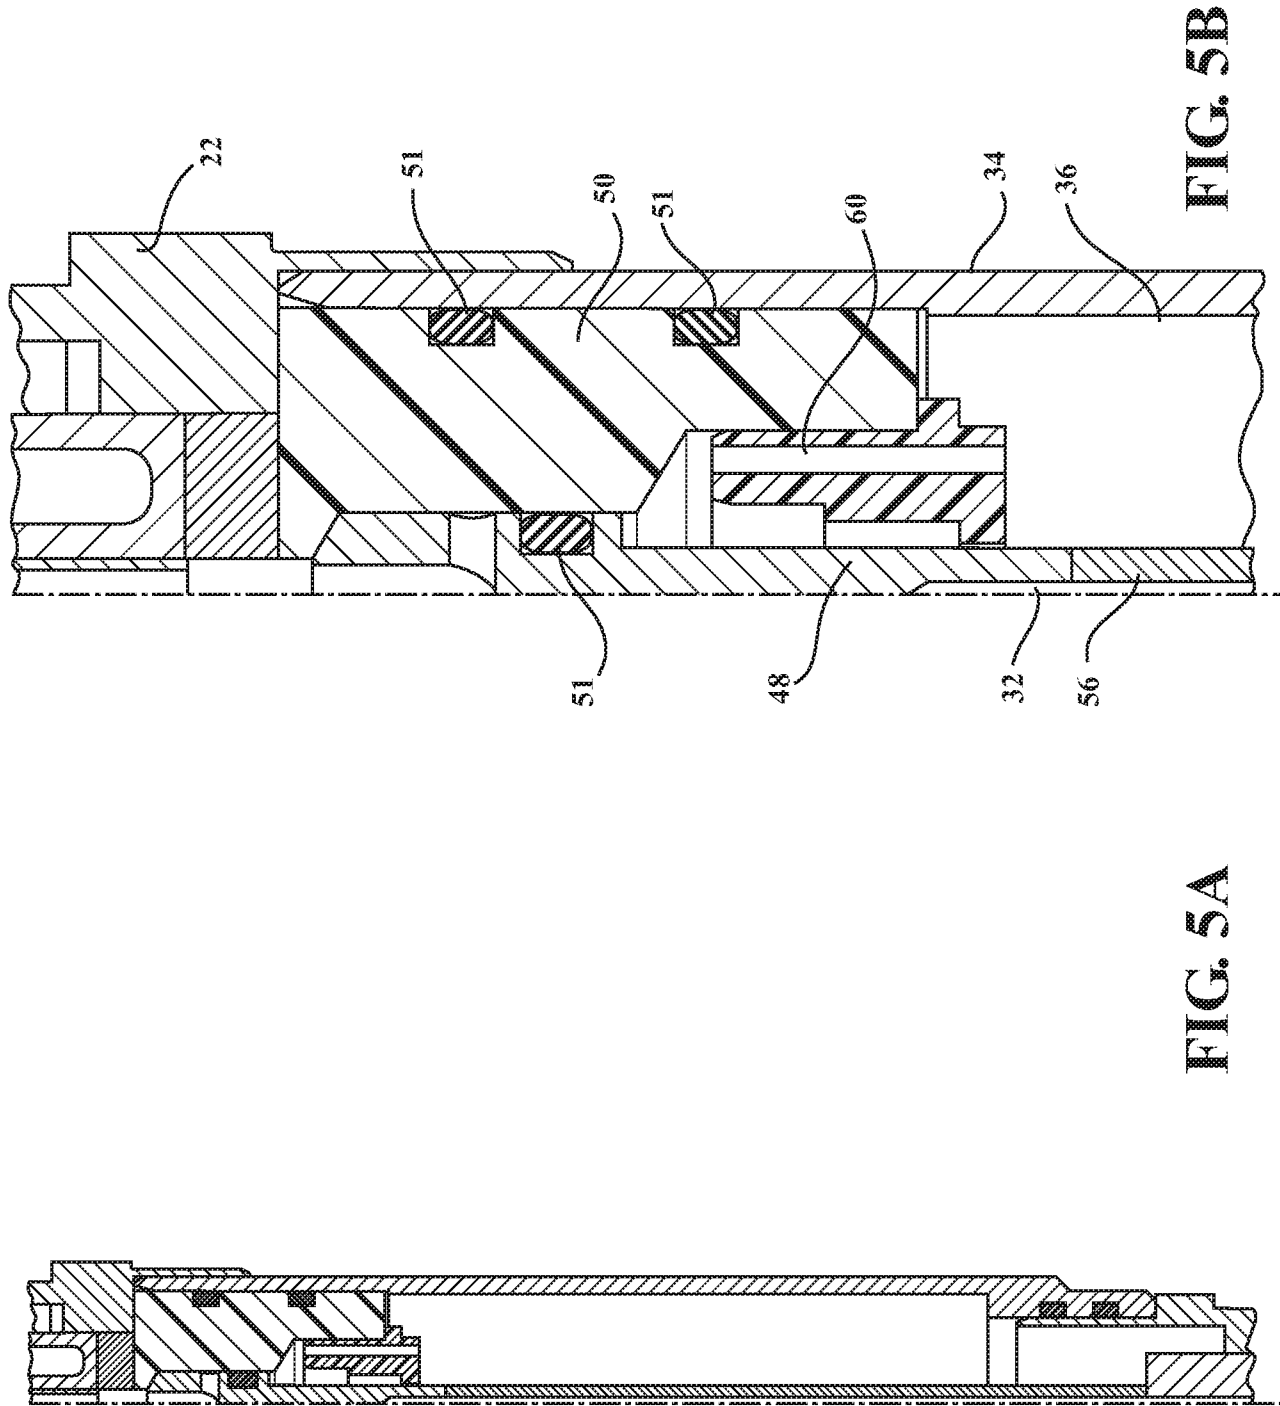


FIG. 6B

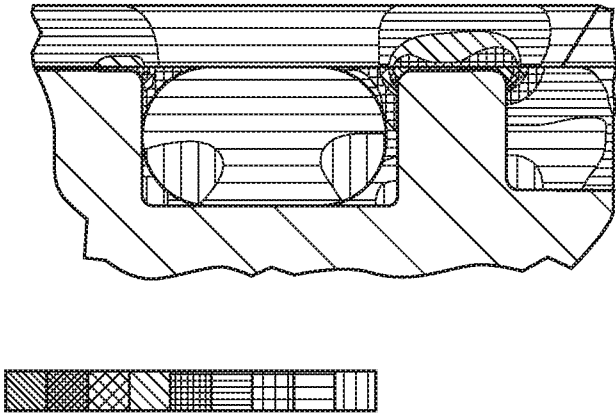


FIG. 6C

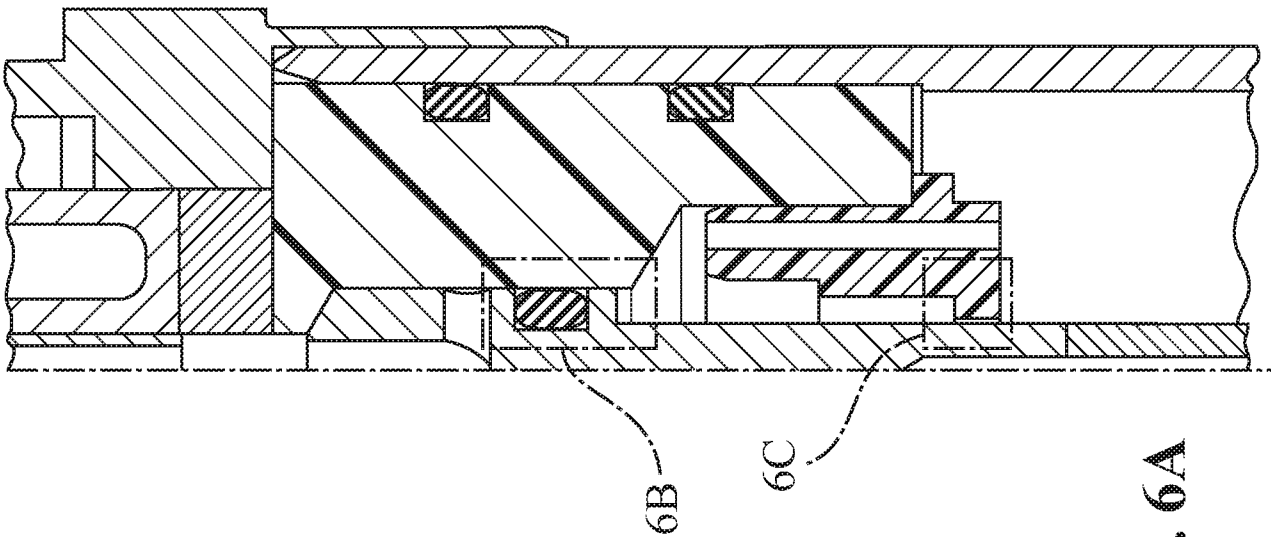
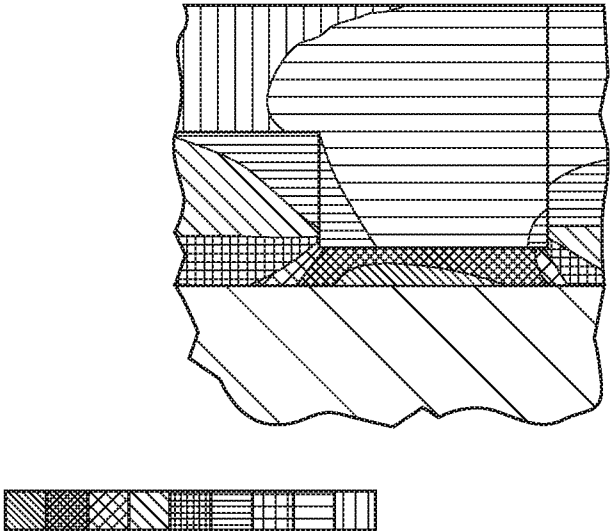


FIG. 6A

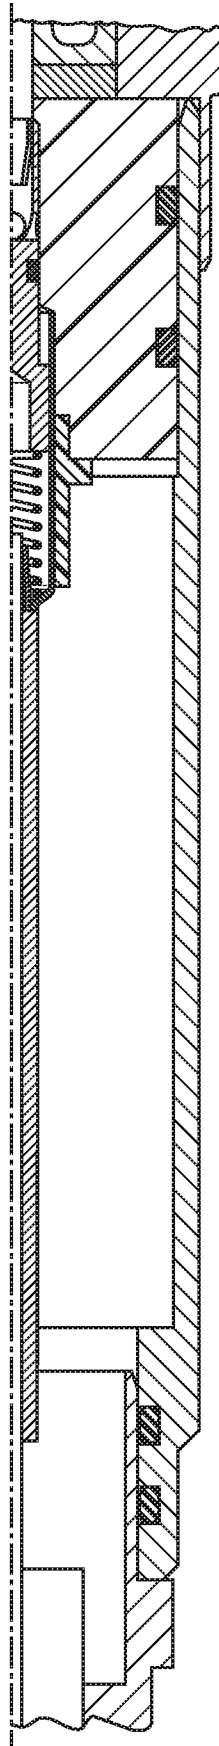


FIG. 7A

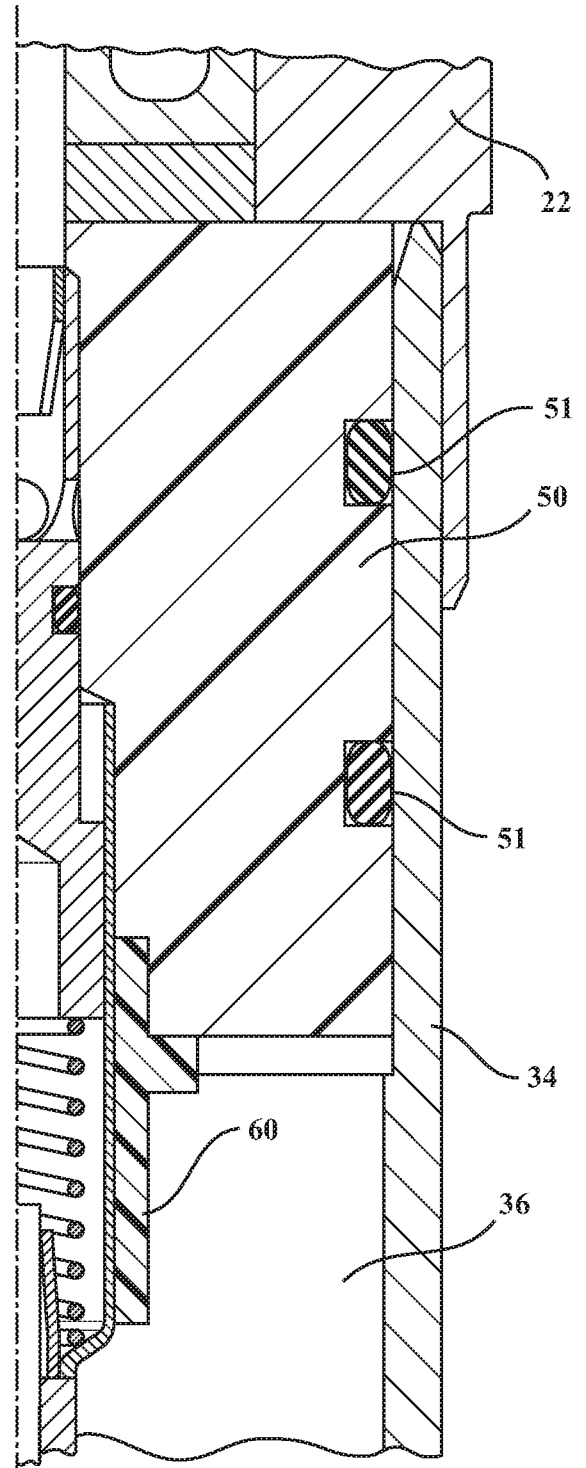


FIG. 7B

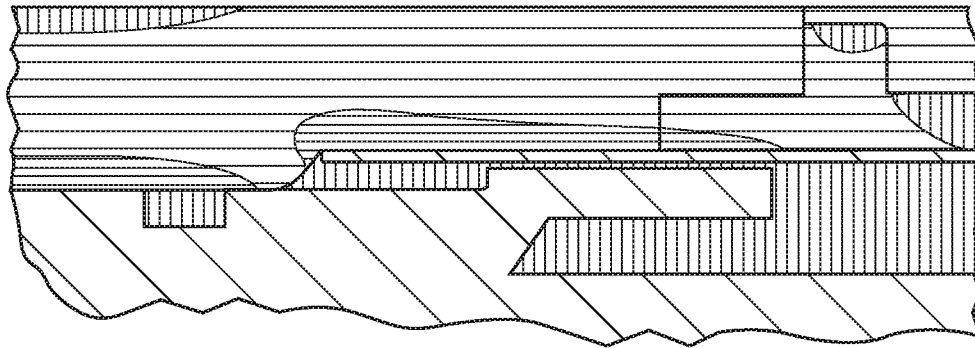


FIG. 8C

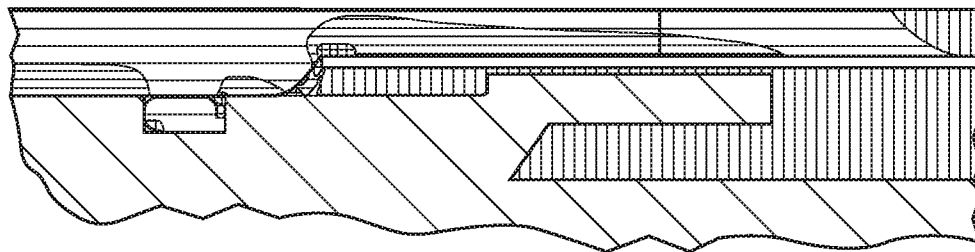


FIG. 8B

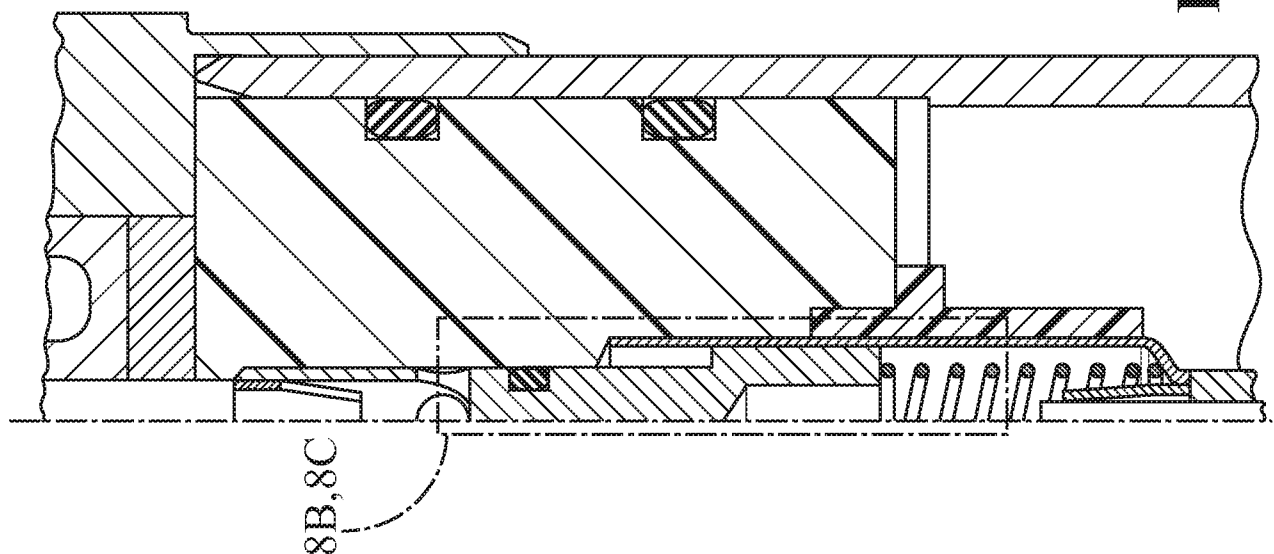


FIG. 8A

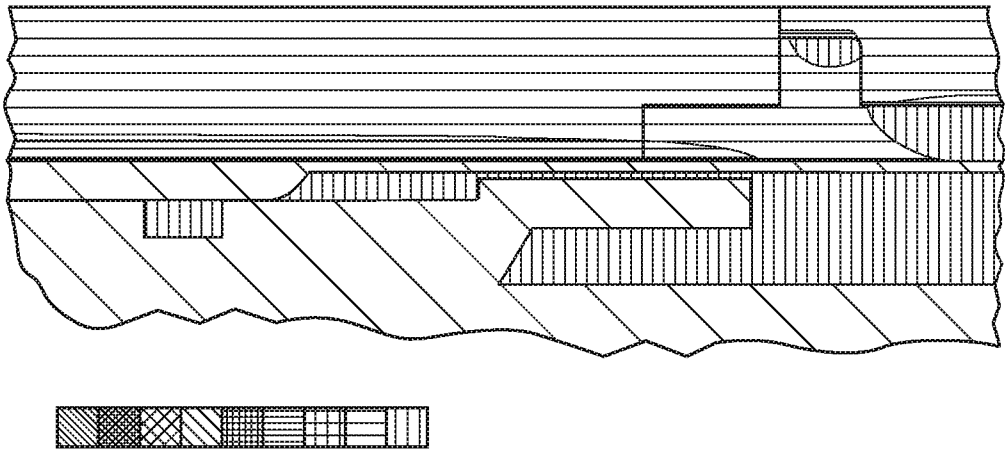


FIG. 9B

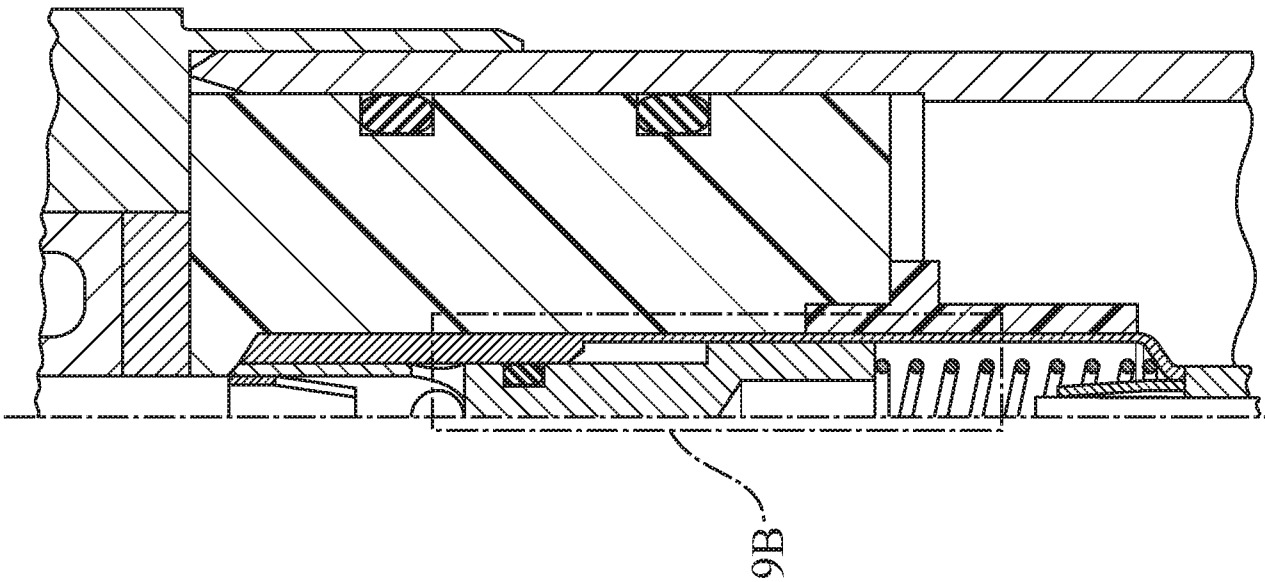


FIG. 9A

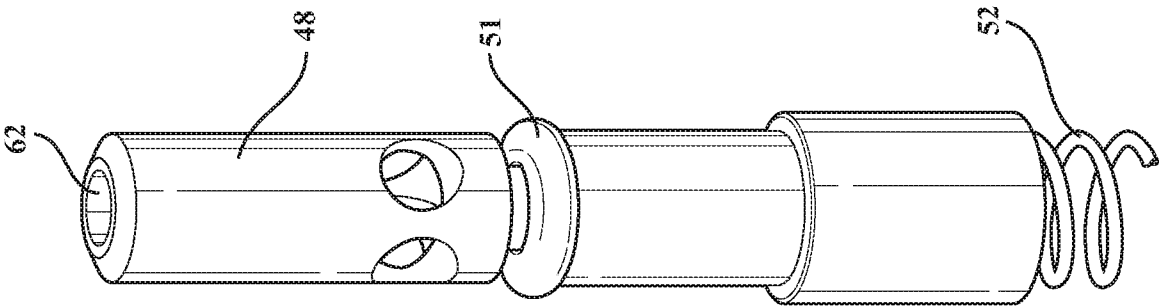


FIG. 10A

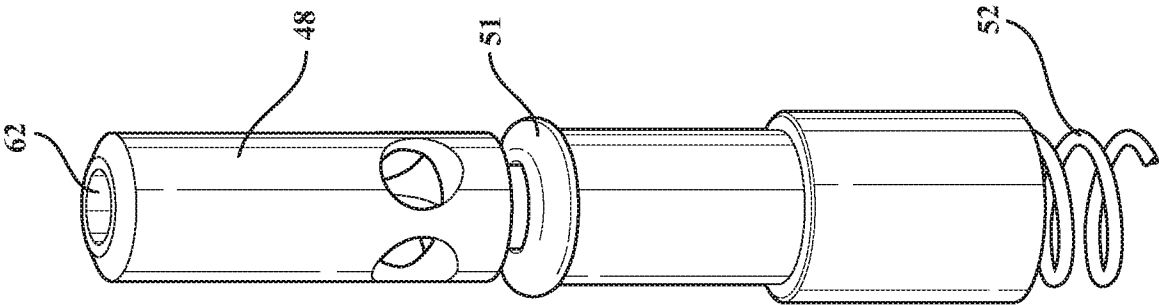


FIG. 10B

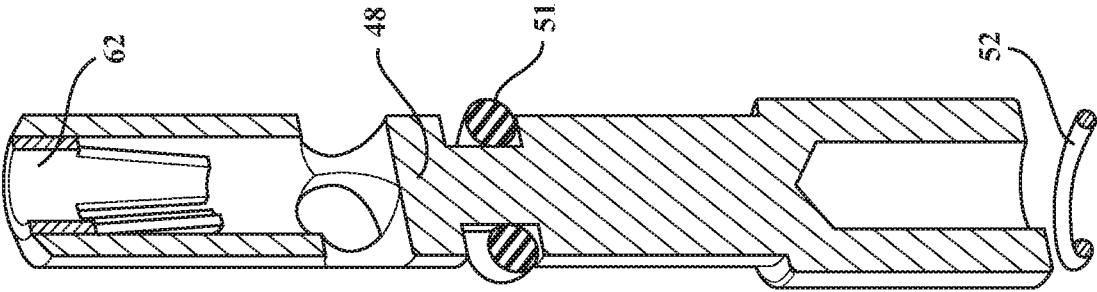


FIG. 10C

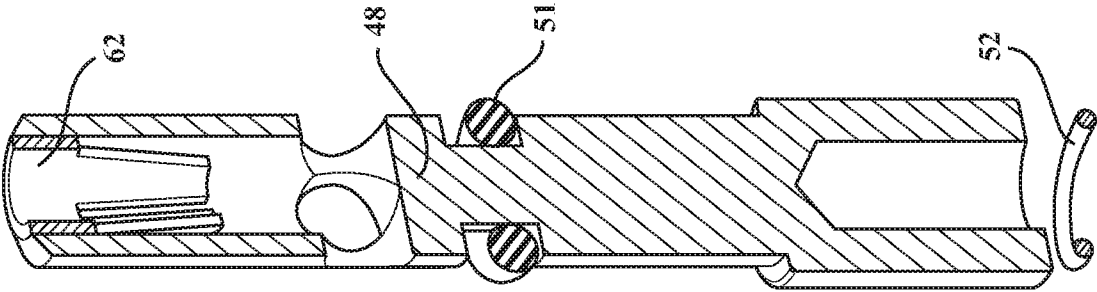


FIG. 10D

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2018/024418

A. CLASSIFICATION OF SUBJECT MATTER

INV. H01T13/50 H01T21/02 H01T13/44
ADD. H01T13/56

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
H01T

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 8 434 443 B2 (FEDERAL MOGUL IGNITION COMPANY) 7 May 2013 (2013-05-07)	15-20
A	column 7, line 45 - column 8, line 50; figures 1-10	1-14
X	US 2010/175653 A1 (LYKOWSKI JAMES D [US] ET AL) 15 July 2010 (2010-07-15)	15-20
A	paragraph [0017] - paragraph [0018]; figures 1, 2	1-14
A	US 2014/310947 A1 (ACHTSTÄTTER TOM [DE] ET AL) 23 October 2014 (2014-10-23)	1-20
	paragraphs [0032], [0035], [0037]; figures	
	----- -/-	



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

4 June 2018

Date of mailing of the international search report

11/06/2018

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Starck, Thierry

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2018/024418

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2 632 132 A (KENDALL DELANO JAMES) 17 March 1953 (1953-03-17) column 5, line 32 - column 6, line 14; figures -----	1
A	WO 2016/154368 A1 (FEDERAL-MOGUL CORP [US]) 29 September 2016 (2016-09-29) paragraphs [0046], [0048]; figures 1, 2 -----	1-20

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2018/024418

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 8434443	B2	07-05-2013	CN 102334254 A	25-01-2012
			CN 103291522 A	11-09-2013
			EP 2377214 A2	19-10-2011
			JP 5480294 B2	23-04-2014
			JP 2012515420 A	05-07-2012
			KR 20110119651 A	02-11-2011
			US 2010175655 A1	15-07-2010
			WO 2010081153 A2	15-07-2010

US 2010175653	A1	15-07-2010	CN 102334252 A	25-01-2012
			EP 2377213 A2	19-10-2011
			JP 5592899 B2	17-09-2014
			JP 2012515419 A	05-07-2012
			KR 20110119648 A	02-11-2011
			US 2010175653 A1	15-07-2010
			US 2012161604 A1	28-06-2012
			WO 2010081124 A2	15-07-2010

US 2014310947	A1	23-10-2014	BR 102014009172 A2	13-10-2015
			CN 104112983 A	22-10-2014
			DE 102014102230 A1	23-10-2014
			DE 102014103387 A1	23-10-2014
			US 2014310947 A1	23-10-2014

US 2632132	A	17-03-1953	NONE	

WO 2016154368	A1	29-09-2016	CN 107636916 A	26-01-2018
			EP 3275059 A1	31-01-2018
			KR 20170130576 A	28-11-2017
			US 2017025824 A1	26-01-2017
			WO 2016154368 A1	29-09-2016
