



(51) International Patent Classification:
B41L 47/46 (2006.01)

(21) International Application Number:
PCT/US2009/004370

(22) International Filing Date:
29 July 2009 (29.07.2009)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
12/283,843 16 September 2008 (16.09.2008) US

(71) Applicant (for all designated States except US): **ARM-STRONG WORLD INDUSTRIES, INC.** [US/US]; 2500 Columbia Avenue, P.O. Box 3001, Lancaster, PA 17604-3001 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **FERNBACK, Katharine, C.** [US/US]; 2200 Cloverton Drive, Columbia, PA 17512 (US). **ANSPACH, Kean, M.** [US/US]; 294 Stoney Hill Road, Quarryville, PA 17566 (US). **ESHBACH, John, R., Jr.** [US/US]; 160 Daplin Avenue, Marietta, PA 17547 (US).

(74) Agents: **ANTONACCI, J.M.** et al.; Armstrong World Industries, Inc., 2500 Columbia Avenue, P.O. Box 3001, Lancaster, PA 17604-3001 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))

Published:

- with international search report (Art. 21(3))

(54) Title: SHEET GOODS HAVING A LARGE REPEAT LENGTH AND TILE WITH NUMEROUS PATTERNS

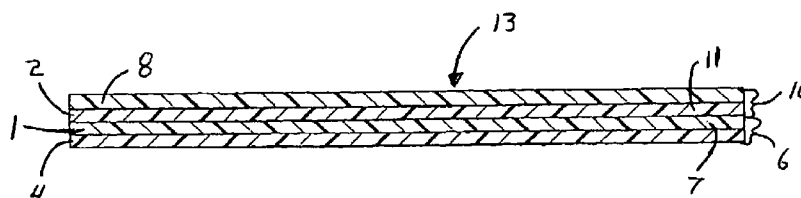


Fig. 4

(57) Abstract: Sheet goods having extremely long repeat lengths and tiles having a large number of different visual patterns are formed by printing two different print patterns having different repeat lengths. The two different print patterns are printed on two films that are laminated together, or on a substrate, or one print pattern on a substrate and one print pattern on a transparent or translucent film that is laminated to the printed substrate.

Sheet Goods Having a Large Repeat Length and Tile with Numerous Patterns

[0001] This application claims priority from U.S. Patent Application Serial No. 12/283,843, filed September 16, 2008, which is hereby incorporated by reference in its entirety.

[0002] The present invention relates to a method of making surface coverings, including tile and sheet goods, the surface coverings made by the method, and cartons of the tiles made by the method. The tiles have a large number of printed patterns or visuals and the sheet goods have an extremely long repeat pattern. More particularly, the invention is directed to a method of making surface coverings using at least two printers with different repeat lengths. For example, in rotogravure printing, the print cylinders would have different circumferences. The print cylinders or other printers, such as flexographic and offset lithography, may print different patterns on two different films that are then laminated together or the different print patterns may be printed on the same substrate.

[0003] It is known to print surface coverings, such as sheet goods and tiles, with two or more print layers. The surface coverings are made by printing the print layers on one or more elongated sheets. If the surface covering is a plurality of tiles, the elongated sheet is cut to form a plurality of tiles.

[0004] With the rotogravure printing process, each color is printed with a separate print cylinder. To obtain sharpness and clarity in the printed pattern, the print cylinders are made with the same repeat length and the successive print cylinders are aligned so that the printed patterns precisely aligned to yield a sharp image.

[0005] The print cylinders that are presently used in the industry have lengths of about 40" and circumferences of about 24" or 36". Therefore, if the printed pattern of the surface covering is an image of tiles measuring approximately 12" X 12", the print cylinders produce a maximum of 6 or 9 different 12" X 12" printed patterns that may be cut to form 6 or 9 tiles having different printed patterns.

[0006] The tiles are typically put in cartons directly from the cutting line. Therefore, 2 or 3 different tiles are packed into each carton and the customer is told to mix the tiles from different cartons. Even if the tiles are mixed prior to packing in the cartons, each carton can contain a maximum of 6 or 9 differently patterned tile. Depending on the thickness of the tiles

and the size of the tiles (12" X 12", 16" X 16" or 18" X 18", for example), a carton may contain 14, 30 or 45 tiles, for example.

[0007] When a floor is laid with the tiles, it is fairly easy to find the repeat patterns by locating a distinctive image relative to the edges of one tile and finding the same distinctive image relative to the edges on another tile. It would be advantageous to avoid this pattern repeat.

[0008] If the surface covering is a sheet good, the repeat length of the pattern is determined by the circumference of the print cylinder or about 24" or 36". Again, it is fairly easy to find the repeating pattern in a floor laid with the sheet good.

[0009] Tile measuring 16" X 16" are made with print cylinders having 32" or 48" circumferences. Again, since the cylinders are no more than 40" in length, 4 or 6 different tile patterns are produced and the repeat length of sheet goods with a 16" X 16" tile pattern would be 32" or 48".

[0010] In a preferred form of the invention, a surface covering is made by printing at least two print layers. At least two of the print layers forming a printed pattern have different repeat lengths. The print layers may be printed on the same substrate, or on two separate films that are laminated together, or on a substrate and a film that are laminated together.

[0011] If the surface covering is a rotogravure printed sheet good, the repeat length will depend on the circumference of the print cylinders and the difference in the circumference of the print cylinders. If the difference in the circumference of the print cylinder is only a small percentage of their circumferences, the repeat length can be extremely long. For example, if circumferences of the print cylinders were about 24" and the difference in the circumferences were 0.5", the repeat length would be about 48 times the circumference or about 96 feet.

[0012] The present invention also, includes the surface covering made by the method. The surface covering may be a sheet good having an extremely long repeat length or a plurality of tiles having more than nine different printed patterns.

[0013] Another preferred form of the invention is a carton of tiles, in which the tiles have at least nine different printed patterns.

[0014] The present invention will now be described in further detail with reference to the following drawings, wherein:

[0015] Figure 1 is a schematic representation depicting the combination of a stone or slab pattern and a grout line pattern to form a slab tile pattern with a grout line surrounding the slab pattern;

[0016] Figure 2 is a schematic representation depicting the combination of a stone or slab pattern and a grout line pattern to form a slab tile pattern of four tiles with a grout line surrounding the slab patterned tiles;

[0017] Figure 3 is a schematic representation of a method of making an elongated sheet formed from two films with two print layers interposed between the two films;

[0018] Figure 4 is a side view of the elongated sheet of Figure 3 (not to scale);

[0019] Figure 5 is a schematic representation of a method of making an elongated sheet having a substrate and two print layers; and

[0020] Figure 6 is a side view of the elongated sheet of Figure 5 (not to scale).

[0021] As shown in Figure 1, two print patterns 1, 2 can be combined to form a third print pattern 3. In the example of Figure 1, stone or slab pattern 1 is combined with a grout pattern 2 to form a stone and grout line pattern 3, wherein the grout pattern 2 forms a boundary around the slab pattern 1. In one preferred embodiment, the grout pattern 2 is opaque so that the stone or slab pattern 1 cannot be seen through the grout pattern 2.

[0022] In another embodiment, shown in Figure 2, the stone or slab pattern 1 is combined with the grout pattern 2' to form the stone and grout line pattern 3. In this embodiment, the grout pattern 2' forms four smaller slab patterns. Again, the grout pattern 2' may be opaque so that the stone or slab pattern 1 cannot be seen through the grout pattern 2'.

[0023] Referring to Figures 3 and 4, the stone or slab pattern 1 is printed on a white or transparent or translucent film 4 with rotogravure cylinders 5 and forms a printed film 6 including a print layer 7 on the white film 4. The white pigment forming the white film 4 can be distributed throughout the white film 4 or printed on one surface of the white film 4. The grout

pattern 2 is printed on a clear transparent or translucent film 8 with rotogravure cylinders 9 and forms a printed film 10 including a print layer 11 on the clear film 8. The two printed films 6, 10 are laminated together in laminator 12 to form a printed sheet 13.

[0024] Preferably, the two printed films 6, 10 are laminated together with the print layers 7, 11 adjacent. If it is desired for the two printed patterns 1, 2 to visually move relative to one another, the two printed films 6, 10 can be laminated together with the clear film 8 interposed between the two print layers 7, 11.

[0025] The laminated and printed sheet 13 can be laminated onto a surface covering substrate or otherwise used in the manufacture of a surface covering, as is known in the art. Once laminated to the substrate, the sheet may be cut into tiles.

[0026] The slab pattern 1 on the rotogravure cylinder 5 is continuous, i.e., there is no break in the pattern around the circumference of the rotogravure cylinder 5. To be able to print patterns with 12" X 12" grout lines or 6" X 6" grout lines, the rotogravure cylinder 9 may have a circumference of 24" or 36". To form tiles, the printed sheet is cut along grout lines that are spaced 12" apart. To form 16" X 16" tiles or sheet good with a 16" X 16" tile pattern, the rotogravure cylinder 9 would have a 32" or 48" circumference.

[0027] Since the rotogravure cylinder 9 can be about 36" to 40" in length, each revolution of the rotogravure cylinder 9 will produce 6 or 9 12" X 12" tile images, or 4 or 6 16" X 16" tile images, depending on the circumference of the rotogravure cylinder 9. If the repeat length of the rotogravure cylinders were the same, each revolution of the rotogravure cylinders would produce the same 6 or 9, or 4 or 6, tile images, i.e., there would be only 6 or 9, or 4 or 6, different tile patterns.

[0028] However, by making the repeat length of the rotogravure cylinders 5, 9 different, the number of different tile images multiplies many-fold. Since the two printed films 6, 10 have different repeat length, as the two printed films 6, 10 are laminated together, the grout pattern 2 migrates or walks down the length of the slab pattern 1. If the rotogravure cylinder 5, which prints the slab pattern 1, has a circumference of 23.5" and the rotogravure cylinder 9, which prints the grout pattern 2, has a circumference of 24", the rotogravure cylinder 5 must rotate 51 times before the grout line image of the rotogravure cylinder 9 would align in at the same position of slab image of the rotogravure cylinder 5. However, since the rotogravure cylinder 9 prints two rows of two grout patterns 2 per revolution, the leading grout line of the

rotogravure cylinder 9 would print on the same position of the slab image of the rotogravure cylinder 5 as the grout line in the middle of the grout pattern 2 after 25 revolutions of the rotogravure cylinder 9. Therefore, if the slight difference in images of the individual grout lines is ignored, a similar image would be printed after 25 revolutions of the rotogravure cylinder 9 and the repeat length is $24 \times 12'' = 288''$ or 24 feet.

[0029] Therefore, rather than producing 6 different $12'' \times 12''$ tile images, the rotogravure cylinders 5, 9 will produce $(6 \times 24 =)$ 144 substantially different $12'' \times 12''$ tile images. Again, this ignores the differences in the images of the individual grout lines and only considers the slab patterns within the grout line patterns. If the rotogravure cylinders 5, 9 are used to produce sheet goods, the pattern will substantially repeat every 576'' or 48 feet. If the sheet is cut into tiles, 144 tiles having substantially different images would be produced.

[0030] If the rotogravure cylinders 5, 9 were 35.5'' and 36'' in circumference and $12'' \times 12''$ tiles images were printed, the repeat length of substantially the same image would be $36'' \times 24 = 864''$ or 72 feet, again ignoring the differences in the images of the individual grout lines. If tiles were cut from the sheet, $(9 \times 24 =)$ 216 tiles having substantially different images would be produced.

[0031] If the image of the rotogravure cylinder 9 did not repeat within the pattern printed by the rotogravure cylinder 9, as does the $12'' \times 12''$ grout pattern 2, the repeat length of the pattern formed by the rotogravure cylinders 5, 9 would equal the circumference of the larger cylinder times the circumference of the larger cylinder times divided by the difference in circumference of the two cylinders. For two cylinders having circumferences of 24'' and 23.5'', the repeat length would be $24'' \times 24'' / 0.5'' = 1152''$ or 96 feet. If $12'' \times 12''$ tile were cut from the sheet, which is about 36'' in length, 3 tiles per length of the cylinder times 1152'' of repeat length divided by 12'' in length per tile equals 288 different tiles.

[0032] However, if the circumference of the rotogravure cylinders is different than a multiple of the length of the tile and the circumference of the rotogravure cylinders are different, the number of different tiles would increase by factor of the reciprocal of the difference between the tile length and the circumference of the larger cylinder. For example, if the cylinders are 36'' in length and have circumference of 23'' and 23.5'', and the cut tiles are $12'' \times 12''$, the number of different tiles would be 3 tiles per length of the cylinders times the reciprocal of the length of the tile times the circumference of the larger cylinder times the circumference of the larger cylinder times the reciprocal of the difference in circumference of the two cylinders times the reciprocal

of by the difference in the circumference of the larger cylinder and a multiple of the length the tile times the length of the tile $(3 \times (1/12) \times 23.5 \times 23.5 \times (1/0.5) \times (1/0.5) \times 12) = 6,627$ tiles

[0033] If 16" X 16" tile images are produced, the results are similar. The repeat length for sheet goods would be $32 \times 31.5" = 1008"$ or 84 feet with the rotogravure cylinder 5, which prints the slab pattern 1, having a circumference of 31.5" and the rotogravure cylinder 9, which prints the grout pattern 2, having a circumference of 32", or $48 \times 47.5" = 2280"$ or 190 feet with the rotogravure cylinder 5, which prints the slab pattern 1, having a circumference of 47.5" and the rotogravure cylinder 9, which prints the grout pattern 2, having a circumference of 48". The number of substantially different tiles would be $4 \times 32 = 128$ or $6 \times 32 = 192$ for rotogravure cylinder 9 having 32" or 48" circumferences, respectively.

[0034] Two clear films may be substituted for the white film 4 and clear film 8, in which case the two films can be laminated together with the two films interposed between the two print layers, or the two print layers can be interposed between the two films, or one print layer can be interposed between the two films and one film interposed between the two print layers. Also, both sides of the same clear film may be print upon.

[0035] Referring to Figures 5 and 6, in another embodiment, the slab pattern 1 is printed onto a surface covering substrate 14 with rotogravure cylinder 5 and then the grout pattern 2 is printed over the slab pattern 1 with rotogravure cylinder 9 forming the stone and grout line pattern 3. A wear layer 15 may be applied to the stone and grout line pattern 3. A clear layer may be interposed between the slab pattern 1 and the grout pattern 2. Again, the surface covering sheet may be cut into tiles along the some or all of the grout lines.

[0036] The invention is described with the printed patterns being a stone or slab pattern 1 and a grout pattern 2. However, the invention is not limited to such patterns. The patterns could be two or more overall patterns, such as two or more fanciful patterns or two or more different veining patterns, for example, in which case the pattern nearest the exposed surface of the surface covering may be translucent.

[0037] The invention is not limited to rotogravure printing. Other forms of printing that can be used include flexography and offset lithography, as long as at least two of the print patterns have different repeat lengths.

Claims

1. A method of making a surface covering comprising printing two print layers, each of the print layers forming a printed pattern, the printed patterns having different repeat lengths.
2. The method of claim 1, wherein the printed patterns are printed by rotogravure printing.
3. The method of claim 1, wherein a multilayer sheet comprising the two print layers is cut into a plurality of tiles.
4. The method of claim 1, wherein the first of the two print layers is printed on a first film, the second of the two print layers is printed on a second film, and the two printed films are laminated together.
5. The method of claim 4, wherein the two printed films are laminated together with the two print layers adjacent.
6. The method of claim 1, wherein the first of the two print layers is printed on an elongated substrate and the second of the two print layers is printed on the first print layer.
7. The method of claim 1, wherein the first of the two printed patterns is a stone design and the second of the two printed patterns is grout line pattern.
8. The method of claim 7, wherein the second of the two printed patterns is opaque and the first of the two printed patterns does not show through the second of the two printed patterns.
9. A surface covering comprising two print layers, each of the print layers forming a different printed pattern, the two printed patterns having different repeat lengths.
10. The surface covering of claim 8, wherein the two print layers are adjacent.
11. The surface covering of claim 8, wherein a transparent layer is interposed between the two print layers.
12. The surface covering of claim 8, wherein the first of the two printed patterns is a stone design and the second of the two printed patterns is grout line pattern.

13. The surface covering of claim 8, wherein the surface covering is a plurality of tiles having more than nine different printed patterns.
14. The surface covering of claim 8, wherein the print layer nearest the exposed surface of the surface covering is opaque.
15. The surface covering of claim 8, wherein the print layer nearest the exposed surface of the surface covering is translucent.
16. A carton of tiles comprising a carton and plurality of tiles, wherein the plurality of tiles have more than nine different printed patterns.
17. The carton of tiles of claim 15, wherein the tiles comprise two print layers, each of the print layers forming a different printed pattern, the two printed patterns having different repeat lengths.
18. The carton of tiles of claim 16, wherein the two print layers are adjacent.
19. The carton of tiles of claim 16, wherein the first of the two printed patterns is a stone design and the second of the two printed patterns is grout line pattern.
20. The carton of tiles of claim 19, wherein the second of the two printed patterns is opaque.

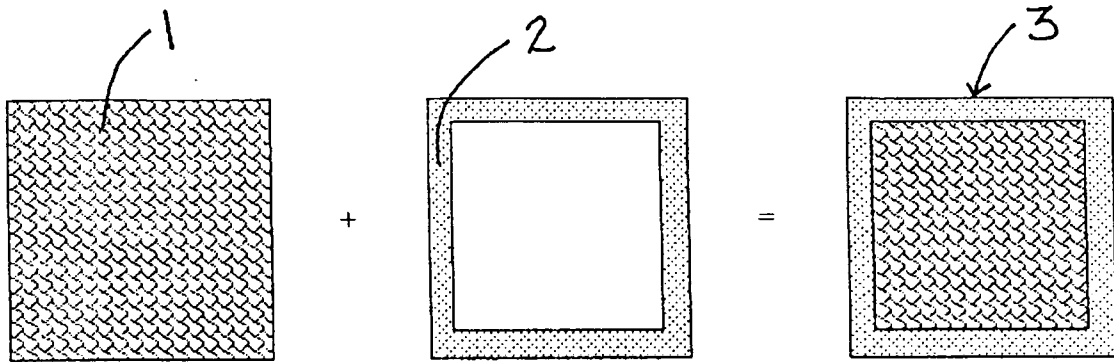


FIG 1

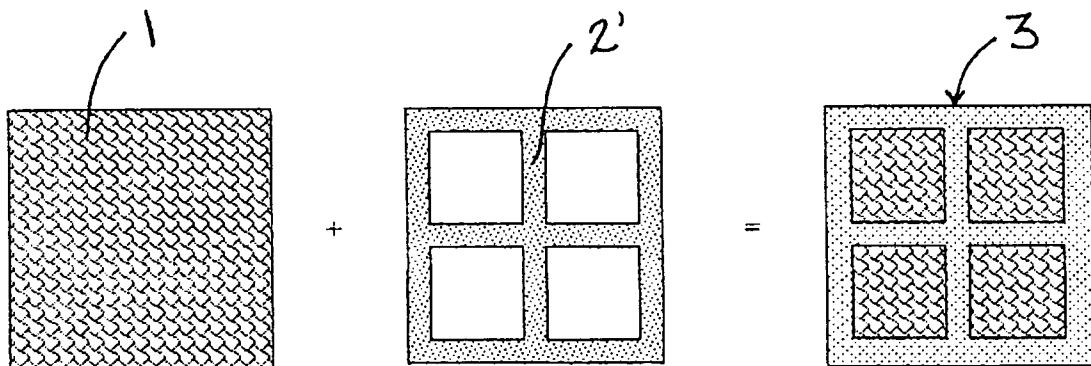


FIG 2

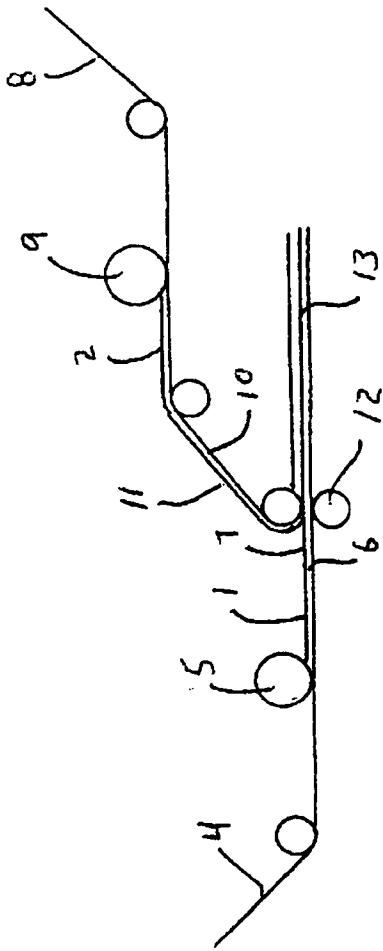


FIG 3



FIG 5

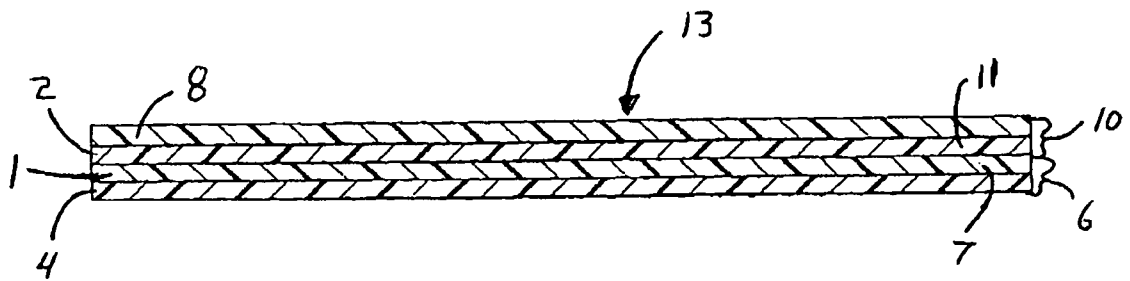


FIG 4

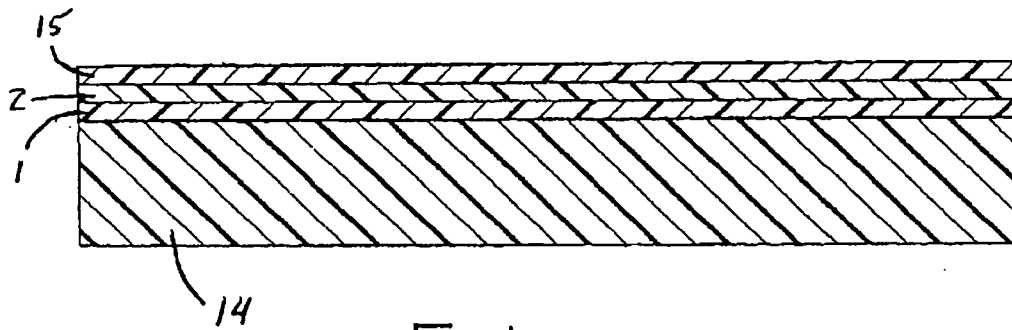


FIG 6

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US 09/04370

A. CLASSIFICATION OF SUBJECT MATTER

IPC(8) - B41L 47/46 (2009.01)

USPC - 101/53

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

USPC: 101/53

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
USPC:101/36, 45, 53, 212 (text search - see terms below)Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
PubWEST(USPT,PGPB,EPAB,JPAB); Google Scholar, Dialog Web (DB:344, 347, 348, 349, 371, 654, 345, 351, 65, 35, 2)
Search Terms: pattern, rotogravure, lamination, film, cut, repeat, transparent, offset, printing, length, surface, covering, grout, cylinder, width, radius, diameter

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X --- Y	US 2005/0249924 A1 (REICHWEIN et al.) 10 November 2005 (10.11.2005), entire document, especially; para [0001], [0009], [0013]-[0025].	1-6, 9-11, 13-18 ----- 7, 8, 12, 19, 20
Y	US 5,961,903 A (EBY et al.) 05 October 1999 (05.10.1999), entire document, especially; col 3, ln 10-67, col 5, ln 16-32.	7, 8, 12, 19, 20
A	US 2006/0201351 A1 (GROSS et al.) 14 September 2006 (14.09.2006), entire document.	1-20
A	US 7,418,903 B2 (LIANG et al.) 02 September 2008 (02.09.2008), entire document.	1-20

☐ Further documents are listed in the continuation of Box C.
☐

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

08 September 2009 (08.09.2009)

Date of mailing of the international search report

21 SEP 2009

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US, Commissioner for Patents
P.O. Box 1450, Alexandria, Virginia 22313-1450

Facsimile No. 571-273-3201

Authorized officer:

Lee W. Young

PCT Helpdesk: 571-272-4300

PCT OSP: 571-272-7774