

CORRECTED VERSION

(19) World Intellectual Property
Organization
International Bureau



(10) International Publication Number
WO 2013/162437 A8

(43) International Publication Date
31 October 2013 (31.10.2013)

- (51) International Patent Classification:
F16C 23/08 (2006.01) *F16C 33/46* (2006.01)
- (21) International Application Number:
PCT/SE2013/000054
- (22) International Filing Date:
17 April 2013 (17.04.2013)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
1200242-4 23 April 2012 (23.04.2012) SE
- (71) Applicant: AKTIEBOLAGET SKF [SE/SE]; S-415 50
Göteborg (SE).
- (72) Inventors: WENDEBERG, Hans; Roddbåtsgatan 1, S-
426 71 Västra Frölunda (SE). EFRAIMSSON, Linus;
Gjutegården 99, S-436 45 ASKIM (SE).
- (74) Agent: GENTZEL, Marcus; SKF Patent Department
Göteborg, S-415 50 Göteborg (SE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: TOROIDAL ROLLER BEARING

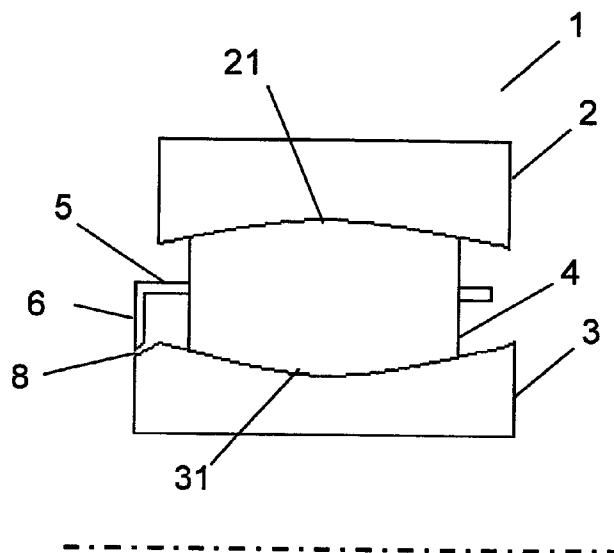


Fig. 1

(57) Abstract: The invention regards a toroidal roller bearing (1), which comprises an outer ring (2), an inner ring (3) and a plurality of roller elements (4) interposed between the outer and inner ring (2, 3), wherein the toroidal roller bearing (1) allows for angular and axial displacement between said outer and inner ring (2, 3). Furthermore, the bearing (1) presents a cage (5) for holding the roller elements (4), wherein the cage (5) presents means (6) for axially guiding the roller elements (4) against at least one of the outer ring (2), inner ring (3) or a separate element (7) located outside the toroidal roller bearing (1).



Declarations under Rule 4.17:

— *of inventorship (Rule 4.17(iv))*

Published:

— *with international search report (Art. 21(3))*

(48) Date of publication of this corrected version:

15 January 2015

(15) Information about Correction:

see Notice of 15 January 2015