

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
28 February 2002 (28.02.2002)

PCT

(10) International Publication Number
WO 02/16111 A1

(51) International Patent Classification⁷: **B29C 47/06**,
B32B 1/08, 27/08, F16L 9/12, 11/04

(74) Agent: **LILLY, James, V.**; Post Office Box 33427, Saint Paul, MN 55133-3427 (US).

(21) International Application Number: PCT/US00/34718

(22) International Filing Date:
20 December 2000 (20.12.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
09/644,731 23 August 2000 (23.08.2000) US

(71) Applicant: **DYNEON LLC** [US/US]; 6744 33rd Street North, Oakdale, MN 55128 (US).

(72) Inventors: **FUKUSHI, Tatsuo**; Post Office Box 33427, Saint Paul, MN 55133-3427 (US). **KOLB, Robert, E.**; Post Office Box 33427, Saint Paul, MN 55133-3427 (US). **HOFF, Craig, R.**; Post Office Box 33427, Saint Paul, MN 55133-3427 (US). **WELLNER, Steven, J.**; Post Office Box 33427, Saint Paul, MN 55133-3427 (US). **MOLNAR, Attila, A.**; Post Office Box 33427, Saint Paul, MN 55133-3427 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: PROCESS FOR PREPARING A MULTI-LAYER ARTICLE HAVING A FLUOROPLASTIC LAYER AND AN ELASTOMER LAYER

(57) Abstract: A method for enhancing the bond strength between a VDF-containing fluoroplastic layer and an elastomer layer of a multi-layer article. A VDF-containing fluoroplastic composition is applied to the surface of a precursor article that includes a curable elastomer layer to form a fluoroplastic layer. Prior to application of the fluoroplastic composition, the curable elastomer layer is thermally insulated to prevent it from undergoing substantial heating. Following application, the fluoroplastic layer is heated and the curable elastomer layer is cured (e.g., thermally cured). Preferably, the elastomer cure occurs separately from and subsequent to heating the fluoroplastic layer. The combination of thermally insulating the curable elastomer layer prior to application of the fluoroplastic composition and heating the fluoroplastic layer following application of the fluoroplastic composition results in formation of a strong bond between the fluoroplastic and elastomer layers upon cure.



WO 02/16111 A1

PROCESS FOR PREPARING A MULT-LAYER ARTICLE HAVING A FLUOROPLASTIC LAYER AND AN ELASTOMER LAYER

TECHNICAL FIELD

5 This invention relates to preparing multi-layer articles having a fluoroplastic layer
and an elastomer layer.

BACKGROUND

Fluorine-containing polymers (also known as "fluoropolymers") are a commercially useful class of materials. Fluoropolymers include, for example, crosslinked fluoroelastomers and semi-crystalline or glassy fluoroplastics. Fluoroplastics are
10 generally of high thermal stability and are particularly useful at high temperatures. They may also exhibit extreme toughness and flexibility at very low temperatures. Many of these fluoroplastics are almost totally insoluble in a wide variety of solvents and are generally chemically resistant. Some have extremely low dielectric loss and high dielectric strength, and may have unique non-adhesive and low friction properties. See,
15 e.g., F.W. Billmeyer, *Textbook of Polymer Science*, 3d ed., pp. 398-403, John Wiley & Sons, New York (1984).

Fluoroelastomers, particularly the copolymers of vinylidene fluoride with other ethylenically unsaturated halogenated monomers such as hexafluoropropylene, have particular utility in high temperature applications such as seals, gaskets, and linings. See,
20 e.g., R.A. Brullo, "Fluoroelastomer Rubber for Automotive Applications," *Automotive Elastomer & Design*, June 1985; "Fluoroelastomer Seal Up Automotive Future," *Materials Engineering*, October 1988; and W.M. Grootaert et al., "Fluorocarbon Elastomers," Kirk-Othmer, *Encyclopedia of Chemical Technology*, vol. 8, pp. 990-1005 (4th ed., John Wiley & Sons, 1993).

25 Multi-layer constructions containing a fluoropolymer enjoy wide industrial application. Such constructions find utility, for example, in fuel line hoses and related containers and hoses or gaskets in the chemical processing field. Increased concerns with evaporative fuel standards give rise to a need for fuel system components that have increased barrier properties to minimize the permeation of fuel or fuel vapors through
30 automotive components such as fuel filler lines, fuel supply lines, fuel tanks, and other

components of the engine's fuel or vapor recovery systems. Various types of tubing have been proposed to address these concerns.

Adhesion between the layers of a multi-layered article may need to meet various performance standards depending on the use of the finished article. However, it is often
5 difficult to establish high bond strengths when one of the layers is a fluoropolymer. Various methods have been proposed to address this problem. One approach is to use an adhesive layer or tie layer between the fluoropolymer layer and the second polymer layer. Surface treatments for the fluoropolymer layer, including solvent etching and corona discharge, have also been employed to enhance adhesion. In the case of fluoropolymers
10 containing interpolymers derived from vinylidene fluoride, exposure of the fluoropolymer to a dehydrofluorinating agent such as a base has been used, as well as polyamine reagents applied to the fluoropolymer surface or incorporated within the fluoropolymer itself.

SUMMARY

15 The invention relates to a method for enhancing the bond strength between a fluoroplastic layer and an elastomer layer of a multi-layer article. The elastomer may be a fluoroelastomer or a non-fluorinated elastomer. According to the method, a fluoroplastic composition that includes interpolymers derived from vinylidene fluoride (VDF) is applied to the surface of a precursor article that includes a curable elastomer layer,
20 preferably by extrusion coating the composition in molten form through a crosshead die, to form a fluoroplastic layer. Preferably, the composition is applied directly to the surface of the elastomer layer. Prior to application of the fluoroplastic composition, the curable elastomer layer is thermally insulated to prevent it from undergoing substantial heating. In one embodiment, where molten fluoroplastic composition is extrusion coated through a
25 crosshead die, thermal insulation is achieved by equipping the die with a sleeve located at least partially within the upstream end of the die that receives and thermally insulates the curable elastomer layer prior to application of the fluoroplastic composition.

Following application, the fluoroplastic layer is heated and the curable elastomer layer is cured (preferably thermally cured). Preferably, the elastomer cure occurs
30 separately from and subsequent to heating of the fluoroplastic layer. The combination of thermally insulating the curable elastomer layer prior to application of the fluoroplastic

composition and heating the fluoroplastic layer following application of the fluoroplastic composition results in formation of a strong bond between the fluoroplastic and elastomer layers upon cure, even in the absence of adhesion aids such as surface treatments, separate adhesive layers, and the like. For example, bond strengths of at least 15 N/cm, can be achieved.

Multi-layer articles prepared according to this method can be provided in a wide variety of shapes, including sheets, films, containers, hoses, tubes, and the like. The articles are especially useful wherever chemical resistance and/or barrier properties are necessary. Examples of specific uses for the articles include their use in rigid and flexible retroreflective sheets, adhesive articles such as adhesive tapes, paint replacement films, drag reduction films, fuel line and filler neck hoses, exhaust handling hoses, fuel tanks, and the like. The articles are also useful in chemical handling and processing applications, and as wire and cable coatings or jackets.

The details of one or more embodiments of the invention are set forth in the accompanying drawings and the description below. Other features, objects, and advantages of the invention will be apparent from the description and drawings, and from the claims.

DESCRIPTION OF DRAWINGS

FIG. 1 is a schematic drawing of a process for making a multi-layered article according to the invention.

Like reference symbols in the various drawings indicate like elements.

DETAILED DESCRIPTION

Referring to Fig. 1, there is shown one embodiment of a process for preparing a multi-layer article featuring a fluoroplastic layer bonded to an elastomer layer. An extruder 20 extrudes a curable elastomer composition through a die 21 to form a length of tubing 22 having a curable elastomer layer. A second extruder 23 located downstream of extruder 20 and equipped with a crosshead die 25 coats a layer of molten fluoroplastic onto the surface of the curable elastomer layer. A plastic (or other thermally insulating material) sleeve 24, e.g., a tetrafluoroethylene sleeve, inserted partially within the upstream opening of die 25 receives tubing 22 and thermally insulates it prior to extrusion

coating, thereby preventing substantial heating of the curable elastomer layer prior to application of the fluoroplastic. The absence of substantial heating prior to application of the fluoroplastic contributes to the development, upon cure, of a strong bond between the fluoroplastic and elastomer layers. It may also be desirable to cool the curable elastomer prior to application of the fluoroplastic. This may be accomplished, for example, by treating the curable elastomer layer with a solvent that could then be removed by evaporation.

Following extrusion coating, the resulting multi-layer article 27, featuring a fluoroplastic layer deposited on a curable elastomer layer, enters a tubular heater 28 that heats the fluoroplastic layer. An example of a useful tubular heater is a radiant heater. During the heating process, heat is transferred from heater 28 to the fluoroplastic layer, and then transferred inwardly from the fluoroplastic layer to the curable elastomer layer. It is believed that this heating step contributes to the development, upon cure, of a strong bond between the fluoroplastic and elastomer layers. Following the heating operation, the multi-layer article may be cooled, e.g., by immersion in a cooling bath 29.

The elastomer layer may be cured either in heater 28, or, more preferably, in a separate step under pressure and higher temperature either before or after immersion in cooling bath 29. For example, it may be desirable to cool the article in bath 29, cut it into appropriately sized pieces, and then heat the individual pieces under pressure, e.g., in an autoclave, to cure the curable elastomer layer.

The fluoroplastic preferably is a material that is capable of being extrusion coated. Such fluoropolastics typically have melting temperatures ranging from about 100 to about 330°C, more preferably from about 150 to about 270°C. The fluoroplastic includes interpolymerized units derived from VDF and may further include interpolymerized units derived from other fluorine-containing monomers, non-fluorine-containing monomers, or a combination thereof. Examples of suitable fluorine-containing monomers include tetrafluoroethylene (TFE), hexafluoropropylene (HFP), chlorotrifluoroethylene (CTFE), 3-chloropentafluoropropene, perfluorinated vinyl ethers (e.g., perfluoroalkoxy vinyl ethers such as $\text{CF}_3\text{OCF}_2\text{CF}_2\text{OCF}=\text{CF}_2$ and perfluoroalkyl vinyl ethers such as $\text{CF}_3\text{OCH}=\text{CF}_2$ and $\text{CF}_3\text{CF}_2\text{CF}_2\text{OCF}=\text{CF}_2$), and fluorine-containing di-olefins such as perfluorodiallylether and perfluoro-1,3-butadiene. Examples of suitable non-fluorine-containing monomers include olefin monomers such as ethylene, propylene, and the like.

The VDF-containing fluoroplastics may be prepared using emulsion polymerization techniques as described, e.g., in Sulzbach et al., U.S. 4,338,237, hereby incorporated by reference. Useful commercially available VDF-containing fluoroplastics include, for example, THV 200, THV 400, THV 500G, THV 610X fluoropolymers (available from Dyneon LLC, St. Paul, MN), KYNAR 740 fluoropolymer (available from Atochem North America, Philadelphia, PA), HYLAR 700 (available from Ausimont USA, Inc., Morristown, NJ), and FLUOREL FC-2178 (available from Dyneon LLC).

A particularly useful fluoroplastic includes interpolymerized units derived from at least TFE and VDF in which the amount of VDF is at least 0.1% by weight, but less than 20% by weight. Preferably, the amount of VDF ranges from 3-15% by weight, more preferably from 10-15% by weight.

The curable elastomer may be a fluoroelastomer or a non-fluorinated elastomer. Examples of suitable fluoroelastomers include VDF-HFP copolymers, VDF-HFP-TFE terpolymers, TFE-propylene copolymers, and the like. Examples of suitable non-fluorinated elastomers include acrylonitrile butadiene (NBR), butadiene rubber, chlorinated and chlorosulfonated polyethylene, chloroprene, ethylene-propylene monomer (EPM) rubber, ethylene-propylene-diene monomer (EPDM) rubber, epichlorohydrin (ECO) rubber, polyisobutylene, polyisoprene, polysulfide, polyurethane, silicone rubber, blends of polyvinyl chloride and NBR, styrene butadiene (SBR) rubber, ethylene-acrylate copolymer rubber, and ethylene-vinyl acetate rubber. Commercially available elastomers include NipolTM 1052 NBR (Zeon Chemical, Louisville, KY), HydrinTM C2000 epichlorohydrin-ethylene oxide rubber (Zeon Chemical, Louisville, KY), HypalonTM 48 chlorosulfonated polyethylene rubber (E.I. DuPont de Nemours & Co., Wilmington, DE), NordelTM EPDM (R.T. Vanderbilt Co., Inc., Norwalk, CT), VamacTM ethylene-acrylate elastomer (E.I. DuPont de Nemours & Co. Wilmington, DE), KrynacTM NBR (Bayer Corp., Pittsburgh, PA), PerbunanTM NBR/PVC blend (Bayer Corp., Pittsburgh, PA), TherbanTM hydrogenated NBR (Bayer Corp., Pittsburgh, PA), ZetpolTM hydrogenated NBR (Zeon Chemical, Louisville, KY), SantopreneTM thermoplastic elastomer (Advanced Elastomer Systems, Akron, OH), and KeltanTM EPDM (DSM Elastomers Americas, Addis, LA).

A curing agent is preferably blended with the curable elastomer to facilitate cure. Examples of useful curing agents include imidazolines, diamines, internal salts of

diamines, thioureas, and polyphenol curing agents as discussed in U.S. 4,287,322 (Worm), incorporated herein by reference. Such agents are particularly useful for epichlorohydrin compositions. Other examples, particularly useful in the curing of nitrile rubber-containing compositions, include peroxide compounds and sulfur-containing compounds.

5 In the case of curable fluoroelastomers, examples of useful curing agents include polyols in combination with organo-onium salts (e.g., organo-ammonium, organo-phosphonium, and organo-sulfonium salts). Specific examples are described, e.g., in Fukushi, U.S. 5,658,671, "Fluoroelastomer Coating Composition," hereby incorporated by reference. Diamines and peroxides are also useful.

10 The multi-layer article may contain additional polymer layers as well. Examples of suitable polymer layers include non-fluorinated polymers such as polyamides, polyimides, polyurethanes, polyolefins, polystyrenes, polyesters, polycarbonates, polyketones, polyureas, polyacrylates, and polymethylmethacrylates.

15 A particularly useful construction for fuel applications features a relatively thin layer of the fluoroplastic that acts as a barrier layer bonded on one face to a relatively thick layer of non-fluorinated polymer that acts as a coverstock, and on the opposite face to a relatively thin elastomer layer (e.g., a fluoroelastomer or a non-fluorinated elastomer) that performs a sealing function. The coverstock provides the article with structural integrity. To further enhance structural integrity, reinforcing aids such as fibers, mesh, and/or a wire
20 screen may be incorporated in the multi-layer article, e.g., as separate layers or as part of an existing layer.

 Any or all of the individual layers of the multi-layer article may further include one or more additives. Examples of useful additives include pigments, plasticizers, tackifiers, fillers, electrically conductive materials (e.g., of the type described in U.S. 5,552,199),
25 electrically insulating materials, stabilizers, antioxidants, lubricants, processing aids, impact modifiers, viscosity modifiers, and combinations thereof. For example, in the case of the multi-layer article for fuel applications described above, it is often useful for the innermost layer of the construction to be electrically conductive.

 In some cases, it may be desirable to further enhance bond strength between
30 individual layers of the multi-layer article. For example, the article may be subjected to additional heat, pressure, or both, following cure.

Another way of increasing the bond strength between the layers is to treat the surface of one or more of the layers prior to forming the multi-layered articles. Such surface treatments may consist of a solution treatment using a solvent. If the solvent contains a base, e.g., 1,8-diaza[5.4.0]bicyclo undec-7-ene (DBU), treatment of the fluoropolymer will result in some degree of dehydrofluorination. Such dehydrofluorination may be beneficial to promote adhesion to subsequently applied materials. This is particularly true when the subsequently applied material contains any agent that is reactive to sites of unsaturation.

Other examples of surface treatments include charged atmosphere treatments such as corona discharge treatment or plasma treatment. Electron beam treatment is also useful.

Interlayer adhesion may also be enhanced using an agent such as an aliphatic di- or polyamine. The amine can be of any molecular weight that, when used, will result in an improvement in the adhesive bond strength between the layers of the multi-layer article. A particularly useful polyamine is polyallylamine having a molecular weight greater than about 1,000, as measured by gel permeation chromatography. An example of a useful commercially available polyamine is polyallyl amine having a molecular weight of about 3,000 available from Nitto Boseki Co., Ltd.

The amine may be incorporated into one or more of the layers of the multi-layer article prior to forming the article using conventional means such as melt-mixing.

Alternatively, the amine may be applied to a surface of one or more of the layers using conventional coating methods such as spray coating, curtain coating, immersion coating, dip coating, and the like.

The invention will now be described further by way of the following examples.

EXAMPLES

The following examples describe the preparation of various multi-layer articles featuring a fluoroplastic layer bonded to an elastomer layer. In each example, the elastomer was a fluoroelastomer prepared by combining the following ingredients: 100 parts Dyneon FE-5830Q fluoroelastomer (commercially available from Dyneon LLC, St. Paul, MN); 13 parts N-762 carbon black (commercially available from Cabot Corp., Alpharetta, GA); 6 parts calcium hydroxide HP (commercially available from C.P. Hall, Chicago, IL); 3 parts magnesium oxide (commercially available from Morton

International, Danvers, MA, under the designation “ElastomagTM 170”); and 6 parts calcium oxide HP (commercially available from C.P. Hall, Danvers, MA). The composition was extruded to form the fluoroelastomer in the shape of a tube having an outer diameter of 12 mm and a wall thickness of 0.33 mm.

5

Example 1

A cross-head die equipped with a polytetrafluoroethylene (PTFE) sleeve was used to coat a molten fluoroplastic composition onto the surface of the fluoroelastomer tube. The fluoroplastic was a TFE-HFP-VDF terpolymer featuring 76 wt.% TFE, 11 wt.% HFP, and 13 wt.% VDF. The fluoroplastic had a melt flow index of 7 and a melting point of 233°C. The PTFE sleeve prevented heating of the fluoroelastomer surface prior to application of the fluoroplastic.

Following application of the fluoroplastic composition, the resulting multi-layer article was passed through a 15.2 cm long tubular heater set at 220°C (the surface temperature of the fluoroplastic was 140°C) to heat the article prior to cooling. Once cooled, the article was cut into smaller samples that were then placed on a steel mandrel and thermally cured at a temperature of 160°C and a pressure of 0.4 MPa for 60 minutes using steam in an autoclave. Following cure, the samples were removed from the autoclave and cooled to room temperature.

The peel adhesion of the cured samples was evaluated by making a cut in each sample to separate a 7 mm wide strip of the fluoroplastic outer layer from the fluoroelastomer core in order to provide a tab for adhesion testing. The thickness of the fluoroplastic layer was 0.3 mm. An Instron® Model 1125 tester, available from Instron Corp., set at a 100 mm/min. crosshead speed was used as the test device. Peel strength between the fluoroplastic and fluoroelastomer layers was measured in accordance with ASTM D 1876 (T-Peel Test) with the exception that the peel angle was 90 degrees. The results of two samples were averaged. The average value is reported in Table 1.

Example 2

The procedure of Example 1 was followed except that the fluoroplastic was a TFE-HFP-VDF terpolymer commercially available from Dyneon LLC, St. Paul, MN under the designation “THV-500”. The results of the peel adhesion test are reported in Table 1.

Comparative Example C-1

The procedure of Example 1 was followed except that the PTFE sleeve was not used. The results of the peel adhesion test are reported in Table 1.

5

Comparative Example C-2

The procedure of Example 1 was followed except that the heater was not used. The results of the peel adhesion test are reported in Table 1.

10

Comparative Example C-3

The procedure of Example 1 was followed except that neither the PTFE sleeve nor the heater was used. The results of the peel adhesion test are reported in Table 1.

TABLE 1

Example Number	Sleeve	Heater	Peel Strength (N/cm)
1	Yes	Yes	25.6
2	Yes	Yes	25.8
C-1	No	Yes	14.1
C-2	Yes	No	8.0
C-3	No	No	4.9

15

The results shown in Table 1 demonstrate that thermally insulating the curable elastomer layer prior to application of the fluoroplastic composition, in combination with heating the fluoroplastic layer following application of the fluoroplastic composition to the curable elastomer layer, results in multi-layer articles with enhanced interlayer adhesion upon cure, even in the absence of separate adhesion-promoting measures.

20

A number of embodiments of the invention have been described. Nevertheless, it will be understood that various modifications may be made without departing from the spirit and scope of the invention. Accordingly, other embodiments are within the scope of the following claims.

25

For example, although the process shown in Fig. 1 illustrates the preparation of a multi-layer article in the form of a tube, other shapes may be prepared as well. Also, while

Fig. 1 illustrates the use of extruders to prepare the curable elastomer layer and fluoroplastic layers, other polymer processing techniques may be used. For example, the curable elastomer and fluoroplastic compositions can be prepared in the form of sheets and then laminated together, so long as measures are taken to thermally insulate the curable elastomer prior to application of the fluoroplastic. In addition, although Fig. 1 illustrates the use of a tubular heater for radiantly heating the fluoroplastic layer, other heating methods could be used. For example, in the case of fluoroplastic layers containing, e.g., metal particles, induction heating could be used.

WHAT IS CLAIMED IS:

1. A process for preparing a multi-layer article comprising:
 - (a) providing a precursor article comprising a curable elastomer layer, said article having an exposed surface available for application of a fluoroplastic layer;
 - 5 (b) thermally insulating said curable elastomer layer prior to application of said fluoroplastic layer;
 - (c) applying a fluoroplastic composition comprising interpolymers of vinylidene fluoride units onto said exposed surface of said precursor article to form a fluoroplastic layer;
 - 10 (d) heating said fluoroplastic layer; and
 - (e) curing said curable elastomer layer to form a multi-layer article comprising a fluoroplastic layer and an elastomer layer.
2. A process according to claim 1 comprising applying said fluoroplastic
15 composition in molten form.
3. A process according to claim 2 comprising applying said fluoroplastic composition by extrusion coating said fluoroplastic composition through a crosshead die onto said exposed surface of said precursor article.
20
4. A process according to claim 3 wherein said die comprises a die body that receives said fluoroplastic composition, an upstream opening for receiving said precursor article, a downstream opening, and a sleeve located at least partially within said upstream opening of said die that receives said precursor article and thermally insulates said curable
25 elastomer layer prior to application of said fluoroplastic composition.
5. A process according to claim 1 further comprising cooling said multi-layer article subsequent to heating said fluoroplastic layer.
- 30 6. A process according to claim 1 comprising thermally curing said curable elastomer layer.

7. A process according to claim 1 comprising curing said curable elastomer layer subsequent to heating said fluoroplastic layer.

5 8. A process according to claim 1 comprising providing said precursor article by extruding a curable elastomer composition through a die to form said precursor article.

9. A process according to claim 1 wherein said curable elastomer layer has an exposed surface available for application of said fluoroplastic composition and said fluoroplastic composition is applied directly to said exposed surface of said curable elastomer layer.

10

10. A process according to claim 1 wherein said elastomer comprises a fluoroelastomer.

15 11. A process according to claim 1 wherein said elastomer comprises a non-fluorinated elastomer.

12. A process according to claim 1 wherein said fluoroplastic has a melting temperature ranging from about 100 to about 330°C.

20

13. A process according to claim 1 wherein said fluoroplastic has a melting temperature ranging from about 150 to about 270°C.

14. A process according to claim 1 wherein said fluoroplastic comprises interpolymerized units derived from tetrafluoroethylene, vinylidene fluoride, and a monomer selected from the group consisting of hexafluoropropylene, perfluorinated alkoxy vinyl ethers, perfluorinated alkyl vinyl ethers, olefins, and combinations thereof.

25

15. A process according to claim 14 wherein the amount of said vinylidene fluoride units is at least 3% by weight but less than 20% by weight.

30

16. A process according to claim 14 wherein the amount of said vinylidene fluoride units is between 10 and 15% by weight.

17. A process according to claim 1 further comprising bonding a polymer layer to said fluoroplastic layer to form a multi-layer article comprising said fluoroplastic layer interposed between said elastomer layer and said polymer layer.

18. A process according to claim 17 comprising bonding said polymer layer directly to said fluoroplastic layer.

19. A process according to claim 17 wherein said polymer comprises an elastomer.

20. A process according to claim 19 wherein said elastomer comprises a nitrile rubber.

21. A process according to claim 1 wherein said multi-layer article is in the form of a tube.

22. A process according to claim 1 wherein the adhesion between said fluoroplastic layer and said elastomer layer is at least 15 N/cm.

23. A process according to claim 1 further comprising cooling said curable elastomer layer prior to application of said fluoroplastic composition.

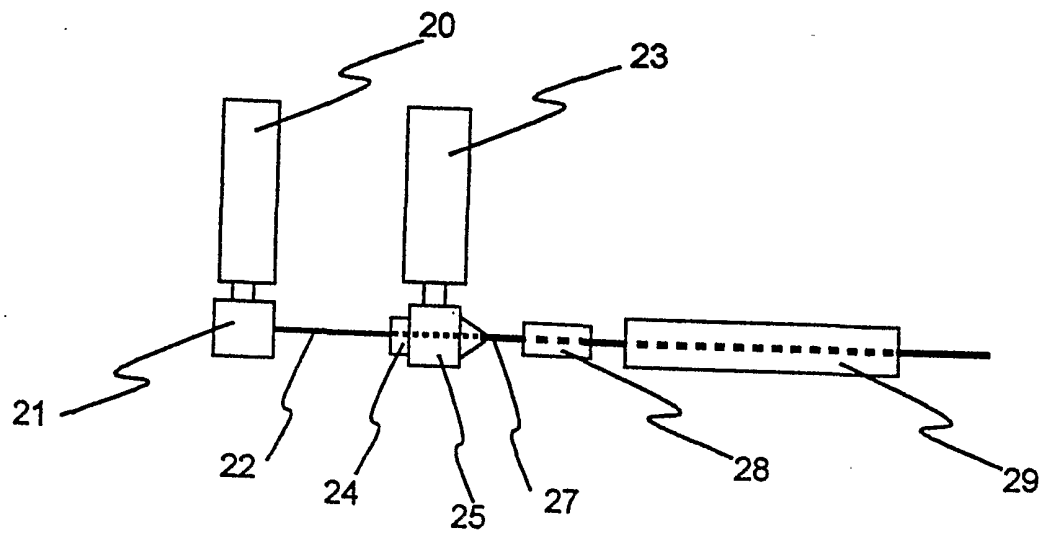
24. A process for preparing a multi-layer article comprising:

(a) providing a precursor article comprising a curable elastomer layer, said curable elastomer layer having an exposed surface available for application of a fluoroplastic layer;

(b) extrusion coating a molten fluoroplastic composition comprising interpolymerized vinylidene fluoride units through a crosshead die onto said exposed surface of said curable elastomer layer to form a fluoroplastic layer,

- said die comprising a die body that receives said molten fluoroplastic composition, an upstream opening for receiving said precursor article, a downstream opening, and a sleeve located at least partially within said upstream opening of said die that receives said precursor article and thermally insulates said curable elastomer layer prior to application
- 5 of said fluoroplastic composition;
- (c) heating said fluoroplastic layer; and
 - (d) thermally curing said curable elastomer layer subsequent to heating said fluoroplastic layer to form a multi-layer article comprising a fluoroplastic layer and an elastomer layer.

1/1

**Fig. 1**

INTERNATIONAL SEARCH REPORT

Int'l onal Application No
PCT/US 00/34718

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 B29C47/06 B32B1/08 B32B27/08 F16L9/12 F16L11/04

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B29C B32B F16L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 641 445 A (DUKES GLENN V ET AL) 24 June 1997 (1997-06-24) column 1, line 15 -column 2, line 23 column 2, line 52 -column 3, line 55 column 5, line 63 -column 6, line 1 column 6, line 46 - line 56 column 7, line 38 - line 56 claims 1,2,19-23 ----	1,2, 8-10, 12-19, 21,24
A	EP 0 551 094 A (PILOT IND INC) 14 July 1993 (1993-07-14) figures 3-21 ----- -/--	1,24

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- * & * document member of the same patent family

Date of the actual completion of the international search

18 April 2001

Date of mailing of the international search report

25/04/2001

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Lindner, T

INTERNATIONAL SEARCH REPORT

Int onal Application No
PCT/US 00/34718

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 99 32557 A (DYNEON LLC) 1 July 1999 (1999-07-01) page 1, line 10 - line 14 page 3, line 23 -page 8, line 29 page 9, line 26 -page 11, line 30 page 13, line 30 -page 14, line 10 examples 1-8; tables 1,2 ---	10-22
A	US 4 895 744 A (BRIGGS MILTON ET AL) 23 January 1990 (1990-01-23) column 1, line 64 -column 3, line 17; figure 4 column 11, line 22 - line 40 ---	1,3,4
A	PATENT ABSTRACTS OF JAPAN vol. 013, no. 036 (M-790), 26 January 1989 (1989-01-26) & JP 63 246224 A (SUMITOMO ELECTRIC IND LTD), 13 October 1988 (1988-10-13) abstract -----	1,3,4

INTERNATIONAL SEARCH REPORT

 Int'l Application No
 PCT/US 00/34718

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5641445 A	24-06-1997	WO 9846412 A AU 2733397 A BR 9714610 A DE 980306 T EP 0980306 A	22-10-1998 11-11-1998 23-05-2000 05-10-2000 23-02-2000
EP 0551094 A	14-07-1993	AT 165273 T AU 665598 B AU 3101493 A BR 9300057 A CA 2086032 A,C DE 69318043 D DE 69318043 T ES 2114959 T JP 5245989 A JP 8005167 B KR 190411 B MX 9300020 A US 5759329 A US 5958532 A US 5554425 A US 5500257 A US 5916404 A	15-05-1998 11-01-1996 08-07-1993 13-07-1993 07-07-1993 28-05-1998 13-08-1998 16-06-1998 24-09-1993 24-01-1996 01-06-1999 28-02-1994 02-06-1998 28-09-1999 10-09-1996 19-03-1996 29-06-1999
WO 9932557 A	01-07-1999	AU 1815699 A CN 1282351 T EP 1040164 A	12-07-1999 31-01-2001 04-10-2000
US 4895744 A	23-01-1990	AT 52442 T AU 588484 B AU 7852987 A CA 1281522 A DE 3762586 D DK 103888 A,B, EP 0252388 A JP 6049317 B JP 63502016 T WO 8800125 A US 5019433 A US 4798526 A	15-05-1990 14-09-1989 29-01-1988 19-03-1991 13-06-1990 26-02-1988 13-01-1988 29-06-1994 11-08-1988 14-01-1988 28-05-1991 17-01-1989
JP 63246224 A	13-10-1988	NONE	