

676300

AUSTRALIA

SPRUSON & FERGUSON

PATENTS ACT 1990

**PATENT REQUEST: STANDARD PATENT**

I/We, the Applicant(s)/Nominated Person(s) specified below, request I/We be granted a patent for the invention disclosed in the accompanying standard complete specification.

**[70,71] Applicant(s)/Nominated Person(s):**

Harnischfeger Corporation, incorporated in Delaware, of 13400 Bishops Lane, Brookfield, Wisconsin, 53005, UNITED STATES OF AMERICA

**[54] Invention Title:**

Fairlead Mechanism with Synchronized Sheaves

**[72] Inventor(s):**

Robert H. Blaszyński and Carl A. Soczka

**[74] Address for service in Australia:**

**Spruson & Ferguson**, Patent Attorneys  
Level 33 St Martins Tower  
31 Market Street  
Sydney New South Wales Australia (Code SF)

**Details of Basic Application(s):**

**[31] Appl'n No(s):**

**[33] Country:**

**[32] Application Date:**

086,154

US


1 July 1993

**Basic Applicant(s):** Robert H. Blaszyński and Carl A. Soczka

DATED this SEVENTEENTH day of JUNE 1994

Harnischfeger Corporation

By:



Registered Patent Attorney

S 047060 170694

IRN: 274941

INSTR CODE: 53350

Australia

Patents Act 1990

NOTICE OF ENTITLEMENT

I, John Gordon Hinde, of Spruson & Ferguson, St Martins Tower, 31 Market Street, Sydney, New South Wales 2000, Australia, being the patent attorney for the Applicant(s)/Nominated Person(s) in respect of an application entitled:

Fairlead Mechanism with Synchronized Sheaves

state the following:-

The Applicant(s)/Nominated Person(s) has/have entitlement from the actual inventor(s) as follows:-


The Applicant(s)/Nominated Person(s) is/are the assignee(s) of the actual inventor(s).

The Applicant(s)/Nominated Person(s) is/are entitled to rely on the basic application(s) listed on the Patent Request as follows:

The Applicant(s)/Nominated Person(s) is/are the assignee(s) of the basic applicant(s).

The basic application(s) listed on the Patent Request is/are the first application(s) made in a Convention country in respect of the invention.

DATED this SEVENTEETH day of JUNE 1994

  
John Gordon Hinde

IRN: 274941

INSTR CODE: 53350



AU9464815

(12) PATENT ABRIDGMENT (11) Document No. AU-B-64815/94  
(19) AUSTRALIAN PATENT OFFICE (10) Acceptance No. 676300

- (54) Title  
FAIRLEAD MECHANISM WITH SYNCHRONIZED SHEAVES
- International Patent Classification(s)  
(51)<sup>5</sup> E02F 003/58
- (21) Application No. : 64815/94 (22) Application Date : 17.06.94
- (30) Priority Data
- (31) Number (32) Date (33) Country  
086154 01.07.93 US UNITED STATES OF AMERICA
- (43) Publication Date : 12.01.95
- (44) Publication Date of Accepted Application : 06.03.97
- (71) Applicant(s)  
HARNISCHFEGER CORPORATION
- (72) Inventor(s)  
ROBERT H. BLASZYNSKI; CARL A. SOCZKA
- (74) Attorney or Agent  
SPRUSON & FERGUSON , GPO Box 3898, SYDNEY NSW 2001
- (56) Prior Art Documents  
US 3912230  
US 3708152  
US 2043362
- (57) Claim

1. A fairlead mechanism for guiding reciprocating travel of a rope connected to a working tool of an excavating machine such as a dragline or the like, said fairlead mechanism comprising:

a support including a main frame and a subframe mounted on said main frame for oscillatory movement about a generally vertical pivot axis,

a guide mechanism including a pair of first guide sheaves rotatably mounted on said main frame and lying in a first generally horizontal plane, and a pair of second guide sheaves rotatably mounted on said subframe and lying in a second generally vertical plane, said guide sheaves each having an annular groove, said guide sheaves of each of said pairs being rotatably mounted on said support to present said grooves in facing relation to define between said sheaves of each of said pairs a guide path portion through which the rope passes in frictional contact with at least one of said guide sheaves of each of said pairs to cause said one guide sheave of each of said pairs to stop-start cycle between rotating and nonrotating modes as the rope reciprocates,

a first synchronizing mechanism for causing said pair of first guide sheaves to simultaneously stop or counterrotate in unison in response to rope contact with either one of said first guide sheaves to minimize wear induced by scrubbing between the rope and said first guide sheaves, and

a second synchronizing mechanism for causing said pair of second guide sheaves to simultaneously stop or counterrotate in unison in response to rope contact with either one of said second guide sheaves to minimize wear induced by scrubbing between the rope and said second guide sheaves.

The present invention relates to a fairlead mechanism for guiding the vertical and horizontal sweeps of movement of a reciprocating rope that is connected to a working tool of an excavating machine such as a dragline or the like.

A dragline generally comprises a mobile chassis that supports a boom 300 to 400 feet long. The lower end of the boom is pivotally mounted on the chassis to permit the angle of boom elevation to be adjusted. A sheave is rotatably mounted adjacent the top end of the boom. A main lift rope such as a steel wire wound cable has one end connected to a hoist drum on the chassis and its other end reeved over and suspended from the sheave at the top end of the boom. A working tool such as a dragline bucket is connected to the suspended end of the main lift rope and is raised and lowered by actuation of the hoist drum by the dragline operator.

The dragline is pivotable about a vertical axis to provide the boom and the suspended dragline bucket with a working radius which can be 300 feet or more. A dragline bucket drag rope has one end connected to the dragline bucket and its other end connected to a drag rope drum located on the dragline chassis adjacent the foot of the boom. The drag rope drum is selectively energized by the dragline operator to pull the dragline bucket, when it is on the ground, toward the dragline chassis to load the bucket. The drag rope drum is also operative to release the drag rope for travel away from the chassis in order to permit the loaded bucket to be dumped or to permit an empty bucket to be moved to a desired working position remote from the chassis.

During operation the dragline bucket may be raised in order to spoil overburden high on a spoil pile, or to reclaim a spoil pile or the dragline bucket may be lowered down into a mine pit for loading. The lateral swinging movements and the vertical up and down movements of the dragline bucket cause the drag rope to

have both a vertical and a horizontal angular sweep of travel relative to the drag rope drum. During the vertical and horizontal sweeping movements the drag rope also reciprocates toward and away from the chassis, and travel of the drag rope after it leaves the drag rope drum must be guided to prevent undesirable contact with the dragline chassis. This guiding of the drag rope is accomplished by what is termed a fairlead mechanism. The drag rope passes through the fairlead mechanism after it leaves the drag rope drum.

The fairlead mechanism includes a pair of grooved horizontal sheaves rotatably mounted side by side on the chassis and a pair of grooved vertical upper and lower sheaves rotatably journaled on a subframe that is pivotally mounted on the chassis for oscillatory movement about a generally vertical axis. The planes in which the horizontal and vertical sheaves lie are arranged at right angles relative to each other. The drag rope upon leaving the drag rope drum first passes between the facing grooves of horizontal sheaves and then between the facing grooves of the vertical sheaves. The drag rope is a wire wound cable which may be up to 4.5 inches in diameter and have a length of 600 to 700 feet in order to permit the dragline bucket to be moved to its various working and dumping positions. The horizontal sheaves can weigh up to 11,200 lbs. each and the vertical sheaves up to 13,300 lbs. each. Usually a dragline will utilize two or more drag ropes and a corresponding number of fairlead mechanisms with all of the drag ropes being connected to a single dragline bucket.

Depending upon the direction of the drag rope sweep, the drag rope will have its primary frictional contact with either one or the other of the horizontal and vertical sheaves and cause the sheaves with which it has its primary frictional contact to rotate at a high rate of speed either clockwise or

counterclockwise depending upon the direction of rope travel. When the angular directions of the rope sweeps are altered the primary frictional contact of the rope transfers from one sheave to the other and thus the fairlead sheaves are constantly being start-stop cycled by the changing frictional engagement with the drag rope. For example, assume that the drag rope is in contact with the lower vertical sheave which is being rotated by the drag rope. The upper noncontacted vertical sheave will be stationary. The drag rope is traveling at a high speed (up to 1000 feet per minute) and when the vertical sweep of the drag rope requires it to transfer its primary frictional contact to the upper stationary vertical sheave it will cause the upper sheave to start to rotate in the direction of travel of the drag rope. Due to the inertia of the heavy upper vertical sheave, initially there will be sliding frictional contact called scrubbing between the moving rope and the stationary upper vertical sheave until the rotational velocity of the upper vertical sheave matches the speed and direction of travel of the drag rope.

This scrubbing action creates rope wear and results in drag rope life of 1,000 to 1,500 hours. Draglines are normally operated 24 hours a day and the drag rope can require replacement every two months or less. Replacement of the drag rope is expensive and normally all drag ropes of the dragline are replaced at the same time in order to reduce costs. In order to replace the drag ropes a crawler tractor must be connected to pull each rope from its associated pull drum. Assuming the dragline utilizes two fairleads, two new drag ropes must be provided and connected to the drag rope drums. In addition, labor costs and lost production due to down-time are incurred.

In order to extend the life of a dragline drag rope, a need exists for an improved, reliable, rugged and low-cost fairlead mechanism that will

efficiently and automatically minimize scrubbing between the drag rope and the fairlead sheaves.

It is the object of the present invention to overcome or substantially ameliorate the above disadvantages.

There is disclosed herein a fairlead mechanism for guiding reciprocating travel of a rope connected to a working tool of an excavating machine such as a dragline or the like, said  
5 fairlead mechanism comprising:

a support including a main frame and a subframe mounted on said main frame for oscillatory movement about a generally vertical pivot axis,

a guide mechanism including a pair of first guide sheaves rotatably mounted on said main frame and lying in a first generally horizontal plane, and a pair of second guide sheaves  
10 rotatably mounted on said subframe and lying in a second generally vertical plane, said guide sheaves each having an annular groove, said guide sheaves of each of said pairs being rotatably mounted on said support to present said grooves in facing relation to define between said sheaves of each of said pairs a guide path portion through which the rope passes in frictional contact with at least one of said guide sheaves of each of said pairs to cause said one  
15 guide sheave of each of said pairs to stop-start cycle between rotating and nonrotating modes as the rope reciprocates,

a first synchronizing mechanism for causing said pair of first guide sheaves to simultaneously stop or counterrotate in unison in response to rope contact with either one of said first guide sheaves to minimize wear induced by scrubbing between the rope and said first  
20 guide sheaves, and

a second synchronizing mechanism for causing said pair of second guide sheaves to simultaneously stop or counterrotate in unison in response to rope contact with either one of said second guide sheaves to minimize wear induced by scrubbing between the rope and said second guide sheaves.

25 There is further disclosed herein a fairlead mechanism for guiding reciprocating travel of a rope connected to a working tool of an excavating machine such as a dragline or the like, said fairlead mechanism comprising

a support having a main frame and a subframe mounted on said main frame for oscillatory movement about a generally vertical pivot axis,

30 a pair of first guide sheaves each having a first annular groove, said first sheaves being rotatably mounted on said support to present said first grooves in facing relation to define between said sheaves a first guide path portion through which the rope passes in frictional contact with at least one of said first guide sheaves to cause said one first guide sheave to stop-start cycle between rotating and nonrotating modes as the rope reciprocates,

35 a first synchronizing mechanism for causing said first pair of guide sheaves to counterrotate in unison in response to frictional contact of the rope with either one of said pair of first sheaves to minimize scrubbing between the rope and the first guide sheaves,



a pair of second guide sheaves each having a second annular groove, said second guide sheaves being rotatably mounted on said support to present said second grooves in spaced facing relation to define between said second sheaves a second guide path portion spaced from said first guide path portion and through which said rope also passes in frictional contact with at least one of said second guide sheaves to cause said one second guide sheave to stop-start cycle between nonrotating and rotating modes, and

a second synchronizing mechanism for causing said pair of second guide sheaves to counterrotate in unison in response to frictional contact of the rope with either one of said second guide sheaves to minimize scrubbing between the rope and said second guide sheaves.

10 There is still further disclosed herein an excavating machine such as a dragline or the like, said machine comprising:

a chassis;

a boom mounted on said chassis for raising, lowering, and side-to-side movements;

a working tool mounted on said boom for movement relative to said chassis;

15 a rope actuating mechanism mounted on said chassis and including a rotatable drum, a prime mover operatively connected to rotate said drum, and a rope connected between said drum and said working tool for reciprocating travel toward and away from said chassis during movement of said working tool; and

a fairlead mechanism for guiding said rope during said reciprocating travel, said  
20 fairlead mechanism including a support on said chassis, said support including a main frame and a subframe mounted on said main frame for oscillatory movement about a generally vertical pivot axis, a guide mechanism including a pair of first guide sheaves rotatably mounted on said main frame and lying in a first generally horizontal plane, and a pair of second guide sheaves rotatably mounted on said subframe and lying in a second generally  
25 vertical plane, said guide sheaves each having an annular groove, said guide sheaves of each of said pairs being mounted on said support to present said grooves in facing relation to define between said sheaves of each of said pairs a guide path portion through which said rope passes in frictional contact with at least one of said guide sheaves of each of said pairs to cause said one guide sheave of each of said pairs to stop-start cycle between rotating and nonrotating  
30 modes as said rope reciprocates, a first synchronizing mechanism for causing said pair of first guide sheaves to simultaneously stop or counterrotate in unison in response to rope contact with either one of said first guide sheaves to minimize wear induced by scrubbing between the rope and said first guide sheaves, and a second synchronizing mechanism for causing said pair of second guide sheaves to simultaneously stop or counterrotate in unison in response to rope  
35 contact with either one of said second guide sheaves to minimize wear induced by scrubbing between said rope and said second guide sheaves.

A preferred form of the present invention will now be described by way of example with reference to the accompanying drawings, wherein:



Figure 1 is a side elevational view of a dragline excavating machine embodying the invention.

Figure 2 is an isometric projection view of a fairlead mechanism incorporated in the dragline shown in Figure 1.

Figure 3 is a top view of the fairlead mechanism shown in Figure 2.

Figure 4 is a partial sectional view taken along line 4-4 of Figure 3.

Figure 5 is a side elevational view of the fairlead mechanism shown in Figure 2.

Figure 6 is a cross-sectional view taken along line 6-6 of Figure 5.

Figure 7 is a side elevational view of a fairlead mechanism that is a second embodiment of the invention.

Figure 8 is a top view of the fairlead mechanism shown in Figure 7.

Before one embodiment of the invention is explained in detail, it is to be understood that the invention is not limited in its application to the details of construction and the arrangement of components set forth in the following description or illustrated in the drawings. The invention is capable of other embodiments and of being practiced or being carried out in various ways. Also, it is to be understood that the phraseology and terminology used herein is for the purpose of description and should not be regarded as limiting.

Figure 1 shows a dragline 1 having a main chassis 2 which has a walking mechanism 3 operable in known manner to move the dragline 1. A boom 4 is mounted at its lower end or foot 5 on the main chassis 2. A mast assembly 6 is provided to support the upper end of the



boom 4 and to raise and lower it in known manner. A sheave 8 is rotatably mounted on the upper end 7 of boom 4 and an elongated lifting element such as a wire rope 9 is reeved over sheave 8. A dragline bucket 10 is suspended from one end 11 of rope 9. The other end of rope 9 is connected to a conventional hoist drum (not shown) on the chassis 2. The hoist drum is operated in known manner to raise and lower rope 9 and the bucket 10. The dragline also has a conventional service platform 18 located at the upper end of the boom 4.

One or more drag ropes 15 are connected to the bucket 10. In order to simplify the drawing, Figure 1 shows a single drag rope 15 connected to the bucket 10, but in actual practice more than one drag rope 15 is frequently required. The drag rope 15 is controlled by the operator to pull the bucket 10 toward the main chassis 2 and to release the drag rope 15 to allow the bucket 10 to move away from the main chassis 2 in the direction of arrows 22, 24 shown in Figure 2. The dragline 1 includes an operator station 16 at which conventional controls are located to permit the operator to raise and lower the bucket 10 and to move the drag rope 15 toward and away from the chassis in known manner. The dragline 1 as thus far described is conventional and need not be described in further detail.

Referring to Figures 2-6, dragline 1 also includes a fairlead mechanism 30 for each drag rope 15. If more than one drag rope 15 and associated fairlead mechanism 30 is used they all will be of identical construction, and therefore only one drag rope 15 and its fairlead mechanism 30 will be described. The fairlead mechanism 30 guides the horizontal and vertical sweeps of the drag rope 15 in the directions indicated by arrows 32, 34 and 36, 38. The fairlead mechanism 30 includes (see Fig. 2) a main support frame 40 which is a portion of the chassis 2. The fairlead mechanism 30 also

includes a subframe 42 which is mounted on the main support frame 40 for oscillation about a generally vertical pivot axis 44.

The fairlead mechanism 30 further comprises a guide mechanism 50 that includes a pair of first guide sheaves 51 and 52 each mounted on a shaft 53 best shown in Figure 5. The shafts 53 are journaled on the main support frame 40 for rotation about (see Fig. 2) spaced parallel first axes 54, 56 respectively. The first guide sheaves 51 and 52 lie in a first generally horizontal plane 58 (Figs. 2 and 5). The guide mechanism 50 also comprises (see Figs 2 and 5) a pair of second guide sheaves 61 and 62 each mounted on a shaft 63. The shafts 63 are journaled on the subframe 42 for rotation about spaced parallel axes 64, 66 respectively. The second guide sheaves 61 and 62 lie in a second generally vertical plane 68 (Figs. 2 and 3). The first and second planes 58, 68 are arranged at right angles relative to each other. The first axes 54, 56 are in spaced parallel relation on opposite sides of the second plane 68 and the second axes 64, 66 lie in spaced parallel relation on opposite sides of first plane 58.

Referring to Figures 3-6, the horizontal guide sheaves 51 and 52 each have an annular groove 70 (Figs. 4 and 5) and the horizontal guide sheaves 51, 52 are rotatably mounted on the main support frame 40 to present the grooves 70 in facing relation as best shown in Figure 4 to define between the sheaves 51 and 52 a first guide path portion 72 through which the rope 15 passes in primary frictional contact with at least one of the guide sheaves 51 and 52 to cause the contacted horizontal guide sheave to stop-start cycle between rotating and nonrotating modes as the rope 15 reciprocates during operation of the dragline as will be more fully discussed hereinafter.

The vertical guide sheaves 61 and 62 each have (see Figs. 3 and 6) an annular groove 74 and the

vertical guide sheaves 61, 62 are mounted on the main support frame 40 to present the grooves 74 in facing relation as shown on Figure 6 to define between the sheaves 61, 62 a second guide path portion 76 through which drag rope 15 passes for primary frictional contact with sheave 61 or 62 as the drag rope 15 moves between vertically lower and upper sweep positions.

The fairlead mechanism 30 further includes (see Figs. 2 and 5) vertical sweep rope guides or rollers 78, 80 rotatably mounted on the subframe 42 in spaced relation at opposite sides of the second vertical plane 68 proximal the outer end 82 of the subframe 42. The space between the vertical sweep rollers 78, 80, the first guide path portion 72 between the horizontal guide sheaves 51, 52 and the vertical guide path portion 76 between the vertical guide sheaves 61, 62 define the guide path for the drag rope 15 through the fairlead mechanism 30. The rollers 78 and 80 have a generally vertical extent which is sufficient to allow for the full vertical sweep of the dragline drag rope 15 throughout its entire range of vertical travel during working of the dragline bucket.

The fairlead mechanism 30 also comprises (see Fig. 2) a synchronizing mechanism 100 for causing the pairs of guide sheaves 51, 52 and 61, 62 to simultaneously stop or to counterrotate in unison in response to primary frictional contact of the drag rope 15 with either one of the guide sheaves in each pair. Referring now to Figures 2-6, the synchronizing mechanism 100 comprises a gear mechanism 102 interconnecting the horizontal guide sheaves 51, 52 and a gear mechanism 104 interconnecting the vertical guide sheaves 61, 62 to cause each pair of guide sheaves to counterrotate in unison.

More specifically the gear mechanism 102 comprises (see Fig. 3) a cog wheel 106 on each of the horizontal guide sheaves 51, 52, with the cog wheels 106

being in mesh with each other. The gear mechanism 104 similarly comprises (see Fig. 5) a cog wheel 108 on each of the vertical guide sheaves 61, 62, with the cog wheels 108 being in mesh with each other. Referring to  
 5 Figures 5 and 6, the cog wheels 108 for vertical sheaves 61, 62 are preferably formed by a plurality of arcuate gear segments 110 which are secured to the outer peripheral rim 112 of the sheaves 61 and 62 by means of cap screws 114. Referring to Figure 4, the cog wheels  
 10 106 for the horizontal sheaves 51, 52 are fabricated as complete annular gears rings 116 secured to the outer peripheral rim 120 by cap screws 122. As shown the segments 110 and gear rings 116 are mounted directly on the guide sheave rims but they could be mounted in  
 15 axially spaced relation to the guide sheaves 51, 52 and 61, 62. As best shown in Figures 2 and 3 the sidewalls 124 and 126 of the subframe 42 are spaced apart a distance sufficient to accommodate therebetween the total axial width of the vertical guide sheaves 61 and  
 20 62 with the cog wheels 108 mounted thereon. If desired the cog wheels 108 could be mounted on the outside of the side walls 124, 126.

A synchronizing mechanism 100B which is a second embodiment of the invention is shown in Figures 7  
 25 and 8 and utilizes belt drive mechanisms 130 and 132 respectively interconnecting the pairs of first and second guide sheaves 51, 52 and 61, 62. The belt drive mechanism 130 comprises (see Fig. 8) a pulley 134 on each of the shafts 53. A flexible drive element or belt  
 30 136 is reeved in a figure-8 configuration about pulleys 134 to cause the horizontal guide sheaves 51, 52 to counterrotate in unison. The belt drive mechanism further includes a spring-biased bell crank belt tensioner 137 which is set to keep the flexible drive  
 35 element 136 under predetermined proper tension.

The belt drive mechanism 132 for vertical guide sheaves 61, 62 is similar to belt drive mechanism

130. A vertical pulley 138 (see Fig. 7) is mounted on each of the shafts 63, and the pulleys 138 are interconnected by a flexible drive element or belt 140 reeved about the pulleys 138 to counterrotate the guide sheaves 61, 62 in unison. A belt tensioning mechanism 144 similar to belt tensioning mechanism 137 is provided for drive element 140.

As best shown in Figure 8 the pulleys 138 are mounted externally of the subframe 42 for convenient servicing. If desired the pulleys 140 could be mounted inside of the spaced apart sidewalls 124, 126 of the subframe 42 in a manner similar to that of the cog wheels 108 shown in Figures 2 and 3 of the first embodiment.

The belt drive mechanisms 130, 132 shown in Figures 7 and 8 both utilize a V-belt as the flexible drive element. However it is to be understood that flat belts or cog could be used in place of the V-belts shown.

In operation the dragline drag rope 15 shown in Figure 2 will be traveling at speeds of up to approximately 1,000 feet per minute back and forth in the directions of arrows 22, 24 as the dragline bucket 10 is moved toward and away from the chassis 2. Simultaneously the dragline bucket 10 will swing laterally from side to side and this lateral movement is transferred by the dragline drag rope 15 to the fairlead subframe 42 causing it to oscillate in the direction of arrows 32, 34 in Figure 2. When the subframe 42 moves in the direction of arrow 32 the drag rope 15 will be placed in primary frictional engagement with horizontal sheave 51, and when the subframe 42 moves in the direction of arrow 34 the drag rope 15 will be placed in primary frictional engagement with horizontal sheave 52. No matter which of the sheaves 51, 52 is driven by drag rope 15, the synchronizing mechanism 100 will cause the pair of sheaves 51, 52 to simultaneously stop or

counterrotate in unison in order to minimize scrubbing and consequent wear between the drag rope 15 and the guide sheave 51, 52.

5 In similar manner, during operation the drag rope 15 will be moved up or down in the direction of arrows 36, 38 in Figure 2, and rope 15 will come into primary frictional engagement with either one or the other of the vertical guide sheaves 61, 62. The synchronizing mechanism 100 will cause the vertical  
10 guide sheaves 61, 62 to simultaneously stop or counterrotate in unison in response to contact by drag rope 15 with either one of the guide sheaves 61, 62 to minimize wear caused by scrubbing between the drag rope 15 and the guide sheaves 61, 62.

15 The fairlead synchronizing mechanisms 100 and 100B are shown by way of example. Equivalent synchronizing mechanisms could be utilized to cause counterrotation of the guide sheaves 51, 52 and 61, 62 in unison in response to contact with the drag rope 15.

20 Various features of the invention are set forth in the following claims.

**The claims defining the invention are as follows:-**

1. A fairlead mechanism for guiding reciprocating travel of a rope connected to a working tool of an excavating machine such as a dragline or the like, said fairlead mechanism comprising:

5 a support including a main frame and a subframe mounted on said main frame for oscillatory movement about a generally vertical pivot axis,

a guide mechanism including a pair of first guide sheaves rotatably mounted on said main frame and lying in a first generally horizontal plane, and a pair of second guide sheaves rotatably mounted on said subframe and lying in a second generally vertical plane, said guide  
10 sheaves each having an annular groove, said guide sheaves of each of said pairs being rotatably mounted on said support to present said grooves in facing relation to define between said sheaves of each of said pairs a guide path portion through which the rope passes in frictional contact with at least one of said guide sheaves of each of said pairs to cause said one guide sheave of each of said pairs to stop-start cycle between rotating and nonrotating modes  
15 as the rope reciprocates,

a first synchronizing mechanism for causing said pair of first guide sheaves to simultaneously stop or counterrotate in unison in response to rope contact with either one of said first guide sheaves to minimize wear induced by scrubbing between the rope and said first guide sheaves, and

20 a second synchronizing mechanism for causing said pair of second guide sheaves to simultaneously stop or counterrotate in unison in response to rope contact with either one of said second guide sheaves to minimize wear induced by scrubbing between the rope and said second guide sheaves.

2. The fairlead mechanism according to claim 1 wherein at least one of said  
25 synchronizing mechanisms comprises a gear mechanism interconnecting said pair of guide sheaves to cause said pair of guide sheaves to counterrotate in unison in response to rotation of either one of said guide sheaves.

3. The fairlead mechanism according to claim 2 wherein said gear mechanism comprises a cog wheel on each of said guide sheaves, said cog wheels being in mesh with each  
30 other to counterrotate said guide sheaves in unison.

4. The fairlead mechanism according to claim 1 wherein at least one of said synchronizing mechanisms comprises a belt drive mechanism interconnecting said pair of guide sheaves to cause said pair of guide sheaves to counterrotate in unison in response to rotation of either one of said guide sheaves.

35 5. The fairlead mechanism according to claim 4 wherein said belt drive mechanism comprises a pulley on each of said guide sheaves, and a flexible drive element reeved around said pulleys to counterrotate said guide sheaves in unison.

6. The fairlead mechanism according to claim 1 wherein said first guide sheaves each have a first rotational axis, said first rotational axes being positioned in spaced parallel



relation on opposite sides of said second vertical plane, and said second guide sheaves each have a second rotational axis, said second rotational axes being positioned in spaced parallel relation on opposite sides of said first plane.

7. The fairlead mechanism according to claim 6 further comprising vertical sweep  
5 rope guides mounted on said subframe in spaced parallel relation on opposite sides of said second vertical plane.

8. A fairlead mechanism for guiding reciprocating travel of a rope connected to a working tool of an excavating machine such as a dragline or the like, said fairlead mechanism comprising

10 a support having a main frame and a subframe mounted on said main frame for oscillatory movement about a generally vertical pivot axis,

a pair of first guide sheaves each having a first annular groove, said first sheaves being rotatably mounted on said support to present said first grooves in facing relation to define between said sheaves a first guide path portion through which the rope passes in frictional  
15 contact with at least one of said first guide sheaves to cause said one first guide sheave to stop-start cycle between rotating and nonrotating modes as the rope reciprocates,

a first synchronizing mechanism for causing said first pair of guide sheaves to counterrotate in unison in response to frictional contact of the rope with either one of said pair  
of first sheaves to minimize scrubbing between the rope and the first guide sheaves,

20 a pair of second guide sheaves each having a second annular groove, said second guide sheaves being rotatably mounted on said support to present said second grooves in spaced facing relation to define between said second sheaves a second guide path portion spaced from said first guide path portion and through which said rope also passes in frictional contact with  
at least one of said second guide sheaves to cause said one second guide sheave to stop-start  
25 cycle between nonrotating and rotating modes, and

a second synchronizing mechanism for causing said pair of second guide sheaves to counterrotate in unison in response to frictional contact of the rope with either one of said  
second guide sheaves to minimize scrubbing between the rope and said second guide sheaves.

9. The fairlead mechanism according to claim 8 wherein each of said  
30 synchronizing mechanisms comprises a gear mechanism interconnecting said pair of guide sheaves to cause said pair of guide sheave to counterrotate in unison in response to rotation of either one of said guide sheaves.

10. The fairlead mechanism according to claim 9 wherein said gear mechanism comprises a cog wheel on each of said guide sheaves, said cog wheels being in mesh with each  
35 other to counterrotate said guide sheaves in unison.

11. The fairlead mechanism according to claim 8 wherein each of said synchronizing mechanisms comprises a belt drive mechanism interconnecting said pair of guide sheaves to cause said pair of guide sheaves to counterrotate in unison in response to rotation of any one of said guide sheaves.



12. The fairlead mechanism according to claim 11 wherein said belt drive mechanism comprises a pulley on each of said guide sheaves and a flexible drive element reeved around said pulleys to counterrotate said guide sheaves in unison.

13. An excavating machine such as a dragline or the like, said machine comprising:  
 5 a chassis;  
 a boom mounted on said chassis for raising, lowering, and side-to-side movements;  
 a working tool mounted on said boom for movement relative to said chassis;  
 a rope actuating mechanism mounted on said chassis and including a rotatable drum, a prime mover operatively connected to rotate said drum, and a rope connected between said  
 10 drum and said working tool for reciprocating travel toward and away from said chassis during movement of said working tool; and

a fairlead mechanism for guiding said rope during said reciprocating travel, said fairlead mechanism including a support on said chassis, said support including a main frame and a subframe mounted on said main frame for oscillatory movement about a generally  
 15 vertical pivot axis, a guide mechanism including a pair of first guide sheaves rotatably mounted on said main frame and lying in a first generally horizontal plane, and a pair of second guide sheaves rotatably mounted on said subframe and lying in a second generally vertical plane, said guide sheaves each having an annular groove, said guide sheaves of each  
 20 of said pairs being mounted on said support to present said grooves in facing relation to define between said sheaves of each of said pairs a guide path portion through which said rope passes in frictional contact with at least one of said guide sheaves of each of said pairs to cause said one guide sheave of each of said pairs to stop-start cycle between rotating and nonrotating  
 25 modes as said rope reciprocates, a first synchronizing mechanism for causing said pair of first guide sheaves to simultaneously stop or counterrotate in unison in response to rope contact with either one of said first guide sheaves to minimize wear induced by scrubbing between the rope and said first guide sheaves, and a second synchronizing mechanism for causing said pair of second guide sheaves to simultaneously stop or counterrotate in unison in response to rope  
 30 contact with either one of said second guide sheaves to minimize wear induced by scrubbing between said rope and said second guide sheaves.

14. The machine according to claim 13 wherein at least one of said synchronizing mechanisms comprises a gear mechanism interconnecting said pair of guide sheaves to cause said pair of guide sheaves to counterrotate in unison in response to rotation of either one of said guide sheaves.

15. The machine according to claim 14 wherein said gear mechanism comprises a  
 35 cog wheel on each of said guide sheaves, said cog wheels being in mesh with each other to counterrotate said guide sheaves in unison.

16. The machine according to claim 13 wherein at least one of said synchronizing mechanisms comprises a belt drive mechanism interconnecting said pair of guide sheaves to



cause said pair of guide sheaves to counterrotate in unison in response to rotation of either of said guide sheaves.

17. The machine according to claim 16 wherein said belt drive mechanism comprises a pulley on each of said guide sheaves and a flexible drive element reeved around 5 said pulleys to counterrotate said guide sheaves in unison.

18. The machine according to claim 13 wherein  
said first guide sheaves each have a first rotational axis, said first rotational axis being positioned in spaced parallel relation on opposite sides of said second vertical plane, and  
said second guide sheaves each have a second rotational axis, said second rotational 10 axes being positioned in spaced parallel relation on opposite sides of said first plane.

19. A fairlead mechanism, substantially as hereinbefore described with reference to the accompanying drawings.

20. An excavating machine, substantially as hereinbefore described with reference to the accompanying drawings.

Dated 9 May, 1996

Harnischfeger Corporation

Patent Attorneys for the Applicant/Nominated Person

SPRUSON & FERGUSON



## Fairlead Mechanism with Synchronized Sheaves

### ABSTRACT

A fairlead mechanism (30) for guiding a dragline drag rope (15) includes a support (40) on the chassis (2) of the dragline (1) and a  
5 guide mechanism (50) mounted on the support (40). The guide mechanism (50) includes at least one pair of guide sheaves (51,52) each having an annular groove (70). The guide sheaves (51,52) are rotatably mounted on the support (40) to present the grooves (70) in facing relation to define  
10 between the sheaves a guide path through which the drag rope (15) passes in primary frictional contact with at least one of the guide sheaves to cause the contacted guide sheave to start-stop cycle between rotating and nonrotating modes as the drag mode reciprocates during operation of the machine. The fairlead mechanism (30) further comprises a synchronizing  
15 mechanism (100) utilizing gears (108, Figure 2) or belts (136, Figure 7) for causing the pair of guide sheaves to simultaneously stop or counterrotate in unison in response to rope contact with either one of the guide sheaves to minimize wear that would be induced by scrubbing between the rope and the guide sheaves.

Figure 2 and 7






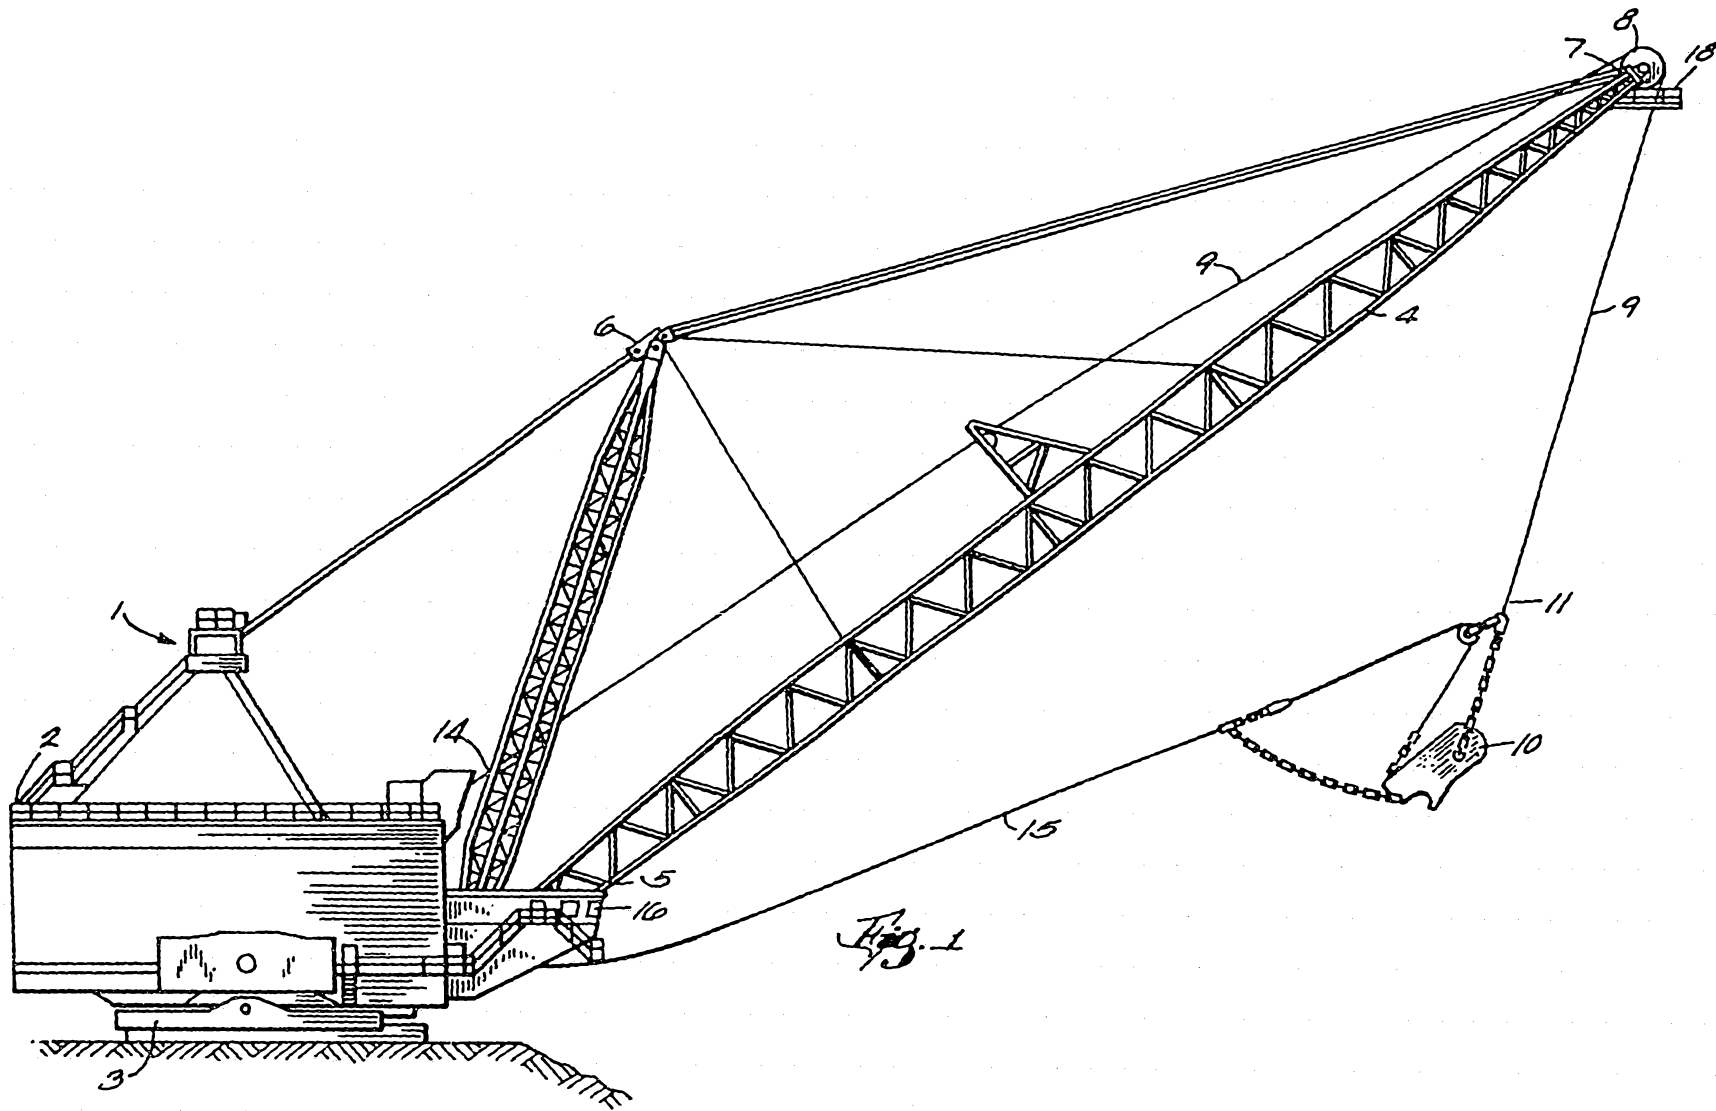


Figure 1 consists of three panels of dot patterns. The top panel shows a 3x3 grid of dots. The middle panel shows a 3x3 grid of dots with a central dot highlighted. The bottom panel shows a 3x3 grid of dots with a central dot highlighted and a label 'a' below it.

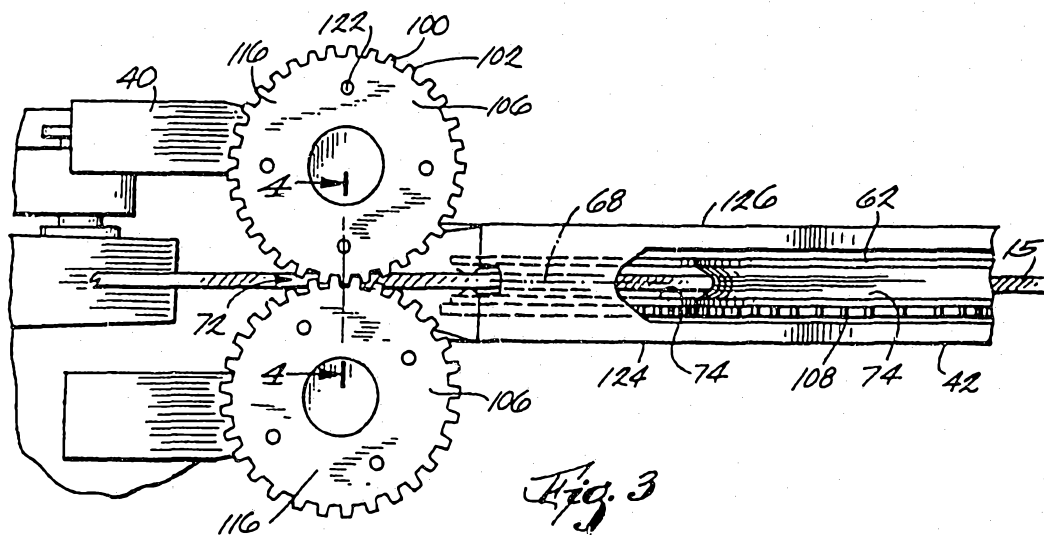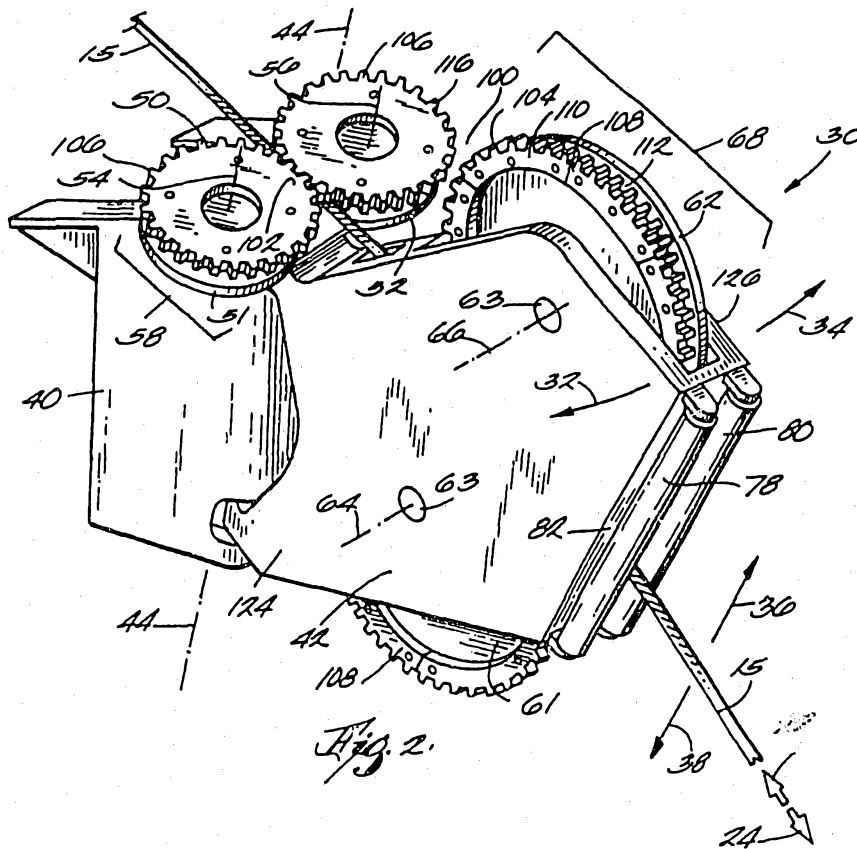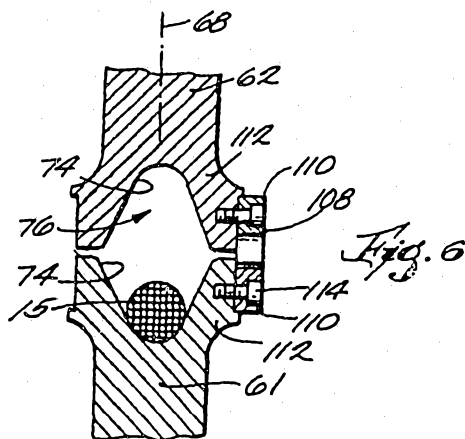

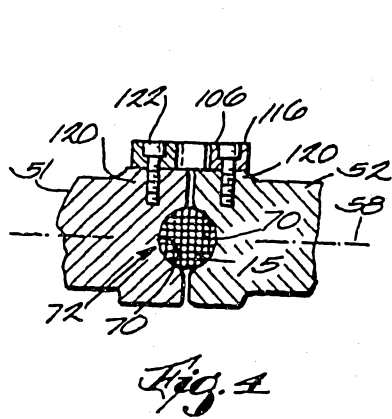

64515/94

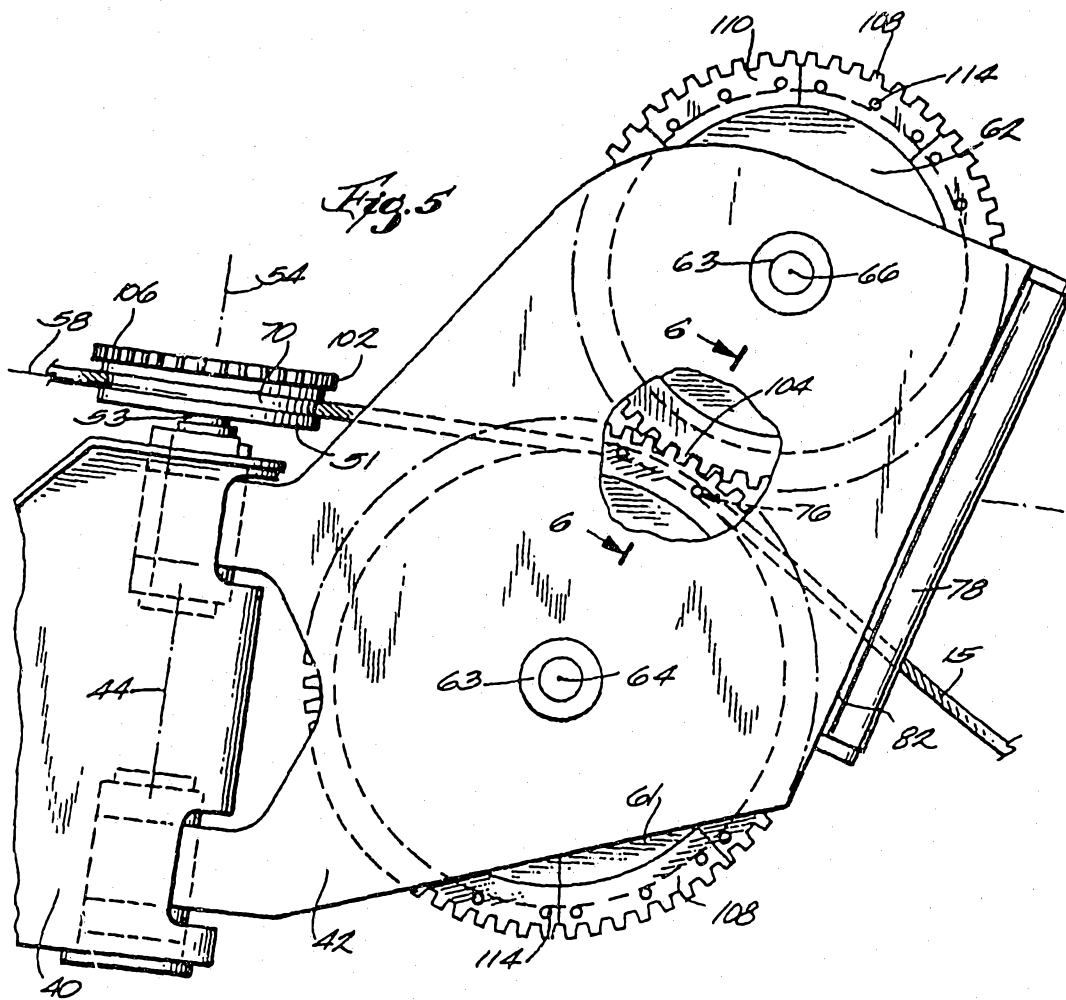