



US 20020073669A1

(19) **United States**
(12) **Patent Application Publication** (10) **Pub. No.: US 2002/0073669 A1**
Nagaoka (43) **Pub. Date: Jun. 20, 2002**

(54) **COLUMN PACKING AND METHOD FOR MANUFACTURING THE SAME**

(30) **Foreign Application Priority Data**

Mar. 1, 1999 (JP) 52363/1999

(76) Inventor: **Tadayoshi Nagaoka, Osaka-fu (JP)**

Publication Classification

(51) **Int. Cl.⁷** **B01D 39/10**

(52) **U.S. Cl.** **55/525**

Correspondence Address:
James V. Costigan, Esq.
HEDMAN & COSTIGAN, P.C.
Suite 2003
1185 Avenue of the Americas
New York, NY 10036-2646 (US)

(57) **ABSTRACT**


First line element made of, e.g., wire and second line elements made of, e.g., wire are disposed so that they cross each other and they are welded together at crossing points to form a net. The net is pressed to form an undulating net. An undulating net of a first layer and an undulating net of a second layer are laid one upon the other in such a manner that crossing points of the undulating net of the first layer alternately come into contact with and are separated from crossing points of the undulating net of the second layer. The crossing points which are in contact with each other are welded together by a welding machine. Subsequently, undulating nets of a third to n-th layers are similarly processed to form a three-dimensional net-like structure.

(21) Appl. No.: **10/076,806**

(22) Filed: **Feb. 15, 2002**

Related U.S. Application Data

(62) Division of application No. 09/512,410, filed on Feb. 24, 2000.

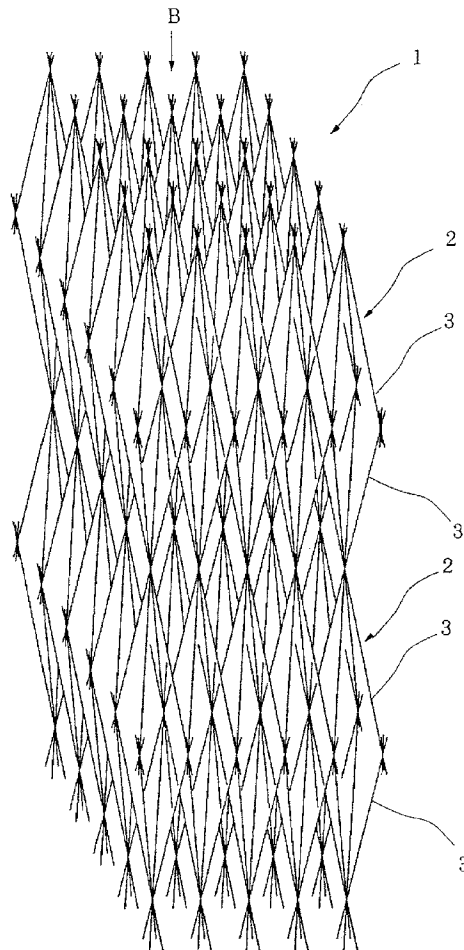

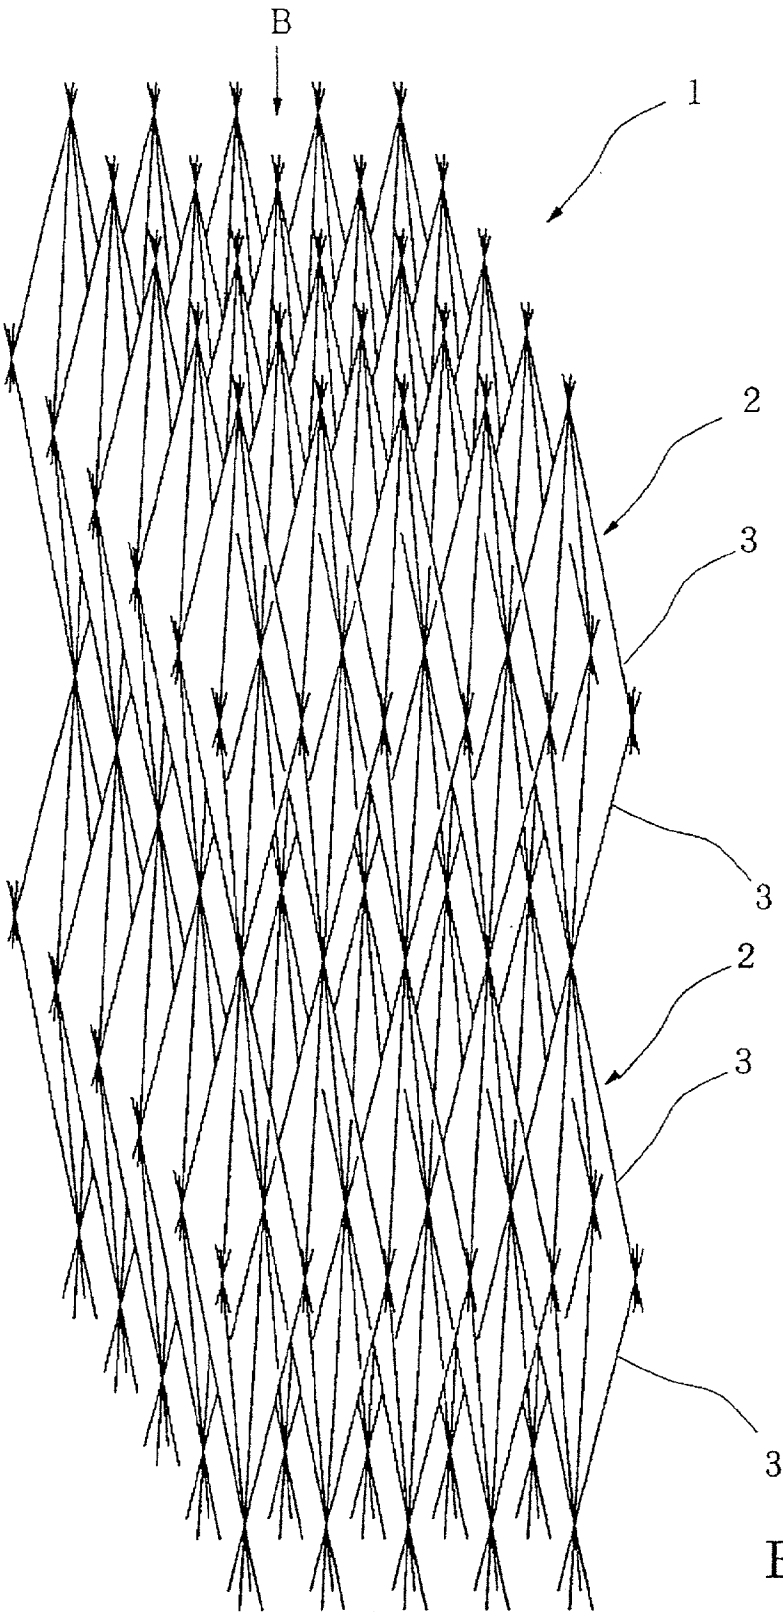


FIG.1

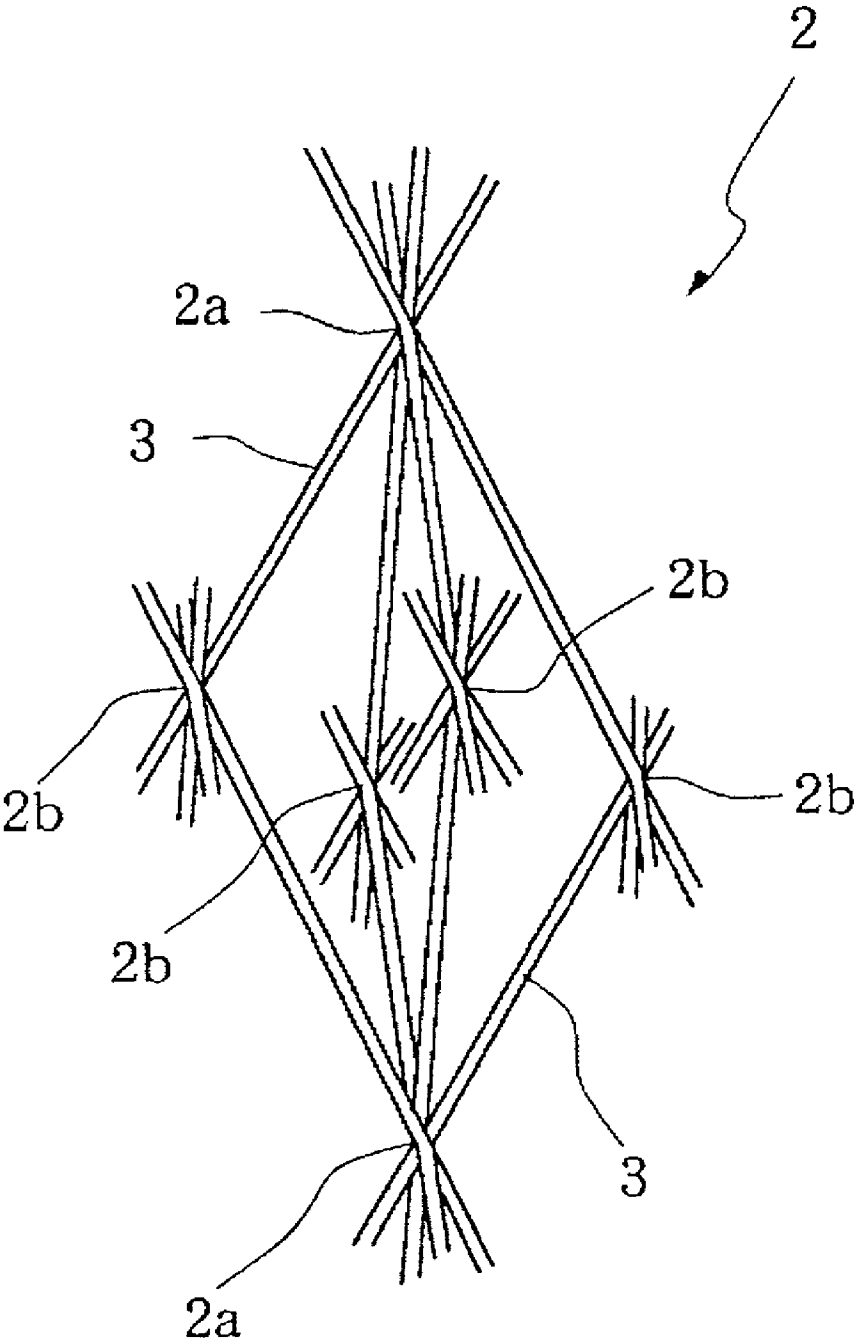


FIG.2

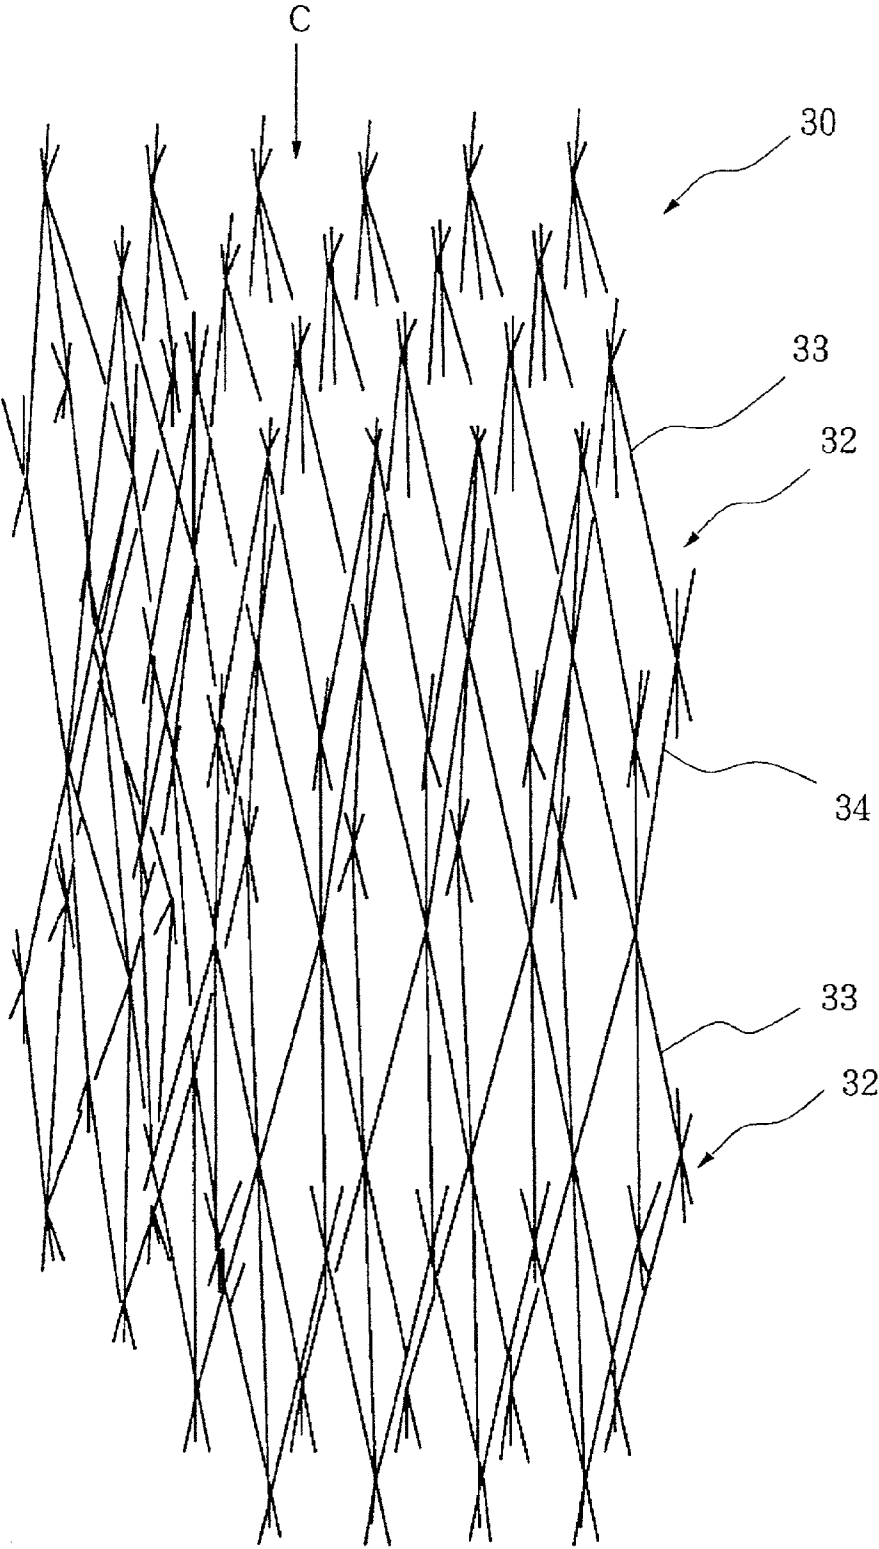


FIG.3

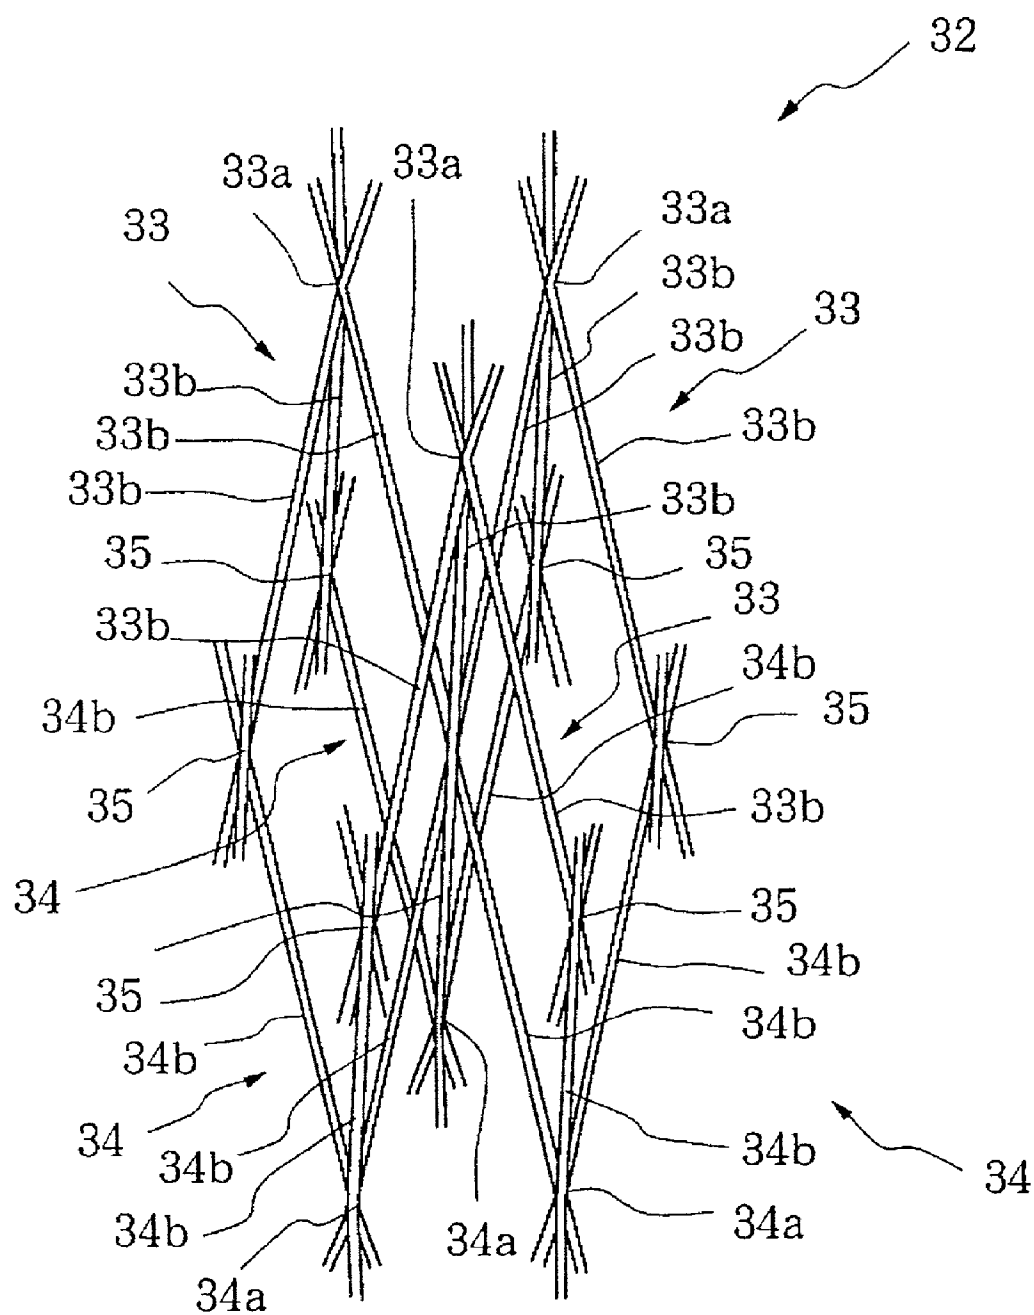


FIG.4

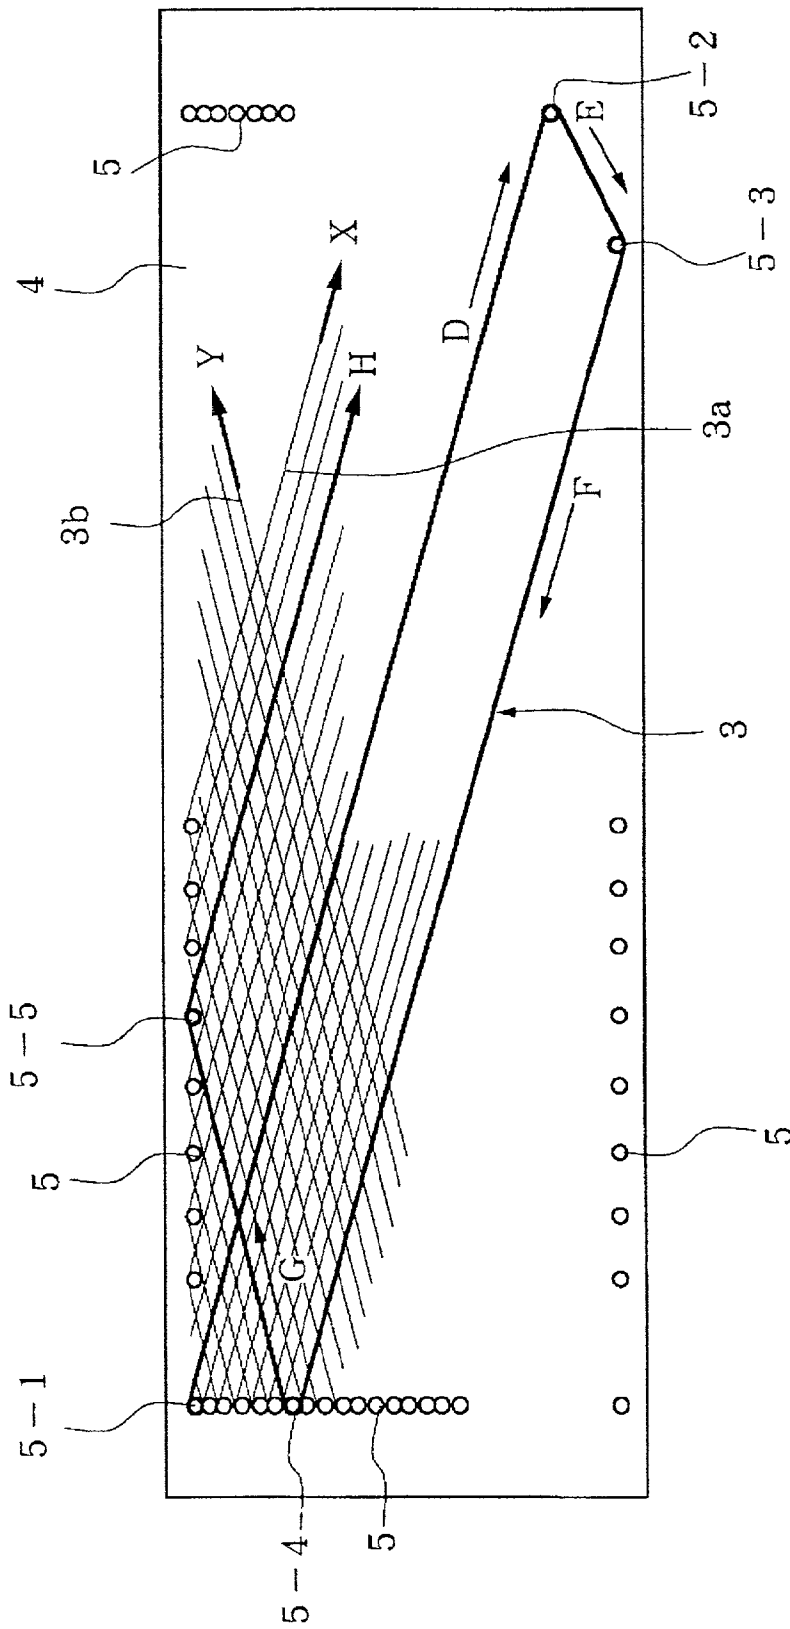


FIG. 5

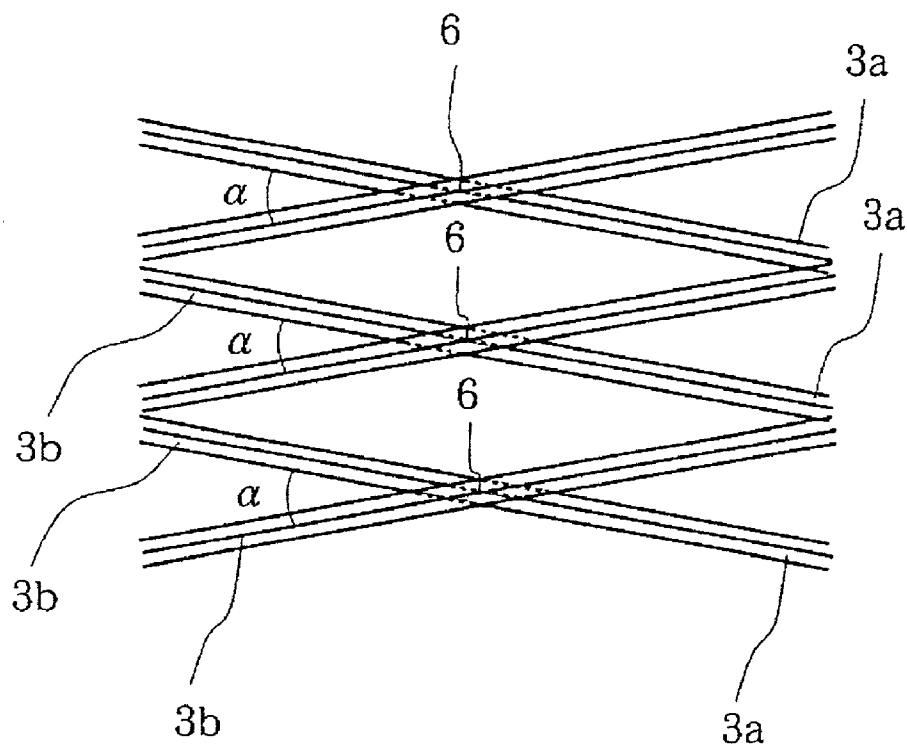


FIG. 6

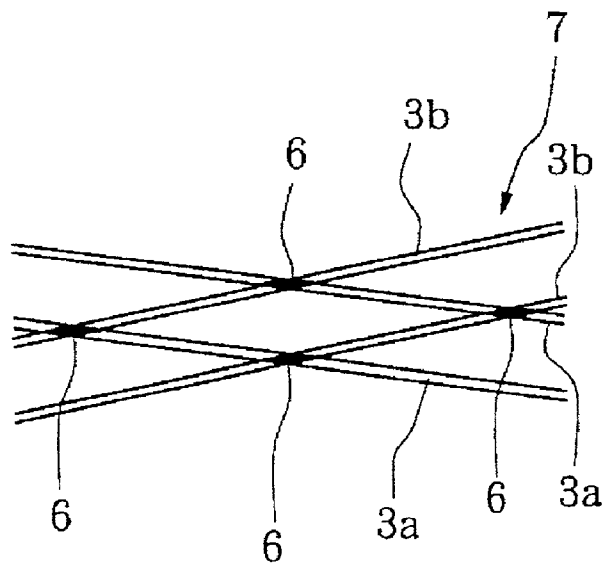


FIG. 7

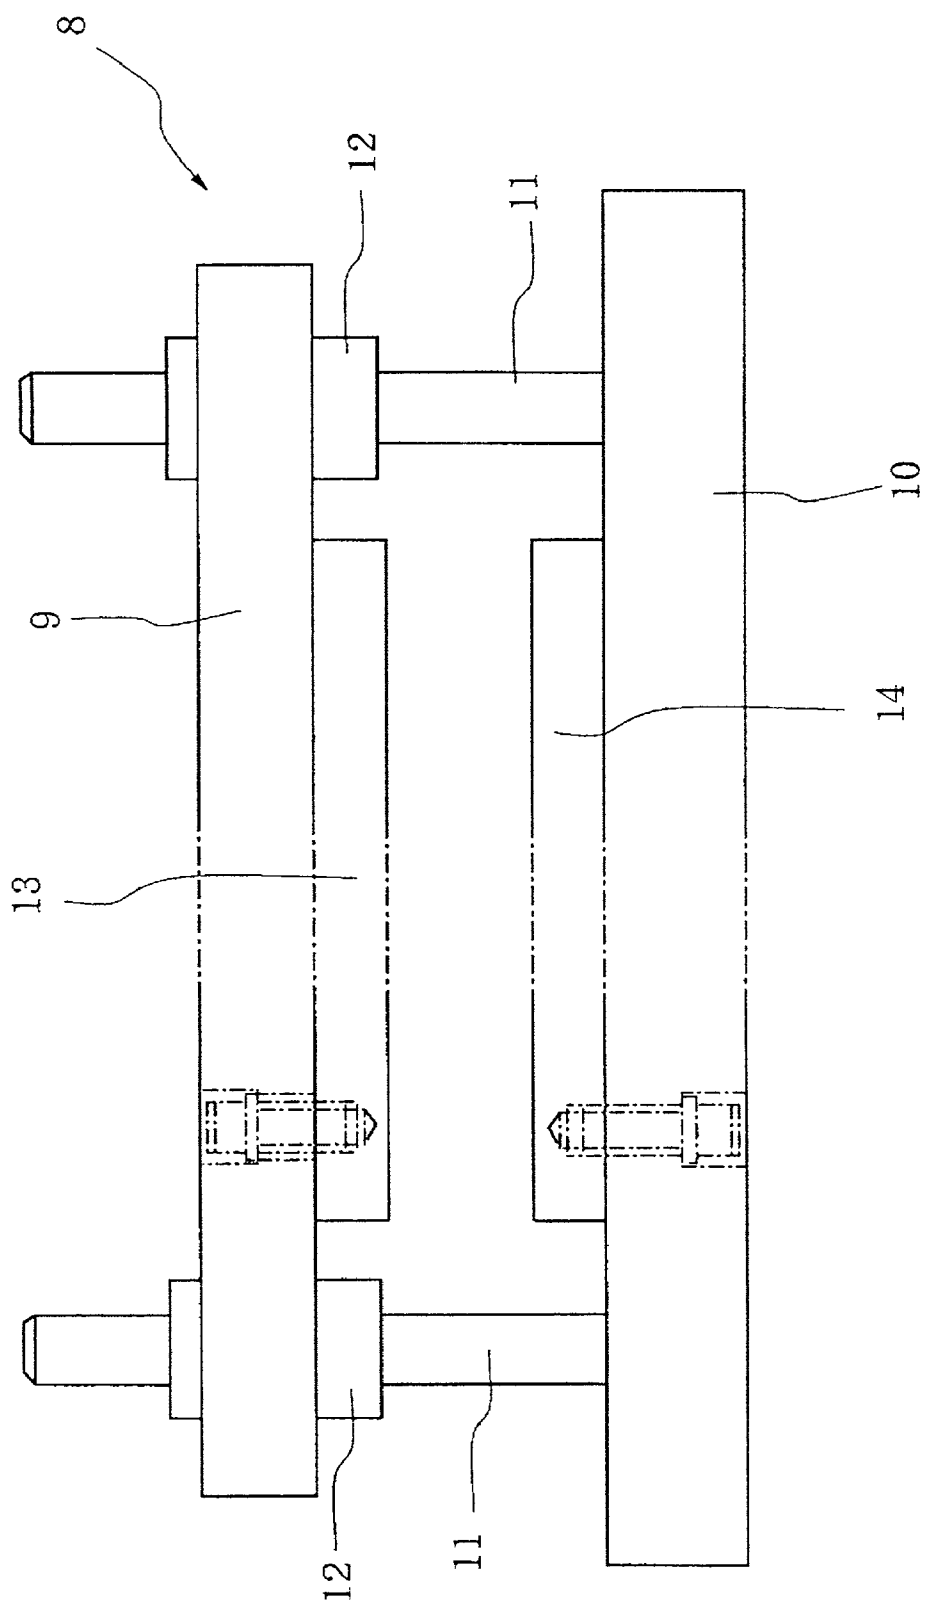


FIG.8

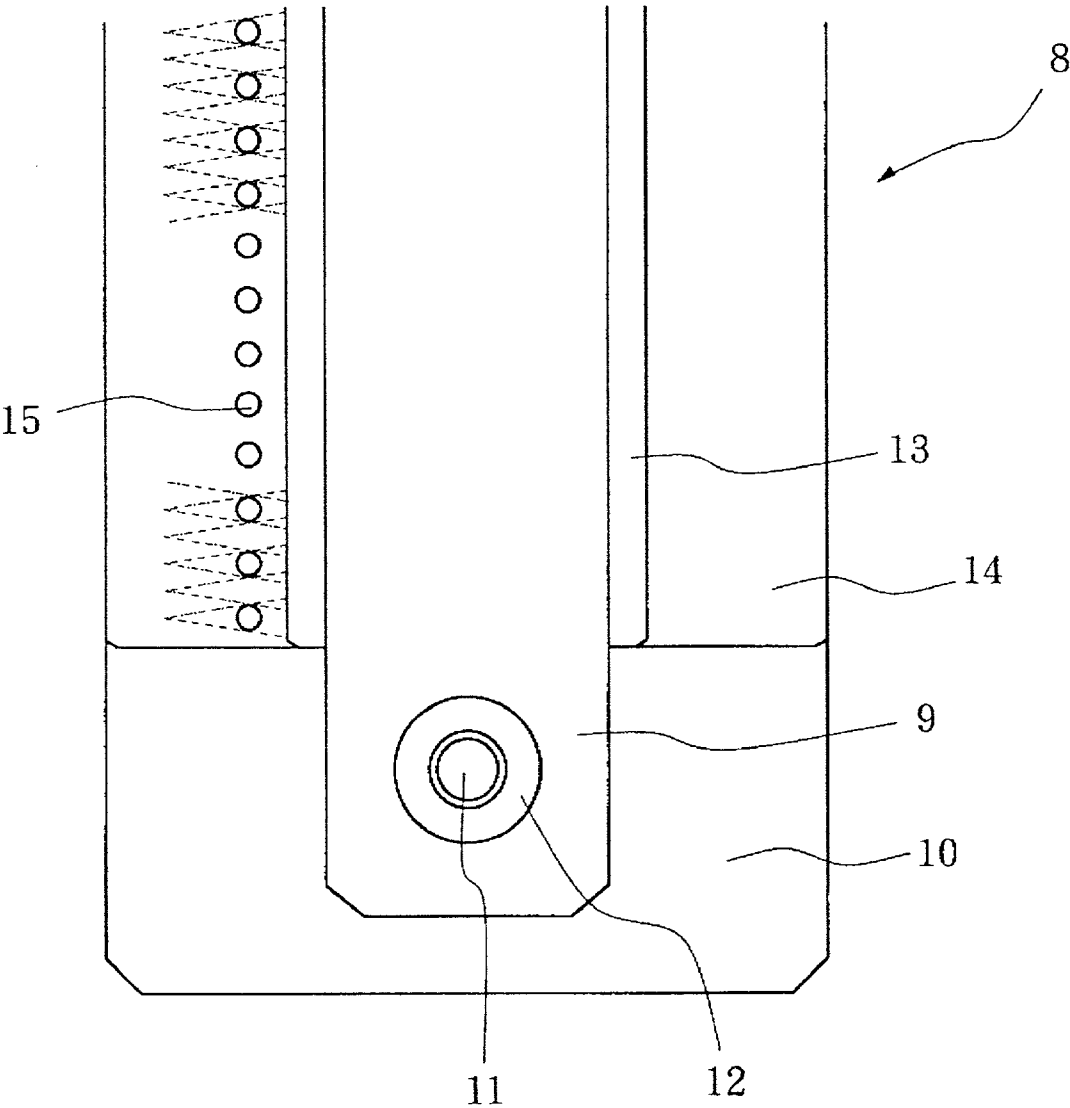


FIG.9

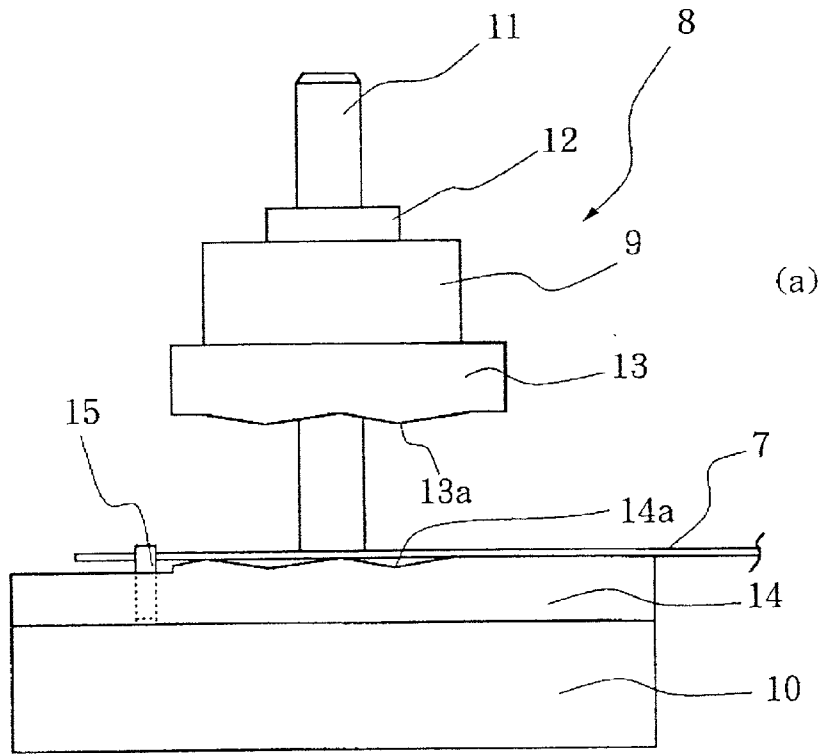


FIG. 10A

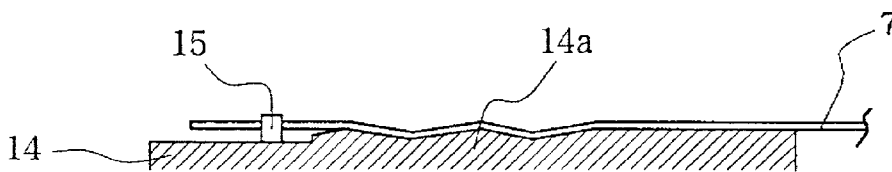


FIG. 10B

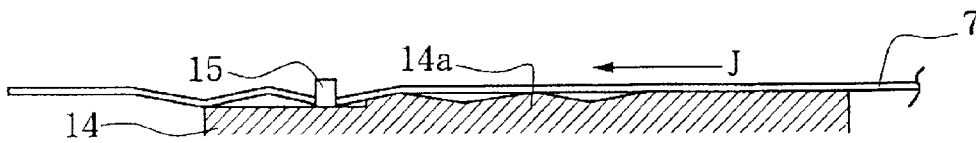


FIG. 10C


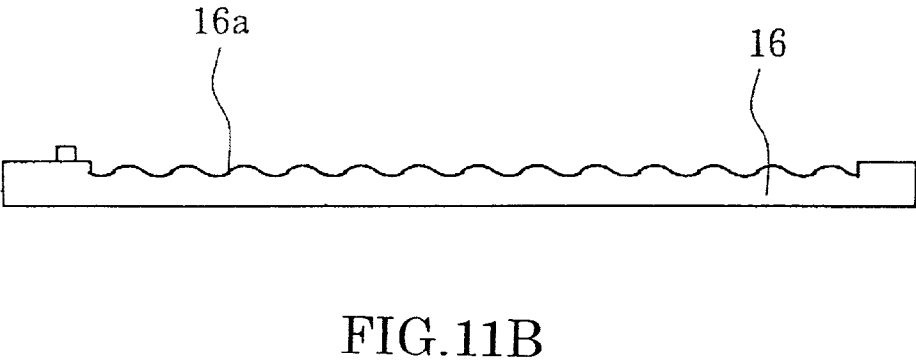
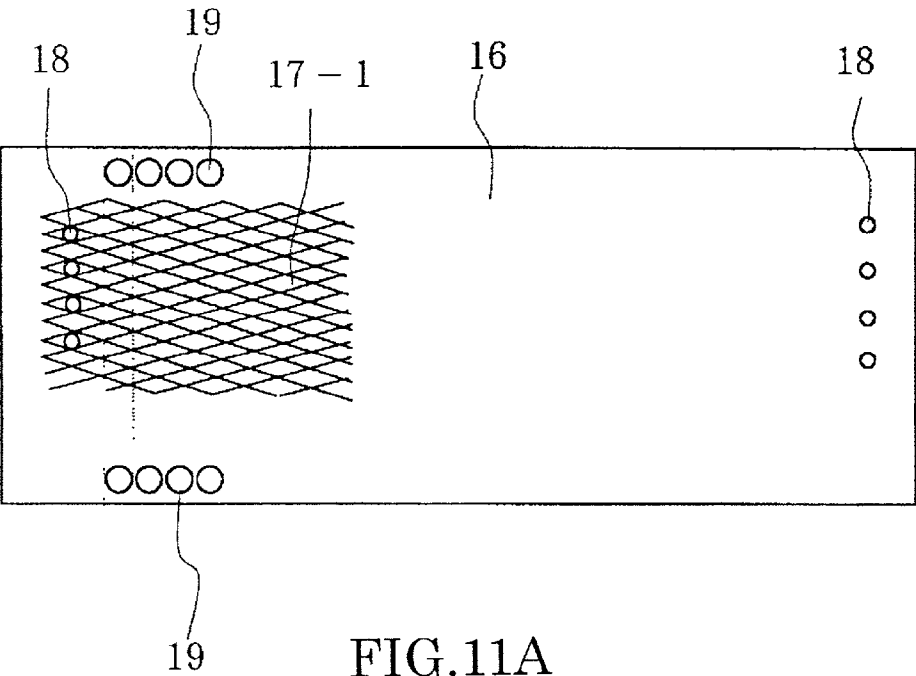


FIG. 10D



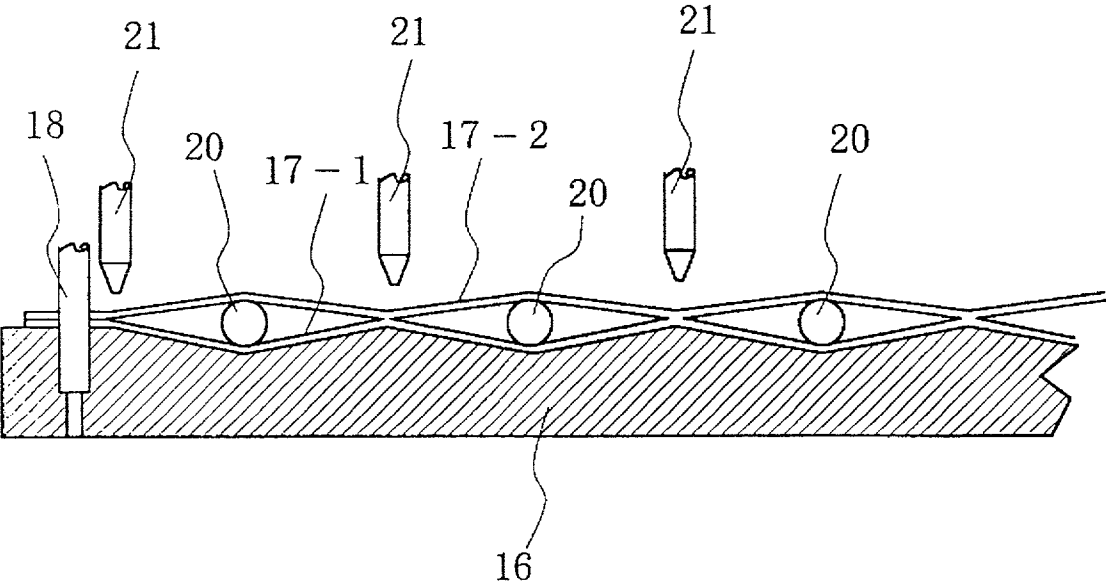


FIG.12

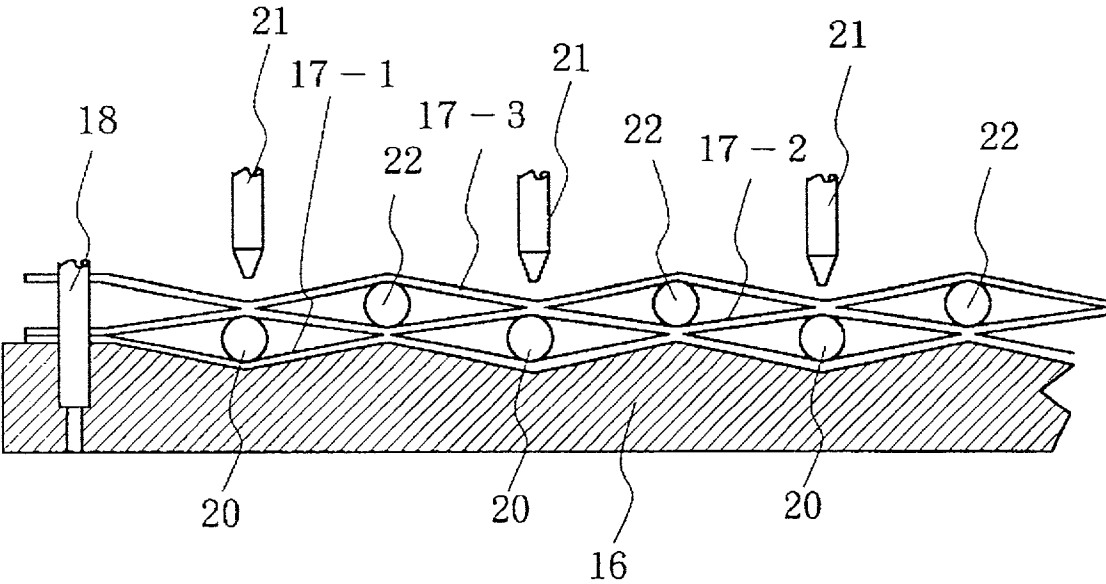


FIG.13

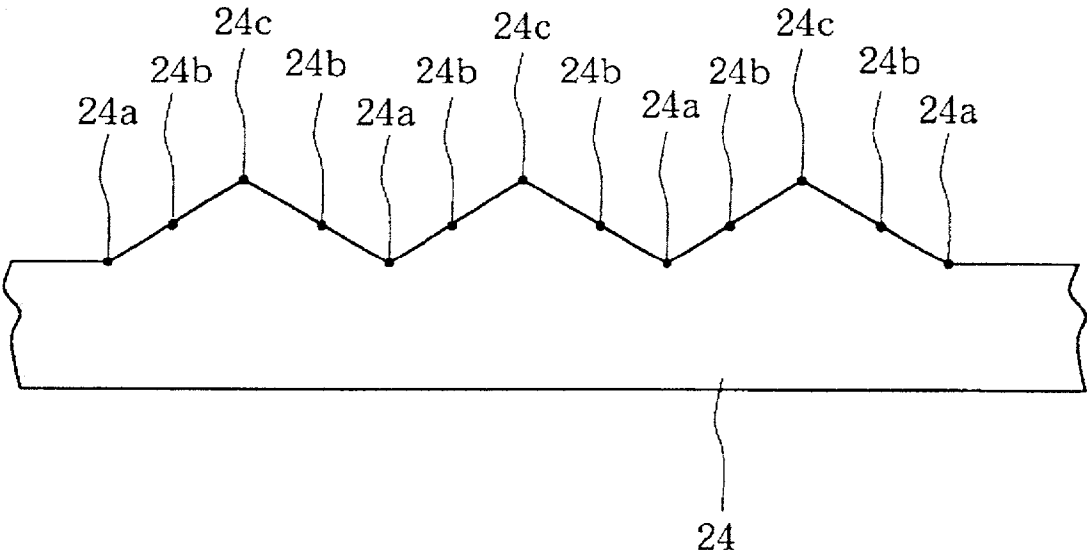


FIG.14

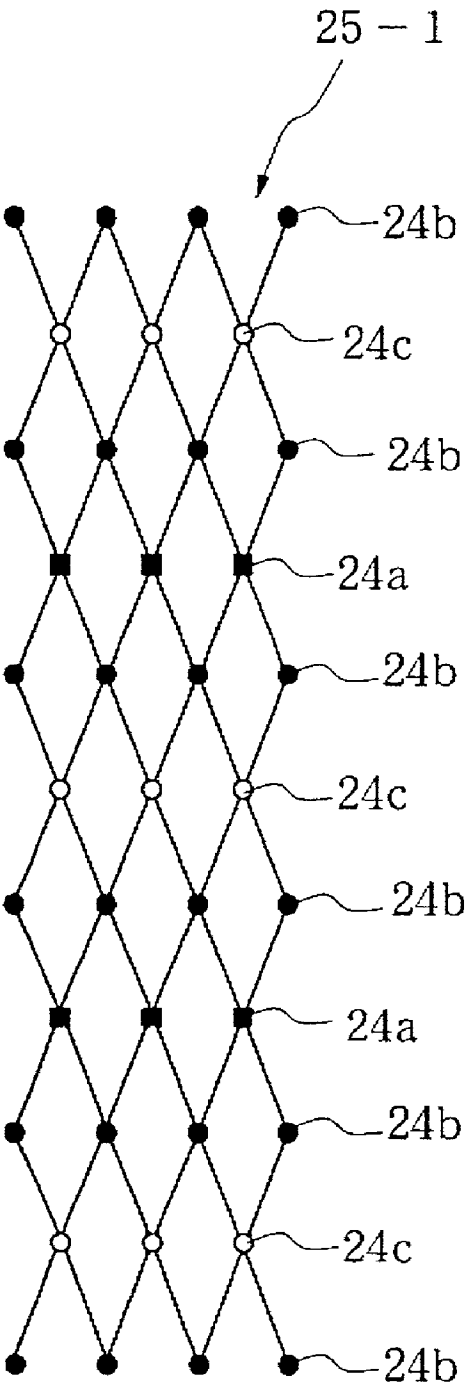


FIG.15A

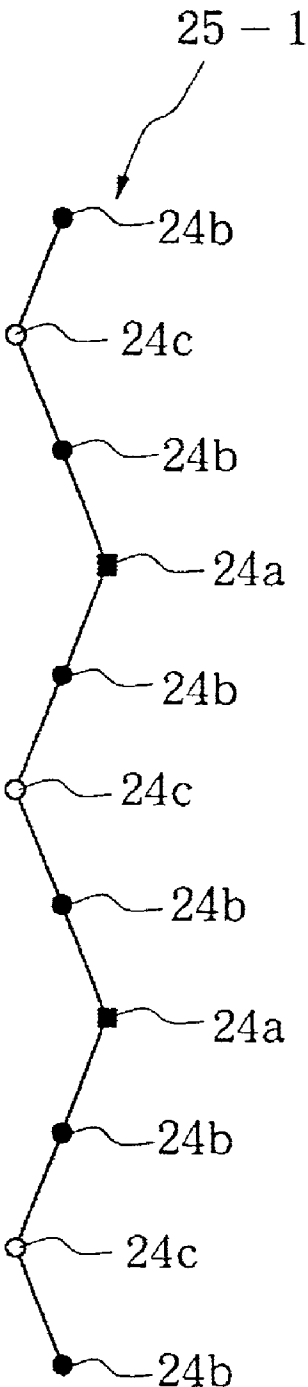


FIG.15B

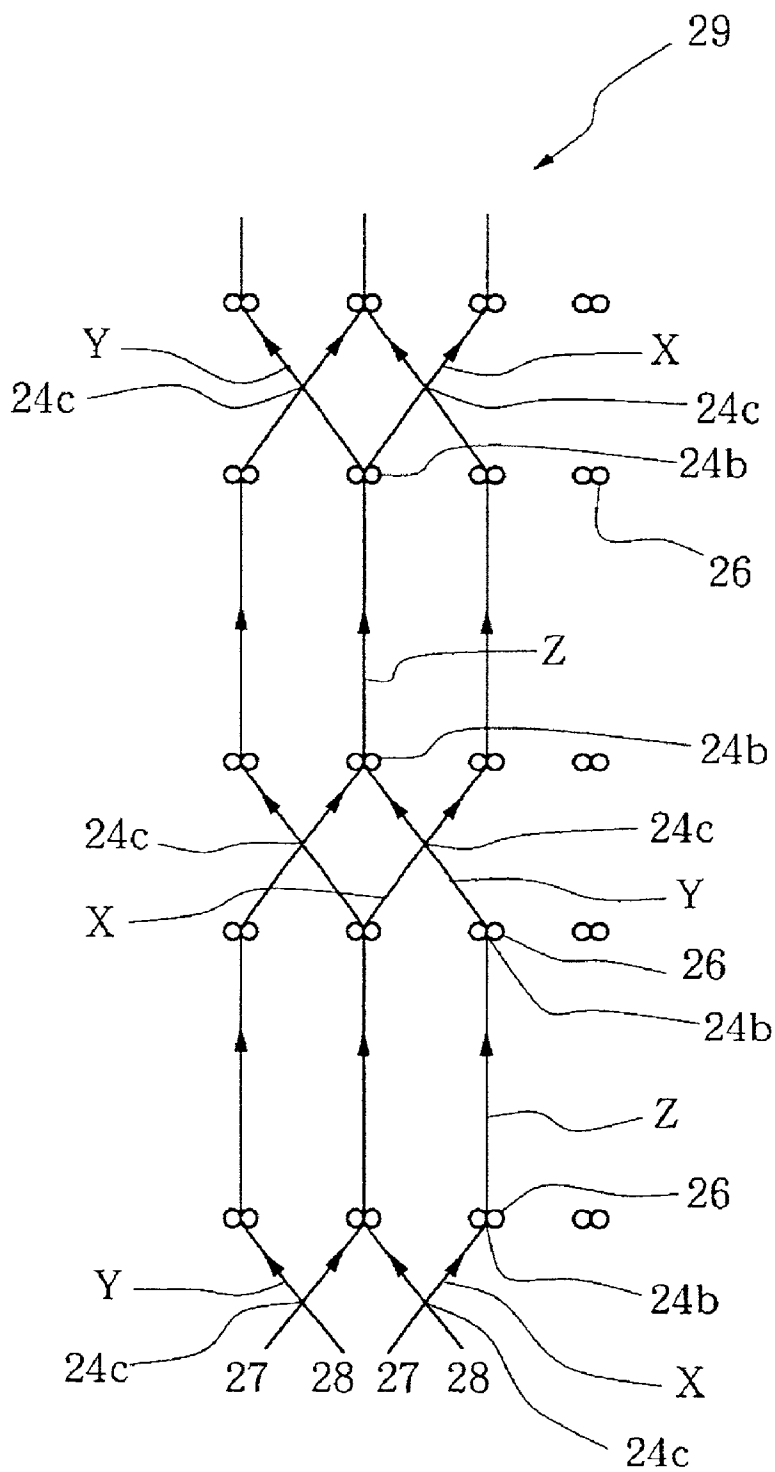


FIG.16

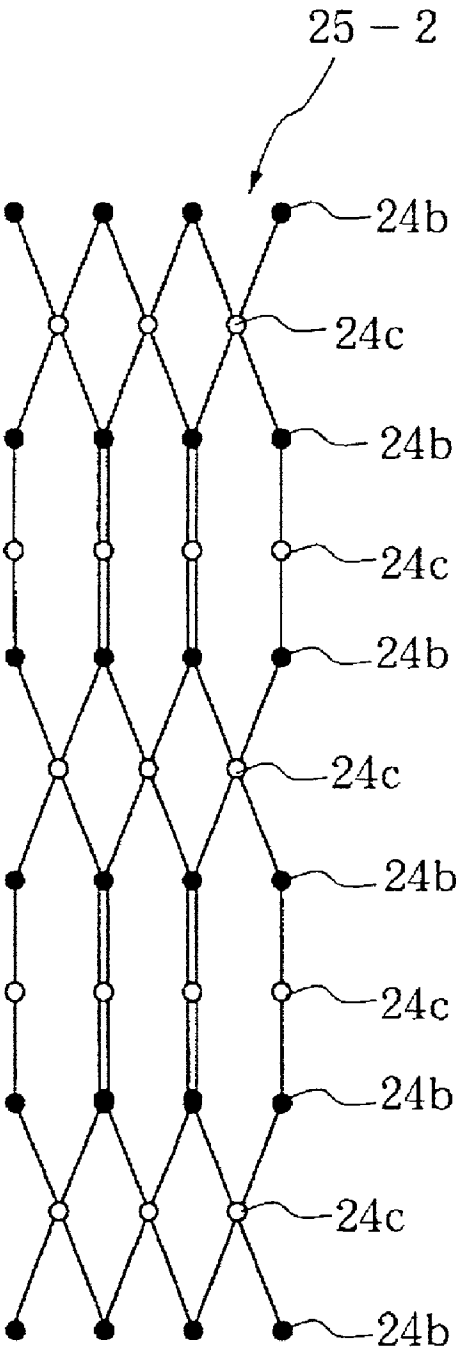


FIG.17A

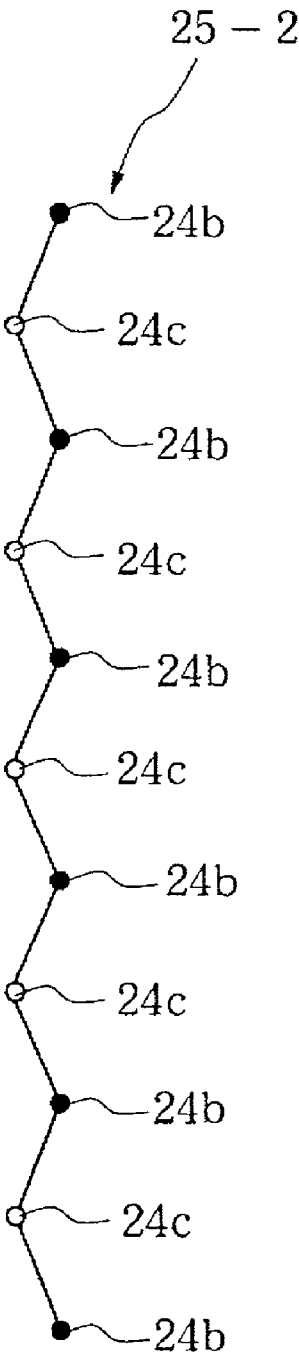


FIG.17B

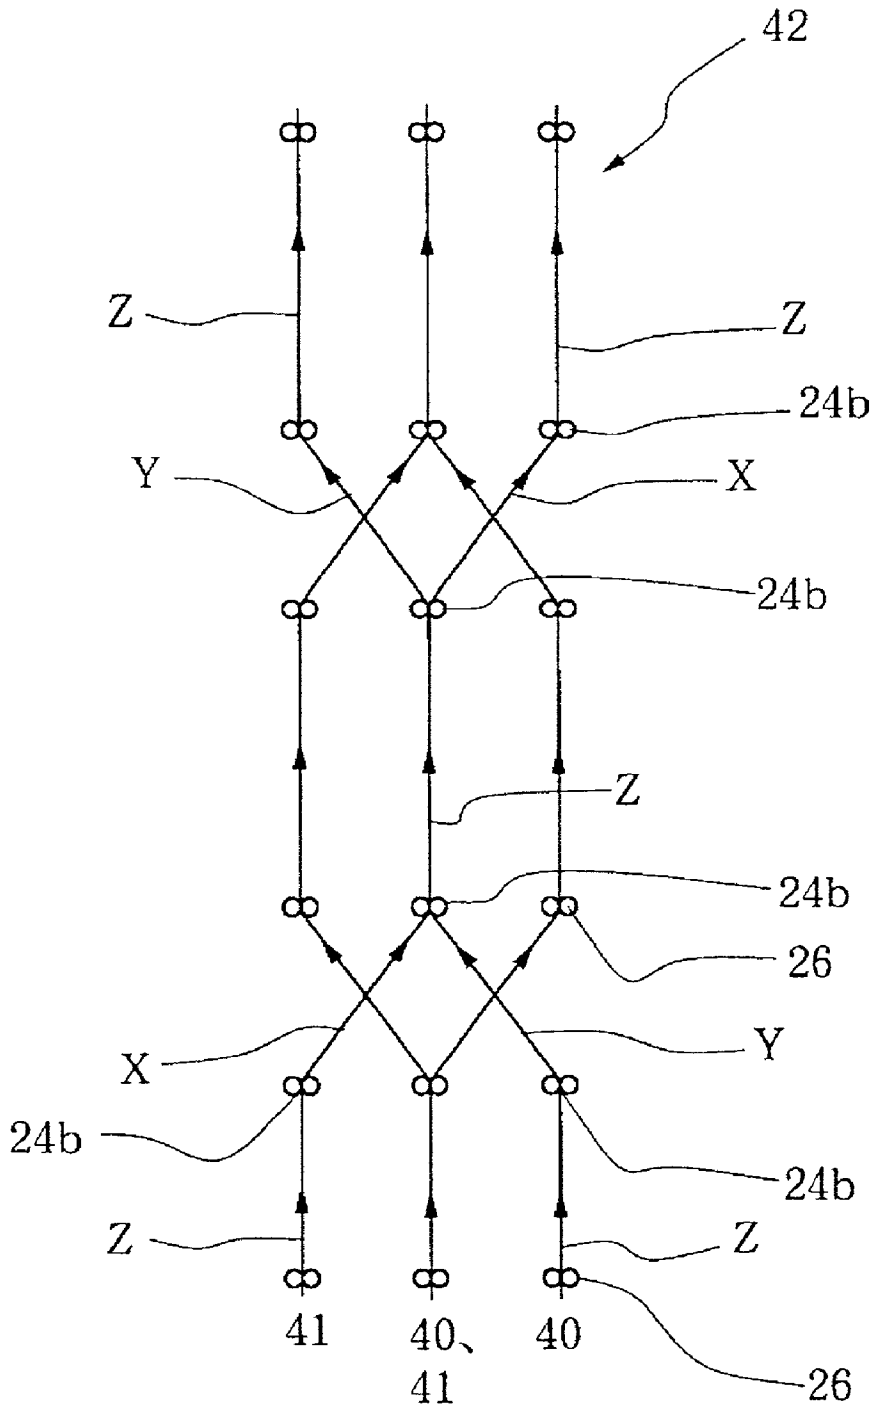


FIG.18

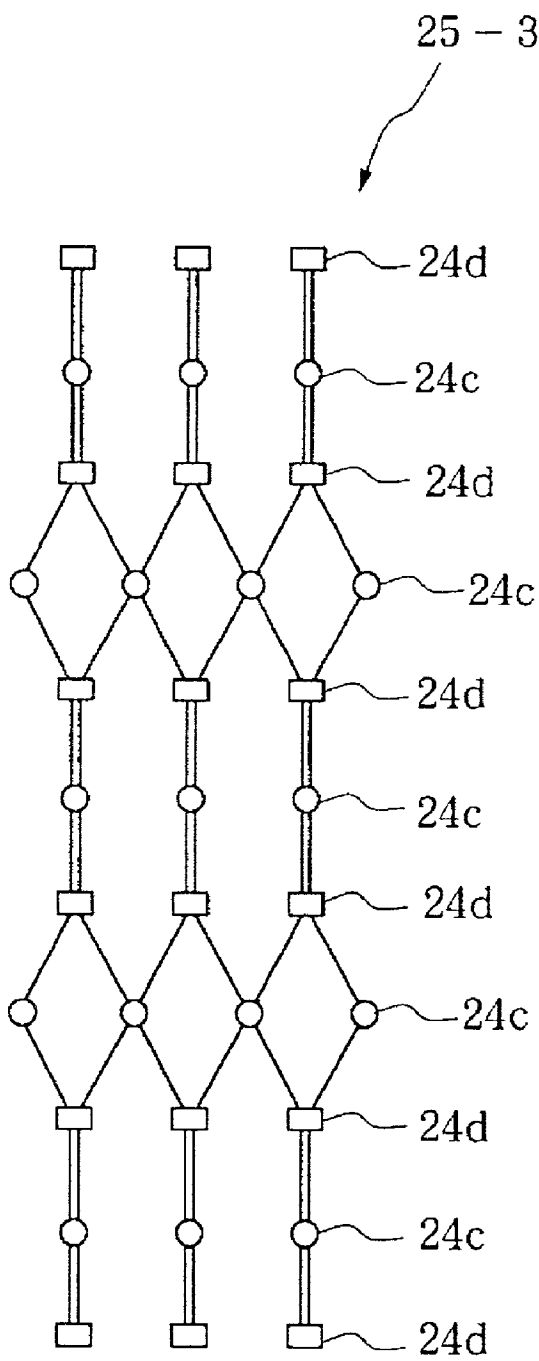


FIG.19A

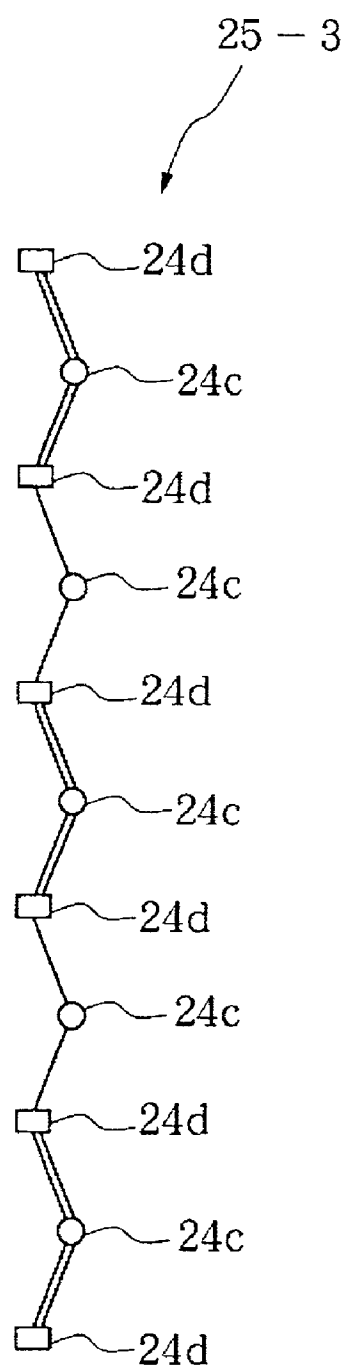


FIG.19B

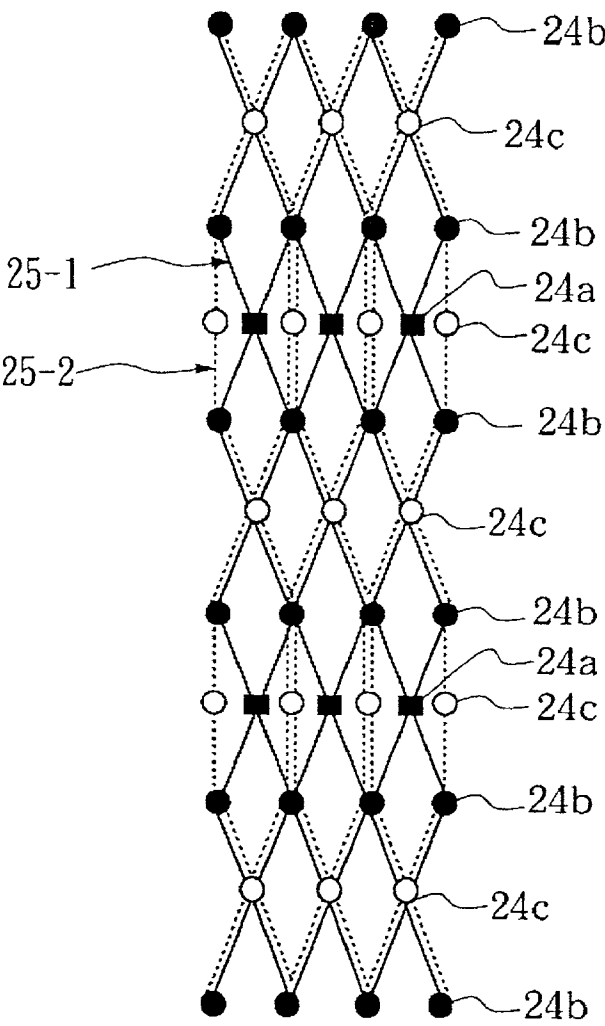


FIG.20A

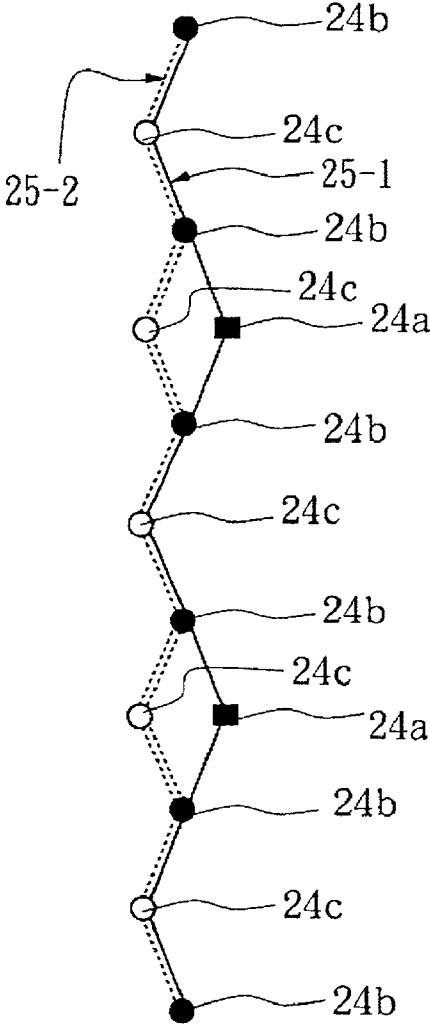


FIG.20B




FIG.21C

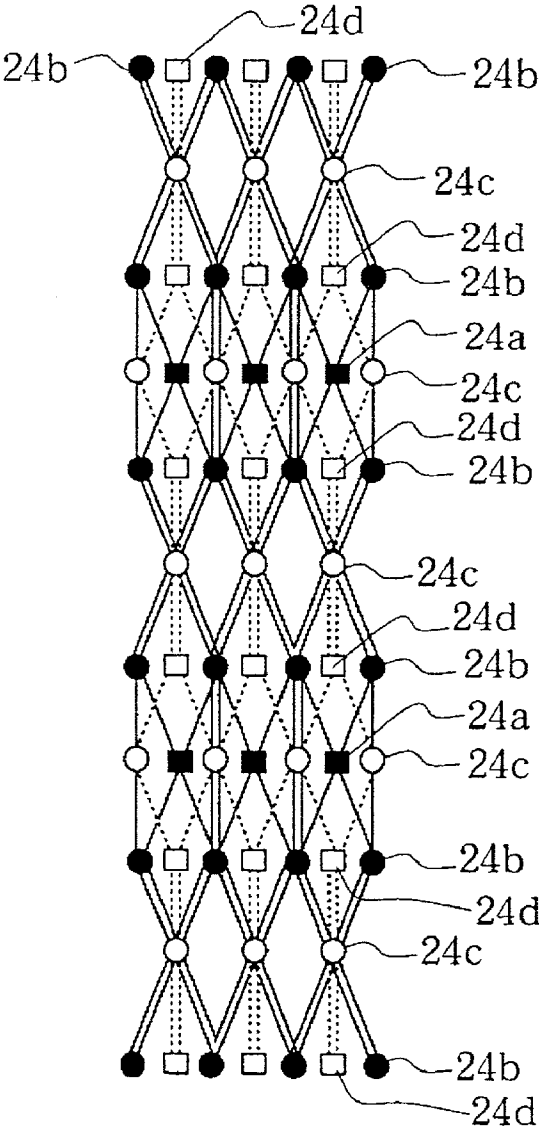


FIG.21A

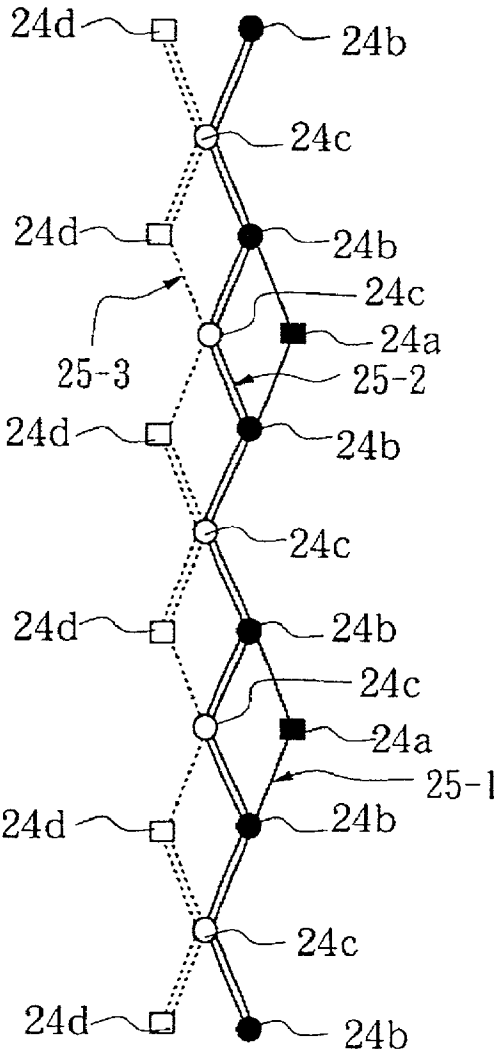


FIG.21B

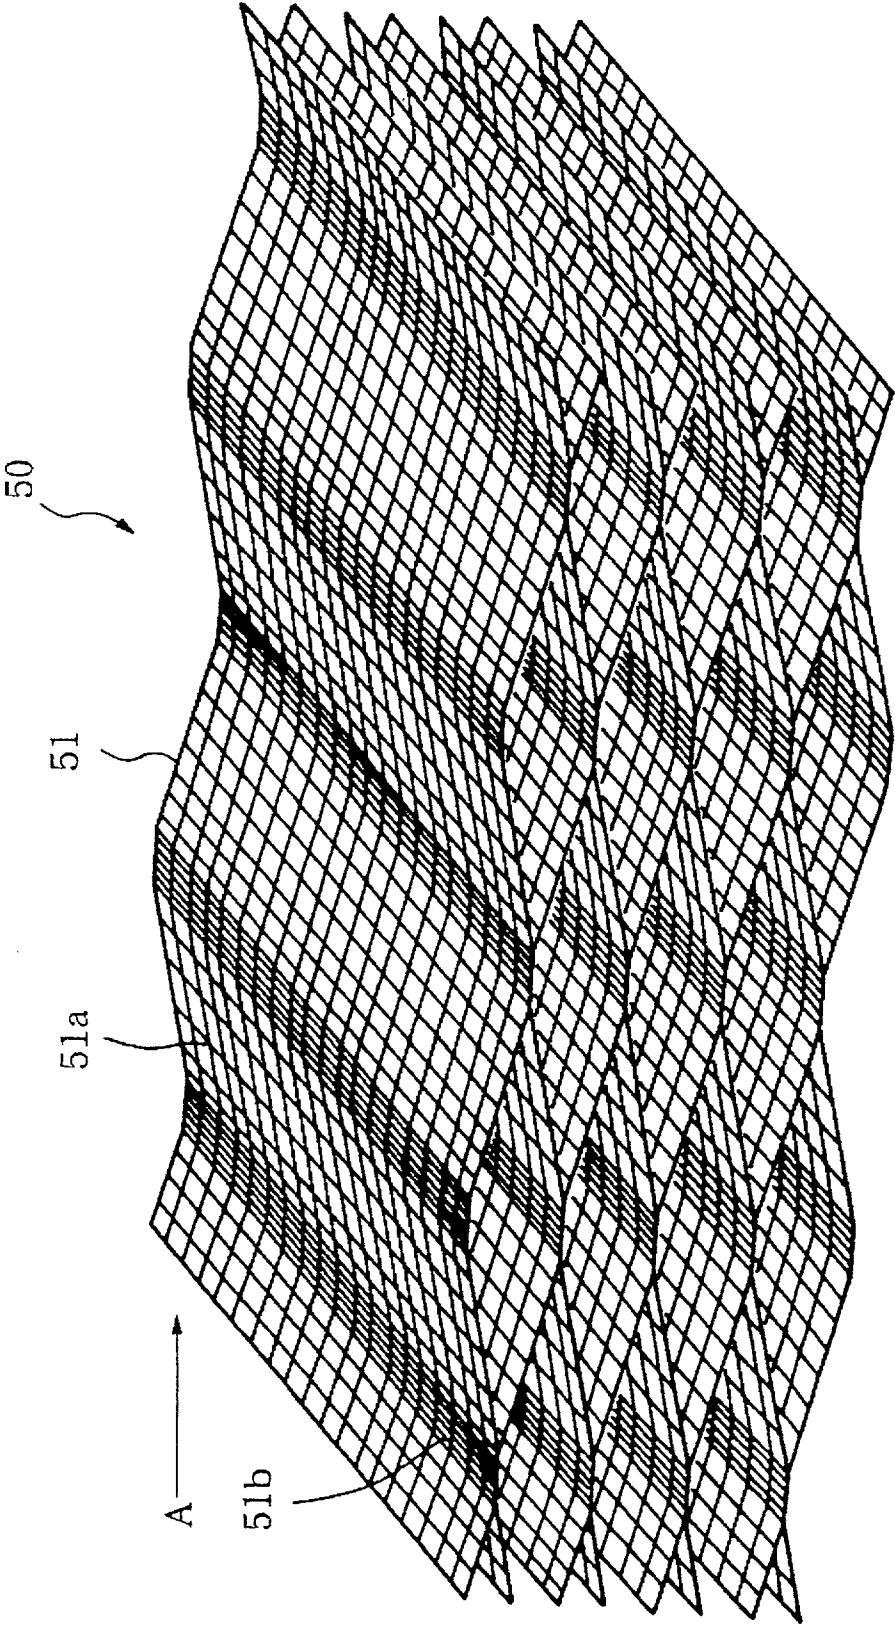


FIG.22

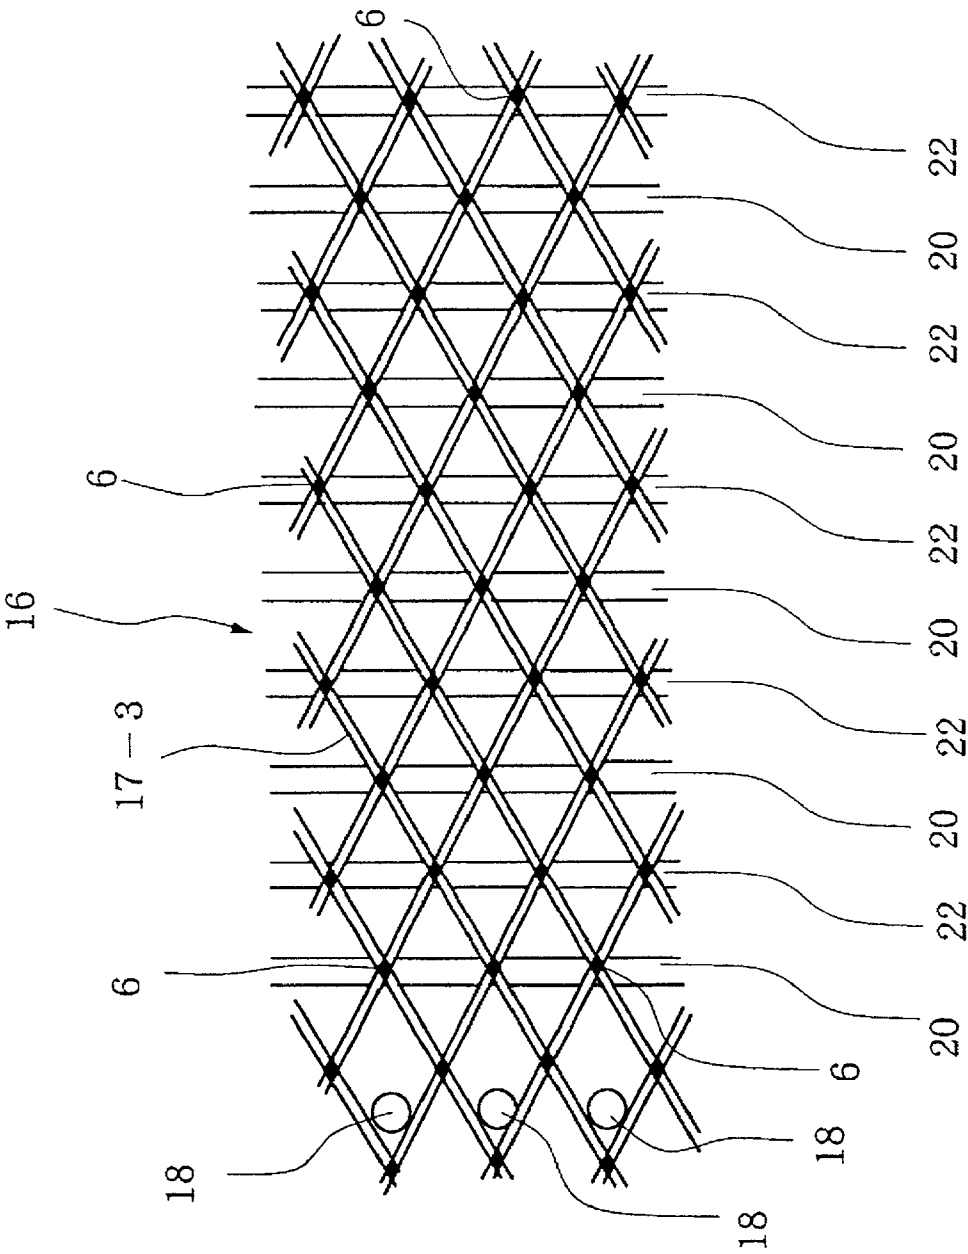


FIG.23

COLUMN PACKING AND METHOD FOR MANUFACTURING THE SAME

BACKGROUND OF THE INVENTION

[0001] This invention relates to a column packing filled in a device which is divided in a plurality of chambers or channels connected to one another and performs material transfer, heat exchange or mixing between gases, liquids or gas and liquid. The invention relates also to a method for manufacturing such column packing.

[0002] Japanese Patent Application Laid-open Publication No. Hei 3-203976 discloses a column packing of this type. This column packing is made up of a plurality of permeable sheets which are disposed in parallel to one another and extend in the direction of a main stream of fluid. Projecting portions of these permeable sheets are disposed in the direction that crosses the main stream of fluid and these projections function as spacers between the adjacent permeable sheets. This packing (hereinafter referred to as "X-packing" because the cross section of a joint portion between two adjacent permeable sheets assumes the shape of the letter X) is beneficial in that fluid flowing down along the permeable sheets is repeatedly joined, mixed, horizontally dispersed and redistributed at each joint of the permeable sheets. Thus, fluid flow which was not uniform when it was charged in the device gradually becomes uniform resulting in an optimum material transfer or heat exchange. Moreover, gas charged in the device passes through the liquid flowing along the inclined surfaces of the permeable sheets and necessary contact between the gas and the liquid is achieved by contacting the gas with the liquid while the gas passes through the permeable sheets, so that material transfer or heat exchange can be effected efficiently with a minimum pressure loss.

[0003] For manufacturing this X-packing, the inventor of this application proposed the method described in U.S. Pat. No. 5,673,726. According to this method, as shown in FIG. 22, permeable sheets 51 in plural layers and joints 51b of adjacent permeable sheets 51 are simultaneously produced and a three-dimensional woven packing 50 thereby is produced.

[0004] In a case where this X-packing manufactured by the above described prior art method is used as a packing loaded in, e.g., a gas-liquid mixing device, the packing 50 of FIG. 22 is erected in the device and liquid from a distributor is caused to flow from the top to the bottom, i.e., in the direction of arrow A. It is, however, actually difficult to maintain the packing 50 strictly horizontally in the device by reason of an error in installation or other causes and, as a result, the threads that run crosswise of the separated portions 51a and the joints 51b of the packing 50 are disposed in a somewhat inclined relationship to the horizontal direction. For this reason, when the operation of the device is started and liquid is caused to flow in the direction of the arrow A, the liquid flows concentrically along a lower portion of the threads that run crosswise with the result that collection, horizontal distribution and downward redistribution of the liquid are not performed uniformly but flow of the liquid tends to concentrate on the lower portion of the inclined threads running crosswise.

[0005] It is, therefore, an object of the invention to provide an X-packing capable of accurately achieving uniform collection and redistribution of liquid at joints of the X-packing.

[0006] It is another object of the invention to provide a method for manufacturing such X-packing at a low cost and in a large scale.

SUMMARY OF THE INVENTION

[0007] For achieving these objects of the invention, there is provided a method for manufacturing a packing made of a three-dimensional net-like structure which constitutes an internal structure of a device which performs material transfer, heat exchange or mixing between gases, liquids or gas and liquid, said internal structure being divided in a plurality of chambers or channels connected to one another and said three-dimensional net-like structure being formed by conversion and dispersion of four line elements, said method comprising steps of

[0008] (A) disposing first line elements extending in parallel at a predetermined interval in a first direction on a plane and second line elements extending in parallel at a predetermined interval in a second direction which is different from the first direction on the same plane in such a manner that the first line elements cross the second line elements at a desired angle and the first and second line elements are laid one upon the other;

[0009] (B) fixing the first line elements to the second line elements at crossing points thereof and thereby forming a net;

[0010] (C) pressing the net to form a plurality of parallel undulating bulging portions which bulge at alternate ones of the crossing points continuously formed in the first direction and the second direction and thereby forming an undulating net;

[0011] (D) laying a second layer of the undulating net upon a first layer of the undulating net in such a manner that the crossing points continuously formed in the first direction and the second direction of the first layer of the undulating net alternately come into contact with and separate from the crossing points continuously formed in the first direction and the second direction of the second layer of the undulating net and thereafter fixing together the crossing points of the first layer of the undulating net and the second layer of the undulating net which are in contact with each other; and

[0012] (E) laying a third layer of the undulating net upon the second layer of the undulating net in such a manner that the crossing points continuously formed in the first direction and the second direction of the second layer of the undulating net alternately come into contact with and separate from the crossing points continuously formed in the first direction and the second direction of the third layer of the undulating net and thereafter fixing together the crossing points of the second layer of the undulating net and the third layer of the undulating net which are in contact with each other; and thereafter superposing a fourth, a fifth . . . and n-th (n being any integer) layer of the undulating nets in the same manner and fixing together the crossing points of the respective layers of the undulating nets and the immediately lower layers of the undulating nets which are in contact with each other.

[0013] According to the manufacturing method, a packing 1 as shown in the schematic perspective view of FIG. 1 can

be obtained. This packing **1** has, as shown in the partial perspective view of **FIG. 2**, has a unit structure **2** which is a combination of two quadruple pyramids which as a common base and apexes which are directed in the opposite directions. The three-dimensional net-like structure is formed by disposing a plurality of the unit structures **2** in vertical and horizontal directions. As will be apparent from **FIG. 2**, in this unit structure **2**, four line elements **3** constitute four sides of the respective quadruple pyramids and respective apexes **2a** of the two quadruple pyramids and joints **2b** of the two quadruple pyramids are formed by conversion and dispersion of four line elements. Accordingly, no element corresponding to the horizontal threads in the prior art X-packing is used at all in this unit structure **2**.

[0014] Accordingly, by using the packing **1** manufactured by the method of the invention in a device such as a gas-liquid contact device, liquid from a distributor flows in the direction of arrow **B** in **FIG. 1** and, since no element corresponding to the horizontal threads is used in the packing **1**, the liquid which has fallen upon the top of the packing **1** does not produce a drift which is caused by flow of the liquid toward a laterally lower portion even if there is an error in installing the packing **1** in the device and, therefore, collection and downward redistribution of the liquid at the two vertical apexes **2a** and joints **2b** of the two quadruple pyramids of the unit structure **2** are performed uniformly.

[0015] For achieving the objects of the invention, there is also provided a method for manufacturing a packing made of a three-dimensional net-like structure which constitutes an internal structure of a device which performs material transfer, heat exchange or mixing between gases, liquids or gas and liquid, said internal structure being divided in a plurality of chambers or channels connected to one another and said three-dimensional net-like structure being formed by conversion and dispersion of three line elements, said method comprising:

[0016] (A) a step of forming a first undulating net comprising the following steps (a), (b) and (c):

[0017] (a) disposing first line elements extending in parallel at a predetermined interval in a first direction on a plane and second line elements extending in parallel at a predetermined interval in a second direction which is different from the first direction on the same plane in such a manner that the first line elements cross the second line elements at a desired angle and are superposed one upon the other;

[0018] (b) fixing the first line elements to the second line elements at crossing points thereof and thereby forming a net; and

[0019] (c) pressing the net to form a plurality of parallel undulating bulging portions and thereby forming a first undulating net in such a manner that one of the crossing points continuously formed in the first direction and the second direction constitutes a crossing point of the lowest level in forming of a unit three-dimensional net-like structure, a crossing point adjacent to the crossing point of the lowest level constitutes a crossing point of a lower side middle level in forming of the unit three-dimensional net-like structure, a crossing point adjacent to the crossing point of the lower side middle level constitutes a crossing point of an upper side

middle level in forming of the unit three-dimensional net-like structure, a crossing point adjacent to the crossing point of the upper side middle level constitutes a crossing point of the lower side middle level in forming of the unit three-dimensional net-like structure, a crossing point adjacent to the crossing point of the lower side middle level constitutes a crossing point of the lowest level in forming of the unit three-dimensional net-like structure, and subsequent crossing points constitute crossing points of the respective levels in the above cycle in forming of the unit three-dimensional net-like structure;

[0020] (B) a step of forming a second undulating net comprising the following steps (a), (b) and (c):

[0021] (a) disposing

[0022] first line elements extending in parallel at a predetermined interval in the first direction on a plane, bending at a position corresponding to one of the crossing points of the lower side middle level of the first undulating net at a predetermined angle and extending in a third direction, bending at a position corresponding to the next lower side middle point of the first undulating net at the predetermined angle and extending in the second direction, bending at a position corresponding to the next lower side middle level of the first undulating net at the predetermined angle and extending in the third direction again, and bending at a position corresponding to the next lower side middle level of the first undulating net at the predetermined angle and repeating the cycle of extending in the first direction, the third direction, the second direction and the third direction, and

[0023] second line elements extending in parallel at a predetermined interval in the second direction on the plane, bending at a position corresponding to one of the crossing points of the lower side middle level of the first undulating net at a predetermined angle and extending in the third direction, bending at a position corresponding to the next lower side middle point of the first undulating net at the predetermined angle and extending in the first direction, bending at a position corresponding to the next lower side middle level of the first undulating net at the predetermined angle and extending in the third direction again, and bending at a position corresponding to the next lower side middle level of the first undulating net at the predetermined angle and repeating the cycle of extending in the second direction, the third direction, the first direction and the third direction

[0024] in such a manner that the first line elements and the second line elements cross each other at the desired angle in their portions extending in the first or second direction at positions corresponding to the crossing points of the upper side middle level of the first undulating net and extend jointly one being laid upon the other in their portions extending in the third direction;

[0025] (b) fixing the first line elements to the second line elements at the respective crossing points thereof and also at joining points and separating points of their portions extending in the third direction and thereby forming a net; and

[0026] (c) pressing the net to form a plurality of parallel undulating bulging portions which bulge at the respective crossing points and also at middle positions of the portions extending in the third direction and thereby constitute the upper side middle level in forming of the unit three-dimensional net-like structure, and thereby forming a second undulating net;

[0027] (C) a step of forming a third undulating net comprising the following steps (a), (b) and (c):

[0028] (a) disposing

[0029] first line elements extending in parallel at a predetermined interval in the third direction on a plane, bending at a position corresponding to one of the crossing points of the lower side middle level of the first undulating net at a predetermined angle and extending in the second direction, bending at a position corresponding to the next lower side middle point of the first undulating net at the predetermined angle and extending in the third direction again, bending at a position corresponding to the next lower side middle level of the first undulating net at the predetermined angle and extending in the first direction, and bending at a position corresponding to the next lower side middle level of the first undulating net at the predetermined angle and repeating the cycle of extending in the third direction, the second direction, the third direction and the first direction, and

[0030] second line elements extending in parallel at a predetermined interval in the third direction on the plane, bending at a position corresponding to one of the crossing points of the lower side middle level of the first undulating net at a predetermined angle and extending in the first direction, bending at a position corresponding to the next lower side middle point of the first undulating net at the predetermined angle and extending in the third direction again, bending at a position corresponding to the next lower side middle level of the first undulating net at the predetermined angle and extending in the second direction, and bending at a position corresponding to the next lower side middle level of the first undulating net at the predetermined angle and repeating the cycle of extending in the third direction, first direction, the third direction and the second direction

[0031] in such a manner that the first line elements and the second line elements cross each other at the desired angle in their portions extending in the first or second direction at positions corresponding to middle positions of the portions extending in the third direction of the second undulating net and extend jointly one being laid upon the other in their portions extending in the third direction;

[0032] (b) fixing the first line elements to the second line elements at the crossing points thereof and also at joining points and separating points of their portions extending in the third direction and thereby forming a net; and

[0033] (c) pressing the net to form a plurality of parallel undulating bulging portions which bulge at the respective joining and separating points of the portions

extending in the third direction and thereby constitute the highest level in forming of the unit three-dimensional net-like structure, and thereby forming a third undulating net;

[0034] (D) a step of laying the second undulating net upon the first undulating net in such a manner that the crossing points of the second undulating net come into contact with the crossing points of the upper middle level of the first undulating net, the joining points and the separating points of the portions extending in the third direction of the second undulating net come into contact with the crossing points of the lower middle level of the first undulating net, and the undulating bulging portions at the middle positions of the portions extending in the third direction of the second undulating net are separated from the crossing points of the lowest level of the first undulating net and form the upper middle level of the unit three-dimensional net-like structure;

[0035] (E) a step of laying the third undulating net upon the second undulating net in such a manner that the crossing points of the third undulating net come into contact with the undulating bulging portions at the middle positions of the portions extending in the third direction of the second undulating net, the portions extending in the third direction of the third undulating net come into contact, at their middle positions, with the crossing points of the second undulating net, and the undulating bulging portions at the joining points and the separating points of the portions extending in the third direction of the third undulating net are separated from the second undulating net and form the highest level of the unit three-dimensional net-like structure; and

[0036] (F) a step of fixing the first undulating net, the second undulating net and the third undulating net together at necessary points among points of contact thereof.

[0037] According to this manufacturing method, a packing 30 as shown in the schematic perspective view of FIG. 3 can be obtained. This packing 30 has, as shown in the partial perspective view of FIG. 4, a unit structure 32 which is a combination of three triangular pyramids 33 each having an apex 33a and three sides 33b and three triangular pyramids 34 each having an apex 34a directed in the opposite direction to the apex 33a and three sides 34b. The three-dimensional net-like structure is formed by disposing a plurality of the unit structures 32 in vertical and horizontal directions.

[0038] In the unit structure 32, the respective sides 33b and 34b are formed with line elements. More specifically, three line elements constitute the three sides 33b and 34b of the triangular pyramids 33 and 34 and the apexes 33a and 34a of the respective triangular pyramids and joints 35 of the sides of the respective triangular pyramids are formed by conversion and dispersion of three line elements. In this unit structure 32 either, no element corresponding to the horizontal threads is provided at all and, therefore, the same effect as the one described above with respect to the unit structure 2 can be achieved. That is, liquid flows in the direction of arrow C in FIG. 3 and collection and downward redistribution of the liquid at the apexes 33a and 34a and the joints 35 of the triangular pyramids 33 and 34 of the unit structure 32 are performed uniformly.

[0039] The present invention can be applied not only to the column packing used in devices such as a gas-liquid mixing device but also to manufacturing of other three-dimensional net-like structure such as ones used for a mist eliminator, a multi-layer filtering film and aggregate.

[0040] In one aspect of the invention, there is provided a method for manufacturing a three-dimensional net-like structure including a mist eliminator and a multi-layer filtering film formed by conversion and dispersion of four line elements, said method comprising steps of:

[0041] (A) disposing first line elements extending in parallel at a predetermined interval in a first direction on a plane and second line elements extending in parallel at a predetermined interval in a second direction which is different from the first direction on the same plane in such a manner that the first line elements cross the second line elements at a desired angle and the first and second line elements are laid one upon the other;

[0042] (B) fixing the first line elements to the second line elements at crossing points thereof and thereby forming a net;

[0043] (C) pressing the net to form a plurality of parallel undulating bulging portions which bulge at alternate ones of the crossing points continuously formed in the first direction and the second direction and thereby forming an undulating net;

[0044] (D) laying a second layer of the undulating net upon a first layer of the undulating net in such a manner that the crossing points continuously formed in the first direction and the second direction of the first layer of the undulating net alternately come into contact with and separate from the crossing points continuously formed in the first direction and the second direction of the second layer of the undulating net and thereafter fixing together the crossing points of the first layer of the undulating net and the second layer of the undulating net which are in contact with each other; and

[0045] (E) laying a third layer of the undulating net upon the second layer of the undulating net in such a manner that the crossing points continuously formed in the first direction and the second direction of the second layer of the undulating net alternately come into contact with and separate from the crossing points continuously formed in the first direction and the second direction of the third layer of the undulating net and thereafter fixing together the crossing points of the second layer of the undulating net and the third layer of the undulating net which are in contact with each other; and thereafter superposing a fourth, a fifth . . . and n-th (n being any integer) layer of the undulating nets in the same manner and fixing together the crossing points of the respective layers of the undulating nets and the immediately lower layers of the undulating nets which are in contact with each other.

[0046] In another aspect of the invention, there is provided a method for manufacturing a three-dimensional net-like structure including a mist eliminator and a multi-layer filtering film formed by conversion and dispersion of three line elements, said method comprising:

[0047] (A) a step of forming a first undulating net comprising the following steps (a), (b) and (c):

[0048] (a) disposing first line elements extending in parallel at a predetermined interval in a first direction on a plane and second line elements extending in parallel at a predetermined interval in a second direction which is different from the first direction on the same plane in such a manner that the first line elements cross the second line elements at a desired angle and are superposed one upon the other;

[0049] (b) fixing the first line elements to the second line elements at crossing points thereof and thereby forming a net; and

[0050] (c) pressing the net to form a plurality of parallel undulating bulging portions and thereby forming a first undulating net in such a manner that one of the crossing points continuously formed in the first direction and the second direction constitutes a crossing point of the lowest level in forming of a unit three-dimensional net-like structure, a crossing point adjacent to the crossing point of the lowest level constitutes a crossing point of a lower side middle level in forming of the unit three-dimensional net-like structure, a crossing point adjacent to the crossing point of the lower side middle level constitutes a crossing point of an upper side middle level in forming of the unit three-dimensional net-like structure, a crossing point adjacent to the crossing point of the upper side middle level constitutes a crossing point of the lower side middle level in forming of the unit three-dimensional net-like structure, a crossing point adjacent to the crossing point of the lower side middle level constitutes a crossing point of the lowest level in forming of the unit three-dimensional net-like structure, and subsequent crossing points constitute crossing points of the respective levels in the above cycle in forming of the unit three-dimensional net-like structure;

[0051] (B) a step of forming a second undulating net comprising the following steps (a), (b) and (c):

[0052] (a) disposing

[0053] first line elements extending in parallel at a predetermined interval in the first direction on a plane, bending at a position corresponding to one of the crossing points of the lower side middle level of the first undulating net at a predetermined angle and extending in a third direction, bending at a position corresponding to the next lower side middle point of the first undulating net at the predetermined angle and extending in the second direction, bending at a position corresponding to the next lower side middle level of the first undulating net at the predetermined angle and extending in the third direction again, and bending at a position corresponding to the next lower side middle level of the first undulating net at the predetermined angle and repeating the cycle of extending in the first direction, the third direction, the second direction and the third direction, and

[0054] second line elements extending in parallel at a predetermined interval in the second direction on the plane, bending at a position corresponding to one of the crossing points of the lower side middle level of

the first undulating net at a predetermined angle and extending in the third direction, bending at a position corresponding to the next lower side middle point of the first undulating net at the predetermined angle and extending in the first direction, bending at a position corresponding to the next lower side middle level of the first undulating net at the predetermined angle and extending in the third direction again, and bending at a position corresponding to the next lower side middle level of the first undulating net at the predetermined angle and repeating the cycle of extending in the second direction, the third direction, the first direction and the third direction

[0055] in such a manner that the first line elements and the second line elements cross each other at the desired angle in their portions extending in the first or second direction at positions corresponding to the crossing points of the upper side middle level of the first undulating net and extend jointly one being laid upon the other in their portions extending in the third direction;

[0056] (b) fixing the first line elements to the second line elements at the respective crossing points thereof and also at joining points and separating points of their portions extending in the third direction and thereby forming a net; and

[0057] (c) pressing the net to form a plurality of parallel undulating bulging portions which bulge at the respective crossing points and also at middle positions of the portions extending in the third direction and thereby constitute the upper side middle level in forming of the unit three-dimensional net-like structure, and thereby forming a second undulating net;

[0058] (C) a step of forming a third undulating net comprising the following steps (a), (b) and (c):

[0059] (a) disposing

[0060] first line elements extending in parallel at a predetermined interval in the third direction on a plane, bending at a position corresponding to one of the crossing points of the lower side middle level of the first undulating net at a predetermined angle and extending in the second direction, bending at a position corresponding to the next lower side middle point of the first undulating net at the predetermined angle and extending in the third direction again, bending at a position corresponding to the next lower side middle level of the first undulating net at the predetermined angle and extending in the first direction, and bending at a position corresponding to the next lower side middle level of the first undulating net at the predetermined angle and repeating the cycle of extending in the third direction, the second direction, the third direction and the first direction, and

[0061] second line elements extending in parallel at a predetermined interval in the third direction on the plane, bending at a position corresponding to one of the crossing points of the lower side middle level of the first undulating net at a predetermined angle and extending in the first direction, bending at a position corresponding to the next lower side middle point of

the first undulating net at the predetermined angle and extending in the third direction again, bending at a position corresponding to the next lower side middle level of the first undulating net at the predetermined angle and extending in the second direction, and bending at a position corresponding to the next lower side middle level of the first undulating net at the predetermined angle and repeating the cycle of extending in the third direction, first direction, the third direction and the second direction

[0062] in such a manner that the first line elements and the second line elements cross each other at the desired angle in their portions extending in the first or second direction at positions corresponding to middle positions of the portions extending in the third direction of the second undulating net and extend jointly one being laid upon the other in their portions extending in the third direction;

[0063] (b) fixing the first line elements to the second line elements at the crossing points thereof and also at joining points and separating points of their portions extending in the third direction and thereby forming a net; and

[0064] (c) pressing the net to form a plurality of parallel undulating bulging portions which bulge at the respective joining and separating points of the portions extending in the third direction and thereby constitute the highest level in forming of the unit three-dimensional net-like structure, and thereby forming a third undulating net;

[0065] (D) a step of laying the second undulating net upon the first undulating net in such a manner that the crossing points of the second undulating net come into contact with the crossing points of the upper middle level of the first undulating net, the joining points and the separating points of the portions extending in the third direction of the second undulating net come into contact with the crossing points of the lower middle level of the first undulating net, and the undulating bulging portions at the middle positions of the portions extending in the third direction of the second undulating net are separated from the crossing points of the lowest level of the first undulating net and form the upper middle level of the unit three-dimensional net-like structure;

[0066] (E) a step of laying the third undulating net upon the second undulating net in such a manner that the crossing points of the third undulating net come into contact with the undulating bulging portions at the middle positions of the portions extending in the third direction of the second undulating net, the portions extending in the third direction of the third undulating net come into contact, at their middle positions, with the crossing points of the second undulating net, and the undulating bulging portions at the joining points and the separating points of the portions extending in the third direction of the third undulating net are separated from the second undulating net and form the highest level of the unit three-dimensional net-like structure; and

[0067] (F) a step of fixing the first undulating net, the second undulating net and the third undulating net together at necessary points among points of contact thereof.

[0068] In another aspect of the invention, there is provided a packing made of a three-dimensional net-like structure which constitutes an internal structure of a device which performs material transfer, heat exchange or mixing between gases, liquids or gas and liquid, said internal structure being divided in a plurality of chambers or channels connected to one another and said three-dimensional net-like structure being formed by conversion and dispersion of four line elements wherein a converging portion of the four line elements is formed by mutual contact of undulating nets having parallel undulating bulging portions at necessary portions.

[0069] In another aspect of the invention, there is provided a packing made of a three-dimensional net-like structure which constitutes an internal structure of a device which performs material transfer, heat exchange or mixing between gases, liquids or gas and liquid, said internal structure being divided in a plurality of chambers or channels connected to one another and said three-dimensional net-like structure being formed by conversion and dispersion of three line elements wherein a converging portion of the three line elements is formed by mutual contact of undulating nets having parallel undulating bulging portions at necessary portions.

[0070] In another aspect of the invention, there is provided a three-dimensional net-like structure including a mist eliminator and a multi-layer filtering film formed by conversion and dispersion of four line elements wherein a converging portion of the four line elements is formed by mutual contact of undulating nets having parallel undulating bulging portions at necessary portions.

[0071] In still another aspect of the invention, there is provided a three-dimensional net-like structure including a mist eliminator and a multi-layer filtering film formed by conversion and dispersion of three line elements wherein a converging portion of the three line elements is formed by mutual contact of undulating nets having parallel undulating bulging portions at necessary portions.

[0072] Preferred embodiments of the invention will be described below with reference to the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

[0073] In the accompanying drawings,

[0074] FIG. 1 is a schematic perspective view showing an example of the three-dimensional net-like structure of the invention;

[0075] FIG. 2 is a perspective view showing a unit structure of the example;

[0076] FIG. 3 is a schematic perspective view showing another example of the three-dimensional net-like structure;

[0077] FIG. 4 is a perspective view showing a unit structure of the example;

[0078] FIG. 5 is a plan view showing an example of a line element placing table;

[0079] FIG. 6 is a view showing crossing of first line elements and second line elements;

[0080] FIG. 7 is a view showing fixing of the first line elements and the second line elements together;

[0081] FIG. 8 is a front view of a mold with its central portion being omitted;

[0082] FIG. 9 is a partial plan view of this mold;

[0083] FIG. 10A is a side view of the mold;

[0084] FIGS. 10B to 10D are views showing the process of forming an undulating net by this mold;

[0085] FIG. 11A is a plan view of a laying table for laying undulating nets one upon another;

[0086] FIG. 11B is a side view of the laying table;

[0087] FIG. 12 is a side view of the laying table showing laying of a second undulating net on a first undulating net;

[0088] FIG. 13 is a side view of the laying table showing laying of a third undulating net on the second undulating net;

[0089] FIG. 14 is a side view of a lower mold of a mold used for a second embodiment of the manufacturing method of the invention;

[0090] FIG. 15A is a front view of a first undulating net used in the second embodiment;

[0091] FIG. 15B is a side view of the first undulating net;

[0092] FIG. 16 is a plan view of a line element placing table showing forming of a second undulating net in the second embodiment;

[0093] FIG. 17A is a front view of the second undulating net of the second embodiment;

[0094] FIG. 17B is a side view of the second undulating net of the second embodiment;

[0095] FIG. 18 is a plan view of a line element placing table showing forming of a third undulating net of the second embodiment;

[0096] FIG. 19A is a front view of the third undulating net of the second embodiment;

[0097] FIG. 19B is a side view of the third undulating net of the second embodiment;

[0098] FIGS. 20A and 20B show laying of the second undulating net on the first undulating net in the second embodiment in which

[0099] FIG. 20A is a front view of the undulating nets and

[0100] FIG. 20B is a side view of the undulating nets;

[0101] FIGS. 21A to 20C show laying of the third undulating net on the first and second undulating nets in the second embodiment in which

[0102] FIG. 21A is a front view of the nets,

[0103] FIG. 21B is a side view thereof and

[0104] FIG. 21C is a plan view thereof;

[0105] FIG. 22 is a perspective view showing a prior art method for manufacturing an X-packing; and

[0106] FIG. 23 is a partial plan view showing laying state of FIG. 13.

DESCRIPTION OF PREFERRED EMBODIMENTS

[0107] Embodiment 1

[0108] This embodiment relates to a method for manufacturing the three-dimensional net-like structure shown in FIGS. 1 and 2.

[0109] (1) Step of Disposing Line Elements

[0110] A line element used in the manufacturing method of the invention may be made of metal or plastic. There is no particular limitation in the material used for the line element and wire, twine or monofilament may be used as the line element. Since the line element is formed to an undulating net by pressing, the material for the line element must be capable of plastic deformation and have sufficient rigidity to maintain the undulating shape after pressing.

[0111] The line element may be made of a monofilament or a single piece of wire but a line element made of wire or twine which is made by twisting thin steel lines or plastic lines is preferable because liquid flows along the space between the lines which constitute the wire or twine due to the capillary action and thereby enhance transfer of the liquid. In the present embodiment, seven steel lines each having a diameter of 0.1 mm are twisted together to form a single steel wire and two of this steel wire are further twisted to a single wire and this wire is used as the line element 3.

[0112] This line element 3 is disposed on a line element placing table 4 shown in the plan view of FIG. 5. In the plan view, line element engaging pins 5 are provided at a predetermined interval in the four edge portions of the line element placing table 4. The line element 3 wound about a drum (not shown) is unwound from the drum and, as shown in FIG. 5 by way of example, is guided by a pin 5-1 provided in the left upper corner as viewed in FIG. 5 and thereafter is disposed over the entire surface of the line elements placing table 4, guided by pins 5-2, 5-3, 5-4, 5-5 and so on and extending in the order of arrows D, E, F, G etc.

[0113] Thus, first line elements 2a which extend in parallel at a predetermined interval in a first direction X on a plane and second line elements 3b which extend in parallel at a predetermined interval in a second direction Y which is different from the first direction X are disposed in such a manner that the first line elements 3a cross the second line elements 3b at a desired angle α and the first and second line elements 3a and 3b are laid one upon the other as shown in FIG. 6.

[0114] (2) Step of Fixing the First Line Elements to the Second Line Elements at Respective Crossing Points

[0115] The first line elements 3a and the second line elements 3b thus disposed are spot-welded to each other at respective crossing points 6 by a known spot welding machine as shown in FIG. 7 and a net 7 is thereby formed.

[0116] (3) Step of Cutting Off a Net

[0117] This net 7 is removed from the line element placing table 4 and cut into a predetermined size.

[0118] (4) Step of Forming of an Undulating Net

[0119] Then, the net 7 is pressed by a mold 8 shown in FIGS. 8 to 10 to form an undulating net.

[0120] FIG. 8 is a front view of the mold 8 with a part thereof being omitted, FIG. 9 is a partial plan view of the mold 8 and FIG. 10A is a side view of the mold 8. In the mold 8, an upper mold table 9 has slide portions 12, 12 which are slidably engaged on a pair of slide shafts 11, 11 erected upwardly from a lower mold table 10 and thereby can slide vertically along the slide shafts 11, 11. The upper mold table 9 has an upper mold 13 fixed thereon and the lower mold table 10 has a lower mold 14 fixed thereon.

[0121] The lower mold 14 has a row of positioning pins 15 which are erected ahead of the upper mold 13 in the feeding direction of the net 7. The upper mold 13 and the lower mold 14 are formed on the lower surface of the upper mold 13 and the upper surface of the lower mold 14 with waveforms 13a and 14a which are to be imparted to the undulating net. These waveforms are such that crossing points 6 which are formed continuously in the first direction X and the second direction Y of the net 7 bulge alternately to form parallel undulating bulging portions.

[0122] For forming the net 7 to the undulating net, as shown in FIG. 9 and FIG. 10A, the net 7 is first positioned on the lower mold 14 with the upper mold 13 being located above the lower mold 14. The positioning is effected by inserting the positioning pins 15 in rhombic spaces of the net 7 formed by adjacent crossings 6 in the forward end portion of the net 7 in the feeding direction of the net 7.

[0123] Then, manually or by driving the upper mold 13 by a drive unit (not shown), the upper mold 13 is lowered toward the lower mold 14 to press the net 7 between the upper mold 13 and the lower mold 14 and thereby impart the waveform as shown in FIG. 10B.

[0124] Then, as shown in FIG. 10C, the upper mold 13 is lifted, the net 7 is disengaged from the positioning pins 15 and fed in the direction of arrow J so as to place a flat portion of the net 7 which has not been imparted with the waveform on the portion of the lower mold 14 having the waveform 14a. The net 7 is positioned again by inserting the positioning pins 15 in the rear end portion of the portion of the net 7 in which the waveform has been imparted.

[0125] Then, as shown in FIG. 10D, the upper mold 13 is lowered again to press the net 7 and thereby impart the waveform to the net 7.

[0126] By repeating the above described operations, parallel undulating bulging portions in which the crossing points 6 formed continuously in the first direction X and the second direction Y bulge alternately are sequentially formed and the undulating net thereby is produced.

[0127] (5) Step of Laying of the Second Layer of the Undulating Net on the First Layer of the Undulating Net and Fixing of the Two Layers Together

[0128] Plural layers of the undulating nets thus formed are sequentially laid one upon another on a laying table 16 shown in FIGS. 11 to 13 and FIG. 23. FIG. 1A is a plan view of the laying table 16, FIG. 11B is a side view thereof, FIG. 12 is a partial side section showing a manner of laying a second layer undulating net 17-2 on a first layer undulating

net 17-1 and fixing them together, FIG. 13 is a partial side section showing a manner of laying a third layer undulating net 17-3 on the second layer undulating net 17-2 and fixing them together, and FIG. 23 is a partial plan view showing the laying state of FIG. 13.

[0129] The laying table 16 is formed on the upper surface thereof with a waveform 16a which is the same as the shape of the parallel undulating bulging portions of the net which are formed by alternate bulging of the crossing points 6 which are formed continuously in the first direction X and the second direction Y. In the left and right end portions as viewed in FIG. 11 of the laying table 16 are provided positioning pins 18 for positioning the undulating net 17. Reference character 19 designates guide pins for holding electrode pins.

[0130] In FIGS. 12 and 13, only a part of an electrode 21 of a spot-welding machine is illustrated and illustration of the other portion of the spot-welding machine is omitted.

[0131] The first layer undulating net 17-1 is positioned on the laying table 16 in such a manner that the positioning pins 18 are inserted in rhombic spaces formed between adjacent crossing points 6 of the undulating net 17-1 and, as shown in FIG. 12, the waveform of the first layer undulating net 17-1 conforms with the waveform of the laying table 16.

[0132] Then, as shown in FIG. 12, electrode pins 20 are disposed in recessed portions of the first layer undulating net 17-1 and then the second layer undulating net 17-2 is laid on the first layer undulating net 17-1 in such a manner that the crossing points which are formed continuously in the first direction X and the second direction Y of the first layer undulating net 17-1 alternately come into contact with and are separated from the crossing points which are formed continuously in the first direction X and the second direction Y of the second layer undulating net 17-2. Then, the crossing points which are in contact with each other of the first layer undulating net 17-1 and the second layer undulating net 17-2 are spot-welded by the spot welding machine 21.

[0133] (6) Step of Laying of the Third to n-th Layer Undulating Nets and Fixing Thereof.

[0134] After disposing electrode pins 22 for spot-welding in recessed portions of the second layer undulating net 17-2, the third layer undulating net 17-3 is laid on the second layer undulating net 17-2 in such a manner that the crossing points which are formed continuously in the first direction X and the second direction Y of the second layer undulating net 17-2 alternately come into contact with and are separated from the crossing points which are formed continuously in the first direction X and the second direction Y of the third layer undulating net 17-3. Then, the crossing points which are in contact with each other of the second layer undulating net 17-2 and the third layer undulating net 17-3 are spot-welded. Subsequently, fourth layer, fifth layer, . . . n-th layer (n being any integer) undulating nets are laid in said order in the same manner as described above and crossing points which are in contact with each other between immediately adjacent undulating nets are spot-welded. Thus, the packing 1 made of the three-dimensional net-like structure as shown in FIG. 1 is formed.

[0135] Second Embodiment

[0136] Step of Forming a First Undulating Net

[0137] (a) Step of Disposing Line Elements

[0138] The same wire as used in the embodiment 1 is used as the line element of the embodiment 2. This line element is disposed over the line element placing table 4 shown in FIG. 5. The manner of disposing the line element is similar to that of the embodiment 1, namely first line elements 3a which extend in parallel at a predetermined interval in a first direction X on a plane and second line elements 3b which extend in parallel at a predetermined interval in a second direction Y which is different from the first direction X are disposed in such a manner that the first line elements 3a cross the second line elements 3b at a desired angle α and the first and second line elements 3a and 3b are laid one upon the other as shown in FIG. 6.

[0139] (b) Step of Fixing the First Line Elements to the Second Line Elements at Respective Crossing Points

[0140] The first line elements 3a and the second line elements 3b thus disposed are spot-welded to each other at respective crossing points 6 by a known spot welding machine as shown in FIG. 7 and a net 7 is thereby formed.

[0141] (c) Step of Cutting Off a Net

[0142] This net 7 is removed from the line element placing table 4 and cut into a predetermined size.

[0143] (d) Step of Forming of an Undulating Net

[0144] Then, the net 7 is pressed by a mold 8 to form a first undulating net. This mold 8 is of a construction similar to the mold shown in FIGS. 8 to 10 but the waveforms which are formed on the lower surface of the upper mold and the upper surface of the lower mold are different from those shown in FIGS. 8 to 10. That is, as will be seen in an example of the waveform on the lower mold 24 shown in the side view of FIG. 14, the waveforms are such that crossing points formed continuously in the first direction X and the second direction Y sequentially constitute the lowest level 24a, lower side middle level 24b and upper side middle level 24c.

[0145] The net 7 is disposed on the lower mold 24 shown in FIG. 14 and the upper mold (not shown) having a waveform which conforms with the waveform of the lower mold 24 is lowered to press the net 7. Thus, as shown in the partial front view of FIG. 15A and the side view of FIG. 15B, a plurality of parallel undulating bulging portions are formed and thereby a first undulating net 25-1 is formed in such a manner that one of the crossing points continuously formed in the first direction and the second direction constitutes a crossing point 24a (shown by a black square) of the lowest level in forming of a unit three-dimensional net-like structure, a crossing point adjacent to the crossing point 24a of the lowest level constitutes a crossing point 24b (shown by a black circle) of a lower side middle level in forming of the unit three-dimensional net-like structure, a crossing point adjacent to the crossing point 24b of the lower side middle level constitutes a crossing point 24c (shown by a white circle) of an upper side middle level in forming of the unit three-dimensional net-like structure, a crossing point adjacent to the crossing point 24c of the upper side middle level constitutes a crossing point 24b of the lower side middle level in forming of the unit three-dimensional net-like structure, a crossing point adjacent to the crossing point 24b of the lower side middle level constitutes a crossing point 24a of the lowest level in forming of the unit three-

dimensional net-like structure, and subsequent crossing points constitute crossing points **24a**, **24b** and **24c** of the respective levels in the above cycle in forming of the unit three-dimensional net-like structure.

[0146] (2) Step of Forming a Second Undulating Net

[0147] (a) Step of Disposing Line Elements

[0148] Wire which is of the same structure as the line elements of the first undulating net **25-1** is used as the line element of the second undulating net and this line element is disposed over the line element placing table. This line element placing table is similar to the line element placing table **4** but is different from the line element placing table **4** in that, as shown in **FIG. 16**, pairs of guide pins **26** for guiding the line elements are provided at a predetermined interval on the table. The line elements are disposed in the following manner.

[0149] In **FIG. 16**, first line elements **27** extend in parallel at a predetermined interval in the first direction **X** on the line element placing table, bend at a position **24b** corresponding to the crossing point **24b** of the lower side middle level of the first undulating net **25-1** at a predetermined angle, passing between a pair of guide pins **26** and being guided by them, and extend in a third direction **Z**. The first line elements **27** then bend at a position **24b** corresponding to the next crossing point **24b** of the lower side middle point of the first undulating net **25-1** at the predetermined angle, guided by the pair of guide pins **26**, and extend in the second direction **Y**. The first line elements then bend at a position **24b** corresponding to the crossing point **24b** of the next lower side middle level of the first undulating net **25-1** at the predetermined angle, guided by the pair of guide pins **26**, and extend in the third direction **Z** again. The first line elements then bend at a position **24b** corresponding to the crossing point **24b** of the next lower side middle level of the first undulating net **25-1** at the predetermined angle and repeat the cycle of extending in the first direction **X**, the third direction **Z**, the second direction **Y** and the third direction **Z**.

[0150] Second line elements **28** extend in parallel at a predetermined interval in the second direction **Y** on the line element placing table, bend at a position **24b** corresponding to the crossing point **24b** of the lower side middle level of the first undulating net **25-1** at a predetermined angle, guided by the pair of guide pins **26**, and extend in the third direction **Z**. The second line elements then bend at a position **24b** corresponding to the crossing point **24b** of the next lower side middle point of the first undulating net **25-1** at the predetermined angle, guided by the pair of guide pins **26**, and extend in the first direction **X**. The second line elements then bend at a position **24b** corresponding to the crossing point **24b** of the next lower side middle level of the first undulating net **25-1** at the predetermined angle, guided by the pair of guide pins **26**, and extend in the third direction **Z** again. The second line elements then bend at a position **24b** corresponding to the crossing point **25b** of the next lower side middle level of the first undulating net **25-1** at the predetermined angle, guided by the pair of guide pins **25**, and repeat the cycle of extending in the second direction **Y**, the third direction **Z**, the first direction **X** and the third direction **Z**.

[0151] The first line elements **27** and the second line elements **28** are disposed in such a manner that the first line

elements **27** and the second line elements **28** cross each other at the desired angle in their portions extending in the first direction **X** or the second direction **Y** at positions **24c** corresponding to the crossing points **24c** of the upper side middle level of the first undulating net **25-1** and extend jointly one being laid upon the other in their portions extending in the third direction **Z**.

[0152] (b) Step of Fixing the First Line Elements to the Second Line Elements

[0153] The first line elements **27** are fixed to the second line elements **28** by spot welding at the respective crossing points thereof and also at joining points and separating points of their portions extending in the third direction **Z** and thereby a net **29** is formed.

[0154] (c) Step of Cutting Off of the Net

[0155] This net **29** is removed from the line element placing table and cut to a predetermined size.

[0156] (d) Step of Forming an Undulating Net

[0157] By pressing the net **29** using a mold **8** shown in **FIGS. 8** to **10**, a plurality of parallel undulating bulging portions which bulge at the respective crossing points and also at middle positions of the portions extending in the third direction **Z** and thereby constitute the upper side middle level **24c** in forming of the unit three-dimensional net-like structure are formed and a second undulating net **25-2** thereby is formed.

[0158] **FIG. 17A** is a partial front view of this second undulating net **25-2** and **FIG. 17B** is a side view thereof. In the same manner as in **FIG. 15**, the white circle in **FIGS. 17A** and **17B** designates the upper side middle level **24c** and the black circle the lower side middle level **24b**.

[0159] In **FIG. 16**, one of the two joining line elements extending in the direction **Z** is illustrated on the upper side and the other on the lower side whereas in **FIG. 17**, the two line elements extending in the direction **Z** are shown in the state in which the two line elements are disposed in parallel to each other for convenience of illustration.

[0160] (3) Step of Forming a Third Undulating Net

[0161] (a) Step of Disposing Line Elements

[0162] Wire which is of the same structure as the line elements of the first and second undulating nets **25-1** and **25-2** is used as the line element of the third undulating net and this line element is disposed on the line element placing table used for forming of the net **29** of the second undulating net **25-2**.

[0163] In **FIG. 18**, first line elements **40** extend in parallel at a predetermined interval in the third direction **Z** on the line element placing table, bend at a position **24b** corresponding to the crossing point **24b** of the lower side middle level of the first undulating net **25-1** at a predetermined angle, guided by the pair of guide pins **26**, and extend in the second direction **Y**. The first line element then bend at a position **24b** corresponding to the crossing point **24b** of the next lower side middle point of the first undulating net **25-1** at the predetermined angle, guided by the pair of guide pins **26**, and extend in the third direction **Z** again. Then the first line elements bend at a position **24b** corresponding to the crossing point **24b** of the next lower side middle level of the first

undulating net **25-1** at the predetermined angle, guided by the pair of guide pins **26**, and extend in the first direction X. The first line element then bend at a position **24b** corresponding to the crossing point **24b** of the next lower side middle level of the first undulating net **25-1** at the predetermined angle and repeat the cycle of extending in the third direction Z, the second direction Y, the third direction Z and the first direction X.

[0164] Second line elements **41** extend in parallel at a predetermined interval in the third direction Z on the line element placing table, bend at a position **24b** corresponding to the crossing point **24b** of the lower side middle level of the first undulating net **25-1** at a predetermined angle and extend in the first direction X. The second line elements then bend at a position **24b** corresponding to the crossing point **24b** of the next lower side middle point of the first undulating net **25-1** at the predetermined angle and extend in the third direction again Z. The second line elements then bend at a position **24b** corresponding to the crossing point **24b** of the next lower side middle level of the first undulating net **25-1** at the predetermined angle and extend in the second direction Y. The second line elements then bend at a position **24b** corresponding to the crossing point **24b** of the next lower side middle level of the first undulating net **25-1** at the predetermined angle and repeat the cycle of extending in the third direction Z, first direction X, the third direction Z and the second direction Y.

[0165] The first line elements **40** and the second line elements **41** are disposed in such a manner that the first line elements **40** and the second line elements **41** cross each other at the desired angle in their portions extending in the first direction X or second direction Y at positions corresponding to middle positions of the portions extending in the third direction Z of the second undulating net **25-2** and extend jointly one being laid upon the other in their portions extending in the third direction Z.

[0166] (b) Step of Fixing the First Line Elements to the Second Line Elements

[0167] The first line elements **40** are fixed to the second line elements **41** by spot welding at the crossing points thereof and also at joining points and separating points of their portions extending in the third direction Z and a net **42** thereby is formed.

[0168] (c) Step of Cutting Off of the Net

[0169] The net **42** is removed from the line element placing table and cut to a predetermined size.

[0170] (d) Step of Forming of an Undulating Net

[0171] By pressing the net **42** by the mold **8** shown in FIGS. **8** to **10**, a plurality of parallel undulating bulging portions which bulge at the respective joining and separating points of the portions extending in the third direction Z and thereby constitute the highest level in forming of the unit three-dimensional net-like structure are formed, and thereby a third undulating net **25-3** is formed.

[0172] FIG. **19A** is a partial front view of the third undulating net **25-3** and FIG. **19B** is a side view thereof. In the same manner as in FIGS. **15** and **17**, the white circle designates the upper side middle point **24c** and the white square the highest level **24d** of the unit three-dimensional net-like structure in the forming process.

[0173] In FIG. **18**, one of the two joining line elements extending in the direction Z is illustrated on the upper side and the other on the lower side whereas in FIG. **19**, the two line elements extending in the direction Z are shown in the state in which the two line elements are disposed in parallel to each other for convenience of illustration.

[0174] (e) Step of Laying the Second Undulating Net Upon the First Undulating Net

[0175] On a laying table which is of a similar construction to the laying table **16** shown in FIG. **11** formed on the entire upper surface thereof with the same waveform as the waveform of FIG. **14**, the first undulating net **25-1** is placed in such a manner that its crossing point **24a** of the lowest level, crossing points **24b** of the lower side middle level and crossing points **24c** of the upper side middle level conform with the lowest level, lower side middle level and upper side middle level of the corresponding waveform in the laying table.

[0176] The manner of laying the second undulating net **25-2** on the first undulating net **25-1** is shown in the partial front view of FIG. **20A** and the side view of FIG. **20B**. In FIGS. **20A** and **20B**, the undulating net **25-1** is shown by a solid line and the undulating net **25-2** is shown in a broken line.

[0177] The second undulating net **25-2** is laid upon the first undulating net **25-1** in such a manner that the crossing points of the second undulating net **25-1** come into contact with the crossing points **24c** of the upper side middle level of the first undulating net, **25-1**, the joining points and the separating points of the portions extending in the third direction Z of the second undulating net **25-2** come into contact with the crossing points **24b** of the lower side middle level of the first undulating net **25-1**, and the undulating bulging portions at the middle positions of the portions extending in the third direction Z of the second undulating net **25-2** are separated from the crossing points **24a** of the lowest level of the first undulating net **25-1** and form the upper side middle level **24c** of the unit three-dimensional net-like structure;

[0178] (f) Step of Laying the Third Undulating Net Upon the Second Undulating Net

[0179] FIG. **21** shows a manner of laying the third undulating net **25-3** upon the second undulating net **25-2**. FIG. **21A** is a front view thereof, FIG. **21B** is a side view thereof and FIG. **21C** is a top plan view thereof. In FIG. **21**, the first undulating net **25-1** and the second undulating net **25-2** are shown by solid lines and the third undulating net **25-3** is shown by a broken line.

[0180] The third undulating net **25-3** is laid upon the second undulating net **25-2** in such a manner that the crossing points of the third undulating net **25-3** come into contact with the undulating bulging portions at the middle positions of the portions extending in the third direction Z of the second undulating net **25-2**, the portions extending in the third direction Z of the third undulating net **25-3** come into contact, at their middle positions, with the crossing points of the second undulating net **25-2**, and the undulating bulging portions at the joining points and the separating points of the portions extending in the third direction Z of the third undulating net **25-3** are separated from the second undulating

ing net **25-2** and form the highest level **24d** of the unit three-dimensional net-like structure.

[0181] (g) Step of Fixing the First to Third Undulating Nets

[0182] The first undulating net **25-1**, the second undulating net **25-2** and the third undulating net **25-3** are fixed together at necessary points among points of contact thereof. In **FIG. 21**, for example, the crossing points **24b** of the first undulating net **25-1** and the joining and separating points **24b** of the portion extending in the third direction **Z** of the second undulating net **25-2** are fixed together by spot welding, the crossing points **24c** of the second undulating net **25-2** and the middle point **24c** of the portion extending in the third direction **Z** of the third undulating net **25-3** are fixed together by spot welding, and the middle point **24c** of the portion extending in the third direction **Z** of the second undulating net **25-2** and the crossing point **24c** of the third undulating net **25-3** are fixed together by spot welding.

[0183] The structure consisting of the first to third undulating nets are laid in plural layers and welded together to form the three-dimensional net-like structure **30** shown in **FIG. 3**.

[0184] Further, by applying the method of the embodiment 2, a three-dimensional net-like structure having a unit structure consisting of a polygonal pyramids each having an apex consisting of six line elements can be formed.

[0185] In the above described embodiments, fixing of the respective line elements and the undulating nets together is performed by spot welding. The invention is not limited to the spot welding but the line elements and undulating nets may be fixed together by other methods such as soldering or, in case the line elements are made of plastic, by heat melting.

What is claimed is:

1. A method for manufacturing a packing made of a three-dimensional net-like structure which constitutes an internal structure of a device which performs material transfer, heat exchange or mixing between gases, liquids or gas and liquid, said internal structure being divided in a plurality of chambers or channels connected to one another and said three-dimensional net-like structure being formed by conversion and dispersion of four line elements, said method comprising steps of:

- (A) disposing first line elements extending in parallel at a predetermined interval in a first direction on a plane and second line elements extending in parallel at a predetermined interval in a second direction which is different from the first direction on the same plane in such a manner that the first line elements cross the second line elements at a desired angle and the first and second line elements are laid one upon the other;
- (B) fixing the first line elements to the second line elements at crossing points thereof and thereby forming a net;
- (C) pressing the net to form a plurality of parallel undulating bulging portions which bulge at alternate ones of the crossing points continuously formed in the first direction and the second direction and thereby forming an undulating net;

(D) laying a second layer of the undulating net upon a first layer of the undulating net in such a manner that the crossing points continuously formed in the first direction and the second direction of the first layer of the undulating net alternately come into contact with and separate from the crossing points continuously formed in the first direction and the second direction of the second layer of the undulating net and thereafter fixing together the crossing points of the first layer of the undulating net and the second layer of the undulating net which are in contact with each other; and

(E) laying a third layer of the undulating net upon the second layer of the undulating net in such a manner that the crossing points continuously formed in the first direction and the second direction of the second layer of the undulating net alternately come into contact with and separate from the crossing points continuously formed in the first direction and the second direction of the third layer of the undulating net and thereafter fixing together the crossing points of the second layer of the undulating net and the third layer of the undulating net which are in contact with each other; and thereafter superposing a fourth, a fifth . . . and n-th (n being any integer) layer of the undulating nets in the same manner and fixing together the crossing points of the respective layers of the undulating nets and the immediately lower layers of the undulating nets which are in contact with each other.

2. A method for manufacturing a packing made of a three-dimensional netlike structure which constitutes an internal structure of a device which performs material transfer, heat exchange or mixing between gases, liquids or gas and liquid, said internal structure being divided in a plurality of chambers or channels connected to one another and said three-dimensional net-like structure being formed by conversion and dispersion of three line elements, said method comprising:

- (A) a step of forming a first undulating net comprising the following steps (a), (b) and (c):
 - (a) disposing first line elements extending in parallel at a predetermined interval in a first direction on a plane and second line elements extending in parallel at a predetermined interval in a second direction which is different from the first direction on the same plane in such a manner that the first line elements cross the second line elements at a desired angle and are superposed one upon the other;
 - (b) fixing the first line elements to the second line elements at crossing points thereof and thereby forming a net; and
 - (c) pressing the net to form a plurality of parallel undulating bulging portions and thereby forming a first undulating net in such a manner that one of the crossing points continuously formed in the first direction and the second direction constitutes a crossing point of the lowest level in forming of a unit three-dimensional net-like structure, a crossing point adjacent to the crossing point of the lowest level constitutes a crossing point of a lower side middle level in forming of the unit three-dimensional net-like structure, a crossing point adjacent to the crossing point of the lower side middle level constitutes a crossing point of an upper side

middle level in forming of the unit three-dimensional net-like structure, a crossing point adjacent to the crossing point of the upper side middle level constitutes a crossing point of the lower side middle level in forming of the unit three-dimensional net-like structure, a crossing point adjacent to the crossing point of the lower side middle level constitutes a crossing point of the lowest level in forming of the unit three-dimensional net-like structure, and subsequent crossing points constitute crossing points of the respective levels in the above cycle in forming of the unit three-dimensional net-like structure;

(B) a step of forming a second undulating net comprising the following steps (a), (b) and (c):

(a) disposing

first line elements extending in parallel at a predetermined interval in the first direction on a plane, bending at a position corresponding to one of the crossing points of the lower side middle level of the first undulating net at a predetermined angle and extending in a third direction, bending at a position corresponding to the next lower side middle point of the first undulating net at the predetermined angle and extending in the second direction, bending at a position corresponding to the next lower side middle level of the first undulating net at the predetermined angle and extending in the third direction again, and bending at a position corresponding to the next lower side middle level of the first undulating net at the predetermined angle and repeating the cycle of extending in the first direction, the third direction, the second direction and the third direction, and

second line elements extending in parallel at a predetermined interval in the second direction on the plane, bending at a position corresponding to one of the crossing points of the lower side middle level of the first undulating net at a predetermined angle and extending in the third direction, bending at a position corresponding to the next lower side middle point of the first undulating net at the predetermined angle and extending in the first direction, bending at a position corresponding to the next lower side middle level of the first undulating net at the predetermined angle and extending in the third direction again, and bending at a position corresponding to the next lower side middle level of the first undulating net at the predetermined angle and repeating the cycle of extending in the second direction, the third direction, the first direction and the third direction

in such a manner that the first line elements and the second line elements cross each other at the desired angle in their portions extending in the first or second direction at positions corresponding to the crossing points of the upper side middle level of the first undulating net and extend jointly one being laid upon the other in their portions extending in the third direction;

(b) fixing the first line elements to the second line elements at the respective crossing points thereof and also at joining points and separating points of their portions extending in the third direction and thereby forming a net; and

(c) pressing the net to form a plurality of parallel undulating bulging portions which bulge at the respective crossing points and also at middle positions of the portions extending in the third direction and thereby constitute the upper side middle level in forming of the unit three-dimensional net-like structure, and thereby forming a second undulating net;

(C) a step of forming a third undulating net comprising the following steps (a), (b) and (c):

(a) disposing

first line elements extending in parallel at a predetermined interval in the third direction on a plane, bending at a position corresponding to one of the crossing points of the lower side middle level of the first undulating net at a predetermined angle and extending in the second direction, bending at a position corresponding to the next lower side middle point of the first undulating net at the predetermined angle and extending in the third direction again, bending at a position corresponding to the next lower side middle level of the first undulating net at the predetermined angle and extending in the first direction, and bending at a position corresponding to the next lower side middle level of the first undulating net at the predetermined angle and repeating the cycle of extending in the third direction, the second direction, the third direction and the first direction, and

second line elements extending in parallel at a predetermined interval in the third direction on the plane, bending at a position corresponding to one of the crossing points of the lower side middle level of the first undulating net at a predetermined angle and extending in the first direction, bending at a position corresponding to the next lower side middle point of the first undulating net at the predetermined angle and extending in the third direction again, bending at a position corresponding to the next lower side middle level of the first undulating net at the predetermined angle and extending in the second direction, and bending at a position corresponding to the next lower side middle level of the first undulating net at the predetermined angle and repeating the cycle of extending in the third direction, first direction, the third direction and the second direction

in such a manner that the first line elements and the second line elements cross each other at the desired angle in their portions extending in the first or second direction at positions corresponding to middle positions of the portions extending in the third direction of the second undulating net and extend jointly one being laid upon the other in their portions extending in the third direction;

(b) fixing the first line elements to the second line elements at the crossing points thereof and also at joining points and separating points of their portions extending in the third direction and thereby forming a net; and

(c) pressing the net to form a plurality of parallel undulating bulging portions which bulge at the respective joining and separating points of the portions extending in the third direction and thereby constitute the highest

level in forming of the unit three-dimensional net-like structure, and thereby forming a third undulating net;

(D) a step of laying the second undulating net upon the first undulating net in such a manner that the crossing points of the second undulating net come into contact with the crossing points of the upper middle level of the first undulating net, the joining points and the separating points of the portions extending in the third direction of the second undulating net come into contact with the crossing points of the lower middle level of the first undulating net, and the undulating bulging portions at the middle positions of the portions extending in the third direction of the second undulating net are separated from the crossing points of the lowest level of the first undulating net and form the upper middle level of the unit three-dimensional net-like structure;

(E) a step of laying the third undulating net upon the second undulating net in such a manner that the crossing points of the third undulating net come into contact with the undulating bulging portions at the middle positions of the portions extending in the third direction of the second undulating net, the portions extending in the third direction of the third undulating net come into contact, at their middle positions, with the crossing points of the second undulating net, and the undulating bulging portions at the joining points and the separating points of the portions extending in the third direction of the third undulating net are separated from the second undulating net and form the highest level of the unit three-dimensional net-like structure; and

(F) a step of fixing the first undulating net, the second undulating net and the third undulating net together at necessary points among points of contact thereof.

3. A method for manufacturing a three-dimensional net-like structure including a mist eliminator and a multi-layer filtering film formed by conversion and dispersion of four line elements, said method comprising steps of:

(A) disposing first line elements extending in parallel at a predetermined interval in a first direction on a plane and second line elements extending in parallel at a predetermined interval in a second direction which is different from the first direction on the same plane in such a manner that the first line elements cross the second line elements at a desired angle and the first and second line elements are laid one upon the other;

(B) fixing the first line elements to the second line elements at crossing points thereof and thereby forming a net;

(C) pressing the net to form a plurality of parallel undulating bulging portions which bulge at alternate ones of the crossing points continuously formed in the first direction and the second direction and thereby forming an undulating net;

(D) laying a second layer of the undulating net upon a first layer of the undulating net in such a manner that the crossing points continuously formed in the first direction and the second direction of the first layer of the undulating net alternately come into contact with and separate from the crossing points continuously formed in the first direction and the second direction of the second layer of the undulating net and thereafter fixing

together the crossing points of the first layer of the undulating net and the second layer of the undulating net which are in contact with each other; and

(E) laying a third layer of the undulating net upon the second layer of the undulating net in such a manner that the crossing points continuously formed in the first direction and the second direction of the second layer of the undulating net alternately come into contact with and separate from the crossing points continuously formed in the first direction and the second direction of the third layer of the undulating net and thereafter fixing together the crossing points of the second layer of the undulating net and the third layer of the undulating net which are in contact with each other; and thereafter superposing a fourth, a fifth . . . and n-th (n being any integer) layer of the undulating nets in the same manner and fixing together the crossing points of the respective layers of the undulating nets and the immediately lower layers of the undulating nets which are in contact with each other.

4. A method for manufacturing a three-dimensional net-like structure including a mist eliminator and a multi-layer filtering film formed by conversion and dispersion of three line elements, said method comprising:

(A) a step of forming a first undulating net comprising the following steps (a), (b) and (c):

(a) disposing first line elements extending in parallel at a predetermined interval in a first direction on a plane and second line elements extending in parallel at a predetermined interval in a second direction which is different from the first direction on the same plane in such a manner that the first line elements cross the second line elements at a desired angle and are superposed one upon the other;

(b) fixing the first line elements to the second line elements at crossing points thereof and thereby forming a net; and

(c) pressing the net to form a plurality of parallel undulating bulging portions and thereby forming a first undulating net in such a manner that one of the crossing points continuously formed in the first direction and the second direction constitutes a crossing point of the lowest level in forming of a unit three-dimensional net-like structure, a crossing point adjacent to the crossing point of the lowest level constitutes a crossing point of a lower side middle level in forming of the unit three-dimensional net-like structure, a crossing point adjacent to the crossing point of the lower side middle level constitutes a crossing point of an upper side middle level in forming of the unit three-dimensional net-like structure, a crossing point adjacent to the crossing point of the upper side middle level constitutes a crossing point of the lower side middle level in forming of the unit three-dimensional net-like structure, a crossing point adjacent to the crossing point of the lower side middle level constitutes a crossing point of the lowest level in forming of the unit three-dimensional net-like structure, and subsequent crossing points constitute crossing points of the respective levels in the above cycle in forming of the unit three-dimensional net-like structure;

(B) a step of forming a second undulating net comprising the following steps (a), (b) and (c):

(a) disposing

first line elements extending in parallel at a predetermined interval in the first direction on a plane, bending at a position corresponding to one of the crossing points of the lower side middle level of the first undulating net at a predetermined angle and extending in a third direction, bending at a position corresponding to the next lower side middle point of the first undulating net at the predetermined angle and extending in the second direction, bending at a position corresponding to the next lower side middle level of the first undulating net at the predetermined angle and extending in the third direction again, and bending at a position corresponding to the next lower side middle level of the first undulating net at the predetermined angle and repeating the cycle of extending in the first direction, the third direction, the second direction and the third direction, and

second line elements extending in parallel at a predetermined interval in the second direction on the plane, bending at a position corresponding to one of the crossing points of the lower side middle level of the first undulating net at a predetermined angle and extending in the third direction, bending at a position corresponding to the next lower side middle point of the first undulating net at the predetermined angle and extending in the first direction, bending at a position corresponding to the next lower side middle level of the first undulating net at the predetermined angle and extending in the third direction again, and bending at a position corresponding to the next lower side middle level of the first undulating net at the predetermined angle and repeating the cycle of extending in the second direction, the third direction, the first direction and the third direction

in such a manner that the first line elements and the second line elements cross each other at the desired angle in their portions extending in the first or second direction at positions corresponding to the crossing points of the upper side middle level of the first undulating net and extend jointly one being laid upon the other in their portions extending in the third direction;

(b) fixing the first line elements to the second line elements at the respective crossing points thereof and also at joining points and separating points of their portions extending in the third direction and thereby forming a net; and

(c) pressing the net to form a plurality of parallel undulating bulging portions which bulge at the respective crossing points and also at middle positions of the portions extending in the third direction and thereby constitute the upper side middle level in forming of the unit three-dimensional net-like structure, and thereby forming a second undulating net;

(C) a step of forming a third undulating net comprising the following steps (a), (b) and (c):

(a) disposing

first line elements extending in parallel at a predetermined interval in the third direction on a plane, bending at a position corresponding to one of the crossing points of the lower side middle level of the first undulating net at a predetermined angle and extending in the second direction, bending at a position corresponding to the next lower side middle point of the first undulating net at the predetermined angle and extending in the third direction again, bending at a position corresponding to the next lower side middle level of the first undulating net at the predetermined angle and extending in the first direction, and bending at a position corresponding to the next lower side middle level of the first undulating net at the predetermined angle and repeating the cycle of extending in the third direction, the second direction, the third direction and the first direction, and

second line elements extending in parallel at a predetermined interval in the third direction on the plane, bending at a position corresponding to one of the crossing points of the lower side middle level of the first undulating net at a predetermined angle and extending in the first direction, bending at a position corresponding to the next lower side middle point of the first undulating net at the predetermined angle and extending in the third direction again, bending at a position corresponding to the next lower side middle level of the first undulating net at the predetermined angle and extending in the second direction, and bending at a position corresponding to the next lower side middle level of the first undulating net at the predetermined angle and repeating the cycle of extending in the third direction, first direction, the third direction and the second direction

in such a manner that the first line elements and the second line elements cross each other at the desired angle in their portions extending in the first or second direction at positions corresponding to middle positions of the portions extending in the third direction of the second undulating net and extend jointly one being laid upon the other in their portions extending in the third direction;

(b) fixing the first line elements to the second line elements at the crossing points thereof and also at joining points and separating points of their portions extending in the third direction and thereby forming a net; and

(c) pressing the net to form a plurality of parallel undulating bulging portions which bulge at the respective joining and separating points of the portions extending in the third direction and thereby constitute the highest level in forming of the unit three-dimensional net-like structure, and thereby forming a third undulating net;

(D) a step of laying the second undulating net upon the first undulating net in such a manner that the crossing points of the second undulating net come into contact with the crossing points of the upper middle level of the first undulating net, the joining points and the separating points of the portions extending in the third direction of the second undulating net come into contact

with the crossing points of the lower middle level of the first undulating net, and the undulating bulging portions at the middle positions of the portions extending in the third direction of the second undulating net are separated from the crossing points of the lowest level of the first undulating net and form the upper middle level of the unit three-dimensional net-like structure;

(E) a step of laying the third undulating net upon the second undulating net in such a manner that the crossing points of the third undulating net come into contact with the undulating bulging portions at the middle positions of the portions extending in the third direction of the second undulating net, the portions extending in the third direction of the third undulating net come into contact, at their middle positions, with the crossing points of the second undulating net, and the undulating bulging portions at the joining points and the separating points of the portions extending in the third direction of the third undulating net are separated from the second undulating net and form the highest level of the unit three-dimensional net-like structure; and

(F) a step of fixing the first undulating net, the second undulating net and the third undulating net together at necessary points among points of contact thereof.

5. A packing made of a three-dimensional net-like structure which constitutes an internal structure of a device which performs material transfer, heat exchange or mixing between gases, liquids or gas and liquid, said internal structure being divided in a plurality of chambers or channels connected to one another and said three-dimensional net-like structure

being formed by conversion and dispersion of four line elements wherein a converging portion of the four line elements is formed by mutual contact of undulating nets having parallel undulating bulging portions at necessary portions.

6. A packing made of a three-dimensional net-like structure which constitutes an internal structure of a device which performs material transfer, heat exchange or mixing between gases, liquids or gas and liquid, said internal structure being divided in a plurality of chambers or channels connected to one another and said three-dimensional net-like structure being formed by conversion and dispersion of three line elements wherein a converging portion of the three line elements is formed by mutual contact of undulating nets having parallel undulating bulging portions at necessary portions.

7. A three-dimensional net-like structure including a mist eliminator and a multi-layer filtering film formed by conversion and dispersion of four line elements wherein a converging portion of the four line elements is formed by mutual contact of undulating nets having parallel undulating bulging portions at necessary portions.

8. A three-dimensional net-like structure including a mist eliminator and a multi-layer filtering film formed by conversion and dispersion of three line elements wherein a converging portion of the three line elements is formed by mutual contact of undulating nets having parallel undulating bulging portions at necessary portions.

* * * * *