




US 20080112367A1

(19) **United States**(12) **Patent Application Publication**
Kuo(10) **Pub. No.: US 2008/0112367 A1**(43) **Pub. Date: May 15, 2008**(54) **METHOD AND APPARATUS FOR
SELECTING OPERATING FREQUENCY FOR
USER EQUIPMENT IN WIRELESS
COMMUNICATIONS SYSTEM****Publication Classification**(51) **Int. Cl.**
H04B 7/216 (2006.01)(52) **U.S. Cl.** **370/335**(75) **Inventor: Richard Lee-Chee Kuo, Taipei
City (TW)**(57) **ABSTRACT**

Correspondence Address:

**BIRCH, STEWART, KOLASCH & BIRCH, LLP
8110 GATEHOUSE ROAD, SUITE 100 EAST
FALLS CHURCH, VA 22315**(73) **Assignee: Innovative Sonic Limited, Tortola
(VG)**(21) **Appl. No.: 11/984,073**(22) **Filed: Nov. 13, 2007****Related U.S. Application Data**(60) **Provisional application No. 60/865,607, filed on Nov.
13, 2006.**

In order to prevent from inappropriately terminating a current Multimedia Broadcast Multicast Service, called MBMS hereinafter, service reception when a radio resource control (RRC) state of a user equipment (UE) is operated in a CELL_DCH state, the present invention provides a method of selecting an MBMS operating frequency for the UE in a wireless communications system. The method includes determining whether a current operating frequency of the UE is equal to a preferred frequency corresponding to the MBMS services prioritized by the upper layers when the RRC state of the UE is operated in the CELL_DCH state, and continuing using the current operating frequency when the current operating frequency of the UE is equal to the preferred frequency corresponding to the MBMS services prioritized by the upper layers.

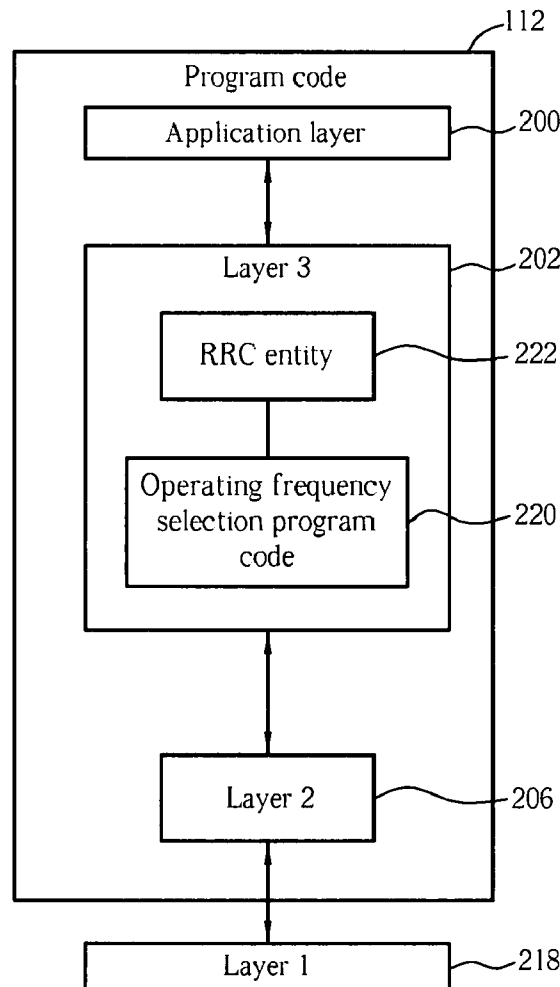

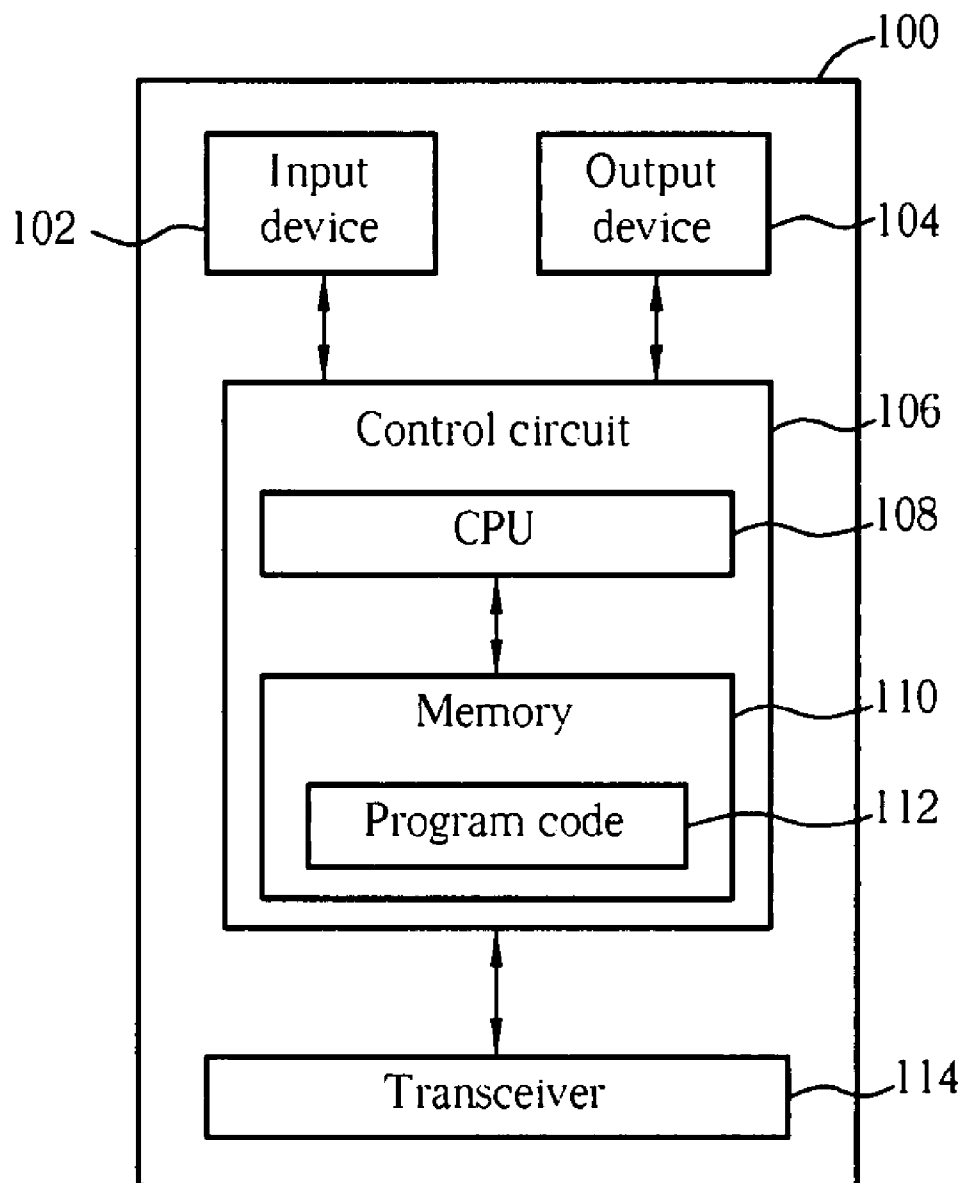


FIG. 1

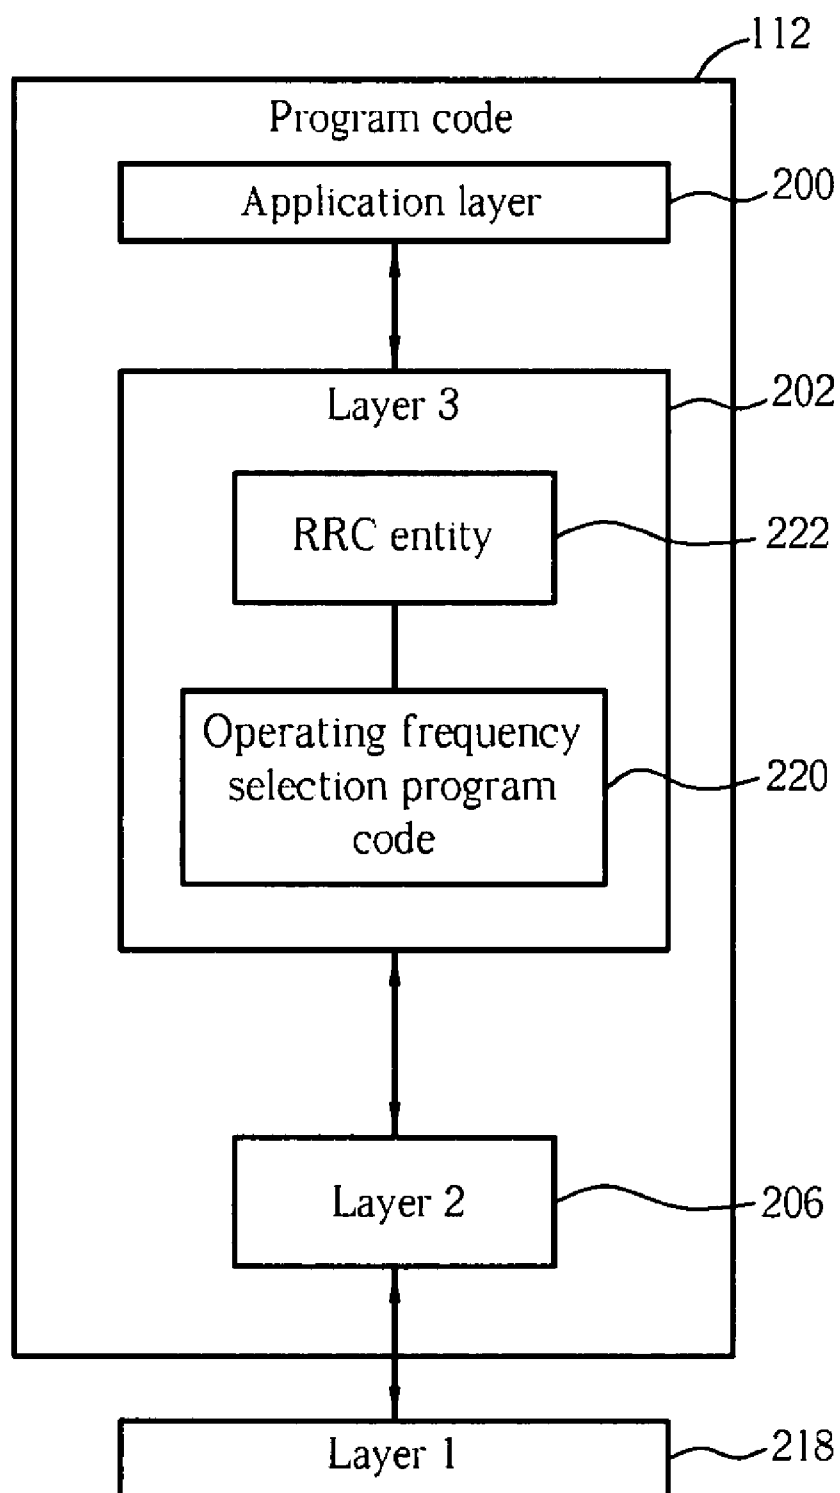


FIG. 2

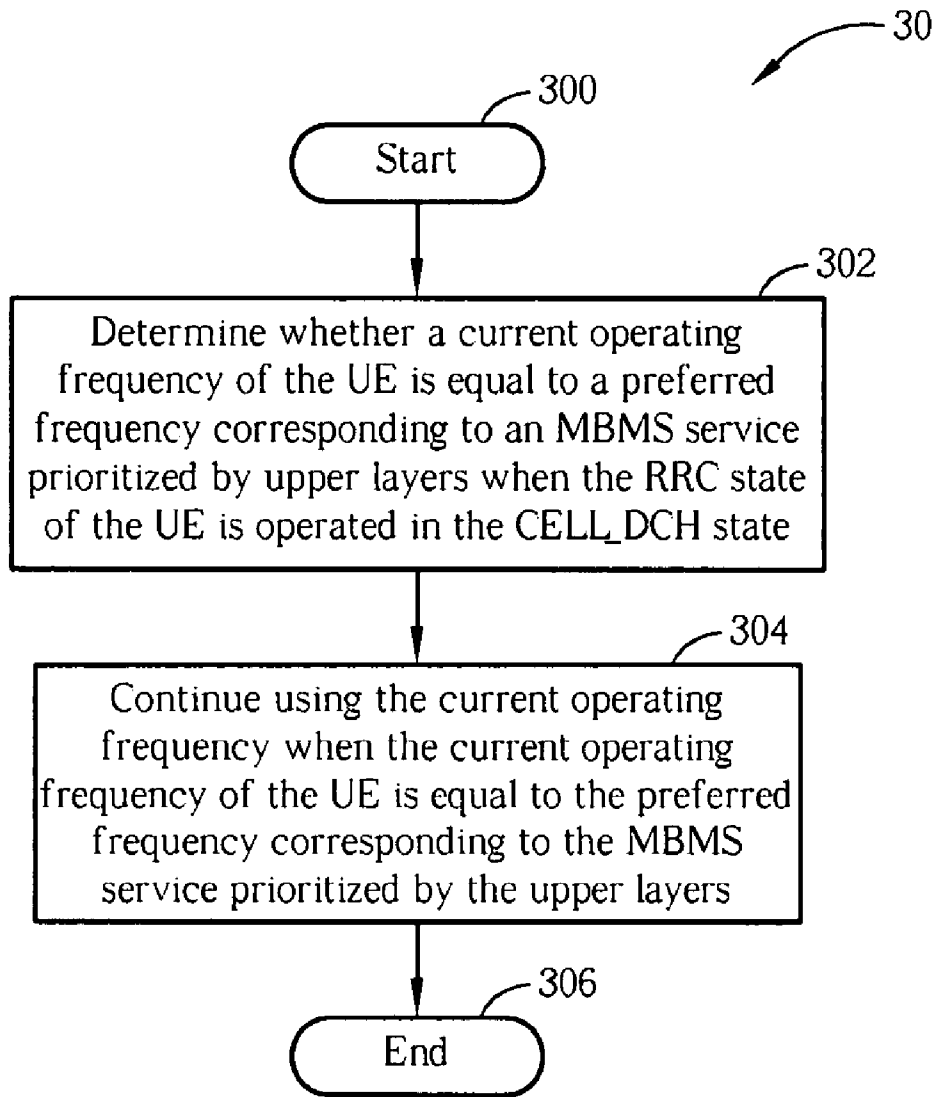


FIG. 3

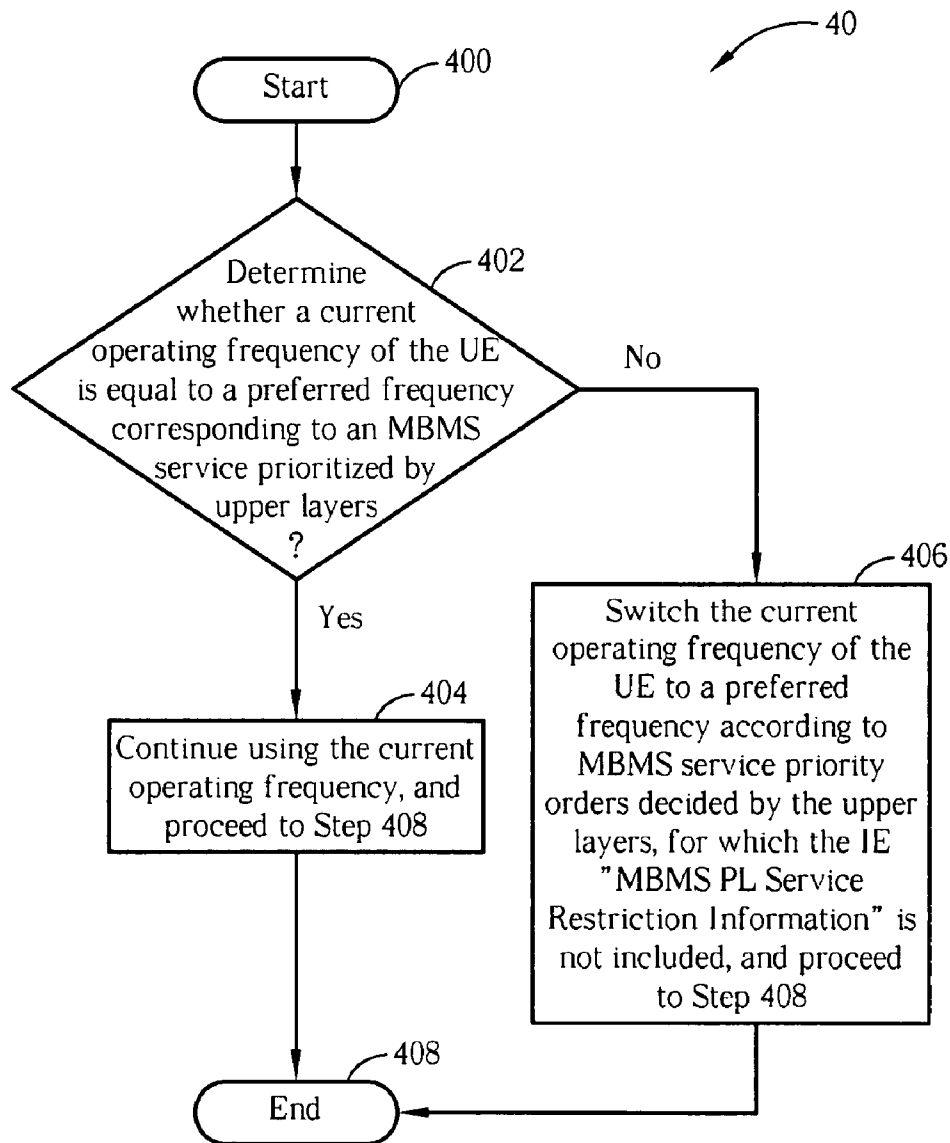


FIG. 4

METHOD AND APPARATUS FOR SELECTING OPERATING FREQUENCY FOR USER EQUIPMENT IN WIRELESS COMMUNICATIONS SYSTEM

CROSS REFERENCE TO RELATED APPLICATIONS

[0001] This application claims the benefit of U.S. Provisional Application No. 60/865,607, filed on Nov. 13, 2006 and entitled "Method and Apparatus for MBMS Frequency Selection in a Wireless Communications System", the contents of which are incorporated herein by reference.

BACKGROUND OF THE INVENTION

[0002] 1. Field of the Invention

[0003] The present invention relates to a method of selecting an operating frequency in a wireless communications system and related communications device, and more particularly to a method of selecting an operating frequency corresponding to a multimedia broadcast multicast service, called MBMS service, for a user equipment in a wireless communications system and related communications device.

[0004] 2. Description of the Prior Art

[0005] The third generation (3G) mobile telecommunications system has adopted a Wideband Code Division Multiple Access (WCDMA) wireless air interface access method for a cellular network. WCDMA provides high frequency spectrum utilization, universal coverage, and high quality, high-speed multimedia data transmission. The WCDMA method also meets all kinds of QoS requirements simultaneously, providing diverse, flexible, two-way transmission services and better communication quality to reduce transmission interruption rates. To enhance multimedia functions in the 3G mobile telecommunications system, a protocol specification developed by the 3rd Generation Partnership Project (3GPP) provides Multimedia Broadcast Multicast Service (MBMS). MBMS is a point-to-multipoint bearer service and is established on an existing network architecture of the Universal Mobile Telecommunications System (UMTS), utilizing Internet Protocol (IP) packets as a medium. Thus, MBMS allows a single source entity to transmit data to multiple user equipments (UEs) simultaneously.

[0006] According to the protocol specification developed by the 3GPP, MBMS offers two delivery modes: MBMS Broadcast delivery mode and MBMS Multicast delivery mode. When interested in a specific MBMS service, the UE needs to order the MBMS service from a Broadcast Multicast Service Center (BM-SC) by establishing a service agreement including specific service provision phases. These two delivery modes have different service provision phases. The service provision phase of MBMS Broadcast delivery mode includes Service announcement, Session Start, MBMS notification, Data Transfer and Session Stop. The service provision phase of MBMS Multicast delivery mode includes Subscription, Service announcement, Joining, Session Start, MBMS notification, Data Transfer, Session Stop and Leaving. For realizing customized services, Joining and Leaving sessions utilized in MBMS Multicast delivery mode enable the BM-SC to execute authorization and payment recording for the UEs at the Joining session.

The service provision phases mentioned above are well known in the art, and will not be described in detail.

[0007] On the other hand, from the standpoint of radio resource control (RRC), all logical data communication exchange channels, be they for providing data transmission exchange to the UE or for providing RRC layer control signal transmission exchange, are defined in the context of a Radio Bearer (RB). In the UE end, the RB comprises one unidirectional, or a pair of, uplink/downlink logic data transmission exchange channels. In the network end, the RB comprises one unidirectional, or a pair of, uplink/downlink logic data transmission exchange channels. For example, a UMTS Terrestrial Radio Access Network (UTRAN) transmits MBMS configuration to the UE by establishing RBs, and the UE stops receiving MBMS service by releasing the RBs. Besides, according to the RRC protocol specification provided by the 3GPP, an RRC state of the UE can be a disconnection mode or an RRC connection mode. The disconnection mode includes Idle mode, and the RRC connection mode includes CELL_PCH, URA_PCH, CELL_FACH and CELL_DCH states.

[0008] When providing the MBMS service, the UTRAN may obtain the number of the UEs ordering the MBMS service via a counting procedure, and can adopt either one of the following two transmission modes: point-to-point (p-t-p) transmission and point-to-multipoint (p-t-m) transmission. The UTRAN utilizes the p-t-m transmission to transfer data if the Broadcast mode is selected. On the contrary, if the Multicast mode is selected, the UTRAN utilizes either the p-t-p transmission or the p-t-m transmission to transfer data according to the number of the UEs. In the p-t-p transmission, transmission between the UEs and the UTRAN utilizes a dedicated channel, and thereby the Node-B establishes one dedicated channel for one UE to transmit data and configuration. Compared with the p-t-p transmission, the p-t-m transmission allows a core network (CN) to provide the data and the configuration for multiple UEs in the same cell simultaneously.

[0009] In the protocol specification developed by the 3GPP, three logical channels are defined to transmit corresponding MBMS information: MBMS point-to-multipoint Control Channel (MCCH), MBMS point-to-multipoint Traffic Channel (MTCH), and MBMS point-to-multipoint Scheduling Channel (MSCH). MCCH is utilized to transmit a corresponding MBMS configuration, including MBMS Neighboring Cell Information, MBMS Radio Bearer Information, MBMS Service Information, and other information. MTCH is responsible for transferring service data to the UEs. MSCH is used for notifying the UEs with scheduling information of MBMS services. With MSCH, the UEs are allowed to execute reception only when data begins to be transferred, without needing to keep a receiving state on throughout the whole service process.

[0010] Generally speaking, the UTRAN includes two or more carrier frequencies for providing a variety of services for UEs, and the UEs are appropriately distributed on these carrier frequencies. On the other hand, for the UE end, when the MBMS service the UE is interested in, or the state of the joined MBMS service, changes, the UE can perform a frequency selection procedure for following service reception operations. According to the meeting document R2-063613 of the 3GPP (3GPP TSG-RAN WG2 Meeting #56), when the UE receives an information element (IE) "MBMS Preferred frequency information" or an IE "MBMS

PL Service Restriction Information,” or when the preferred MBMS service changes, the UE shall perform an MBMS frequency selection procedure for transferring a current operating frequency to a preferred frequency corresponding with an MBMS service prioritized by upper layers, so as to execute reception of the concerned MBMS service. The IE “MBMS Preferred frequency information” is included in a message named “MBMS MODIFIED SERVICES INFORMATION”, and is utilized for notifying the UE of the preferred frequency layer corresponding to the concerned MBMS services. The IE “MBMS PL Service Restriction Information” can be sent to the UE through a Radio Bearer Control message, a CELL UPDATE CONFIRM message or an MBMS GENERAL INFORMATION message, and is utilized for notifying the UE that the UTRAN will not provide any new non-MBMS services on the preferred frequency layer, which means that the preferred frequency layer is currently congested. In other words, if the IE “MBMS PL Service Restriction Information” is not included in the MBMS GENERAL INFORMATION message for the preferred frequency layer, there are still free radio resources available on the preferred frequency layer where the UTRAN can also provide the non-MBMS services.

[0011] Additionally, according to the protocol specification developed by the 3GPP, the above Radio Bearer Control message and the CELL UPDATE CONFIRM message are sent on a dedicated control channel (DCCH) for a dedicated UE, and the MBMS GENERAL INFORMATION message is sent on MCCH, which is broadcasted for all UEs in a cell. The Radio Bearer Control message can be a RADIO BEARER RECONFIGURATION message, a RADIO BEARER SETUP message, a RADIO BEARER RELEASE message, a TRANSPORT CHANNEL RECONFIGURATION message or a PHYSICAL CHANNEL RECONFIGURATION message, which are well known by those skilled in the art, and thus not narrated herein.

[0012] As the UE operates in different RRC states, the behavior of performing the MBMS frequency selection procedure is also different, and the following is aimed at a situation in which the UE operates in the CELL_DCH state. Initially, if there exists one or more preferred frequencies for services included in a variable MBMS_ACTIVATED_SERVICES, which is stored in the UE, and the latest received CELL UPDATE CONFIRM message or Radio Bearer Control message did not include the IE “MBMS PL Service Restriction Information”, which is sent by the UTRAN on DCCH, the UE can proceed to following frequency selection.

[0013] Then, the UE selects a preferred frequency corresponding to an MBMS service prioritized by upper layers as the operating frequency, for which the IE “MBMS PL Service Restriction Information” is not included in the MBMS GENERAL INFORMATION message. In this case, when the current operating frequency of the UE is equal to the preferred frequency corresponding to the MBMS service prioritized by upper layers and the preferred frequency is determined to be congested by the UTRAN, i.e. the IE “MBMS PL Service Restriction Information” is included in the MBMS GENERAL INFORMATION message for the preferred frequency, the UE should request to be transferred to another preferred frequency, for which the IE “MBMS PL Service Restriction Information” is not included, and cannot continue using the current operating frequency.

[0014] Therefore, if the UE is currently on the frequency layer for receiving an MBMS service, a situation that the UE terminates the current MBMS service reception due to incapability of staying on the current frequency layer occurs.

SUMMARY OF THE INVENTION

[0015] According to the present invention, a method for a user equipment of a wireless communications system for selecting an operating frequency corresponding to a multimedia broadcast multicast service, called MBMS service hereinafter, comprises determining whether a current operating frequency of the user equipment is equal to a preferred frequency corresponding to the MBMS service prioritized by upper layers when a radio resource control state of the user equipment is operated in a CELL_DCH state, and continuing using the current operating frequency when the current operating frequency of the user equipment is equal to the preferred frequency corresponding to the MBMS service prioritized by the upper layers.

[0016] According to the present invention, a communications device for selecting an operating frequency corresponding to a multimedia broadcast multicast service, called MBMS service hereinafter, in a wireless communications system comprises a control circuit for realizing functions of the communications device, a processor installed in the control circuit, for executing a program code to command the control circuit, and a memory installed in the control circuit and coupled to the processor for storing the program code. The program code comprises determining whether a current operating frequency is equal to a preferred frequency corresponding to the MBMS service prioritized by upper layers when a radio resource control state is operated in a CELL_DCH state, and continuing using the current operating frequency when the current operating frequency is equal to the preferred frequency corresponding to the MBMS service prioritized by the upper layers.

[0017] These and other objectives of the present invention will no doubt become obvious to those of ordinary skill in the art after reading the following detailed description of the preferred embodiment that is illustrated in the various figures and drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

[0018] FIG. 1 is a functional block diagram of a communications device.

[0019] FIG. 2 is a diagram of the program code shown in FIG. 1.

[0020] FIG. 3 is a flowchart diagram of a process according to an embodiment of the present invention.

[0021] FIG. 4 is a flowchart diagram of a process according to another embodiment of the present invention.

DETAILED DESCRIPTION

[0022] Please refer to FIG. 1, which is a functional block diagram of a communications device 100. For the sake of brevity, FIG. 1 only shows an input device 102, an output device 104, a control circuit 106, a central processing unit (CPU) 108, a memory 110, a program code 112, and a transceiver 114 of the communications device 100. In the communications device 100, the control circuit 106 executes the program code 112 in the memory 110 through the CPU 108, thereby controlling an operation of the communications device 100. The communications device 100 can receive

signals input by a user through the input device **102**, such as a keyboard, and can output images and sounds through the output device **104**, such as a monitor or speakers. The transceiver **114** is used to receive and transmit wireless signals, delivering received signals to the control circuit **106**, and outputting signals generated by the control circuit **106** wirelessly. From a perspective of a communications protocol framework, the transceiver **114** can be seen as a portion of Layer **1**, and the control circuit **106** can be utilized to realize functions of Layer **2** and Layer **3**. Preferably, the communications device **100** is utilized in a third generation (3G) mobile communications system.

[0023] Please continue to refer to FIG. **2**. FIG. **2** is a diagram of the program code **112** shown in FIG. **1**. The program code **112** includes an application layer **200**, a Layer **3** **202**, and a Layer **2** **206**, and is coupled to a Layer **1** **218**. The Layer **3** **202** includes a radio resource control (RRC) entity **222**, which is used for controlling the Layer **1** **218** and the Layer **2** **206** and performing peer-to-peer RRC communication with other communications devices, such as a base station or a Node-B. In addition, the RRC entity **222** can change an RRC state of the communications device **100**, switching between an Idle mode, CELL_PCH, URA_PCH, CELL_FACH or CELL_DCH state.

[0024] As for Multimedia Broadcast Multicast Services (MBMS), a UMTS Terrestrial Radio Access Network (UTRAN) can generate RRC messages and information elements (IEs) to include MBMS configuration and then transmit them with a Point-to-Point Radio Bearer (p-t-p RB) or a Point-to-Multipoint Radio Bearer (p-t-m RB) to the communications device **100**. In the CELL_DCH state, when the application layer **200** is about to use an MBMS service or the state of a joined MBMS service changes, the RRC entity **222** performs a frequency selection procedure for transferring a current operating frequency to a corresponding carrier frequency to execute following service reception operations. In this situation, the embodiment of the present invention provides an operating frequency selection program code **220** to improve an operating frequency selection mechanism when the frequency selection procedure is executed in the CELL_DCH state, so as to prevent a user equipment from terminating an MBMS service reception improperly. Please refer to FIG. **3**, which illustrates a schematic diagram of a process **30** according to an embodiment of the present invention. The process **30** is utilized for a user equipment (UE) of a wireless communications system for selecting an operating frequency corresponding to an MBMS service, and can be compiled into the operating frequency selection program code **220**. The process **30** includes the following steps:

[0025] Step **300**: Start.

[0026] Step **302**: Determine whether a current operating frequency of the UE is equal to a preferred frequency corresponding to an MBMS service prioritized by upper layers when the RRC state of the UE is operated in the CELL_DCH state.

[0027] Step **304**: Continue using the current operating frequency when the current operating frequency of the UE is equal to the preferred frequency corresponding to the MBMS service prioritized by the upper layers.

[0028] Step **306**: End.

[0029] According to the process **30**, when the RRC state of the UE is operated in the CELL_DCH state, the embodiment of the present invention determines whether the current

operating frequency of the UE is equal to the preferred frequency corresponding to the MBMS service prioritized by upper layers. The UE can keep using the current operating frequency when the current operating frequency of the UE is equal to the preferred frequency corresponding to the MBMS service prioritized by the upper layers. Therefore, even if the preferred frequency is determined to be congested by the UTRAN, i.e. an information element (IE) "MBMS PL Service Restriction Information" is included in an MBMS GENERAL INFORMATION message for the preferred frequency sent by the UTRAN, the UE can still stay on the current operating frequency for performing MBMS service reception. In this case, if the UE is currently on the frequency layer for receiving an MBMS service, the UE can continue using the frequency for receiving the MBMS service, and need not to request to be transferred to another preferred frequency, so as to prevent from a situation that the current MBMS service reception is terminating improperly.

[0030] Certainly, according to using conditions of radio resources, the UTRAN can handover the UE in CELL_DCH state to other frequency if necessary (e.g., the preferred frequency is over-congested) for reducing the cell load.

[0031] Please continue to refer FIG. **4**. FIG. **4** is a schematic diagram of a process **40** according to an embodiment of the present invention. The process **40** is utilized for a user equipment (UE) of a wireless communications system for selecting an operating frequency corresponding to an MBMS service, and can be compiled into the operating frequency selection program code **220**. The process **40** includes the following steps:

[0032] Step **400**: Start.

[0033] Step **402**: Determine whether a current operating frequency of the UE is equal to a preferred frequency corresponding to an MBMS service prioritized by upper layers. If so, proceed to Step **404**; and if not, proceed to Step **406**.

[0034] Step **404**: Continue using the current operating frequency, and proceed to Step **408**.

[0035] Step **406**: Switch the current operating frequency of the UE to a preferred frequency according to MBMS service priority orders decided by the upper layers, for which the IE "MBMS PL Service Restriction Information" is not included, and proceed to Step **408**.

[0036] Step **408**: End.

[0037] According to the process **40**, when the RRC state of the UE is operated in the CELL_DCH state, the embodiment of the present invention firstly determines whether the current operating frequency of the UE is equal to the preferred frequency corresponding to the MBMS service prioritized by upper layers. When the current operating frequency of the UE is equal to the preferred frequency corresponding to the MBMS service, the UE need not further perform frequency selection, and can continue using the current operating frequency (Step **404**), so as to prevent from terminating reception of the MBMS service.

[0038] On the contrary, when the current operating frequency of the UE is not equal to the preferred frequency corresponding to the MBMS service prioritized by the upper layers, the UE should select a preferred frequency for which the IE "MBMS PL Service Restriction Information" is not included in the MBMS GENERAL INFORMATION mes-

sage sent by the UTRAN according to the MBMS service priority orders decided by the upper layers as an operating frequency (Step 406).

[0039] As mentioned above, when the RRC state is operated in the CELL_DCH state, the embodiment of the present invention determines in advance whether the current operating frequency of the UE is equal to the preferred frequency corresponding to the MBMS service prioritized by upper layers, for allowing the UE to keep staying on the current operating frequency in case of receiving the MBMS service currently, so as to prevent from terminating the current MBMS service reception improperly.

[0040] Those skilled in the art will readily observe that numerous modifications and alterations of the device and method may be made while retaining the teachings of the invention. Accordingly, the above disclosure should be construed as limited only by the metes and bounds of the appended claims.

What is claimed is:

1. A method for a user equipment of a wireless communications system for selecting an operating frequency corresponding to a multimedia broadcast multicast service, called MBMS service hereinafter, comprising:

determining whether a current operating frequency of the user equipment is equal to a preferred frequency corresponding to the MBMS service prioritized by upper layers when a radio resource control state of the user equipment is operated in a CELL_DCH state; and continuing using the current operating frequency when the current operating frequency of the user equipment is equal to the preferred frequency corresponding to the MBMS service prioritized by the upper layers.

2. The method of claim 1 further comprising:

switching the current operating frequency of the user equipment to a preferred frequency according to MBMS service priority orders decided by the upper layers, for which an information element "MBMS PL Service Restriction Information" is not included, when the current operating frequency of the user equipment is not equal to the preferred frequency corresponding to the MBMS service prioritized by the upper layers.

3. The method of claim 1, wherein the preferred frequency is determined to be congested.

4. The method of claim 1, wherein the MBMS service is a service of Broadcast type.

5. The method of claim 1, wherein the MBMS service is a service of Multicast type.

6. The method of claim 1, wherein the wireless communications system is a third generation communications system.

7. A communications device for selecting an operating frequency corresponding to a multimedia broadcast multicast service, called MBMS service hereinafter, in a wireless communications system, the communications device comprising:

a control circuit for realizing functions of the communications device;

a processor installed in the control circuit, for executing a program code to command the control circuit; and a memory installed in the control circuit and coupled to the processor for storing the program code;

wherein the program code comprises:

determining whether a current operating frequency is equal to a preferred frequency corresponding to the MBMS service prioritized by upper layers when a radio resource control state is operated in a CELL_DCH state; and

continuing using the current operating frequency when the current operating frequency is equal to the preferred frequency corresponding to the MBMS service prioritized by the upper layers.

8. The communications device of claim 7 further comprising:

switching the current operating frequency to a preferred frequency according to MBMS service priority orders decided by the upper layers, for which an information element "MBMS PL Service Restriction Information" is not included, when the current operating frequency is not equal to the preferred frequency corresponding to the MBMS service prioritized by the upper layers.

9. The communications device of claim 7, wherein the preferred frequency is determined to be congested.

10. The communications device of claim 7, wherein the MBMS service is a service of Broadcast type.

11. The communications device of claim 7, wherein the MBMS service is a service of Multicast type.

12. The communications device of claim 7, wherein the wireless communications system is a third generation communications system.

* * * * *