



(86) Date de dépôt PCT/PCT Filing Date: 2013/04/22
(87) Date publication PCT/PCT Publication Date: 2013/10/24
(85) Entrée phase nationale/National Entry: 2014/06/09
(86) N° demande PCT/PCT Application No.: KR 2013/003413
(87) N° publication PCT/PCT Publication No.: 2013/157902
(30) Priorités/Priorities: 2012/04/20 (KR10-2012-0041456);
2013/04/22 (KR10-2013-0044338)

(51) Cl.Int./Int.Cl. *H01M 2/14* (2006.01),
H01M 10/052 (2010.01)


(71) Demandeur/Applicant:
LG CHEM, LTD., KR

(72) Inventeurs/Inventors:
RYU, BO-KYUNG, KR;
LEE, JOO-SUNG, KR;
KIM, JONG-HUN, KR

(74) Agent: BENOIT & COTE INC.

(54) Titre : PROCEDE DE FABRICATION DE SEPARATEUR, SEPARATEUR FORME AINSI, ET DISPOSITIF
ELECTROCHIMIQUE COMPRENANT LEDIT SEPARATEUR

(54) Title: SEPARATOR AND ELECTROCHEMICAL DEVICE HAVING THE SAME

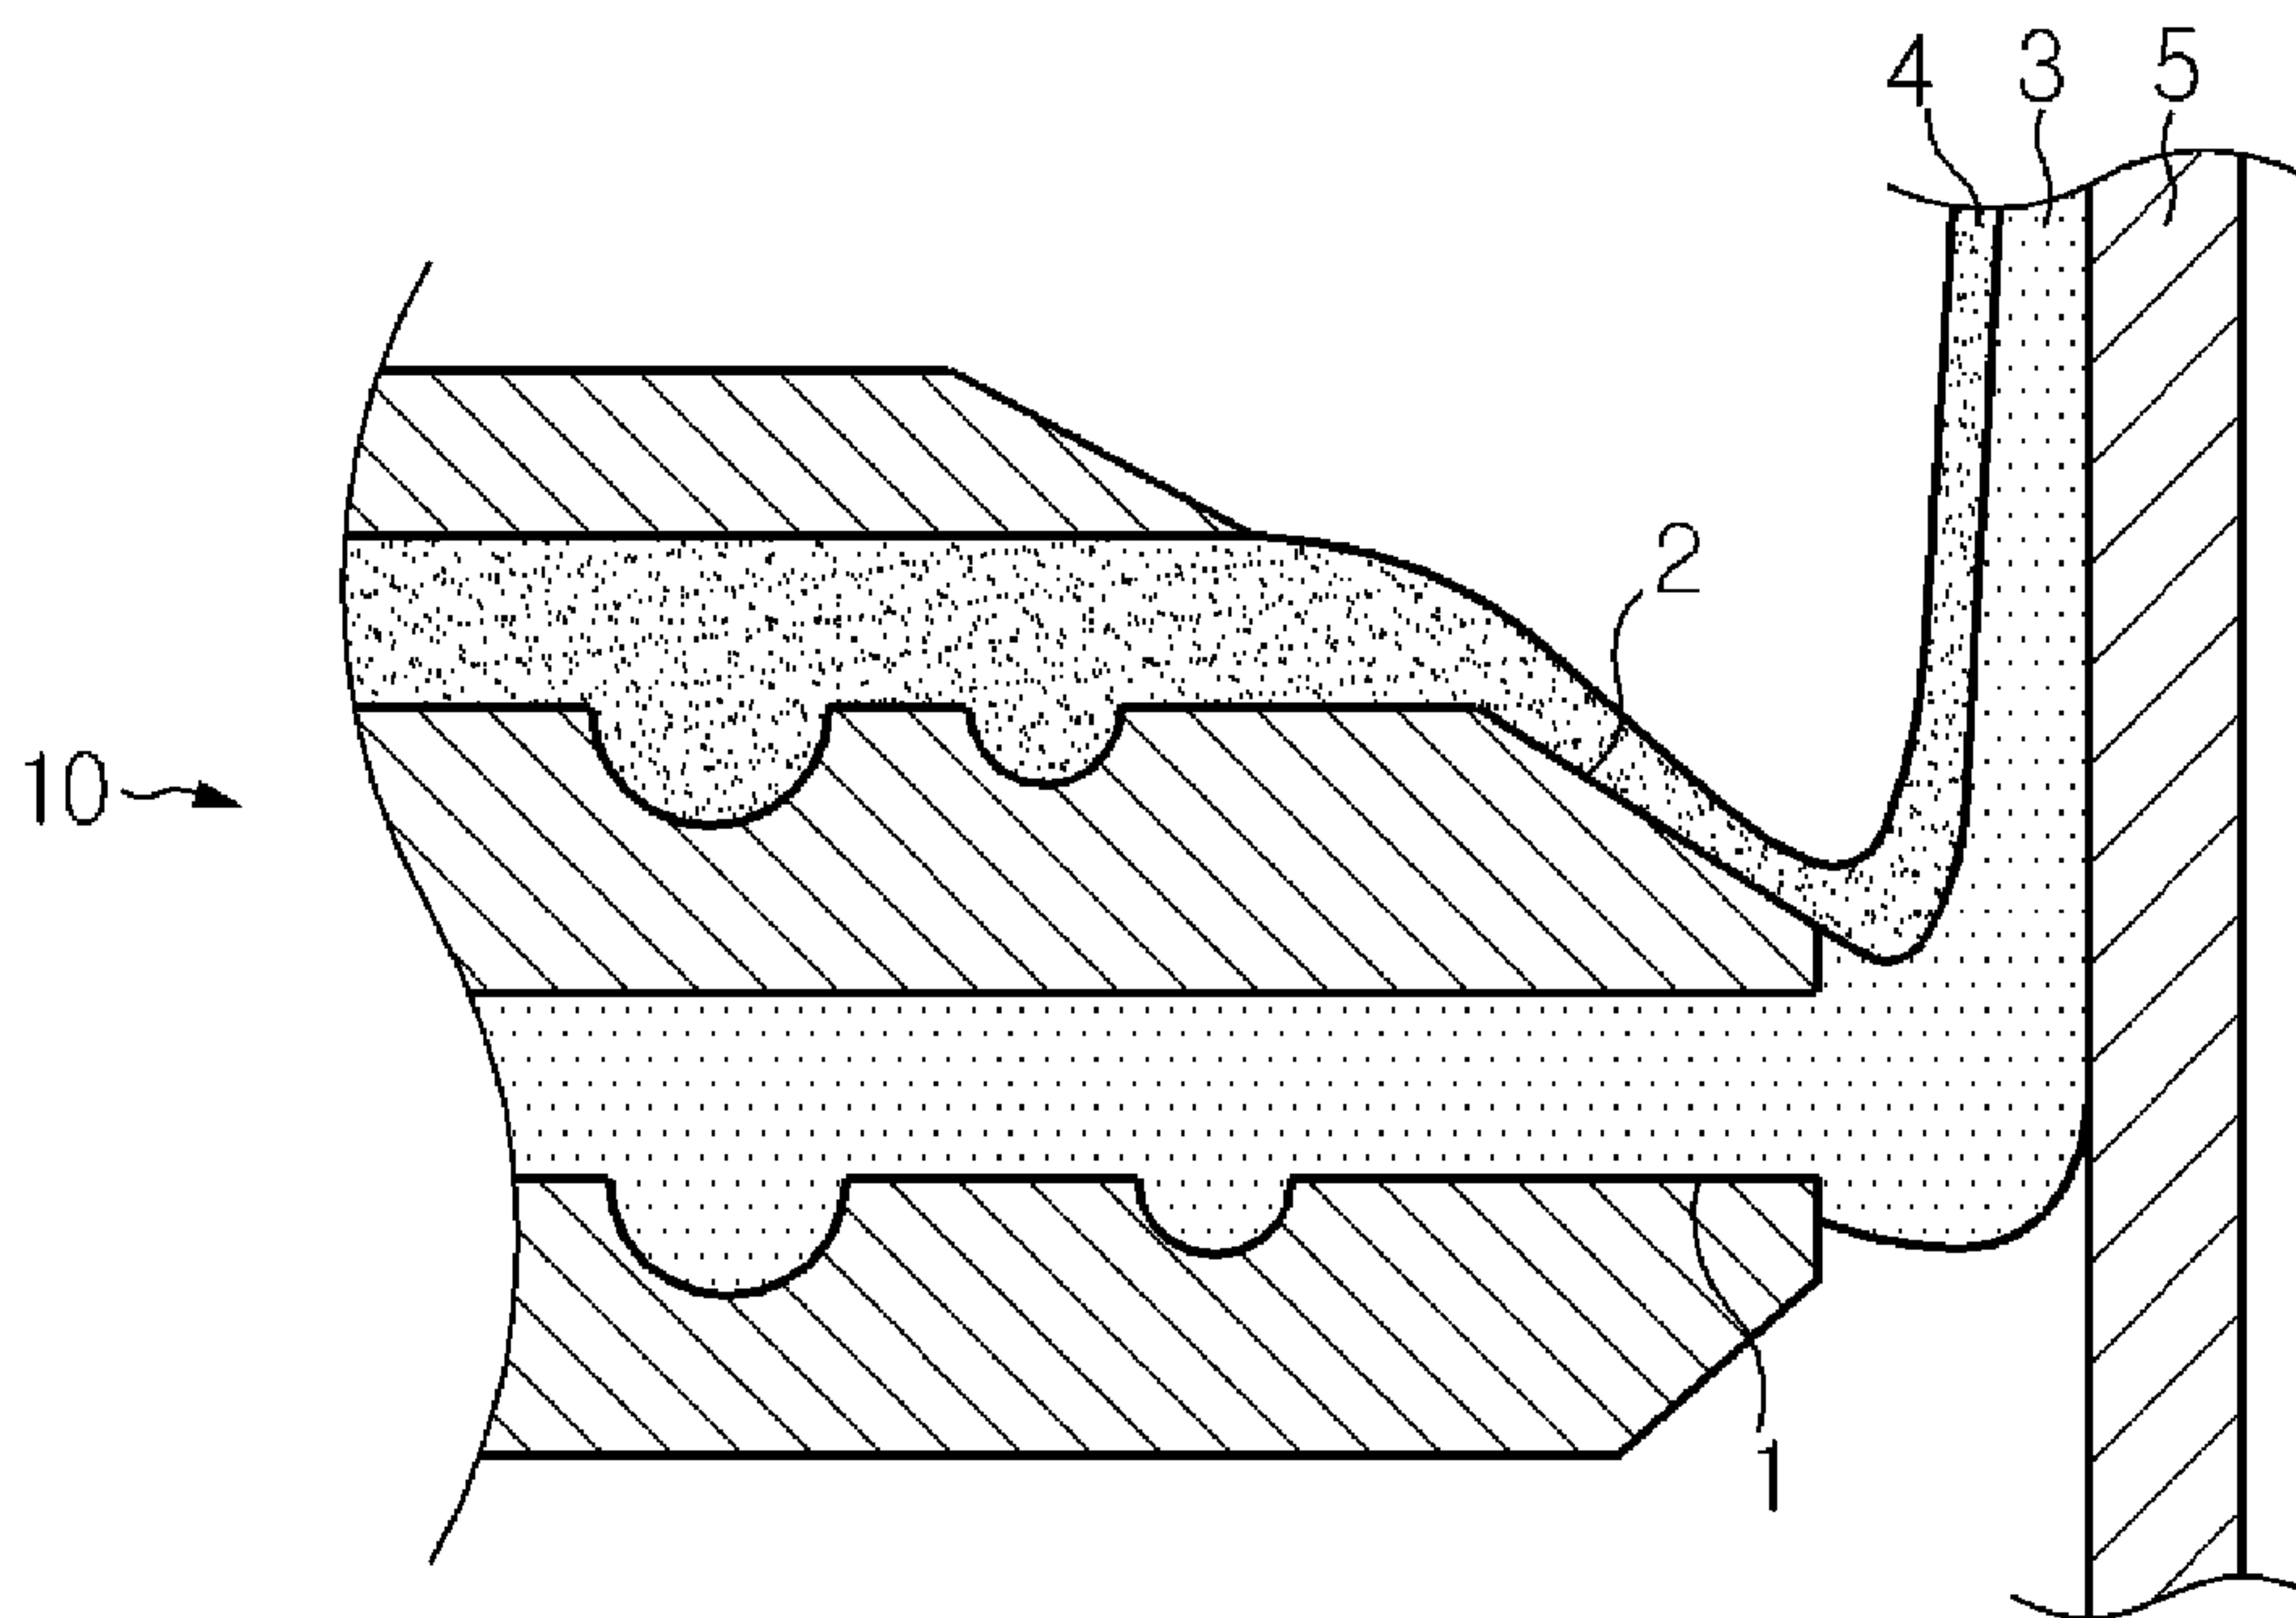

(57) Abrégé/Abstract:

Disclosed are a method for manufacturing a separator, a separator formed thereby, and an electrochemical device comprising said separator. The method for manufacturing a separator according to the present invention comprises the steps of: preparing a planar porous base having multiple air pores; and coating at least one side of the porous base with a first slurry comprising inorganic particles, first binder polymers, and a first solvent through a slot unit so as to form a porous coating layer, and continuously coating the porous coating layer with a second slurry comprising second binder polymers and a second solvent through a slide unit adjacent the slot unit, thus forming an electrode adhesion layer. According to the present invention, the upper surface of the porous coating layer formed on the separator is coated with the electrode adhesion layer using the second slurry comprising binder polymers naturally flowing through the slide unit, thus preventing the intermixing of the porous coating layer and the electrode adhesion layer, resulting in the improved adhesive force of the electrode adhesion layer and the prevention of a degradation in the performance of the electrochemical device.

PCT/KR2013/003413
2013-04-22

ABSTRACT

The present invention refers to a method of preparing a separator, a separator prepared therefrom and an electrochemical device having the separator. The method of preparing a separator according to the present invention comprises providing a planar and porous substrate having multiple pores; and coating a first slurry on at least one surface of the porous substrate through a slot section to form a porous coating layer, while continuously coating a second slurry on the porous coating layer through a slide section adjacent to the slot section to form a layer for adhesion with an electrode, the first slurry comprising inorganic particles, a first binder polymer and a first solvent, and the second slurry comprising a second binder polymer and a second solvent.

In accordance with the present invention, in the preparation of a separator, a second slurry comprising a binder polymer is smoothly discharged through a slide section without an external force to coat a layer for adhesion with an electrode on the top of a porous coating layer which is formed on a porous substrate by discharging a first slurry through a slot section, thereby preventing the inter-mixing of the porous coating layer and the layer for adhesion with an electrode, and eventually improving the adhesiveness of the separator to an electrode and preventing the performance of an electrochemical device from being deteriorated.

PCT/KR2013/003413
2013-04-22

SEPARATOR AND ELECTROCHEMICAL DEVICE HAVING THE SAME

TECHNICAL FIELD

The present invention relates to a method of preparing a separator for an
5 electrochemical device such as a lithium secondary battery, more particularly to a
method of preparing a separator having a porous coating layer formed on a porous
substrate having multiple pores; a separator prepared therefrom; and an electrochemical
device having the separator.

This application claims priority to Korean Patent Application No. 10-2012-
10 0041456 filed in the Republic of Korea on April 20, 2012 and Korean Patent Application
No. 10-2013-0044338 filed in the Republic of Korea on April 22, 2013, the disclosures
thereof are incorporated herein by reference.

BACKGROUND ART

15 Recently, there has been an increasing interest in energy storage technology. As
the application fields of energy storage technologies have been extended to cellular
phones, camcorders, notebook computers, PCs and electric cars, efforts have been
increasingly made towards the research and development of electrochemical
devices. In this regard, electrochemical devices are one of the subjects of great interest.
20 Particularly, development of rechargeable secondary batteries has been the focus of
attention. Recently, extensive research and development of such batteries are focused
on the designs of new electrodes and batteries to improve capacity density and specific

PCT/KR2013/003413
2013-04-22

energy. However, such lithium ion batteries suffer from safety problems, such as fire and explosion, when encountered with the use of organic electrolytes and are disadvantageously complicated to fabricate. In attempts to overcome the disadvantages of lithium ion batteries, lithium ion polymer batteries have been developed as next-
5 generation batteries. More research is still urgently needed to improve the relatively low capacities and insufficient low-temperature discharge capacities of lithium ion polymer batteries in comparison with lithium ion batteries.

Many companies have produced a variety of electrochemical devices with different safety characteristics. It is very important to evaluate and ensure the safety of
10 such electrochemical devices. The most important consideration for safety is that operational failure or malfunction of electrochemical devices should not cause injury to users. For this purpose, regulatory guidelines strictly restrict potential dangers (such as fire and smoke emission) of electrochemical devices. Overheating of an electrochemical device may cause thermal runaway or a puncture of a separator may pose
15 an increased risk of explosion. In particular, porous polyolefin substrates commonly used as separators for electrochemical devices undergo severe thermal shrinkage at a temperature of 100 °C or higher in view of their material characteristics and production processes including elongation. This thermal shrinkage behavior may cause electrical short between a cathode and an anode.

20 In order to solve the above safety problems of electrochemical devices, there has been proposed a separator having a porous coating layer which is formed by coating a mixture of inorganic particles and a binder polymer on at least one surface of a porous substrate. In the separator, the inorganic particles, which are present in the porous

PCT/KR2013/003413
2013-04-22

coating layer formed on the porous substrate, act as a spacer capable of maintaining the physical form of the porous coating layer, thereby preventing the porous substrate from thermal shrinkage even if electrochemical devices overheat. Also, an interstitial volume is present between the inorganic particles to form a fine pore.

5 Such a separator is required to adhere with an electrode in a stacking and folding process, and therefore, it is favorable for a layer for adhesion with an electrode to be significantly exposed on the porous substrate layer of the separator for good adhesion with the electrode. However, in the formation of such a layer for adhesion with an electrode, when a binder polymer is used an excessive amount, the performance of
10 electrochemical devices may be deteriorated.

DISCLOSURE

Technical Problem

The present invention is designed to solve the above-mentioned problems, and
15 therefore it is an object of the present invention to provide a method of preparing a separator, which can provide a thin layer for adhesion with an electrode without deteriorating the thermal stability of the separator, thereby enabling good assembling work and preventing the performance of electrochemical devices from being deteriorated by the layer for adhesion with an electrode; a separator prepared from the method, and an
20 electrochemical device comprising the separator.

Technical Solution

In order to achieve the above object, in accordance with one aspect of the present

PCT/KR2013/003413
2013-04-22

invention, there is provided a method of preparing a separator, comprising providing a planar and porous substrate having multiple pores; and coating a first slurry on at least one surface of the porous substrate through a slot section to form a porous coating layer, while continuously coating a second slurry on the porous coating layer through a slide
5 section adjacent to the slot section to form a layer for adhesion with an electrode, the first slurry comprising inorganic particles, a first binder polymer and a first solvent, and the second slurry comprising a second binder polymer and a second solvent.

In the present invention, the slide section is inclined so as to form an angle (θ) of 10 to 80° with the slot section.

10 Also, the first slurry and the second slurry may each independently have a viscosity of 5 to 100 cp.

In addition, the first slurry may be discharged at a rate faster than that of the second slurry.

The first slurry and the second slurry may be discharged at a rate of 500 to 2,000
15 ml/min, and at a rate of 200 to 1,200 ml/min, respectively.

The layer for adhesion with an electrode may have a thickness satisfying 1/10 or less of the thickness of the porous coating layer.

The porous substrate may be a polyolefin-based porous membrane.

The slot section and the slide section may be formed in an integrated slide-slot
20 die, or independently formed in a slot die and a slide die, respectively.

Meanwhile, the inorganic particles used in the present invention may have an average diameter of 0.001 to 10 μm , and they may be inorganic particles having a dielectric constant of 5 or higher, inorganic particles having the ability to transport

PCT/KR2013/003413
2013-04-22

lithium ions, or a mixture thereof.

Examples of the inorganic particles having a dielectric constant of 5 or higher include BaTiO_3 , $\text{Pb}(\text{Zr}_x\text{Ti}_{1-x})\text{O}_3$ (PZT, $0 < x < 1$), $\text{Pb}_{1-x}\text{La}_x\text{Zr}_{1-y}\text{Ti}_y\text{O}_3$ (PLZT, $0 < x < 1$, $0 < y < 1$), $(1-x)\text{Pb}(\text{Mg}_{1/3}\text{Nb}_{2/3})\text{O}_3$ - $x\text{PbTiO}_3$ (PMN-PT, $0 < x < 1$), hafnia (HfO_2), SrTiO_3 ,
5 SnO_2 , CeO_2 , MgO , NiO , CaO , ZnO , ZrO_2 , Y_2O_3 , Al_2O_3 , SiC , TiO_2 inorganic particles and a mixture thereof.

Also, examples of the inorganic particles having the ability to transport lithium ions include lithium phosphate (Li_3PO_4), lithium titanium phosphate ($\text{Li}_x\text{Ti}_y(\text{PO}_4)_3$, $0 < x < 2$, $0 < y < 3$), lithium aluminum titanium phosphate ($\text{Li}_x\text{Al}_y\text{Ti}_z(\text{PO}_4)_3$, $0 < x < 2$, $0 < y < 1$,
10 $0 < z < 3$), $(\text{LiAlTiP})_x\text{O}_y$ type glass ($0 < x < 4$, $0 < y < 13$), lithium lanthanum titanate ($\text{Li}_x\text{La}_y\text{TiO}_3$, $0 < x < 2$, $0 < y < 3$), lithium germanium thiophosphate ($\text{Li}_x\text{Ge}_y\text{P}_z\text{S}_w$, $0 < x < 4$, $0 < y < 1$, $0 < z < 1$, $0 < w < 5$), lithium nitride (Li_xN_y , $0 < x < 4$, $0 < y < 2$), SiS_2 type glass ($\text{Li}_x\text{Si}_y\text{S}_z$, $0 < x < 3$, $0 < y < 2$, $0 < z < 4$), P_2S_5 type glass ($\text{Li}_x\text{P}_y\text{S}_z$, $0 < x < 3$, $0 < y < 3$, $0 < z < 7$) inorganic particles, and a mixture thereof.

15 In the present invention, the first binder polymer and the second binder polymer may be each independently selected from the group consisting of polyvinylidene fluoride-co-hexafluoro propylene, polyvinylidene fluoride-co-trichloro ethylene, polyvinylidene fluoride-co-chlorotrifluoro ethylene, polymethyl methacrylate, polyacrylonitrile, polyvinylpyrrolidone, polyvinylacetate, polyethylene-co-vinyl acetate,
20 polyethylene oxide, cellulose acetate, cellulose acetate butyrate, cellulose acetate propionate, cyanoethyl pullulan, cyanoethyl polyvinylalcohol, cyanoethyl cellulose, cyanoethyl sucrose, pullulan, carboxyl methyl cellulose, acrylonitrile-styrene-butadiene copolymer, polyimide and a mixture thereof.

PCT/KR2013/003413
2013-04-22

Further, in accordance with another aspect of the present invention, there is provided a separator prepared by the above method.

Furthermore, in accordance with still another aspect of the present invention, there is provided an electrochemical device comprising a cathode, an anode, a separator
5 interposed between the cathode and the anode and an electrolyte solution, wherein the separator is defined in the present invention. The electrochemical device may be a lithium secondary battery.

Advantageous Effects

10 According to one embodiment of the present invention, in the preparation of a separator, a second slurry comprising a binder polymer is smoothly discharged through a slide section without an external force to coat a layer for adhesion with an electrode on the top of a porous coating layer which is formed on a porous substrate by discharging a first slurry through a slot section, thereby preventing the inter-mixing of the porous
15 coating layer and the layer for adhesion with an electrode and eventually effectively forming the layer for adhesion with an electrode.

Also, the layer for adhesion with an electrode can be thinly formed on the top of the porous coating layer which is formed on at least one surface of a substrate for a separator, thereby improving the adhesiveness of the separator to an electrode and
20 preventing the performance of an electrochemical device from being deteriorated.

DESCRIPTION OF DRAWINGS

The accompanying drawings illustrate preferred embodiments of the present

PCT/KR2013/003413
2013-04-22

invention and, together with the foregoing disclosure, serve to provide further understanding of the technical spirit of the present invention. However, the present invention is not to be construed as being limited to the drawings.

FIG. 1 schematically shows procedures for preparing a separator in accordance
5 with one embodiment of the present invention.

FIG. 2 shows an angle (θ) which is formed by a slide section and a slot section in a slide-slot die according to one embodiment of the present invention.

FIG. 3 is a photograph for a side of a dual slot die when slurries are discharged therefrom, in the Comparative Example presented herein.

10 FIG. 4 is a photograph for a side of a slide-slot die when slurries are discharged therefrom, according to one embodiment of the present invention.

FIG. 5 is an extended SEM photograph of the cross-section of a separator prepared according to one embodiment of the present invention.

15 FIG. 6 is an extended SEM photograph of the cross-section of a separator prepared in the Comparative Example presented herein.

FIG. 7 is an extended SEM photograph of the side of a separator prepared according to one embodiment of the present invention.

BEST MODE

20 Hereinafter, the present invention will be described in detail. Prior to the description, it should be understood that the terms used in the specification and the appended claims should not be construed as limited to general and dictionary meanings, but interpreted based on the meanings and concepts corresponding to technical aspects of

PCT/KR2013/003413
2013-04-22

the present invention on the basis of the principle that the inventor is allowed to define terms appropriately for the best explanation.

Also, the embodiments and the drawings proposed herein is just a preferable example for the purpose of illustrations only, not intended to limit the scope of the disclosure, so it should be understood that other equivalents and modifications could be made thereto without departing from the spirit and scope of the disclosure.

In order to prepare a separator according to one embodiment of the present invention, a planar and porous substrate having multiple pores is first provided.

The porous substrate used in the present invention may be any one which is conventionally used in electrochemical devices, for example, a polyolefin-based membrane or non-woven fabric, but the present invention is not particularly limited thereto.

The polyolefin-based membrane may be made of polyethylene such as high-density polyethylene, linear low-density polyethylene, low-density polyethylene and ultra-high molecular weight polyethylene, polypropylene, polybutylene, polypentene or a mixture thereof.

The non-woven fabric may be made of polyolefin, as well as polyethylene terephthalate, polybutylene terephthalate, polyester, polyacetal, polyamide, polycarbonate, polyimide, polyetheretherketone, polyethersulfone, polyphenylene oxide, polyphenylene sulfide, polyethylene naphthalate, or a mixture thereof. Also, the non-woven fabric may be a spun-bonded or melt-blown fabric consisting of long fibers.

Also, the porous substrate may have a thickness of 1 to 100 μm , preferably 5 to 50 μm , but is not particularly limited thereto.

PCT/KR2013/003413
2013-04-22

In addition, the porous substrate may have a pore size of 0.001 to 50 μm , and a porosity of 10 to 95%, but is not particularly limited thereto.

Subsequently, a first slurry comprising inorganic particles, a first binder polymer and a first solvent is coated on at least one surface of the porous substrate through a slot
5 section to form a porous coating layer, while a second slurry comprising a second binder polymer and a second solvent is continuously coated on the porous coating layer through a slide section adjacent to the slot section to form a layer for adhesion with an electrode.

In the present invention, the inorganic particles are not particularly limited if they are electrochemically stable. That is, the inorganic particles which may be used in the
10 present invention are not particularly limited unless an oxidation-reduction reaction occurs in an operating voltage range (for example, 0 to 5 V based on Li/Li^+) of an applied electrochemical device. Particularly, inorganic particles having a high dielectric constant may be used to increase a dissociation rate of an electrolyte salt, e.g., a lithium salt, in a liquid electrolyte, thereby improving an ionic conductivity of the
15 electrolyte.

For the foregoing reasons, the inorganic particles used in the present invention preferably include inorganic particles having a dielectric constant of 5 or higher, preferably 10 or higher. Non-limiting examples of the inorganic particles having a dielectric constant of 5 or higher include BaTiO_3 , $\text{Pb}(\text{Zr}_x\text{Ti}_{1-x})\text{O}_3$ (PZT, $0 < x < 1$), $\text{Pb}_{1-x}\text{La}_x\text{Zr}_{1-y}\text{Ti}_y\text{O}_3$ (PLZT, $0 < x < 1$, $0 < y < 1$), $(1-x)\text{Pb}(\text{Mg}_{1/3}\text{Nb}_{2/3})\text{O}_3-x\text{PbTiO}_3$ (PMN-PT, $0 < x < 1$), hafnia (HfO_2), SrTiO_3 , SnO_2 , CeO_2 , MgO , NiO , CaO , ZnO , ZrO_2 , Y_2O_3 , Al_2O_3 , SiC , TiO_2 inorganic particles and a mixture thereof.
20

Also, as the inorganic particles, inorganic particles having the ability to transport

PCT/KR2013/003413
2013-04-22

lithium ions, i.e., lithium-containing inorganic particles which can transfer lithium ions without holding them may be used. Non-limiting examples of the inorganic particles having the ability to transport lithium ions include lithium phosphate (Li_3PO_4), lithium titanium phosphate ($\text{Li}_x\text{Ti}_y(\text{PO}_4)_3$, $0 < x < 2$, $0 < y < 3$), lithium aluminum titanium phosphate
5 ($\text{Li}_x\text{Al}_y\text{Ti}_z(\text{PO}_4)_3$, $0 < x < 2$, $0 < y < 1$, $0 < z < 3$), $(\text{LiAlTiP})_x\text{O}_y$ type glass ($0 < x < 4$, $0 < y < 13$) such as $14\text{Li}_2\text{O}-9\text{Al}_2\text{O}_3-38\text{TiO}_2-39\text{P}_2\text{O}_5$, lithium lanthanum titanate ($\text{Li}_x\text{La}_y\text{TiO}_3$, $0 < x < 2$, $0 < y < 3$), lithium germanium thiophosphate ($\text{Li}_x\text{Ge}_y\text{P}_z\text{S}_w$, $0 < x < 4$, $0 < y < 1$, $0 < z < 1$, $0 < w < 5$) such as $\text{Li}_{3.25}\text{Ge}_{0.25}\text{P}_{0.75}\text{S}_4$, lithium nitride (Li_xN_y , $0 < x < 4$, $0 < y < 2$) such as Li_3N , SiS_2 type glass ($\text{Li}_x\text{Si}_y\text{S}_z$, $0 < x < 3$, $0 < y < 2$, $0 < z < 4$) such as $\text{Li}_3\text{PO}_4\text{-Li}_2\text{S-SiS}_2$, P_2S_5 type glass
10 ($\text{Li}_x\text{P}_y\text{S}_z$, $0 < x < 3$, $0 < y < 3$, $0 < z < 7$) such as $\text{LiI-Li}_2\text{S-P}_2\text{S}_5$, and a mixture thereof.

In the separator of the present invention, the inorganic particles are not particularly limited to their size, but preferably have an average diameter of 0.001 to 10 μm for forming the porous coating in a uniform thickness and achieving a proper porosity.

15 When the average diameter of the inorganic particles satisfies such range, the dispersibility of the inorganic particles may be prevented from decreasing and the thickness of the porous coating layer may be properly controlled.

Further, non-limiting examples of the first binder polymer and the second binder polymer include polyvinylidene fluoride-co-hexafluoro propylene, polyvinylidene
20 fluoride-co-trichloro ethylene, polyvinylidene fluoride-co-chlorotrifluoro ethylene, polymethyl methacrylate, polyacrylonitrile, polyvinylpyrrolidone, polyvinylacetate, polyethylene-co-vinyl acetate, polyethylene oxide, cellulose acetate, cellulose acetate butyrate, cellulose acetate propionate, cyanoethyl pullulan, cyanoethyl polyvinylalcohol,

PCT/KR2013/003413
2013-04-22

cyanoethyl cellulose, cyanoethyl sucrose, pullulan, carboxyl methyl cellulose, acrylonitrile-styrene-butadiene copolymer, polyimide and a mixture thereof, but are not limited thereto.

In the present invention, the first solvent is not particularly limited if it can
5 dissolve a binder polymer and disperse inorganic particles, and the second solvent is not particularly limited if it can disperse and dissolve a binder polymer, but solvents having a low boiling point are favorable because they can be easily removed later. Non-limiting examples of the usable first and second solvents include acetone, tetrahydrofuran, methylene chloride, chloroform, dimethylform amide, N-methyl-2-pyrrolidone (NMP),
10 cyclohexane, water and a mixture thereof.

Meanwhile, with reference to FIGS. 1 and 2, the slot section 1 and the slide section 2 may be formed in an integrated slide-slot die 10, but the present invention is not limited thereto. Alternatively, the slot section 1 and the slide section 2 may be independently formed in a slot die and a slide die, respectively.

15 The slide section 2 is adjacent to the slot section 1 and may be inclined to the bottom so that the second slurry can slide down from the top of the slide section 2 just by the force of gravity, without any external force. If the second slurry to be coated is discharged through an additional slot die, a strong shear stress is applied and the first slurry and the second slurry may be mixed in the discharging part of the die. However,
20 as stated, the second slurry is discharged through the slide section and coated on a desired part without applying any external force, thereby preventing the inter-mixing of the porous coating layer and the layer for adhesion with an electrode.

In the present invention, the inclined slide section 1 maintains an angle (θ) of 10

PCT/KR2013/003413
2013-04-22

to 80°, preferably 30 to 60° with the slot section 2. If the angle formed by the slot section 1 and the slide section 2 satisfies such numerical range, each coating thickness of the first and the second slurries can be easily controlled, even if the first and the second slurries each have a low viscosity. However, if the angle is very small, the part of slide
5 section 2 in which the second slurry moves becomes long and the second slurry may be vaporized, thereby leading to the non-uniform thickness of a layer for adhesion with an electrode.

The first slurry having inorganic particles dispersed and dissolved in a first solvent is supplied through the slot section 1, while the second slurry having a binder
10 polymer dispersed and dissolved in a second solvent is supplied through the slide section 2. Specifically, the porous substrate 5 is supplied by a rotating roller, and the first slurry is coated on the porous substrate 5 to form a porous coating layer 3, and continuously, the second slurry is coated on the porous coating layer 3 to form a layer 4 for adhesion with an electrode.

15 In the present invention, the first slurry may have a viscosity of 5 to 100 cp, preferably 10 to 20 cp, and the second slurry may have a viscosity of 5 to 100 cp, preferably 10 to 20 cp.

Meanwhile, the first slurry may be discharged at a rate faster than that of the second slurry. The first slurry may be discharged at a rate of 500 to 2,000 ml/min, preferably 1,000 to 1,500 ml/min, and the second slurry may be discharged at a rate of
20 200 to 1,200 ml/min, preferably at a rate of 500 to 900 ml/min. When such numerical range is satisfied, a thin layer for adhesion with an electrode can be formed without any inter-mixing between two layers.

PCT/KR2013/003413
2013-04-22

Although FIG. 1 illustrates the formation of coating layers on only one surface of the porous substrate, the present invention is not limited thereto. That is, coating layers may be formed on both surfaces of the porous substrate to prepare a separator.

In the present invention, the layer for adhesion with an electrode may have a
5 thickness satisfying $1/10$ or less, preferably $1/1,000$ to $5/100$ of the thickness of the porous coating layer. If an excessive amount of a binder polymer is present in the separator, there is a possibility the performance of electrochemical devices may be deteriorated. Accordingly, it is preferred for the layer for adhesion with an electrode to be thin.

10 The thickness of the porous coating layer may range from 0.01 to $20\text{ }\mu\text{m}$, and the thickness of the layer for adhesion with an electrode may range from 0.0001 to $2\text{ }\mu\text{m}$, preferably 0.0005 to $1\text{ }\mu\text{m}$, but the present invention is not limited thereto.

A separator prepared by the above-mentioned method may be interposed between a cathode and an anode, followed by lamination, to prepare an electrode assembly used in
15 electrochemical devices. The electrochemical devices may be any device in which electrochemical reactions may occur, and specific examples of the electrochemical devices include all kinds of primary batteries, secondary batteries, fuel cells, solar cells or capacitors such as a super capacitor. In particular, among the secondary batteries, lithium secondary batteries including a lithium metal secondary battery, a lithium ion
20 secondary battery, a lithium polymer secondary battery or a lithium ion polymer secondary battery are preferred.

In the present invention, electrodes to be used together with the separator are not particularly limited, and may be manufactured by binding an electrode active material to

PCT/KR2013/003413
2013-04-22

an electrode current collector according to a conventional method known in the art. As a cathode active material, those that are commonly used in cathodes of conventional electrochemical devices may be used. Non-limiting examples of the cathode active material may include a lithium-manganese oxide, a lithium-cobalt oxide, a lithium-nickel
5 oxide, a lithium-iron oxide, and a combination thereof, i.e., a lithium-containing composite oxide. Also, as an anode active material, those that are commonly used in anodes of conventional electrochemical devices may be used, and non-limiting examples thereof include metallic lithium, lithium alloys, and lithium intercalation materials such as carbon, petroleum coke, activated carbon, graphite and other carbonaceous materials.
10 Non-limiting examples of a usable cathode current collector include aluminum foils, nickel foils and a combination thereof. Non-limiting examples of a usable anode current collector include copper foils, gold foils, nickel foils, copper alloy foils and a combination thereof.

The electrolyte solution which may be used in the electrochemical device of the
15 present invention is obtained by dissolving or dissociating a salt in an organic solvent. The salt has a structure represented by A^+B^- wherein A^+ is an alkali metal cation such as Li^+ , Na^+ , K^+ and a combination thereof and B^- is an anion such as PF_6^- , BF_4^- , Cl^- , Br^- , I^- , ClO_4^- , AsF_6^- , $CH_3CO_2^-$, $CF_3SO_3^-$, $N(CF_3SO_2)_2^-$, $C(CF_2SO_2)_3^-$ and a combination thereof. Examples of the organic solvent include propylene carbonate (PC), ethylene carbonate
20 (EC), diethyl carbonate (DEC), dimethyl carbonate (DMC), dipropyl carbonate (DPC), dimethyl sulfoxide, acetonitrile, dimethoxyethane, diethoxyethane, tetrahydrofuran, N-methyl-2-pyrrolidone (NMP), ethyl methyl carbonate (EMC), γ -butyrolactone and a mixture thereof, but are not limited thereto.

PCT/KR2013/003413
2013-04-22

The electrolyte solution may be introduced in any suitable step during the manufacturing of the electrochemical device depending on the manufacturing processes and desired physical properties of a final product. Specifically, the electrolyte may be introduced before assembling a battery or in the final step of the assembling.

5 The separator of the present invention may be applied in batteries by lamination or stack of the separator and the electrodes, and folding, as well as a conventional winding process.

The foregoing disclosure is given by way of illustration only, and various changes and modifications within the spirit and scope of the disclosure will become apparent to
10 those skilled in the art from this detailed description. Accordingly, it should be understood that the Examples of the present invention are provided for the purpose of illustrations only and to better explain to a person having ordinary skill in the art, and is not intended to limit the scope of the present invention. The scope of the present to be protected should be defined by the claims, all technical spirits equivalent thereto should
15 be interpreted to be fallen within the scope of the present invention.

Hereinafter, preferred examples of the present invention will be described in detail for better understanding. However, the examples of the present invention may be modified in various ways, and they should not be interpreted as limiting the scope of the
20 invention. The examples of the present invention are just for better understanding of the invention to persons having ordinary skill in the art.

Example 1

PCT/KR2013/003413
2013-04-22

(1) Preparation of First Slurry

Aluminum oxide (Al_2O_3) as inorganic particles, a mixture of polyvinylidene fluoride-co-chlorotrifluoro ethylene (PVdF-CTFE) and cyanoethyl pullulan as a first binder polymer, and acetone as a first solvent were mixed in a weight ratio of 18:2:80, to
5 obtain a first slurry having a viscosity of 10 cP.

(2) Preparation of Second Slurry

A mixture of polyvinylidene fluoride-co- chlorotrifluoro ethylene (PVdF-CTFE) and cyanoethyl pullulan as a second binder polymer, and acetone as a second solvent
10 were mixed in a weight ratio of 3:97, to obtain a second slurry having a viscosity of 10 cP.

(3) Preparation of Separator

A 16 μm -thick polyolefin membrane (Celgard, C210) was used as a porous
15 substrate, on which the first slurry was supplied through the slot section of a slide-slot die and the second slurry was supplied through the slide section thereof, so that the first slurry was directly coated on the top of the porous substrate to form a porous coating layer and the second slurry was continuously coated on the top of the porous coating layer to form a layer for adhesion with an electrode. At this time, the slide section was
20 positioned to form an angle (θ) of 45° with the slot section, the discharging rate of the first slurry was controlled to be 1200 ml/min, and that of the second slurry was controlled to be 700 ml/min.

PCT/KR2013/003413
2013-04-22

Comparative Example

The procedures of the Example were repeated except that a dual slot die was used to supply the first slurry and the second slurry through each slot section so that the first slurry was directly coated on the top of the porous substrate to form a porous coating layer and the second slurry was continuously coated on the top of the porous coating layer to form a layer for adhesion with an electrode. Thereby, a separator was prepared.

Performance Evaluation

First, a side of each die used in the Example and the Comparative Example was observed when each slurry was discharged from each die.

FIG. 3 shows a photograph for a side of a dual slot die in the Comparative Example, and FIG. 4 shows a photograph for a side of a slide-slot die used in the Example, when the slurries were discharged through each die.

In comparison of FIG. 3 and FIG. 4, when the slurries were coated on the porous substrate by a dual slot die according to the Comparative Example, the first slurry and the second slurry were inter-mixed with each other, as can be seen from FIG. 3. However, when the slurries were coated on the porous substrate by a slide-slot die according to the Example, the inter-mixing between the first slurry and the second slurry was prevented, as can be seen from FIG. 4.

Meanwhile, the separators prepared in the Example and the Comparative Example were measured for their properties, and the results thereof are shown in Table 1.

Table 1

Properties	Example	Comparative Example
Thickness of Separator	7.58 μm	7.83 μm

PCT/KR2013/003413
2013-04-22

Loading Rate of Layer for Adhesion with Electrode	14.48 g/m ² (1.91 g/cm ³)	14.52 g/m ² (1.86 g/cm ³)
Gurley Number	741 s/100cc	728 s/100cc
Adhesiveness of Separator	24.2 gf/25mm	12.3 gf/25mm

As can be seen in Table 1, although the separators of the Example and the Comparative Example exhibited similar loading rate of the layer for adhesion with an electrode, the separator of the Example was confirmed to have nearly doubled in
5 adhesiveness, as compared with that of the Comparative Example. Such a result means that the inter-mixing is prevented to allow much more of the second binder polymer to be present in the surface of the separator and to allow the formation of an even layer for adhesion with an electrode.

FIGS. 5 and 6 show an extended SEM photograph of the cross-section of each
10 separator prepared in the Example and the Comparative Example, respectively, in which dark parts indicate the formation of a layer for adhesion with an electrode. The results confirmed that in the separator of the Example, the layer for adhesion with an electrode was coated more evenly and broadly.

Meanwhile, FIG. 7 shows an extended SEM photograph of the side of the
15 separator prepared in the Example of the present invention. From FIG. 7, it was confirmed that a thin layer for adhesion with an electrode was formed on the top of the porous coating layer, which can improve adhesiveness to an electrode and prevent the performance of electrochemical devices from being deteriorated.

PCT/KR2013/003413
2013-04-22

WHAT IS CLAIMED IS:

1. A method of preparing a separator, comprising:
providing a planar and porous substrate having multiple pores; and
5 coating a first slurry on at least one surface of the porous substrate through a slot section to form a porous coating layer, while continuously coating a second slurry on the porous coating layer through a slide section adjacent to the slot section to form a layer for adhesion with an electrode, the first slurry comprising inorganic particles, a first binder polymer and a first solvent, and the second slurry comprising a second binder
10 polymer and a second solvent.
2. The method of claim 1, wherein the slide section is inclined to form an angle (θ) of 10 to 80° with the slot section.
- 15 3. The method of claim 1, wherein the first slurry and the second slurry each independently have a viscosity of 5 to 100 cp.
4. The method of claim 1, wherein the first slurry is discharged at a rate faster than that of the second slurry.
20
5. The method of claim 4, wherein the first slurry is discharged at a rate of 500 to 2,000 ml/min, and the second slurry is discharged at a rate of 200 to 1,200 ml/min.

PCT/KR2013/003413
2013-04-22

6. The method of claim 1, wherein the layer for adhesion with an electrode has a thickness satisfying 1/10 or less of the thickness of the porous coating layer.

7. The method of claim 1, wherein the porous substrate is a polyolefin-based porous
5 membrane.

8. The method of claim 1, wherein the slot section and the slide section are formed in an integrated slide-slot die, or independently formed in a slot die and a slide die, respectively.

10

9. The method of claim 1, wherein the inorganic particles have an average diameter of 0.001 to 10 μm .

10. The method of claim 1, wherein the inorganic particles are selected from the
15 group consisting of inorganic particles having a dielectric constant of 5 or higher, inorganic particles having the ability to transport lithium ions, and a mixture thereof.

11. The method of claim 10, wherein the inorganic particles having a dielectric constant of 5 or higher are selected from the group consisting of BaTiO_3 , $\text{Pb}(\text{Zr}_x\text{Ti}_{1-x})\text{O}_3$
20 (PZT, $0 < x < 1$), $\text{Pb}_{1-x}\text{La}_x\text{Zr}_{1-y}\text{Ti}_y\text{O}_3$ (PLZT, $0 < x < 1$, $0 < y < 1$), $(1-x)\text{Pb}(\text{Mg}_{1/3}\text{Nb}_{2/3})\text{O}_3$ - $x\text{PbTiO}_3$ (PMN-PT, $0 < x < 1$), hafnia (HfO_2), SrTiO_3 , SnO_2 , CeO_2 , MgO , NiO , CaO , ZnO , ZrO_2 , Y_2O_3 , Al_2O_3 , SiC , TiO_2 inorganic particles and a mixture thereof.

PCT/KR2013/003413
2013-04-22

12. The method of claim 10, wherein the inorganic particles having the ability to transport lithium ions are selected from the group consisting of lithium phosphate (Li_3PO_4), lithium titanium phosphate ($\text{Li}_x\text{Ti}_y(\text{PO}_4)_3$, $0 < x < 2$, $0 < y < 3$), lithium aluminum titanium phosphate ($\text{Li}_x\text{Al}_y\text{Ti}_z(\text{PO}_4)_3$, $0 < x < 2$, $0 < y < 1$, $0 < z < 3$), $(\text{LiAlTiP})_x\text{O}_y$ type glass (5 $0 < x < 4$, $0 < y < 13$), lithium lanthanum titanate ($\text{Li}_x\text{La}_y\text{TiO}_3$, $0 < x < 2$, $0 < y < 3$), lithium germanium thiophosphate ($\text{Li}_x\text{Ge}_y\text{P}_z\text{S}_w$, $0 < x < 4$, $0 < y < 1$, $0 < z < 1$, $0 < w < 5$), lithium nitride (Li_xN_y , $0 < x < 4$, $0 < y < 2$), SiS_2 type glass ($\text{Li}_x\text{Si}_y\text{S}_z$, $0 < x < 3$, $0 < y < 2$, $0 < z < 4$), P_2S_5 type glass ($\text{Li}_x\text{P}_y\text{S}_z$, $0 < x < 3$, $0 < y < 3$, $0 < z < 7$) inorganic particles, and a mixture thereof.
- 10 13. The method of claim 1, wherein the first binder polymer and the second binder polymer are each independently selected from the group consisting of polyvinylidene fluoride-co-hexafluoro propylene, polyvinylidene fluoride-co-trichloro ethylene, polyvinylidene fluoride-co-chlorotrifluoro ethylene, polymethyl methacrylate, polyacrylonitrile, polyvinylpyrrolidone, polyvinylacetate, polyethylene-co-vinyl acetate, 15 polyethylene oxide, cellulose acetate, cellulose acetate butyrate, cellulose acetate propionate, cyanoethyl pullulan, cyanoethyl polyvinylalcohol, cyanoethyl cellulose, cyanoethyl sucrose, pullulan, carboxyl methyl cellulose, acrylonitrile-styrene-butadiene copolymer, polyimide and a mixture thereof.
- 20 14. A separator prepared by the method of any one of claims 1 to 13.
15. An electrochemical device, comprising a cathode, an anode and a separator interposed between the cathode and the anode,

PCT/KR2013/003413
2013-04-22

wherein the separator is defined in claim 14.

16. The electrochemical device according to claim 15, which is a lithium secondary battery.

5

PCT/KR2013/003413
2013-04-22

FIG. 1


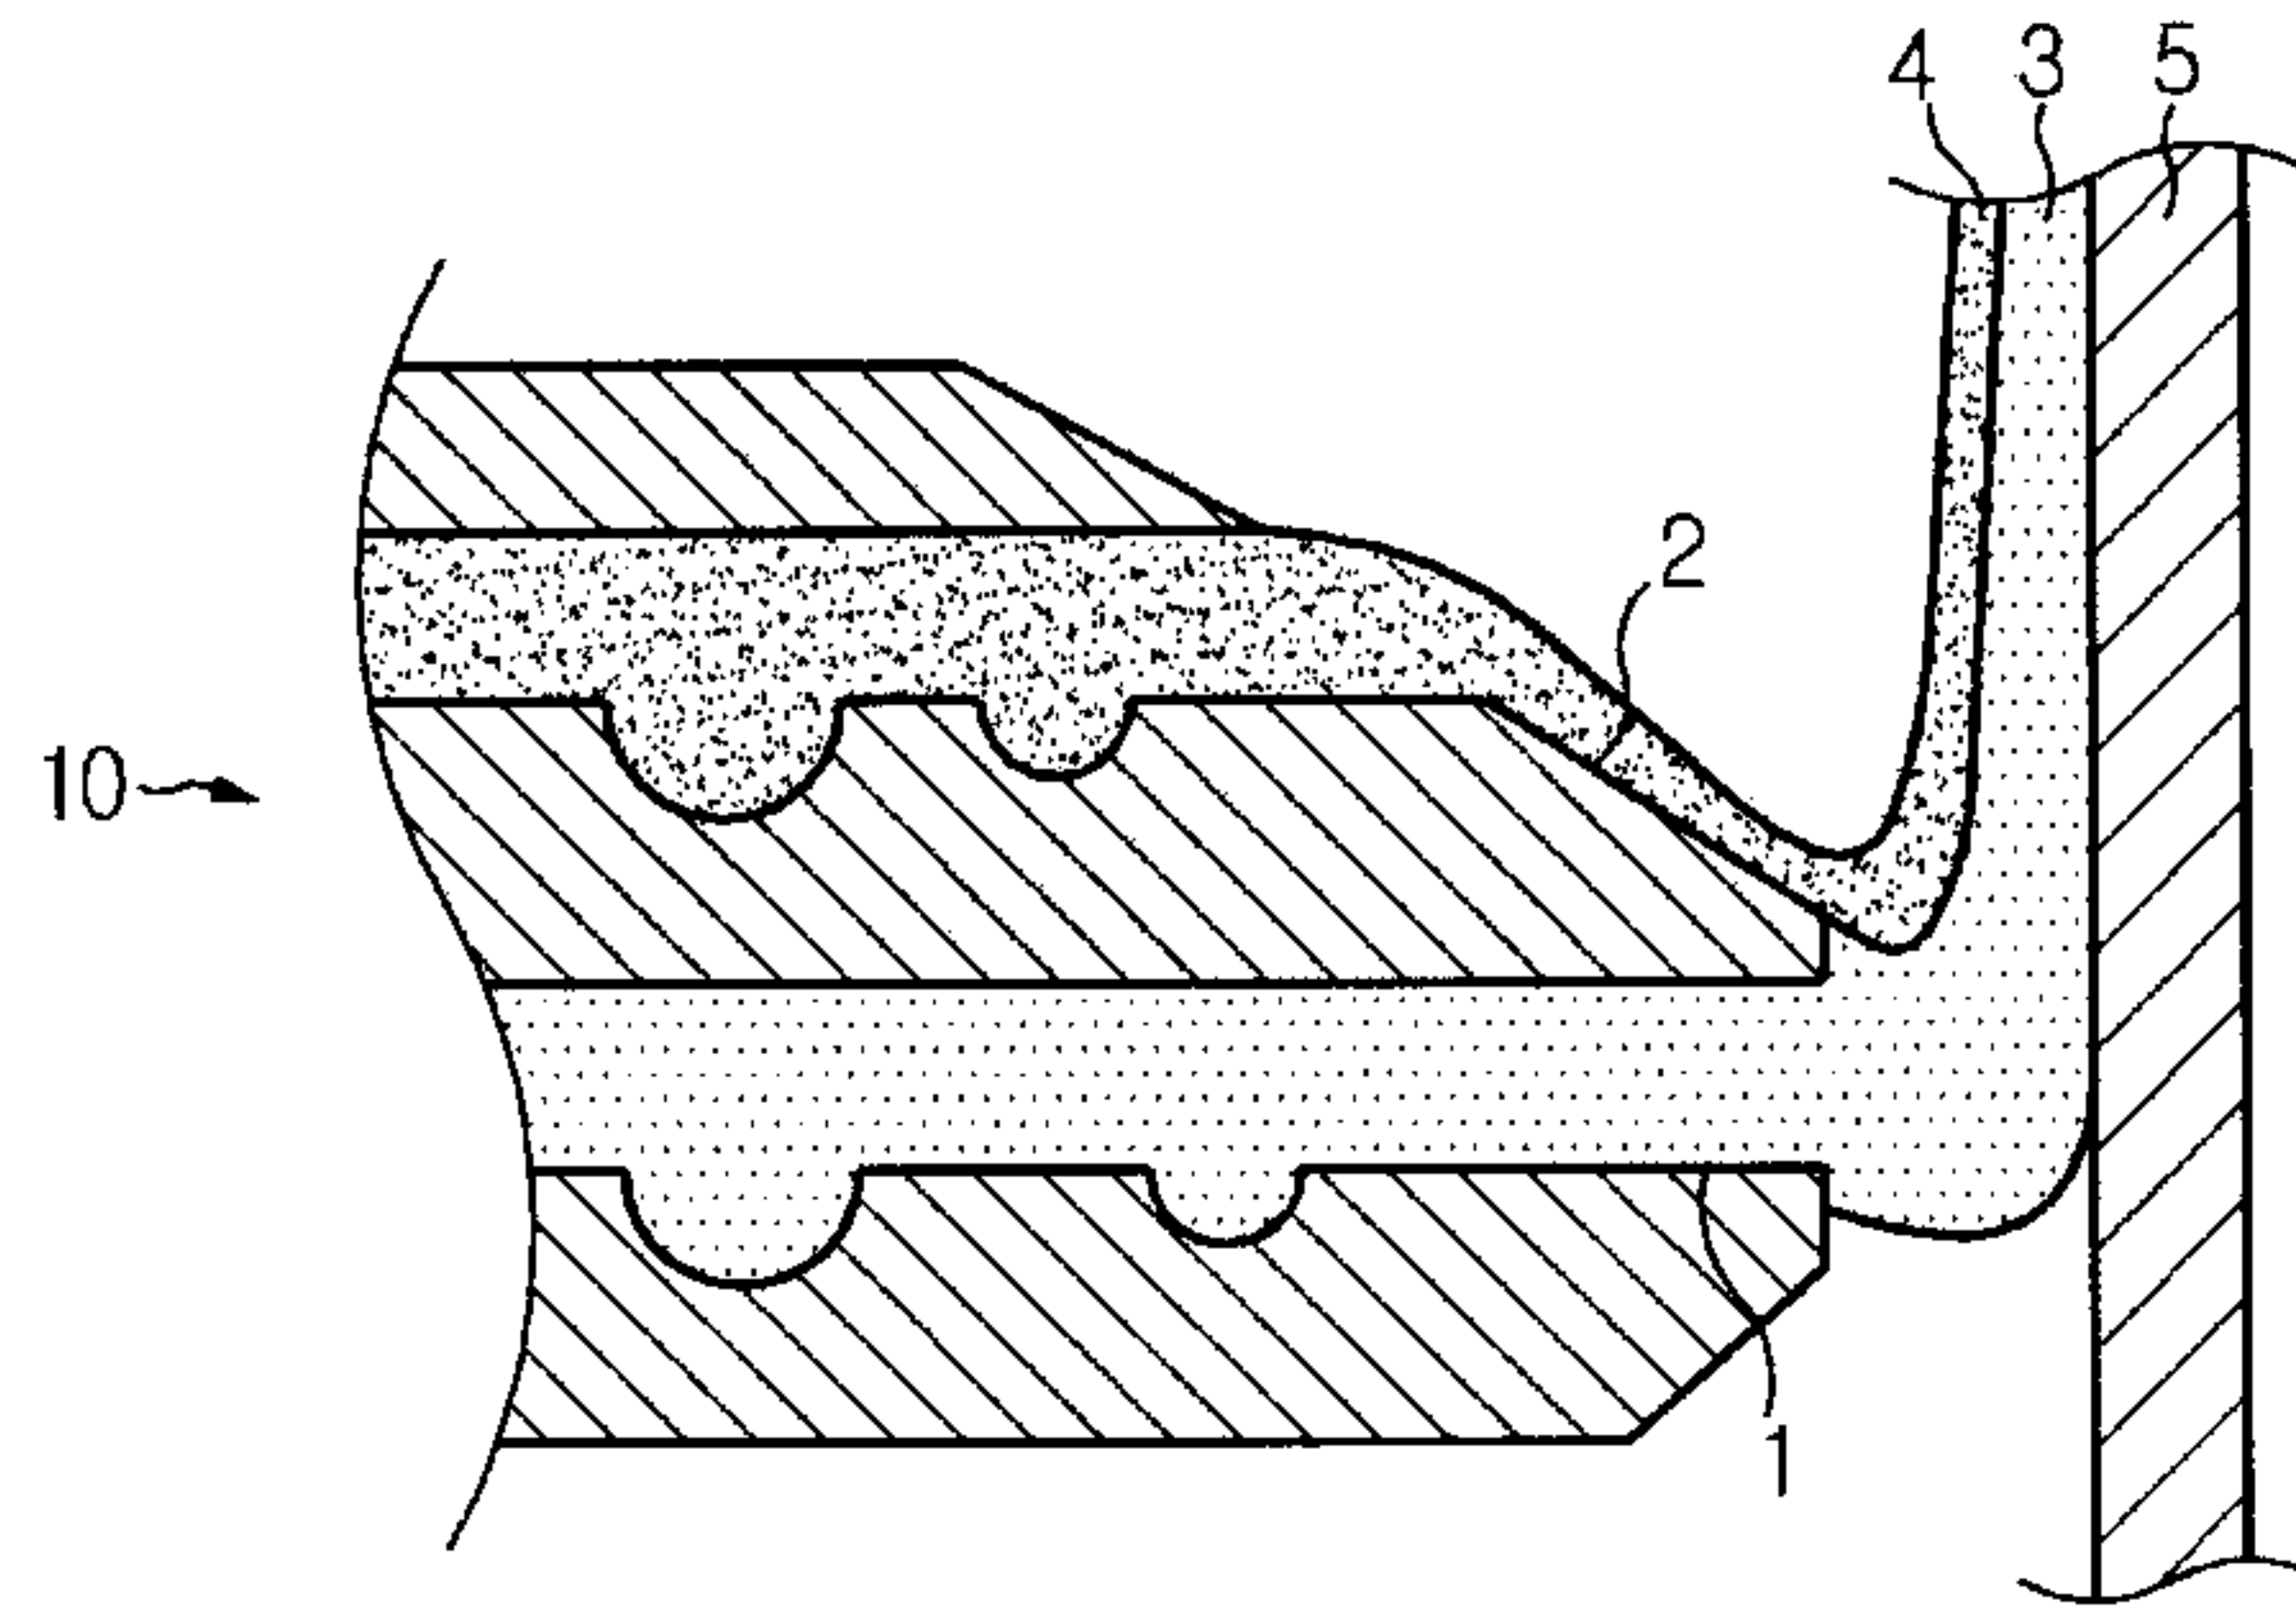


FIG. 2

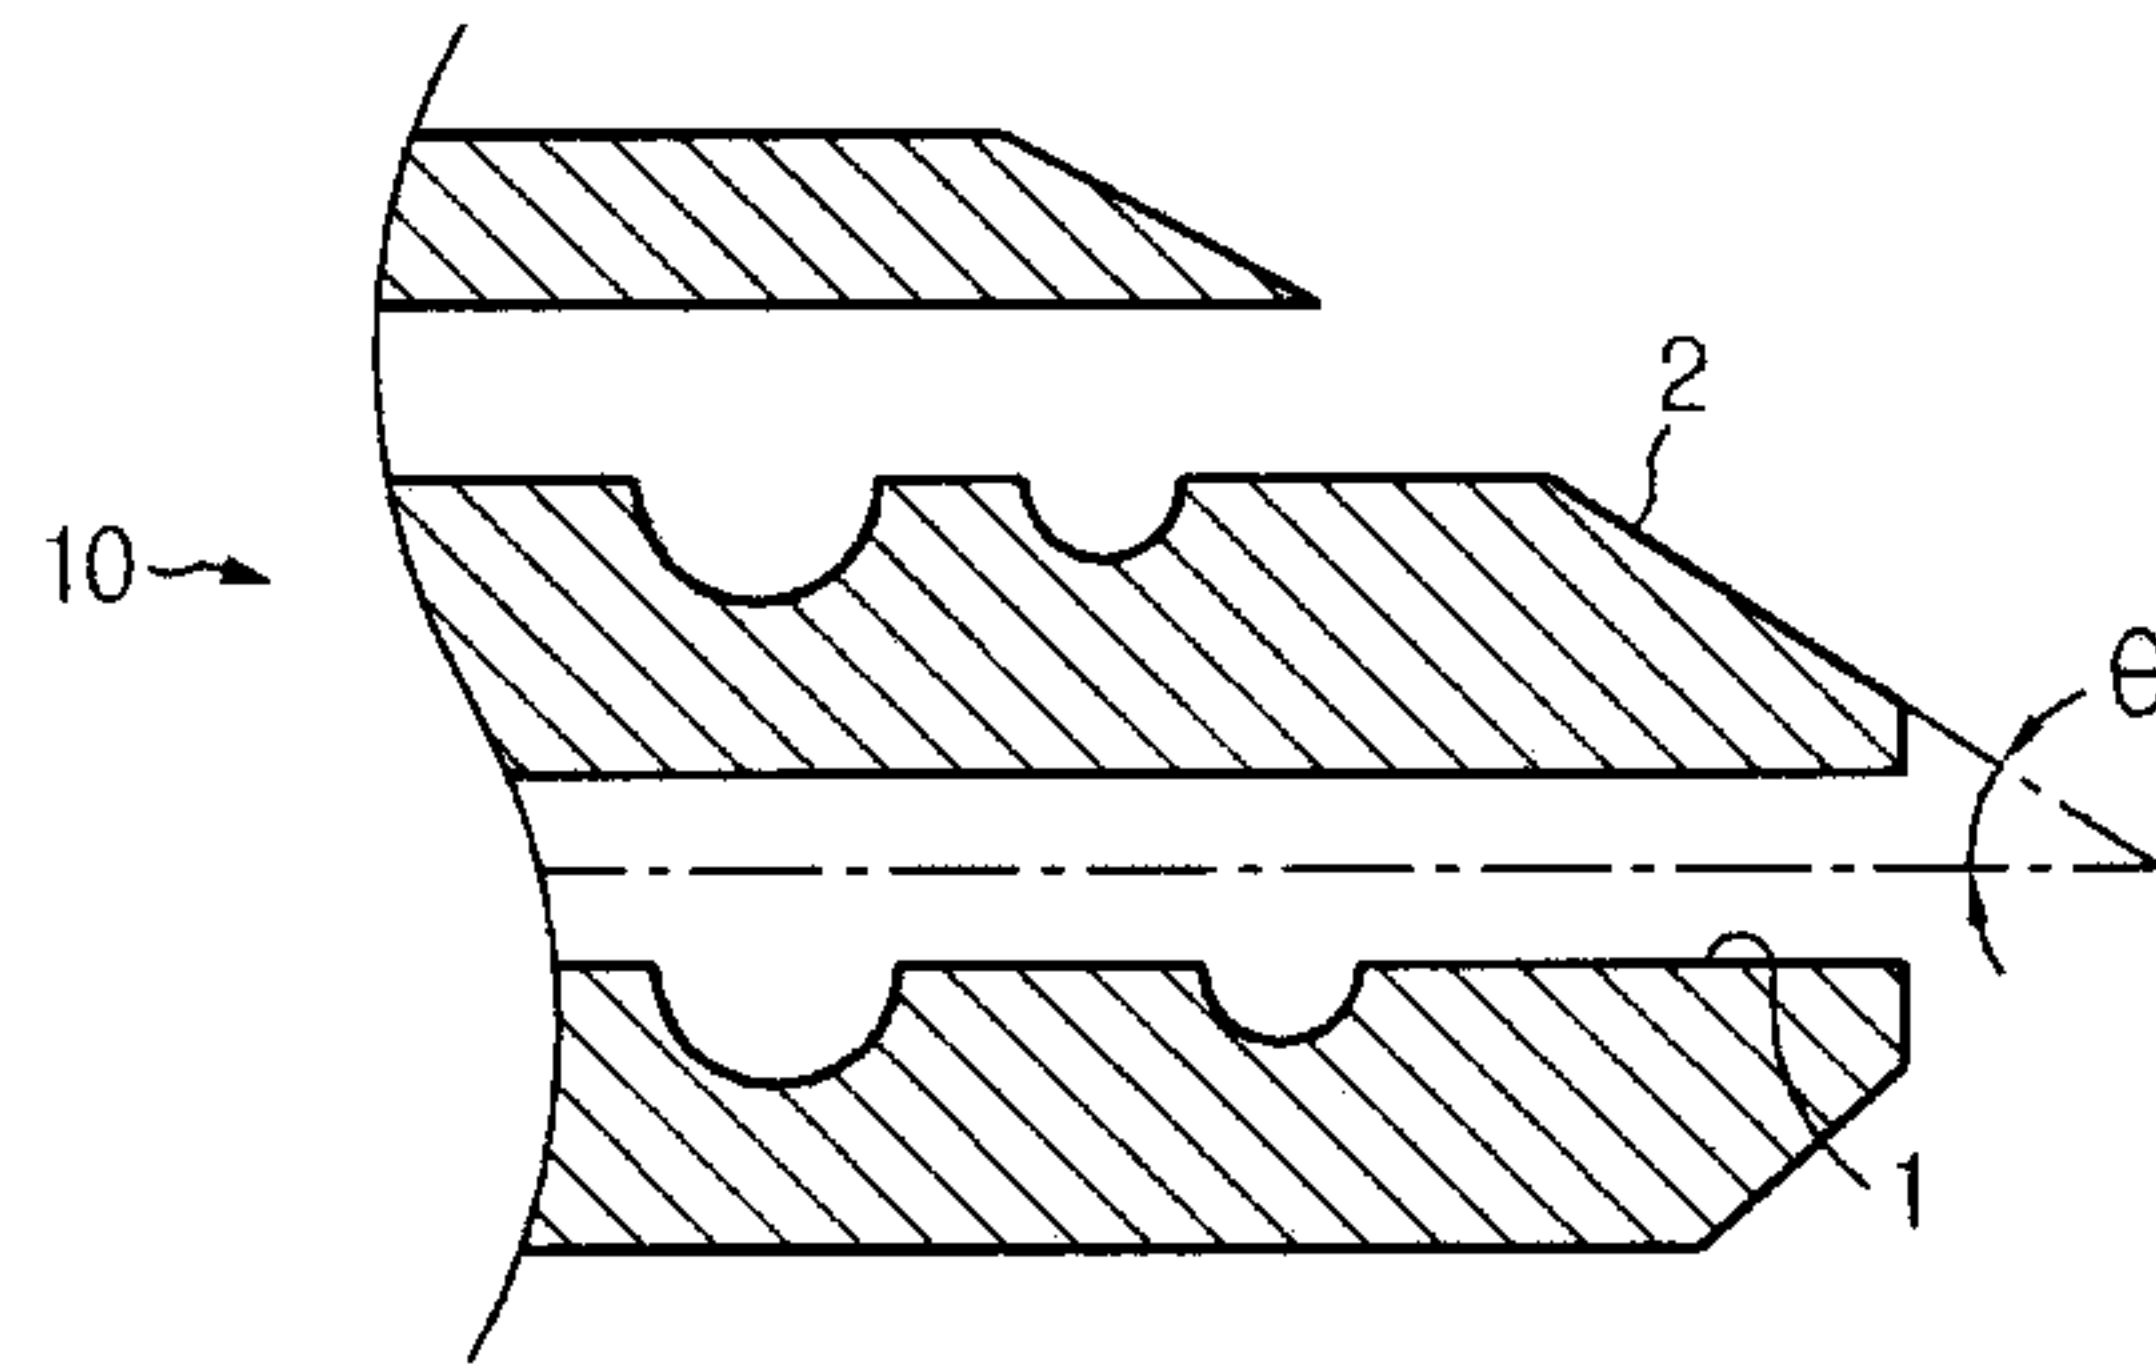

PCT/KR2013/003413
2013-04-22

FIG. 3


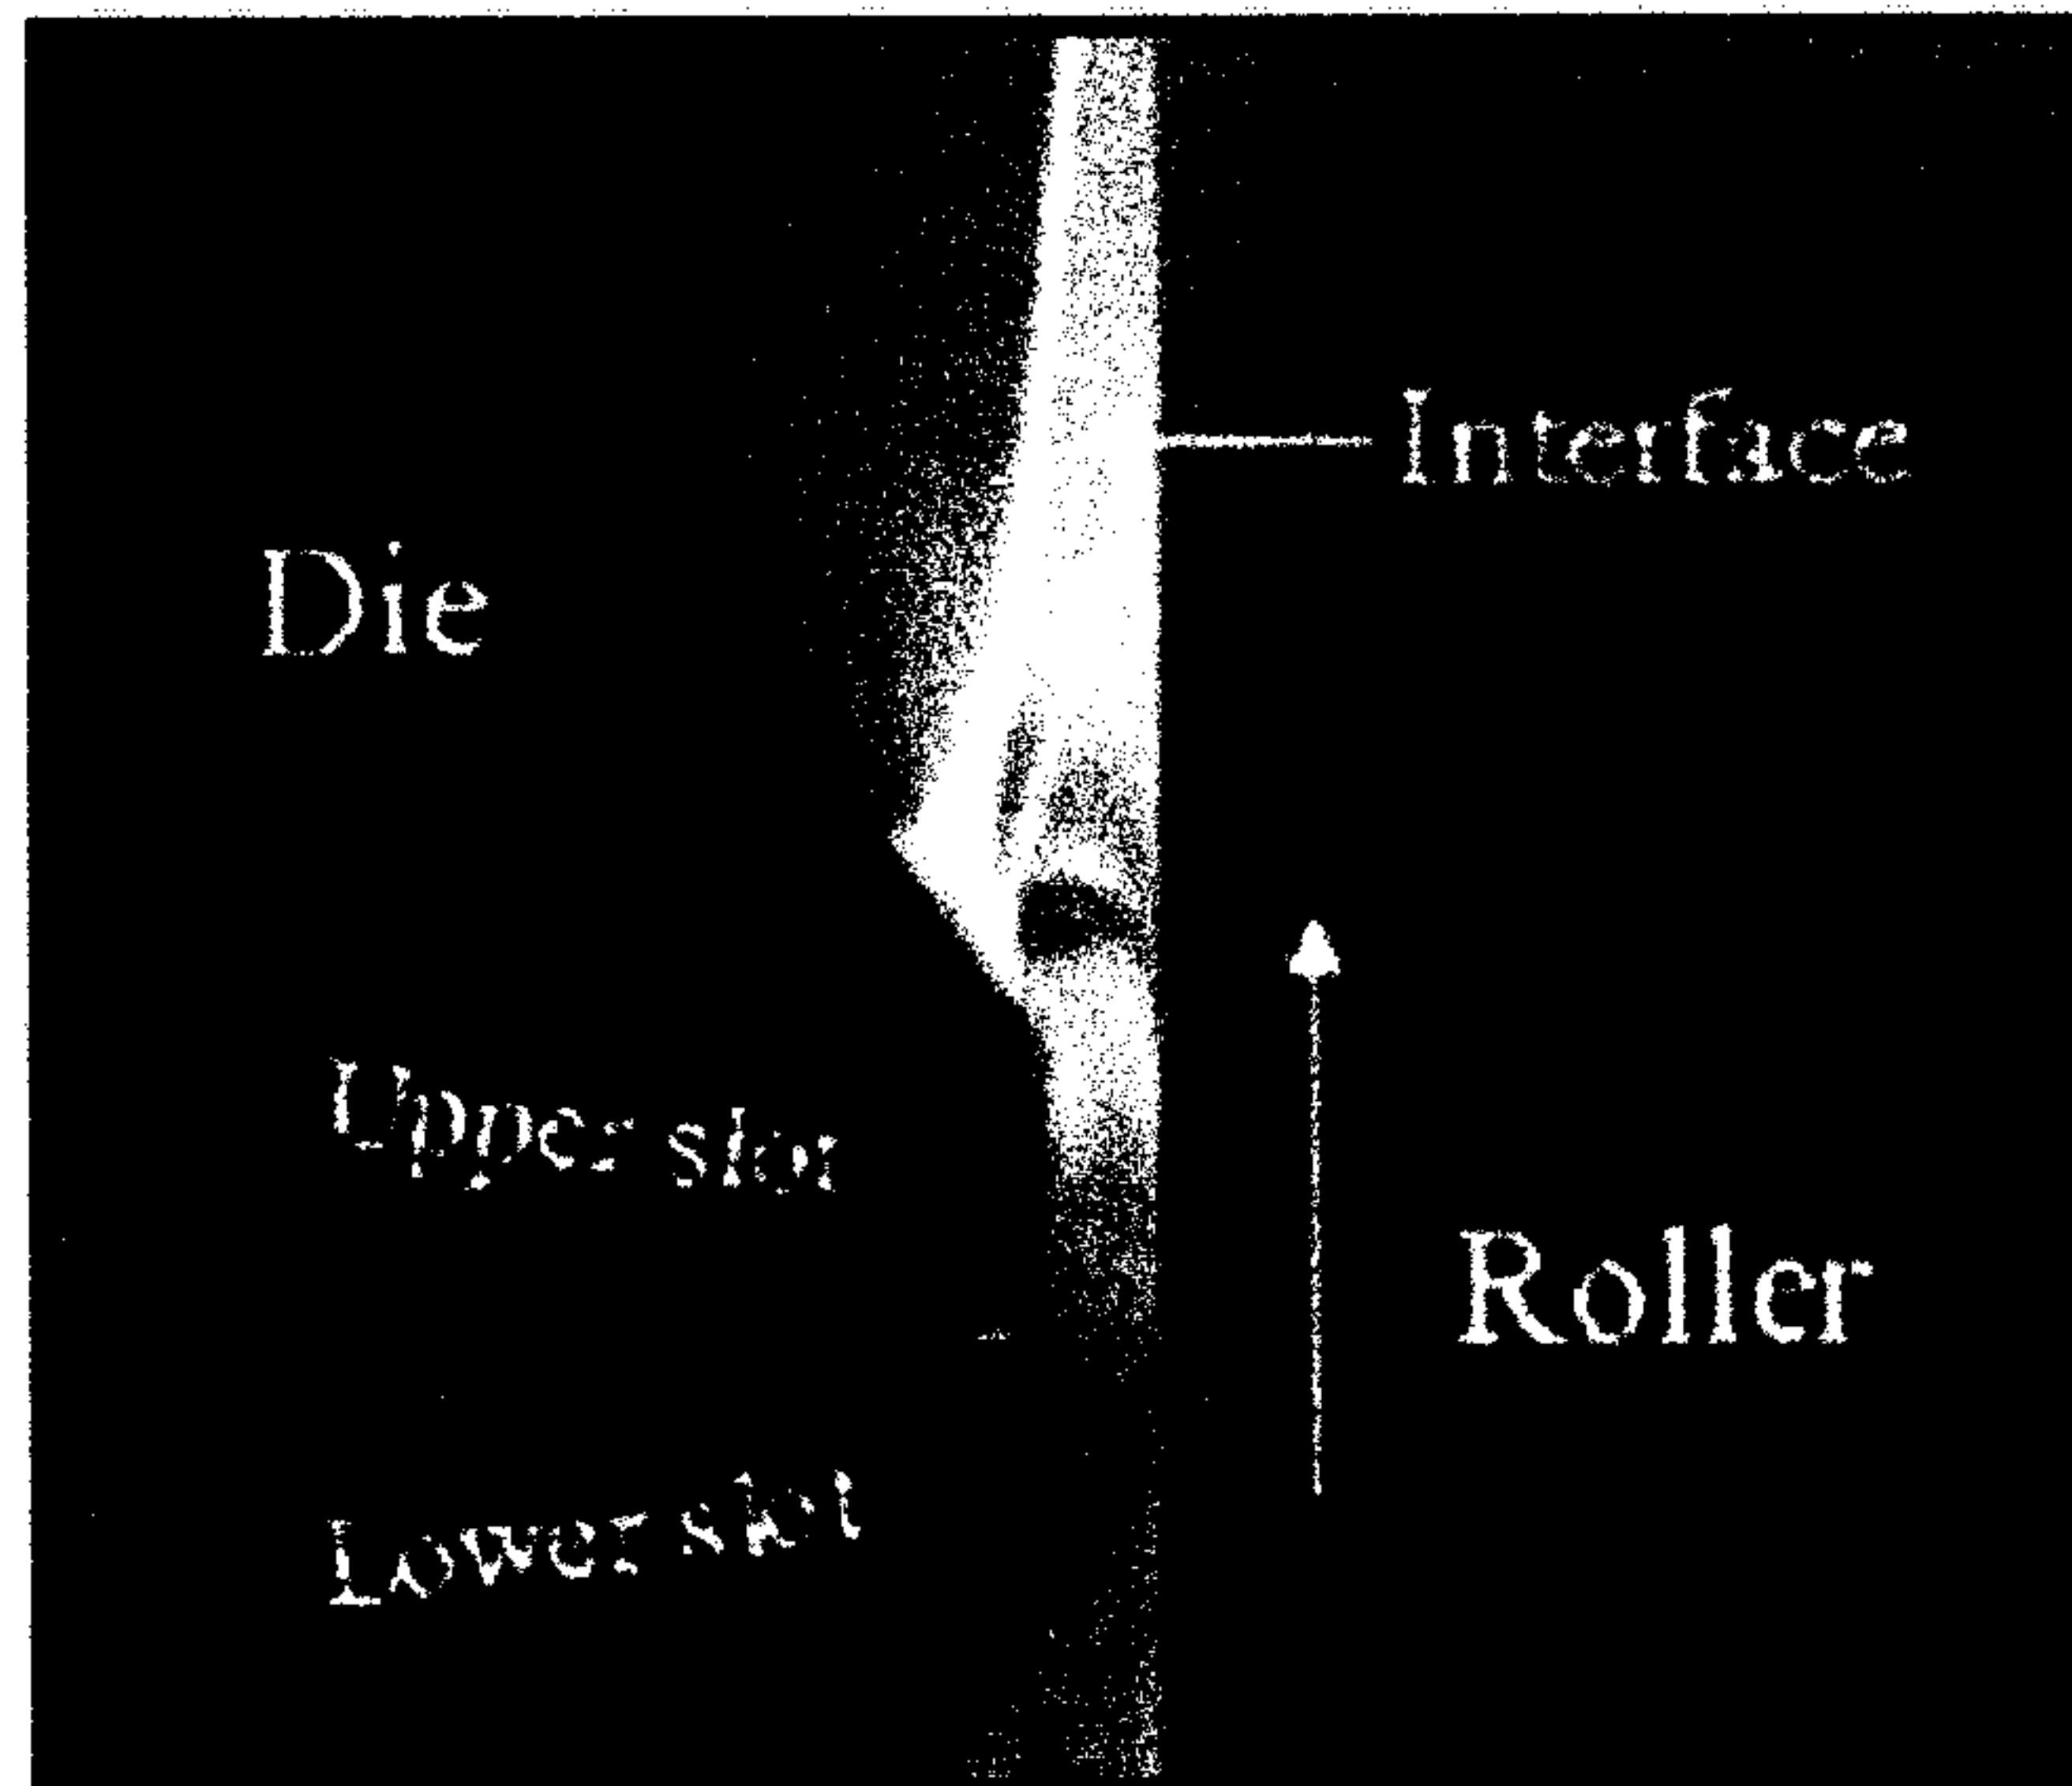


FIG. 4

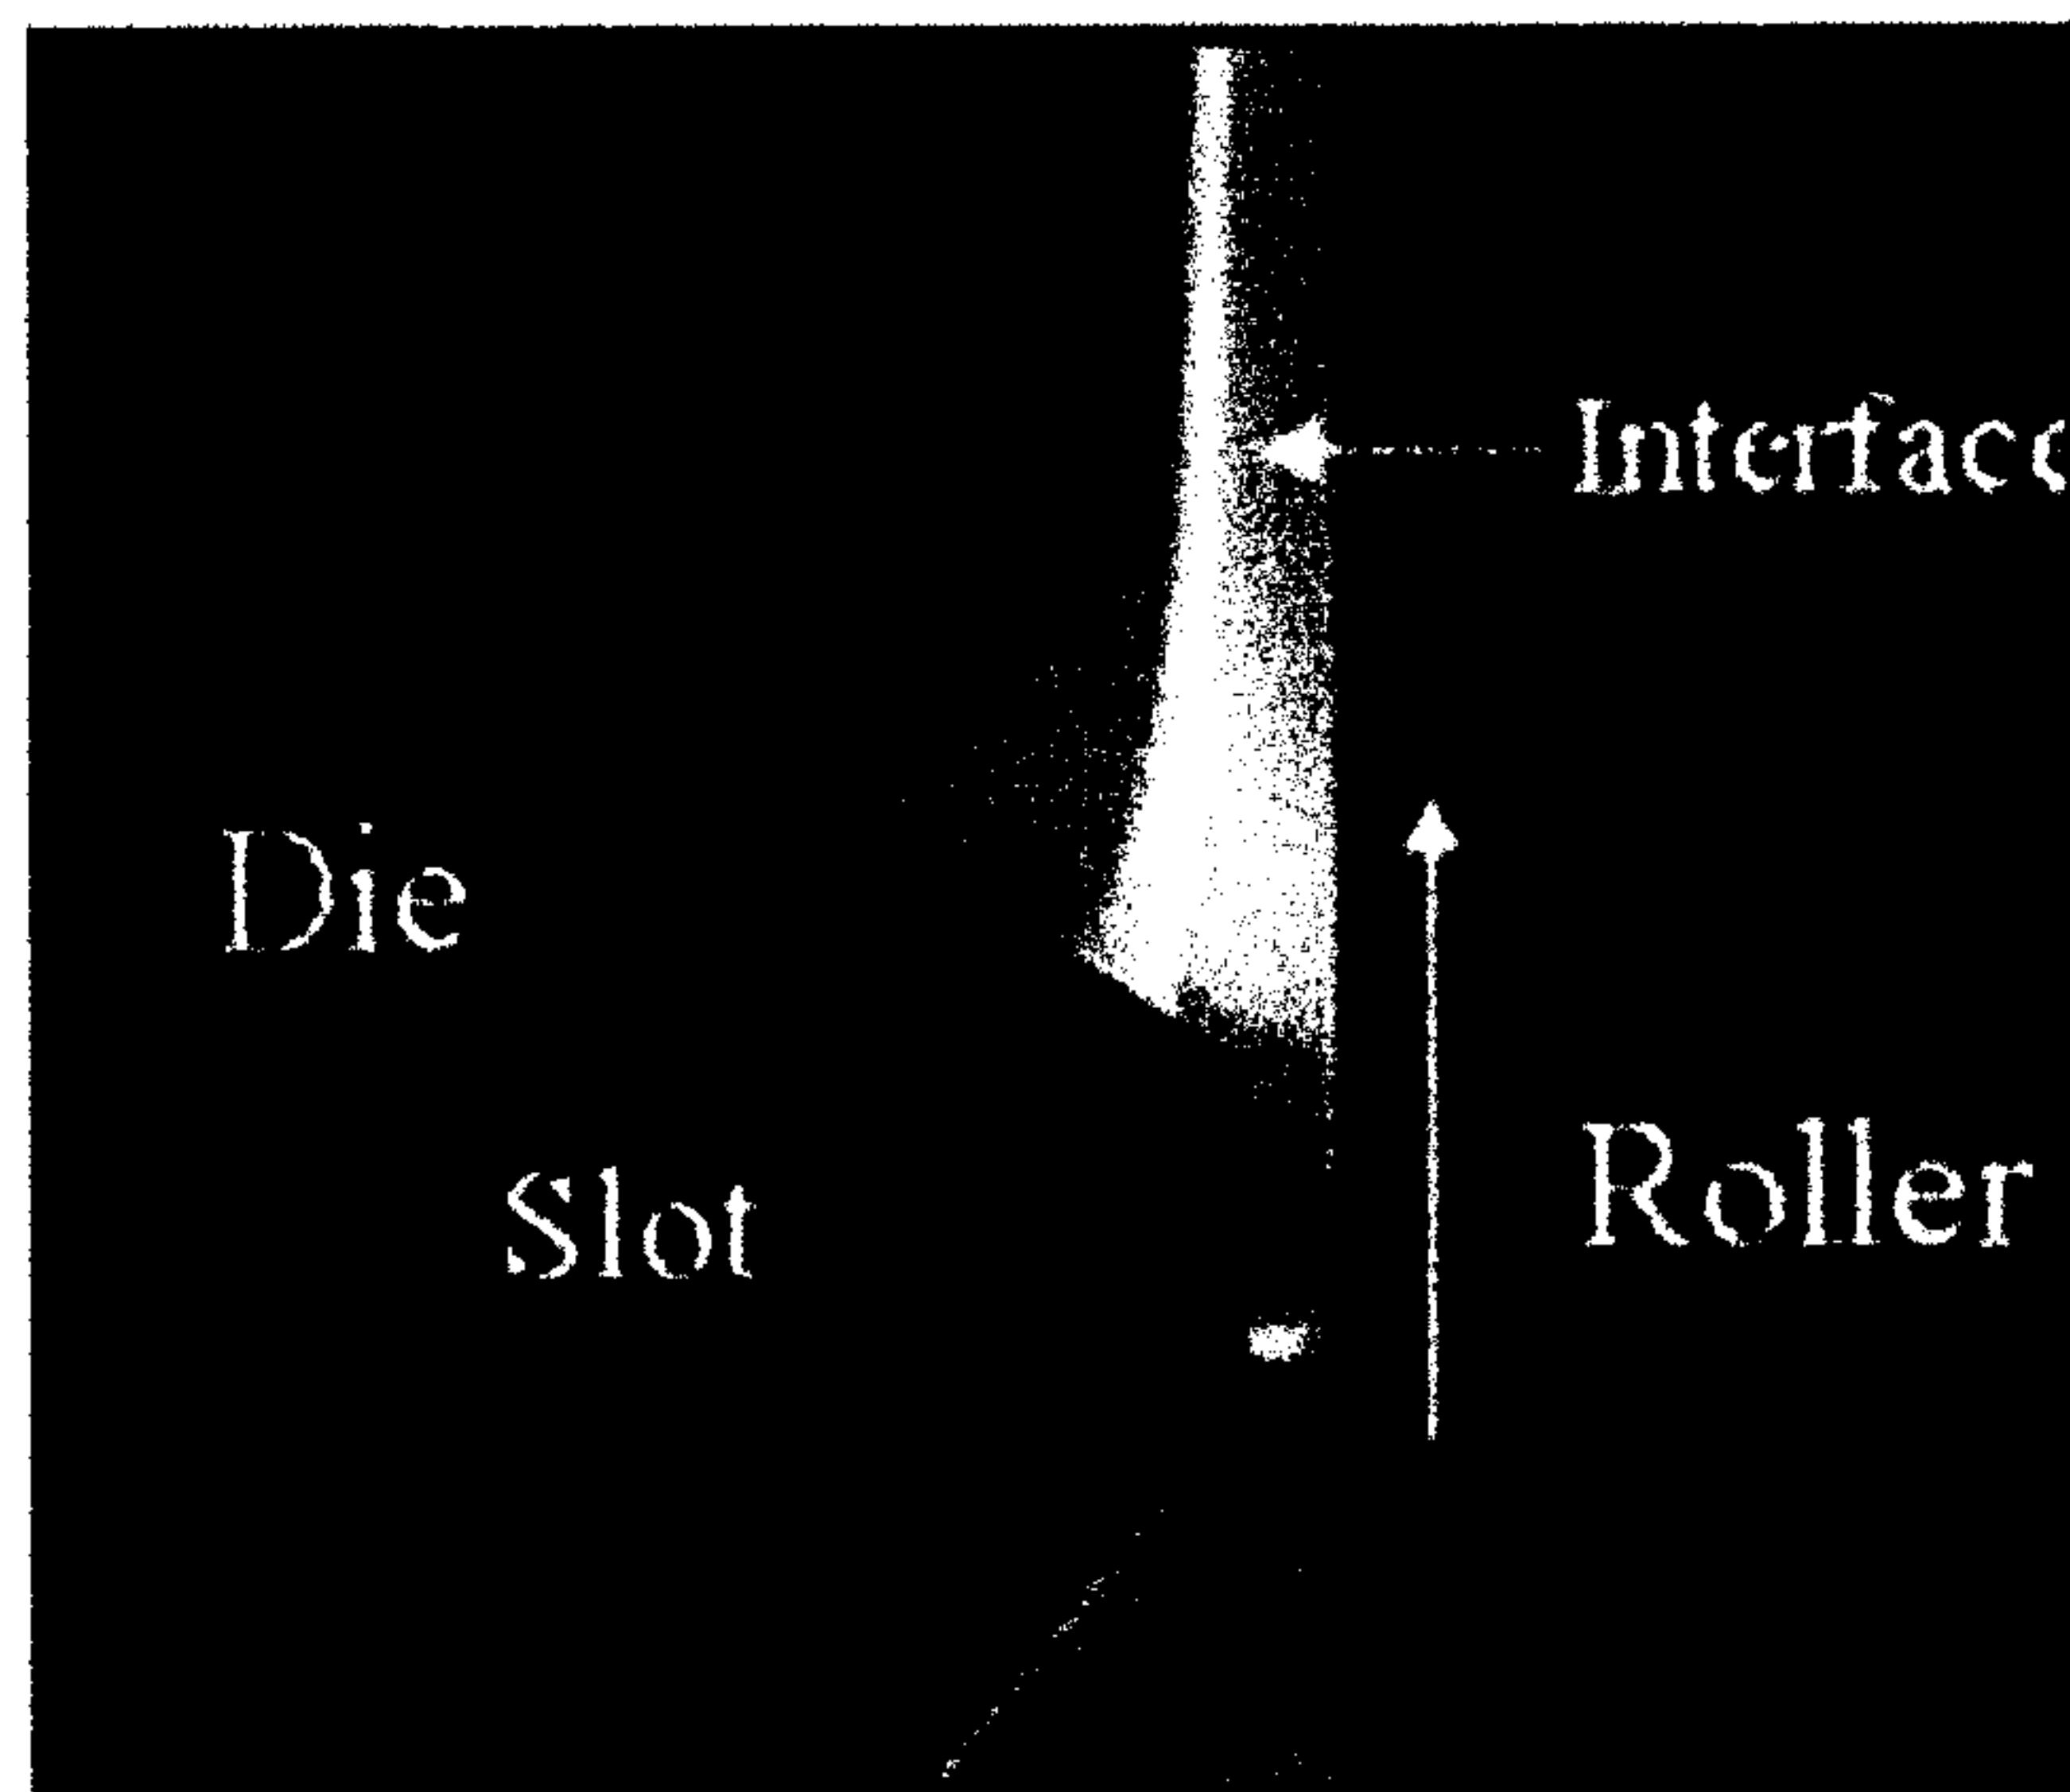

PCT/KR2013/003413
2013-04-22

FIG. 5



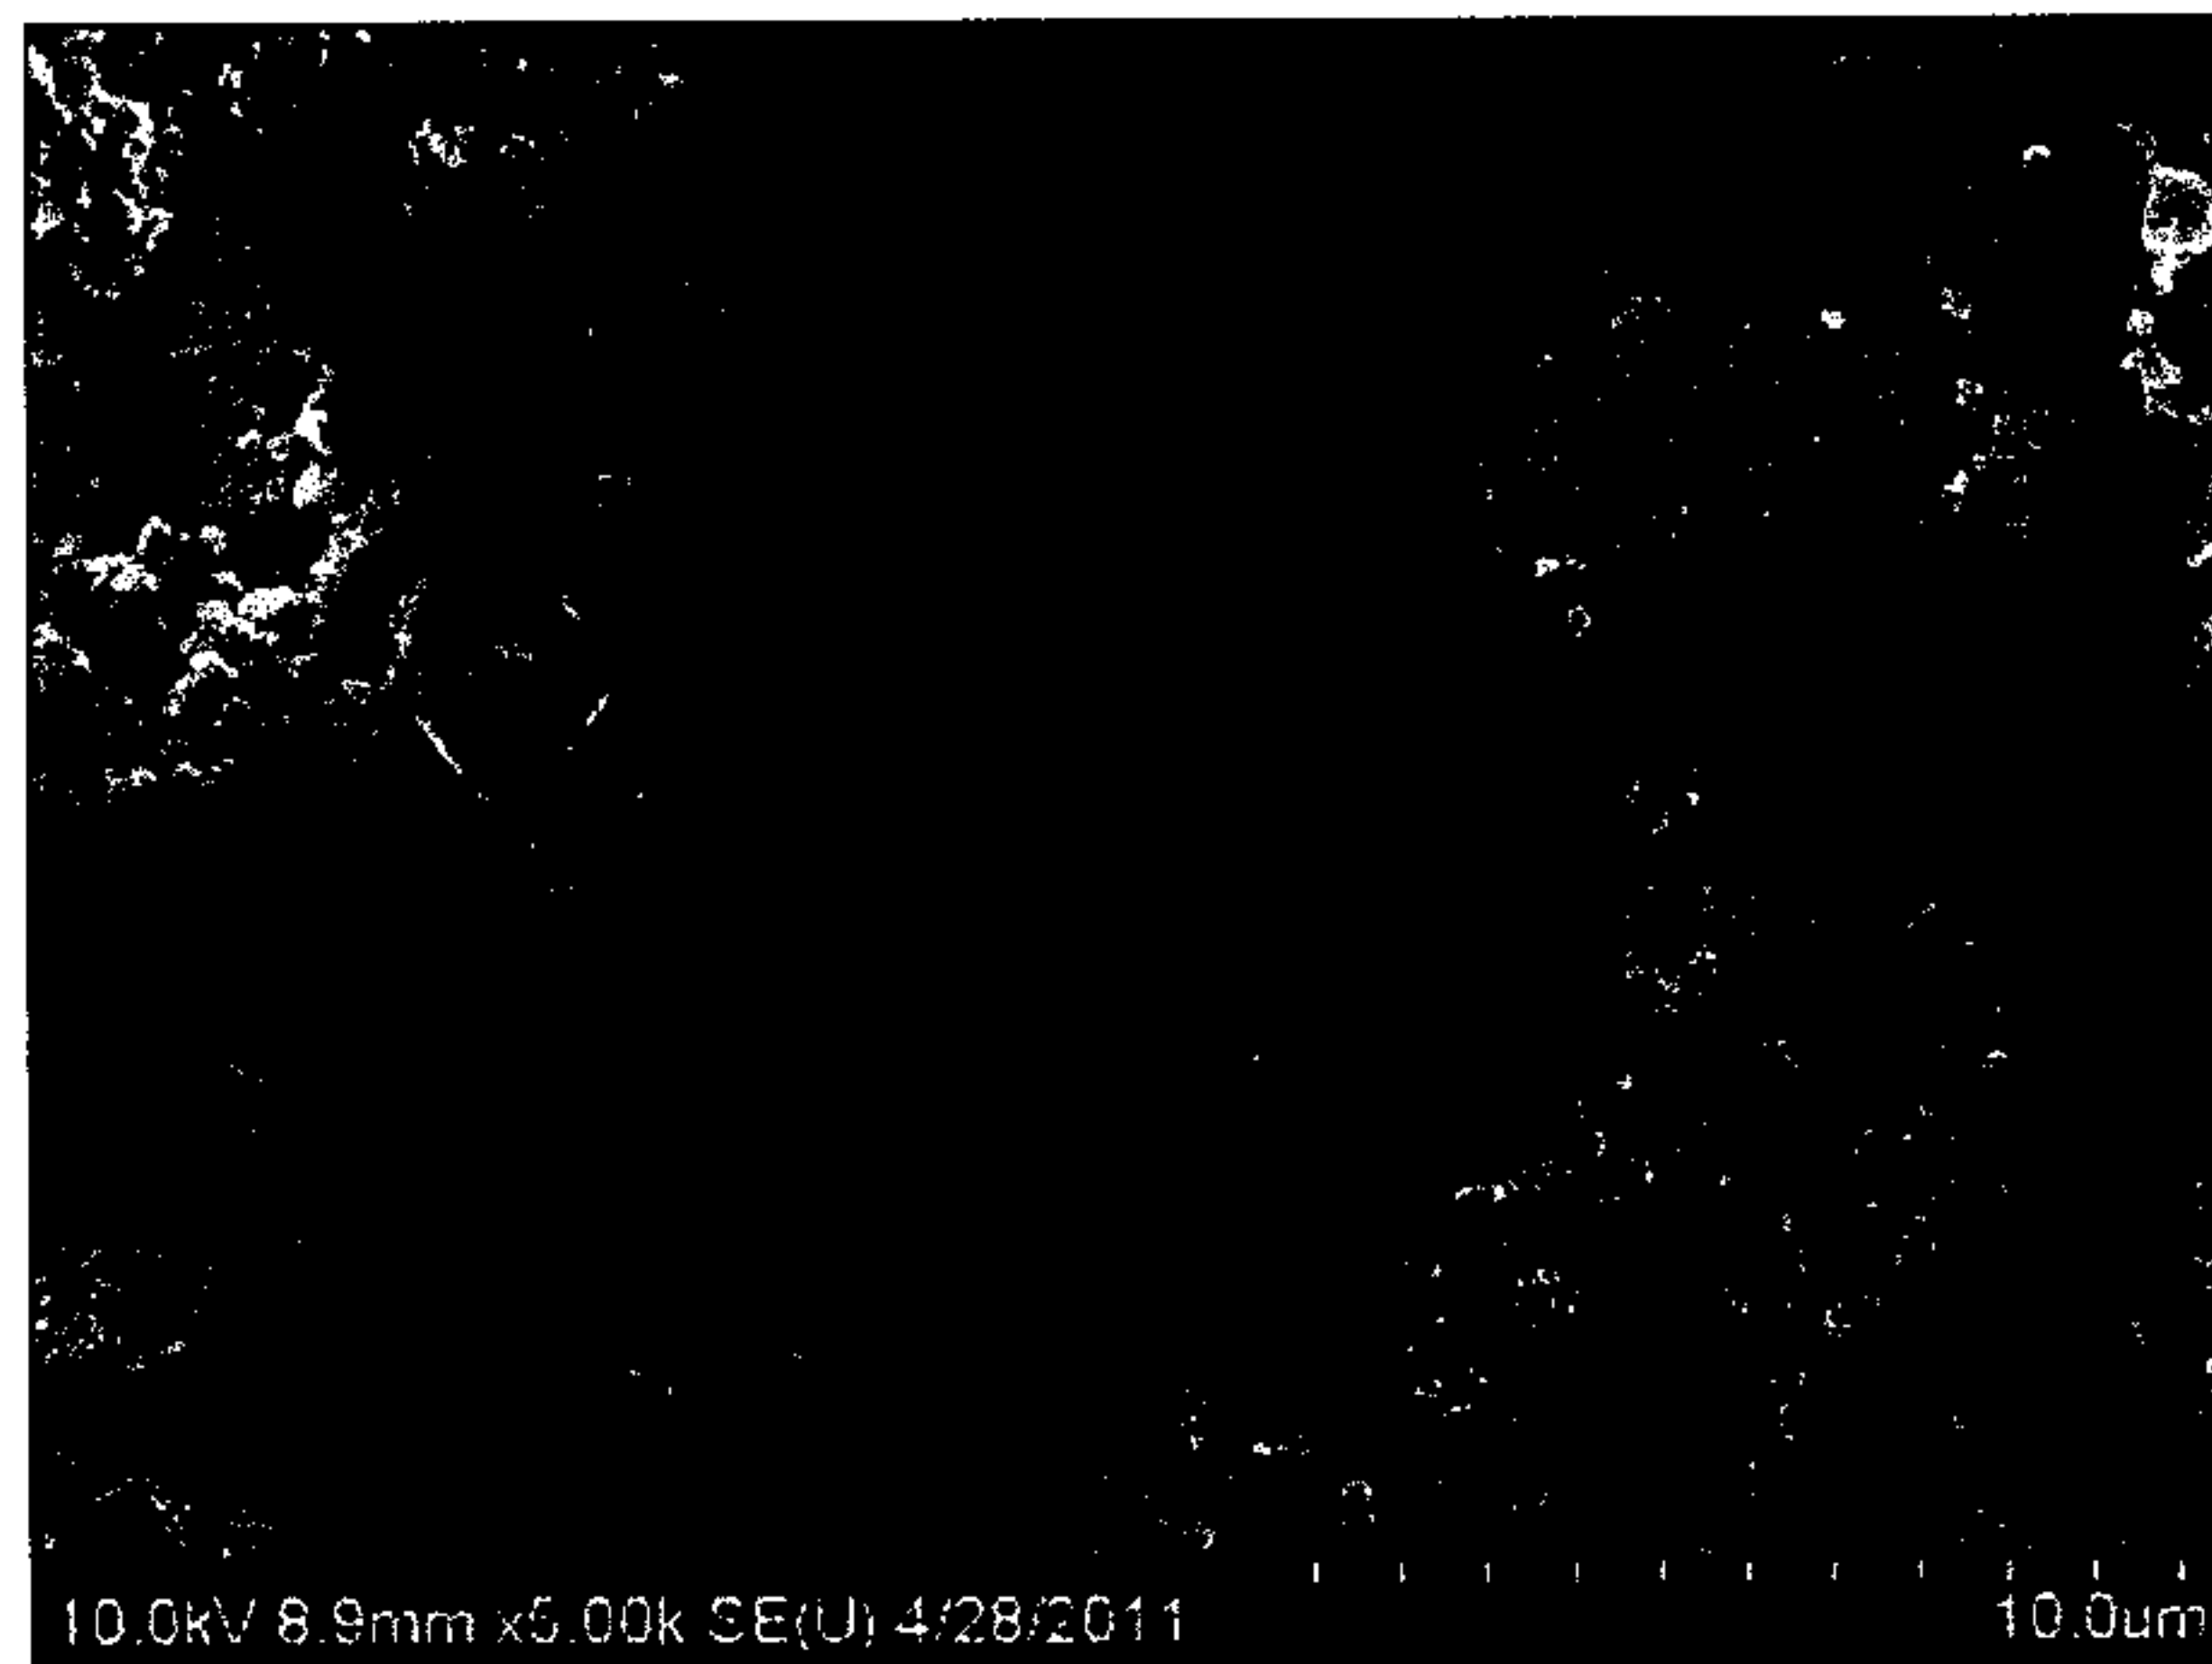


FIG. 6

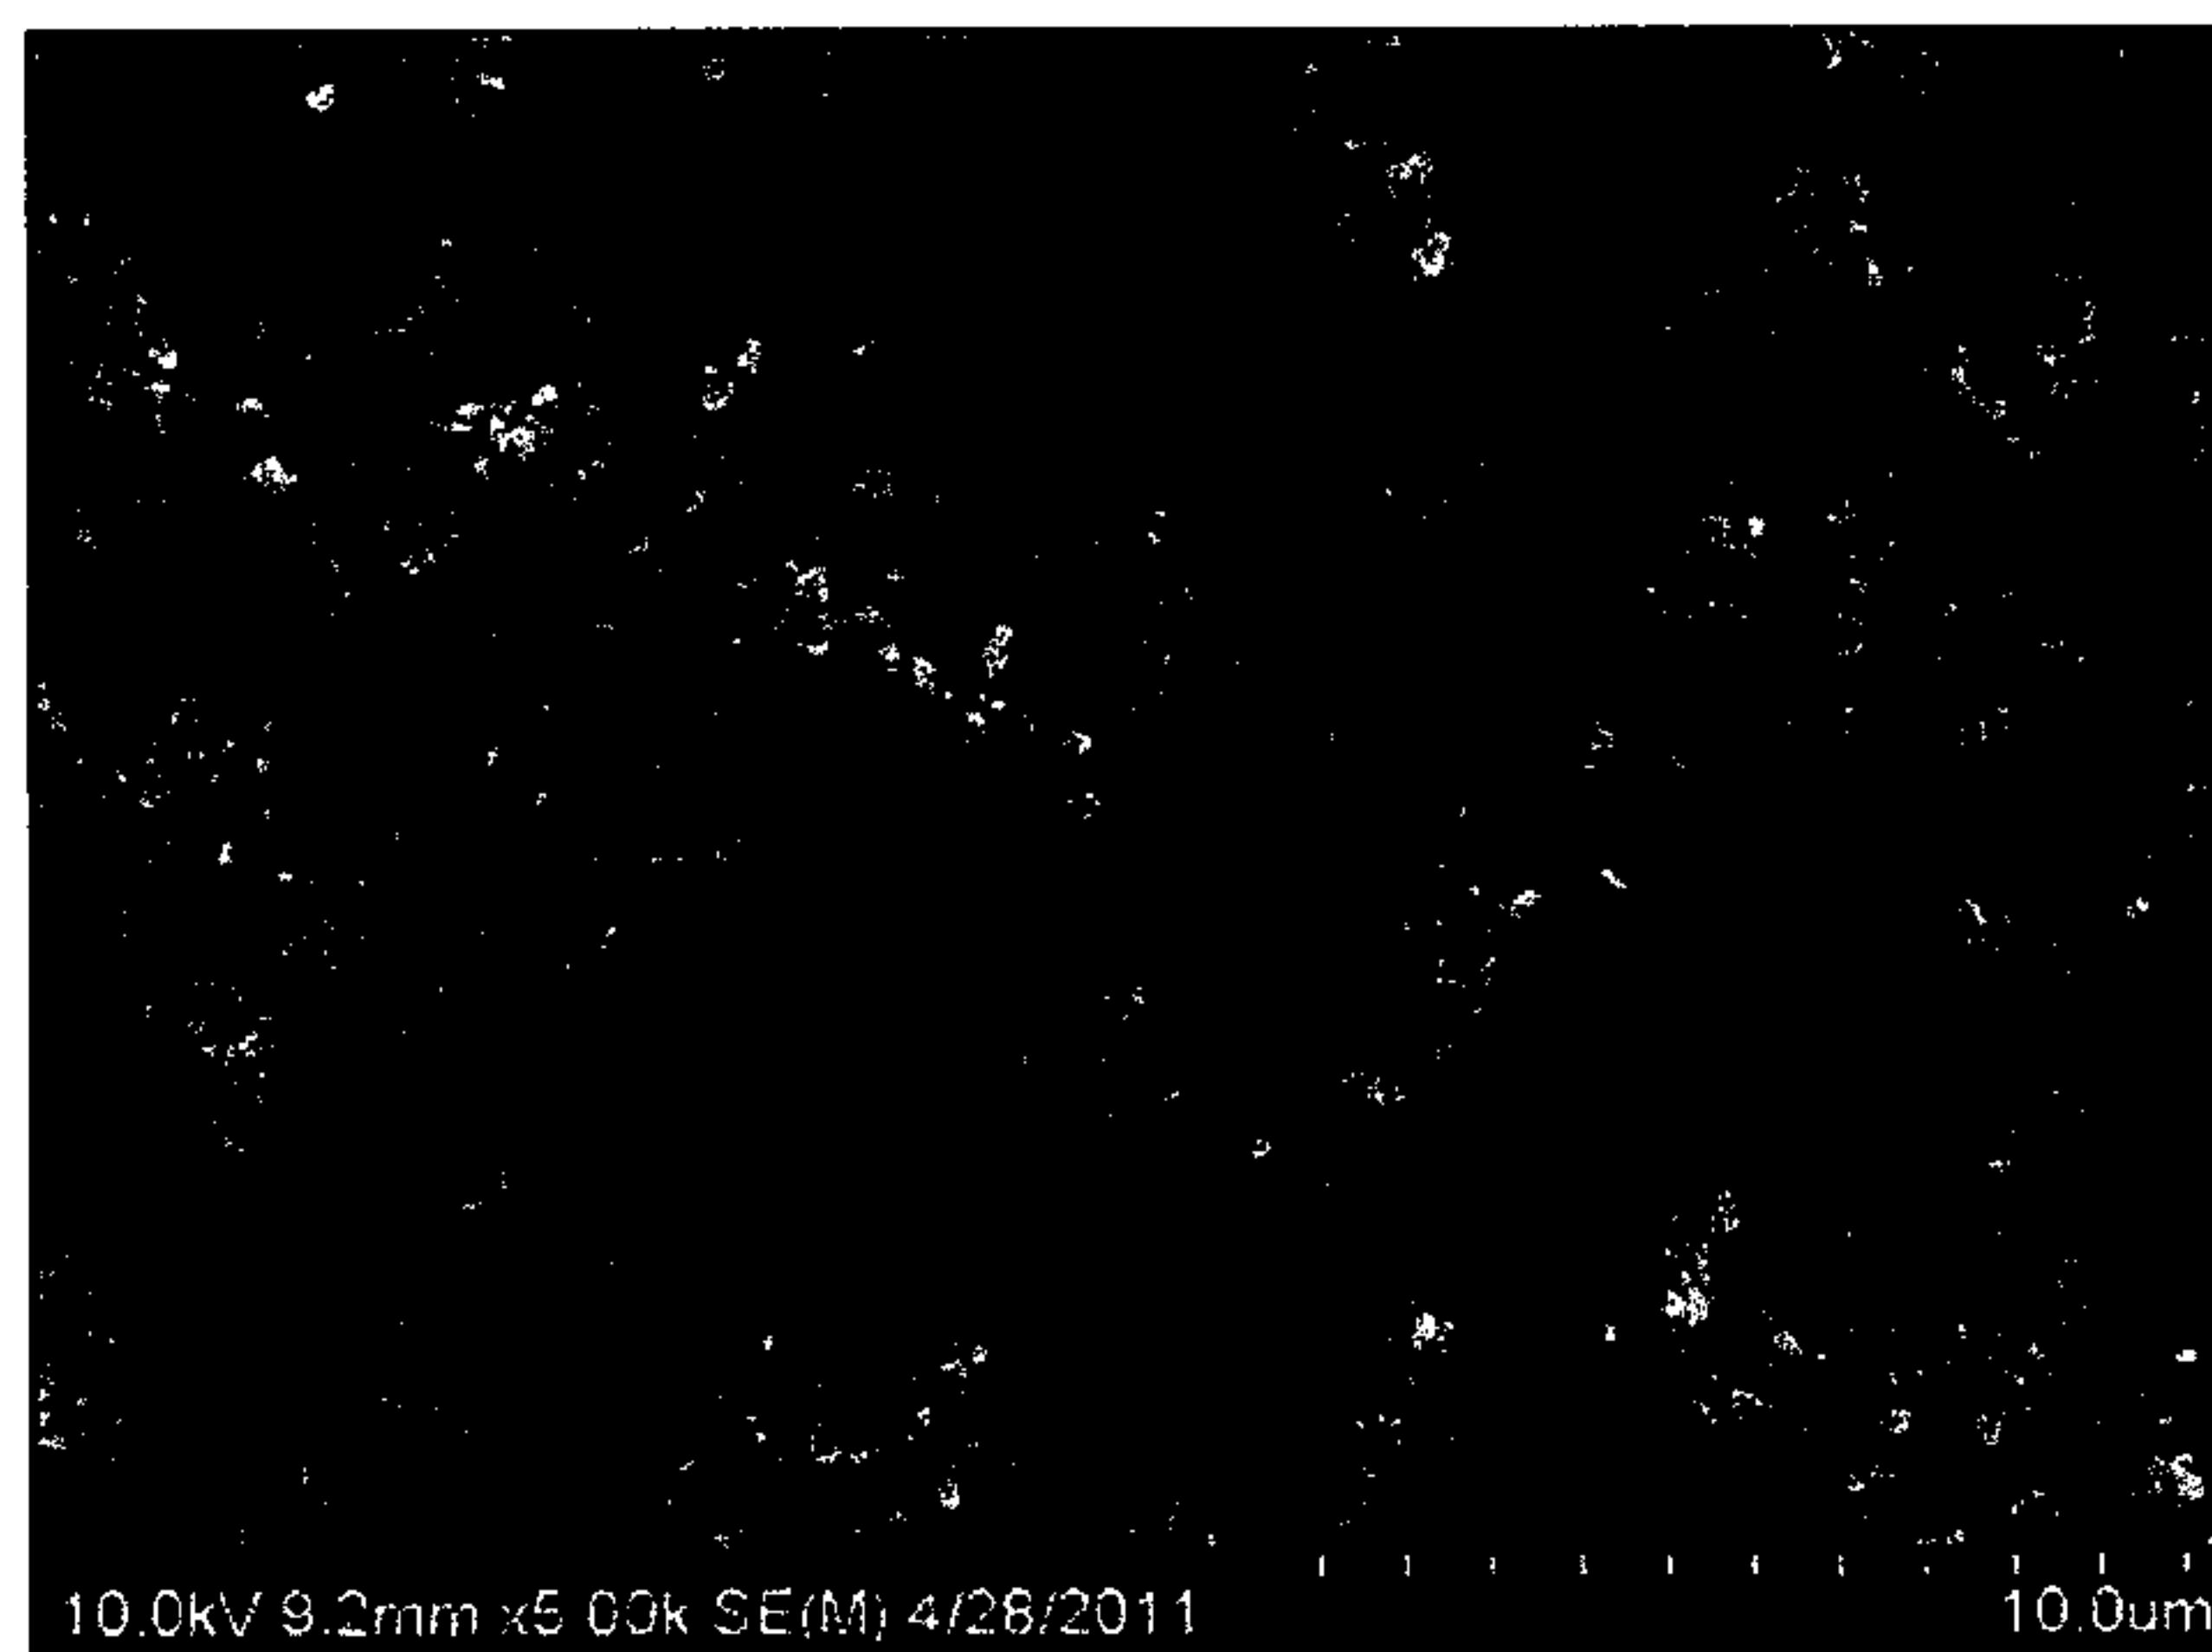

PCT/KR2013/003413
2013-04-22

FIG. 7

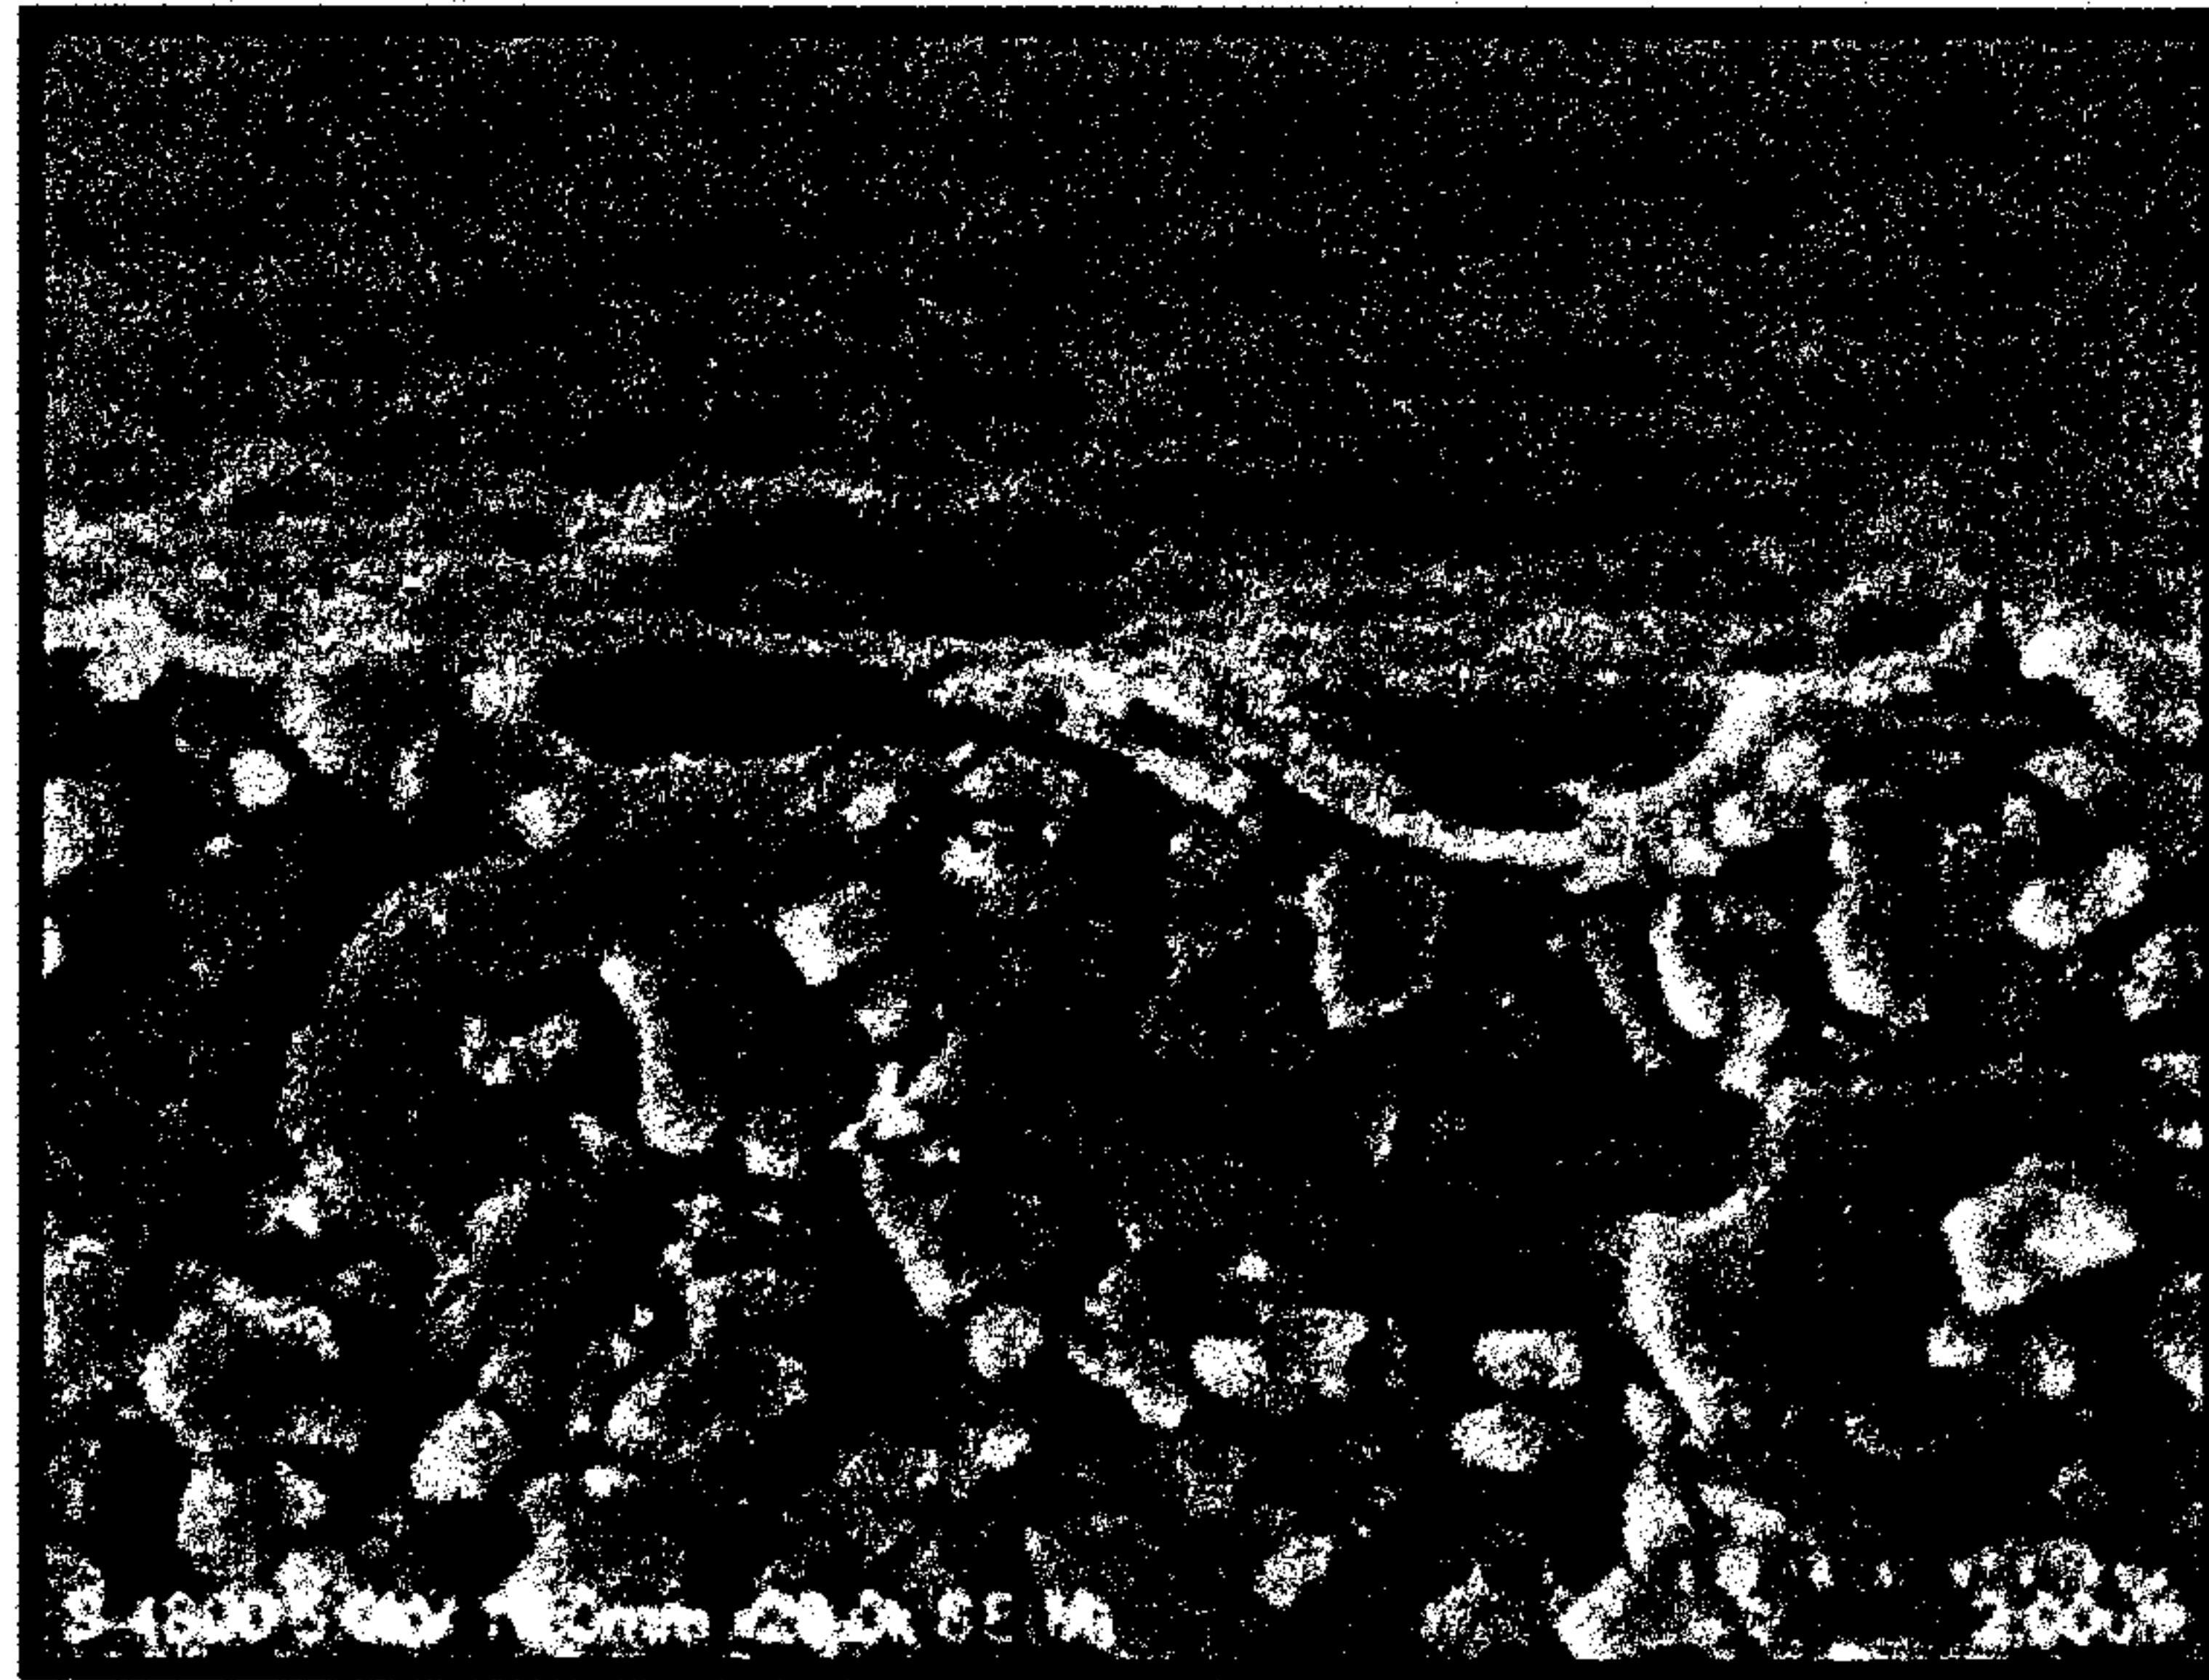

10

