



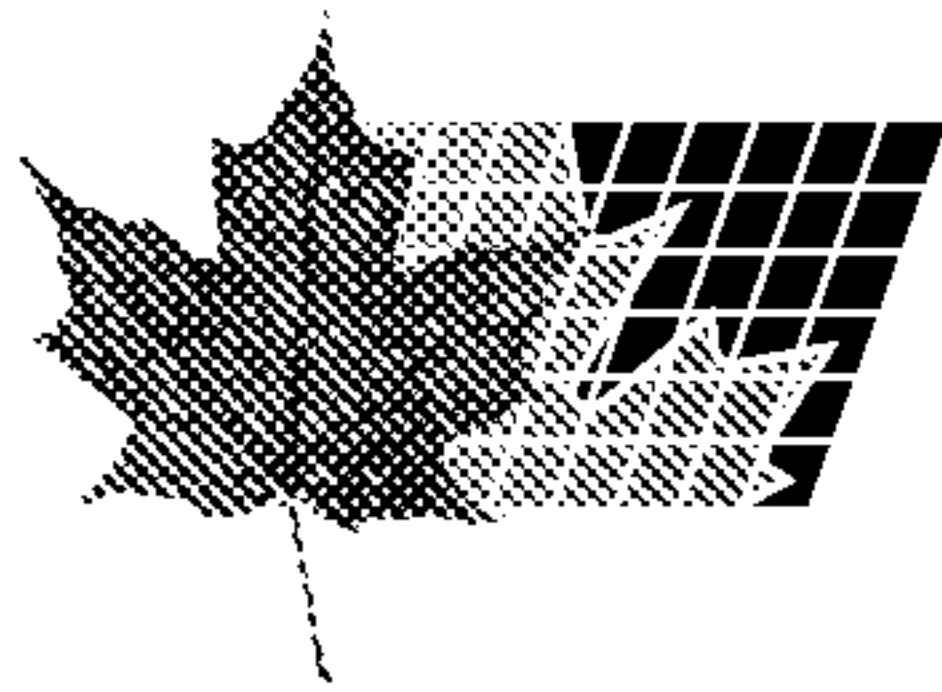

- (72) PFANNENMUELLER, THOMAS, DE
(72) LOECHLT, ERWIN, DE
(72) WINKLER, PETER-JUERGEN, DE
(72) MOZHAROVSKIJ, SERGEJ MIKHAILOVICH, RU
(72) GALKIN, DMITRIJ SERGEJEVICH, RU
(72) TOLCHENNIKOVA, ELENA GLEBOVNA, RU
(72) CHERTOVIKOV, VLADIMIR MIKHAILOVICH, RU
(72) DAVYDOV, VALENTIN GEORGIJEVICH, RU
(72) KABLOV, EVGENIJ NIKOLAJEVICH, RU
(72) KHOKHLATOVA, LARISA BAGRATOVNA, RU
(72) KOLOBNEV, NIKOLAY IVANOVICH, RU
(72) FRIDLYANDER, IOSIF NAUMOVICH, RU
(71) DAIMLERCHRYSLER AG, DE
(71) VIAM (ALL-RUSSIAN INSTITUTE OF AVIATION MATERIALS),
RU
(51) Int.Cl.⁷ C22C 21/06, C21D 1/00
(30) 1997/09/22 (97116302) RU
(30) 1998/03/05 (98104394) RU
(54) **ALLIAGE A BASE D'ALUMINIUM ET PROCEDE
PERMETTANT DE LE SOUMETTRE A UN TRAITEMENT
THERMIQUE**
(54) **ALUMINIUM BASED ALLOY AND METHOD FOR
SUBJECTING IT TO HEAT TREATMENT**

(57) L'invention concerne un alliage à base d'aluminium, notamment un alliage du système Al-Li-Mg dont la composition chimique exprimée en pourcentage en masse est la suivante: lithium, entre 1,5 et 1,9; magnésium, entre 4,1 et 6,0; zinc, entre 0,1 et 1,5; zirconium, entre 0,05 et 0,3, manganèse, entre 0,01 et 0,8; hydrogène, entre $0,9 \times 10^{-5}$ et $4,5 \times 10^{-5}$. Cet alliage contient au moins un élément sélectionné dans le groupe suivant: béryllium, entre 0,001 et 0,2; yttrium, entre 0,01 et 0,5; scandium, entre 0,01 et 0,3; aluminium constituant le reste. L'invention concerne en outre un procédé permettant de traiter cet alliage, qui comprend

(57) The invention concerns an aluminium based alloy, in particular an Al-Li-Mg system alloy whereof the chemical composition expressed in percentage by mass is as follows: lithium, between 1.5 and 1.9; magnesium, between 4.1 and 6.0; zinc, between 0.1 and 1.5; zirconium, between 0.05 and 0.3; manganese, between 0.01 and 0.8; hydrogen between 0.9×10^{-5} and 4.5×10^{-5} . Said alloy contains at least an element selected in the following group: beryllium, between 0.001 and 0.2; yttrium, between 0.01 and 0.5; scandium, between 0.01 and 0.3; the rest being constituted by aluminium. The invention further concerns a method for

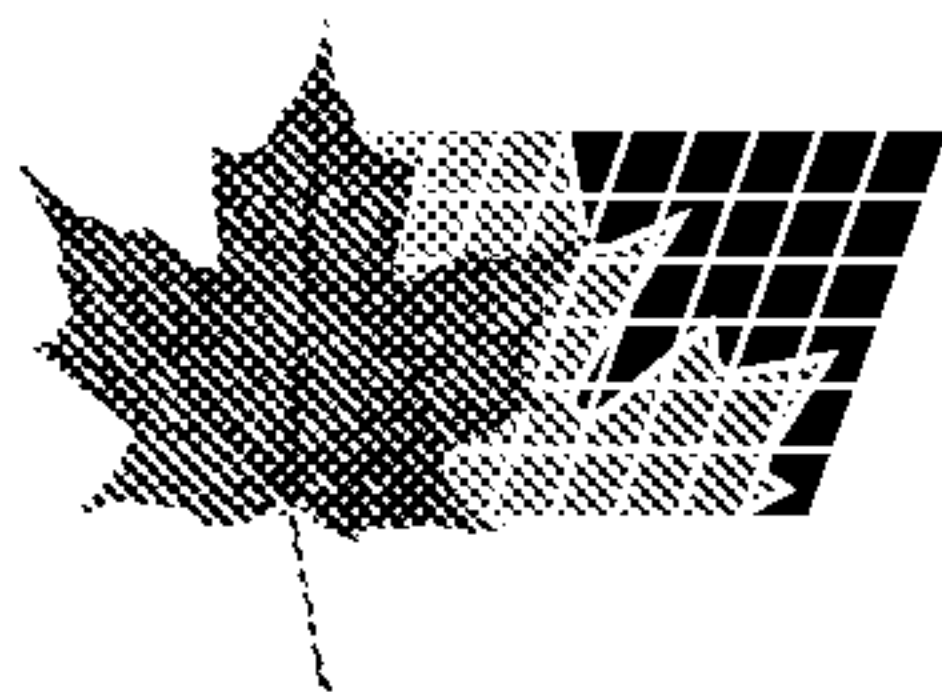

(21) (A1) **2,303,595**
(86) 1998/09/21
(87) 1999/04/01

les étapes suivantes: trempe à une température de 400 à 500 °C dans de l'eau froide ou à l'air; dressage avec un degré de déformation constant de 0 à 2 %; traitement thermique progressif, la première étape intervenant à une température comprise entre 80 et 90 °C, sur une durée de 3 à 12 heures, la deuxième étape intervenant à une température comprise entre 110 et 185 °C, sur une durée de 10 à 48 heures. Une fois terminé le temps de séjour de la deuxième étape, la troisième étape, dite de maturation, intervient. Elle comprend un chauffage à une température comprise entre 90 et 110 °C sur 14 heures ou un refroidissement lent avec une vitesse de refroidissement de l'ordre de 2 à 8 °C/h.

treating said alloy, comprising the following steps: hardening at a temperature from 400 to 500 °C in cold water or in open air; straightening with a constant degree of deformation of 0 to 2 %; gradual heat treatment, the first step being carried out at a temperature ranging between 80 and 90 °C, for 3 to 12 hours, the second step being carried out at a temperature ranging between 110 and 185 °C, for 10 to 48 hours. Once the second step retention time is completed, the third step, called age-hardening, is carried out. It consists in heating at a temperature ranging between 90 and 110 °C for 14 hours or slow cooling with a cooling speed of the order of 2 to 8 °C/h.



ABSTRACT

The invention relates to an aluminum-based alloy, in particular an alloy from the Al-Li-Mg system, with the following chemical composition, %w/w:

Lithium	1.5 - 1.9
Magnesium	4.1 - 6.0
Zinc	0.1 - 1.5
Zirconium	0.05 - 0.3
Manganese	0.01 - 0.8
Hydrogen	0.9×10^{-5} - 4.5×10^{-5}

and at least one element selected from the following group:

Beryllium	0.001 - 0.2
Yttrium	0.01 - 0.5
Scandium	0.01 - 0.3
Aluminum	Remainder

In addition the invention relates to a procedure for treating the alloy, with the following steps:

- Quenching from a temperature of 400 - 500 °C in cold water or air,
- Adjusting with a remaining ductility of 0 - 2 %,
- Stage-by-stage heat treatment,
- Stage 1 at 80 - 90 °C over the course of 3 - 12 h,
- Stage 2 at 110 - 185 °C over the course of 10 - 48 h, after the Stage 2 retention time is over,
- Stage 3 is executed, which involves heating at 90 - 110 °C in 14 h, or a slow cooling at a cooling rate of 2 - 8 °C/h.

Aluminum-Based Alloy and Procedure for its Heat Treatment

The invention relates to an aluminum-based alloy, preferably from the Al-Li-Mg system, which contains lithium, magnesium, zinc, zirconium and manganese, and relates to the metallurgy of alloys used as a construction material in aeronautics and aerospace engineering, in shipbuilding and mechanical engineering of earthbound means of transportation, including welding structures.

Known in the art are alloys of the system Al-Li-Mg that exhibit a reduced density and relatively high strength, but have a low ductility and diminished fracture toughness. The alloy according to US Patent Specification NO. 4,584,173 dated 4/22/86 has the following chemical composition, %w/w:

Aluminum	Base
Lithium	2.1-2.9
Magnesium	3.0-5.5
Copper	0.2-0.7

and one or more elements from the group containing zirconium, hafnium and niobium:

Zirconium	0.05 - 0.25
Hafnium	0.10 - 0.50
Niobium	0.05 - 0.30

and

Zinc	0 - 2.0
Titanium	0 - 0.5
Manganese	0 - 0.5
Nickel	0 - 0.5

- 2 -

Chromium	0 - 0.5
Germanium	0 - 0.2

If this alloy is quenched at a temperature of 530 °C and then stretch-adjusted with a ductility of 2 % and artificially aged at 190 °C for 4 - 16 h, the disadvantage is that the alloy exhibits low ductility in the heat-treated state (relative elongation 3.1 - 4.5 %) and low corrosion resistance.

The alloy according to International Patent Application WO No. 92/03583 has the following chemical composition in %w/w:

Aluminum	Base
Lithium	0.5 - 3.0
Magnesium	0.5 - 10.0
Zinc	0.1 - 5.0
Silver	0.1 - 2.0

At a max. 12 % total content of these elements and, when they measure 7.0 - 10.0 % in sum, lithium cannot exceed 2.5 %, and zinc 2.0 %; in addition, the alloy can contain up to 1.0 % zirconium.

This alloy exhibits a strength of 476 - 497 MPa, an apparent yield point of 368 - 455 MPa, a relative elongation of 7 - 9 % and a density of 2.46 - 2.63 g/cm³. The alloy is recommended as a structural material for products in aeronautics and aerospace. The disadvantages to this alloy are as follows:

The high strength can be ensured:

- by a high lithium content, but this reduces the ductility and fracture toughness of the alloy, diminishes its cold formability, and difficulties

- 3 -

are encountered during the manufacture of thin sheets required for flying devices;

- by a high zinc content; this increases the alloy density to values of 2.60 - 2.63 g/cm³, which significantly diminishes the savings in weight for the product;
- by stretching the quenched material prior to an artificial ageing with a ductility of 5 - 6 %, which diminishes the fracture toughness parameters.

The alloy is alloyed with silver, which increases the product costs, from semi-finished to finished products.

Alloys with a high zinc content and added copper exhibit a diminished corrosion resistance; during fusion welding, they show an increased tendency to form defects and a distinct loss of cohesion.

A comparable alloy for the entire area of application is known from US Patent No. 4,636,357. This alloy has the following composition, %w/w:

Aluminum	Base
Lithium	2.0 - 3.0
Magnesium	0.5 - 4.0
Zinc	2.0 - 5.0
Copper	0 - 2.0
Zirconium	0 - 0.2
Manganese	0 - 0.5
Nickel	0 - 0.5
Chromium	0 - 0.4

The alloy is hardened via heat treatment:

- 4 -

Quenching at a temperature of 460 °C, stretching with a stretching degree of 0 - 3 % and a two-stage heat treatment:

Stage 1 at 90 °C, 16 h and stage 2 at 150 °C, 24 h.

This alloy exhibits a sufficiently high level of strength of 440 - 550 MPa and an apparent yield point of 350 - 410 MPa.

The disadvantages to this alloy include the low level of relative elongation of the alloy (1.0 - 7.0 %) and the low fracture toughness, inadequate corrosion resistance and limited strength of welds in comparison to the strength of the base material.

Therefore, the object of the present invention is to achieve an increased ductility for the alloy in a heat-treated state while retaining a high strength and ensuring a high corrosion resistance and weldability, at the same time ensuring sufficiently high parameters for fracture toughness and thermal stability after warming at 85 °C over the course of 1000 h.

This object is achieved according to the invention by an alloy from the Al-Li-Mg system with the following chemical composition, %w/w:

Lithium	1.5 - 1.9
Magnesium	4.1 - 6.0
Zinc	0.1 - 1.5
Zirconium	0.05 - 0.3
Manganese	0.01 - 0.8
Hydrogen	0.9×10^{-5} - 4.5×10^{-5}

and at least one element selected from the following group:

- 5 -

Beryllium	0.001 - 0.2
Yttrium	0.01 - 0.5
Scandium	0.01 - 0.3
Aluminum	Remainder

As solid, finely distributed lithium hydride particles form, the hydrogen content reduces the contraction during solidification, and prevents the formation of porosity in the material.

The magnesium content ensures the necessary level of strength characteristics and weldability. If the magnesium content drops below 4.1 %, strength will decrease, and the tendency of the alloy to form hot cracks both during casting and welding will rise. Increasing the magnesium content in the alloy to over 6.0 % diminishes processability during casting, hot and cold rolling, and the plasticity parameters of completed semi-finished products and articles made from them.

Maintaining the lithium content is important to ensure the required processability, in particular during the manufacture of thin sheets, the necessary level of mechanical and corrosion characteristics, and sufficient fracture toughness and weldability. A drop in lithium content to below 1.5 % increased the alloy density, diminished the level of strength characteristics and the modulus of elasticity. A lithium content exceeding 1.9 % was associated with diminished processability via cold forming, weldability, plasticity parameters and fracture toughness.

0.05 - 0.3 % zirconium is a modifier during the casting of ingots, and together with manganese (0.01 - 0.8 %)

- 6 -

ensures a structural solidification in the semi-finished products due to the formation of a polygonized or fine-grained structure.

In particular adding one or more of the elements beryllium, yttrium and scandium yields the formation of a homogeneous, fine-grained structure in semi-finished products comprised out of the alloy according to the invention, and an increased ductility during cold-rolling.

The invention also relates to a procedure for heat-treating aluminum-based alloys, preferably from the Al-Li-Mg system.

The object of such a heat-treatment procedure is to increase the ductility of the alloy while retaining its high strength, and simultaneously achieve high parameters for corrosion resistance and fracture toughness, but in particular to preserve these characteristics when exposing the material to an elevated temperature over a prolonged time.

Known from US Patent Specification 4,861,391 is a procedure for heat treatment, which involves quenching with rapid cooling, adjustment and two-stage ageing as follows:

Stage 1 at a temperature not to exceed 93 °C, from several hours to several months; preferably 66 - 85 °C, at least 24 h.

Stage 2 at a max. temperature of 219 °C, from 30 minutes to several hours, 154 - 199 °C, max. 8 h.

While the strength parameters and fracture toughness are increased, this procedure does not ensure stability

- 7 -

with respect to the characteristics of lithium-containing aluminum alloys after low-temperature warming at 85 °C over the course of 1000 h, which simulates heating by the sun during the prolonged operation of flying devices. After warming to 85 °C over 1000 h, the relative elongation and fracture toughness of the lithium-containing alloys treated according to this method drop by 25 - 30 %.

According to the invention, a procedure for achieving the set task encompasses the following steps:

- heating the material to a temperature of 400 to 500 °C
- quenching in water or air, adjusting with a ductility of up to 2 %, and
- artificial ageing, wherein artificial ageing takes place in 3 stages, of which the third ageing stage takes place at 90 to 110 °C over the course of 8 to 14 h.

As an alternative to executing the third ageing stage at a constant temperature, the latter can also be executed in such a way that cooling takes place for 10 to 30 h at a cooling rate of 2 to 8 °C per hour.

It has been found that alloys according to the invention with the feature of claim 1 exhibit particularly advantageous characteristics in terms of the problem definition if they are treated according to the aforementioned procedure.

Because a third ageing stage is used, these heat treatment procedures ensure the thermal stability of the alloys after prolonged storage at low temperatures

- 8 -

due to the additional separation of the disperse phase $\delta'-(\text{Al}_3\text{Li})$, which is uniformly distributed in the matrix volume. The large volume of the finely distributed δ' phase reduces the Li saturation of the mixing crystal, and prevents δ' separation during storage at 85 °C for 1000 h.

In a preferred embodiment of the procedures according to claim 2 or claim 3, the first stage of artificial ageing takes place at a temperature of 80 - 90 °C over the course of 3 - 12 h, and a second stage at 110 - 185 °C over the course of 10 - 48 h.

Staying within these limits creates particularly favorable preconditions for artificial ageing, and very reliably yields results in terms of the problem definition.

Finally, a second stage of artificial ageing can alternatively take place at a temperature of 110 to 125 °C and a duration of 5 to 12 h, wherein these procedural parameters are preferably to be applied when performing the third ageing stage according to claim 3.

Embodiments:

Ingots with a diameter of 70 mm were cast from the alloys whose chemical composition is presented in Table 1. The metal was melted in a resistance furnace. After homogenization (500 °C, 10 h), the ingots were pressed into strips with a cross-section of 15x65 mm. The ingots were heated to a temperature of 380 - 450 °C before pressing. Billets made out of the strips were heated to 360 - 420 °C and hot-rolled to 4 mm thick sheets, which were then cold-rolled to a thickness of 2.2 mm. The cold-rolled sheets were quenched in water or air from a temperature of 400 - 500 °C, adjusted

- 9 -

with a ductility of up to 2 %, and subjected to the heat treatments specified in Table 2. The properties of the base material and welds were determined for samples cut out of these sheets (compare Table 3).

- 10 -

Table 1

Chemical Compositions of Analyzed Compositions

Alloy No.	Li	Mg	Zn	Zr	Mn	Hx10 ⁵	Be	Y	Sc	Cr	Cu	Ni
1	2.2	1.2	5.0	-	-	-	-	-	-	0.4	-	-
2	2.4	3.8	3.9	0.18	0.50	-	-	-	-	-	0.96	0.2
3	1.5	6.0	0.1	0.15	0.60	0.9	0.2	-	-	0.12	-	-
4	1.9	5.2	0.8	0.10	0.01	4.5	0.001	-	0.01	-	-	-
5	1.7	4.1	1.5	0.30	0.05	2.5	-	0.25	-	-	-	-
6	1.6	5.2	0.6	0.05	0.80	2.5	-	0.01	-	0.15	-	-
7	1.85	4.8	0.5	0.09	0.20	3.5	-	0.50	-	0.50	-	-
8	1.55	4.2	0.1	0.05	0.10	2.5	-	-	0.30	-	-	-
9	1.9	4.7	0.1	0.15	0.35	2.5	0.1	-	-	0.01	-	-
10	1.5	4.3	0.3	0.1	0.40	3.5	0.1	-	-	-	-	-

Comment: Alloys 1 and 2 are comparison materials
 Alloys 3 - 10 are materials per the invention

- 11 -

Table 2

Procedure for the Heat Treatment of Analyzed Alloys

Alloy No.	Heat Treatment No.	Heat treatment procedure
3, 5, 9	3	80 °C, 4 h + 185 °C, 10 h + 110 °C, 8 h
8, 10	4	90 °C, 3 h + 110 °C, 48 h + 90 °C, 14 h
4, 7	5	85 °C, 5 h + 145 °C, 25 h + 110 °C, 10 h
6	6	85 °C, 12 h + 120 °C, 12 h + 90 °C, 12 h

Table 3

Properties of Analyzed Alloys

Alloy No.	Heat Treatment No.	σ_B , MPa	$\sigma_{0.2}$, MPa	δ , %	K_{co} , MPa $\sqrt{m}$ ($w_0 = 200$ mm)	
					Before ageing at 85 °C, 1000 h	After ageing at 85 °C, 100 h
1	1	460	345	3.5	59.5	46.0
2	2	470	355	2.5	58.7	44.8
3	3	475	358	9.0	69.5	67.0
4, 7	5	473	347	8.0	68.3	66.8
5	3	458	345	8.5	67.8	66.7
6	6	450	338	10.0	68.0	67.8
8, 10	4	452	340	9.5	66.8	65.9
9	3	460	345	9.0	65.5	63.3

Comments: Alloys and Procedures 1 and 2 are comparison materials from a 2-stage heat treatment procedure.

Alloys and Procedures 3 - 10 are per the invention.

CLAIMS

1. Aluminum-based alloy, preferably from the Al-Li-Mg system, which contains lithium, magnesium, zinc, zirconium and manganese, characterized by the fact that the alloy additionally contains hydrogen and at least one element from the group comprising beryllium, yttrium and scandium, at a following component ratio, %w/w:

Lithium	1.5 - 1.9
Magnesium	4.1 - 6.0
Zinc	0.1 - 1.5
Zirconium	0.05 - 0.3
Manganese	0.01 - 0.8
Hydrogen	0.9×10^{-5} - 4.5×10^{-5}

and at least one element selected from the following group:

Beryllium	0.001 - 0.2
Yttrium	0.01 - 0.5
Scandium	0.01 - 0.3
Aluminum	Remainder

2. Procedure for the heat treatment of aluminum-based alloys with lithium components, preferably from the Al-Li-Mg system, with the following steps:

- heating the material to a temperature of 400 to 500 °C
- quenching in water or air, adjusting with a ductility of up to 2 %, and
- artificial ageing,

- 2 -

characterized by the fact that artificial ageing takes place in 3 stages, wherein the second stage ensues at a higher temperature than the first, of which the third ageing stage takes place at 90 to 110 °C over the course of 8 to 14 h.

3. Procedure for the heat treatment of aluminum-based alloys, preferably from the Al-Li-Mg system, with the following steps:

- heating the material to a temperature of 400 to 500 °C
- quenching in water or air, adjusting with a ductility of up to 2 %, and
- artificial ageing,

characterized by the fact that artificial ageing takes place in 3 stages, of which the third ageing stage involves cooling for 10 to 30 h at a cooling rate of 2 to 8 °C per hour.

4. Procedure according to claim 2 or claim 3, characterized by the fact that the first stage of artificial ageing takes place at a temperature of 80 - 90 °C over the course of 3 - 12 h, and a second stage takes place at 110 - 185 °C over the course of 10 - 48 h.
5. Procedure according to claim 2 or claim 3, characterized by the fact that the first stage of artificial ageing takes place at a temperature of 80 - 90 °C over the course of 3 - 12 h, and a second stage takes place at 110 - 125 °C over the course of 5 - 12 h.

- 3 -

6. Procedure for the heat treatment of aluminum-based alloys with lithium components, which involves hardening, stretching and artificial ageing, characterized by the fact that artificial ageing occurs in three stages, of which the third stage takes place at a temperature of 90 to 110 °C for a duration of 8 to 14 h.
7. Procedure for the heat treatment of aluminum-based alloys with lithium components, which involves hardening, stretching and artificial ageing, characterized by the fact that a second ageing stage is followed by cooling for 10 to 30 h at a cooling rate of 2 to 8 °C per hour.