

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
6 November 2008 (06.11.2008)

PCT

(10) International Publication Number  
**WO 2008/132711 A1**

(51) International Patent Classification:

*E04C* 2/52 (2006.01) *B29C* 44/58 (2006.01)  
*E04D* 3/35 (2006.01) *F24D* 3/16 (2006.01)

(74) Agents: O'BRIEN, John, A. et al.; c/o John A. O'Brien  
& Associates, Third Floor, Duncairn House, 14 Carysfort  
Avenue, Blackrock, County Dublin (IE).

(21) International Application Number:

PCT/IE2008/000052

(22) International Filing Date: 30 April 2008 (30.04.2008)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

2007/0324 1 May 2007 (01.05.2007) IE  
2007/0446 21 June 2007 (21.06.2007) IE

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant (*for all designated States except US*):  
**KINGSPAN RESEARCH AND DEVELOPMENTS LIMITED** [IE/IE]; Dublin Road, Kingscourt, County Cavan (IE).

(72) Inventor; and

(75) Inventor/Applicant (*for US only*): **CAROLAN, James** [IE/IE]; Drumpeak, Kingscourt, County Cavan (IE).

Published:

— with international search report

(54) Title: A PANEL

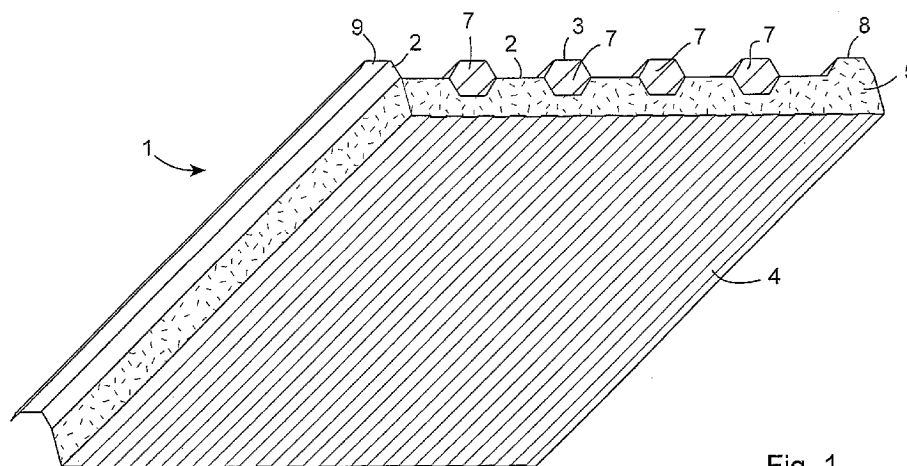


Fig. 1

(57) Abstract: An insulating panel (1) comprises a first sheet (2), a second sheet (4), and a body of insulating foam (5) between the sheets (2), (4). The foam (5) has a plurality of longitudinally extending conduits (7) through which a heat exchange medium such as air is circulated. A barrier (10) is used to create an enlarged void space for air circulation. The barrier is located below profile crowns (3) to prevent foam from entering the crowns (3) and to create additional foam-free voids below the crown. Heat transfer efficiency is increased.

- 1 -

“A panel”

### Introduction

5 With increasing energy costs there is a need for optimizing heat transfer to and from a building.

This invention is directed towards providing an improved insulating panel which will address this issue.

10

### Statements of Invention

15 According to the invention there is provided a composite insulating panel comprising a first sheet, a second sheet, and insulating foam between the first sheet and the second sheet, the foam defining a longitudinally extending conduit means therein, a barrier between the conduit means and the insulating foam wherein the barrier is not planar.

20 In one embodiment the barrier comprises a pair of longitudinally extending transversely spaced-apart sides defining a plane therebetween and the barrier extends outside of said plane.

The barrier can extend into the foam.

25 The barrier can extend inwardly of the first sheet and/or inwardly of the second sheet.

In one embodiment the first sheet is profiled.

In another embodiment the second sheet is profiled.

30

- 2 -

In one embodiment the profile defines a profile recess and the recess forms part of the conduit means. The conduit means can be larger than the profile recess.

5 In one embodiment the conduit comprises the profile recess part and a foam recess part. The foam recess part can be oppositely directed with respect to the profile recess part.

10 In one case the foam recess part is of a shape which is substantially a mirror image of the profile recess part.

In one embodiment the first sheet comprises a plurality of longitudinally extending profiled crowns, at least some of the crowns refining the conduit means. One of the crowns can define an underlap for jointing with an adjacent like panel and the underlap crown can be filled with foam.

15 The barrier can comprise a membrane such as a foil or tape.

In one embodiment the panel comprises a plurality of the conduit means. Preferably between adjacent conduit means the foam is in direct contact with the sheet(s).  
20 Adjacent barriers may be spaced apart to provide regions for bonding of foam.

In another embodiment there is provided a composite insulating panel comprising a first sheet, a second sheet, and insulating foam between the first sheet and the second sheet, the foam defining a longitudinally extending conduit means therein, a barrier  
25 between the conduit means and the insulating foam wherein the barrier extends into the foam.

In a further embodiment the invention provides a composite insulating panel comprising a first sheet, a second sheet, and insulating foam between the first sheet  
30 and the second sheet, the foam defining a longitudinally extending conduit means therein, a barrier between the conduit means and the insulating foam wherein at least

– 3 –

one of the sheets is profiled, the recess forms part of the conduit means and the conduit means is larger than the profile recess.

5 In another embodiment the invention provides a composite insulating panel comprising a first sheet, a second sheet, and insulating foam between the first sheet and the second sheet, the foam defining a longitudinally extending conduit means therein wherein one of sheets comprises a plurality of longitudinally extending profiled crowns, at least some of the crowns defining the conduit means wherein one of the crowns defines an underlap for jointing with an adjacent like panel and the  
10 underlap crown is filled with foam. The panel may have

The panel can be a roof panel, a wall panel, or a floor panel.

15 The invention also provides a heating or cooling system comprising a panel of the invention. The system can comprise duct means for collecting and directing air which is passing through the crown of the panel.

In one embodiment the system can comprise air circulating means for circulating air to or from the crown or duct.

20

The system can comprise a plurality of panels of the invention.

25 In another aspect the invention provides a method for manufacturing a composite insulating panel of the type comprising a first sheet, a second sheet, and an insulating foam body between the first and second sheets, the method comprising the steps of :-

providing a first sheet;

30

providing a former on top of the first sheet;

– 4 –

laying liquid foam reactants down on top of the former and the first sheet;

placing a top sheet on top of the foam reactants;

5

allowing the foam to expand to substantially fill the space between the front sheet, the former and the second sheet; and

10

removing the former from the foam to define a longitudinally extending conduit means in the foam.

In one embodiment the first and second sheets are moved along a bed.

In one case the former is static with respect to the bed.

15

The method can comprise the step of providing a barrier between the former and the liquid foam reactants. The barrier can, for example be a membrane such as a foil or tape.

20

The method can comprise the step of mounting the barrier to the first sheet.

The barrier can be bonded to the first sheet.

25

In one embodiment the method comprises shaping the barrier to the exposed profile of the former.

#### Brief Description of the Drawings

30

The invention will be more clearly understood from the following description thereof given by way of example only, in which:-

– 5 –

Fig. 1 is a perspective view of an insulating panel of the invention;

Fig. 2 is a cross sectional view of the panel of Fig. 1;

5 Fig. 2(a) is an enlarged view of a barrier used in the panel.

Fig. 2(b) is an enlarged view of a detail of the panel of Figs. 1 and 2;

10 Figs. 3 and 4 are cross sectional views of illustrating an overlap joint between adjacent panels of Figs. 1 and 2;

Fig. 5 is a perspective view of an apparatus used to manufacture panels of the invention;

15 Figs. 6(a) to 6(e) are cross sectional views illustrating various steps used in the manufacture of the panels;

Figs. 7(a) to 7(c) are perspective views of an external sheet part of a panel at various stages during the manufacturing process;

20 Fig. 8 is a cross sectional view of another panel according to the invention;

Fig. 9 is a cross sectional view on an enlarged scale of portions of the panel of Fig. 8;

25 Fig. 10 is a cross sectional view of a further panel according to the invention;

Fig. 11 is a cross sectional view on an enlarged scale of portions of the panel of Fig. 10;

30

- 6 -

Figs. 12 to 31 are cross sectional views of various examples of panels according to the invention;

5 Fig. 32 is a plan cross sectional view of building comprising a plurality of panels of the invention;

Fig. 33 is a cross sectional view of a top corner of the building of Fig. 32; and

10 Fig. 34 is a cross sectional view of another corner of the building of Fig. 33.

#### Detailed Description

Referring to the drawings and initially to Figs. 1 and 2 thereof there is illustrated an insulating panel 1 according to the invention comprising a first sheet 2, a second sheet 4 with an insulating body, in this case an insulating foam 5 therebetween. The foam may, for example be a polyisocyanurate foam or a phenolic foam. In this case the panel 1 is a roof panel 1 comprising a profiled external sheet 2 which may be of painted galvanized steel. The profile in this case comprises a plurality of projections, in this case raised crowns 3. The crowns 3 in this case are of generally trapezoidal form and extend longitudinally along the length of the panel. The panel also comprises an inner metal liner sheet 4.

25 The foam defines a plurality of longitudinally extending conduit means 7 through which a suitable heat exchange medium such as air is circulated. The panel thus has an integral heat collecting means provided in some of the crowns 3 of the external sheet which are devoid of insulation 5. The conduits 7 extend through the crowns 3 and air is circulated through the conduits 7. The conduits 7 run through the roof and/or wall in the external envelope of the building and the air absorbs solar energy. Conduits 7 may alternatively or additionally be provided in floor panels for heat circulation. The warmed air may be pumped back into the building to provide heat to the building space. Once the heated air passes through the building and transfers its energy, it may

– 7 –

flow back to the conduit in the roof and/or wall and/or floor panels and the process may be repeated in a closed loop.

5 Barriers, in this case in the form of a membrane such as a tape or foil 10 are located below the crowns 3 to prevent foam entering the crowns 3 and in this case also to create additional foam-free voids below the crowns 3. This creates an enlarged void space through which air may be circulated to enhance the solar collecting efficiency of the panel. Referring in particular to Figs. 2(a) the barriers 10 in this case have projecting side portions or legs 11 which may be attached, for example by adhesive to  
10 the inner face of the outer skin 3 of the panel. There is a free area 12 between individual barriers 10 to which the foam may directly bond to ensure direct foam bonding to the skin 3. The barriers 10 may be any suitable material such as foil or tape.

15 In the invention, the barrier 10 is not planar and can be used to define conduits of any desired size and/or shape. The barrier 10 has a pair of longitudinally extending transversely spaced-apart sides, 11 defining a plane therebetween and the barrier extends outside of said plane. The barrier can therefore be extended into the main body of the foam. The barrier can extend inwardly of the first sheet 2 and/or the  
20 second sheet 4 to provide a conduit of any desired size and shape. The first and/or second sheets may be profiled and at least some of the profile recesses may form a conduit. To increase the heat transfer capabilities the conduit may be larger than the recess defined by the profile of the sheet. There may be a foam recess part and a profile recess part of the conduit. These may be oppositely directed to enlarge the size  
25 of the conduit. In one case the foam recess part is of a shape which is substantially a minor image of the profile recess part.

It will be noted that the cross sectional area of the void space 7 created between the crowns 3 and the barriers 10 is relatively large for optimisation of air flow and heat  
30 transfer. Utilising barriers of different size, the void area can be adjusted to suit the particular requirements of a building.



- 8 -

In this case an underlap crown 8 is filled with insulation foam so that when overlapped on assembly with an overlap hook 9 of an adjacent panel (see especially Figs. 3 and 4), the panels at the joint can be readily jointed or stitched together. The compressive strength at the joint is enhanced.

5

Composite panels may be manufactured on a continuous production line by leading the outer sheet 2 along a flat bed with the recesses defined by the crowns 3 facing upwards. The sheet 2 may be of metal such as thin gauge steel. The profiled sheet 2 is led to a lay-down area at which liquid foam reactants are spread across the sheet 2 using a lay-down poker or the like. As the foam rises a backing sheet is applied over the foam and the sandwich thus formed is then led through an oven and subsequently cut to length. The backing sheet 3 may be of metal such as thin gauge steel. The manufacturing technology is described in our UK-A-2227712, UK-A-2257086, and UK-A-2325640, the entire contents of which are herein incorporated by reference.

15

In the panels of the invention longitudinal conduit means 7 are defined by the foam. Referring in particular to Figs 5 to 7 a panel according to the invention is manufactured by leading an external sheet 2 along a flat bed defined by a conveyor having rollers 20. A transverse support 21 is mounted by brackets 22 above the bed. In this case, four anchor blocks 23 are mounted to the support 21 and a former 25 is mounted to each block 23 by screw threaded rods 26. The longitudinal extent of a former 25 may be adjusted by moving the rod 26 relative to the associated anchor block 23. The formers 25 remain static with respect to the moving profiled sheet 2. Barriers which in this case comprise foil strips 10 are applied over the formers 25 and in this case are bonded to the inside face of the sheet 2 on each side of the profiled recess. Adhesive 30 is applied to the inner sheet face by nozzles 31 which are supplied from a supply tank 32. In this case a suitable lubricant 35 is applied to the underside of the barrier strips 10 by brushes 36 supplied from a supply tank 37. The lubricant assists the movement of the barrier strips 10 on the static formers 25. Shaping rollers 40 shape the strips 10 to conform with the exposed profile of the formers 25.

30

- 9 -

After application of the strips 10 over the formers 25, liquid foam reactants are laid down over the applied barrier strips 10 and the upper face of the sheet 2. A backing sheet 4 is applied and the foam is allowed to expand to fill the space between the sheet 2, barriers 10 and the sheet 4. In this case, the formers 25 only extend for a length sufficient to allow the foam to at least partially set whilst supporting the barrier 10. The panel with the conduit means defined in the foam continues through an oven to cure the foam. The panels may then be cut to a desired length and various further operations may be performed.

10

The formers 25 may be of any size and shape and may be located anywhere along a sheet 2 (whether profiled or not). Thus, the method can be utilized to produce a very wide range of panels, including those illustrated by way of example in Figs. 8 to 31. The panels of Figs. 8 to 31 are similar to those of Figs. 1 and 2 and like parts are assigned the same reference numerals.

15

The panel 100 of Figs. 8 and 9 with two conduits 101 will have the ability to collect and circulate energy but will not be as efficient as the panel of Figs. 1 and 2.

The panel 110 of Figs. 10 and 11 is similar to that of Figs. 1 and 2. In this case the panel has engagement formations in the form of recesses 111 and projections 112 for engagement of adjacent like panels. Interengagement features may be provided on any of the panels of the invention.

20

The panels of the invention may or may not have projections/crowns on their external face. These projections/crowns may or may not be used to provide conduits 7. Using the technology of the invention conduits 7 may be provided in any desired shape at any desired location of the panel.

25

In the panel 120 of Fig. 12 and the panel 130 of Fig. 13 conduits 7 extend inwardly from the face of the external sheet of the panel. Because the face against which solar energy impinges is generally flat the collection efficiency is likely to be diminished.

30

– 10 –

The panel 140 of Fig. 14 is similar to that of Fig. 2 except that the crowns/projections 141 are of curvilinear – such as accurate – shape. In the panel 150 of Fig. 15 the crowns/projections 151 are of triangular shape.

5

The panels 160, 170, 180, 190, of Figs. 16 to 19 are of similar profile and are generally flat with external sheets 2 and/or internal sheets 4 with or without small formations such as microribs.

10

Referring to Fig. 20, in this case a panel 200 is a roof tile panel with an external sheet of undulating or corrugated form. Panels of this type are described in UK-A-2384500. The panels 210 and 220 of Figs. 21 and 22 respectively are roof panels of different types incorporating conduits 7.

15

The panels 230 to 310 of Figs. 23 to 31 respectively again illustrate the application of the invention to a wide range of panel types with different joint details and/or internal sheet and/or external sheet detailing/profiles.

20

The panels may be used to construct part of or all of the building envelope including the roof, walls and floor. One such building is illustrated in Figs. 32 to 34. Each of the walls and the roof of the building comprise a plurality of the panels 20. Air circulating through the conduit means defined by the foam is directed into ducting 51. The flow or air may be controlled using one or more fans 52. The ducting may have venting system 53 which may be motorized to facilitate ease of operation and control. The circulating air is again heated by solar energy. This hot air is captured and may be passed into the heating/ventilation ductwork of the building, again assisting in heating the building. The heated air may also or alternatively be circulated through a heat exchanger for transfer of solar heat to another heat collector. The system may be set to take air from the warmest or coldest elevations depending on the internal and external temperatures. The system can be used for heating and/or cooling.

25

30

- 11 -

Referring especially of Figs. 33 and 34 suitable insulated cappings 55 may be provided. The building may also have insulated flashings 56.

### Examples

5

We have found that the panel of Fig. 2 is particularly suitable for roofs, walls and for floors. The panel has a large exposed surface area and a high large internal void space whilst maintaining structural and insulation properties. The width L of the panel in this case is 1 meter. For optimum thermal efficiency there may be at least three and preferably at least four crowns 3. Each of the crowns 3 defines an area which is devoid of foam.

10

Referring to Fig. 2(b) the faces that are exposed to the external environment comprise an outer face x and two side faces which diverge inwardly from the outer face x. The angle  $\alpha$  between the faces x, y is preferably  $115^{\circ}$  to  $125^{\circ}$ , most preferably  $118^{\circ}$  to  $123^{\circ}$  and in this case about  $121^{\circ}$ .

15

The width w1 of the exposed face x is from 50mm to 60mm, most preferably in this case about 54mm. The height h1 is from 30mm to 40mm, in this case about 36mm. The total cross sectional area above the dashed line in Fig. 2(b) is about  $0.002906\text{m}^2$ . In this case the cross sectional area is further enlarged by providing an additional recessed section extending into the foam. This additional section has an inner face v and side faces z of which diverge outwardly from the inner face v. The angle  $\alpha$  between the faces v and z is preferable  $115^{\circ}$  to  $125^{\circ}$ , most preferably  $118^{\circ}$  to  $123^{\circ}$ , and in this case about  $120^{\circ}$ .

20

25

The inner face v has a width w2 that may be from about 50mm to about 100mm, preferably about 65mm to 75mm, in this case about 70mm.

The maximum width w3 of the cavity is in this case about 80mm to 120mm, preferably about 90mm to 110mm and in this case about 97mm.

30

– 12 –

The depth h<sub>2</sub> of the recessed section is typically from 10mm to 40mm, preferably 20 to 35mm, and in this case about 27mm.

The cross sectional area of the recessed section below the dashed line is about  
5 0.00236m<sup>2</sup>.

The total cross sectional area of the cavity (void area) is 0.002906 + 0.00236 =  
0.005266m<sup>2</sup>

10 The efficiency is calculated based on an air velocity through the cavity of 4.3m/s,  
operating through an elevation of 6m x100m.

The ASHRAE Standard 93-2003-equation for efficiency of a solar collector

15

$$\eta = \frac{m \cdot c_p \cdot \Delta T}{A \cdot I}$$

20 Test data generated using the panel of Fig. 2 indicates an approximately 9.5 deg C air  
temp rise at 500W/m<sup>2</sup>

Mass	m	11 kg
Specific heat capacity	c <sub>p</sub>	1012 J/kgK
Temperature differential	ΔT	9.5 °C
Collector Area	A	349.8 m <sup>2</sup> 0.583 m <sup>2</sup> collector area per m <sup>2</sup>
Irradiance	I	500 W/m <sup>2</sup>
Efficiency	η	0.60

The energy production possible the panel was calculated using RETScreen  
International Clean Energy Project Analysis software available at [www.etscreen.net](http://www.etscreen.net).

25 The following assumptions were made:

Building Location: North West England  
 Building Size: 10m x 100m x 100m = 10,000m<sup>2</sup> floor space.  
 South Facing Wall: 100m (W) x 10m (H)  
 Fan Air Speed: 7m / sec.

- 13 -

Using the panels of Figs. 1 and 2 to construct the south facing wall of the building and circulating air through the foam-free passageways results in the following energy production:

5

Renewable heating energy delivered in one year 183.08 MWhrs based on local  
wather data.

10

Many variations on the embodiments described will be readily apparent. Accordingly the invention is not limited to the embodiments hereinbefore described which may be varied in detail.

Claims

1. A composite insulating panel comprising a first sheet, a second sheet, and insulating foam between the first sheet and the second sheet, the foam defining a longitudinally extending conduit means therein, a barrier between the conduit means and the insulating foam wherein the barrier is not planar.
2. A composite panel as claimed in claim 1 wherein the barrier comprises a pair of longitudinally extending transversely spaced-apart sides defining a plane therebetween and the barrier extends outside of said plane.
3. A composite panel as claimed in claim 1 or 2 wherein the barrier extends into the foam.
4. A composite panel as claimed in any of claims 1 to 3 wherein the barrier extends inwardly of the first sheet.
5. A composite panel as claimed in any of claims 1 to 4 wherein the barrier extends inwardly of the second sheet.
6. A composite panel as claimed in any of claims 1 to 5 wherein the first sheet is profiled.
7. A composite panel as claimed in any of claims 1 to 6 wherein the second sheet is profiled.
8. A composite panel as claimed in claim 6 or 7 wherein the profile defines a profile recess and the recess forms part of the conduit means.

– 15 –

9. A composite panel as claimed in claim 8 wherein the conduit means is larger than the profile recess.
- 5 10. A composite panel as claimed in claim 8 or 9 wherein the conduit comprises the profile recess part and a foam recess part.
11. A composite panel as claimed in claim 10 wherein the foam recess part is oppositely directed with respect to the profile recess part.
- 10 12. A composite panel as claimed in claim 11 wherein the foam recess part is of a shape which is substantially a mirror image of the profile recess part.
13. A composite panel as claimed in any preceding claim wherein the first sheet comprises a plurality of longitudinally extending profiled crowns, at least some of the crowns defining the conduit means.
- 15 14. A composite panel as claimed in claim 13 wherein one of the crowns defines an underlap for jointing with an adjacent like panel and the underlap crown is filled with foam.
- 20 15. A composite insulating panel comprising a first sheet, a second sheet, and insulating foam between the first sheet and the second sheet, the foam defining a longitudinally extending conduit means therein, a barrier between the conduit means and the insulating foam wherein the barrier extends into the foam.
- 25 16. A composite insulating panel comprising a first sheet, a second sheet, and insulating foam between the first sheet and the second sheet, the foam defining a longitudinally extending conduit means therein, a barrier between the conduit means and the insulating foam wherein at least one of
- 30



– 16 –

the sheets is profiled, the recess forms part of the conduit means, and the conduit means is larger than the profile recess.

- 5 17. A composite insulating panel comprising a first sheet, a second sheet, and insulating foam between the first sheet and the second sheet, the foam defining a longitudinally extending conduit means therein wherein one of sheets comprises a plurality of longitudinally extending profiled crowns, at least some of the crowns defining the conduit means wherein one of the crowns defines an underlap for jointing with an adjacent like panel and the underlap crown is filled with foam.
- 10 18. A composite panel as claimed in any of claims 1 to 17 wherein the barrier comprises a membrane such as a foil or tape.
- 15 19. A composite panel as claimed in any of claims 1 to 18 comprising a plurality of the conduit means.
- 20 20. A composite panel as claimed in Claim 19 wherein between adjacent conduit means the foam is in direct contact with the sheet(s).
21. A composite panel as claimed in Claim 20 wherein adjacent barriers are spaced – apart.
- 25 22. A composite panel as claimed in any of claims 1 to 21 wherein the panel comprise a roof panel.
23. A composite panel as claimed in any of claims 1 to 21 wherein the panel comprise a wall panel.
- 30 24. A composite panel as claimed in any of claims 1 to 21 wherein the panel comprise a floor panel.

– 17 –

25. A panel substantially as hereinbefore described with reference to the drawings.
- 5 26. A heating or cooling system comprising a panel as claimed in any preceding claim.
27. A system as claimed in claim 26 comprising duct means for collecting and directing air which is passing through the crown of the panel.
- 10 28. A system as claimed in claim 27 comprising air circulating means for circulating air to or from the crown or duct.
29. A system as claimed in any of claims 26 to 28 comprising a plurality of panels as claimed in any of claims 1 to 25.
- 15 30. A system substantially as hereinbefore described with reference to the drawings.
- 20 31. A method for manufacturing a composite insulating panel of the type comprising a first sheet, a second sheet, and an insulating foam body between the first and second sheets, the method comprising the steps of :-
- providing a first sheet;
- 25 providing a former on top of the first sheet;
- laying liquid foam reactants down on top of the former and the first sheet;
- 30 placing a top sheet on top of the foam reactants;

— 18 —

allowing the foam to expand to substantially fill the space between the front sheet, the former and the second sheet; and

removing the former from the foam to define a longitudinally extending conduit means in the foam.

5

32. A method as claimed in claim 31 wherein the first and second sheets are moved along a bed.

10

33. A method as claimed in claim 32 wherein the former is static with respect to the bed.

34. A method as claimed in any of claims 31 to 33 comprising the step of providing a barrier between the former and the liquid foam reactants.

15

35. A method as claimed in claim 34 wherein the barrier comprises a membrane such as a foil or tape.

36. A method as claimed in claim 34 or 35 comprising the step of mounting the barrier to the first sheet.

20

37. A method as claimed in claim 36 wherein the barrier is bonded to the first sheet.

38. A method as claimed in any of claims 35 to 37 comprising shaping the barrier to the exposed profile of the former.

25

39. A method for manufacturing a composite insulating panel substantially as hereinbefore described.

30

– 19 –

40. A composite insulating panel manufactured by a method as claimed in any of claims 31 to 39.

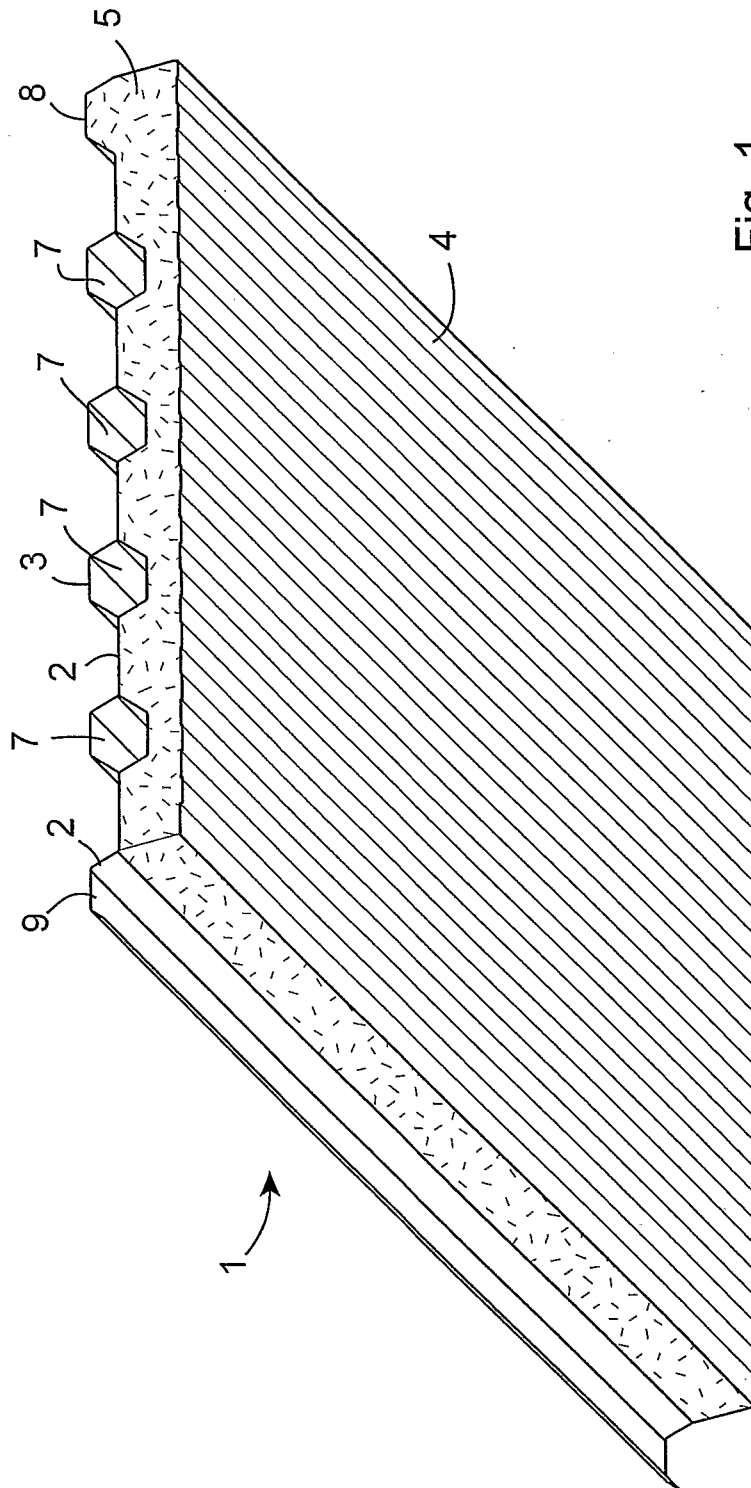


Fig. 1

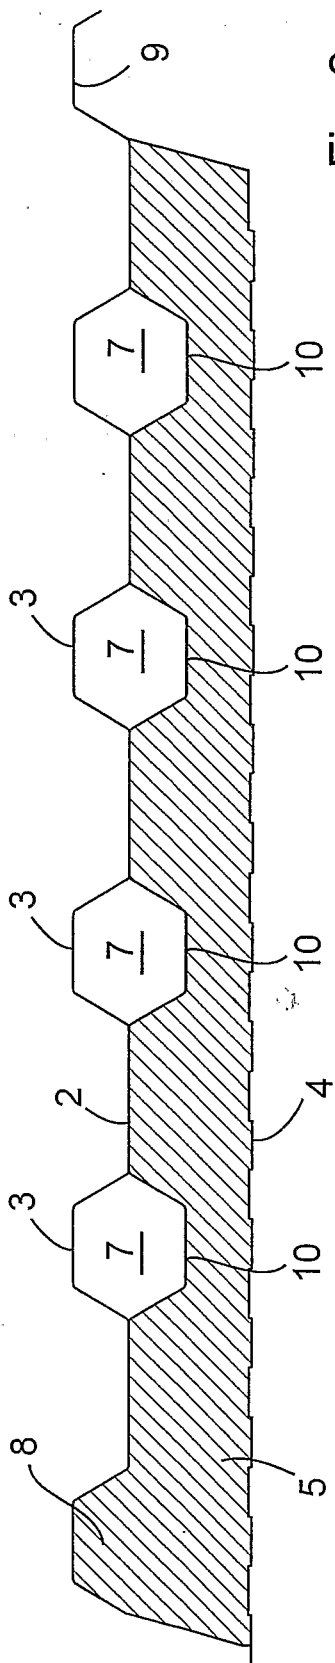


Fig. 2

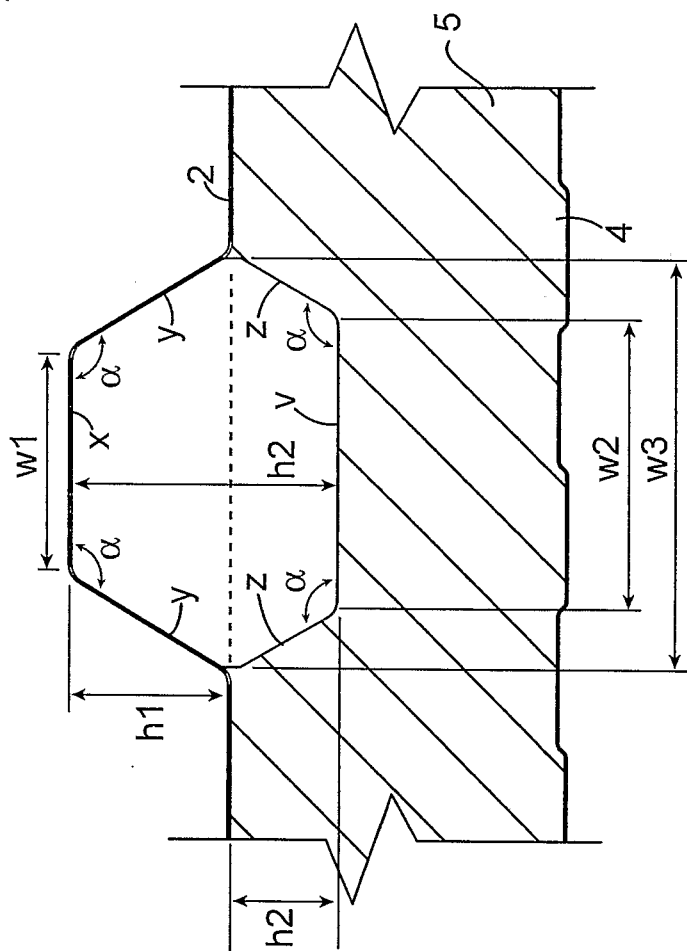


Fig. 2(a)

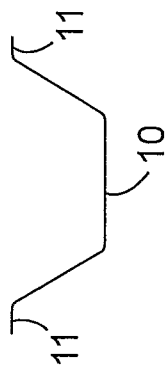


Fig. 2(b)

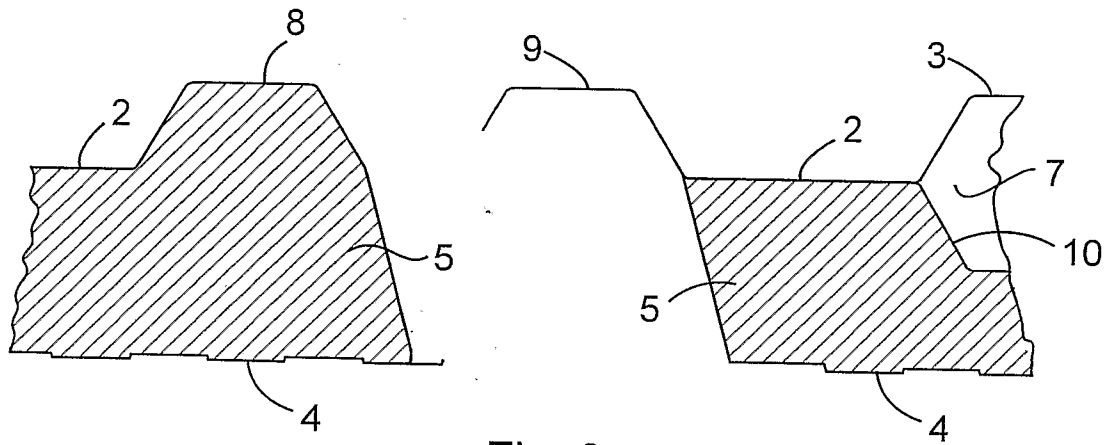


Fig. 3


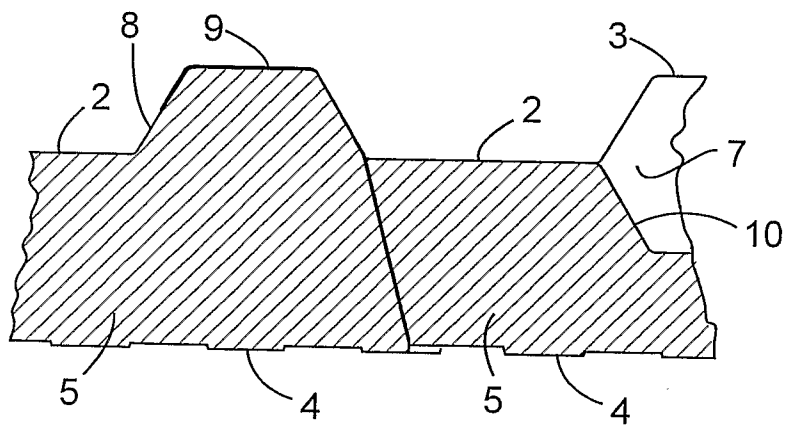


Fig. 4



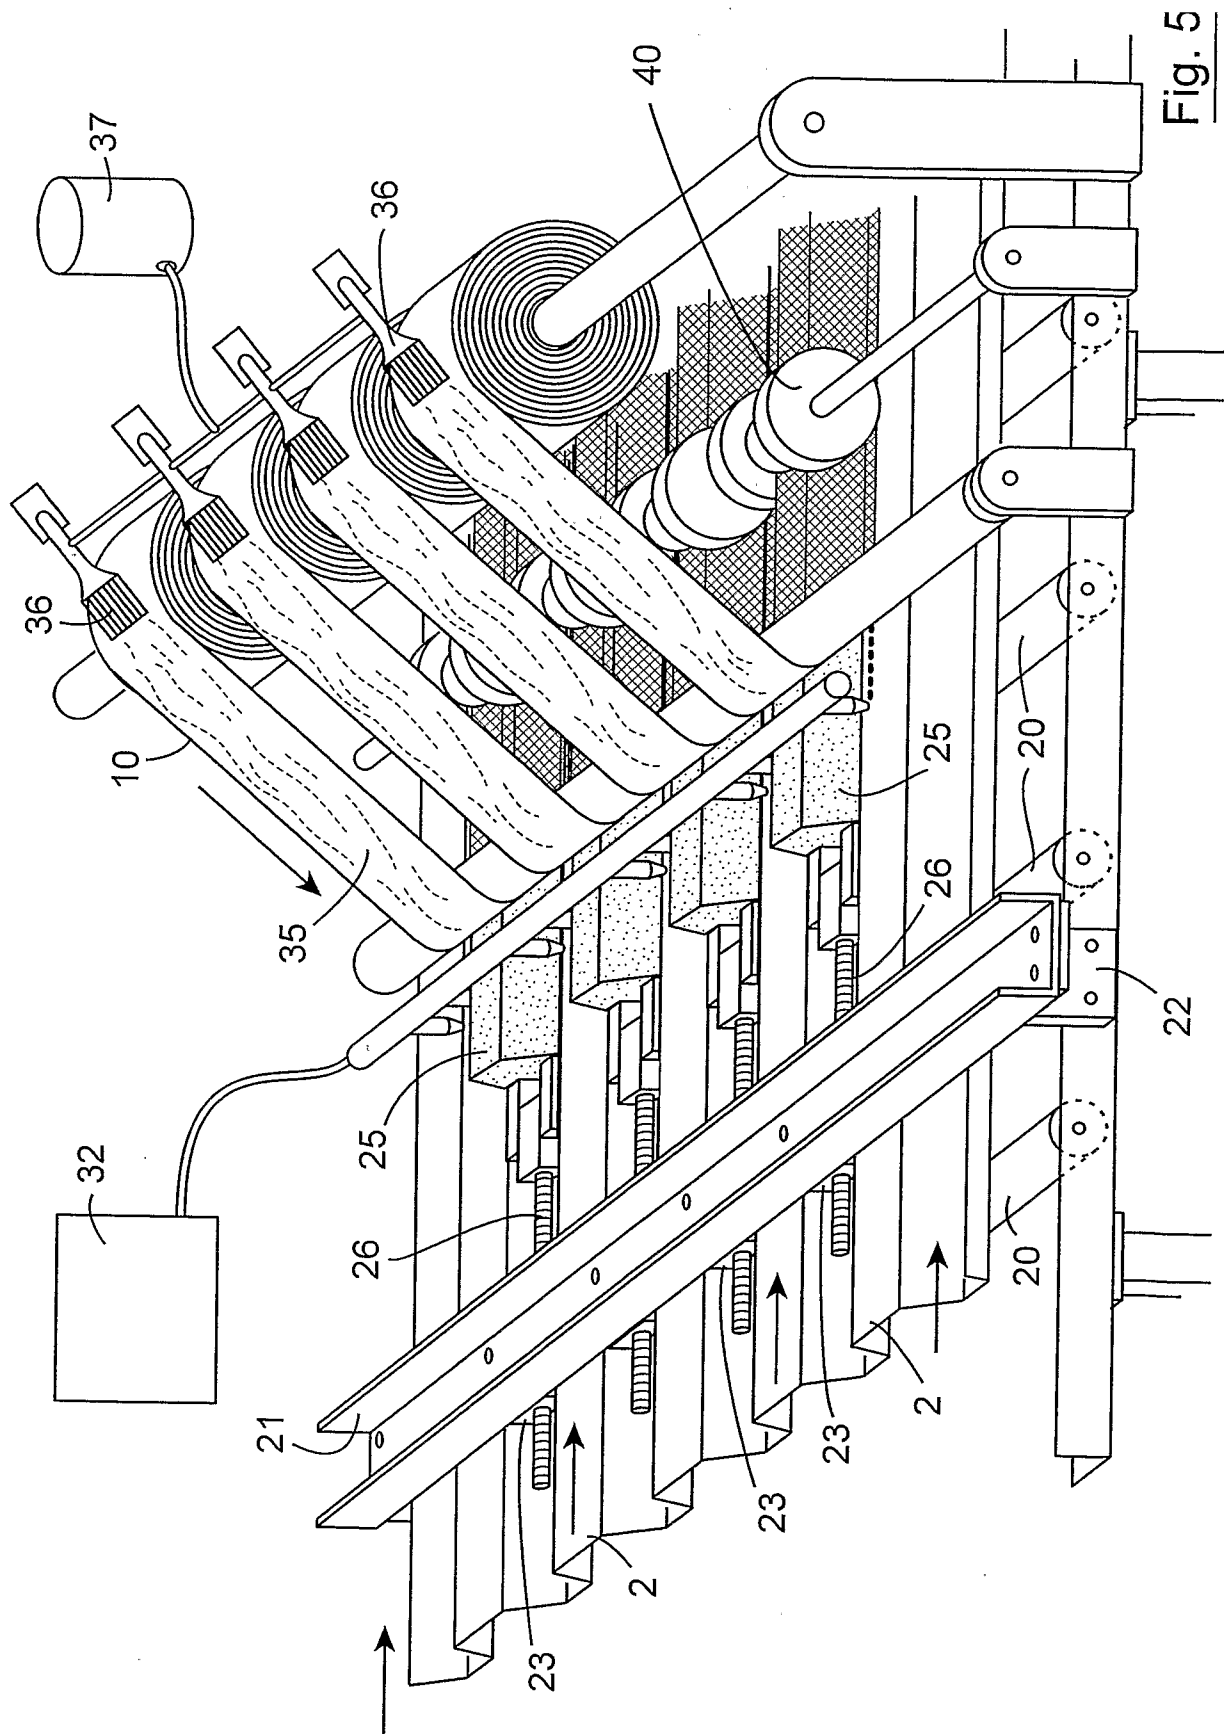

5 / 18

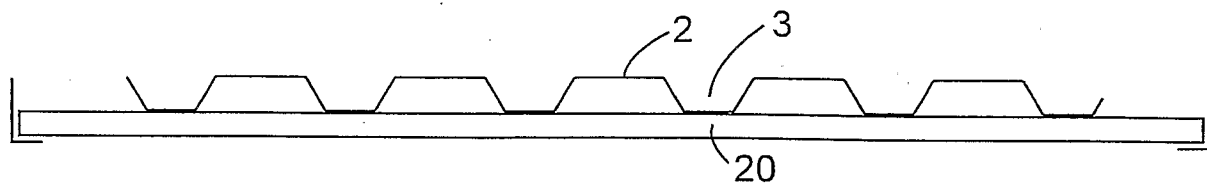


Fig. 6(a)

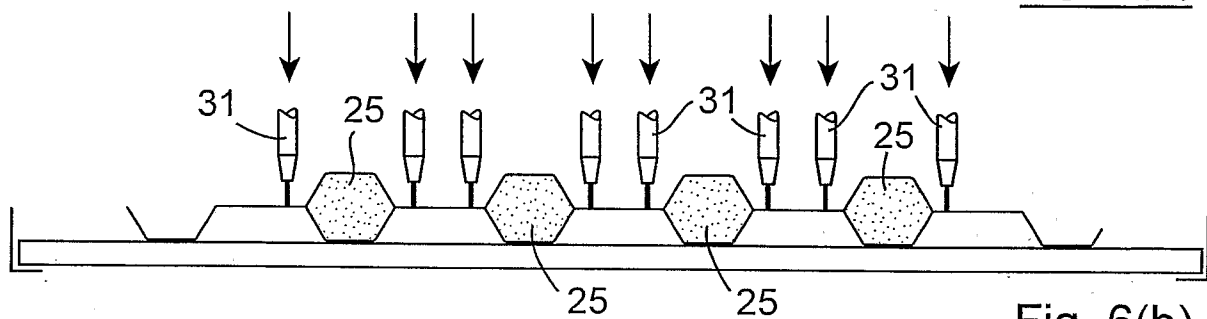


Fig. 6(b)

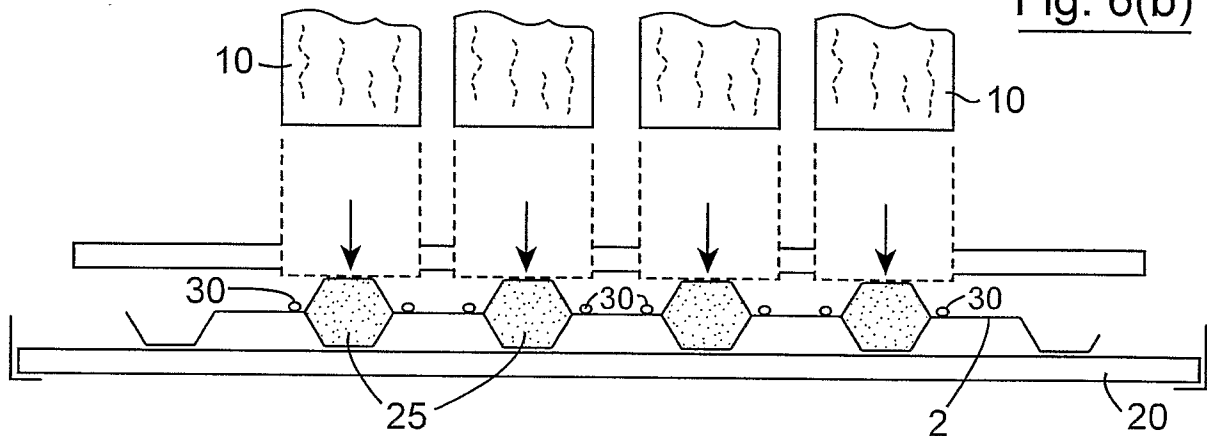


Fig. 6(c)

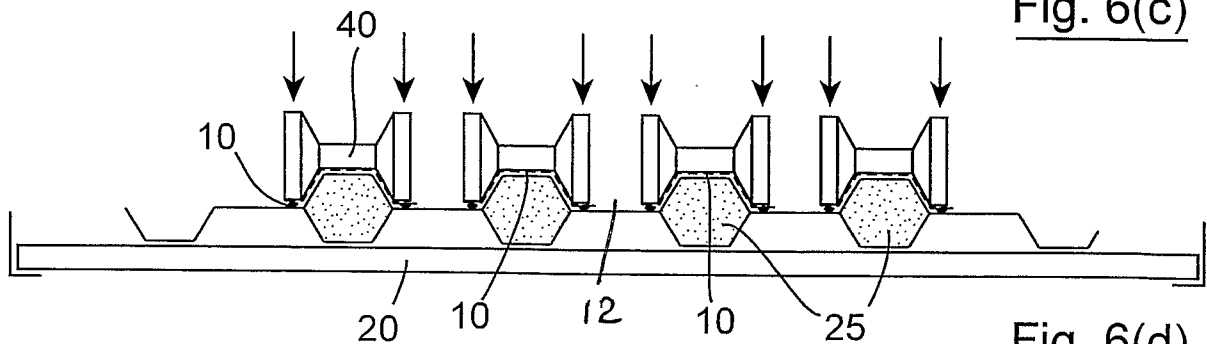


Fig. 6(d)

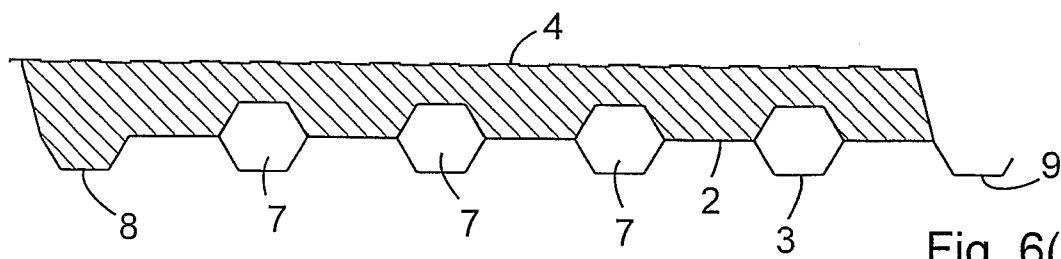


Fig. 6(e)

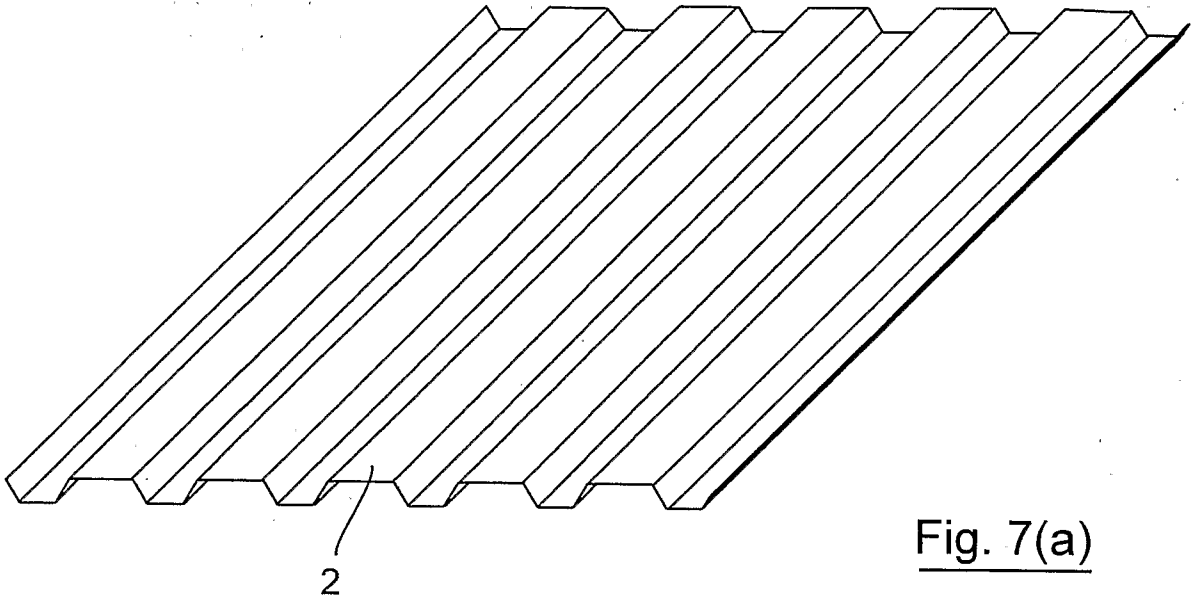


Fig. 7(a)

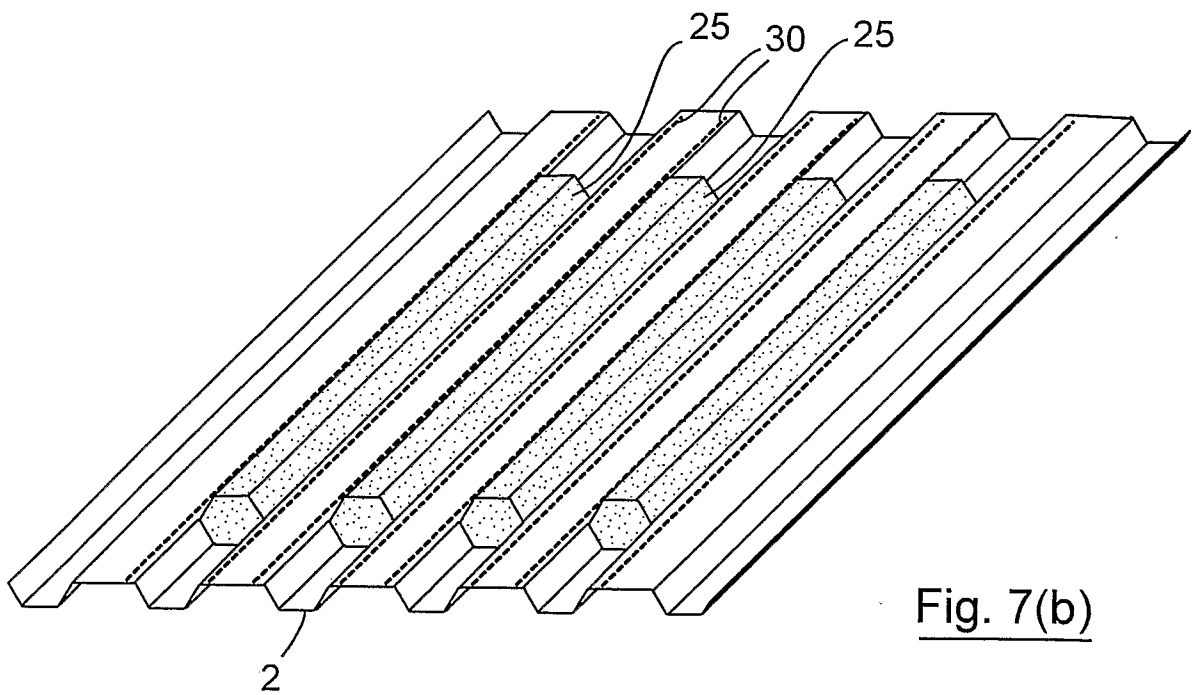


Fig. 7(b)

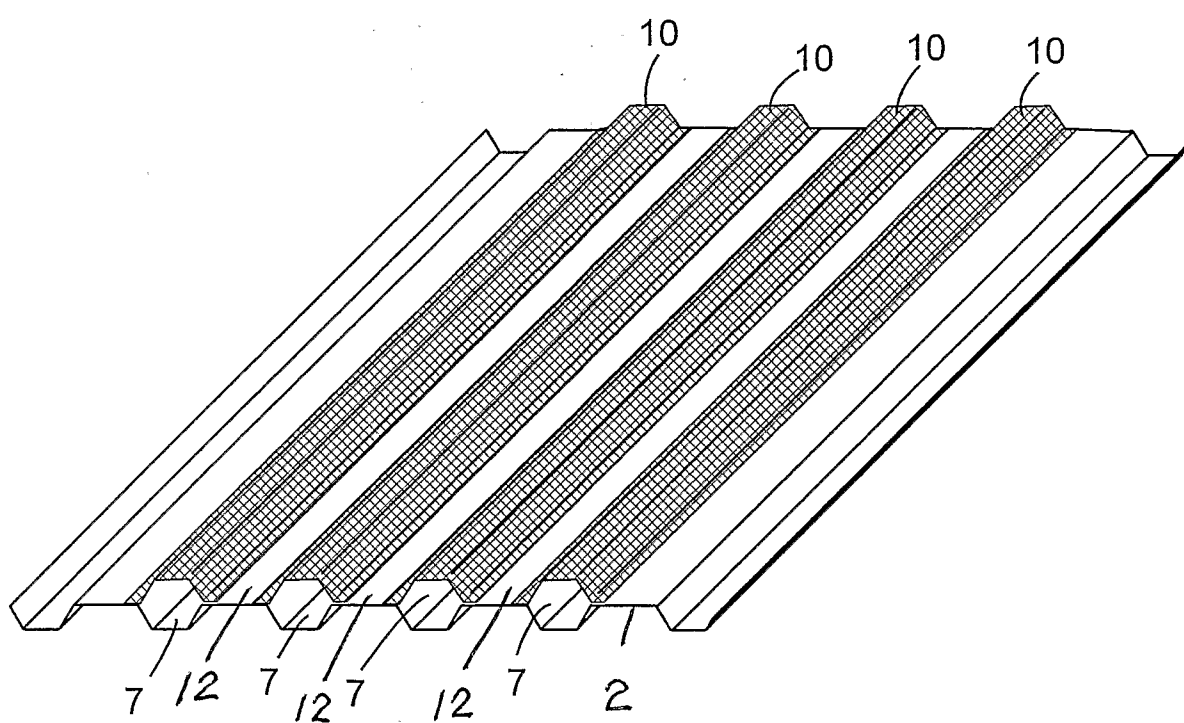


Fig. 7(c)

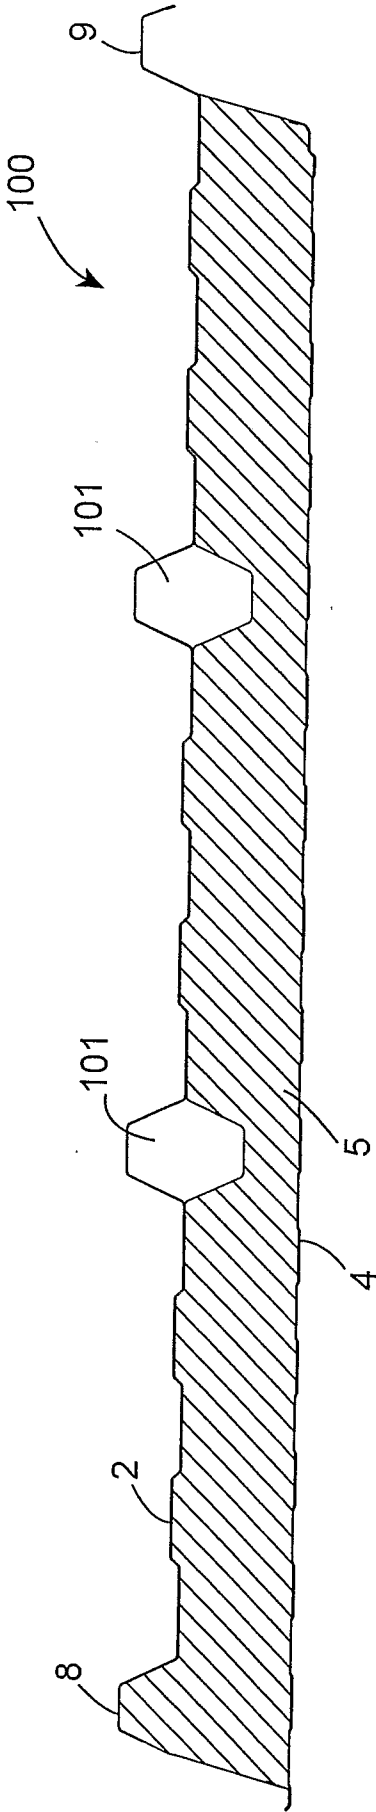


Fig. 8

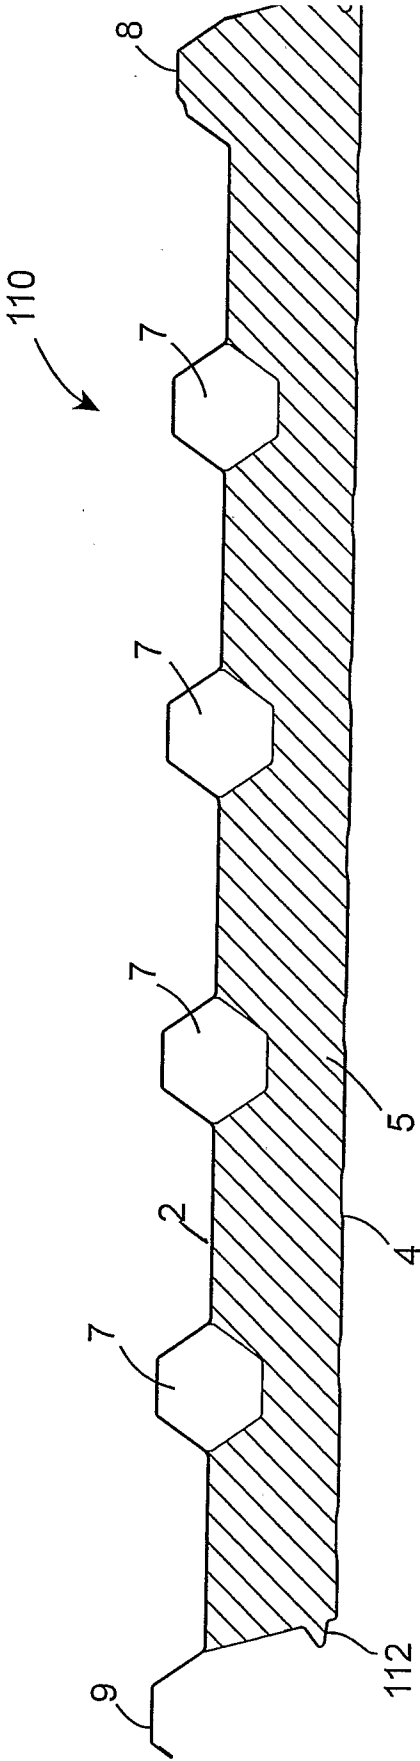
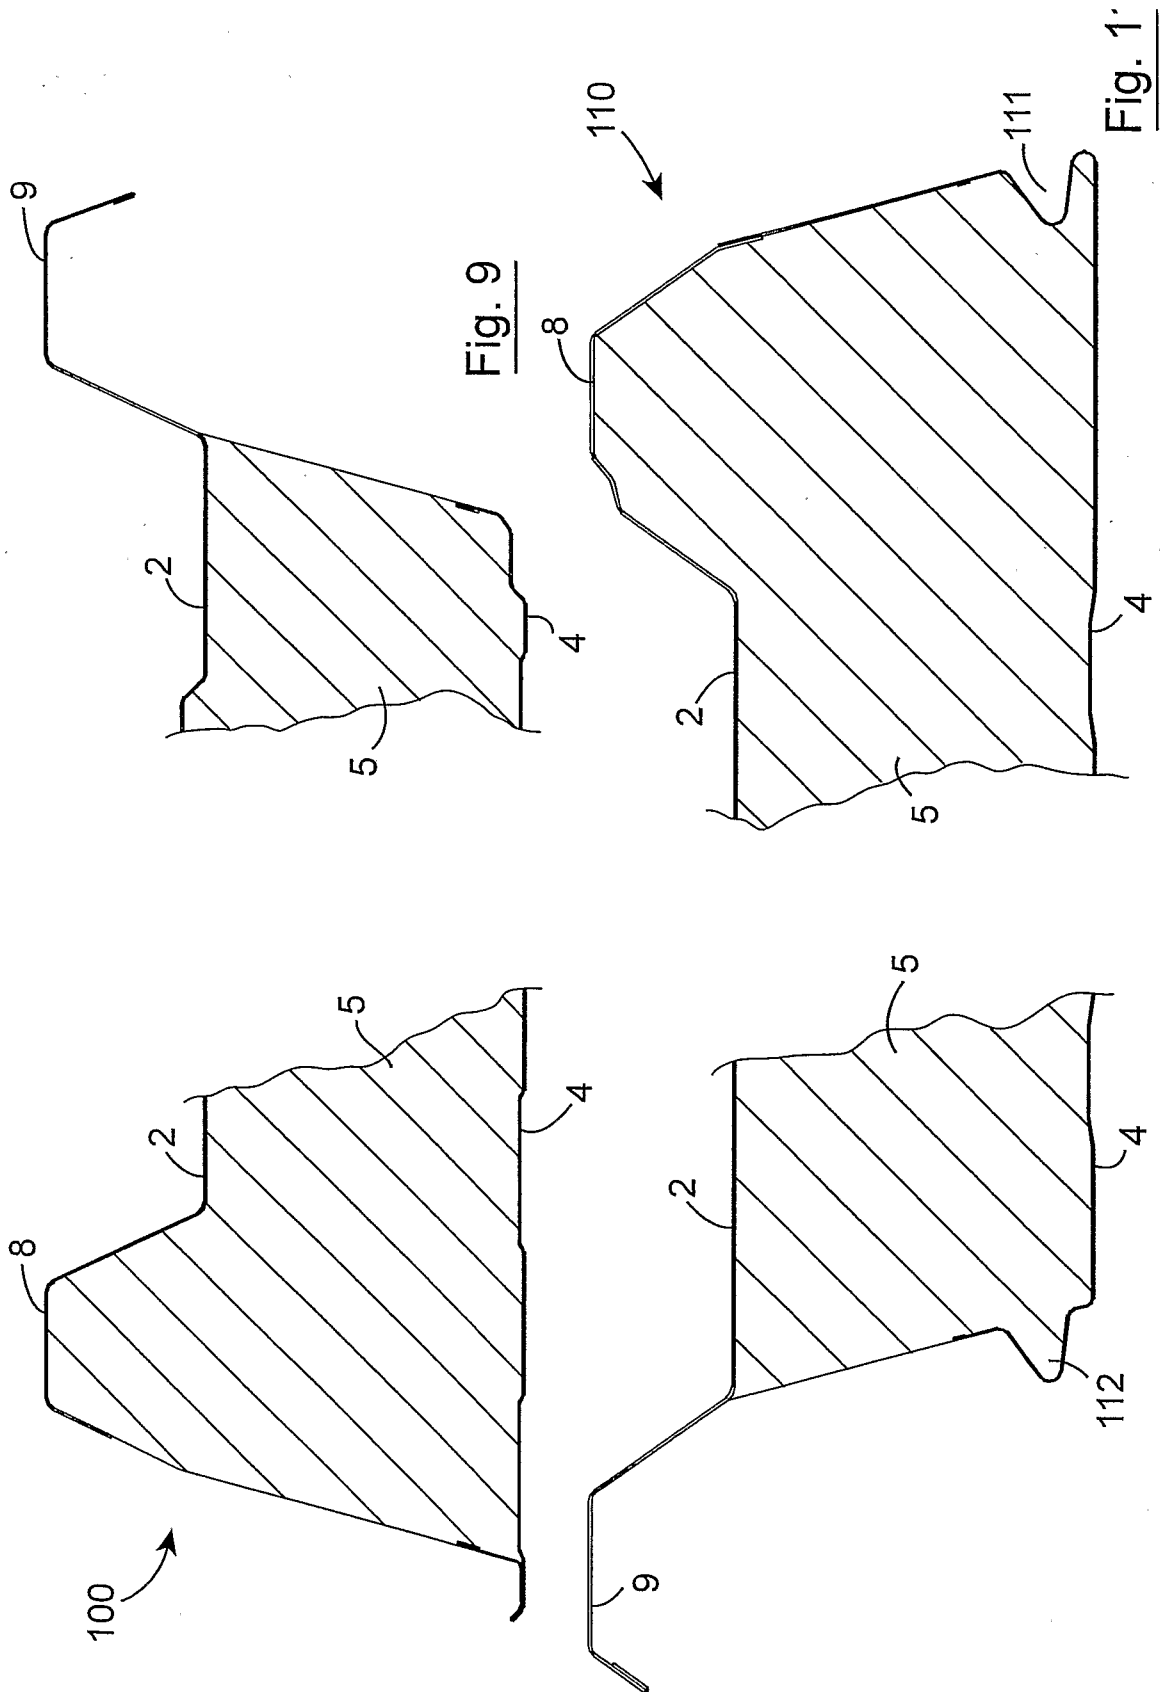
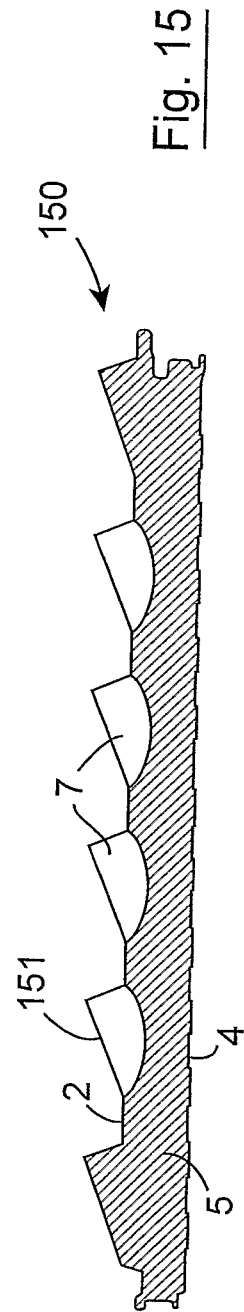
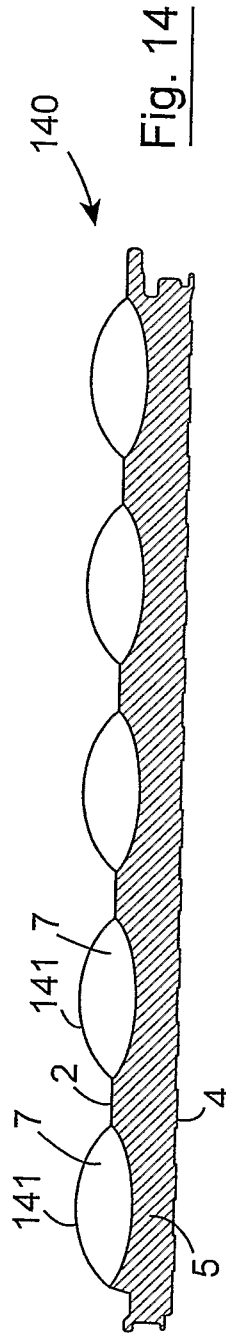
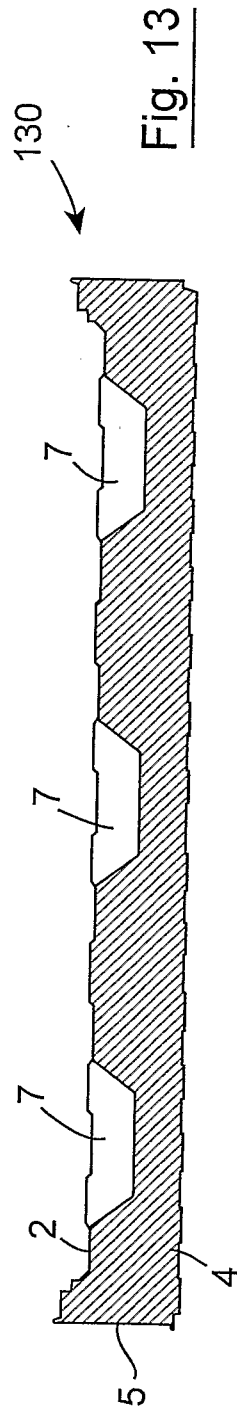
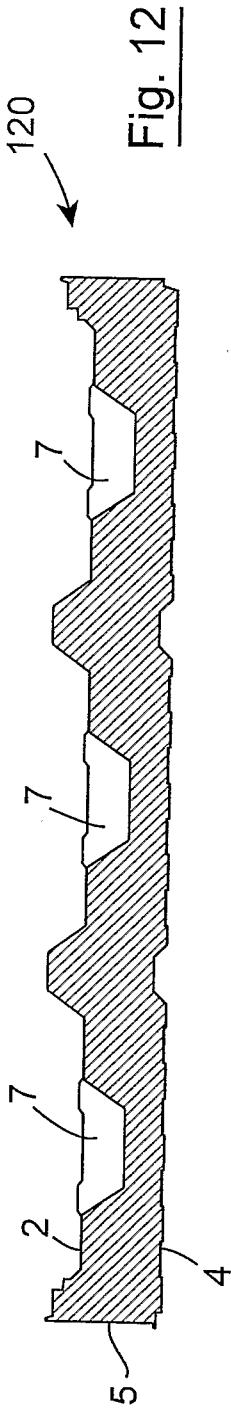


Fig. 10





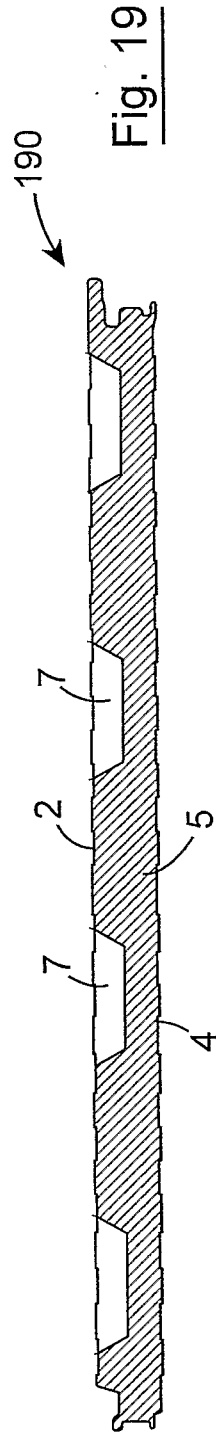
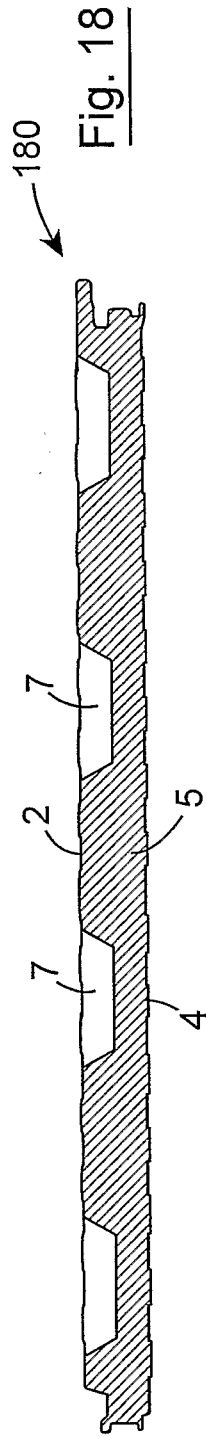
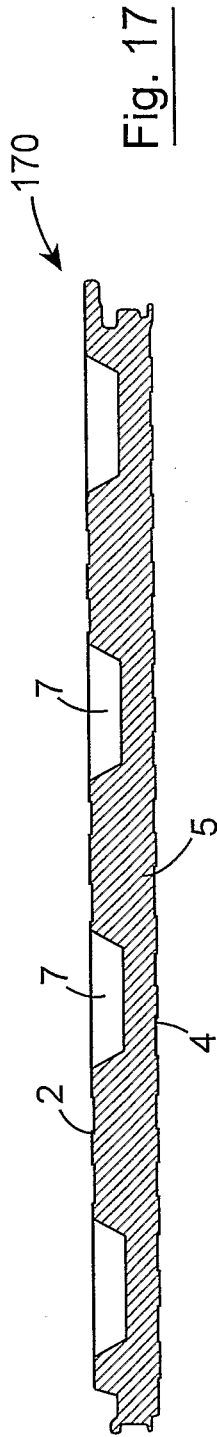
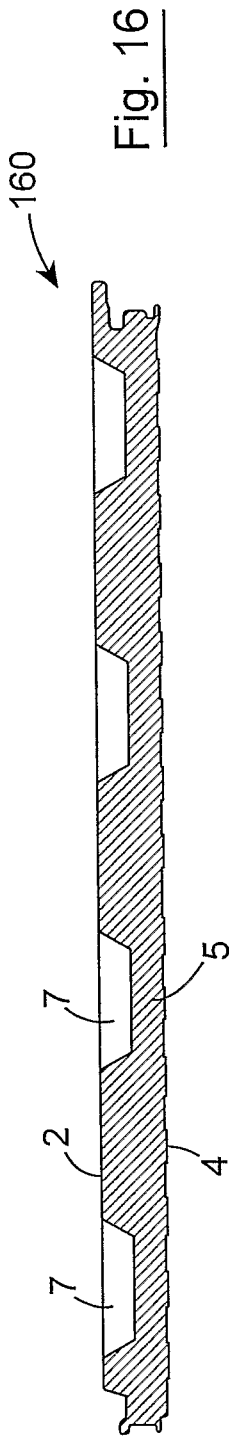


Fig. 20

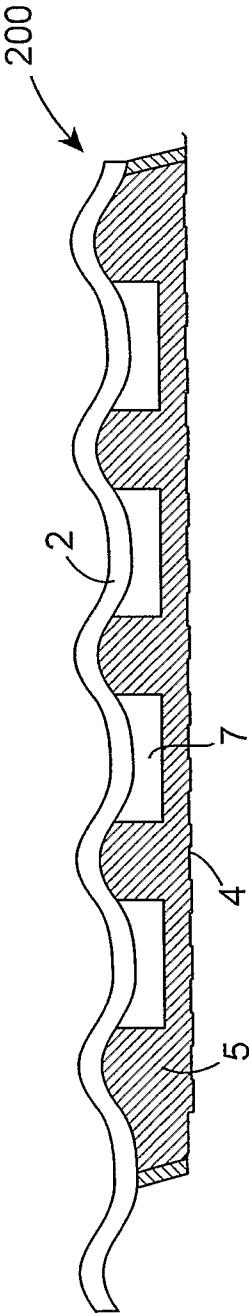


Fig. 21

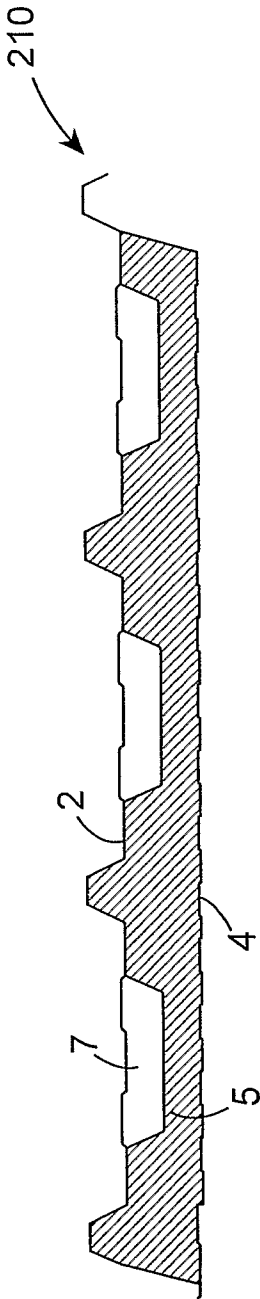
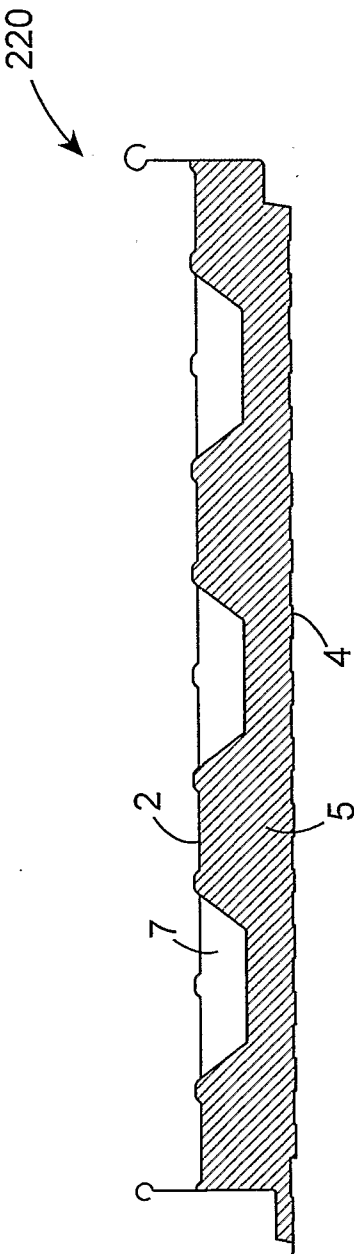
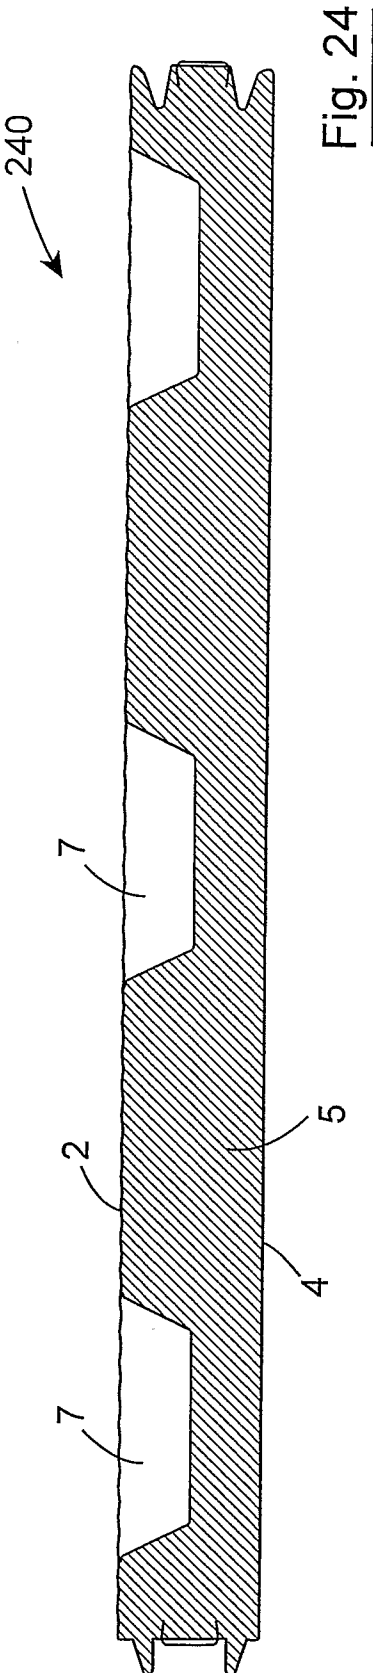
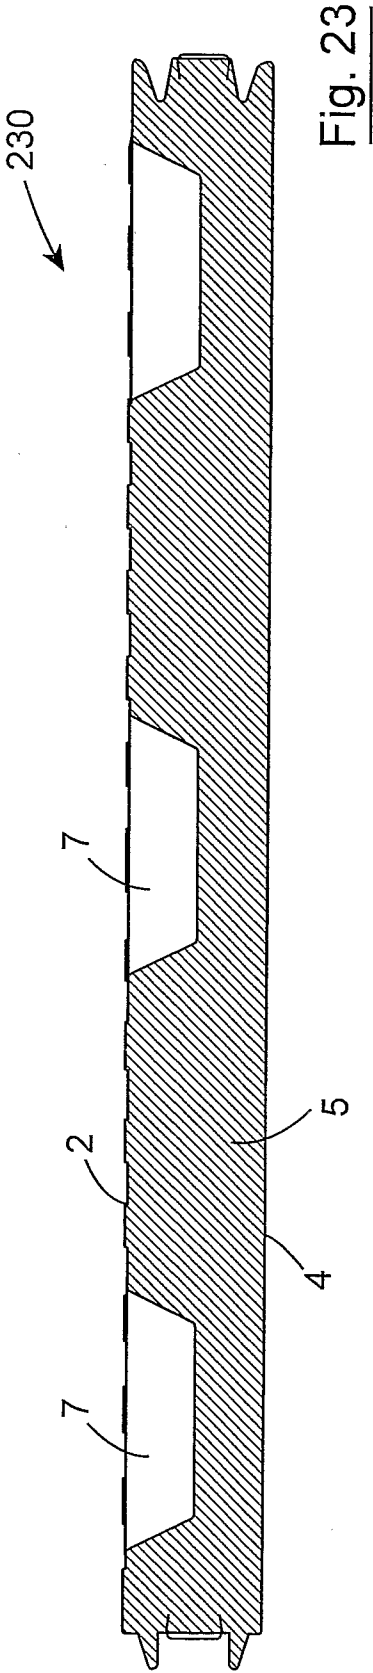
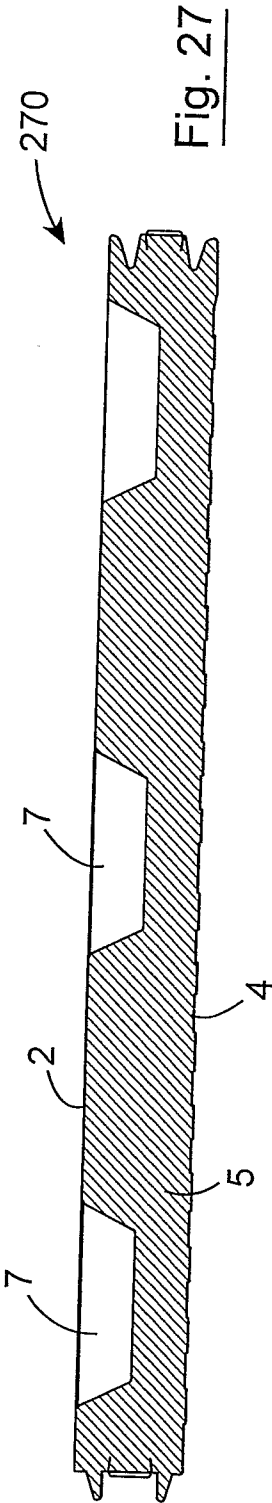
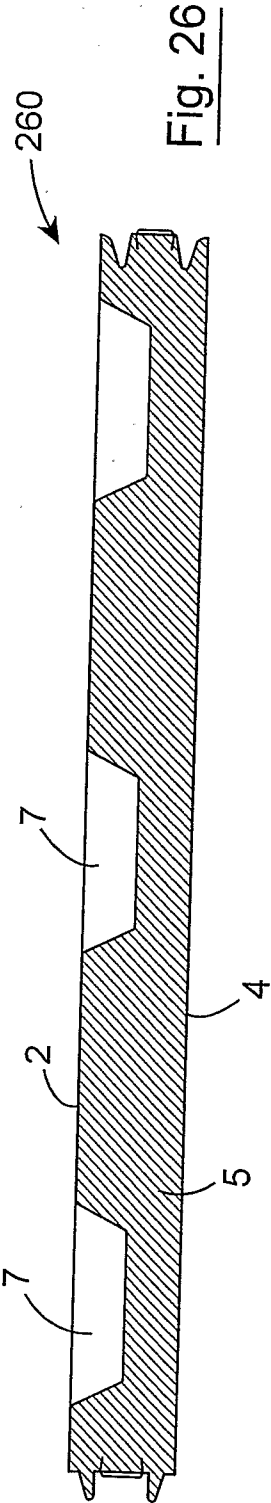
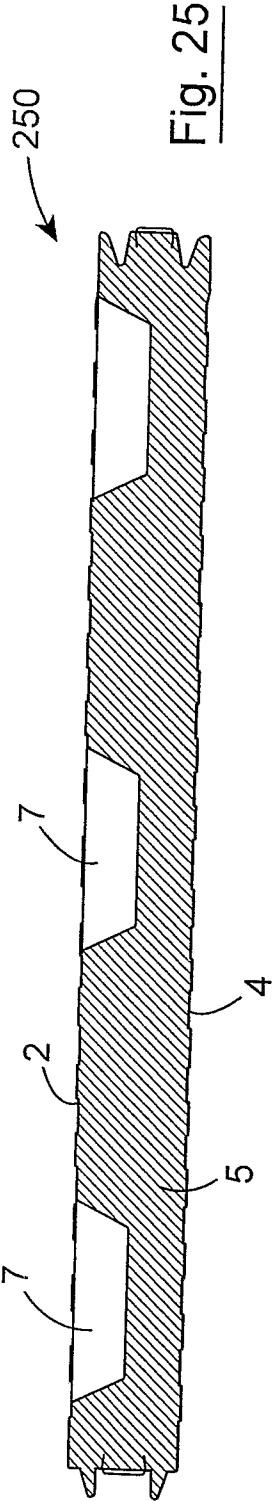






Fig. 22









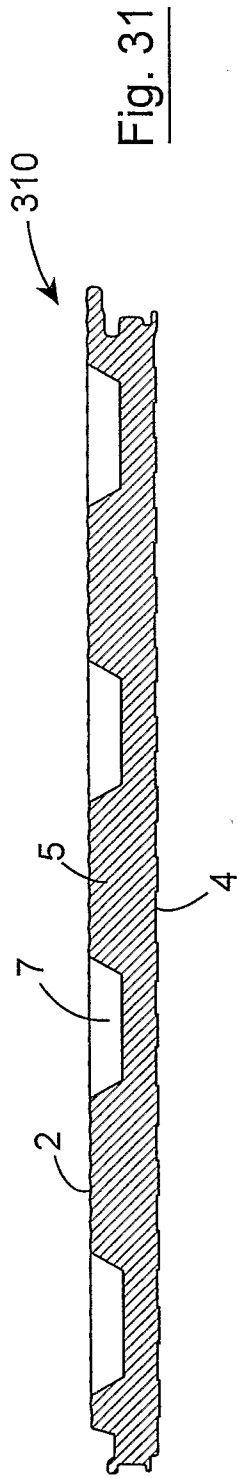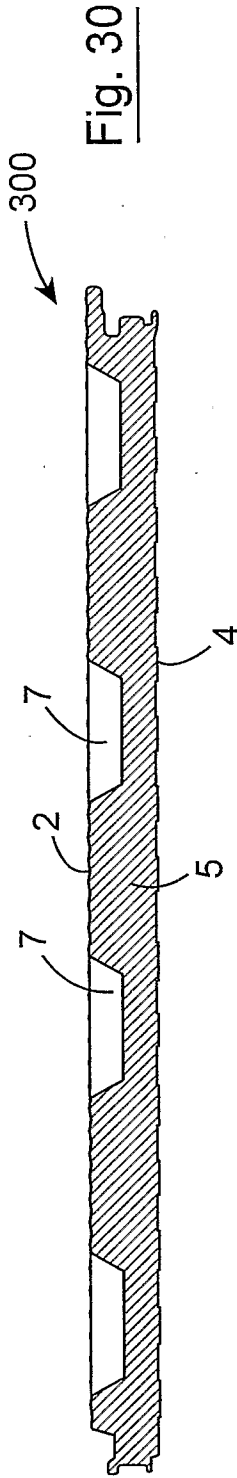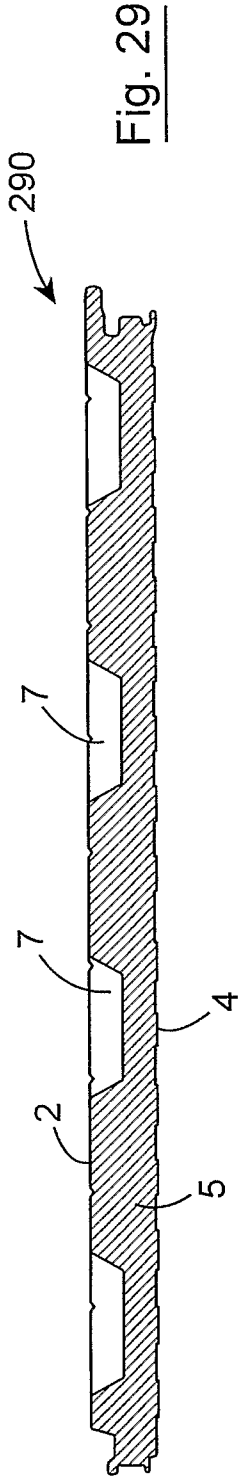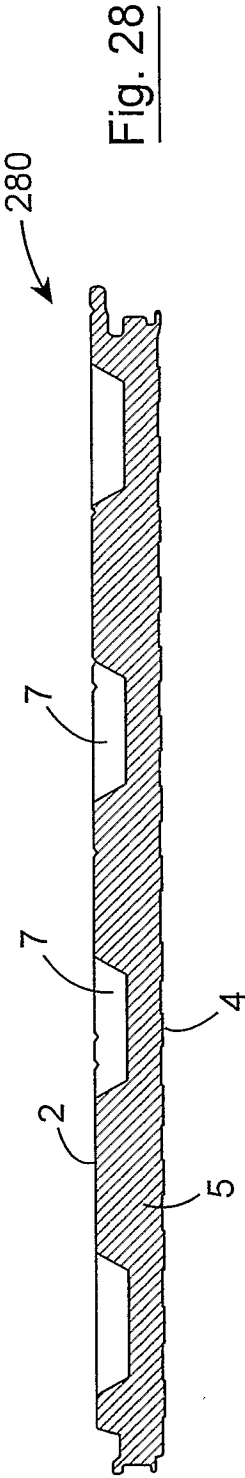

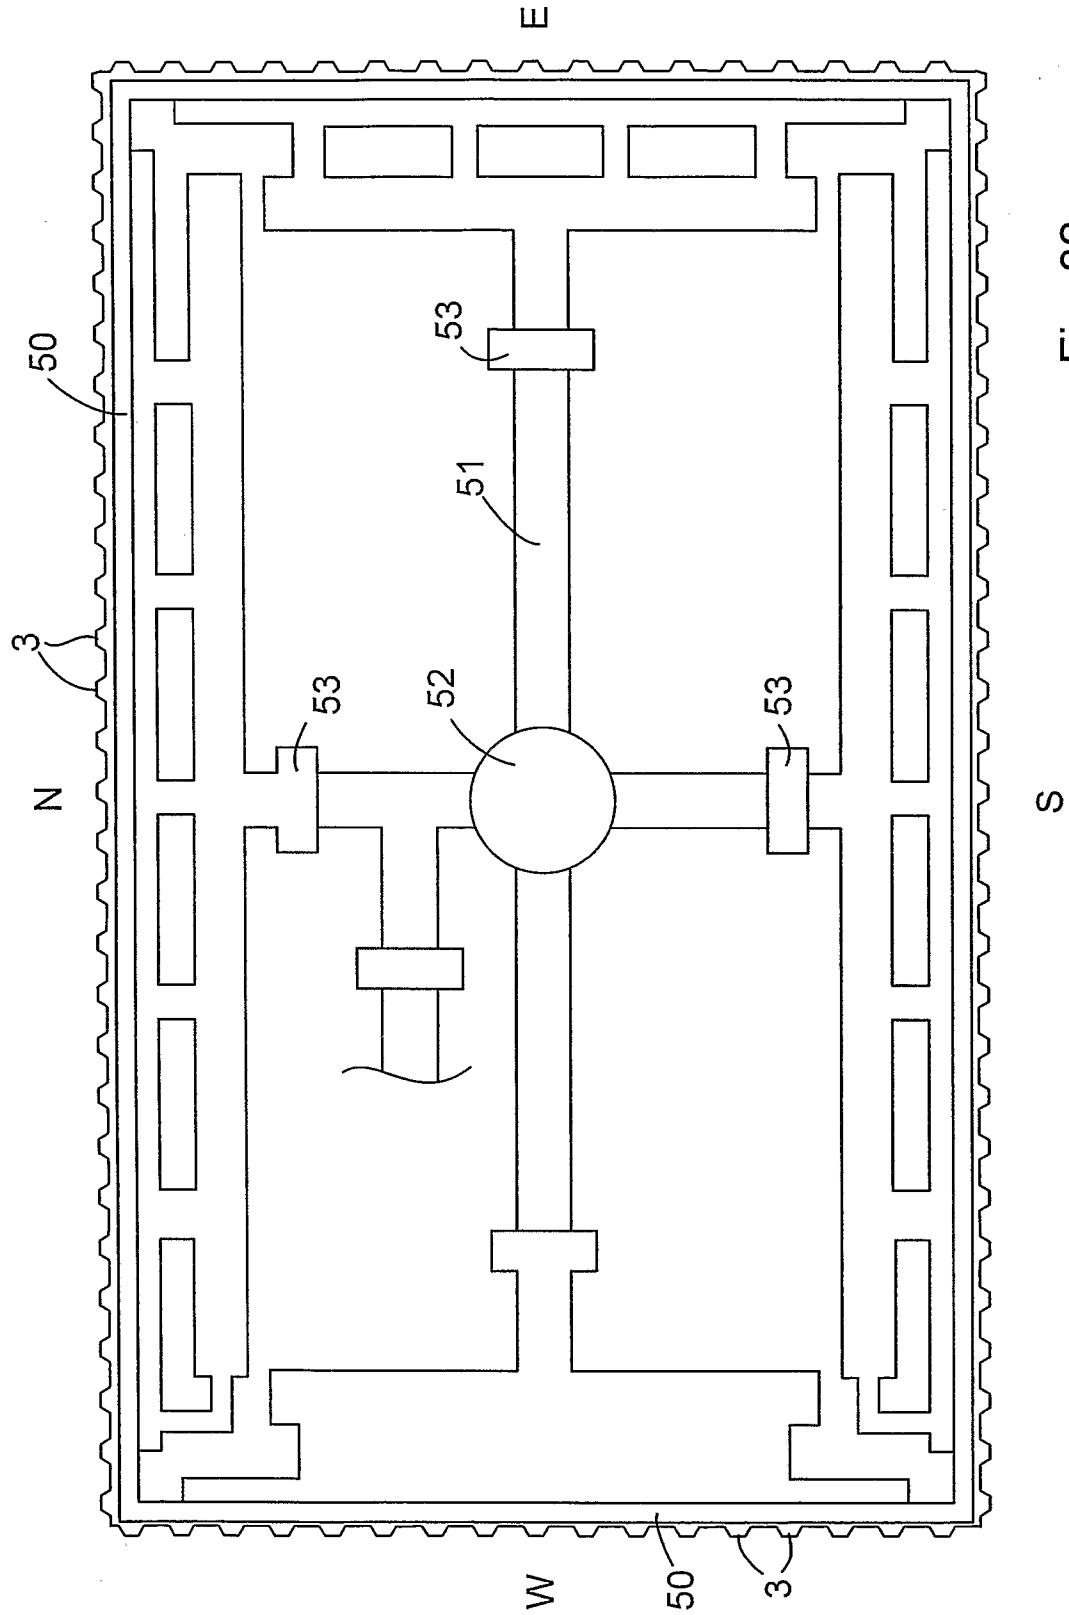


Fig. 32

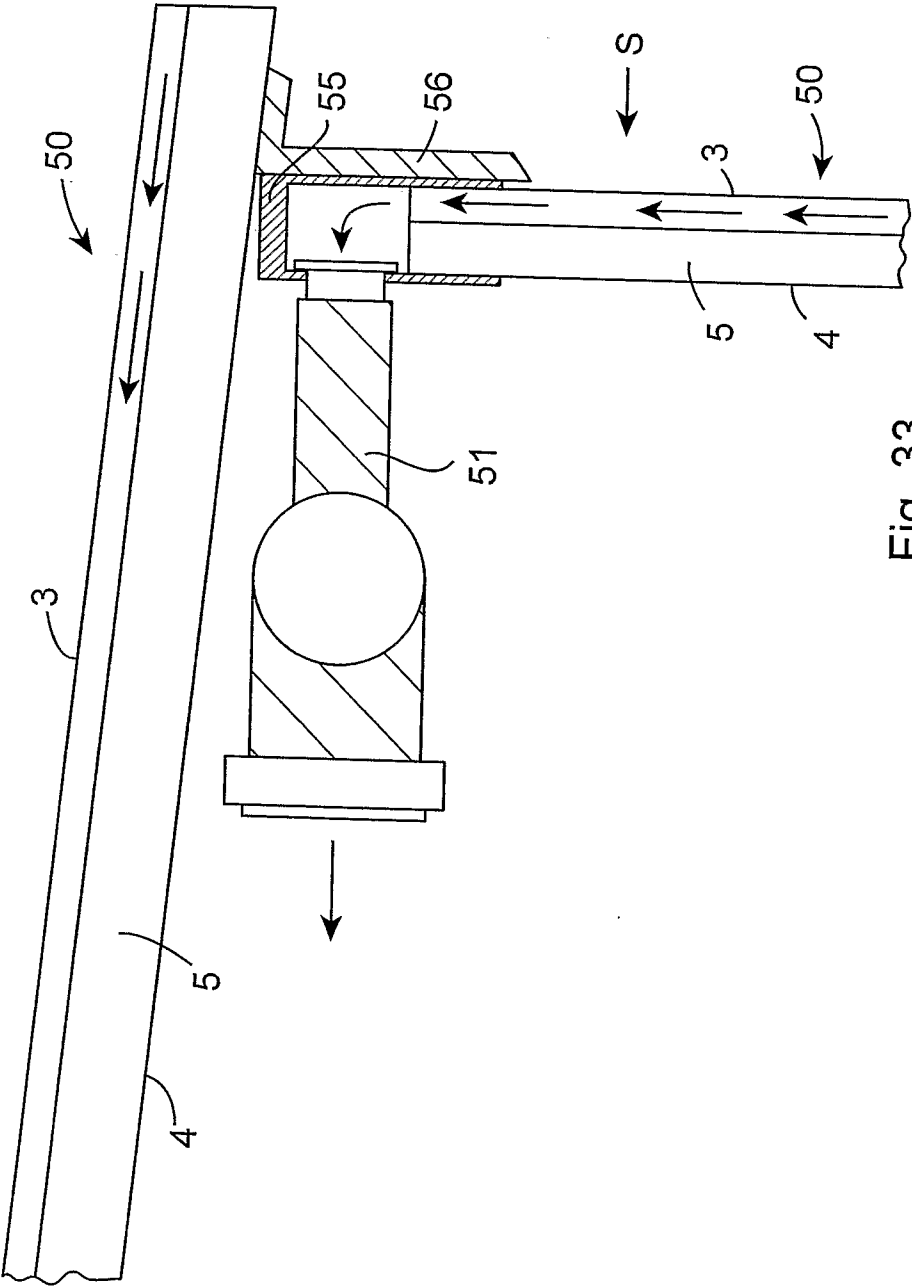


Fig. 33

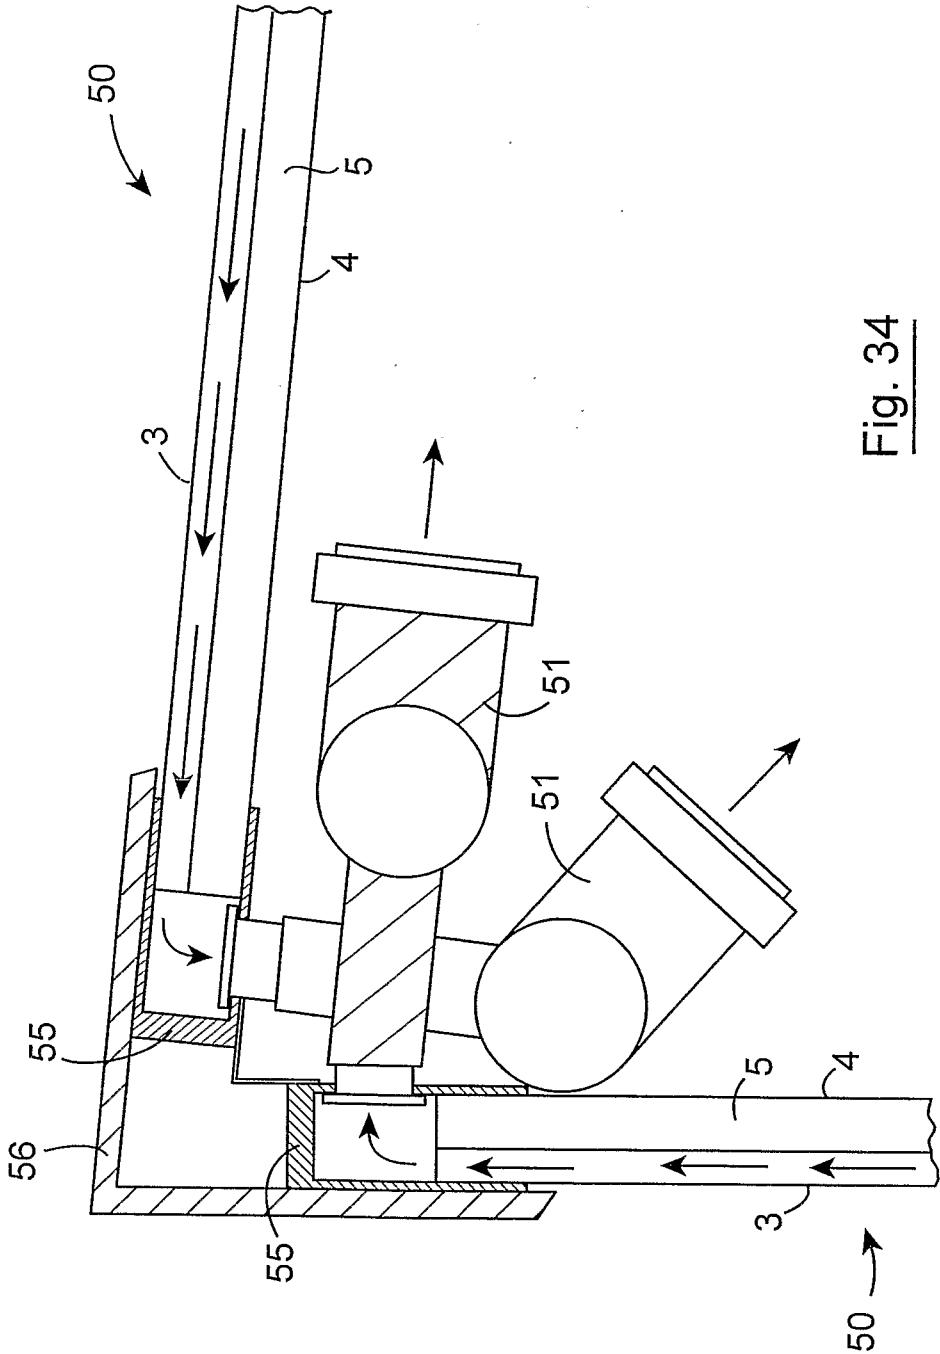


Fig. 34

# INTERNATIONAL SEARCH REPORT

International application No  
PCT/IE2008/000052

## A. CLASSIFICATION OF SUBJECT MATTER

INV. E04C2/52 E04D3/35 B29C44/58 F24D3/16

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

E04D E04C B29C F24D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE 12 74 320 B (HUETZEN G M B H H) 1 August 1968 (1968-08-01) column 1, line 1 - line 6 column 2, line 35 - line 49; claim 1; figure 2	1,2,4,5
Y	column 3, line 24 - line 28	18
X	EP 0 278 489 A (MAY HANS JOSEF [DE]; SCHNETTLER ROLAND [DE]; SCHWEINSBERG BERNHARD [DE] 17 August 1988 (1988-08-17) column 3, line 27 - column 4, line 21; claims 1-6; figures 1-6	1-5,15, 40
A	column 4, line 33 - column 5, line 5; claims 6,7; figures 7,8	31-39
	-/--	

☒ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

\* Special categories of cited documents:

\*A\* document defining the general state of the art which is not considered to be of particular relevance

\*E\* earlier document but published on or after the international filing date

\*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

\*O\* document referring to an oral disclosure, use, exhibition or other means

\*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*&\* document member of the same patent family

Date of the actual completion of the international search

5 August 2008

Date of mailing of the international search report

18/08/2008

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Giannakou, Evangelia

## INTERNATIONAL SEARCH REPORT

International application No  
PCT/IE2008/000052

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE 295 12 166 U1 (VAHLBRAUK KARL HEINZ [DE]) 23 November 1995 (1995-11-23) page 2, line 24 - line 29 page 4, line 7 - line 20 page 5, line 3 - line 5 page 8, line 3 - page 9, line 26; figure 1	1-5
X	WO 00/77459 A (TALFAB HOLDINGS LTD [GB]; TAYLOR PETER [GB]) 21 December 2000 (2000-12-21)  page 3, line 1 - line 19 page 4, line 24 - page 5, line 9 page 5, line 21 - line 22 page 11, line 1 - line 27 page 16, line 5 - line 6; claims 1-9, 15-17, 21; figures 1, 2, 3a-3c	1, 3-7, 13-15, 17, 19-27, 29, 30
Y		18, 28
X	DE 203 08 205 U1 (HELMSTAEDTER WERNER [DE]) 11 September 2003 (2003-09-11)  page 4, line 19 - page 5, line 2 page 5, line 1 - line 2 page 5, line 10 - line 15 page 6, line 26 - line 31 page 5, line 28 - line 32; claim 1; figures 1, 2 page 3, line 11 - line 12	1, 3-6, 8-13, 15, 16
Y		28
A	US 2005/146068 A1 (LIU KUN-CHUNG [TW]) 7 July 2005 (2005-07-07) claim 1; figure 4	31-39
A	EP 1 738 889 A (MANKAU DIETER [DE]) 3 January 2007 (2007-01-03) column 1, line 7 - line 15	31-39



# INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/IE2008/000052

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
DE 1274320	B	01-08-1968	NONE	
EP 0278489	A	17-08-1988	AU 1293688 A WO 8806259 A1 EP 0347416 A1	14-09-1988 25-08-1988 27-12-1989
DE 29512166	U1	23-11-1995	DE 19627967 A1	30-01-1997
WO 0077459	A	21-12-2000	AU 5542100 A	02-01-2001
DE 20308205	U1	11-09-2003	NONE	
US 2005146068	A1	07-07-2005	NONE	
EP 1738889	A	03-01-2007	DE 102005030984 A1	11-01-2007