



(86) Date de dépôt PCT/PCT Filing Date: 2015/12/04
(87) Date publication PCT/PCT Publication Date: 2016/06/09
(45) Date de délivrance/Issue Date: 2023/09/12
(85) Entrée phase nationale/National Entry: 2017/05/10
(86) N° demande PCT/PCT Application No.: US 2015/063986
(87) N° publication PCT/PCT Publication No.: 2016/090242
(30) Priorité/Priority: 2014/12/05 (US14/561,802)


(51) Cl.Int./Int.Cl. *B32B 7/12* (2006.01),
B32B 21/02 (2006.01), *B32B 37/12* (2006.01),
B32B 38/06 (2006.01)

(72) Inventeurs/Inventors:
MILLER, BYRD, TYLER, US;
RAMARATNAM, KARTHIK, US;
KESSLING, COURTNEY E., US;
PENCE, JUSTIN, S., US;
SEALEY, JAMES, E., US;
GAHAN, SHANNON, US;
ANKLAM, CHRIS, B., US;
ANDRUKH, TARAS, Z., US

(73) Propriétaire/Owner:

(54) Titre : SERVIETTE AVEC PROPRIETES D'ESSUYAGE HUMIDE DE QUALITE, APPAREIL ET PROCEDE POUR SA PRODUCTION

(54) Title: TOWEL WITH QUALITY WET SCRUBBING PROPERTIES AND AN APPARATUS AND METHOD FOR PRODUCING SAME

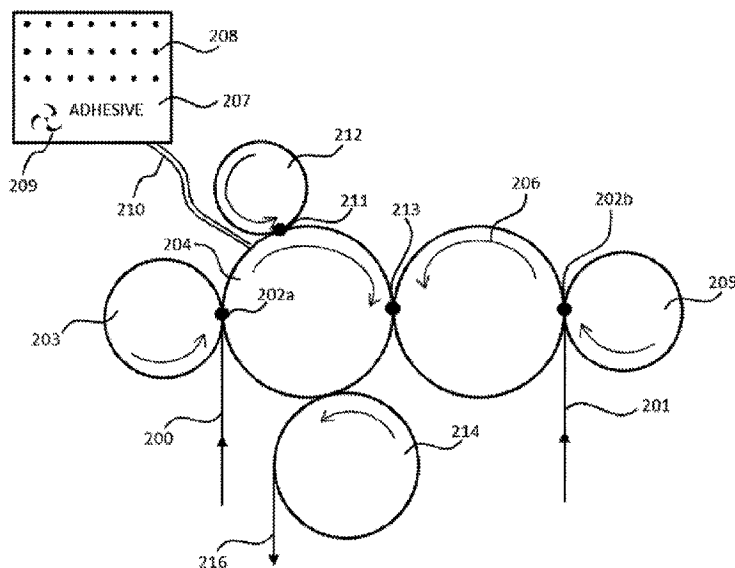

(57) Abrégé/Abstract:

A multi-ply absorbent product having a wet scrubbing resistance greater than 120 revolutions and a basis weight of between 30 and 50 grams per square meter. A heated adhesive is applied between two single plies / webs, the multiple plies are embossed

(73) **Propriétaires(suite)/Owners(continued)**:FIRST QUALITY TISSUE, LLC, US

(74) **Agent**: SMART & BIGGAR LP

(57) **Abrégé(suite)/Abstract(continued)**:

according to particular parameters, and the embossed webs are compressed with a marrying roll. The adhesive is heated to a temperature of between approximately 32 degrees C to 66 degrees C for application between the multiple plies. For each ply, the embossed area generally occupies between approximately 5 to 15 % of the total surface area of a surface of the ply, the depth of embossment of the surface is generally between approximately 0.28 and 0.43 centimeters deep, and the embossment of the surface is generally between approximately 0.04 to 0.08 square centimeters in size.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau

(43) International Publication Date
9 June 2016 (09.06.2016)



(10) International Publication Number
WO 2016/090242 A1

(51) International Patent Classification:

B32B 27/14 (2006.01) **D04H 3/12** (2006.01)
B32B 37/12 (2006.01) **D06N 7/04** (2006.01)
B32B 38/06 (2006.01)

(21) International Application Number:

PCT/US2015/063986

(22) International Filing Date:

4 December 2015 (04.12.2015)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

14/561,802 5 December 2014 (05.12.2014) US

(71) Applicant: **FIRST QUALITY TISSUE, LLC** [US/US];
80 Cutter Mill Road, Suite 500, Great Neck, NY 11021
(US).

(72) Inventors: **MILLER, Byrd, Tyler**; 116 Century Oaks Dr.,
Easley, SC 29642 (US). **RAMARATNAM, Karthik**; 202
Dandelion Trail, Anderson, SC 29621 (US).
KESLLILNG, Courtney, E.; 240 Terra Vista Street,
Howard, PA 16841 (US). **PENCE, Justin, S.**; 108 Tully
Drive, Anderson, SC 29621 (US). **SEALEY, James, E.**;
1051 Wild Deer Lane, Belton, SC 29627 (US). **GAHAN,
Shannon**; 300 Edgewood Avenue, Clemson, SC 29631
(US). **ANKLAM, Chris, B.**; 150 Easy Gap Road, Ander-

son, SC 29621 (US). **ANDRUKH, Taras, Z.**; 15 Caliston
Court, Greenville, SC 29615 (US).

(74) Agents: **HIRSHAUT, Tzvi** et al.; AMSTER, ROTH-
STEIN & EBENSTEIN LLP, 90 Park Avenue, New York,
NY 10016 (US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG,
MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM,
PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC,
SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,
TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU,
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,
DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, KM, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: TOWEL WITH QUALITY WET SCRUBBING PROPERTIES AND AN APPARATUS AND METHOD FOR PRODUCING SAME

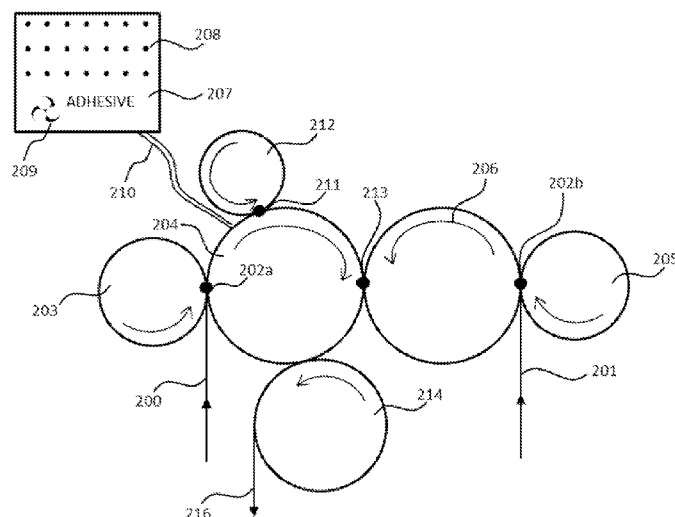


FIG. 3

(57) Abstract: A multi-ply absorbent product having a wet scrubbing resistance greater than 120 revolutions and a basis weight of between 30 and 50 grams per square meter. A heated adhesive is applied between two single plies / webs, the multiple plies are embossed according to particular parameters, and the embossed webs are compressed with a marrying roll. The adhesive is heated to a temperature of between approximately 32 degrees C to 66 degrees C for application between the multiple plies. For each ply, the embossed area generally occupies between approximately 5 to 15 % of the total surface area of a surface of the ply, the depth of embossment of the surface is generally between approximately 0.28 and 0.43 centimeters deep, and the embossment of the surface is generally between approximately 0.04 to 0.08 square centimeters in size.

WO 2016/090242 A1



Published:

— with international search report (Art. 21(3))

— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

TOWEL WITH QUALITY WET SCRUBBING PROPERTIES AND AN APPARATUS
AND METHOD FOR PRODUCING SAME

FIELD OF THE INVENTION

[0001] The present invention relates to absorbent products, such as paper towels, disposable towels or wipes, bath or facial tissues, or nonwoven products, having improved scrubbing properties at relatively low basis weights compared to conventional absorbent products.

BACKGROUND OF THE INVENTION

[0002] Across the globe there is great demand for disposable, absorbent products used for household cleaning tasks. Disposable towels and wipes meet this market demand. Disposable paper towels and wipes that are made of cellulosic based fibers are also nearly 100% renewable and biodegradable thus catering to those whom are eco-conscience. These disposable absorbent towels and wipes are used for a multitude of tasks that require absorbency and strength. These tasks include absorbing liquid spills, cleaning windows and mirrors, scrubbing countertops and floors, scrubbing and drying dishes, washing/cleaning bathroom sinks and toilets, and even drying/cleaning hands and faces. A disposable towel or wipe that can perform these demanding tasks and be produced at a price point that provides a value proposition to the consumer is advantageous.

[0003] To increase the strength of these absorbent products, more than one layer of web (or ply) can be laminated together. It is generally understood that a multi-ply absorbent product can also have an absorbent capacity greater than the sum of the absorbent capacities of the individual single plies. It is thought that this difference is due to the inter-ply storage space created by the addition of an extra ply. When producing a multi-ply absorbent product, the

plies are bonded together in a manner that will hold up when subjected to the forces encountered when the product is used by the consumer. Scrubbing tasks such as cleaning countertops, dishes, and windows all impart forces upon the structure of the absorbent product which can cause the structure to rupture and tear. When the bonding between plies fails, the plies move against each other imparting frictional forces at the ply interface. This frictional force at the ply interface can induce failure (rupture or tearing) of the structure thus reducing the overall effectiveness of the product to perform scrubbing and cleaning tasks.

SUMMARY OF THE INVENTION

[0004] An object of the present invention is to provide a multi-ply absorbent product, such as a paper towel, a disposable towel or wipe, a bath or facial tissue, or a nonwoven product, that has a relatively high scrubbing resistance to tear or rupture during use of the product, as compared to conventional multi-ply absorbent products.

[0005] Another object of the present invention is to provide a method and apparatus for adhesively laminating single ply absorbent products to produce a multi-ply absorbent product that has a relatively high scrubbing resistance to tear or rupture during use, as compared to conventional multi-ply absorbent products.

[0006] Another object of the present invention is to achieve a multi-ply absorbent product that attains a high level of scrubbing performance at a relatively low basis weight, as compared to conventional multi-ply absorbent products.

[0007] To accomplish at least these objects, in some embodiments, an absorbent fibrous product comprises a laminate of at least two webs/plies of absorbent fibrous products that are embossed and adhered together to achieve a wet scrubbing resistance greater than 120 revolutions and a basis weight of between 30 and 50 grams per square meter of the laminate. In embodiments, one or more of the plies may be formed from cellulosic-based fibers or synthetic fibers, and may be formed with a wet-laid or an air-laid technology. The multi-ply absorbent product may be one of a paper towel, a disposable towel or wipe, a bath or facial tissue, or a nonwoven product.

[0008] Also, in some embodiments, an absorbent fibrous product comprises a laminate of at least two plies, wherein each of the at least two plies is embossed and the at least two plies are adhered together. At least one of the at least two plies comprises a first layer, a second layer, and a third layer located between said first and second layers, the absorbent fibrous product having a wet scrubbing resistance greater than 120 revolutions and a basis weight of between 30 and 50 grams per square meter.

[0009] In embodiments, a method for laminating the at least two plies together to form a multi-ply absorbent fibrous product comprises embossing the at least two plies and applying a heated adhesive, such as a water soluble adhesive mixture, to an interior side of at least one of the at least two plies to adhere the at least two plies together, wherein the interior side is a side of a ply that comes into face-to-face relationship with another ply for lamination and wherein the adhesive is heated prior to being applied, and marrying the at least two plies that have been embossed after the heated adhesive has been applied. A laminate of the at least two plies is obtained. This method achieves an absorbent fibrous product that is a laminate with a wet scrubbing resistance greater than 120 revolutions and a basis weight of between 30 and 50 grams per square meter of the laminate. In embodiments, the step of embossing is performed using embossing rolls having embossing knobs with crests. In embodiments, the heated adhesive is applied with an adhesive applicator roll to the absorbent product at the crests of the embossing knobs. In embodiments, the adhesive is maintained at a temperature of between approximately 32 degrees C to 66 degrees C. The adhesive may be maintained at the desired temperature in an insulated tank that is heated and the adhesive may also be agitated while in the insulated tank.

[0010] In embodiments of the present invention, the water soluble adhesive mixture that is to be heated may comprise a mixture of (a) between approximately 1% to 10% by weight of polyvinyl alcohol, polyvinyl acetate, starch based resins or mixtures thereof, and (b) between 80% to 99 % by weight of water, and, in embodiments, the mixture may further comprise (c) up to 10% by weight of a water soluble cationic resin selected from the group consisting of polyamide-epichlorohydrin resins, glyoxalated polyacrylamide resins, polyethyleneimine resins, polyethylenimine resins, or mixtures thereof.

[0011] Additionally, in some embodiments, each of the at least two plies comprises an embossed area, wherein the embossed area occupies between approximately 5 to 15% of the surface area, wherein a depth of embossment is between approximately 0.28 and 0.43 centimeters deep, and wherein each embossment is between approximately 0.04 to 0.08 square centimeters.

[0012] The present invention also discloses an apparatus for producing the laminate. In some embodiments, the apparatus comprises a plurality of embossing rolls, having a nip formed therebetween, that emboss the at least two plies of absorbent product. The apparatus further comprises an adhesive applicator roll, located upstream of the nip between the plurality of embossing rolls. The adhesive applicator roll applies an adhesive to an interior side of at least one of the embossed plies to adhere the at least two plies together, wherein the interior side is a side of a ply that comes into a face-to-face relationship with another ply for lamination. The apparatus further comprises a marrying roll, located downstream of the nip between the plurality of embossing rolls, that compresses the at least two plies of absorbent product that have been embossed and to which a heated adhesive has been applied so as to form a laminate of the at least two plies. Additionally, the apparatus comprises a heater for maintaining the

adhesive at a temperature of between approximately 32 degrees C to 66 degrees C during application of the adhesive.

[00012A] According to another aspect of the invention, there is provided an absorbent fibrous product. The absorbent fibrous product comprises a laminate of at least two fibrous plies, wherein each of the at least two fibrous plies is embossed and the at least two fibrous plies are adhered together, the absorbent fibrous product having a wet scrubbing resistance greater than 120 revolutions and a basis weight of between 30 and 50 grams per square meter.

[00012B] According to another aspect of the invention, there is provided a method for laminating at least two fibrous plies together to form a multi-ply absorbent fibrous product. The method comprises embossing the at least two fibrous plies, applying a heated adhesive to an interior side of at least one of the at least two fibrous plies to adhere the at least two fibrous plies together, wherein the interior side is a side of a ply that comes into a face-to-face relationship with another ply for lamination and wherein the adhesive is heated prior to being applied, and marrying the at least two fibrous plies that have been embossed after the heated adhesive has been applied, whereby a laminate of the at least two fibrous plies is obtained, and the laminate has a wet scrubbing resistance greater than 120 revolutions and a basis weight of between 30 and 50 grams per square meter.

[00012C] According to another aspect of the invention, there is provided an absorbent fibrous product. The absorbent fibrous product comprises a laminate of at least two fibrous plies, wherein each of the at least two fibrous plies is embossed and the at least two fibrous plies are adhered together, wherein at least one of the at least two fibrous plies comprises a first layer, a second layer, and a third layer located between said first and second layers, the absorbent

fibrous product having a wet scrubbing resistance greater than 120 revolutions and a basis weight of between 30 and 50 grams per square meter.

BRIEF DESCRIPTION OF THE DRAWINGS

[0013] Exemplary embodiments of the present invention will be described with references to the accompanying figures, wherein:

[0014] FIG. 1 is a schematic diagram of a three layer ply formed by a Wet Laid process for use in an exemplary embodiment of the present invention;

[0015] FIG. 2 is a block diagram of a system for manufacturing one ply of a laminate according to an exemplary embodiment of the present invention;

[0016] FIG. 3 is a block diagram of a system for manufacturing a multi-ply absorbent product according to an exemplary embodiment of the present invention;

[0017] FIG. 4 shows an embodiment of an absorbent product that has an embossment pattern in accordance with an exemplary embodiment of the present invention;

[0018] FIG. 5 is an exploded view of a towel sample mounted to an abrading table in accordance with an embodiment of the present invention;

[0019] FIG. 6 is a side view of an abrading table with a towel sample attached thereto in accordance with an embodiment of the present invention;

[0020] FIG. 7 is an exploded view of a specimen holder for abrasion testing towel samples in accordance with an embodiment of the present invention; and

[0021] FIG. 8 shows a top view of the textured polymer film of FIG. 7.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

- [0022]** An absorbent product according to an exemplary embodiment of the present invention includes two or more plies of absorbent products / webs laminated together to achieve a wet scrubbing resistance greater than 120 revolutions and a basis weight of between 30 and 50 grams per square meter of the laminate. These levels of wet scrubbing resistance and relatively low basis weight are achieved by applying a heated, water soluble adhesive between the two or more plies, embossing the plies, and then using a marrying roll following the embossment. The present invention also discloses an apparatus and method for producing the laminate.
- [0023]** The absorbent products or structures that are used for each of the two or more webs / plies can be manufactured by any known or later-discovered wet-laid, air-laid or spun-laid methods. In the wet-laid method, water is used to form a web. In the air-laid method, air is used to form a web.
- [0024]** Examples of some known wet-laid technologies that may be used to form a cellulosic (or other natural or synthetic fiber type) web include Through Air Drying (TAD), Uncreped Through Air Drying (UCTAD), Conventional Wet Crepe (CWC), Conventional Dry Crepe (CDC), Advanced Tissue Molding System (ATMOS), NTT, and ETAD.
- [0025]** In Conventional Dry Crepe and Conventional Wet Crepe methods, a nascent web is formed in a forming structure, the web is transferred to a dewatering felt where it is pressed to remove moisture, and the web is then adhered to a Yankee Dryer. The web is then dried and creped from the Yankee Dryer and reeled. When creped at a solids content of less than

90%, the process is referred to as Conventional Wet Crepe. When creped at a solids content of greater than 90%, the process is referred to as Conventional Dry Crepe.

[0026] The CWC and CDC methods are easy to operate at high speeds and production rates. Energy consumption per ton is low since nearly half of the water removed from the web is through drainage and mechanical pressing. However, the sheet pressing also compacts the web which lowers web thickness and resulting absorbency.

[0027] The Through Air Drying (TAD) and Uncreped Through Air Drying (UCTAD) processes are wet-laid technologies that avoid compaction of the web during drying and thereby produce absorbent products of superior thickness and absorbency when compared to absorbent products of similar basis weight and material inputs that are produced using the CWC or the CDC process.

[0028] Other wet-laid processes, such as ATMOS, ETAD, and NTT, can also be utilized to produce absorbent products. Each process/method utilizes some pressing to dewater the web, or a portion of the web, resulting in absorbent products with absorbent capacities that correlate to the amount of pressing utilized when all other variables are the same.

[0029] Absorbent products may alternatively be made using an air-laid process. In this process, an air stream of cellulosic, or other natural or synthetic fibers, is directed onto a moving belt. The fibers collect together to form a web that can be thermally bonded or spray bonded with resin and cured. Compared to the wet-laid process, the web is thicker, softer, more absorbent, stronger and has a textile-like surface and drape.

[0030] The spun-laid process is a variation of the air-laid process. In the spun-laid process, plastic fibers (polyester or polypropylene) are spun (melted, extruded, and blown) and then directly spread into a web in one continuous process. This technique has gained popularity as it can generate faster belt speeds and reduce costs.

[0031] The materials used to produce the absorbent products can be fibers in any ratio selected from cellulosic-based fibers, such as wood pulps (softwood gymnosperms or hardwood angiosperms), cannabis, cotton, regenerated or spun cellulose, jute, flax, ramie, bagasse, kenaf, or other plant based cellulosic fiber sources. Synthetic fibers, such as a polyolefin (*e.g.*, polypropylene), polyester, or polylactic acid can also be used. Each ply of a multi-ply absorbent product of the present invention may comprise cellulosic based fibers and/or synthetic fibers. Also, all the plies may be made of the same type(s) of fibers or different fibers may be used in some or all of the plies.

[0032] FIGs. 1 and 2 illustrate a single ply absorbent product and a method for manufacturing the tissue product in which a TAD drying method is used. The content of U.S. Patent Application Ser. No. 13/837,685, which describes such an absorbent, soft TAD tissue is assigned to applicant.

[0033] FIG. 1 shows an example of a single ply, three layer tissue generally designated by reference number 1 that has external (exterior) layers 2 and 4 as well as an internal (interior), core layer 3. In the figure, the three layers of the tissue from top to bottom are labeled as air 4, core 3 and dry (or Yankee) 2. External layer 2 is composed primarily of hardwood fibers 20 whereas external layer 4 and core layer 3 are composed of a combination of hardwood fibers 20 and softwood fibers 21. External layer 2 further includes

a dry strength additive 7. External layer 4 further includes both a dry strength additive 7 and a temporary wet strength additive 8.

[0034] Pulp mixes for exterior layers of the tissue are prepared with a blend of primarily hardwood fibers. For example, the pulp mix for at least one exterior layer is a blend containing about 70 percent or greater hardwood fibers relative to the total percentage of fibers that make up the blend. As a further example, the pulp mix for at least one exterior layer is a blend containing about 90-100 percent hardwood fibers relative to the total percentage of fibers that make up the blend.

[0035] Pulp mixes for the interior layer of the tissue are prepared with a blend of primarily softwood fibers. For example, the pulp mix for the interior layer is a blend containing about 70 percent or greater softwood fibers relative to the total percentage of fibers that make up the blend. As a further example, the pulp mix for the interior layer is a blend containing about 90-100 percent softwood fibers relative to the total percentage of fibers that make up the blend.

[0036] As known in the art, pulp mixes are subjected to a dilution stage in which water is added to the mixes so as to form a slurry. After the dilution stage but prior to reaching the headbox, each of the pulp mixes are dewatered to obtain a thick stock of about 95% water. In an exemplary embodiment of the invention, wet end additives are introduced into the thick stock pulp mixes of at least the interior layer.

[0037] In an exemplary embodiment, a dry strength additive is added to the thick stock mix for at least one of the exterior layers. The dry strength additive may be, for example, amphoteric starch, added in a range of about 1 to 40 kg/ton. In another exemplary

embodiment, a wet strength additive is added to the thick stock mix for at least one of the exterior layers. The wet strength additive may be, for example, glyoxalated polyacrylamide, commonly known as GPAM, added in a range of about 0.25 to 5 kg/ton. In a further exemplary embodiment, both a dry strength additive, preferably amphoteric starch and a wet strength additive, preferably GPAM are added to one of the exterior layers. Without being bound by theory, it is believed that the combination of both amphoteric starch and GPAM in a single layer when added as wet end additives provides a synergistic effect with regard to strength of the finished tissue. Other exemplary temporary wet-strength agents include aldehyde functionalized cationic starch, aldehyde functionalized polyacrylamides, acrolein co-polymers and cis-hydroxyl polysaccharide (guar gum and locust bean gum) used in combination with any of the above mentioned compounds.

[0038] In addition to amphoteric starch, suitable dry strength additives may include but are not limited to glyoxalated polyacrylamide, cationic starch, carboxy methyl cellulose, guar gum, locust bean gum, cationic polyacrylamide, polyvinyl alcohol, anionic polyacrylamide or a combination thereof.

[0039] FIG. 2 is a block diagram of a system for manufacturing such a three layer tissue, generally designated by reference number 100, according to an exemplary embodiment of the present invention. The system 100 includes a first exterior layer fan pump 102, a core layer fan pump 104, a second exterior layer fan pump 106, a headbox 108, a forming section 110, a drying section 112 and a calender section 114. The first and second exterior layer fan pumps 102, 106 deliver the pulp mixes of the first and second external layers 2, 4 to the headbox 108, and the core layer fan pump 104 delivers the pulp mix of the core layer 3 to

the headbox 108. As is known in the art, the headbox delivers a wet web of pulp onto a forming wire within the forming section 110. The wet web is then laid on the forming wire with the core layer 3 disposed between the first and second external layers 2, 4.

[0040] After formation in the forming section 110, the partially dewatered web is transferred to the drying section 112. Within the drying section 112, the tissue may be dried using conventional through air drying processes. In an exemplary embodiment, the tissue is dried to a humidity of about 7 to 20% using a through air drier manufactured by Metso Corporation, of Helsinki, Finland. In another exemplary embodiment, two or more through air drying stages are used in series. However, it should be emphasized that this is only one of various methods of manufacturing an absorbent tissue product to be used in manufacturing the laminate of the present invention.

[0041] In an exemplary embodiment, the tissue of the present invention is patterned during the through air drying process. Such patterning can be achieved through the use of a TAD fabric, such as a G-weave (Prolux 003) or M-weave (Prolux 005) TAD fabric.

[0042] After the through air drying stage, the tissue of the present invention may be further dried in a second phase using a Yankee drying drum. In an exemplary embodiment, a creping adhesive is applied to the drum prior to the tissue contacting the drum. A creping blade is then used to remove the tissue from the Yankee drying drum. The tissue may then be calendered in a subsequent stage within the calendar section 114. According to an exemplary embodiment, calendaring may be accomplished using a number of calendar rolls (not shown) that deliver a calendering pressure in the range of 0-100 pounds per linear inch

(PLI). In general, increased calendering pressure is associated with reduced caliper and a smoother tissue surface.

[0043] According to an exemplary embodiment of the invention, a ceramic coated creping blade is used to remove the tissue from the Yankee drying drum. Ceramic coated creping blades result in reduced adhesive build up and aid in achieving higher run speeds. Without being bound by theory, it is believed that the ceramic coating of the creping blades provides a less adhesive surface than metal creping blades and is more resistant to edge wear that can lead to localized spots of adhesive accumulation. The ceramic creping blades allow for a greater amount of creping adhesive to be used which in turn provides improved sheet integrity and faster run speeds.

[0044] In addition to the use of wet end additives, the tissue of the present invention may also be treated with topical or surface deposited additives. Examples of surface deposited additives include softeners for increasing fiber softness and skin lotions. Examples of topical softeners include but are not limited to quaternary ammonium compounds, including, but not limited to, the dialkyldimethylammonium salts (e.g. ditallowdimethylammonium chloride, ditallowdimethylammonium methyl sulfate, di(hydrogenated tallow)dimethyl ammonium chloride, etc.). Another class of chemical softening agents include the well-known organo-reactive polydimethyl siloxane ingredients, including amino functional polydimethyl siloxane. zinc stearate, aluminum stearate, sodium stearate, calcium stearate, magnesium stearate, spermaceti, and steryl oil.

[0045] To enhance the strength and absorbency of these towels and wipes, multiple plies are laminated together using a heated adhesive, as described below with respect to FIG. 3. The

adhesive mixture is water soluble and includes a mixture of one or more adhesives, one or more water soluble cationic resins and water. The one or more adhesives are present in an amount of 1% to 10% by weight and may be polyvinyl alcohol, polyvinyl acetate, starch based resins and/or mixtures thereof. A water soluble cationic resin may be present in an amount of up to 10% by weight and may include polyamide-epichlorohydrin resins, glyoxalated polyacrylamide resins, polyethyleneimine resins, polyethylenimine resins, and/or mixtures thereof. The remainder of the mixture is composed of water.

[0046] FIG. 3 shows an apparatus for manufacturing a laminate of two plies of an absorbent product that are joined to each other, in a face-to-face relationship, in accordance with an exemplary embodiment of the present invention to form an absorbent product, such as a paper towel. As shown in the figure, two webs 200, 201 of single ply tissue, which may be manufactured, for example, according to a method described above, are fed to respective pairs of mated pressure rolls 203, 205 and substantially axially parallel embossing rolls 204, 206. A first web 200 is thus fed through a nip 202a formed by pressure roll 203 and embossing roll 204 (also known as a pattern roll) and a second web 201 is likewise fed through a nip 202b between pressure roll 205 and embossing roll 206. The embossing rolls 204, 206, which rotate in the illustrated directions, impress an embossment pattern onto the webs as they pass through nip 202a and 202b. After being embossed, each ply may have a plurality of embossments protruding outwardly from the plane of the ply towards the adjacent ply. The adjacent ply likewise may have opposing protuberances protruding towards the first ply. If a three ply product is produced by adding a third pair of mated pressure and embossing rolls, the central ply may have embossments extending outwardly in both directions.

[0047] To perform the embossments at nips 202a and 202b, the embossing rolls 204, 206 have embossing tips or embossing knobs that extend radially outward from the rolls to make the embossments. In the illustrated embodiment, embossing is performed by nested embossing in which the crests of the embossing knobs on one embossing roll intermesh with the embossing knobs on the opposing embossing roll and a nip is formed between the embossing rolls. As the web is fed through nips 202a and 202b, a pattern is produced on the surface of the web by the interconnectivity of the knobs on an embossing roll with the open spaces of the respective pressure roll.

[0048] An adhesive applicator roll 212 is positioned upstream of the nip 213 formed between the two embossing rolls and is aligned in an axially parallel arrangement with one of the two embossing rolls to form a nip therewith. The heated adhesive is fed from an adhesive tank 207 via a conduit 210 to applicator roll 212. The applicator roll 212 transfers heated adhesive to an interior side of embossed ply 200 to adhere the at least two plies 200, 201 together, wherein the interior side is the side of ply 200 that comes into a face-to-face relationship with ply 201 for lamination. The adhesive is applied to the ply at the crests of the embossing knobs on embossing roll 204.

[0049] Notably, in the present invention, the adhesive is heated and maintained at a desired temperature utilizing, in embodiments, an adhesive tank 207, which is an insulated stainless steel tank that may have heating elements 208 that are substantially uniformly distributed throughout the interior heating surface. In this manner, a large amount of surface area may be heated relatively uniformly. Generally, an adjustable thermostat may be used to control the temperature of the adhesive tank 207. It has been found advantageous to maintain the temperature of the adhesive at between approximately 32 degrees C (90 degrees F) to 66

degrees C (150 degrees F), and preferably to around 49 degrees C (120 degrees F). In addition, in embodiments, the tank has an agitator 209 to ensure proper mixing and heat transfer.

[0050] The webs are then fed through the nip 213 where the embossing patterns on each embossing roll 204, 206 mesh with one another.

[0051] In nested embossing, the crests of the embossing knobs typically do not touch the perimeter of the opposing roll at the nip formed therebetween. Therefore, after the application of the embossments and the adhesive, a marrying roll 214 is used to apply pressure for lamination. The marrying roll 214 forms a nip with the same embossing roll 204 that forms the nip with the adhesive applicator roll 212, downstream of the nip formed between the two embossing rolls 204, 206. The marrying roll 214 is generally needed because the crests of the nested embossing knobs typically do not touch the perimeter of the opposing roll 206 at the nip 213 formed therebetween.

[0052] The specific pattern that is embossed on the absorbent products is significant for achieving the enhanced scrubbing resistance of the present invention. In particular, it has been found that the embossed area on any ply should cover between approximately 5 to 15% of the surface area. Moreover, the size of each embossment should be between approximately 0.04 to 0.08 square centimeters. The depth of the embossment should be within the range of between approximately 0.28 and 0.43 centimeters (0.110 and 0.170 inches) in depth.

[0053] FIG. 4 shows a sample pattern embossed on the absorbent product according to an embodiment of the present invention. In the illustrated pattern, the embossed area covers approximately 13% of the surface, the embossment depth is approximately 0.34 centimeters (0.135 inches) deep, and the embossment diameter is approximately 0.92 centimeters (0.115 inches) across.

[0054] The following discussion describes the tests that were used to determine the basis weights and wet scrubbing measurements in connection with the present invention.

BASIS WEIGHT

[0055] The basis weight for the present invention was measured in grams/m² using the following process. Using a dye and press, six approximately 76.2mm by 76.2mm (approximately 3 inch x 3 inch) square samples were cut from each two-ply product that was tested with care taken to avoid including any web perforations in the samples. The samples were placed in an oven at 105 degrees Celsius for 5 minutes and were thereafter weighed on an analytical balance to the fourth decimal point. The weight of the sample in grams was then divided by (0.0762m)² to determine the basis weight in grams/m².

WET SCRUBBING TEST METHOD

[0056] A wet scrubbing test was used to measure the durability of a wet towel. The test involved scrubbing a sample wet towel with an abrasion tester and recording the number of revolutions of the tester it takes to break the sample. Multiple samples of the same product were tested and an average durability for that product was determined. The measured

durability was then compared with similar durability measurements for other wet towel samples.

[0057] An abrasion tester was used for the wet scrubbing test. The particular abrasion tester that was used was an M235 Martindale Abrasion and Pilling Tester (“M235 tester”) from SDL Atlas Textile Testing Solutions. The M235 tester provides multiple abrading tables on which the samples are abrasion tested and specimen holders that abrade the towel samples to enable multiple towel samples to be simultaneously tested. A motion plate is positioned above the abrading tables and moves the specimen holders proximate the abrasion tables to make the abrasions.

[0058] In preparation for the test, eight (8) towel samples, approximately 140 mm (about 5.51 inches) in diameter, were cut. Additionally, four (4) pieces, also approximately 140 mm (approximately 5.51 inches) in diameter, were cut from an approximately $82 \pm 1 \mu\text{m}$ thick non-textured polymer film. The non-textured side of a Ziploc[®] Vacuum Sealer bag from Johnson & Johnson was used as the non-textured polymer film. However, any non-textured polymer film, such as high density polyethylene (HDPE), low density polyethylene (LDPE), polypropylene (PP), or polyester, to name a few, could be used. Additionally, four (4) 38 mm diameter circular pieces were cut from a textured polymer film with protruding passages on the surface to provide roughness. The textured polymer film that is used for this test is the textured side of a Ziploc[®] Vacuum Sealer bag from Johnson & Johnson. The textured film has a square-shaped pattern (FIG.8). The thickness of the protruding passages of the textured polymer film that are used are approximately $213 \pm 5 \mu\text{m}$ and the thickness of the film in the valley region of the textured film between the protruding passages are

approximately $131 \pm 5 \mu\text{m}$. The samples were cut using respective 140 mm diameter and 38 mm cutting dies and a clicker press.

[0059] An example of an abrading table used in conjunction with the M235 tester is shown in FIG. 5. FIG. 5 presents an exploded view of the attachment of a towel sample to an abrading table 1202. To insert each sample to be tested in an abrading table, the motion plate of an abrading table was removed from the tester, a clamp ring 1214 was unscrewed, a piece of smooth polymer film 1210 was placed on the abrading table 1202, and a towel sample 1212 was then placed on top of the smooth polymer film 1210. A loading weight 1215, shown in FIG. 6, was temporarily placed on top of the sample 1212 on the abrading table 1202 to hold everything in place while the clamp ring 1214 was reattached to abrading table 1202 to hold the towel sample 1212 in place.

[0060] Referring to FIG. 7, for each abrading table 1202 in the M235 tester, there is a corresponding specimen holder to perform the abrasion testing. The specimen holder was assembled by inserting a piece of the textured polymer film 216 within a specimen holder insert 218 that is placed beneath and held in place under a specimen holder body 220 with a specimen holder nut (not shown). A spindle 222 was mounted to the top center of the specimen holder body. A top view of the textured polymer film 216 of FIG.7 is shown in FIG.8.

[0061] The M235 tester was then turned on and set for a cycle time of 200 revolutions. 0.5mL of water was placed on each towel sample. After a 30 second wait, the scrubbing test was initiated, thereby causing the specimen holder to rotate 200 revolutions. The number of revolutions that it took to break each sample on the respective abrading table 1202

(the “web scrubbing resistance” of the sample) was recorded. The results for the samples of each product were averaged and the products were then rated based on the averages.

[0062] Table 1 lists the results of abrasion tests performed on the indicated products, the dates on which the tests were performed, and the number of revolutions that the respective product remained intact before it broke. Table 1 also lists the basis weight of each product that was calculated according to the basis weight test described above.

[0063] Table 1: Paper Towel Wet Scrub and Basis Weight Testing

Date	Product Name	Wet Scrub Revolutions	Basis Weight g/m²
03/20/2014	Bounty Duratowel®	244	62
05/19/2014	Bounty Duratowel®	82	62
08/05/2014	Bounty Duratowel®	200	62
06/01/2014	Example # 1	130	39
03/20/2014	Viva Vantage®	13	61
05/19/2014	Bounty Basic®	73	36-38
05/19/2014	Wegmans®	26	44
05/19/2014	Weis™	8	42-43
05/19/2014	Up & Up® - Target	22	43-45
05/30/2014	Up & Up® - Target	29	43-45
08/05/2014	Up & Up® - Target	68	43-45
05/19/2014	Brawny®	7	46-50
08/05/2014	Brawny®	39	46-50
05/30/2014	Great Value™	23	42-44
05/30/2014	Members Mark® - Walmart	33	43
05/30/2014	Kirkland Signature® Costco	34	40-41
08/05/2014	Kirkland Signature® Costco	43	40-41
05/30/2014	Safeway S®	17	44-45
08/05/2014	Sparkle®	36	44-46
05/19/2014	Bounty®	60	47-50
05/19/2014	Bounty®	42	47-50
05/30/2014	Bounty®	62	47-50
08/05/2014	Bounty Extra Soft®	62	55-57

[0064] It is apparent from the test results that the present invention achieves a laminate with superior web scrubbing resistance of greater than 120 revolutions while maintaining a relatively low basis weight, such as a basis weight approximately at or below 50 g/m² and preferably at a basis weight at or above 30 g/m².

[0065] Moreover, the multi-ply absorbent product of the present invention is strong and has excellent absorptive properties. Various additional tests can be performed to verify the superior absorptive properties and strength of the laminate formed by the present invention. They include ball burst testing, stretch & MD, CD and wet CD tensile strength testing, caliper testing and absorbency testing.

BALL BURST TESTING

[0066] The Ball Burst of a 2-ply tissue web was determined using a Tissue Softness Analyzer (TSA), available from emtec Electronic GmbH of Leipzig, Germany using a ball burst head and holder. A punch was used to cut out five 100 cm² round samples from the web. One of the samples was loaded into the TSA, with the embossed surface facing down, over the holder and held into place using the ring. The ball burst algorithm was selected from the list of available softness testing algorithms displayed by the TSA. The ball burst head was then pushed by the TSA through the sample until the web ruptured and calculated the grams force required for the rupture to occur. The test process was repeated for the remaining samples and the results for all the samples were averaged.

STRETCH & MD, CD, AND WET CD TENSILE STRENGTH TESTING

[0067] An Instron® 3343 tensile tester, manufactured by Instron of Norwood, MA, with a 100N load cell and 25.4 mm rubber coated jaw faces was used for tensile strength measurement. Prior to measurement, the Instron 3343 tensile tester was calibrated. After calibration, 8 strips of 2-ply product, each 2.54 cm by 10.16 cm (one inch by four inches), were provided as samples for each test. When testing MD (Material Direction) tensile strength, the strips are cut in the MD direction. When testing CD (Cross Direction) tensile strength, the strips are cut in the CD direction. One of the sample strips was placed in between the upper jaw faces and clamp, and then between the lower jaw faces and clamp with a gap of 5.08 cm (2 inches) between the clamps. A test was run on the sample strip to obtain tensile strength and stretch. The test procedure was repeated until all the samples were tested. The values obtained for the eight sample strips were averaged to determine the tensile strength of the tissue. When testing CD wet tensile, the strips are placed in an oven at 105 degrees Celsius for 5 minutes and saturated with 75 microliters of deionized water immediately prior to pulling the sample.

CALIPER TESTING

[0068] A Thwing-Albert ProGage 100 Thickness Tester, manufactured by Thwing Albert of West Berlin, NJ was used for the caliper test. Eight 100mm x 100mm square samples were cut from a 2-ply product. The samples were then tested individually and the results were averaged to obtain a caliper result for the base sheet.

ABSORBENCY TESTING

[0069] An absorbency test may also be run to determine absorption characteristics of the product. One such test may be performed using a Gravimetric Absorption Testing System (GATS) from M/K Systems Inc. of Peabody, MA. In this test, a sample is wet with a liquid, generally water, and the testing equipment records the mass of liquid that is absorbed as time progresses. This test may be run with 100 cm² samples.

[0070] The effectiveness of the lamination method of the present invention to achieve previously unattainable levels of scrubbing performance at particularly low basis weights is illustrated by the following example.

EXAMPLE #1

[0071] A paper towel made on a wet-laid asset with a three layer headbox was produced using the through air dried (TAD) method. The paper towel was dried on a TAD fabric, Prolux 593, supplied by Albany International of Rochester, NH. The TAD fabric was a 13 shed design with 12.0 yarn/cm Mesh and Count, a 0.35 mm warp monofilament, a 0.50 mm weft monofilament, a 1.29 mm caliper, with a 670 cubic feet per minute (cfm) and a knuckle surface that is sanded to impart 12% contact area with the yankee dryer. The air layer 4, or

outer layer, of the finished tissue was placed on the TAD fabric, while the dry layer of the tissue was closest to the surface of the Yankee dryer. The flow to each layer of the headbox was maintained at about 33% of the total sheet.

[0072] The tissue was produced with approximately 20% eucalyptus, 15% Cannabis bast fiber, and 65% northern bleached softwood kraft (NBSK) fibers. The Yankee layer fiber was approximately 50% eucalyptus, 50% NBSK. Polyamine polyamide-epichlorohydrin resin at 10kg/ton (dry basis) and 4 kg/ton (dry basis) of carboxymethyl cellulose were added to each of the three layers to generate permanent wet strength.

[0073] Using the method described above with reference to FIG. 3, the towel was plied together as a laminate of the two tissues to create a rolled 2-ply product with 142 sheets, a roll diameter of 142mm, with sheets having a length of 15.24 cm (6.0 inches) and width of 27.94 cm (11 inches). The 2-ply tissue product was found to have approximately the following product attributes: a Basis Weight of 39 g/m², a Caliper of 0.850 mm, an MD tensile of 385 N/m, a CD tensile of 365 N/m, a ball burst of 820 grams force, an MD stretch of 18%, a CD stretch of 6%, a CD wet tensile of 105 N/m, an absorbency of 750 gsm (grams per square meter) and a Wet Scrubbing resistance of 130 revolutions.

[0074] Now that embodiments of the present invention have been shown and described in detail, various modifications and improvements thereon will become readily apparent to those skilled in the art. Accordingly, the spirit and scope of the present invention is to be construed broadly and not limited by the foregoing specification.

CLAIMS

What is claimed is:

1. An absorbent fibrous product comprising:

a laminate of at least two fibrous plies, wherein each of the at least two fibrous plies is embossed and the at least two fibrous plies are adhered together, the absorbent fibrous product having a wet scrubbing resistance greater than 120 revolutions and a basis weight of between 30 and 50 grams per square meter.
2. The absorbent fibrous product of claim 1, wherein at least one of the at least two fibrous plies comprises cellulosic-based fibers.
3. The absorbent fibrous product of claim 2, wherein the cellulosic-based fibers are comprised of one or more of wood pulp, cannabis, cotton, regenerated or spun cellulose, jute, flax, ramie, bagasse, or kenaf fibers.
4. The absorbent fibrous product of claim 2, wherein at least one of the at least two fibrous plies comprises synthetic fibers.
5. The absorbent fibrous product of claim 1, wherein at least one of the at least two fibrous plies comprises synthetic fibers.

6. The absorbent fibrous product of claim 5, wherein the synthetic fibers are comprised of one or more of a polyolefin, polyester and polylactic acid.
7. The absorbent fibrous product of claim 1, wherein at least one of the at least two fibrous plies is produced using an air-laid process.
8. The absorbent fibrous product of claim 1, wherein at least one of the at least two fibrous plies is produced using a wet-laid process.
9. The absorbent fibrous product of claim 1, wherein the at least two fibrous plies are adhered together with a water soluble adhesive mixture comprised of polyvinyl alcohol, polyvinyl acetate, starch based resins or mixtures thereof,
wherein the water soluble adhesive is applied to at least one fibrous ply of the at least two fibrous plies at a temperature of between 32 degrees C to 66 degrees C.
10. The absorbent fibrous product of claim 9, wherein the water soluble adhesive mixture further comprises a water soluble cationic resin selected from the group consisting of polyamide-epichlorohydrin resins, glyoxalated polyacrylamide resins, polyethyleneimine resins, polyethylenimine resins, and mixtures thereof.
11. The absorbent fibrous product of claim 1, wherein each of the at least two fibrous plies comprises an embossed area, wherein the embossed area occupies between 5 to 15 % of the total surface area of a surface of the fibrous ply.

12. The absorbent fibrous product of claim 1, wherein each of the at least two fibrous plies comprises an embossed area having a surface, wherein a depth of embossment of the surface is between 0.28 and 0.43 centimeters.
13. The absorbent fibrous product of claim 1, wherein each of the at least two fibrous plies comprises an embossed area having a surface, wherein each embossment of the surface is between 0.04 and 0.08 square centimeters in size.
14. The absorbent fibrous product of claim 1, wherein the absorbent fibrous product is one of a paper towel, a disposable towel or wipe, or a bath or facial tissue.
15. A method for laminating at least two fibrous plies together to form a multi-ply absorbent fibrous product, the method comprising:
- (a) embossing the at least two fibrous plies;
 - (b) applying a heated adhesive to an interior side of at least one of the at least two fibrous plies to adhere the at least two fibrous plies together, wherein the interior side is a side of a ply that comes into a face-to-face relationship with another ply for lamination and wherein the adhesive is heated prior to being applied; and
 - (c) marrying the at least two fibrous plies that have been embossed after the heated adhesive has been applied;

whereby a laminate of the at least two fibrous plies is obtained, and the laminate has a wet scrubbing resistance greater than 120 revolutions and a basis weight of between 30 and 50 grams per square meter.

16. The laminating method of claim 15, wherein the step of embossing is performed using embossing rolls, the embossing rolls having a plurality of embossing knobs with crests thereon, and wherein the heated adhesive is applied to the interior side of the at least one of the at least two fibrous plies at the crests of the embossing knobs.
17. The laminating method of claim 15, wherein the applied adhesive comprises a water soluble adhesive mixture comprised of
(a) between 1% to 10% by weight of polyvinyl alcohol, polyvinyl acetate, starch based resins or mixtures thereof, and (b) between 80% to 99 % by weight of water; wherein the water soluble adhesive mixture applied to the at least one fibrous ply of the at least two fibrous plies of absorbent fibrous product at a temperature of between 32 degrees C to 66 degrees C.
18. The laminating method of claim 17, wherein the water soluble adhesive mixture further comprises up to 10% by weight of a water soluble cationic resin selected from the group consisting of polyamide-epichlorohydrin resins, glyoxalated polyacrylamide resins, polyethyleneimine resins, polyethylenimine resins, and

mixtures thereof.

19. The laminating method of claim 15, wherein, before being applied, the heated adhesive is maintained at a temperature of between 32 degrees C to 66 degrees C in an insulated tank.
20. The laminating method of claim 15, wherein each of the at least two fibrous plies comprises an embossed area, wherein the embossed area occupies between 5 to 15 % of the total surface area of a surface of the fibrous ply.
21. The laminating method of claim 15, wherein each of the at least fibrous two plies comprises an embossed area having a surface, wherein a depth of embossment of the surface is between 0.28 and 0.43 centimeters.
22. The laminating method of claim 15, wherein each of the at least two fibrous plies comprises an embossed area having a surface, wherein each embossment of the surface is between 0.04 and 0.08 square centimeters in size.
23. The laminating method of claim 15, further comprising a step of agitating the heated adhesive prior to application.
24. The laminating method of claim 15, wherein the absorbent fibrous product is one of a paper towel, a disposable towel or wipe, or a bath or facial tissue.

25. The laminating method of claim 15, wherein at least one of the at least two fibrous plies comprises cellulosic-based fibers.
26. The laminating method of claim 25, wherein the cellulosic-based fibers are comprised of one or more of wood pulp, cannabis, cotton, regenerated or spun cellulose, jute, flax, ramie, bagasse, or kenaf fibers.
27. The laminating method of claim 15, wherein at least one of the at least two fibrous plies comprises synthetic fibers.
28. The laminating method of claim 27, wherein the synthetic fibers are comprised of one or more of a polyolefin, polyester or polylactic acid.
29. The laminating method of claim 15, wherein at least one of the at least two fibrous plies comprises synthetic fibers and at least a second of the at least two fibrous plies comprises cellulosic based fibers.
30. The laminating method of claim 15, wherein at least one of the at least two fibrous plies is produced using an air-laid process.
31. The laminating method of claim 15, wherein at least one of the at least two fibrous plies is produced using a wet-laid process.

32. An absorbent fibrous product comprising:

a laminate of at least two fibrous plies, wherein each of the at least two fibrous plies is embossed and the at least two fibrous plies are adhered together,

wherein at least one of the at least two fibrous plies comprises

a first layer,

a second layer, and

a third layer located between said first and second layers,

the absorbent fibrous product having a wet scrubbing resistance greater than 120 revolutions and a basis weight of between 30 and 50 grams per square meter.

33. The absorbent fibrous product of claim 32, wherein at least one of said first, second and third layers comprises a wet end wet strength additive.

34. The absorbent fibrous product of claim 33, wherein the wet end wet strength additive comprises glyoxalated polyacrylamide and/or anionic polyacrylamide.

35. The absorbent fibrous product of claim 33, wherein at least one of said first, second and third layers further comprises a wet end dry strength additive.

36. The absorbent fibrous product of claim 35, wherein the wet end wet strength additive comprises glyoxalated polyacrylamide and/or anionic polyacrylamide and the wet end dry strength additive comprises amphoteric starch.

37. The absorbent fibrous product of claim 33, wherein said third layer further comprises a dry strength additive.
38. The absorbent fibrous product of claim 32, wherein at least one of said first, second and third layers comprises one or more wet end additives comprising one or more of carboxy-methyl cellulose, amphoteric starch, glyoxalated polyacrylamide and/or anionic polyacrylamide.
39. The absorbent fibrous product of claim 32, wherein the at least one of the at least two fibrous plies comprises at least 10% hardwood fibers and at least 50% softwood fibers.
40. The absorbent fibrous product of claim 32, wherein said first layer comprises at least 40% hardwood fibers.
41. The absorbent fibrous product of claim 32, wherein the at least one of the at least two fibrous plies comprises at least 10% cannabis bast fibers.
42. The absorbent fibrous product of claim 32, wherein the absorbent fibrous product is one of a paper towel, a disposable towel or wipe, or a bath or facial tissue, .

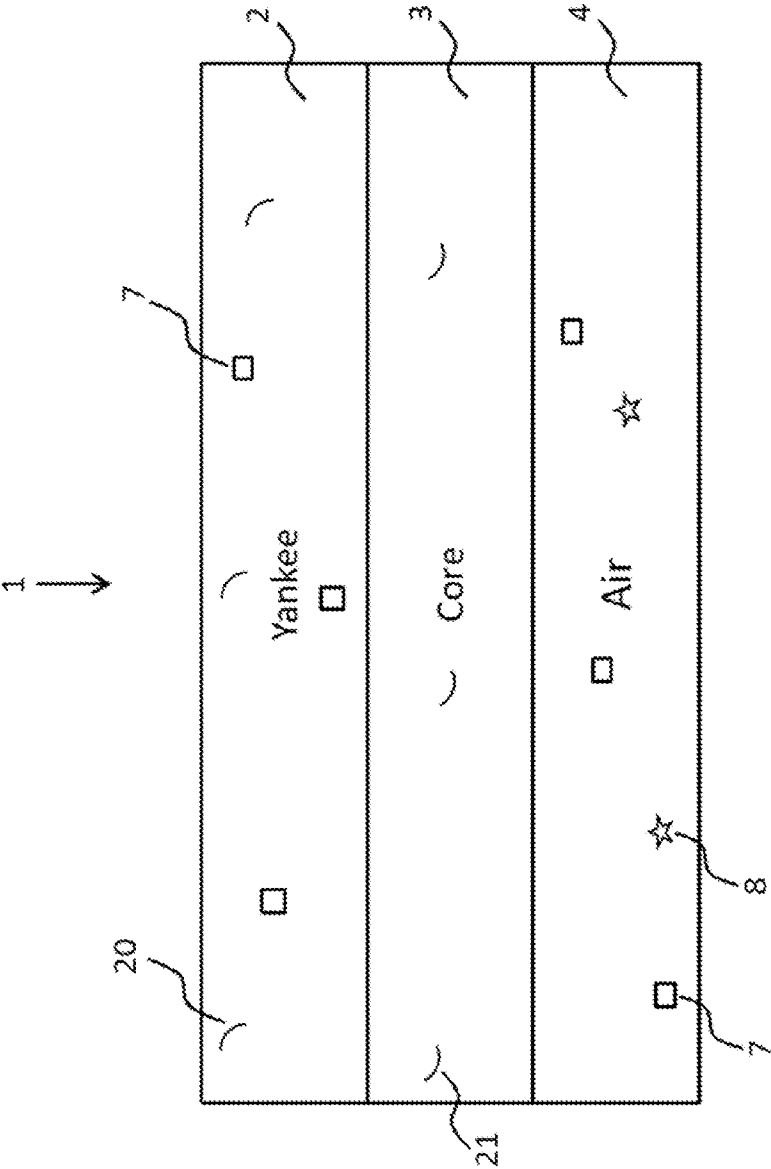


FIG. 1

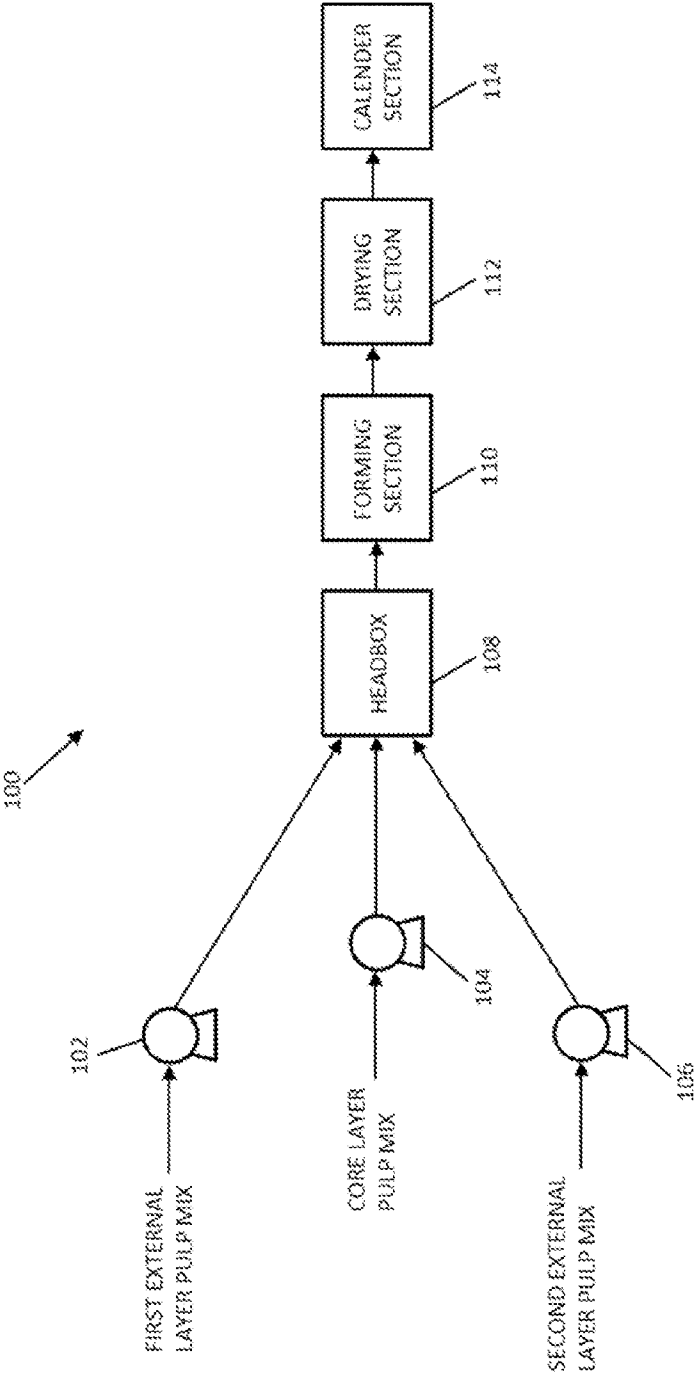


FIG. 2


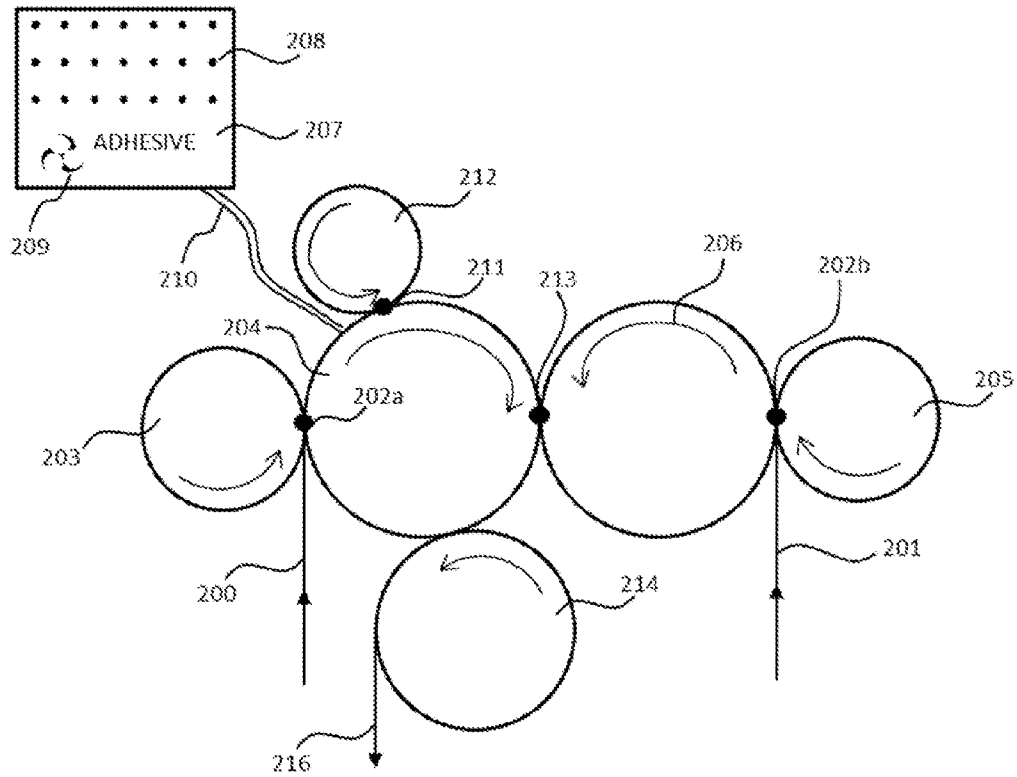


FIG. 3

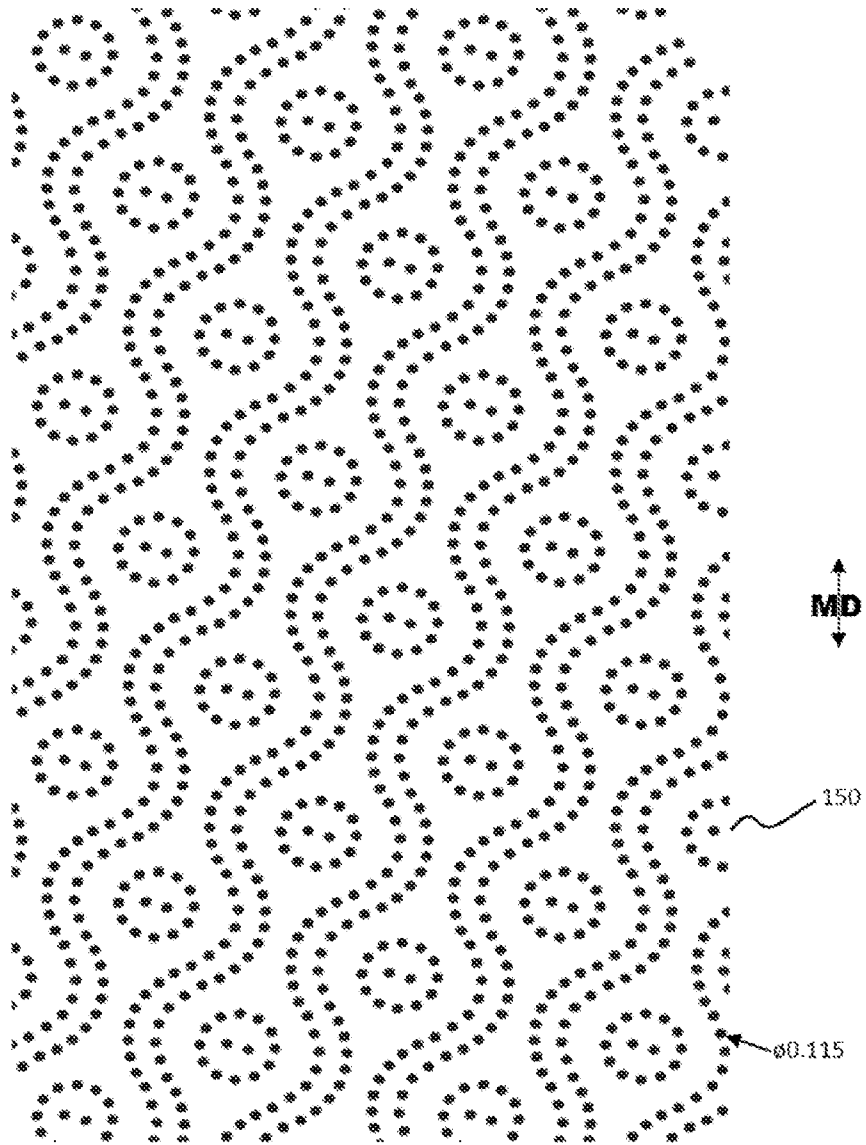

PATTERN SPECS:
Ø0.115" ELEMENT TOP
0.135" DEEP
13% BOND AREA

FIG. 4

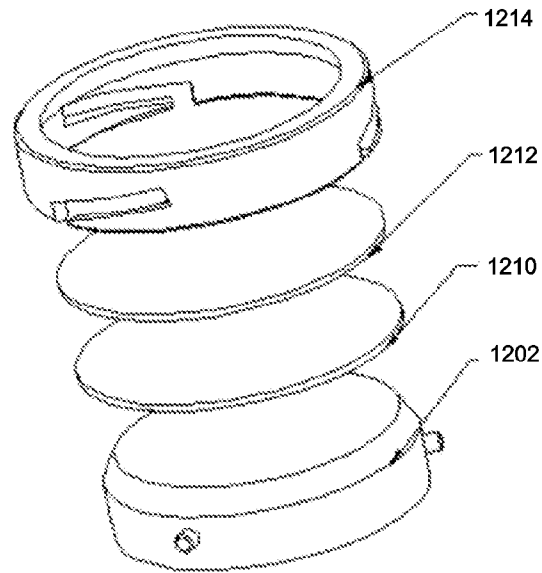


FIG. 5

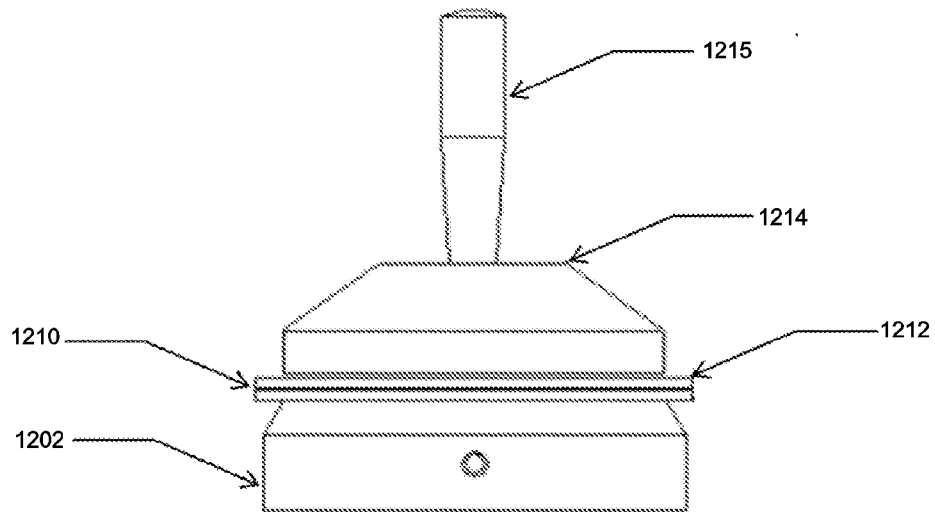


FIG. 6

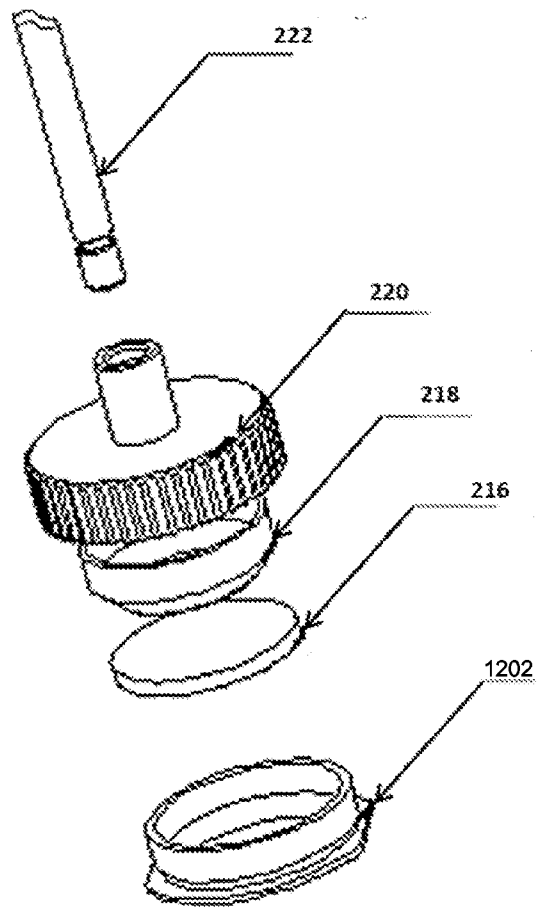


FIG. 7

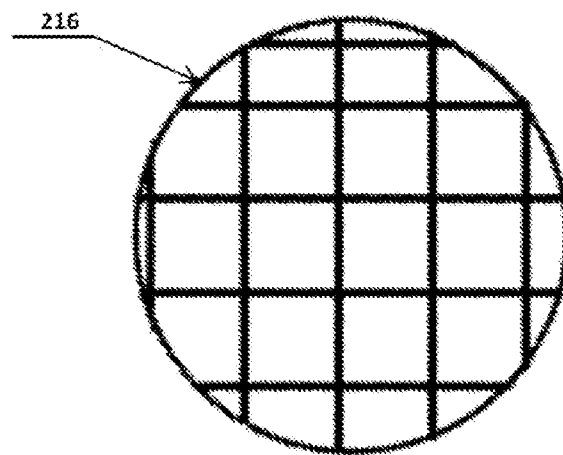


FIG. 8

