


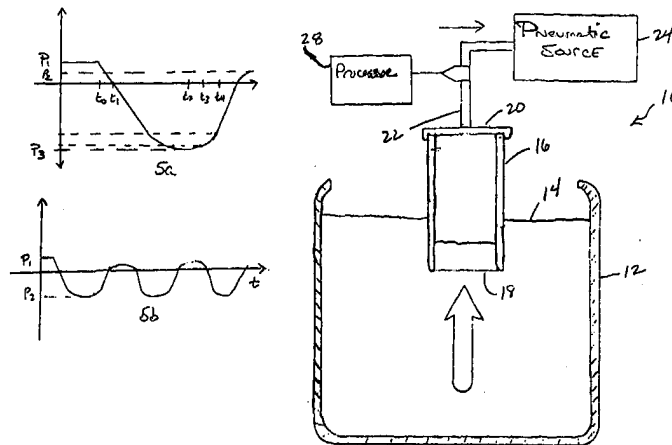

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>6</sup> :</b> <b>G01N 1/40, 15/06</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 98/20319</b>  <b>(43) International Publication Date:</b> 14 May 1998 (14.05.98)
<b>(21) International Application Number:</b> PCT/US97/19396 <b>(22) International Filing Date:</b> 29 October 1997 (29.10.97)  <b>(30) Priority Data:</b> 08/742,647 1 November 1996 (01.11.96) US  <b>(71) Applicant:</b> CYTYC CORPORATION [US/US]; 85 Swansen Road, Boxborough, MA 01719 (US).  <b>(72) Inventors:</b> RADCLIFFE, Gail, E.; 11 Palisades Street, Worcester, MA 01604 (US). LAPEN, Daniel, C.; 95 Packard Street, Lancaster, MA 01523 (US). FESTEL, Charles, A.; 168 Tremont Street, Newton, MA 02158 (US).  <b>(74) Agent:</b> MEYERS, Thomas, C.; Testa, Hurwitz & Thibeault, LLP, High Street Tower, 125 High Street, Boston, MA 02110 (US).		<b>(81) Designated States:</b> AU, CA, JP, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).  <b>Published</b> <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>

**(54) Title:** SYSTEMS AND METHODS FOR GENERATING FLUID SAMPLES HAVING SELECT CONCENTRATIONS OF PARTICLES

**(57) Abstract**

Instruments and processes according to the invention provide for the preparation of a fluid sample that has a substantially known concentration of a select particulate matter. In one aspect, the invention is understood as laboratory instruments for sample preparation. These instruments can include a filter that is submersible within a fluid suspension of particulate matter. To collect particulate matter from the fluid suspension, the instruments can cause a fluid flow that pulls fluid across the filter to trap particulate matter against one surface of the filter. The instruments can then remove the filter from the fluid suspension and dispose the filter above a collection vessel such that the side of the filter that is carrying particulate matter is positioned above the opening of the collection vessel. The laboratory instruments can then send a collection fluid through the filter in a direction opposite to the original fluid flow, thereby washing the particulate matter off the filter and into the collection vessel. The laboratory instruments according to the invention can provide samples having a known concentration by passing a known volume of collection fluid through the filter, thereby trapping the collected particulate matter within a known volume of collection fluid.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

<b>AL</b>	Albania	<b>ES</b>	Spain	<b>LS</b>	Lesotho	<b>SI</b>	Slovenia
<b>AM</b>	Armenia	<b>FI</b>	Finland	<b>LT</b>	Lithuania	<b>SK</b>	Slovakia
<b>AT</b>	Austria	<b>FR</b>	France	<b>LU</b>	Luxembourg	<b>SN</b>	Senegal
<b>AU</b>	Australia	<b>GA</b>	Gabon	<b>LV</b>	Latvia	<b>SZ</b>	Swaziland
<b>AZ</b>	Azerbaijan	<b>GB</b>	United Kingdom	<b>MC</b>	Monaco	<b>TD</b>	Chad
<b>BA</b>	Bosnia and Herzegovina	<b>GE</b>	Georgia	<b>MD</b>	Republic of Moldova	<b>TG</b>	Togo
<b>BB</b>	Barbados	<b>GH</b>	Ghana	<b>MG</b>	Madagascar	<b>TJ</b>	Tajikistan
<b>BE</b>	Belgium	<b>GN</b>	Guinea	<b>MK</b>	The former Yugoslav Republic of Macedonia	<b>TM</b>	Turkmenistan
<b>BF</b>	Burkina Faso	<b>GR</b>	Greece			<b>TR</b>	Turkey
<b>BG</b>	Bulgaria	<b>HU</b>	Hungary	<b>ML</b>	Mali	<b>TT</b>	Trinidad and Tobago
<b>BJ</b>	Benin	<b>IE</b>	Ireland	<b>MN</b>	Mongolia	<b>UA</b>	Ukraine
<b>BR</b>	Brazil	<b>IL</b>	Israel	<b>MR</b>	Mauritania	<b>UG</b>	Uganda
<b>BY</b>	Belarus	<b>IS</b>	Iceland	<b>MW</b>	Malawi	<b>US</b>	United States of America
<b>CA</b>	Canada	<b>IT</b>	Italy	<b>MX</b>	Mexico	<b>UZ</b>	Uzbekistan
<b>CF</b>	Central African Republic	<b>JP</b>	Japan	<b>NE</b>	Niger	<b>VN</b>	Viet Nam
<b>CG</b>	Congo	<b>KE</b>	Kenya	<b>NL</b>	Netherlands	<b>YU</b>	Yugoslavia
<b>CH</b>	Switzerland	<b>KG</b>	Kyrgyzstan	<b>NO</b>	Norway	<b>ZW</b>	Zimbabwe
<b>CI</b>	Côte d'Ivoire	<b>KP</b>	Democratic People's Republic of Korea	<b>NZ</b>	New Zealand		
<b>CM</b>	Cameroon		Republic of Korea	<b>PL</b>	Poland		
<b>CN</b>	China	<b>KR</b>	Republic of Korea	<b>PT</b>	Portugal		
<b>CU</b>	Cuba	<b>KZ</b>	Kazakstan	<b>RO</b>	Romania		
<b>CZ</b>	Czech Republic	<b>LC</b>	Saint Lucia	<b>RU</b>	Russian Federation		
<b>DE</b>	Germany	<b>LI</b>	Liechtenstein	<b>SD</b>	Sudan		
<b>DK</b>	Denmark	<b>LK</b>	Sri Lanka	<b>SE</b>	Sweden		
<b>EE</b>	Estonia	<b>LR</b>	Liberia	<b>SG</b>	Singapore		

## SYSTEMS AND METHODS FOR COLLECTING FLUID SAMPLES HAVING SELECT CONCENTRATIONS OF PARTICLES

### Field of the Invention

The invention generally relates to laboratory instruments and processes for collecting samples and, more particularly, to laboratory instruments and processes to generate fluid samples that have known concentrations of a targeted particulate material.

### 5 Background of the Invention

In chemistry and the biological sciences, laboratory instruments and techniques exist for separating a composite material, such as a soil sample or a blood sample, into its component materials. Typically, the isolation step is performed as a preliminary step to further testing that centers around the characteristics of the isolated component.

10 It is often a difficult and cumbersome task to isolate one element of a composite material. One typical approach is to employ a centrifuge to separate composite materials into the individual elements. In practice, a lab technician can place the composite material into a test-tube-like container. The lab technician inserts the container into the centrifuge and activates the centrifuge for sufficient time to separate out the element or elements of interest. Upon completion of a  
15 centrifugal separation, the lab technician removes the container and extracts from the stratified sample the element or elements.

Although centrifugal separation can work well, it is typically labor-intensive and often poorly suited for isolating small particulate matter, such as cellular material. Moreover, the centrifugal technique fails to provide a separation process that readily yields samples with known  
20 concentrations of a targeted element.

Accordingly, it is an object of the invention to provide laboratory instrumentation and processes that generate samples with known concentrations of a selected particulate material.

It is a further object of the invention to provide laboratory instruments and processes that detect samples having low concentrations of a targeted material.

25 It is yet a further object of the invention to provide laboratory instrumentation and processes that provide measures of the integrity of a performed diagnostic analysis.

It is still a further object of the invention to provide instrumentation and techniques that provide information representative of the severity of a disease.

Other objects of the invention will in part be obvious and will in part appear hereinafter.

#### Summary of the Invention

5 Instruments and processes according to the invention provide for the preparation of a fluid sample that has a substantially known concentration of a select particulate matter. In one aspect, the invention is understood as laboratory instruments for sample preparation. These instruments can include a filter that is submersible within a fluid suspension of particulate matter. To collect  
10 particulate matter from the fluid suspension, the instruments can cause a fluid flow that pulls fluid across the filter to trap particulate matter against one surface of the filter. The instruments can then remove the filter from the fluid suspension and dispose the filter above a collection vessel such that the side of the filter that is carrying particulate matter is positioned above the opening of the collection vessel. The laboratory instruments can then send a collection fluid through the filter  
15 in a direction opposite to the original fluid flow, thereby washing the particulate matter off the filter and into the collection vessel. The laboratory instruments according to the invention can provide samples having a known concentration by passing a known volume of collection fluid through the filter, thereby trapping the collected particulate matter within a known volume of collection fluid.

In one aspect, the invention is understood as methods for reproducibly generating a fluid  
20 sample having a select concentration of particles. Methods of the invention can include the steps of providing a fluid suspension of dispersed particles, disposing a filter having a first side and a second side within the fluid suspension and flowing the fluid suspension across the filter from the first side to the second side, such that a substantially known quantity of particles collect onto the first side of the filter, removing the filter and the particles collected thereon from the fluid  
25 suspension, and passing a known volume of collection fluid through the filter to remove substantially the particles collected on the first side, and to collect the particles within the known volume of collection fluid.

In one practice, the processes according to the invention can include a step of disposing a  
30 filter that includes providing a particle collection device having an intake port and an evacuation port, and having the filter spanning the intake port. Further practices according to the invention

can include a step of generating a fluid flow by evacuating the particle collection device to draw fluid across the filter and through the intake port and into the collection device.

In a further practice of the invention, these processes can include a step of passing a known quantity of collection fluid through the filter by applying a select fluid pressure within the collection device to force fluid collected therein back across the filter. Further, when passing a  
5 known volume of collection fluid through the filter, the processes of the invention can include the step of disposing the filter collection device at a select angle to generate thereby a drip of collection fluid that has the particles collected therein.

In a further practice, the invention can include the steps of selecting a filter that has a pore  
10 size adapted, dimensionally, for collecting particles of a pre-determined size. These filters can include cellulose, polyester, polycarbonate, nylon and teflon filters, and can have pore sizes suited for collecting a target material. For cells, filter pore sizes typically range between .2 and 20 microns.

The processes according to the invention can also include further steps for analyzing the  
15 particles and fluid samples that are collected. For example, the processes of the invention can include the further steps of lysing the collected particles, or providing a portion of the collected particles in the known volume of collection fluid as a sample for diagnostic assay.

In a further practice, the processes according to the invention can include the steps of  
20 causing a flow of fluid and measuring a characteristic representative of the quantity of particles collected against the filter. Moreover, the processes can interrupt the step of flowing the fluid suspension in response to a measured characteristic that represents a preselected quantity of particles. Accordingly, processes according to the invention can monitor characteristics of the fluid flow to determine when a preselected quantity of particles have collected against the filter.

In a further aspect, processes according to the invention can direct the fluid suspension  
25 across the filter by applying a known pressure to the fluid suspension. Further these processes can apply pressure to the fluid suspension as a succession of know pressures. In this practice, the processes can measure a characteristic representative of the rate of change of pressure and can determine from this measured characteristic a quantity of particles collected against the filter surface.

In a further aspect, the invention provides processes that can be employed for  
30 incrementally achieving a desired concentration of particles within a known volume of fluid. For example, the processes of the invention can be iterative in that upon collecting a first sample of

collected particles within a known volume of fluid, this fluid sample can be again processed according to the invention to provide a fluid sample having an alternative concentration of particles.

In a further aspect, the invention provides apparatus for reproducibly collecting a sample  
5 having a select concentration. Such apparatus can comprise a filter having a first side and a second side and being submersible within a fluid that contains a quantity of particles, an element for flowing the fluid across the filter in a direction that travels from the first side to the second side such that a substantially known quantity of particles collects onto the first side of the filter, an element for removing the filter and the particles collected thereon from the fluid suspension, and  
10 an element for passing a known volume of collection fluid through the filter to remove substantially the particles collected on the first side and to collect the particles within a known volume of collection fluid.

As described above, the invention offers significant advantages over known methods for collecting fluid samples by providing systems and methods that generate fluid samples of  
15 particulate material in select concentrations. Moreover, the invention further provides automated laboratory instrumentation that can perform each step of the fluid sample preparation process such that the systems automatically and reproducibly provide fluid samples each having select and known concentrations.

These and other advantages of the invention will be more fully understood by reference to  
20 the following detailed description in conjunction with the accompanying drawings in which like reference numbers refer to like elements.

#### Brief Description of Illustrated Embodiments

FIG. 1 illustrates in functional block diagram form one system according to the invention for providing a fluid sample having a select concentration.

25 FIG. 2 illustrates the system of FIG. 1 in operation for collecting cells from a fluid suspension.

FIG. 3 illustrates the system of FIG. 1 in operation for collecting particles within a known volume of collection fluid.

30 FIGs. 4a and 4b illustrate alternative embodiments of collection vessels suitable for practice with the system depicted in FIG. 1.

FIGs. 5a and 5b diagrammatically illustrate known pressures suitable for drawing fluid across the filter depicted in FIG. 1.

FIGs. 6 and 7 illustrate an alternative embodiment of the invention.

#### Detailed Description of the Illustrated Embodiments

5 FIG. 1 depicts the functional elements of one embodiment of the invention. More particularly, FIG. 1 depicts a system 10 that includes a container 12, a fluid suspension of dispersed particles 14, a particle collection device 16, a filter 18, a cap 20, a conduit 22, a pneumatic source 24, and a processor 28.

The container 12 holds the fluid sample 14, and makes it available for sampling by the  
10 collection device 16. In the illustrated embodiment, the system 10 uses a pneumatic particle collection technique wherein the system 10 employs pneumatic action provided by the pneumatic source 24 to draw a portion of the fluid sample 14 past the filter 18 and into the collection device 16. Particles dispersed within the fluid sample 14 collect onto one side of the filter 18 and can be removed from the fluid sample 14 by extraction of the particle collection device 16.  
15 During collection of the particles against filter 18, the processor 28 determines a measure representative of the quantity of particles that have collected against the filter 18. Accordingly, upon extraction of the collection device 16 from the sample 14, the system 10 has collected a substantially known quantity of particles from the fluid sample 14.

The container 12 can be any container suitable for holding a fluid material and for  
20 providing access to the fluid material by a particle collection device, such as the device 16. When practicing the invention with a fluid sample having biological particles dispersed therein, the container 12 is commonly a sterilized plastic container suited for holding a biological sample and for disposal after the fluid sample 14 is processed by the system 10.

The fluid sample 14 depicted in FIG. 1 is a liquid sample that has dispersed therein a  
25 quantity of particles. Typically, the quantity of particles is relatively unknown and, therefore, the concentration of particles within the sample volume is also unknown. The particles within a fluid sample 14 are dispersed such that there exists, within the sample, some population of particles that are separate from, and independent of, any of the other particles. These disperse independent particles are well-suited for collection by the filter 18 as a portion of the fluid sample 14 is drawn  
30 across the filter 18 and into the collection device 16. Accordingly, in one practice of the invention, the system 10 disperses cells within the fluid sample 14 by actuating the particle to

collection device 16. In one embodiment, the system 10 rapidly rotates the particle collection device 16 to actuate the fluid sample 14 and break-up clumps of particles that may exist within the fluid sample. For example, with a fluid sample 14 having contained therein a population of epithelial cells, the actuation of the collection device 16 can break-up clumped cells, such that there exists within the fluid sample 14 a population of individual cells, and a reduced population of clumped cells.

In one embodiment, the system 10 collects a known quantity of cells from a biological fluid sample 14. For example, the fluid sample 14 can be comprised of an aqueous preservation solution that contains a biological sample, such as tissue cells, blood cells, scrapings, aspirates, or other such biological materials and samples.

The particle collection device 16 depicted in FIG. 1 has a cylindrical sidewall, which is shown in cross section, that provides a rim for supporting the filter 18 that attaches at one end of device 16. At the opposite end of the filter 18, a cap 20 spans across the device 16 to fluidically seal the interior chamber of device 16. The cap 20 has an aperture that receives the fluid conduit 22 that fluidically couples the interior of device 16 with the pneumatic source 24. The sidewall of the particle collection device 16 can be a plastic material, such as polystyrene, that provides at one end, a rim suitable for attaching the filter 18. The filter 18 can be a polycarbonate membrane having a porosity selected for collecting particles of a particular size from the fluid sample 14. One such filter 18 is a polycarbonate membrane marketed by the Nuclepore Corporation in Pleasanton, California. Other filters can be formed from materials including cellulose, nylon, polyester, teflon, or any other suitable material. The filter membrane can have a pore size or sizes suitable for collecting cells of particular sizes and can be, for example, pores of size approximately .2 to 20 microns. Further, the depicted particle collection device 16 can be a filter cylinder device manufactured and marketed by the Cytoc Corporation of Boxboro, Massachusetts, the assignee hereof. However, the pore size is to be selected as a function of the target material being collected.

FIG. 1 includes pneumatic system for evacuating fluid, typically air, from the interior of the device to draw a portion of the fluid sample 14 across the filter 18. The pneumatic system includes the source 24 and the conduit 22. As depicted in FIG. 1, the conduit 22 extends through the aperture of the cap 20 and replaces the interior of the particle collection device 16 in fluid communication with the pneumatic source 24. The pneumatic source 24 can be a vacuum source that evacuates the interior of the particle collection device 16, thereby creating a pressure



differential across the filter 18, causing a portion of the fluid sample to cross the filter 18. The pneumatic source 24 can be any pneumatic source suitable for evacuating, or partially evacuating, the interior of the particle device 16 and thereby creating a pressure differential across the filter 18 that acts as negative pressure on the fluid sample 14.

5 As further shown in FIG. 1, the system 10 includes a sensor 26 that couples to the conduit 22 and that couples, via a transmission path, to the processor 28. In one embodiment of the invention, the sensor 26 is a pressure sensor that measures the pressure being applied by the pneumatic source 24 to the interior of the collection device 16. The sensor 26 acts as a transducer to generate an electrical signal representative of this pressure. The processor 28  
10 receives the signal generated by the transducer sensor 26 and generates, responsive to this signal, a quantity signal representative of the quantity of particles that have collected against the surface of the filter 18. The sensor 26, in this embodiment of the invention, can be any sensor suitable for generating a signal representative of the pressure within the interior of the particle collection device 16. The processor 28 depicted in FIG. 1 can be any data processing system having an  
15 input interface for receiving a signal generated by a sensor element and capable of processing that signal to generate a quantity signal representative substantially of the number of particles that have collected against the filter 18.

FIG. 2 depicts the system of FIG. 1 having drawn a portion of the sample fluid 14 across the filter 18 and into the interior of the collection device 16. As depicted in FIG. 2, the pneumatic  
20 source 24 creates a negative pressure within the interior of the collection device 16 that generates a flow of the fluid sample 14 across the filter 18. Drawing a fluid sample 14 across the filter 18 causes the particles dispersed within the fluid sample 14 to collect against the filter 18 and, in particular, to block the pores of the filter membrane.

The action of blocking the pores of the filter membrane 18 is understood to decrease  
25 effectively the porosity of the filter membrane. The amount of time it takes for the negative pressure to return to equilibrium after the pneumatic source has changed the interior pressure within the collection device 16 is dependent, in part, on the number of pores of filter 18 available for passing fluid into the interior of the device 16. Consequently, as particles collect against the filter surface 18, the pores of the filter 18 are sealed, thereby reducing the number of pores  
30 available for passing fluid to the interior of the device 16. The reduction of available pores can increase the amount of time it takes for the vacuum inside the collection device to return to equilibrium. Further, the rate of pressure change within device 16 changes as pores are blocked.

Accordingly, the pressure change and rate of pressure change within the device 16 can be representative of the number of particles that have collected against the surface of the filter 18. Accordingly, the processor 28 can track the pressure within device 16 and determine, responsive thereto, a number representative of a quantity of particles collected against the filter 18.

5           In one embodiment of the invention, the system 10 creates a flow of fluid to the filter 18 until the processor 28 determines, from measures of the pressure within the device 16, that substantially each pore of filter 28 is blocked by a collected particle. For each filter 18, the number of pores is approximately known. Therefore, the processor 28 can generate a quantity signal representative of substantially the number of particles it takes to block each pore of the  
10 filter 18.

          Alternatively, the processor 28 can determine from measures of the rate of pressure change within the device 16, quantity signals representative of the number of particles that have collected against the filter 18 to partially block the filter. Accordingly, in this embodiment, the system 10 can collect a known quantity of particles from a fluid sample 14 that has a population  
15 of particles dispersed therein which would be insufficient to completely obstruct the flow of fluid to the interior of the device 16.

          The system 10 depicted in FIGs. 1 and 2 can be employed to determine the concentration of the dispersed particles within the fluid sample 14. In one practice, the system 10 draws a known volume of fluid across the filter 18. With a fluid sample 14 that has a uniformly, or  
20 substantially uniformly, dispersed particle population, the system 10 can determine the concentration of the fluid sample 14 responsive to the quantity of particles collected out of the known volume of fluid drawn across the filter 18. To this end, the pneumatic source 24 can draw a portion of the fluid sample 14 to the filter 18 and into the cylinder 16. The processor 28 can employ this known volume and a measure of the particles collected against filter 18 to measure  
25 the concentration of the fluid sample 14.

          In a further practice of the invention, the entire volume of the fluid sample 14 can be flowed across the filter 18 to collect and count the particles within the fluid suspension. In this practice, the system 10 can continuously filter a portion of the fluid sample 14 until the entire fluid sample 14 has been substantially processed by the system 10. Optionally, a plurality of filters can  
30 be sequentially disposed within the sample 14, employing a new filter each time a portion of the fluid sample 14 is processed. Alternatively, a process according to the invention can include a further step of rinsing the filter membrane after each time the filter processes a portion of the fluid

sample 14. The rinsing process can include a step of disposing the filter 18 within a fluid bath and actuating the filter therein to remove particles collected against the membrane. Further, the step of rinsing the filter 18 can include the step of placing the filter 18 within a fluid bath and applying a positive pressure to the interior of the device 16 to effectively blow any particles collected onto the membrane into the cleansing fluid. Alternative practices for removing particles collected  
5 against the filter can be practiced with the invention without departing from the scope thereof.

FIG. 3 depicts a further step of the invention and shows the particle collection device 16 disposed above a collection 30 having a preservation fluid 32 contained therein. As depicted in FIG. 3, the collection device 16 is held at an angle such that a corner portion of a device 16 is  
10 disposed directly above the container 30 and the filter 18 is disposed at an angle relative to an axis extending parallel to the sides of the container 30. In this step, a known volume of collection fluid is passed through the filter 18 to remove substantially all the particles collected onto the opposite side of the filter 18 and to collect those particles within the known volume of collection fluid.

The collection fluid 38 depicted in FIG. 3 can be, in one practice, the filtrate generated by passing the fluid sample 14 through the filter 18. Alternatively, the collection fluid can be a preservation fluid passed into the interior of the particle collection device 16. In one practice of the invention, the pneumatic source 24 applies, via conduit 22, a positive pressure within the interior of the collection device 16 to effectively press a portion of the collection fluid 38 through  
15 the filter 18 thereby removing the particles from the surface of the filter 18, and collecting the particles within the fluid 38. As depicted in FIG. 3, a positive pressure is applied to the interior of the particle collection device 16 to pass a volume of collection fluid through the filter 18 to form a drop 34 of collection fluid having gathered therein substantially all the particles previously collected by the filter 18. As further illustrated in FIG. 3, the drop of collection fluid 34 can, with  
20 the particles contained therein, pass to the container 30. The process provides a known volume of preservation fluid 32 within the container 30. Accordingly, the process provides a fluid sample having a substantially known quantity of particles contained within a substantially known volume of fluid.

FIGs. 4a and 4b depict alternative embodiments of the collection devices suitable for  
30 practice with the present invention. In particular, FIG. 4a depicts a collection device 40 that has an edge 42 that extends transverse relative to the sidewalls of the collection device 40. This adjacent edge 42 facilitates the development of a drop of collection fluid having particles

dissolved therein. Similarly, FIG. 4b depicts a further alternative embodiment of the collection device suitable for practice with the invention. The collection device 44 has a first edge 46 and a second edge 48, both which extend transverse to the sidewalls of the collection device 44. The opposing transverse edges 46 and 48 together facilitate the development of a drop of fluid. In each of the depicted particle collection devices, it will be understood that the filter can span entirely across one end of the collection device or can span across a portion of that collection device. It will further be understood that other particle collection devices can be practiced with the present invention without departing from the scope thereof.

FIGs. 5a and 5b depict pressure pulses suitable for drawing fluid across the filter 18. FIG. 5a depicts a first set of axes including a vertical axis labeled P designating the interior pressure of the collection device 16. FIG. 5a shows increasing pressure as values increase from  $P_2$  to  $P_1$ . FIG. 5a also shows a horizontal axis, labeled T. The horizontal axis shows increasing time in the direction from  $t_0$  to  $t_1$ . As shown in FIG. 5a, the pneumatic source 24 can act as a vacuum to decrease pressure within the device 16 from an initial pressure of  $P_1$  to a subsequent pressure  $P_2$ . Pressure within the device decreases from  $P_1$  to  $P_3$  during the time interval between  $t_0$  and  $t_2$ . As fluid enters the interior of the device, the pressure begins to equilibrate and particles collect against the filter surface. In one practice of the invention, the processor 28 measures the interior pressure and determines the time interval over which the interior pressure increases from  $P_{90}$  to  $P_{60}$ , where  $P_{90}$ , represents an interior pressure that is approximately 90% of the peak negative pressure  $P_3$  and  $P_{60}$  represents an interior pressure that is approximately 60% of the peak negative pressure  $P_3$ . FIG. 5a depicts this time interval as occurring between  $t_3$  and  $t_4$ . The processor 28 employs these time and pressure measurements to determine a rate of pressure change which is representative of the number of collected particles. This can include the processor 28 determining an exponential rate of decay of the interior pressure. As described above, the processor 28 can determine a quantity signal, responsive to the rate of pressure change within the device 16, and being representative of the number of particles collected against the filter 18.

FIG. 5b depicts an alternative practice of the invention wherein a plurality of pressure pulses is provided to the interior of the particle collection device 16. In this practice of the invention, the pneumatic source 24 employs several pressure pulses to draw a portion of the fluid sample 14 to the filter 18. The plural pulses are generally provided as a sequence of negative pressure bursts that act like a sequence of sips. The processor 28 can determine, each time the

pneumatic source applies the negative pressure, the rate of pressure change within the collection device 16. This allows the processor 28 to monitor the quantity of particles collected against the filter 18. In one practice, upon detection of sufficient number of particles collected against the filter 18, the system 10 removes the filter 18 from the fluid sample and, as described with  
5 reference to FIG. 3, collects the selected quantity of particles within a known volume of collection fluid.

FIGs. 6 and 7 depict a further alternative embodiment of the invention. More particularly, FIG. 6 depicts a system 50 that includes a fluid sample source 52, a collection fluid source 54, a pneumatic source 58, a pneumatic source 60, a collection device 62, having a first chamber 64  
10 and a second chamber 68, and a filter 70 disposed between the chambers 64 and 68. The fluid sample source 52 can contain a fluid sample of dispersed particles. Fluid sample source 52 can provide the fluid suspension of dispersed particles into the container 62 via the fluid conduit that couples between sample source 52 and the container section 68. The pneumatic source 60 can  
15 apply a negative pressure within the interior of the container chamber 64 to draw a portion of the fluid sample across the filter 70. In the depicted embodiment, the pneumatic source 60 evacuates the chamber 64 of all filtrate leaving chamber 64 empty. The system 50 can then activate collection source 54 to provide collection fluid into the chamber 64 of particle collection device 62. The pneumatic source 58 can draw collection fluid across the filter 70 to collect, within the  
20 collection fluid, the quantity of particles collected against the filter 70. The pneumatic source 58 can draw selected amounts of the collection fluid past filter 70 to collect the particles within a known volume of collection fluid.

It will thus be seen that the invention efficiently attains the objects set forth above, among those made apparent from the preceding description. Since certain changes may be made in the above instrument and process without departing from the scope of the invention, it is intended  
25 that all matter containing the above description or shown in the accompanying drawings be interpreted as illustrative and not in a limiting sense.

It is also to be understood that the following claims are intended to cover all generic and specific features of the invention herein described, and all statements of the scope of the invention which, as a matter of language, might be said to fall therebetween.

What is claimed is:

- 1 1. A method for collecting a fluid sample having a select concentration of particles,  
2 comprising the steps of  
3 providing a fluid suspension of dispersed particles,  
4 disposing a filter having a first side and a second side within said fluid suspension and  
5 flowing said fluid suspension across said filter from said first side to said second side such that a  
6 substantially known quantity of particles collect onto said first side of said filter,  
7 removing said filter and said particles collected thereon from said fluid suspension, and  
8 passing a known volume of collection fluid through said filter, to remove substantially said  
9 particles collected on said first side, and to collect said particles within said known volume of  
10 collection fluid.
- 1 2. A method according to claim 1 wherein said step of disposing a filter includes the step of  
2 providing a particle collection device having an intake port and an evacuation port and  
3 having said filter spanning said intake port.
- 1 3. A method according to claim 2 wherein said step of flowing said fluid includes the step of  
2 evacuating said particle collection device to draw fluid across said filter and through said  
3 intake port and into said collection device.
- 1 4. A method according to claim 1 wherein said step of passing a known quantity of  
2 collection fluid through said filter includes the step of  
3 applying a select fluid pressure within said collection device to force fluid collected therein  
4 back across said filter.
- 1 5. A method according to claim 4 wherein said step of passing a known volume of collection  
2 fluid through said filter includes the step of  
3 disposing said filter collection device at a select angle and to generate thereby a drip of  
4 said collection fluid having said particles collected therein.
- 1 6. A method according to claim 1 comprising the further step of  
2 selecting a filter having a pore size adapted for collecting particles of a predetermined size.
- 1 7. A method according to claim 1 including the further step of  
2 lysing said collected particles.

- 1 8. A method according to claim 1 comprising the further step of  
2 providing a portion of said collected particles in said known volume of collection fluid as a  
3 sample for a diagnostic assay.
- 1 9. A method according to claim 1 wherein said step of flowing said fluid suspension includes  
2 the step of  
3 measuring a characteristic representative of the quantity of particles collected against said  
4 filter.
- 1 10. A method according to claim 9 including the further step of  
2 interrupting said step of flowing said fluid suspension responsive to a measured  
3 characteristic representative of a pre-selected quantity of particles.
- 1 11. A method according to claim 1 wherein said step of flowing said fluid suspension includes  
2 the further step of  
3 applying a known pressure to said fluid suspension.
- 1 12. A method according to claim 1 wherein said step of flowing said fluid suspension includes  
2 the further step of  
3 applying a succession of known pressures to said fluid suspension.
- 1 13. A method according to claim 11 wherein said step of flowing said fluid suspension  
2 includes the further step of  
3 measuring a characteristic representative of a rate of change of pressure.
- 1 14. A method according to claim 1 wherein said step of providing a fluid suspension of  
2 dispersed cells includes the step of  
3 providing said collected particles within said known volume of fluid, for incrementally  
4 increasing the concentration of said particles within said known volume of fluid.
- 1 15. A method according to claim 1 wherein said step of providing a fluid suspension of  
2 dispersed cells comprises the further steps of  
3 actuating a fluid having a sample material disposed therein.

- 1 16. Apparatus for reproducibly collecting a sample having a select concentration, comprising  
2 a filter having a first side and a second side and being submersible within a fluid that  
3 contains a quantity of particles,  
4 a source of fluid pressure coupled to a pressure monitor for providing a flow of said fluid  
5 across said filter from said first side to said second side such that a substantially known quantity  
6 of particles collect onto said first side of said filter,  
7 an actuator for removing said filter and said particles collected thereon from said fluid  
8 suspension, and  
9 a source of fluid having volumetric control for passing a known volume of collection fluid  
10 through said filter, to remove substantially said particles collected on said first side, and to collect  
11 said particles within said known volume of collection fluid.
- 1 17. A method for determining a concentration of a fluid sample, comprising the steps of  
2 providing a fluid suspension of dispersed particles to a particle collection element,  
3 generating a flow of said fluid suspension into said particle collection element,  
4 measuring a flow characteristic of said flow of fluid suspension being representative of a  
5 quantity of said dispersed particles,  
6 determining a volume of said fluid flow having flowed to said particle collection element,  
7 and  
8 determining, as a function of said flow characteristic and said volume, said concentration  
9 of dispersed particles within said fluid sample.
- 1 18. A method according to claim 17 wherein said step of generating said flow of said fluid  
2 suspension includes the step of  
3 flowing substantially all of said fluid sample to said particle collection element, to collect  
4 substantially all of said dispersed particles from said fluid sample.
- 1 19. A method according to claim 18 including the further step of  
2 removing said collected dispersed particles from said fluid sample.
- 1 20. A method according to claim 19 including the further step of  
2 testing said fluid sample to detect a presence of said dispersed particles within said fluid  
3 sample.



1 21. A method according to claim 17 wherein said step generating said flow of said fluid  
2 suspension includes the step of  
3 generating a flow of a known volume of said fluid suspension.

1 22. A method according to claim 21 wherein said step of determining a volume of said fluid  
2 flow having passed to said particle collection element includes the step of  
3 recording said known volume of said fluid suspension.

1 23. A method according to claim 17 including the further step of  
2 comparing said concentration to a threshold value representative of a threshold  
3 concentration for achieving a valid test of said fluid sample.

1 24. A method according to claim 17 where said step of measuring a flow characteristic  
2 includes the step of  
3 measuring a rate of flow of said fluid suspension.

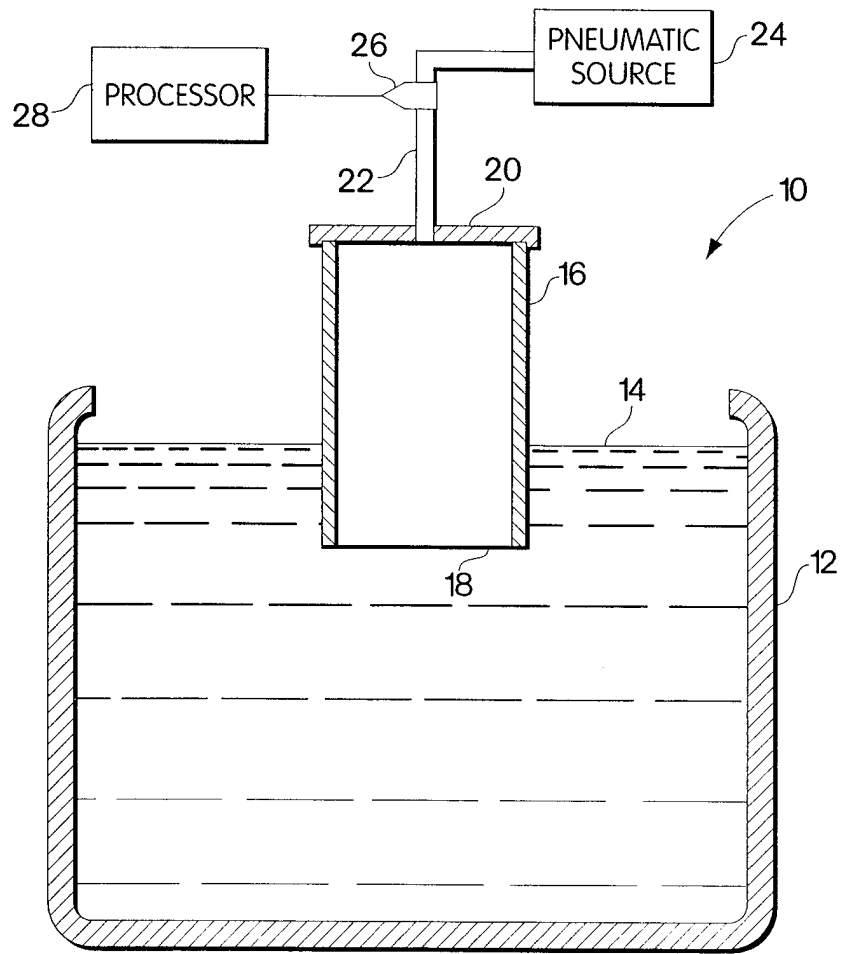


Fig.1

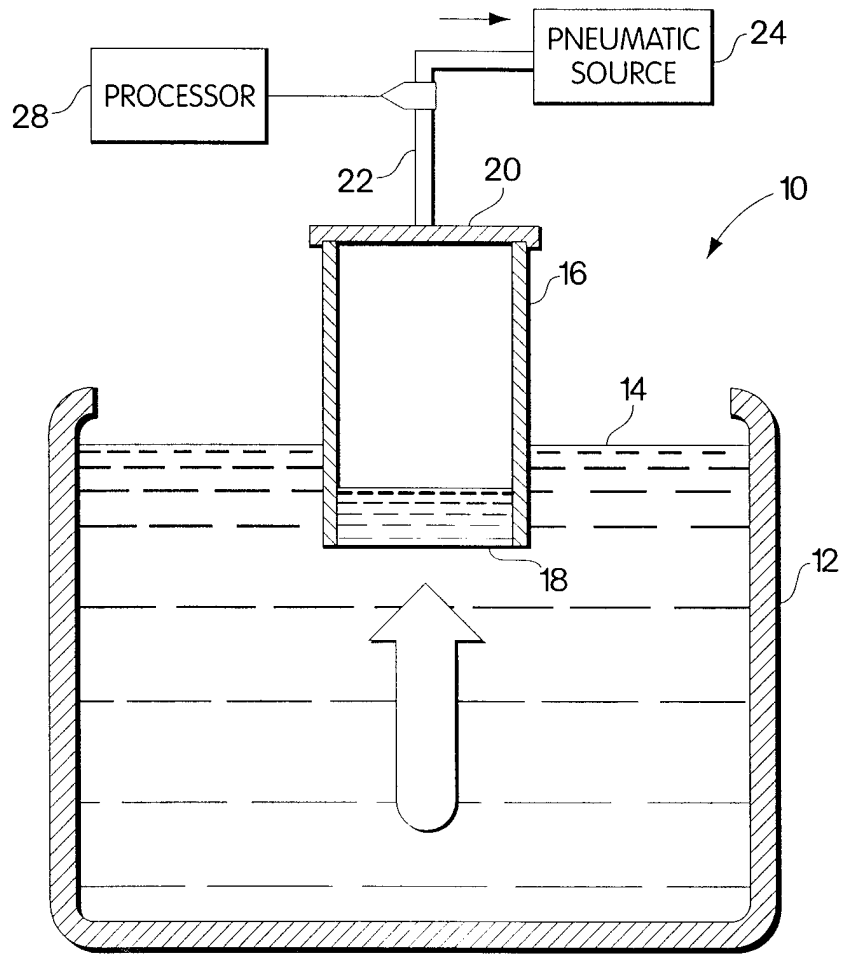
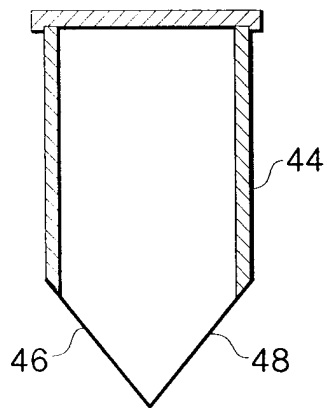
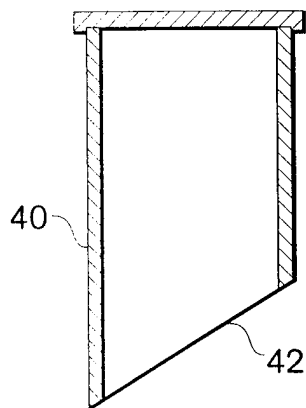
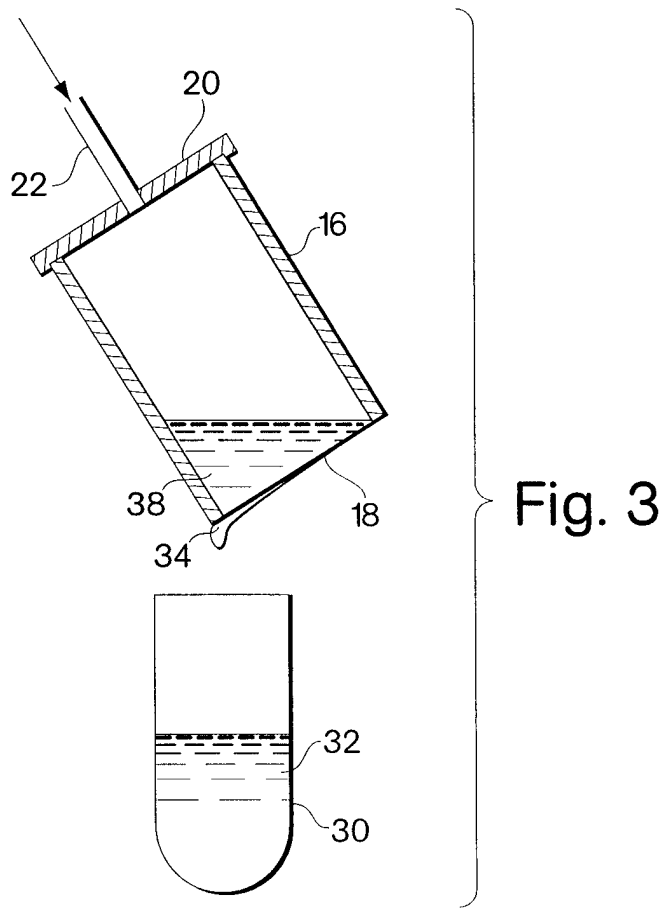


Fig. 2



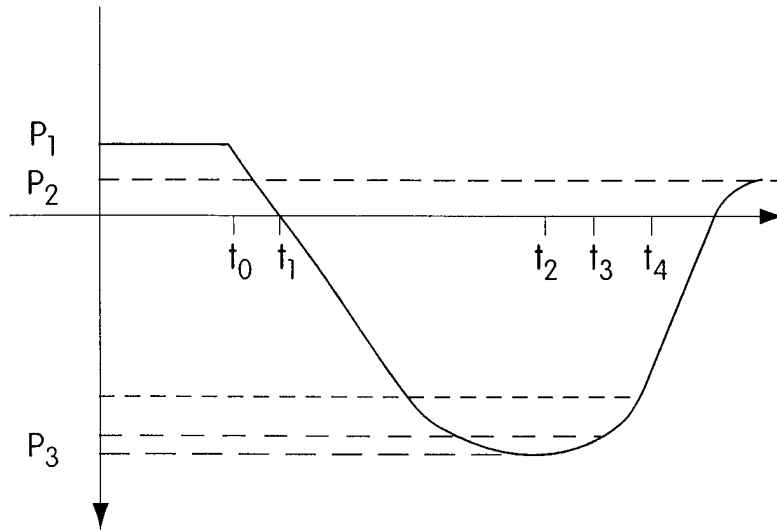


Fig. 5A

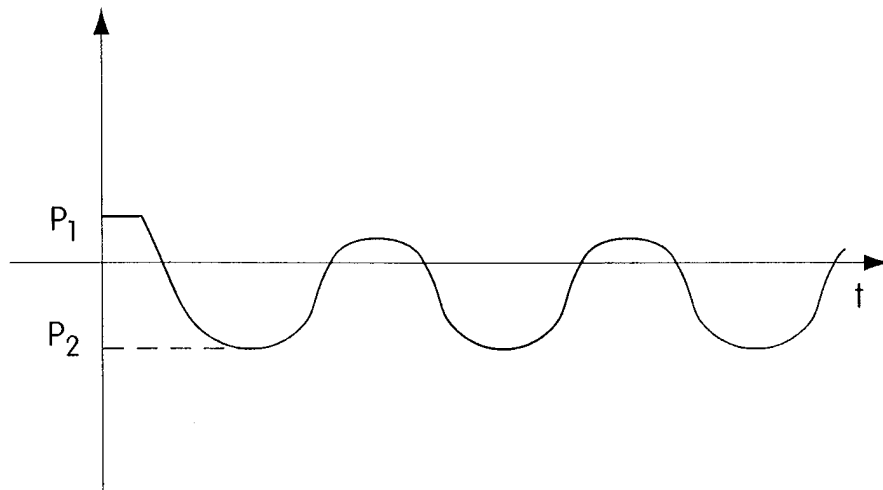


Fig. 5B

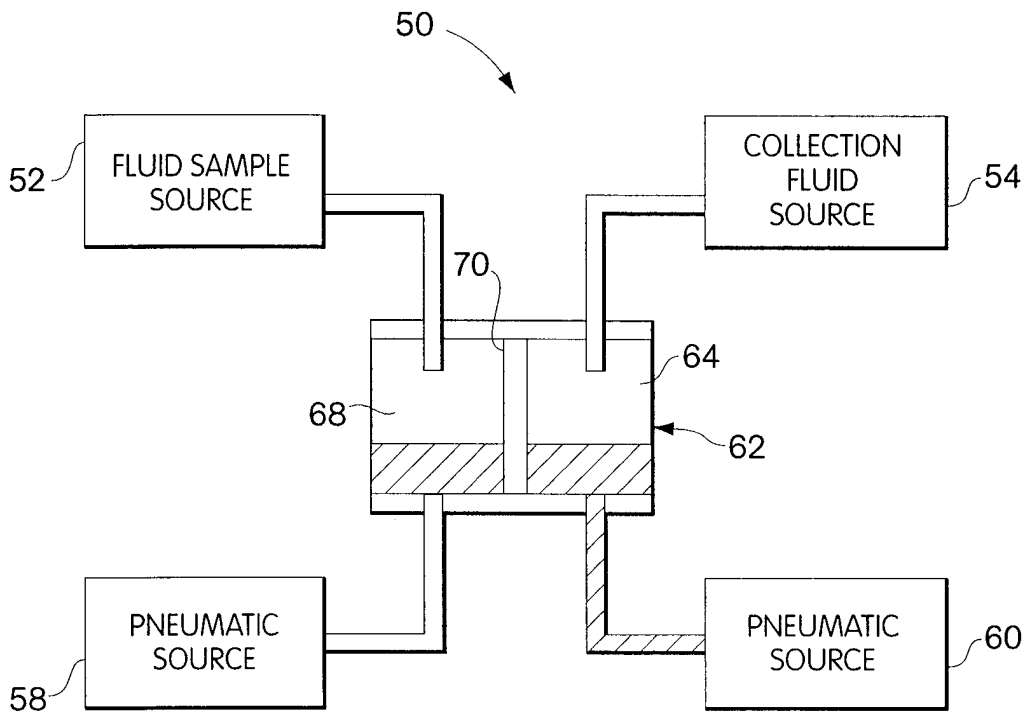


Fig. 6

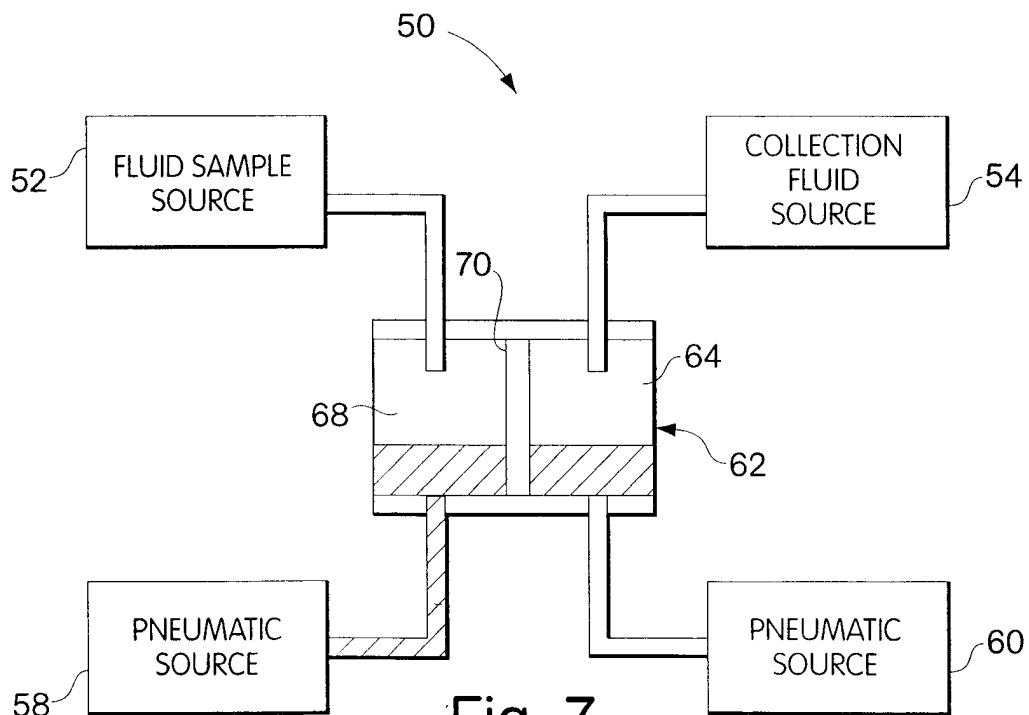


Fig. 7

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 97/19396

**A. CLASSIFICATION OF SUBJECT MATTER**  
 IPC 6 G01N1/40 G01N15/06

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 G01N B01L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 95 14533 A (ABBOTT LAB) 1 June 1995	1-3, 6-8, 14
A	see page 8, line 1 - page 14, line 2 ---	16
Y	WO 96 14578 A (PHOENIX MED LTD ; ROBERTSON PATRICIA MARY BECKET (GB)) 17 May 1996	1-3, 6-8, 14
A	see page 8, line 7 - page 9, line 17 ---	16
A	US 5 190 666 A (BISCONTE JEAN-CLAUDE) 2 March 1993  see column 4, line 28 - column 9, line 57 ---	1-3, 6, 9, 10, 16-19, 24
A	DE 32 23 589 A (AEIKENS BERNHARD DR MED) 29 December 1983 see page 8 - page 10 ---	1-3
	-/--	

Further documents are listed in the continuation of box C.

Patent family members are listed in annex.

**Special categories of cited documents:**

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

2 March 1998

Date of mailing of the international search report

10/03/1998

Name and mailing address of the ISA  
 European Patent Office, P.B. 5818 Patentlaan 2  
 NL - 2280 HV Rijswijk  
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl.  
 Fax: (+31-70) 340-3016

Authorized officer

Bindon, C

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 97/19396

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	FR 2 643 285 A (CHEMUNEX SA) 24 August 1990 see page 4, line 22 - page 8, line 7 -----	1-4
X	US 5 095 740 A (HODGSON KIM A ET AL) 17 March 1992 see the whole document -----	17.21, 22.24
A	FR 2 672 995 A (GERVAIS PATRICK) 21 August 1992 see the whole document -----	17



# INTERNATIONAL SEARCH REPORT

information on patent family members

International Application No

PCT/US 97/19396

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9514533 A	01-06-95	US 5578459 A	26-11-96
		AU 1186395 A	13-06-95
		CA 2176139 A	01-06-95
		EP 0730495 A	11-09-96
		JP 9505890 T	10-06-97
WO 9614578 A	17-05-96	AU 3812595 A	31-05-96
		CA 2204670 A	17-05-96
		EP 0791175 A	27-08-97
US 5190666 A	02-03-93	FR 2638101 A	27-04-90
		DE 68907918 T	11-11-93
		DK 72491 A	13-06-91
		EP 0439532 A	07-08-91
		WO 9004445 A	03-05-90
		JP 4503183 T	11-06-92
DE 3223589 A	29-12-83	NONE	
FR 2643285 A	24-08-90	WO 9010211 A	07-09-90
US 5095740 A	17-03-92	NONE	
FR 2672995 A	21-08-92	NONE	