




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : G02B 26/08	A1	(11) International Publication Number: WO 99/38045 (43) International Publication Date: 29 July 1999 (29.07.99)
(21) International Application Number: PCT/GB99/00048 (22) International Filing Date: 21 January 1999 (21.01.99) (30) Priority Data: 9801197.6 21 January 1998 (21.01.98) GB 9801292.5 22 January 1998 (22.01.98) GB (71) Applicant (for all designated States except US): RENISHAW PLC [GB/GB]; New Mills, Wotton-under-Edge, Gloucestershire GL12 8JR (GB). (72) Inventors; and (75) Inventors/Applicants (for US only): CHAPMAN, Mark, Adrian, Vincent [GB/GB]; 116 Bearlands, Wotton-under-Edge, Gloucestershire GL12 7SB (GB). LIAO, Tingdi [CN/GB]; Flat 1, 22 Long Street, Old Town, Wotton-under-Edge, Gloucestershire GL12 7BT (GB). (74) Agent: JONES, Bruce, Graeme, Roland; Renishaw PLC, Patent Dept., New Mills, Wotton-under-Edge, Gloucestershire, GL12 8JR (GB).	(81) Designated States: DE, GB, US, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published With international search report.	

(54) Title: BEAM DEFLECTOR

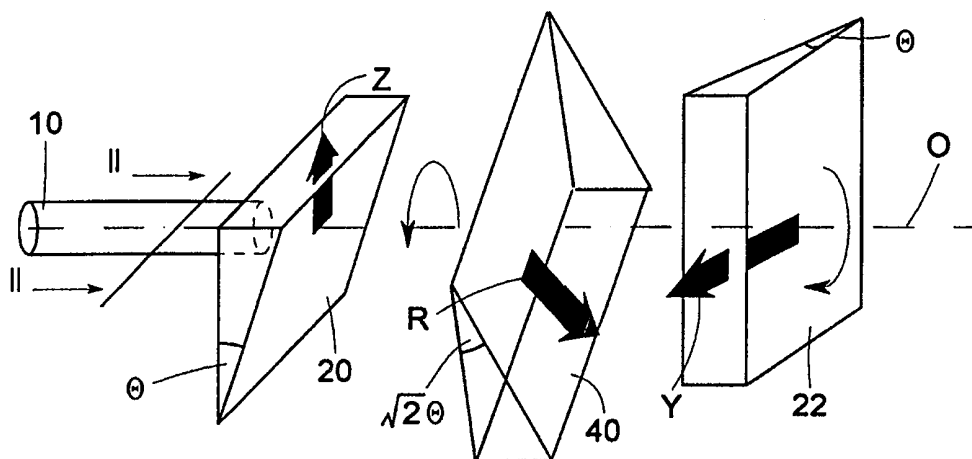

(57) Abstract

A beam deflector (12) has first and second wedge prisms (20, 22), having refractive indices and geometries which are similar (in the case of the geometry to within arc minutes). The prisms (20, 22) are rotatable about an optical axis (O) defined by the direction of propagation of the incident light beam (10), to adjust the angle through which the incident beam is deflected. A third prism (40) has a wedge angle which is greater than that of the first and second prisms (20, 22) by a factor of $\sqrt{2}$. The provision of the third prism ameliorates the need to match closely the geometries and refractive indices of the first and second prisms (20, 22), and yet avoids the occurrence of angles through which the beam may not be deflected as a result of insufficiently closely matched prisms.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

BEAM DEFLECTOR

The present invention relates to an optical device for deflecting a light beam, such as a laser beam for example.

5 A known beam deflector comprises a pair of wedge prisms positioned in the path of an incident beam of light, whose direction of propagation defines an optical axis. By virtue of refraction of the light beam upon passage through the prisms, each of the wedge prisms deflects the light beam in a direction transverse to the optical axis. When
10 the prisms are mutually adjacent, and so aligned that the directions in which they deflect the light are parallel and mutually opposing, the light beam will pass through the prisms substantially undeviated. Relative rotation of the prisms about the optical axis will result in a net
15 deviation of the light beam, whose magnitude depends upon the magnitude of the aforementioned relative rotation. The rotational displacement of the direction of any deviation of the light beam about the optical axis may be adjusted by a simultaneous rotation of the two wedge prisms once the
20 relative rotation has been accomplished. Wedge prisms of this type must have very closely matched refractive indices, and substantially identical geometry (to within arc seconds) in order to ensure that the resulting beam deflector does not have a blind spot i.e. a given angle of
25 deflection (or, more commonly the undeviated transmission of a light beam through the beam deflector) which is unattainable as a result of the prisms not being adequately matched.

The present invention seeks to ameliorate the difficulty
30 and/or expense of producing two such closely matched prisms, and provides, according to a first aspect, a device for deflecting a light beam having a direction of incident propagation which defines an optical axis, the device being adapted to deflect the light beam away from the optical
35 axis and along a deflected axis which is non-parallel to

the optical axis, the device comprising first, second and third optical elements situated in the beam path, at least two of which are rotatable relative to the light beam to adjust deflection of the beam, wherein the geometry and refractive index of the optical elements is such that deflection of the light beam is adjustable throughout a predetermined solid angle about the optical axis.

Preferably the first and second optical elements have substantially similar geometries and refractive indices, and interact with the light beam to deflect the beam away from the optical axis in first and second directions of refractive deviation respectively, and the third optical element which interact with the light beam to deflect the beam away from the optical axis in a third direction of refractive deviation, wherein the geometry and refractive index of the third optical element relative to the geometry and refractive index of the first and second optical elements is such that: when the first and second optical elements are aligned about the optical axis such that the first and second directions of refractive deviation extend at notional angles of 0° and α° respectively, the third direction of refractive deviation extends at a notional angle of $[180 + (\alpha^\circ/2)]$, and the first second and third directions of refractive deviation are orthogonal to the optical axis, the light beam passes through the device with its path substantially undeviated, and wherein the first and second optical elements are rotatable relative to the optical axis to adjust deflection of the light beam.

The requisite refractive characteristics of the third optical element relative to those of the first and second optical elements may be attained by virtue of a geometry which differs from that of the first and second elements, or by virtue of a refractive index which differs from that of the first and second optical elements, or by virtue of a combination of a variation in both parameters.

An embodiment of the present invention will now be described, by way of example, and with reference to the accompanying drawings in which:

Fig 1 is a perspective schematic view of a beam
5 deflector according to the present invention;

Fig 2 is an elevation on the line II-II in Fig 1;

Fig 3 is a side elevation of the beam deflecting
elements of Figs 1 and 2 incorporated in a housing; and

Fig 4 is a perspective schematic view of a second
10 embodiment of beam deflector.

Referring now to Fig 1, a substantially collimated light beam 10 propagates along an optical axis O. The beam 10 is incident upon a beam deflecting device 12 which includes first and second wedge prisms 20,22. Wedge prism 20 has a
15 refractive effect on the propagating laser light such that it will deflect the beam by refraction away from the optical axis O in a direction of refractive deviation illustrated in Fig 1 as the Z direction. Wedge prism 22 is aligned about the optical axis O with its direction of
20 refractive deviation at 90° to the Z direction, illustrated in Fig 1 as the Y direction. A third intermediate wedge prism 40, is situated interstitial the wedge prisms 20,22, and the direction of refractive deviation R of this wedge prism is substantially at 225° relative to the notional 0°
25 angle of the Z direction. The prism 40 is conveniently situated between prisms 20,22, but may equally be located first or third in the beam path. In this example all three prisms 20,22,40 are made of the same refractive material, and have the same refractive index. With these conditions
30 the geometry of the prisms is typically such that both the first and second wedge prisms 20,22 will have wedge angles θ , which are similar to within approximately 5 arc minutes, while the interstitial wedge prism 40 will have a wedge angle equal to $\theta\sqrt{2}$ (for small angle approximations).
35 Alternatively, the prisms 20,22,40 may have substantially similar geometries, and the interstitial prism 40 has a refractive index which is $\sqrt{2}$ greater than the refractive

index of the prisms 20,22 to achieve the same result. In a further alternative the prism 40 may have a greater wedge angle and a greater refractive index, such that from the combination of these characteristics same refractive effect is obtained. With such a 3 prism arrangement having these characteristics, when the prisms 20,22 are aligned about the optical axis O with their direction of refractive deviation Z,Y at notional angles of 0° and 90° , and prism 40 aligned with its direction of refractive deviation at 225° , the incident light beam passes through the deflecting device undeviated.

Rotation of one or more of the prisms 20,22,40 will enable the beam to be steered to a desired angle of deflection. Referring now to Fig 3, the prisms are preferably provided within a single housing 100, with each of the prisms 20,22,40 being connected to a steering handle 110, ABC respectively, to enable adjustment of their angle of refractive deviation relative to the incoming beam and/or each other (although it is only necessary for the prisms 20 and 22 to be rotatable). Rotation of the prisms alters the angle to which the incident light beam is deflected upon passage through the device in order to steer the beam in a desired direction. The provision of the intermediate prism 40 eliminates the possibility of blind spots due to insufficient matching of the refractive indices and the geometry of the first and second wedge prisms 20,22.

Referring now to Fig 4, an alternative configuration of beam deflector has first and second wedge prisms 120,122 aligned about the optical axis O with their directions of refractive deviation Z,Y at notional angles of 0° and 90° respectively, and a third prism 140 aligned with its direction of refractive deviation R at 225° . The relative geometries/refractive indices of the prisms 120,122 and the prism 140 are as described in the first embodiment for prism 20,22,40 respectively. The prisms 120,122 are rotatable about alignment axes A,B respectively, which lie

in a plane orthogonal to the optical axis.

When the prisms 120,122 are aligned such that their directions of refractive deviation lie in the plane orthogonal to the optical axis (as does the direction of refractive deviation of prism 140) the incident light beam passes through the deflecting device undeviated. Rotation of the prisms 120,122 about the alignment axes A,B, which lie in a plane orthogonal to the optical axis O, and are orthogonal to the respective directions of refractive deviation Z,Y, alters the extent of refraction which the light beam propagating through the deflecting device undergoes at the respective prism, and thus the angle through which the beam is deflected as a result of its passage through the device.

In all of the illustrated examples the geometry of the optical elements (or their relative refractive index, or combination of refractive index and wedge angle to achieve the requisite refractive power, as discussed above) and the relative orientation of their directions of refractive deviation is based on the passage of an undeviated beam when the prisms 20,22;120,122 are arranged with their directions of refractive deviation orthogonal to each other; the prism 40;140 is thus aligned with its direction of refractive deviation at an angle of 225° , and, for prisms of the same refractive index, has a wedge angle of $\sqrt{2}$ greater than the wedge angle of the prisms 20,22;120,122 (or for prisms of the same geometry, a refractive index of $\sqrt{2}$ greater than that of the prisms 20,22;120,122). Other geometries of alignment and relative wedge angle (and therefore correspondingly, relative refractive index, or combination of both geometry and refractive index) are however possible.

For example the prisms 20,22;120,122 could be aligned at notional angles of 0° and 60° , and the prism 40;140 aligned at a notional angle of 210° . In this example the wedge

angle of the prism 40;140 is $\sqrt{3}$ greater than that of prisms 20,22;120,122 when all three prisms have the same refractive index; or, if all three prisms have the same wedge angle, the refractive index of the prism 40;140 would
5 have to be $\sqrt{3}$ greater than that of the prisms 20,22;120,122. Again, combination of a greater wedge angle and a greater refractive index for the prism 40;140 are possible to achieve the same relative refractive power.

10 Generically, the relationship between the directions of refractive deviation of the prisms 20,22;120,122 and 40;140 for the passage of an undeviated beam is:

$$\beta = 180^\circ + \alpha/2$$

where:

15 β is the angle of orientation of the direction of refractive deviation of the prism 40;140 as measured from a notional zero degree angle;

20 α is the angle of orientation of the direction of refractive deviation of the prism 22;122, as measured from the notional zero angle; and

the notional zero angle is defined by the orientation of the direction of refractive deviation of the prism 20;120;

25 and the generic relationship of the relative wedge angles or refractive indices (given similar refractive indices and wedge angles respectively) is given (assuming small angle approximations) by the relationship:

$$\phi = 2\theta \cos(\alpha/2)$$

30 where:

ϕ is the wedge angle/refractive index of the prism
40;140; and

5 θ is the wedge angle/refractive index of the prisms
20,22;120,122.

As mentioned above, this equation holds true for small
wedge angles where $\sin \theta$ is $\approx$ to θ . However, where the
angles involved exceed the small angle approximation,
second and higher order terms of the polynomial expansion
10 of $\sin \theta$ should be included as appropriate.

Where the expression is used to evaluate the relative
refractive indices required, it is once again appropriate
only where the wedge angles of the first, second and third
prisms are small angles. Where the wedge angles exceed the
15 small angle approximation, higher order polynomial terms
should again be included.

Although the present invention has been exemplified with
reference to three independent optical elements mounted
together (as in Fig 3), or in close proximity, this is not
20 necessary in order to accrue the benefits of the present
invention. For example, the third prism 40;140 may be
combined with other optical elements in a system, such as a
polarising cubic beamsplitter in a laser interferometer
system, while the first and second prisms (for example) may
25 be mounted separately and remote from the third prism.

CLAIMS

1. A device for deflecting a light beam having a direction of incident propagation which defines an optical axis, the device being adapted to deflect the light beam away from the optical axis and along a deflected axis which is non-parallel to the optical axis, the device comprising first, second and third optical elements situated in the beam path, at least two of which are rotatable relative to the light beam to adjust deflection of the beam, wherein the geometry and refractive index of the optical elements is such that deflection of the light beam is adjustable throughout a predetermined solid angle about the optical axis.
2. A device according to claim 1 wherein the first and second optical elements have substantially similar geometries and refractive indices, and interact with the light beam to deflect the beam away from the optical axis in first and second directions of refractive deviation respectively, and the third optical element interacts with the light beam to deflect the beam away from the optical axis in a third direction of refractive deviation, wherein the geometry and refractive index of the third optical element relative to the geometry and refractive index of the first and second optical elements is such that: when the first and second optical elements are aligned about the optical axis such that the first and second directions of refractive deviation extend at notional angles of 0° and α° respectively, the third direction of refractive deviation extends at a notional angle of $[180 + (\alpha^\circ/2)]$, and the first second and third directions of refractive deviation are substantially orthogonal to the optical axis, the light beam passes through the device with its path substantially undeviated, and wherein the first and second optical elements are rotatable relative to the optical axis to adjust deflection of the light beam.

3. A device according to claim 2, wherein the first and second optical elements are rotatable about the optical axis.

4. A device according to claim 2 wherein the first and second optical elements are rotatable about first and second alignment axes respectively which lie in a plane orthogonal to the optical axis and are orthogonal to the first and second directions of refractive deviation respectively.

5. A device according to claim 2 wherein the first second and third optical elements are prisms made of the same refractive material, and wherein the third prism has a wedge angle substantially equal to:

$$2\theta\cos(\alpha/2)$$

where θ is the wedge angle of the first and second prisms.

6. A device according to claim 2, wherein the first second and third optical elements are prisms and have similar geometry, and wherein the refractive index of the third prism is equal to:

$$2n\cos(\alpha/2)$$

where:

n is the refractive index of the first and second prisms.

7. A device according to claim 2 wherein the first, second and third optical elements are prisms, and the third prism has a wedge angle greater than that of the first and second prisms, and a refractive index greater than that of the first and second prisms, such that the refractive effect which the third prism has on light propagating

therethrough in comparison to the refractive effect of the first or second prisms on such a light beam is equivalent to a prism having a relative wedge angle as defined in claim 5, or a relative refractive index as defined in claim

5 6.

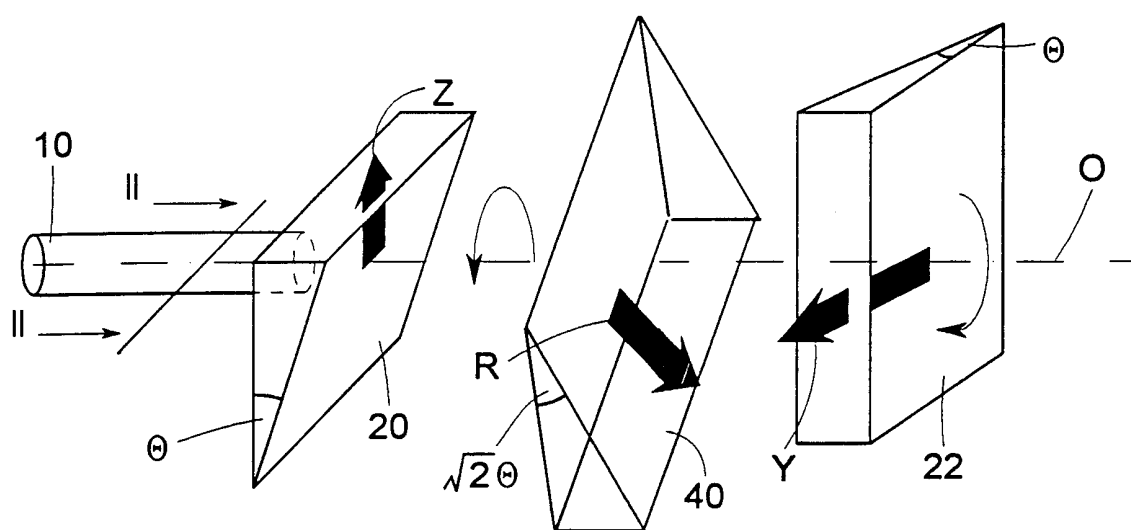


Fig 1

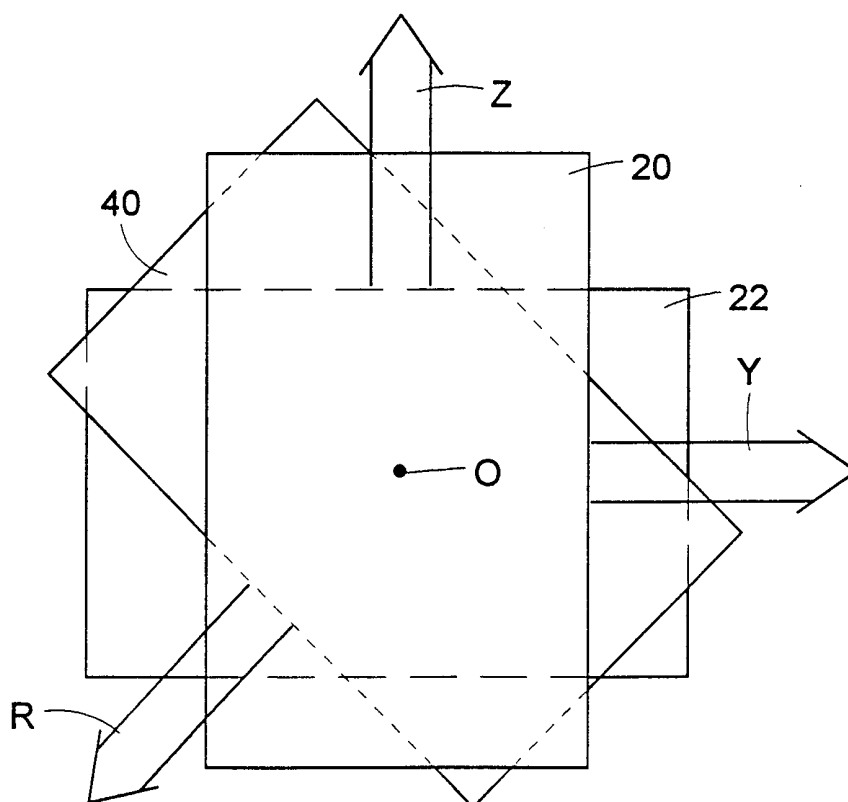


Fig 2

2/2

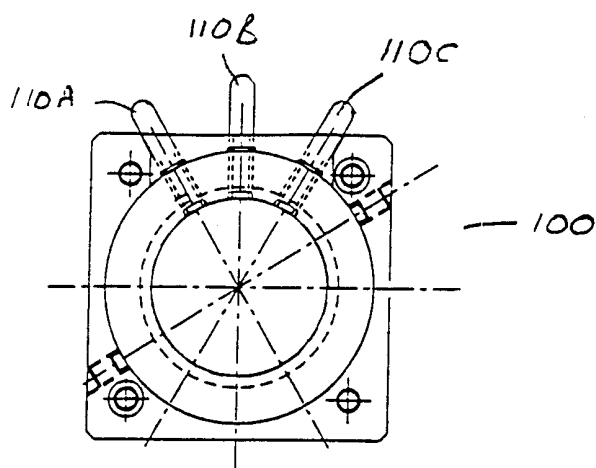


Fig 3

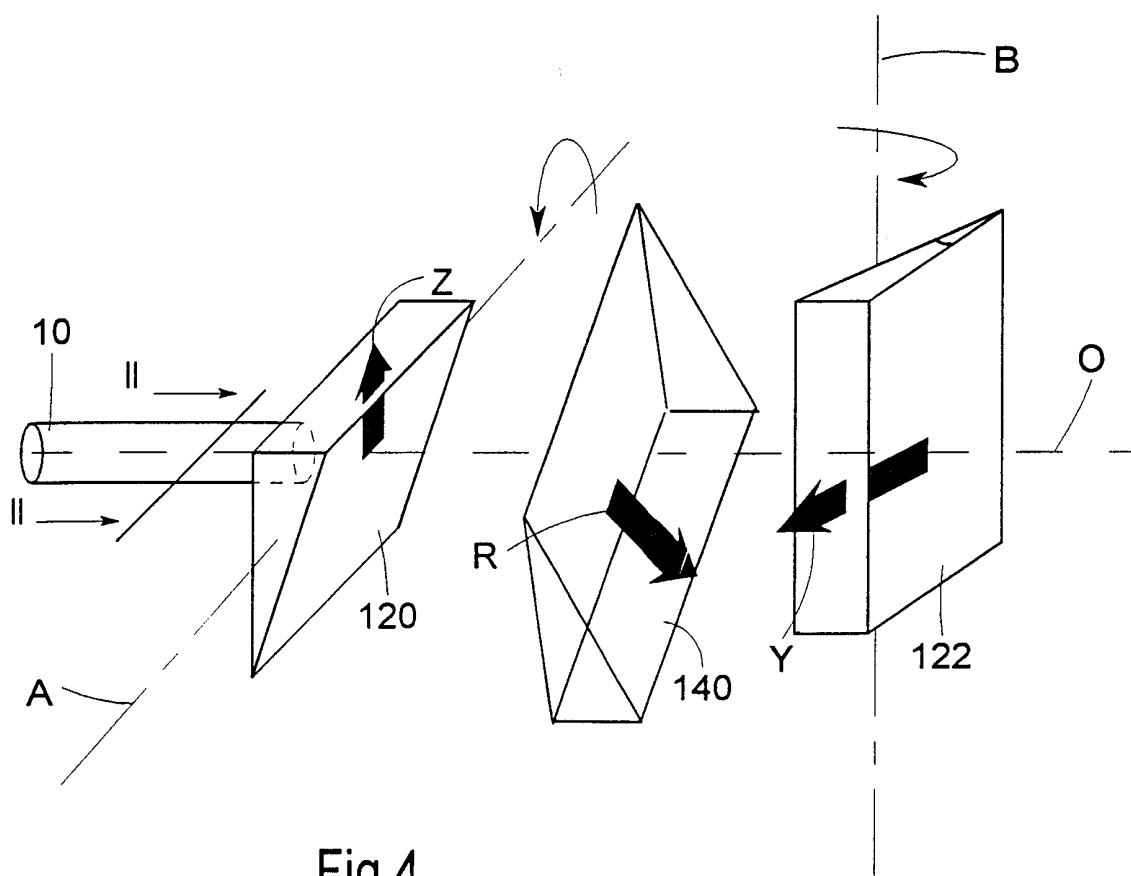


Fig 4

INTERNATIONAL SEARCH REPORT

Inte: onal Application No

PCT/GB 99/00048

A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 G02B26/08

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 G02B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE 12 60 818 B (CARL ZEISS) 8 February 1968	1-3,5
A	see column 1, line 26 - line 36 see column 3, line 40 - line 52 see column 4, line 16 - line 18 see figures 3,5,7	6,7
X	GB 2 200 223 A (FERRANTI PLC) 27 July 1988	1
A	see abstract see page 4, line 1 - line 7 see figures 1-3	2,3,5-7
X	US 4 850 686 A (MORIMOTO AKIRA ET AL) 25 July 1989	1
A	see abstract see example 2 see figures 5-7,10	2-7

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

° Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

8 April 1999

Date of mailing of the international search report

23/04/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Ward, S

INTERNATIONAL SEARCH REPORT

Information on patent family members

Inte. onal Application No

PCT/GB 99/00048

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE 1260818	B	NONE	
GB 2200223	A	27-07-1988	
		DE 3702330 A	17-11-1988
		FR 2712707 A	24-05-1995
		NL 8700228 A	01-07-1988
		SE 8700371 A	05-08-1988
US 4850686	A	25-07-1989	
		JP 2548928 B	30-10-1996
		JP 63193124 A	10-08-1988
		JP 2524143 B	14-08-1996
		JP 63208019 A	29-08-1988
		JP 2524151 B	14-08-1996
		JP 63273829 A	10-11-1988