

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization

International Bureau



WIPO | PCT



(10) International Publication Number

WO 2015/200793 A1

(43) International Publication Date  
30 December 2015 (30.12.2015)

(51) International Patent Classification:

A47F 3/04 (2006.01)

(21) International Application Number:

PCT/US2015/037976

(74)

(22) International Filing Date:

26 June 2015 (26.06.2015)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/017,547 26 June 2014 (26.06.2014) US  
62/073,059 31 October 2014 (31.10.2014) US

(71) Applicant: CORNING INCORPORATED [US/US]; 1 Riverfront Plaza, Corning, New York 14831 (US).

(72) Inventors: CHRISTIANSEN, Kirk Wegner; 213 Kennedy Drive, Horseheads, New York 14845 (US). HARRIS, Dan Owewn; 513 First Ave NW, Hickory, North Carolina 28601 (US). LAW, Tak Lap Derek; 312 Wexford Lane, Horseheads, New York 14845 (US).

RICOULT, Daniel Louis Gabriel; 57 rue Pasteur, F77780 Bourron-Marlotte (FR). SOULLIERE, Mark J; 276 Wall Street, Corning, New York 14830 (US).


(74) Agents: PATEL, Payal A. et al.; Corning Incorporated, Intellectual Property Department, SP-TI-3-1, Corning, New York 14831 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU,

[Continued on next page]

(54) Title: INSULATED GLASS UNIT

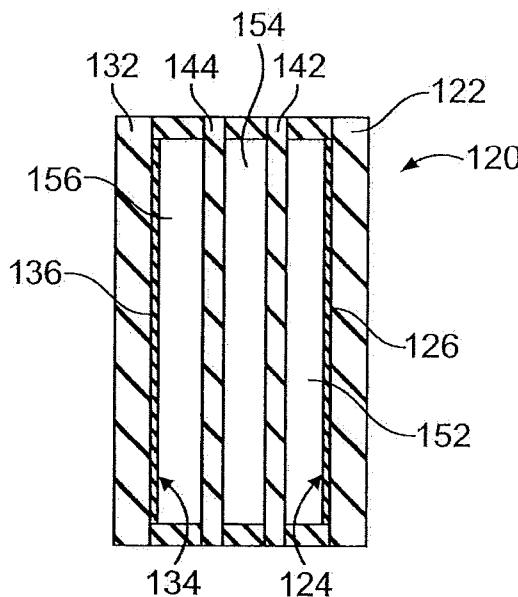

(57) Abstract: An insulated glass unit (20) is described and includes at least first and second glass pane (22, 32) and an optional third glass pane (42). Any one or more of the glass panes (22, 32, 42) may have a thickness of less than or equal to about 0.7 mm. In some instances, any one or more of the glass panes may form part of an electronic display. The insulated glass unit (20) has a lower mass and an improved thermal performance compared to a conventional triple pane insulated glass unit, and is particularly suited for use in a display cooler door.

FIG. 4



TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

**Published:**

— *with international search report (Art. 21(3))*

## INSULATED GLASS UNIT

## CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application claims the benefit of priority under 35 U.S.C. § 119 of U.S. Provisional Application Serial No. 62/017547 filed on June 26, 2014, and U.S. Provisional Application Serial No. 62/073059 filed on October 31, 2014 the content of which is relied upon and incorporated herein by reference in its entirety.

## BACKGROUND OF THE INVENTION

[0002] The present disclosure relates generally to insulated glass units, and more particularly, to improved multiple pane insulated glass units that can be used in a display cooler door assembly.

[0003] Refrigerated display coolers are used in convenience stores, markets, food vending operations, and the like, to keep products, for example beverages and perishable food products, cool. Typically, such display coolers have a refrigerated compartment and an opening that is sealed by a door that can be opened by a consumer to retrieve the desired product.

[0004] Refrigerated display coolers consume a considerable amount of electricity during operation. It is therefore desirable to employ technologies that reduce the display cooler's electricity usage to save on operating costs, improve energy efficiency and reduce the CO<sub>2</sub> footprint (among others) of the cooler. One method of reducing the electricity usage is to make the refrigerated display cooler, itself, more thermally insulative. For example, more insulation could be added to the refrigerated compartment. However, the physical footprint of a display cooler is often constrained, and thicker insulation would mean reducing the total available storage

space inside the cooler, thereby reducing the number of items for sale that can be stocked inside the cooler.

[0005] Another mechanism for improving thermal performance is to make the display cooler door more insulative. A typical display cooler door comprises a frame surrounding an insulated glass unit (IGU). An IGU typically comprises two or more sheets of glass sealed at their peripheral edges by a seal. The sheets of glass are spaced apart, and the space between each sheet of glass, once sealed, can be filled with an inert gas, such as argon or krypton. In doing so, the insulative or thermal performance of the display cooler door can be improved.

[0006] In addition to improving thermal performance, a display cooler door IGU that is more thermally insulative also needs to meet other design constraints. These constraints include: (1) minimized mass for stability purposes of the IGU and to reduce weight-based shipping costs; (2) maximized visible transmittance through the IGU so customers can see displayed products; (3) minimized door thickness to prevent storage space from being reduced (once the display door is closed) to maintain a constrained cooler footprint and to utilize existing hardware (for improved upgrade and cost control purposes for such potential retrofitting, among others); (4) robust mechanical design to prevent IGU breakage when the door is cycled during typical consumer interaction and usage thereof; and (5) minimized manufacturing cost, by using existing hardware, for example.

[0007] One way of improving the thermal performance of an IGU is to increase the number of glass panes from two to three. Although increasing the number of glass panes used in the IGU can improve the thermal performance of the IGU, conventional triple pane IGUs fail to meet the other design constraints, especially the weight and visibility constraints. Accordingly, a display cooler IGU that has improved

thermal insulation properties and that can also satisfy the other design constraints is needed in the industry.

#### BRIEF SUMMARY OF THE INVENTION

[0008] At least one embodiment of the present technology provides an insulated glass unit (i.e., IGU) having at least first, and second glass panes, with at least one glass pane having a thickness of 1.5 mm or less, alternatively a thickness of 0.7 mm or less. In some embodiments, the glass panes have thicknesses that differ from one another.

[0009] In some embodiments, a third glass pane may be disposed between the first glass pane and the second glass pane. In some embodiments, an optional fourth glass pane may be utilized. For reference, as used herein, the first and second glass panes comprise the outermost glass panes and the third and/or fourth glass panes are disposed between the first glass pane and the second glass pane.

[0010] The third glass pane may optionally have a thickness of about 0.7 mm or less. The optional fourth glass pane may have a thickness of 1.5 mm or less or a thickness of 0.7 mm or less. The insulated glass unit further includes gap spaces defined between the glass panes. Where two glass panes are utilized, a first gap space is formed between the first glass pane and the second glass pane. Where three glass panes are utilized, the gap spaces (i.e., second gap space and third gap space) may be disposed between the first glass pane and the third glass pane and between the third glass pane and the second glass pane. Where four glass panes are utilized, the gap spaces may be disposed between the first and third glass panes, between the third and fourth glass panes, and between the fourth and second

glass panes. The gap spaces may be filled with air or an insulating gas such as nitrogen or argon, among others, or a mixture thereof.

[0011] In some aspects, any one or more of the glass panes is strengthened, and any one or more of the glass panes may be coated with a low emissivity coating or other thermally insulative coating. In one or more embodiments, any one or more of the glass panes may form part of an electronic display (e.g., an LCD display), a portion of a back light unit (BLU), function as a waveguide or light guide plate (LGP), form a touch function surface, provide thermal insulation, provide rigidity and/or mechanical structural strength, and combinations thereof.

[0012] Another embodiment of the present technology is a display cooler door that comprises an insulated glass unit, and a frame at least partially surrounding the insulated glass unit. The insulated glass unit may include the two, three or four glass panes described herein.

[0013] Additional features and advantages will be set forth in the detailed description which follows, and in part will be readily apparent to those skilled in the art from that description or recognized by practicing the embodiments as described herein, including the detailed description which follows; the claims; as well as the appended drawings.

[0014] It is to be understood that both the foregoing general description and the following detailed description are merely exemplary, and are intended to provide an overview or framework to understanding the nature and character of the claims. The accompanying drawings are included to provide a further understanding, and are incorporated in and constitute a part of this specification. The drawings illustrate one

or more embodiment(s), and together with the description serve to explain principles and operation of the various embodiments.

#### BRIEF DESCRIPTION OF SEVERAL VIEWS OF THE DRAWINGS

- [0015] Figure 1 is a perspective view of a display cooler door employing an insulated glass unit;
- [0016] Figure 2 is a side view of a triple pane insulated glass unit according to one or more embodiments;
- [0017] Figure 3 is a front view of one embodiment of the central pane of the insulated glass unit;
- [0018] Figure 4 is a side view of a four pane insulated glass unit according to one or more embodiments;
- [0019] Figure 5 is a side view of a four pane insulated glass unit according to one or more embodiments;
- [0020] Figure 6 is a side view of a triple pane insulated glass unit according to one or more embodiments.
- [0021] Figure 7 is a graph illustrating U-values of different insulated glass units;
- [0022] Figure 8 is a graph illustrating heat removal requirements for different insulated glass units.

#### DETAILED DESCRIPTION OF THE INVENTION

- [0023] Reference will now be made in detail to various non-limiting embodiments of the present technology, examples of which are illustrated in the accompanying drawings. Whenever possible, the same reference numerals will be used throughout the drawings to refer to the same or like parts.

[0024] Figure 1 provides an exemplary display cooler door 10 comprising a door frame 15 surrounding a triple pane insulated glass unit 20. The display cooler door 10 can be mounted to a frame which defines an opening in the display cooler. The display cooler door 10 can be swung or slid open or closed to alternately seal or unseal the interior space of the display cooler and allow access to items stored in the display cooler.

[0025] The insulated glass unit 20 is illustrated in Figure 2 and can, in some embodiments, comprise three glass panes 22, 32, and 42, respectively. In some embodiments, one of the three panes may be omitted, providing a double paned configuration. An outermost glass pane 22 can be positioned so that its outer surface 23 faces the ambient external environment or the “warm side” of the display cooler. An innermost glass pane 32 can be positioned so that its outer surface 33 faces the interior or “cold side” of the display cooler. A central pane 42 can be disposed between and spaced apart from the glass pane 22 and the glass pane 32. The central pane 42 can be positioned substantially parallel to the outer and inner glass panes 22, 32 or can be canted away from or towards the outer or inner glass panes 22, 32. Where only two glass panes are utilized, the central pane 42 may be omitted. It should be noted that while glass panes herein described may be referred to as transparent, some portion of all of each glass pane comprising an insulated glass unit can be semi-transparent, opaque, or semi-opaque. Thus, the characterization of a glass pane as in the described embodiments should not limit the scope of the claims appended herewith.

[0026] The outer and inner glass panes 22 and 32 can be, in some embodiments, “thick glass” panes. In some examples, one of the outer and inner glass panes 22 and 32 are “thick glass” panes. Alternatively, the third and/or the fourth glass panes,

when utilized may be "thick glass" panes. "Thick glass", at least for some embodiments of the present technology, means a glass having a thickness in the range of about 1.7 mm to about 3.2 mm or more, and all sub-ranges therebetween. One example of thick glass is soda lime glass, although other types of glass could also be used in the practice of the present technology. Soda lime glass is typically manufactured using a float process known by those skilled in the art. In other embodiments, the outer glass pane 22 can be strengthened, e.g., by thermal tempering, chemical strengthening, or the like, to minimize the likelihood of breakage. Such strengthening processes are known to those of skill in the art. Of course, the inner glass pane 32 (or the third and/or fourth glass panes, where utilized) may also be strengthened.

[0027] In at least one embodiment of the present technology, the inner surface 24 of the outer glass pane 22 can be coated with a thermal coating, such as a low emissivity coating 26. Low emissivity coatings are known in the art and include, without limitation, sputter-coated and pyrolytic coatings that provide a high level of thermal performance and a high visible light transmittance. Such coatings can be formed from a variety of metals and/or metal oxides, including silver, titanium, and fluorine doped tin oxide. Suitable low emissivity coatings include, for example, silver and metal oxide coatings.

[0028] In at least one alternative embodiment of the presently described technology, the inner surface 34 of the inner glass pane 32 can also be coated with a low emissivity coating 36. The low emissivity coatings coated on the inner surfaces of the outer glass pane 22 and the inner glass pane 32 may be the same or different depending upon the desired properties and end use for the insulated glass unit. Combinations of coatings may also be used.

[0029] In some embodiments, the central glass pane 42 can be a “thin glass” pane. In some alternative embodiments, the outer and/or inner glass panes 22 and 32 may be “thin glass” panes. In some embodiments, at least one glass pane differs in thickness from the other glass panes. For example, in some embodiments at least one glass pane may be “thin glass” while the other glass panes are not thin glass. By “thin glass”, for some embodiments of the present technology, is meant a glass that has a thickness of about 1.5 mm or less, alternatively less than 0.9 mm, alternatively less than 0.8 mm, alternatively about 0.7 mm or less, alternatively, in the range from about 0.1 mm to about 1.5 mm, alternatively in the range from about 0.1 mm to about 0.7 mm, and all sub-ranges therebetween. The thin glass panes can be made using a fusion process. Non-limiting exemplary compositions that may be used in such fusion-formed thin glass include aluminosilicate glass, alkali aluminosilicate glass, and boro-aluminosilicate glass. Commercially available examples of thin fusion-formed glass from Corning Incorporated include Corning® Willow® glass, Eagle XG® glass, Gorilla® Glass and Lotus® Glass. Exemplary embodiments may include thin fusion-formed glass having a thickness in the range from about 0.1 mm to about 1.5 mm. For instance, some embodiments may include fusion-formed glass having a thickness of about 0.1 mm, about 0.2 mm, or about 0.3 mm. In some embodiments, the thin fusion-formed glass may have a thickness of about 0.4 mm to about 0.7 mm. In some embodiments, the thin fusion-formed glass may have a thickness of about 1.5 mm or less (e.g., between about 0.4 mm to about 1.5 mm, less than 0.9 mm, less than 0.8 mm, less than about 0.7 mm, less than about 0.5, and all sub-ranges therebetween). It should be noted that while the glass panes have been referenced here as a single glass sheet, the claims appended herewith should not be so limited as the glass panes can be a glass laminate

structure including a glass-polymer laminate structure or a glass-glass laminate structure. Suitable glass-polymer laminate structures include a single sheet of glass laminated to a polymeric film, two sheets of glass having an intermediate polymeric film, and the like. Suitable glass-glass laminate structures include a structure having an inner glass core and one or two outer glass clad layers. Exemplary glass-glass laminate structures and methods of making are described in co-owned U.S. Patent No. 8,007,913, U.S. Patent Publication Nos., 2013/0015180 and 2013/312459, and International Publication No. WO14/018838, the entirety of each being incorporated herein by reference. The thin glass panes described herein could also be made from soda lime glass using a float process. The float process could be conducted in a manner to obtain a soda lime glass pane having a desired thickness of about 0.7 mm or less. Alternatively, a conventional soda lime glass pane having a thickness of about 1.7 to about 3.2 mm could be polished down to a desired thickness of about 0.7 mm or less.

[0030] In some embodiments, using thin glass for the central pane provides several advantages not provided by a conventional display cooler (i.e., IGU) product. For example, thin glass (or thin glass panes) provides a reduced mass and better visibility compared to a conventional triple pane insulated glass unit having a thicker central pane. Thin glass can also provide better thermal insulation compared to a conventional triple insulated glass unit requiring a constrained thickness. In addition, enclosing the thin central pane 42 between the thicker outer and inner panes 22 and 32, respectively, maintains a robust mechanical design that minimizes IGU breakage while providing enhanced thermal efficiency. In some embodiments, the outer and inner panes 22 and 32 may also include thin glass to further reduce weight and exhibit improved optical and strength requirements.

[0031] The central glass pane 42 and outermost glass pane 22 are spaced apart and can define a gap space 52 therebetween, and the central glass pane 42 and innermost glass pane 32 are spaced apart and define a gap space 54 therebetween. Both gap spaces are hermetically sealed by sealant assemblies known in the art. Such sealant assemblies can be formed from, for example, polymeric-based seals or other sealing material(s). The gap spaces can be filled with an inert gas to improve the thermal performance of the insulated glass unit. Suitable inert gases include, but are not limited to, argon, krypton and xenon. Also, mixtures of inert gases, or mixtures of one or more inert gases and air can be used. Suitable mixtures include a mixture of 90% argon and 10% air, alternatively, a mixture of 95% argon and 5% air, alternatively, a mixture of 95% krypton and 5% air, or alternatively, a mixture of 22% argon, 66% krypton and 12% air. Other ratios of inert gases, or inert gas and air, can also be used depending upon the desired thermal performance and end use of the insulated glass unit.

[0032] It should be appreciated by those skilled in the art utilizing the presently described technology that the gas pressure in the gap space 52 can differ from the gas pressure in the gap space 54, in at least some embodiments. This could be due to a difference in the average gas temperature between the two spaces, since the gap space 52 is on the ambient, or warm, side of the insulated glass unit, while the gap space 54 is on the "cold" side, closer to the display cooler interior. The differential pressure could be sufficient to bow an exemplary thin central glass pane 42. To prevent bowing from occurring, at least one channel or opening in the central pane 42 can be provided to allow the gas in the gap space 52 to contact the gas in the gap space 54. Although it is possible to drill one or more holes in the central glass pane 42 to provide the gas communication between the gap spaces, such

drilling can be difficult with a thin glass pane and can result in cracks or breakage. One convenient way to allow the gases to come into contact is to change the outer perimeter shape of the central pane, such as by clipping one or more corners of the central pane, as shown in Figure 3. Changing the outer perimeter by removing or clipping a portion of the central pane results in a stronger central pane and less chance of cracks or breakage. When the central pane is sealed into the insulated glass unit, a clipped corner 48 can allow gas from the warm side gap space 52 to contact gas in the cold side gap space 54. This contact removes the potential for differential pressure between the gap spaces and thereby minimizes or eliminates bowing.

[0033] It should also be appreciated by those skilled in the art that the thickness of the gap spaces 52 and 54 can be varied and can range from about 8 mm to about 18 mm. In some embodiments, any one or more of the gap spaces 52 and 54 (or any other gap spaces) may have a thickness in the range from about 8 mm to about 12 mm, or about 10 mm. In some embodiments, the thickness of the gap spaces 52, 54 can be different. The total thickness of the insulated glass unit 20 can be about 40 mm or less, preferably about 36 mm or less, but can be at least about 26 mm. Desirable low U-values can be obtained when the gap spaces are in the range of about 14 mm to about 16 mm and the total thickness of the insulated glass unit is about 36 mm to about 40 mm. In some embodiments, for example where the footprint of the display cooler is constrained, the total thickness of the insulated glass unit can be about 26 mm to about 28 mm. A further benefit of having a thin glass central pane, especially for insulated glass units requiring a constrained thickness is that it allows for wider gap spaces. One drawback of constrained insulated glass units having narrow gap spaces is that there is a risk that contraction of the gasses

in the gap spaces can cause the outer panes to bow and make contact with the central pane. This result is not only cosmetically unacceptable, it is unacceptable from an energy standpoint since it permits the direct conduction of heat into the cooler. Use of thinner glass panes allows for wider gaps and therefore reduces the risk of this problem.

[0034] In a further aspect, at least one alternative insulated glass unit of the present technology is shown in Figure 4. This embodiment is similar to the embodiment shown in Figure 2 except that the insulated glass unit 120 comprises four glass panes instead of three: an outer glass pane 122, an inner glass pane 132, and two central glass panes 142 and 144 intermediate the outer glass pane 122 and the inner glass pane 132. In one example, the outer and inner glass panes 122 and 132 can be formed from thick glass, for example, soda lime glass, and each can have a thickness in the range of about 1.7 mm to about 3.2 mm. In another example, the central glass panes are thin glass, having a thickness in the range from about 0.1 mm to about 1.5 mm, alternatively, from about 0.1 mm to about 0.7 mm. Alternatively or additionally, any one or more of the outer and inner glass panes 122 and 132 can be formed from thin glass panes, as described herein. Alternatively or additionally, any one or more of the central glass panes may be thick glass panes.

[0035] In at least one embodiment, any one or more of the glass panes (e.g., 122, 132, 142, 144) can be strengthened by thermal tempering, chemical strengthening or another suitable strengthening process. The inner surface 124 of the outer pane 122 of this embodiment can be coated with a thermal coating, such as a low emissivity coating 126. In some embodiments, the inner surface 134 of the inner pane 132 may also be coated with a low emissivity coating 136. The low emissivity coatings selected for the inner surface 124 and the inner surface 134 may be the same or

different. Combinations of coatings may also be used, depending upon the desired thermal performance and end use of the insulated glass unit. Suitable low emissivity coatings are described above in connection with the Figure 2 embodiment.

[0036] Gap spaces 152, 154, and 156 are, respectively, defined between the outer glass pane 122 and the central glass pane 142, between the two central glass panes 142 and 144, and between the central glass pane 144 and the inner glass pane 132. Each of the gap spaces can be sealed with a sealing assembly, as known in the art, and filled with an inert gas, air, or a mixture of inert gas and air. Suitable inert gases include, for example, argon, krypton, and xenon.

[0037] To minimize or prevent the central glass panes from bowing, at least one channel or opening can be provided in each of the central panes 142 and 144 to allow contact between gases in the gap spaces, thereby removing the potential for differential pressures. In some embodiments, the channel is provided by changing the shape of the outer perimeter of the central panes, such as by clipping at least one corner of each of the central panes. The clipped corners can be the same corner for each central pane or can be different corners.

[0038] The thickness of the gap spaces 152, 154 and 156 can be varied and can range from about 7 mm to about 18 mm. In some embodiments, the thickness of the gap spaces 152, 154, and/or 156 can be different. The total thickness of the four pane embodiment of the insulated glass unit 120 is about 60 mm or less, preferably about 56 mm or less, but can be at least about 26 mm. Desirable low U-values can be obtained when the gap spaces are in the range of about 16 mm to about 18 mm and the total thickness of the insulated glass unit is about 54 mm to about 60 mm.

[0039] In one or more embodiments, any one or more of the glass panes may form part of a display (e.g., LCD display), provide thermal insulation, form a back light unit (BLU), form a touch-enabled surface and combinations thereof. Figure 5 illustrates an embodiment that is similar to the embodiment shown in Figure 4 except that the insulated glass unit 220 comprises four glass panes where at least one of the glass panes forms part of a display unit, and a touch-enabled surface. As shown in Figure 5, the insulated glass unit 220 includes an outer glass pane 222, an inner glass pane 232, and two central glass panes 242 and 244 intermediate the outer glass pane 222 and the inner glass pane 232. Gap spaces 252 and 254 are, respectively, defined between the inner glass pane 222 and the central glass pane 244, and between the two central glass panes 244 and 242. Each of the gap spaces can be sealed with a sealing assembly, as known in the art, and filled with an inert gas, air, or a mixture of inert gas and air. Suitable inert gases include, for example, argon, krypton, and xenon.

[0040] In the embodiment shown, there is no gap space between central glass pane 242 and the outer glass pane 222 and, instead, the central glass pane 242 and the outer glass pane 222 form part of an LCD transparent display 260. In the embodiment shown, the outer glass pane 222 also includes a touch-enabled surface and may include a touch foil 226 or other structure providing touch functionality disposed on a surface thereof (e.g., inner surface 224). The inner glass pane 232 includes an inner surface 234, which may optionally include a coating (e.g., a low emissivity coating or other thermally insulative coating 136).

[0041] It should be noted that the inner glass pane 232 may form part of the LCD display and the touch-enabled surface. In one or more examples, the inner glass pane 232 and/or the outer glass pane 222 may be a thin glass pane as described

herein, which may optionally be chemically strengthened. The central glass pane 244 may include a thin or thick glass pane, which may be optionally chemically strengthened. The central glass pane 244 may optionally include a thermally insulative coating. The central glass pane 242, which forms part of the LCD display 260 may provide a back light unit. In some examples, the central glass pane 242 may include a waveguide. The waveguide may be utilized to provide a backlight.

[0042] Figure 6 illustrates an embodiment that is similar to the embodiment shown in Figure 1 except that the insulated glass unit 320 comprises an inner (cold) surface 333, an outer (warm) surface 323 and three glass panes where at least one of the glass panes forms part of a display unit, and a touch-enabled surface. As shown in Figure 6, the insulated glass unit 320 includes an outer glass pane 322, an inner glass pane 332, and a central glass pane 342 intermediate the outer glass pane 322 and the inner glass pane 332. Gap spaces 352 and 354 are, respectively, defined between the inner glass pane 332 and the central glass pane 342, and between the central glass pane 342 and the outer glass pane 322. Each of the gap spaces can be sealed with a sealing assembly, as known in the art, and filled with an inert gas, air, or a mixture of inert gas and air. Suitable inert gases include, for example, argon, krypton, and xenon.

[0043] In the embodiment shown, there is a gap space 352 between central glass pane 344 and the outer glass pane 322, even though the outer glass pane 322 forms part of an LCD transparent display 360. It should be understood that while the embodiments illustrated have been shown with two or more gap spaces and including a display, the claims appended herewith should not be so limited as exemplary embodiments can include an IGU with a single gap and an electronic display. Accordingly, in some embodiments, a single gap space may be utilized, in

combination with an electronic display. For example, in Figure 6, the gap space 352 may be eliminated and only a single gap space (354) may be present, with central glass pane 344 and outer glass pane 322 forming at least part of an electronic display.

[0044] In the embodiment shown, the outer glass pane 322 also includes a touch-enabled surface and may include a touch foil 326 or other structure providing touch functionality disposed on a surface thereof (e.g., inner surface 324). The inner glass pane 332 includes an inner surface 334, which may optionally include a coating 336 (e.g., a low emissivity coating or other thermally insulative coating). It should be noted that the inner glass pane 332 may form part of the LCD display and the touch-enabled surface, instead of or in addition to the outer glass pane 322.

[0045] In one or more examples, the outer glass pane 322 may be a thin glass pane as described herein, which may optionally be chemically strengthened. The central glass pane 342 may include a thin or thick glass pane, which may be optionally chemically strengthened. The central glass pane 342 may optionally include a thermally insulative coating. The central glass pane 342 may form part of a back light unit. In some examples, the central glass pane 342 may include a waveguide. The waveguide may be utilized to provide a backlight.

## Examples

[0046] Various embodiments will be clarified by the following non-limiting examples.

### **Example 1: Comparison of Triple Pane IGUs Containing Thin Glass to Triple Pane Soda Lime Glass IGUs**

[0047] In this example, triple pane insulated glass units having different modifications were compared for glass mass, visible transmittance, U-value, and

heat removal properties. A three pane insulated glass unit containing three panes of soda lime glass, each 3.0 mm thick, is prepared as a base case or control for comparison. The outside (warm side) pane of the base case IGU can be tempered, and has a low emissivity coating on its inside surface. Exemplary low emissivity coatings include, but are not limited to, silver and/or metal oxide containing coatings commercially available from Royal Produits de batiment, Quanex Building Products, Deceuninck North America, Guardian Industries Corp., Cardinal Glass Industries, Inc., Pilkington North America, and Sage Electrochromics, Inc.

[0048] The gap spaces between the panes are each 8.5 mm thick and are filled with a mixture of 90% argon and 10% air. The dimensions of the base case IGU are 1461 mm high by 703 mm wide, with a total thickness of 26 mm. The base case IGU has the following properties:

U factor (W/m <sup>2</sup> K)	1.34
Glass mass (kg)	23.1 kg
Visible transmittance (%)	73%

[0049] As comparison designs, triple pane IGUs are prepared using the same basic design as the base case IGU, except with the modifications described in the following Table 1.

Table 1

<u>Design</u>	<u>Modifications</u>
Design 1  (SLG Low E coating1/SLG/SLG Low E coating1)	<ul style="list-style-type: none"> <li>– additional low emissivity (Low E) coating on the inside surface of the inner (cold side) pane, Low E coating has a visible light transmittance of between about 75 to about 82 percent, solar heat gain coefficient of about 0.69 to 0.72, U-factor of between about 0.25 to 0.34, UV transmission of between about 0.25 to 0.35, fading transmission of between about 0.60 to 0.68,</li> <li>– gap spaces and total thickness are varied: total thickness varies from 26 mm to 60 mm, and the corresponding two evenly spaced gaps vary from <math>(26-9)/2 = 8.5</math> mm to <math>(60-9)/2 = 25.5</math> mm.</li> </ul>
Design 1A  (SLG Low E coating1/W/ SLG Low E coating1)	<ul style="list-style-type: none"> <li>– Same as Design 1, except 0.2 mm Corning® Willow® fusion glass is substituted for the center glass pane, and the gap spaces vary from <math>(26-6.2)/2 = 9.9</math> mm to <math>(60-6.2)/2 = 26.9</math> mm.</li> </ul>
Design 2  (SLG Low E coating2/SLG/ SLG Low E coating2)	<ul style="list-style-type: none"> <li>– Low E coating on the inside surfaces of the outer (warm side) pane and the inner (cold side) pane, Low E coating has a visible light transmittance of between about 65 to about 76 percent, solar heat gain coefficient of about 0.25 to 0.35, U-factor of between about 0.24 to 0.34, UV transmission of between about 0.05 to 0.35, fading transmission of between about 0.40 to 0.50,</li> <li>– gap spaces and total thickness are varied: total thickness varies from 26 mm to 60 mm, and the corresponding two evenly spaced gaps vary from <math>(26-9)/2 = 8.5</math> mm to <math>(60-9)/2 = 25.5</math> mm.</li> </ul>

<u>Design</u>	<u>Modifications</u>
Design 2A (SLG Low E coating2/W/ SLG Low E coating2)	<ul style="list-style-type: none"> <li>– Same as Design 2, except 0.2 mm Corning® Willow® fusion glass is substituted for the center glass pane and the gap spaces vary from <math>(26-6.2)/2 = 9.9</math> mm to <math>(60-6.2)/2 = 26.9</math> mm.</li> </ul>
Design 3 (SLG Low E coating1/SLG/SLG/ SLG Low E coating1)	<ul style="list-style-type: none"> <li>– additional Low E coating on the inside surface of the inner (cold side) pane, characteristics of Low E coating are similar to those in Designs 1 and 1A,</li> <li>– fourth pane of soda lime glass added as additional center pane,</li> <li>– gap spaces and total thickness are varied: total thickness varies from 26 mm to 68 mm, and the corresponding three evenly spaced gaps vary from <math>(26-12)/3 = 4.7</math> mm to <math>(68-12)/3 = 18.7</math> mm.</li> </ul>
Design 3A (SLG Low E coating1/W/W/ SLG Low E coating1)	<ul style="list-style-type: none"> <li>– Same as Design 3, except 0.2 mm Corning® Willow® fusion glass is substituted for both central panes and the gap spaces vary from <math>(26-6.4)/3 = 6.5</math> mm to <math>(68-6.4)/3 = 20.5</math> mm.</li> </ul>

Note:

SLG - represents soda lime glass  
W - represents Willow® glass

[0050] The glass mass and visibility transmittance properties of the base case IGU and the different design IGUs are shown below in Table 2. Comparisons of the U-values and heat removal requirements of the different designs are illustrated in Figures 7 and 8, respectively.

Table 2

	<b>Mass (kg)</b>	<b>Visibility transmittance (%)</b>
Base IGU	23.1 kg	73%

	Mass (kg)	Visibility transmittance (%)
Design 1	23.1 kg	70%
Design 1A	15.9 kg	71%
Design 2	23.1 kg	47%
Design 2A	15.9 kg	47%
Design 3	30.8 kg	64%
Design 3A	16.4 kg	66%

[0051] Comparing the properties of Design 1A, prepared in accordance with the present technology, with those of Design 1, Design 1A has 31% less glass mass (15.9 kg vs. 23.1 kg) and 1% better visibility transmittance (71% vs. 70%) than Design 1. Design 1A also has a lower U-value than Design 1 for all IGU thicknesses under 39 mm, as shown in Figure 7. It should be appreciated by those skilled in the art that a lower U-value (as unexpectedly achieved by the present technology) leads to less heat having to be removed from the display cooler, as shown in Figure 8.

[0052] As shown in Figure 7, the lowest U-value for Design 1A occurs when the IGU has a total thickness of about 36 mm. Compared against the base case IGU, Design 1A, at a thickness of 36 mm, provides an advantageous and significant heat removal savings (up to 44%, see Figure 8) and glass mass savings (31%), at a tradeoff of a very modest 3% less visibility transmittance but at a larger thickness (36 mm vs. 26 mm).

[0053] Comparing the properties of Design 2A, prepared in accordance with the present technology, with those of Design 2, Design 2A has 31% less glass mass (15.9 kg vs. 23.1 kg) and essentially the same visibility transmittance as Design 2. Design 2A also has a lower U-value than Design 2 for all IGU thicknesses, as shown

in Figure 7, resulting in an unexpected and improved heat removal savings (see Figure 6). As shown in Figure 7, the lowest U-value for Design 2A occurs at a total thickness of about 36 mm. Compared against the base case IGU, Design 2A, at a thickness of 36 mm, provides advantageously a significant heat removal savings (up to 52%, see Figure 8) and glass mass savings (29%), but at a tradeoff of 36% less visibility transmittance and larger IGU thickness (36 mm vs. 26 mm).

[0054] Comparing the properties of Design 3A, prepared in accordance with the present technology, with those of Design 3, Design 3A has 47% less glass mass and 3% less visibility transmittance than Design 3. Design 3A also has a lower U-value than Design 3 for all IGU thicknesses less than 60 mm (see Figure 7), resulting in unexpectedly improved heat removal savings (see Figure 8). As shown in Figure 7, the lowest U-value for Design 3A occurs at a total thickness of 56 mm. Compared against the base case IGU, Design 3A, at a thickness of 56 mm, provides the advantage of significant heat removal savings (up to 52%) and glass mass savings (29%), at a tradeoff of a modest 10% less visibility transmittance, but at a larger IGU thickness (56 mm vs. 26 mm).

**Example 2:** Comparison of Triple Pane IGUs Containing Thin Glass to Triple Pane Soda Lime Glass IGUs at Constrained Thickness

[0055] In this example, triple pane cooler door IGUs having a required thickness of 28 mm were compared for glass mass, visibility transmittance and heat infiltration. As the base case for the comparison, a triple pane insulated glass unit is prepared and has three panes of soda lime glass, each 3.0 mm thick. The outside (warm side) pane is tempered and has an exemplary low emissivity coating on its inside surface. The gap spaces between the panes are each 9.5 mm thick and are filled

with air. The dimensions of the base case IGU are 1461 mm high by 703 mm wide, with a total thickness of 28 mm.

[0056] As the experimental embodiments, triple pane insulated glass units are prepared using the same basic design as the base case IGU except with the following design modifications: an exemplary low emissivity coating (see Design 1) is added on the inside surface of the inner (cold side) pane; the gap spaces are filled with a mixture of 90% argon and 10% air; and the center soda lime glass pane is replaced with thin fusion glass; for embodiment A, the thickness of the fusion glass is 0.5 mm and the gap spaces are each 10.75 mm; for embodiment B, the thickness of the fusion glass is 1.0 mm and the gap spaces are each 10.5 mm.

[0057] The properties of the base case and experimental embodiment A are shown in Table 3.

Table 3

	U-Factor (W/m <sup>2</sup> K)	Glass Mass (lb.)	Visibility Transmittance
Base Case IGU	1.54	50.6	72.6%
Embodiment A	0.89	36.7	70.7%
% Difference	42% less	28% less	3% Darker

[0058] The experimental embodiment A provides unexpectedly a 42% improvement on heat infiltration and a 28% improvement on glass mass, while losing approximately about 3% in visible transmittance compared to the base case IGU, as shown in Table 3. The experimental embodiment B provides similar advantageous improvements: 41% improvement on heat infiltration and a 22% improvement on glass mass, and approximately about 3% loss in visibility transmittance compared to the base case IGU.

[0059] It will be apparent to those skilled in the art that various modifications and variations can be made without departing from the spirit and scope of the invention, which is defined by the appended claims.

## CLAIMS

1. An insulated glass unit comprising:
  - a first glass pane having an outer surface and an inner surface;
  - a second glass pane having an outer surface and an inner surface;
  - a first sealed gap space defined between the first glass pane and the second glass pane;

wherein any one or more of the first glass pane and the second glass pane has a thickness less than or equal to about 0.7 mm.
2. The insulated glass unit of claim 1, further comprising:
  - a third glass pane disposed between the first and second glass panes,
  - a second sealed gap space defined between the first glass pane and the third glass pane, and

a third sealed gap space defined between the second glass pane and the third glass pane.
3. The insulated glass unit of claim 2, wherein the third glass pane comprises a thickness less than or equal to about 0.7 mm.
4. The insulated glass unit of any one of claims 1-3, wherein any one or more of the first glass pane, and second glass pane not having a thickness less than or equal to about 0.7 mm has a thickness in the range of about 1.7 mm to about 3.2 mm.
5. The insulated glass unit of any one of the preceding claims, wherein the inner surface of the first glass pane is coated with at least one low emissivity coating or a mixture of coatings.
6. The insulated glass unit of any one of the preceding claims, wherein any one or more of the first glass pane, second glass pane, and the third glass pane are strengthened.
7. The insulated glass unit of any one of the preceding claims, wherein the inner surface of the second glass pane is coated with at least one low emissivity coating.

8. The insulated glass unit of any one of the preceding claims, wherein the first sealed gap space is filled with at least one insulating glass or a mixture thereof.

9. The insulated glass unit any one of the preceding claims, wherein the second sealed gap space is filled with at least one insulating gas or a mixture thereof, and wherein the third sealed gap space is filled with at least one insulating gas or a mixture thereof.

10. The insulated glass unit of claim 9, wherein the gas in the second sealed gap space communicates with the gas in the third sealed gap space through at least one channel or opening in the third glass pane.

11. The insulated glass unit of claim 10, wherein the channel or opening is a clipped corner of the third glass pane.

12. The insulated glass unit of any one of the preceding claims, further comprising a fourth glass pane intermediate the first and second glass panes, the fourth glass pane having a thickness less than or equal to about 0.7 mm.

13. The insulated glass unit of any one of the preceding claims, wherein any one or more of the first glass pane, the second glass pane and the third glass pane comprises any one or more of: an electronic display, a back light unit (BLU), a waveguide, a light guide plate (LG), and a touch function surface.

14. A display cooler door comprising:

an insulated glass unit that comprises a first glass pane, a second glass pane, and a third glass pane, wherein the third glass pane is intermediate the first and second glass panes, and wherein any one of the first, second and third glass panes has a thickness less than or equal to about 0.7 mm; and

a frame at least partially surrounding the insulated glass unit.

15. The display cooler door of claim 14, wherein the insulated glass unit has a first sealed gap space defined between the first and third glass panes, and a second sealed gap space defined between the second and third glass panes.

16. The display cooler door of claim 14 or claim 15, wherein any one or more of the first glass pane, the second glass pane, and the third glass pane has a surface coated with one or more thermal coatings.

17. The display cooler door of any one of claims 14-16, wherein any one or more of the first glass pane, the second glass pane, and the third glass pane is strengthened.

18. The display cooler door of any one of claims 14-17, wherein the insulated glass unit further comprises a fourth glass pane, wherein the fourth glass pane has a thickness less than or equal to about 0.7 mm and is intermediate the first and second glass panes.

19. The display cooler door of any one of claims 14-18, wherein any one or more of the first glass pane, the second glass pane and the third glass pane comprises any one or more of: an electronic display, a back light unit (BLU), a waveguide, a light guide plate (LG), and a touch function surface.

20. An insulated glass unit comprising:  
a first glass pane;  
a second glass pane;  
a third glass pane intermediate the first and second glass panes;  
a first sealed gap space defined between the first glass pane and the third glass pane; and

a second sealed gap space defined between the second glass pane and the third glass pane,

wherein any one or more of the first glass pane, the second glass pane, and the third glass pane has a thickness less than or equal to about 0.7 mm, and

wherein the third glass pane has a channel or opening configured to communicate gas between the first and second sealed gaps.


21. The insulated glass unit of claim 20, wherein the channel or opening is a clipped corner of the third glass pane.

22. The insulated glass unit of claim 20 or 21, further comprising a fourth glass pane having a thickness less than or equal to about 0.7 mm, the fourth glass pane intermediate the first and second glass panes.

23. The insulated glass unit of claim 22, wherein the fourth glass pane has a channel or opening configured to communicate gas between adjacent sealed gaps.

24. The insulated glass unit of any one of claims 20-23, wherein any one or more of the first glass pane, the second glass pane and the third glass pane comprises any one or more of: an electronic display, a back light unit (BLU), a waveguide, a light guide plate (LG), and a touch function surface.

1/6

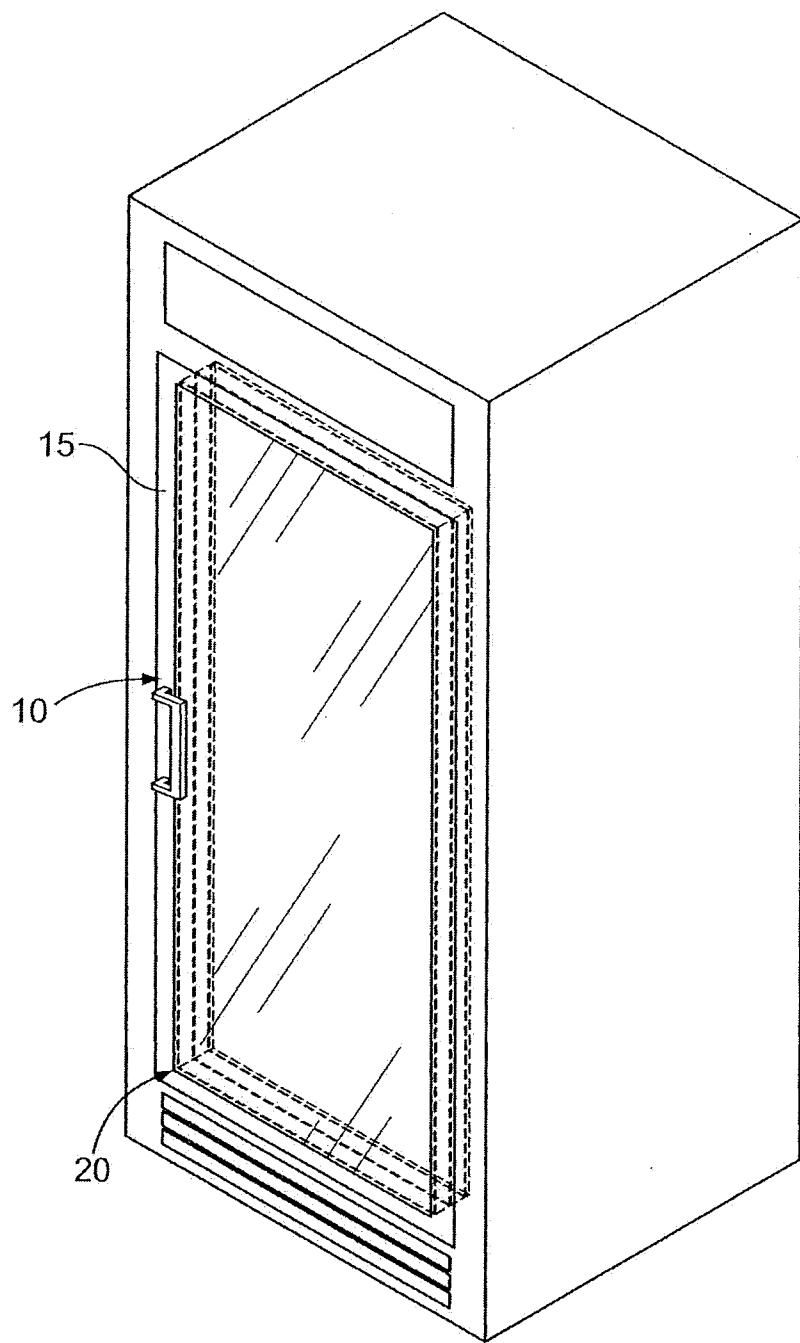**FIG. 1**

2/6

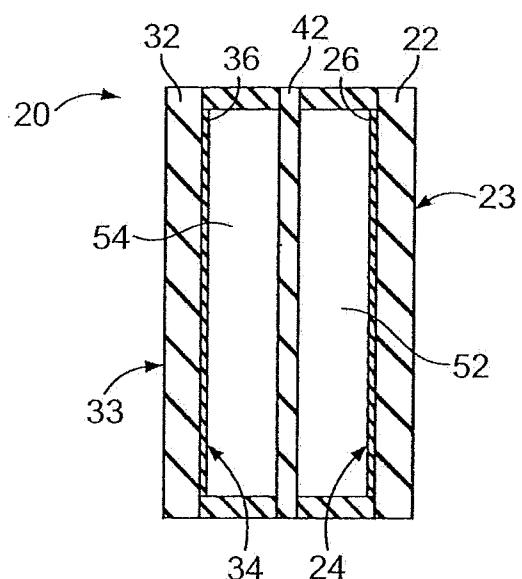


FIG. 2

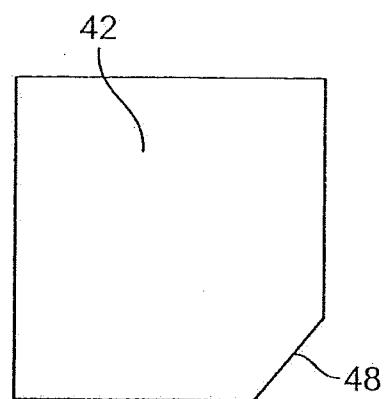


FIG. 3


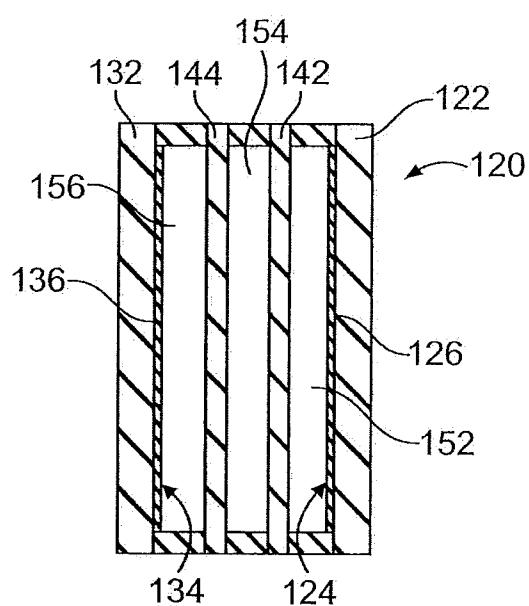


FIG. 4

3/6

FIGURE 5

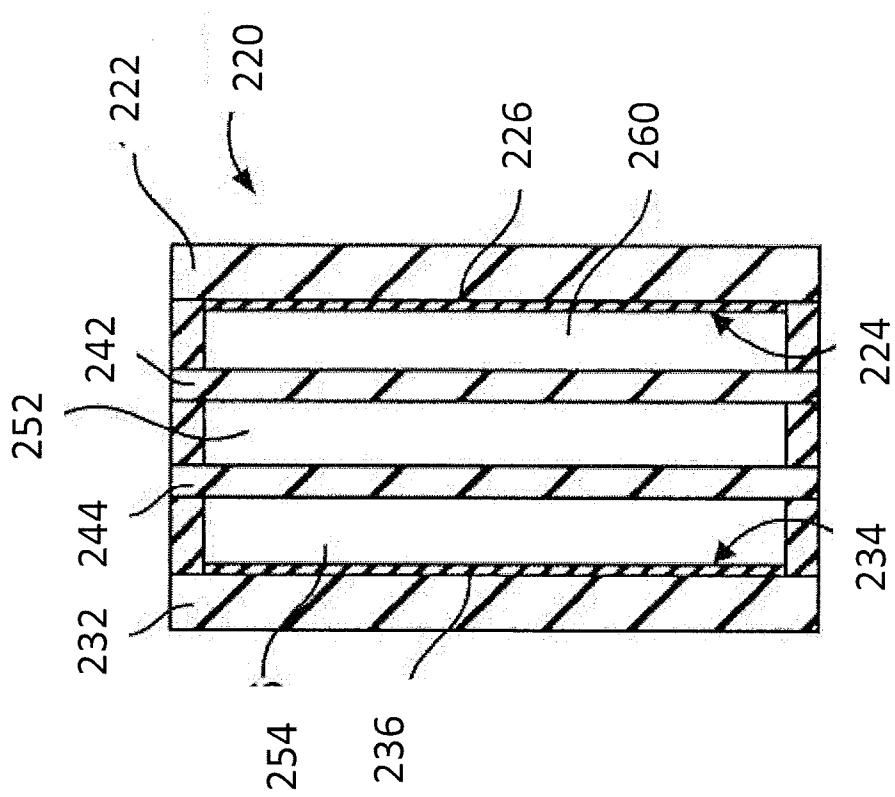

4/6

FIGURE 6



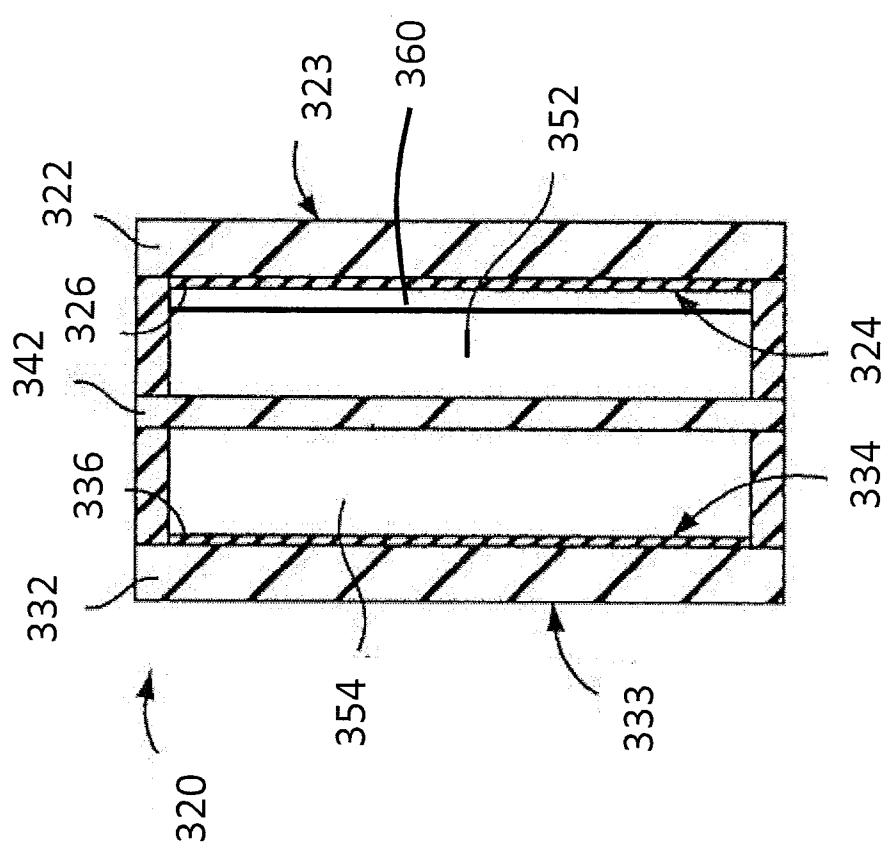


FIG. 7

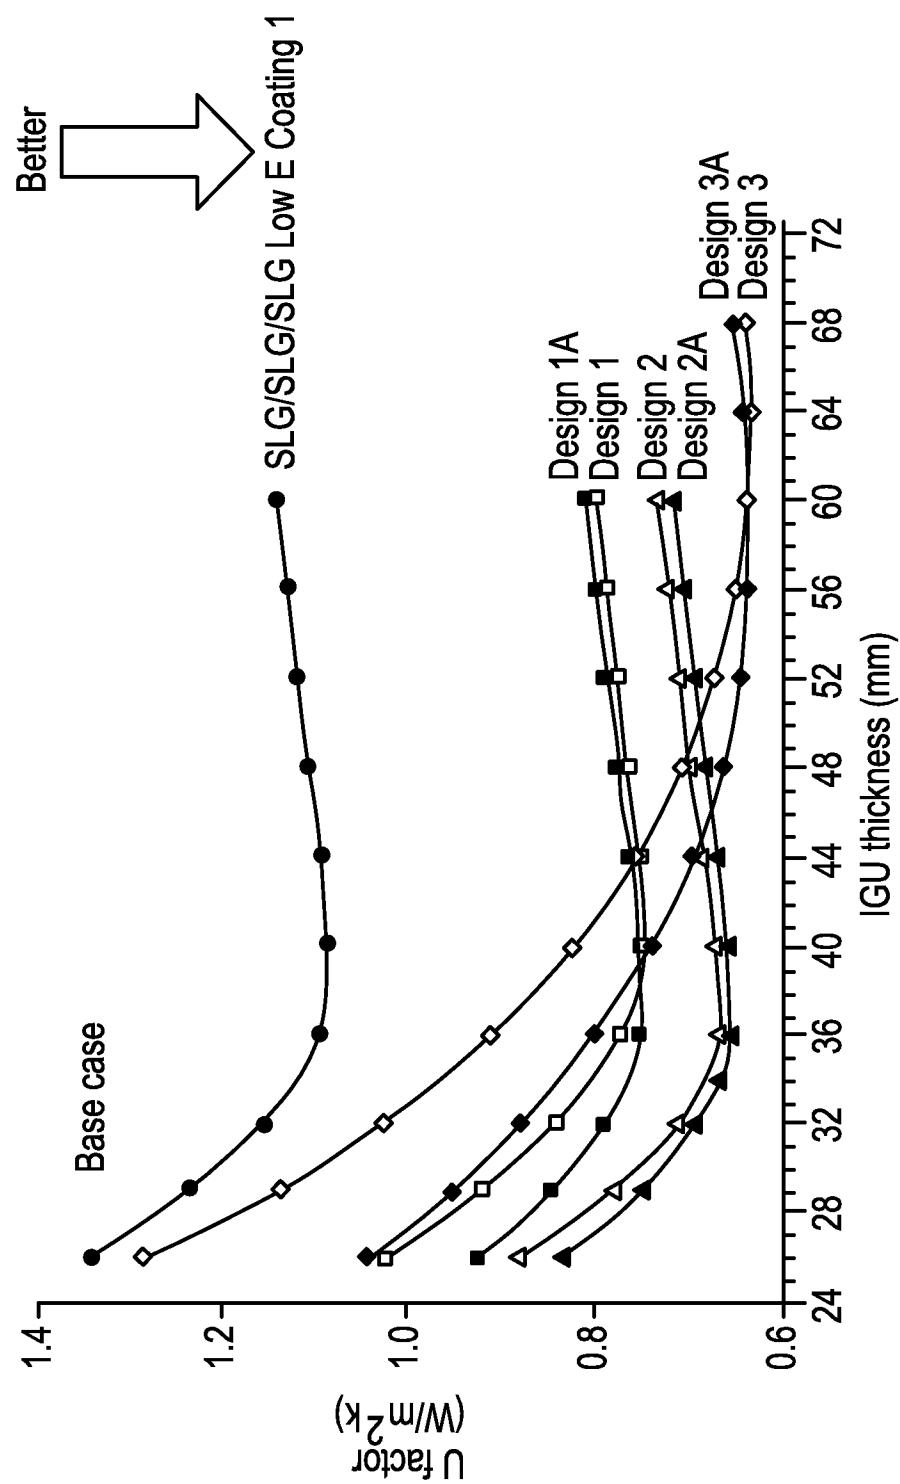

6/6

FIG. 8

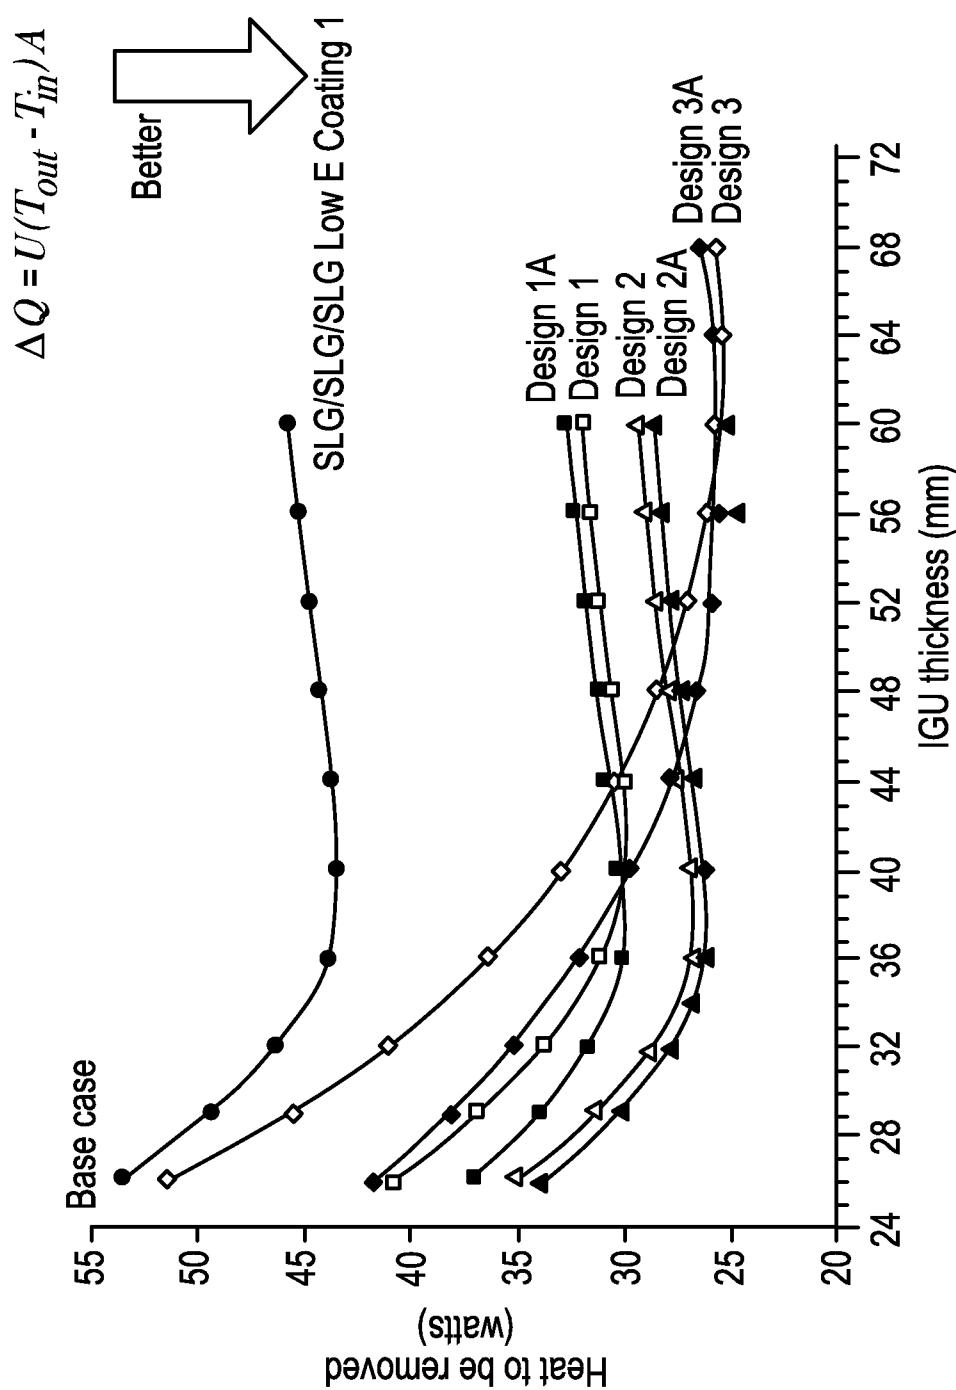

# INTERNATIONAL SEARCH REPORT

International application No  
PCT/US2015/037976

**A. CLASSIFICATION OF SUBJECT MATTER**  
INV. A47F3/04  
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
A47F E06B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2006/005484 A1 (RIBLIER ET AL) 12 January 2006 (2006-01-12) figures 1-3 -----	1-24
X	US 2014/144083 A1 (ARTWOHL ET AL) 29 May 2014 (2014-05-29) figures 1-13 -----	1-24
A	US 2011/304252 A1 (STUBBLEFIELD) 15 December 2011 (2011-12-15) figure 2 -----	10
X, P	WO 2014/181712 A1 (ASAHI GLASS CO LTD) 13 November 2014 (2014-11-13) figures 1-5 -----	1-4,8,9, 14-16,19
X, P	US 2014/290156 A1 (BRUCE ET AL) 2 October 2014 (2014-10-02) figures 4A, 4B -----	1-4,8-11

Further documents are listed in the continuation of Box C.

See patent family annex.

\* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance  
"E" earlier application or patent but published on or after the international filing date  
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)  
"O" document referring to an oral disclosure, use, exhibition or other means  
"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention  
"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone  
"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art  
"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
24 August 2015	02/09/2015
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer  Linden, Stefan

**INTERNATIONAL SEARCH REPORT**

Information on patent family members

International application No

PCT/US2015/037976

Patent document cited in search report		Publication date		Patent family member(s)		Publication date
US 2006005484	A1	12-01-2006	BR CN DE DK ES JP KR US US WO	P10520276 A2 101222866 A 202005022110 U1 1890575 T3 2478628 T3 5329948 B2 2008545465 A 20080013916 A 2006005484 A1 2008164788 A1 2006125874 A1		15-09-2009 16-07-2008 14-03-2014 21-07-2014 22-07-2014 30-10-2013 18-12-2008 13-02-2008 12-01-2006 10-07-2008 30-11-2006
US 2014144083	A1	29-05-2014	US US	2014144083 A1 2015216326 A1		29-05-2014 06-08-2015
US 2011304252	A1	15-12-2011	CA US	2738748 A1 2011304252 A1		09-12-2011 15-12-2011
WO 2014181712	A1	13-11-2014	TW WO	201509349 A 2014181712 A1		16-03-2015 13-11-2014
US 2014290156	A1	02-10-2014	CA US	2847741 A1 2014290156 A1		28-09-2014 02-10-2014