

(12) PATENT
(19) AUSTRALIAN PATENT OFFICE

(11) Application No. **AU 199915702 B2**
(10) Patent No. **752961**

(54) Title
Remote metering

(51)⁶ International Patent Classification(s)
G08C 017/02 H01Q 001/44

(21) Application No: **199915702** (22) Application Date: **1998 .12 .15**

(87) WIPO No: **WO99/31633**

(30) Priority Data

(31) Number (32) Date (33) Country
9726567 1997 .12 .16 GB

(43) Publication Date : **1999 .07 .05**

(43) Publication Journal Date : **1999 .09 .02**

(44) Accepted Journal Date : **2002 .10 .03**

(71) Applicant(s)
Advanced Technology Ramar Ltd

(72) Inventor(s)
Peter Garrard; Peter Hibbitt

(74) Agent/Attorney
FREEHILLS CARTER SMITH BEADLE, Level 43, 101 Collins Street, MELBOURNE VIC 3000

(56) Related Art
US 5280498
EP 629098
US 4504822

15702/99



PCT


WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : G08C 17/02, H01Q 1/44		A1	(11) International Publication Number: WO 99/31633
			(43) International Publication Date: 24 June 1999 (24.06.99)
(21) International Application Number: PCT/GB98/03749		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 15 December 1998 (15.12.98)			
(30) Priority Data: 9726567.2 16 December 1997 (16.12.97) GB			
(71) Applicant (for all designated States except US): ATL MONITORS LIMITED [US/US]; Unit 5, New Fields Business Park, Poole, Dorset BH17 7LQ (US). ONF			
(72) Inventors; and (73) Inventors/Applicants (for US only): GARRARD, Peter [GB/GB]; ATL Monitors Limited, Unit 5, New Fields Business Park, Poole, Dorset BH17 7LQ (GB). HIBBITT, Peter [GB/GB]; ATL Monitors Limited, Unit 5, New Fields Business Park, Poole, Dorset BH17 7LQ (GB). ONF		Published With international search report.	
(74) Agent: VIGARS, Christopher, Ian; Haseltine Lake & Co., Imperial House, 15-19 Kingsway, London WC2B 6UD (GB).		IP AUSTRALIA - 5 JUL 1999 RECEIVED	
(71) Advanced Technology Roman limited 7 Enterprise Way, Bournemouth International Airport, Christchurch Dorset BH23 6HK, United Kingdom			



(54) Title: REMOTE METERING

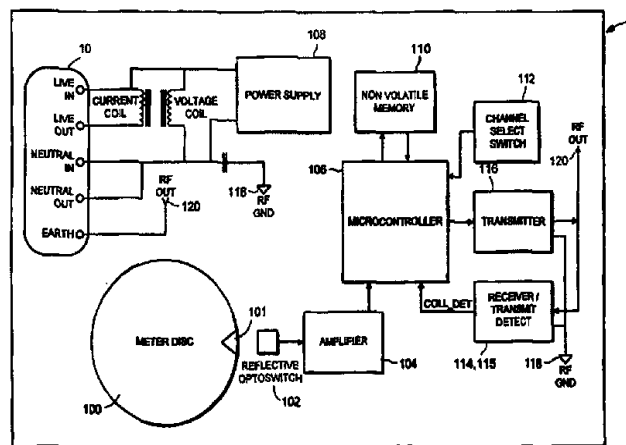

(57) Abstract

A meter for use in a radio frequency remote metering system comprises an antenna; a transmitter for transmitting meter signals via the antenna; a receiver connected to the antenna for receiving and filtering an incoming radio frequency signal; and a carrier signal detection circuit which is connected to receive the filtered radio frequency signal and which is operable to detect the presence or absence of a carrier signal, and to prevent activation of the transmitter in response to the presence of the carrier signal, to activate the transmitter in response to the absence of the said carrier signal.

REMOTE METERING

The present invention relates to remote metering and in particular to radio frequency transmitters
5 suitable for remote metering applications.

Public and private utility distribution companies, for example water, gas and electricity distributors, are continuously exploring new ways to monitor service provision and to reduce costs. Increasing the number
10 of times that readings from a particular meter are taken can improve the monitoring of the service. However, increased readings with current manual systems would result in higher costs due to the increased number of meter reading personnel that would be
15 required.

Thus, it is desirable to provide utility meters, which can be remotely accessed, for example by way of a radio frequency (RF) communication system.

A previously considered remote metering system is
20 shown schematically in Figure 1, and comprises a number of remote meters 1 which communicate in groups to remote metering concentrators 2. The remote metering concentrators 2 are in turn connected to communicate with a central billing unit 3. In such systems, the
25 remote meters 1 may ideally communicate with a remote meter concentrator 2 by way of a radio frequency communications link. The concentrators 2 can communicate with a gateway to the central billing unit 3 by way of a radio frequency link, a PSTN land line,
30 or other wide area network.

One way of avoiding signal clash between remote units in the same group would be to provide a distinct channel for each remote meter in the group. This
however would prove extremely costly, both in terms of
35 money and bandwidth requirements. Reducing the number of remote meters in a group would decrease the number

of channels required, but would mean that many more concentrators would be required, hence increasing the cost.

5 However, there is a problem associated with using radio frequency communications for such metering applications, because of the large number of meters involved, particularly in cities. Such large numbers of meters can easily lead to collision of the signals from adjacent meters, and hence lead to loss of data.

10 Previously considered systems have incorporated radio connections in which polling of remote meters takes place by the concentrator. The concentrator polls the meter to request information, and in reply the meter concerned returns the meter reading. This
15 requires a complicated receiver and decoder to be provided in each meter.

 According to a first aspect of the present invention, there is provided a meter for use in a radio frequency remote metering system, the meter comprising
20 a transmitter for transmitting meter signals, a receiver for receiving and filtering an incoming radio frequency signal, and a carrier signal detection circuit, which is connected to receive the filtered radio frequency signal and which is operable to detect
25 the presence or absence of a carrier signal, and to prevent activation of the transmitter in response to the presence of the carrier signal, and to activate the transmitter in response to the absence of the said carrier signal.

30 Preferably, the receiver can be provided with a local oscillator signal by the transmitter, and the transmitter output can be isolated from its antenna. The local oscillator frequency is preferably set
35 differently to that required by the transmitter for transmission of a signal.

 In one embodiment of the present invention, meter

information is stored in a non-volatile memory. In an electricity meter embodying the present invention, the mains supply lines can provide the power supply for the meter.

5 According to a second aspect of the present invention, there is provided a remote metering system comprising a plurality of meter according to the first aspect of the invention, at least one remote meter concentrator for receiving signals from a predefined
10 group of remote meters, and a central control unit for receiving signals from each remote meter concentrator.

 The data from the meters is maintained at the concentrator, reducing the data traffic from the meters when a request for a reading comes from the utility.
15 This is particularly necessary where the country regulations require a 20%/80% data flow on the licence exempt frequency allocation between meters and concentrators.

 Thus aspects of the present invention do not need
20 to perform the process of poll, request and reply associated with previously considered systems.

 Another problem associated with remote metering devices is the desirably small size of the meter housing, so that the meter is unobtrusive. This
25 restricts the size of the antenna, which in turn can restrict the effective propagation range between the transmitters and receivers.

 According to a third aspect of the present invention, there is provided a radio frequency
30 transmitter system for use in a metering device, wherein a supply line of the metering device serves as an antenna for the transmitter.

 One electricity meter embodying the third aspect of the present invention makes use of the earth supply
35 line as an antenna.

 Thus, the third aspect of the invention can

provide a longer antenna than previously available for small meter applications. This leads to consequent improvements in propagation and performance.

For a better understanding of the invention, and to show how the same may be carried into effect, reference will now be made, by way of example, to the accompanying drawings, in which:-

Figure 1 shows a schematic block diagram of a remote metering system;

Figure 2 shows a block diagram of a remote meter embodying the present invention; and

Figures 3A and 3B show a detailed circuit diagram of one specific design of remote meter embodying the present invention.

The overall scheme of the previously considered remote metering system of Figure 1 can be used with embodiments of aspects of the invention.

A remote-access electricity meter embodying the present invention is shown schematically in Figure 2, and a specific example of such a meter is shown in detail in Figures 3A and 3B. The meter comprises electricity supply inputs and outputs 10 and a meter disc 100 which is caused to rotate when current flows through the electricity supply terminals. This aspect of the remote meter 1 is entirely conventional.

A power supply 108 is provided, and takes power from the voltage coil of the mains input. As shown in more detail in Figure 3A, the power supply 108 provides two separate supply voltages for the processing and RF circuits (UP 5V and RF 5V respectively). In this way, these two circuits can be effectively isolated from one another in order to suppress noise transmission therebetween.

The meter disk 100 is provided with a mark, for example a black paint mark, which is used to detect rotation of the disk 100. A reflective opto-switch

detector 102 is connected via a signal amplifier 104 to a micro-controller 106. The opto-switch 102 provides a pulse each time the mark passes the opto-switch 102. The opto-switch includes a light source, which produces
5 a light beam, which is reflected by the face of disk 100. When the reflecting beam is broken by the paint mark, a pulse is produced.

The amplifier 104 amplifies and filters the pulse signal to provide a cleaned (debounced) signal to
10 reduce the number of faulty readings produced by scratched paint, disk jitter, stopping on the paint mark, etc., a second sensor may be used for detection of reverse rotation of disc 100.

A micro-controller 106 operates to count and store
15 a meter reading relating to the total pulse count. The reading is stored in non-volatile memory 110 so that it can be retained even when the electricity supply is interrupted.

When appropriate, the micro-controller 106
20 operates to transmit, via the transmitter 116 and antenna system 120, the currently stored meter reading to the appropriate remote meter concentrator 2 (Figure 1).

Preferably, the meter can be assigned one of a
25 number of different frequencies used in the concentrator group, for example a total of sixteen different channels can be provided in one concentrator group. This has the advantage that many meters can be provided which are arranged in cells and can be spaced
30 apart in both time and frequency domains. A further function that becomes available from the software-programmed frequency is that if any frequency becomes blocked by faulty units, other users, etc., alternate channels are available.

35 In a particular embodiment of the invention, the transmitter can be centred on 183.875 MHz, and can have

sixteen separate channels at 25 KHz spacing between 183.675 and 184.050 MHz. The channel selection is made by way of a channel select switch 112, or software selection, which is preferably a dual in-line switch package SW1.

The time at which the reading is transmitted can be controlled in any appropriate manner. For example, the meter reading can be transmitted on a specific RF channel at predetermined intervals, for example every three hours.

Alternatively, the channel selection and time of transmission for a particular transmitter could be chosen such that a particular channel is chosen for the particular time of transmission. For example channel one could be used during the first three minutes of every hour, channel two the next three minutes, etc.. The other transmitters in the concentrator group could be allocated channels at different times to the first transmitter to provide effective time domain multiplexing.

Time domain multiplexing can be used to enable a concentrator to provide, for example, around 300 readings per hour, and each meter can for example transmit once every three hours.

Due to the high number of remote meters installed in a given area, particularly in a city, it is necessary to avoid collision of transmitting signals. The provision of a number of channels and the allocation of the channels can serve to reduce the chances of collision between transmitted signals. Naturally, it will be possible to have respective signals transmitted on all channels at the same time, but signals transmitted on the same channel at the same time from different remote meters will collide and data will probably be lost.

Accordingly, the remote meter 1 embodying the

present invention incorporates a receiver 114 and a carrier detect circuit 115. The RF receiver 114 operates to receive and filter the incoming RF signal, and the carrier detect circuit 115 simply operates to
5 detect the presence or absence of the carrier frequency for the channel on which the meter will transmit. In order to isolate the transmit detect circuit from spuriously detecting the transmitter circuit, the local oscillator of the transmitter is switched to a non-
10 transmitting frequency (CH-1). This serves to prevent the transmitter producing a signal at the expected carrier frequency.

In addition, an output attenuator (126 in Figure 3) is enabled and the radio frequency power amplifier
15 of the transmitter is not powered. The attenuator is preferably provided by a PIN diode package. The receiver 114 receives a local oscillator signal from the transmitter in order to be able to search for signals. This simplifies the overall circuitry by
20 reducing the number of local oscillators required for transmission and reception of the signal. The transmit detect circuit 115 is then able to detect reliably the presence of the carrier frequency of the channel concerned, and when this carrier frequency is not
25 detected, the transmitter can be activated. In one embodiment, the detection circuit operates to detect any carrier signal within its bandwidth, thus simplifying the detection circuit considerably.

The micro-controller 106 receives an output signal
30 (coll_det) from the transmit detect circuitry 115. A transmit control output TXON (from pin 3.7) of the micro-controller 106 switches the transmitter on and off.

When the transmitter is activated, the attenuator
35 126 is disabled, the RF power amplifier is powered, and the output data modulation sequence is provided to the

transmitter. An output filter 122 serves to filter the modulated output signal before transmission to the antenna 120.

5 As shown in Figure 3B, in one specific embodiment of the present invention uses a diode package D3 to detect the carrier signal. One half of D3 detects beat frequencies presented by the receiver, and the other half provides temperature and voltage compensation.

10 In the specific example shown in Figure 3, the attenuator 126 is provided by diodes D1 and D2. The output of the transmitter amplifier can be blocked from the antenna by half of D1 and D2 while the transmitter local oscillator frequency is used by the receiver. The other half of D1 connects the antenna to the
15 receiver. The functions of D1 and D2 can then be reversed in order to connect the transmitter output to the antenna.

The output data sequence comprises data for transmitting to the remote meter concentrator 2.
20 Typically this sequence could include a preamble or header portion, data concerning the meter type and meter ID, total pulse count data (meter reading data), an error detection code and check sum, and finally a stop bit. The pure data sequence is preferably encoded
25 into a high frequency digital modulation scheme which can provide robust communication and minimal data loss.

The non-volatile memory 110 can preferably store up to three pages of data, which can be used to correlate meter readings when the power supply is
30 interrupted.

In preferred embodiments of the invention, the antenna 120 is provided by the mains earth connection. The radio frequency ground is provided by the neutral line of the mains supply. Using the mains supply lines
35 in this way enables the effective length of the output antenna to be greatly increased over that possible

within the confines of the meter housing. This is due to the fact that if an RF signal is applied to the mains supply lines, those lines act as an antenna up to the point at which the supply reaches the first earthing point or transformer. Thus, in a large building, virtually the whole of the mains supply system can be used as an antenna. This greatly improves the output of the transmitter.

The meter illustrated in Figures 2, 3A and 3B is an electricity meter, although the principle could of course be applied to water and gas meters, assuming that a power supply for the circuitry can be provided.

A remote metering system comprising a plurality of meter according to the first aspect of the invention, at least one remote meter concentrator for receiving signals from a predefined group of remote meters, and a central control unit for receiving signals from the or each remote meter concentrator.

A relay repeater system is usefully provided using a plurality of meters embodying the first aspect of the present invention, and at least one repeater to connect the meters to a remote meter concentrator. The repeaters are capable of re-transmitting the meter readings on any RF channel used by the concentrator or meter.

The concentrator may provide further functions when used as a simultaneous data pathway for other uses. It may be used for monitoring any Radio frequency linked devices that require to be monitored within the geographic environment covered by the combination of the concentrator and relay repeaters. One combination of the system links security systems and fire systems to the appropriate utility.

The combination provides full bi-directional communication of all such systems. For example meters may be switched off from the central utility database.

THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:

1. A remote metering system comprising:

a plurality of remote meters each of which includes an antenna, a transmitter for transmitting meter signals via the antenna, a receiver connected to the antenna
 5 for receiving and filtering an incoming radio frequency signal, and a carrier signal detection circuit which is connected to receive the filtered radio frequency signal and which is operable to detect the presence or absence of a carrier signal, and to prevent activation of the transmitter in response to the presence of a carrier signal, or to activate the transmitter in response to the absence of said carrier signals;

- 10 a plurality of concentrator units arranged for direct RF communication with respective groups of remote meters to receive respective meter data therefrom; and

a central control unit arranged for communicating with the plurality of concentrator units for receiving meter data from the plurality of concentrator units,

- 15 characterised in that the remote meters in a meter group are operable to initiate communication with the corresponding concentrator unit during respective predefined time periods.

2. A system as claimed in claim 1, wherein each concentrator unit defines a plurality of RF communication channels over which communication between the
 20 concentrator unit and the meters in the corresponding meter group occurs.

3. A system as claimed in claim 2, wherein each meter in a meter group is assigned a predetermined channel defined by the corresponding concentrator unit for communication therewith.

- 25 4. A system as claimed in any one of claims 1 to 3, wherein each meter in a meter group is operable to communicate with the corresponding concentrator unit at predetermined time intervals.

- 30 5. A system as claimed in any one of claims 1 to 4, wherein at least one of the



remote meters is operable to receive transmissions from the associated concentrator unit, such transmissions relating to changes in operating conditions of the meter concerned.

5 6. A system as claimed in any one of the preceding claims, wherein the receiver is provided with a local oscillator signal by the transmitter, the transmitter output being isolated from the antenna during such provision of the local oscillator signal.

7. A system as claimed in claim 6, wherein the local oscillator frequency is set
10 differently to that required by the transmitter for transmission of a signal.

8. A system as claimed in any one of the preceding claims wherein meter data is stored in a non-volatile memory in the remote meter concerned.

15 9. A system as claimed in any one of the preceding claims, wherein, if the remote meter is an electricity meter, the antenna is provided by power supply lines, or, if the remote meter is a water meter, the antenna is provided by the sensor lines of the meter.

20 10. A system as claimed in any one of claims 1 to 8, wherein each remote meter is an electricity meter, the antenna of each meter being provided by the supply lines of the meter.

11. A system as claimed in any one of the preceding claims, wherein at least one
25 concentrator unit is operable to receive signals from additional units other than the remote meters in the group, and to transfer those other signals to other predefined central control units.

12. A system as claimed in claim 11, wherein the additional units provide security or fire systems.



13. A remote metering system substantially as hereinbefore described with reference to the accompanying drawings.


5

DATED: 29 May 2002

FREEHILLS CARTER SMITH BEADLE

Patent Attorneys for the Applicant:

ATL MONITORS LIMITED



Melbourne\004070473 - Printed 29 May 2002 (16:01)

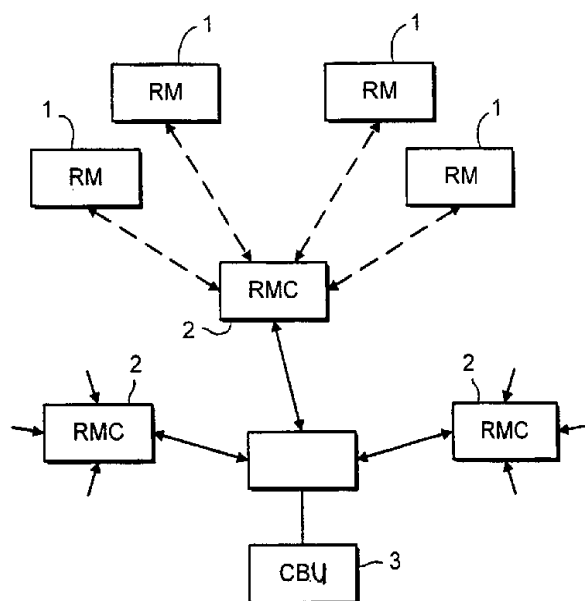


FIG. 1

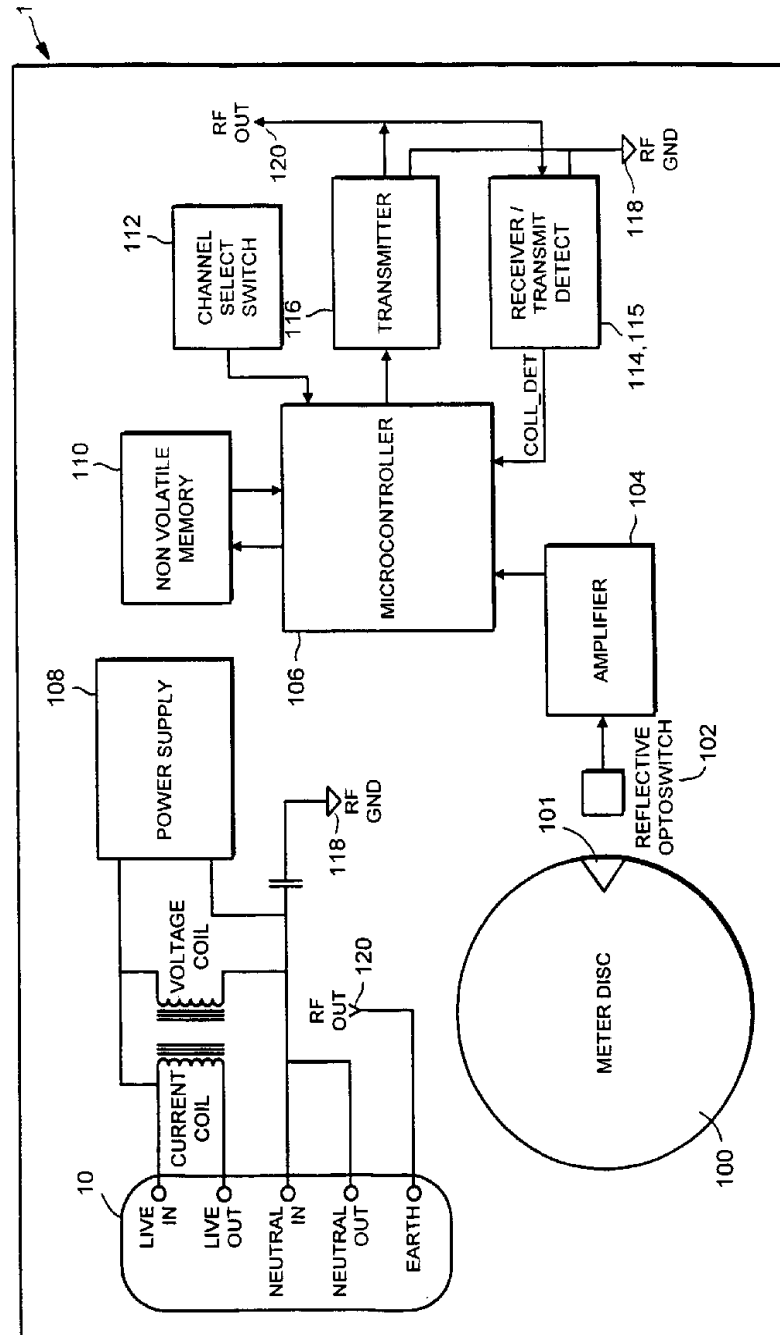


FIG. 2

3 / 4

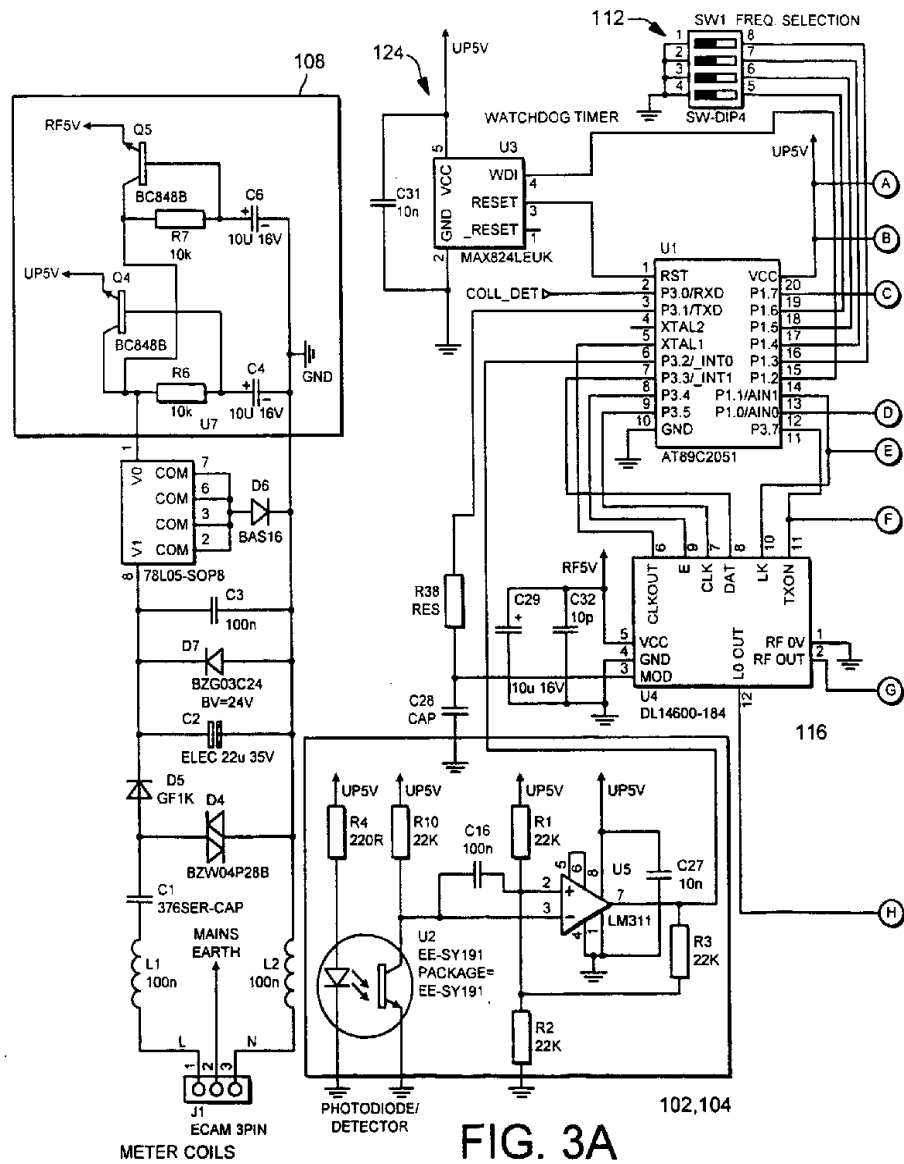


FIG. 3A

SUBSTITUTE SHEET (RULE 26)

