



(51) International Patent Classification:

H01Q 1/08 (2006.01) *H01Q 19/10* (2006.01)
H01Q 15/20 (2006.01)

(21) International Application Number:

PCT/US2017/032446

(22) International Filing Date:

12 May 2017 (12.05.2017)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

15/154,760 13 May 2016 (13.05.2016) US

(71) Applicants: **ARIZONA BOARD OF REGENTS ON BEHALF OF THE UNIVERSITY OF ARIZONA** [US/US]; The University of Arizona, Tech Launch Arizona, University Services Annex, 4th floor, P.O. Box 210300, Tucson, Arizona 85721-0300 (US). **SOUTHWEST RESEARCH INSTITUTE** [US/US]; 6220 Culebra Road, San Antonio, Texas 78238-5166 (US).

(72) Inventors: **WALKER, Christopher K.**; 933 North Cherry Avenue, Room 211, Tucson, Arizona 85721 (US). **SMITH, Ira Steve**; 8331 CR 311, Utopia, Texas 78884 (US).

(74) Agent: **GREENBAUM, Michael C.**; Blank Rome LLP, 1825 Eye Street, N.W., Washington, District of Columbia 20006 (US).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC,

SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: DEPLOYABLE REFLECTOR ANTENNA

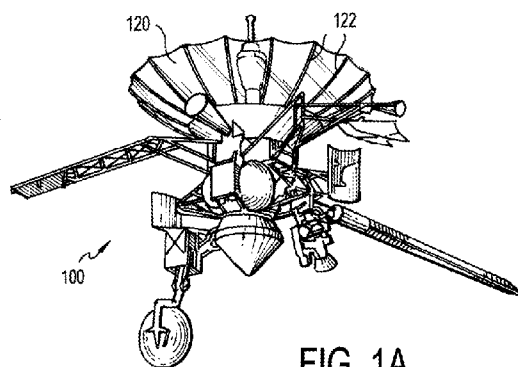


FIG. 1A

(57) Abstract: A balloon reflector antenna for a satellite, including a spherical balloon with a surface transparent to electromagnetic waves and a reflective surface opposite the transparent surface. The balloon reflector antenna may further include a feed system extending from the center of the balloon that receives electromagnetic waves reflected off the reflective surface and/or outputs electromagnetic waves that are reflected off the reflective surface.



DEPLOYABLE REFLECTOR ANTENNA

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application claims priority to U.S. Pat. Appl. No. 15/154,760, filed May 13, 2016, which is incorporated herein by reference in its entirety.

STATEMENT REGARDING FEDERALLY SPONSORED RESEARCH

[0002] Not applicable.

BACKGROUND

[0003] High gain space antennas have a number of military and civilian uses, including (secure or unsecure) point-to-point communications, satellite imaging, and synthetic aperture radar (SAR), as well as for planetary and astrophysics research. In point-to-point communications applications, increasing antenna gain increases the data rates at frequencies of interest, allowing ground users to receive more data (*e.g.*, higher resolution images) using devices with smaller antennas (*e.g.*, handheld devices).

[0004] In satellite imaging applications, increasing antenna gain allows higher resolution images to be transmitted to the ground in real time. With conventional satellite antennas, satellite images must be transmitted at lower resolutions because of limited available bandwidth.

[0005] Synthetic aperture radar uses the motion of the radar antenna to create images of objects on the ground with a finer spatial resolution than is possible with conventional beam-scanning radars. In SAR applications, increasing antenna gain enables the SAR to capture images with higher resolution and better contrast (*i.e.*, greater sensitivity).

[0006] Antenna gain may be increased by increasing the diameter of the antenna. Conventional large diameter antennas, however, often have complex deployment mechanisms and, due to their mass and volume, are expensive to transport into space and place in orbit. Some high gain antennas may even require a dedicated launch vehicle.

[0007] FIGS. 1A and 1B are diagrams that illustrate conventional spacecrafts 100 and 101, including conventional parabolic antennas 120 and 121.

[0008] FIG. 1A illustrates a conventional spacecraft 100 with a conventional ribbed (*i.e.*, umbrella) antenna structure 120. The parabolic antenna structure 120 includes ribs 122 to maintain the parabolic shape. In the past the complexity of the rib structure has led to notable deployment failures (*e.g.*, the Galileo Jupiter probe shown in FIG. 1A). Because the parabola does not collapse in three dimensions, the launch volume of the conventional antenna structure 120 is proportional to the cube of the linear dimension.

[0009] FIG. 1B illustrates a conventional spacecraft 101 with a solid parabolic dish 121 stowed for transport in a rocket fairing 180. Because the parabola does not collapse in three dimensions, the launch volume of the parabolic dish 121 is proportional to the cube of the linear dimension.

[0010] Because of their size and weight, conventional satellites are expensive to deploy. A satellite with a conventional 5 m antenna, for example, may have a mass of approximately 50 to 80 kilograms and a stowed volume of approximately 1×10^6 cubic centimeters. Conventional satellites 100 and 101 also require significant power and include large, heavy components such as a transmitter, power management, and thermal control.

[0011] Additionally, in order to reposition a conventional satellite antenna and direct the beam to a new location, the entire satellite must be rotated. The components necessary to rotate a satellite add to the cost to manufacture the satellite and, because they add additional size and weight, further increase the cost to deploy the satellite.

[0012] Because of the expense to deploy conventional high gain spacecraft antennas, there is a need for a high gain antenna with a reduced stowed volume and the weight. Additionally, there is a need for a high gain spacecraft antenna that can be repositioned without repositioning the entire spacecraft.

SUMMARY

[0013] In order to overcome those and other drawbacks with conventional spacecraft antennas, there is provided a balloon reflector antenna for a spacecraft, including a spherical balloon with one surface transparent to electromagnetic waves and a reflective surface opposite the transparent surface. The balloon reflector antenna may include a feed system extending from

the center of the balloon that receives or transmits electromagnetic waves from or to the reflective surface.

BRIEF DESCRIPTION OF THE DRAWINGS

[0014] Aspects of exemplary embodiments may be better understood with reference to the accompanying drawings. The components in the drawings are not necessarily to scale, emphasis instead being placed upon illustrating the principles of exemplary embodiments, wherein:

[0015] FIGS. 1A and 1B are diagrams illustrating conventional spacecraft with conventional parabolic antennas.

[0016] FIG. 2 is a diagram illustrating a satellite with a large balloon reflector antenna as deployed in space according to an exemplary embodiment of the present invention.

[0017] FIG. 3 is a diagram illustrating the balloon reflector antenna of FIG. 2 stowed for launch according to an exemplary embodiment of the present invention

[0018] FIG. 4 is a diagram illustrating the balloon reflector antenna of FIG. 2 in conjunction with a satellite imaging system according to an exemplary embodiment of the present invention

[0019] FIG. 5 is a diagram illustrating a satellite including the balloon reflector antenna of FIG. 2 and a second balloon reflector antenna according to exemplary embodiments of the present invention.

DETAILED DESCRIPTION

[0020] Preferred embodiments of the present invention will be set forth in detail with reference to the drawings, in which like reference numerals refer to like elements or steps throughout.

[0021] FIG. 2 is a diagram illustrating a satellite 200 with a large balloon reflector antenna 220 as deployed in space according to an exemplary embodiment of the present invention. The balloon reflector antenna 220 provides high gain and enables the satellite 200 to maintain a small launch volume and low mass.

[0022] As shown in FIG. 2, the balloon reflector antenna 220 includes a spherical balloon 240. The balloon 240 includes a surface transparent to electromagnetic waves 242 and a

reflective surface 244 opposite the transparent surface 242. The balloon 240 may also include one or more dielectric support curtains 246 to help the balloon 240 keep its spherical shape. The satellite 200 also includes a balloon reflector canister 282, an RF module 284, a telecommunications module 286, a pitch reaction wheel 288, a roll reaction wheel 289, a power module 290, and solar cells 292.

[0023] The balloon reflector antenna 220 may include a feed system 260. The feed system 260 may be any suitable device that receives electromagnetic waves that are reflected off the reflective surface 244 or emits electromagnetic waves that are reflected off the reflective surface 244. For example, the feed system 260 may include one or more feedhorns, one or more planar antennas, one or more spherical correctors such as a quasi-optical spherical corrector or a line feed (as illustrated in FIG. 2), etc. The feed system 260 may extend from the center of the balloon 240 along one or more radial lines of the balloon 240. The feed system 260 may include a motorized mount 262 at the center of the balloon 240 to pivot the feed system 260.

[0024] In order to focus the balloon reflector antenna 220, the feed system 260 may include the motorized mount 262 to move the feed system 260 radially. Because the line of focus of the balloon reflector antenna 220 can be any radius of the spherical balloon 240, the antenna beam is easily steered through large angles without degradation. If the reflective surface 244 encompasses nearly an entire hemisphere of the balloon reflector antenna 220, the antenna beam may be steered at angles ± 30 degrees.

[0025] When the balloon reflector antenna 220 receives a signal (*e.g.*, from the ground), the signal passes through the transparent surface 242 and encounters the reflective surface 244, which focuses the signal into the feed system 260. When the balloon reflector antenna 220 transmits a signal (*e.g.*, to the ground), the signal is emitted by the feed system 260 and encounters the reflective surface 244, which directs the signal through the transparent surface 242. In one embodiment, a balloon reflector antenna 220 with a 1 meter diameter reflective surface 244 yields a 2 degree beam at X-band frequencies (*i.e.*, 8.0 to 12.0 gigahertz). At an altitude of 450 kilometers, the beamwidth on the ground from the 1 meter balloon reflector antenna 220 is approximately 10 miles. At X-band frequencies, the support uplink and downlink data rates of the balloon reflector antenna 220 are between 3 and 50 megabits per second (or more, depending on balloon reflector diameter and transmitter power) for Ethernet-like

connections. In addition to X-band communications, the balloon reflector antenna 220 may provide high bandwidth communications at other frequencies (*e.g.*, W-band, V-band, Ka-band, Ku-band, K-band, C-band, S-band, or L-band frequencies).

[0026] The motorized mount 262 enables the beam to be steered without rotating the entire satellite 200. In one embodiment, the beam can be precisely steered over a ± 150 mile radius by pivoting the feed system 260.

[0027] The transparent surface 242 may be any flexible material with a low absorption rate (*e.g.*, less than 1 percent) at the wavelength of interest. For example, the transparent surface 242 may be a flexible polymer such as an approximately 0.5 mil thick Mylar skin (*e.g.*, a 0.5 mil $\pm$ 1 mil Mylar skin). The roughness of the transparent surface 242 may be less than or equal to 1/30 the wavelength of interest.

[0028] The reflective surface 244 may be any suitable material that reflects electromagnetic waves at the wavelength of interest. For example, the reflective surface 244 may be an approximately 0.5 micron (*e.g.*, 0.5 micron $\pm$ 0.1 micron) metallic coating applied to the material that forms the transparent surface 242. Because the transparent surface 242 is thin and transparent, the metallic coating may be applied to the inside surface or the outside surface of the balloon 240 to form the reflective surface 244. The metallic coating is applied to an area on one hemisphere of the balloon reflector antenna 220. The reflective surface 244 may be almost an entire hemisphere of the balloon reflector antenna 220 opposite the transparent surface 242.

[0029] NASA deployed metalized balloon satellites from 1960 through 1966. Known as Project Echo, Passive Communications Satellite (PasComSat or OV1-8), and Passive Geodetic Earth Orbiting Satellite (PAGEOS), the satellites functioned merely as reflectors that, when placed in low Earth orbit, would reflect signals from one point on the Earth's surface to another. Unlike the previous metalized balloon satellites, the balloon reflector antenna 220 uses the interior surface of the sphere to form a hemispherical antenna.

[0030] The balloon reflector antenna 220 may be combined with convention satellite components to form the satellite 200. For example, the RF module 284 may send or receive signals via the feed system 260. The RF module 284 may be electrically connected to the feed system 260 through a flexible, low-loss coaxial cable, a microstrip/slot line, etc. The

telecommunications module 286 may include conventional satellite communications equipment to enable the satellite 200 to receive command and control signals via the balloon reflector antenna 220. The pitch wheel 288 and the roll wheel 289 control the attitude of the satellite 200. The power module 290 stores power in a battery received from the solar panels 292, which may provide approximately 80 watts of peak power.

[0031] In one embodiment, the RF module 284, the telecommunications module 286, the pitch wheel 288, the roll wheel 289, and the power module 290 may be CubeSat units. A CubeSat is a miniaturized satellite made up of multiples of $10 \times 10 \times 11.35$ cm cubic units. CubeSats have a mass of no more than 1.33 kilograms per unit, and often use commercial off-the-shelf components for their electronics and structure. The balloon reflector antenna 220 also provides aerodynamic stability to the satellite 200. For example, the modules (*e.g.*, CubeSat modules) may be oriented in the direction of travel such that articles in the atmosphere wrap around the balloon and stabilize the satellite 200.

[0032] FIG. 3 is a diagram illustrating the satellite 200 with the balloon reflector antenna 220 stowed for launch according to an exemplary embodiment of the present invention. As shown in FIG. 3, the balloon reflector antenna 220 is stowed uninflated in the balloon reflector canister 282 during launch.

[0033] For small satellites, it is often harder to meet the volume constraint than it is to meet the mass constraint. Unlike conventional parabolic antennas, the diameter of the balloon reflector antenna 220 is unrelated to the volume of the balloon reflector antenna 220 when stowed for launch. As a result, a collapsed balloon reflector antenna 220 can fit into otherwise unused space within the structure of a small satellite 200. In one embodiment, for example, a small (*e.g.*, 1-2 meter) balloon reflector antenna 220 can stow in one or more 1U CubeSat units. In another embodiment, a large (*e.g.*, 10 meter) balloon reflector antenna 220 and associated RF payload can easily fit into existing rocket fairings.

[0034] Referring back to FIG. 2, when deployed in space, the balloon reflector antenna 220 is inflated to form the spherical shape. For example, a small gas cylinder or a cylinder containing sublimating chemicals may be opened to inflate the balloon reflector antenna 220 out the back of the balloon reflector canister 282. As described above, the balloon reflector antenna

220 may include one or more dielectric support curtains 246 (for example, along the equatorial plane of the balloon reflector antenna 220) that expand with the balloon reflector antenna 220. The dielectric support curtain(s) 246 may help ensure that the balloon reflector antenna 220 maintains its spherical shape. For example, to support aperture efficiency, the balloon reflector antenna 220 may be configured such that it holds its spherical shape to within less than or equal to $1/16$ of the wavelength of interest. Additionally, the dielectric support curtain(s) 246 may support/locate the feed system 260, which is pulled out of the balloon reflector canister 282 along with the balloon reflector antenna 220.

[0035] FIG. 4 is a diagram illustrating the balloon reflector antenna 220 in conjunction with a satellite imaging system 410 according to an exemplary embodiment of the present invention. As shown in FIG. 4, the satellite 400 may include a balloon reflector antenna 220 and a conventional satellite imaging system 410. The satellite imaging system 410 captures images (*e.g.*, images of the ground), which are output to the balloon reflector antenna 220 (*e.g.*, via the RF module 284). Because the balloon reflector antenna 220 provides data rates of up to 50 Mbps (or more depending on transmitter power and reflector size), the satellite 400 is able to transmit satellite imagery captured by the satellite imaging system in its native resolution in real time.

[0036] FIG. 5 is a diagram illustrating a satellite 500 including a first balloon reflector antenna 220 and a second balloon reflector antenna 520 according to exemplary embodiments of the present invention. Similar to the first balloon reflector antenna 220, the second balloon reflector antenna 520 includes a spherical balloon 540 with a transparent surface 542 and a reflective surface 544 and a feed system 560. The feed system 560 may include a motorized mount 562. The balloon 540 may include one or more dielectric support curtains 546.

[0037] In one embodiment, the second balloon reflector antenna 520 receives a signal (*e.g.*, from a first point on the ground) and the first balloon reflector antenna 220 retransmits that signal (*e.g.*, to a second point on the ground) to provide point-to-point communication. The satellite 500 may shift the signal from an uplink frequency to downlink frequency. Additionally or alternatively, the satellite 500 may use onboard processing to demodulate, decode, re-encode and modulate the signal. In a second embodiment, the second balloon reflector antenna 520 captures images via synthetic aperture radar (SAR) and the first balloon reflector antenna 220 transmits those images (*e.g.*, to the ground).

[0038] The foregoing description and drawings should be considered as illustrative only of the principles of the inventive concept. Exemplary embodiments may be realized in a variety of sizes and are not intended to be limited by the preferred embodiments described above. Numerous applications of exemplary embodiments will readily occur to those skilled in the art. Therefore, it is not desired to limit the inventive concept to the specific examples disclosed or the exact construction and operation shown and described. Rather, all suitable modifications and equivalents may be resorted to, falling within the scope of this application.

CLAIMS

What is claimed is:

1. A balloon reflector antenna for a satellite, the balloon reflector antenna comprising:
a spherical balloon with a surface transparent to electromagnetic waves and a reflective surface opposite the transparent surface.
2. The balloon reflector antenna of Claim 1, further comprising:
a feed system extending along one or more radial lines from a center of the spherical balloon that receives electromagnetic waves reflected off the reflective surface and/or emits electromagnetic waves that are reflected off the reflective surface.
3. The balloon reflector antenna of Claim 2, wherein the electromagnetic waves output by a feed system and reflected off the reflective surface pass through the transparent surface.
4. The balloon reflector antenna of Claim 2, wherein the electromagnetic waves received by a feed system pass through the transparent surface before being reflected off the reflective surface.
5. The balloon reflector antenna of Claim 1, wherein the transparent surface has an absorption rate of less than 1 percent at a wavelength of interest.
6. The balloon reflector antenna of Claim 1, wherein the transparent surface is a flexible polymer.
7. The balloon reflector antenna of Claim 1, wherein the transparent surface is approximately 0.5 mil thick.

8. The balloon reflector antenna of Claim 1, wherein the reflective surface is formed by applying a metallic coating to the material that forms the transparent surface.

9. The balloon reflector antenna of Claim 8, wherein the metallic coating is approximately 0.5 microns thick.

10. The balloon reflector antenna of Claim 2, wherein the feed system is configured to pivot from the center of the spherical balloon to extend along any axis of the spherical balloon.

11. The balloon reflector antenna of Claim 1, wherein the balloon reflector antenna transmits images captured by a satellite imaging system.

12. The balloon reflector antenna of Claim 1, wherein the balloon reflector antenna transmits images captured by a second balloon reflector antenna via synthetic aperture radar.

13. The balloon reflector antenna of Claim 1, wherein the balloon reflector antenna retransmits a signal received by a second balloon reflector antenna.

14. The balloon reflector antenna of Claim 1, wherein the balloon reflector antenna is configured such that the spherical balloon can be stowed in an uninflated state during launch of the satellite.

15. The balloon reflector antenna of Claim 2, wherein the balloon reflector antenna is configured such that the spherical balloon and the feed system can be stowed in a canister during launch of the satellite.

16. The balloon reflector antenna of Claim 15, wherein the canister is one or more CubeSat units.

17. The balloon reflector antenna of Claim 16, wherein the balloon reflector antenna is configured such that the spherical balloon can be inflated while the satellite is in orbit.



18. The balloon reflector antenna of Claim 17, wherein the balloon reflector antenna is configured such that the feed system is pulled out of the canister as the spherical balloon is inflated.

19. A method of making a balloon reflector antenna for a satellite, the method comprising:

providing a spherical balloon with a surface transparent to electromagnetic waves and a reflective surface opposite the transparent surface.

20. The method of Claim 19, further comprising:

providing a feed system extending along one or more radial lines from the center of the balloon that receives electromagnetic waves reflected off the reflective surface and/or emits electromagnetic waves that are reflected off the reflective surface.

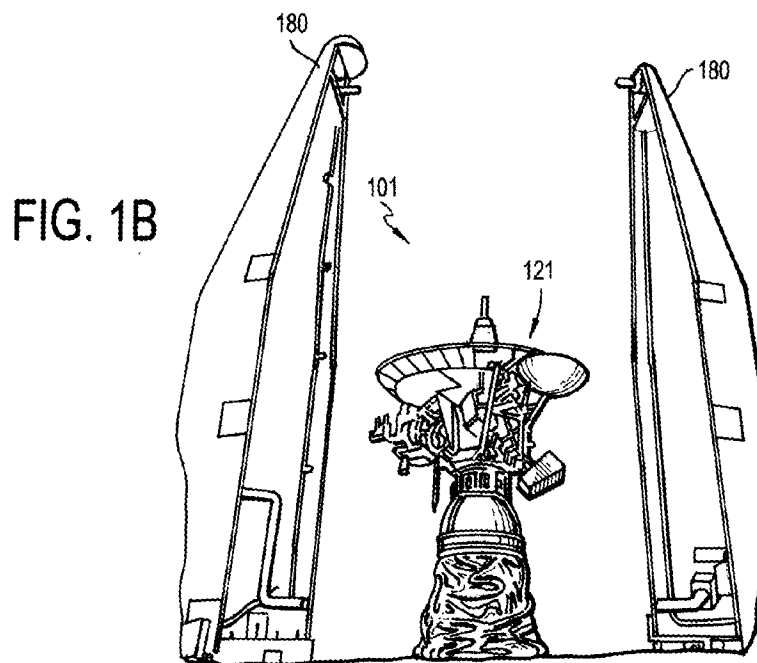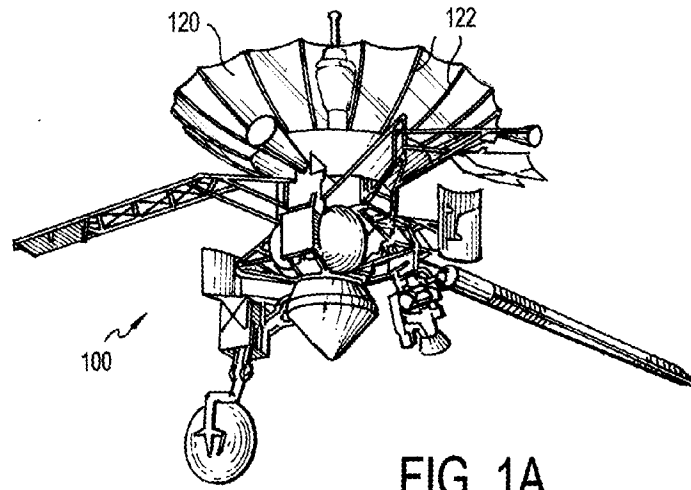

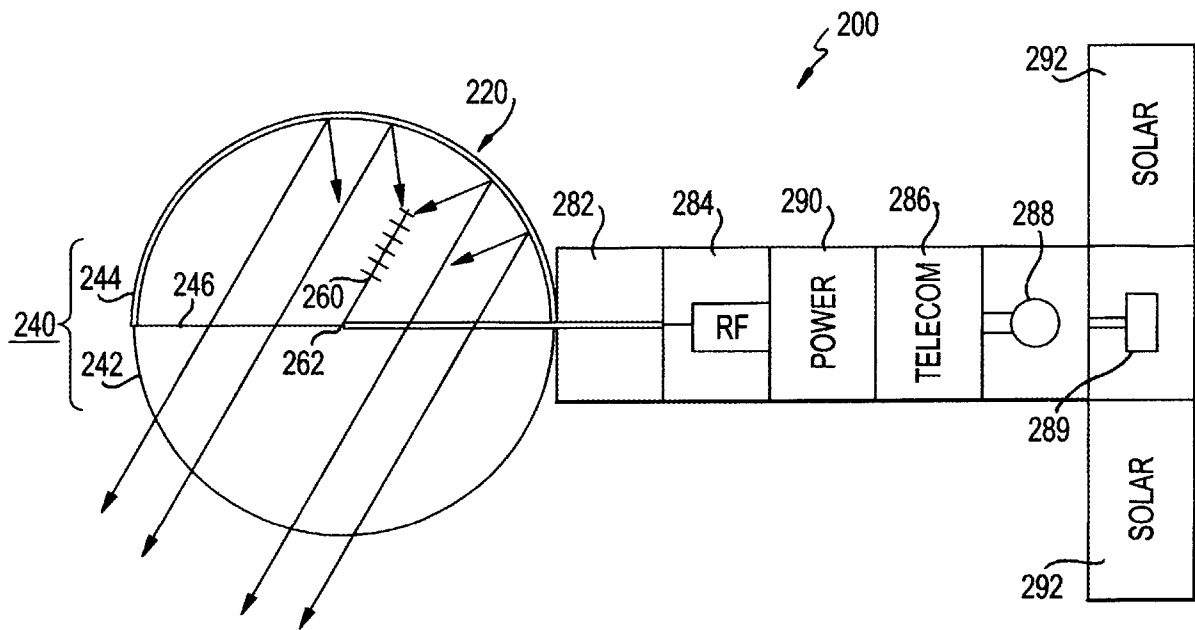


FIG. 2



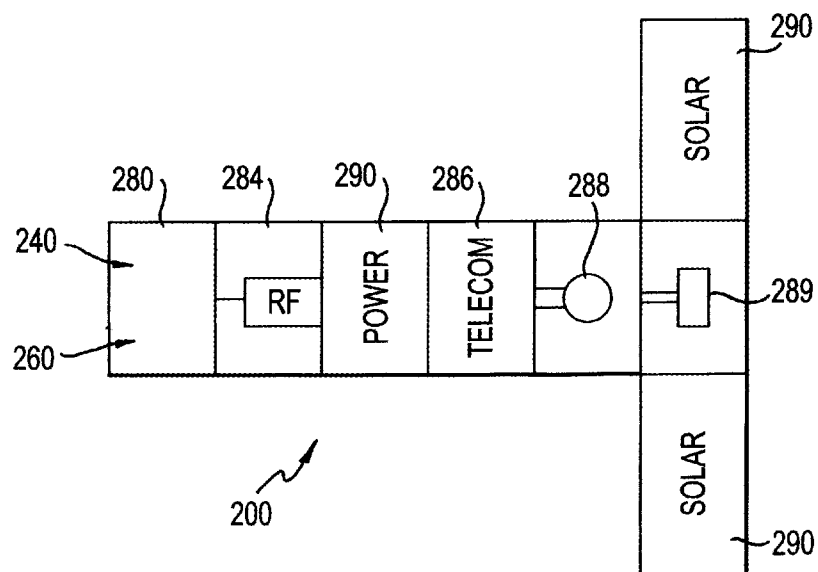


FIG. 3

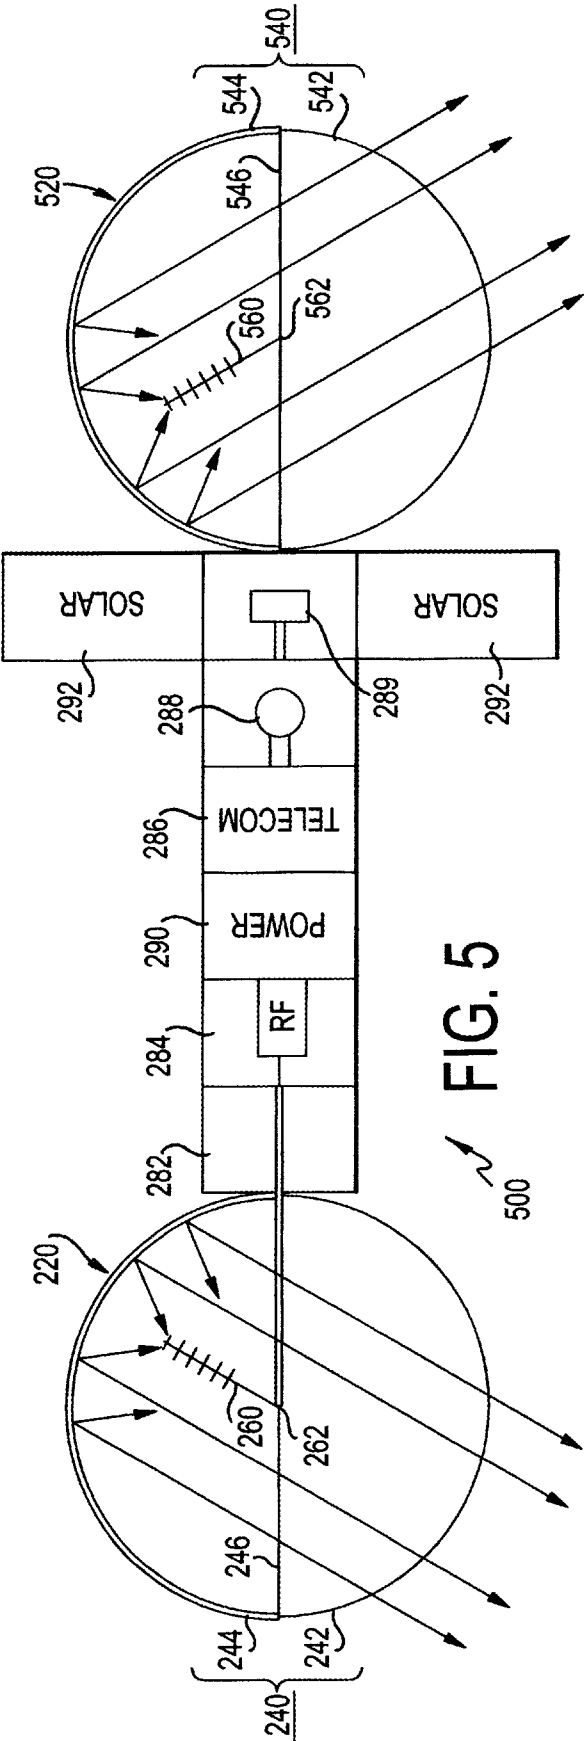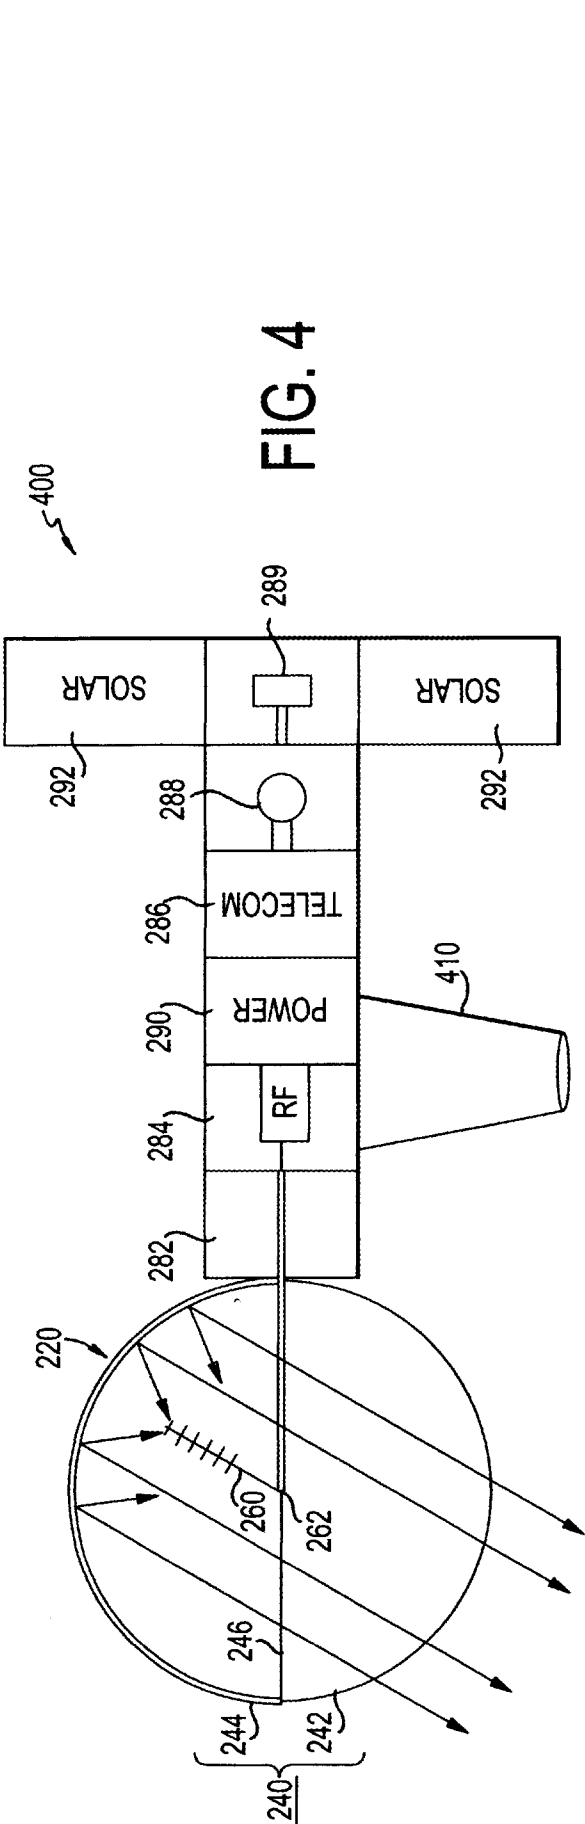

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US2017/032446

A. CLASSIFICATION OF SUBJECT MATTER

IPC(8) - H01Q 1/08; H01Q 15/20; H01Q 19/10 (2017.01)

CPC - H01Q 1/082; H01Q 1/08; H01Q 1/081; H01Q 15/20; H01Q 19/10; H01Q 19/12 (2017.02)

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

See Search History document

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

USPC - 342/8; 342/10; 342/11; 343/713; 343/908; 343/912; 343/914; 343/915 (keyword delimited)

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

See Search History document

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X ---	US 2005/0179615 A1 (MRSTIK et al) 18 August 2005 (18.08.2005) entire document	1-3, 5-10, 14, 19, 20
Y		4, 11-13, 15-18
Y	US 2013/0342412 A1 (JACKSON et al) 26 December 2013 (26.12.2013) entire document	4
Y	US 6,252,562 B1 (DIEZ) 26 June 2001 (26.06.2001) entire document	11
Y	US 2014/0225798 A1 (HUBER et al) 14 August 2014 (14.08.2014) entire document	12, 13
Y	US 8,970,447 B2 (OCHOA et al) 03 March 2015 (03.03.2015) entire document	15-18
A	US 2,913,726 A (CURRIE et al) 17 November 1959 (17.11.1959) entire document	1-20
A	US 7,224,322 B1 (GHALEB et al) 29 May 2007 (29.05.2007) entire document	1-20
A	US 6,650,304 B2 (LEE et al) 18 November 2003 (18.11.2003) entire document	1-20
A	US 7,438,261 B2 (PORTER) 21 October 2008 (21.10.2008) entire document	1-20

☐ Further documents are listed in the continuation of Box C.☐ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

07 July 2017

Date of mailing of the international search report

21 JUL 2017

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US, Commissioner for Patents
P.O. Box 1450, Alexandria, VA 22313-1450

Facsimile No. 571-273-8300

Authorized officer

Blaine R. Copenheaver

PCT Helpdesk: 571-272-4300
PCT OSP: 571-272-7774