

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization

International Bureau

(43) International Publication Date
05 March 2020 (05.03.2020)



(10) International Publication Number
WO 2020/046233 A2

(51) International Patent Classification:

Not classified

(21) International Application Number:

PCT/TR20 19/050308

(22) International Filing Date:

08 May 2019 (08.05.2019)

(25) Filing Language:

Turkish

(26) Publication Language:

English

(30) Priority Data:

2018/05173 11 April 2018 (11.04.2018) TR

(72) Inventor; and

(71) Applicant: **AKSOY, Nadir** [TR/TR]; Atakent Mahallesi
1479 Sokak 2/9, 06796 Etimesgut/Ankara (TR).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

(54) Title: WITH ENERGY-EFFICIENT HIGH-TORQUE MOTION MECHANISM AND WITH PISTON, INTERNAL/EXTERNAL COMBUSTION ROTARY ENGINE

(57) Abstract: In the designs where the linear motion is turned to circular motion, when the pressure is highest, the angle between the piston axis and the output shaft axis is about 10-15 degrees. Therefore, the overall efficiency is reduced as the friction force increases too much. In this invention, the main shaft (8) used to accommodate the inner rail (10) and the cylinders (14) rotating in the same direction with 1/1 ratio. The pistons (7), which are positioned on the main shaft (8), continue the cycle by passing the inner rail (10) to the outer rail (9) and then again to the inner rail (10). When the pistons (7) rotate by acting on the circumference of these rails (9 and 10), the engine starts by the pressure generated by the combustion of the fuel mixed with the air. At the time of peak pressure at the time of work, the angle between the axis of the piston (7) and the axis of the rear output gear (3) is 90 degrees. Thus, higher torque values can be obtained than traditional internal combustion engines. In addition, during the work and exhaust times and the constant volume at which constant combustion occurs, the piston (7) always acts on the rails at an angle of 90 degrees. At the time of suction and compression, there is an effect of close to 90 degrees. Thus, the piston-cylinder mechanism is only subjected to axial pressure. Each piston (7) forms a work time of 360 degrees in which the main shaft (8) is connected. Thus, for all main shafts (8) and cylinders (14), a total of 32 worktimes are generated in 360 degrees. The main shafts 8 can also be used in more than 1 number in a row.



WO 2020/046233 A2

With Energy-Efficient High-Torque Motion Mechanism and With Piston, Internal/External Combustion Rotary Engine

- 0001 In designs with crankshaft, the position of the pressure is very close to the upper dead point. This means that the pressure is not transformed into enough useful power. At the start of combustion, the angle between the piston axis and the output shaft is 10 to 15 degrees. In addition, it is not possible to apply five strokes when the combustion process is independent in conventional internal combustion engines. For these reasons, the mechanical and thermal efficiency deteriorates as the friction force increases greatly and therefore the overall efficiency decreases.
- 0002 This invention relates to a With Energy-Efficient High-Torque Motion Mechanism and With Piston, Internal/External Combustion Rotary Engine. In this invention, at the start of combustion, the angle between the axis of the piston 7 and the output shaft axis is 90 degrees. In the process of work and exhaust, the pistons (7) always act at a 90 degrees angle around the inner rail (10). Thus, the pistons (7) in the cylinders (14) are only subjected to axial pressure. As a result, a higher torque value can be obtained and the friction of the pistons (7) is less. A constant volume process is generated for combustion of the fuel - air mixture compressed in the combustion chamber. In this sense, a five-stroke, internal combustion engine expression can be used for the present invention. For these reasons, the thermal efficiency and mechanical efficiency have been increased. Therefore, the overall efficiency is higher, and the specific fuel consumption is lower. In addition, the piston - cylinder mechanism has not been changed in this invention and it has been ensured that the work, processes, methods, machinery and equipment which have become standard have been used.
- 0003 The main shafts (8), on which the cylinders (14) are positioned, are used with the inner rail (10) rotating in the same direction with 1/1. Gears (11, 23 and 24) are used to provide the rotation of these parts with the specified rotation rates. The 30 degrees surfaces of the outer rail (9) before they enter the combustion stroke are structured as an arc part. Their center is in the center of the main shafts (8). Radius values are at a value where the pistons (7) can be located at the upper dead point at the end of the compression and exhaust strokes. In this case, the pistons (7) have zero speed and constant volume value (combustion chamber volume value) in the cylinders (14) during the period they move in this section. The pistons (7) in the cylinders (14) move in the cylinders (14) in the periphery of these rails (9 and 10). The pistons (7) continue the cycle by passing from the inner rail (9) to the outer rail (10) and then again to the inner rail (9). For the internal combustion engine, each piston (7) forms one combustion stroke per 360 degrees. For the internal combustion engine, each piston (7) forms a work time of 360 degrees in which the main shaft (8) is connected. Considering each cylinder block consisting of 4 cylinders (14) connected to each main shaft (8), a total of 32 combustion strokes are performed for all cylinder blocks, with 4 combustion strokes per 360 degrees. Each of the four pistons 7 starts to perform the work time with a 90-degree rotation effect at the same time from the four corners of the inner rail 10 of a square section each 90 degrees. In this way, the motor produces a high torque while providing smooth rotation. As in the case of two-strokes

engines, in the case of the main shaft (8), at the same time when the exhaust and suction strokes are carried out at the time of combustion strokes, eight combustion strokes at 360 degrees for each main shaft (8) are formed. It is desirable that the highest value of the force generated by the combustion occurs when the piston (7) starts to move from the upper dead point to the lower dead point. A controlled combustion is difficult to achieve with homogeneous charge, compression-ignition engines (HCCI). In this present invention, it is ensured that the combustion occurs in a time period of 30 degrees. The highest-pressure value thus obtained can be applied when the piston (7) starts moving towards the lower dead point. Thermal efficiency and overall motor efficiency are thus increased. In addition, there is no increase in HC emissions on the cylinder walls, at the top of the piston (7) and the accumulation of filler between the cylinder (14) and the segments. There is a constant volume of 30 degrees so that the fuel can be fully burned, and the highest-pressure value is reached. The fuel injection process shall be performed approximately 6 degrees before the piston (7) enters this constant volume value. Thus, the sprayed fuel will be mixed homogeneously with the air and will be subjected to the combustion process by not having any points that can cause HC emissions. During constant volume, combustion in the combustion chamber will be fully realized. Natural gas can also be used as fuel, with the compression ratio and combustion being fully controlled. If the thrust force is also required when the engine is running, it is permissible for the high-pressure gas burning in the combustion chamber to exit the exhaust outlet (13) while the pistons (7) are in a constant volume area of 30 degrees. The air density that may be required to form this thrust force can be realized by a turbo shaft which can be placed in the center of the time shaft (20). The high-pressure exhaust gases from the exhaust outlet (13) of the timing shaft (20) are driven by the impeller at the exhaust outlet (13) to be positioned on this turbo shaft, rotating this shaft at high speeds. Thus, the impeller at the suction inlet (12) connected to the same shaft can rotate at the same high speed to draw high density air into the cylinder from the suction inlet (12) of the time shaft (20).

0004 The invention is represented by the following figures;

Figure 1 - Front-left -top perspective view without the front cover (18). 1. pistons (7) are in the middle of the inner rail (10), at the end of the combustion stroke (30 degrees according to output shaft) and at the start of exhaust stroke (30 degrees according to output shaft). 2. pistons (7) are in the middle of the outer rail (9), finished the suction stroke (135 degrees according to output shaft) and started the compression stroke (135 degrees according to output shaft). 3. pistons (7) are approaching the end of the compaction stroke and are about to enter the fixed volume area (30 degrees according to output shaft) of the outer rail (9). 4. pistons (7) are about to approach the middle of the suction stroke (0. degrees).

Figure 2 - Front view without front cover (18) and rear cover (17). 1. pistons (7) are at the end of the inner rail (10), at the end of the exhaust stroke and at the start of the suction stroke. 2. pistons (7) have passed the middle of the outer rail (9), finished the suction stroke and started the compression stroke. 3. pistons (7) have finished the compaction stroke and the outer rail (9) has entered constant volume of 30 degrees according to output shaft. 4. pistons (7) are in the middle of the suction stroke. The figure also shows the arc, which indicates that the 30 degrees constant volume is configured as a circle part. This arc also represents the highest point (TDC) at which the pistons (7) can exit in the cylinders (14) (30 degrees).

Figure 3 - Front view without front cover (18) and rear cover (17). 1. pistons (7) are in the suction stroke. 2. pistons (7) are in the compression stroke. 3. pistons (7) have passed the fixed volume and are at the beginning of the combustion stroke. 4. pistons (7) approach the end of the suction stroke. In the figure also shows the lines indicating that the angle between the axis of the pistons (7) and the axis of output shaft or the inner rail (10) are 90 degrees at the start of the work stroke (60 degrees).

Figure 4 - Front view without front cover (18) and rear cover (17). 1. pistons (7) are about to approach the middle of the suction stroke. 2. pistons (7) are approaching the end of the compaction stroke and are about to enter the fixed volume area of the outer rail (9). 3. pistons (7) are in the middle of the inner rail (10), at the end of the work stroke and at the beginning of the exhaust stroke. 4. pistons (7) are in the middle of the outer rail (9), have finished the suction stroke and started the compression stroke. The figure also shows the shape of the path of the piston balls (5) (90 degrees).

Figure 5 - Front view without front cover (18) and rear cover (17). 1. pistons (7) are past the middle of the suction stroke. The pistons (7) have finished the compression stroke and have entered the fixed volume of the outer rail (9). 3. The pistons (7) are at the end of the inner rail (10), at the end of the exhaust stroke and at the beginning of the suction stroke. 4. The pistons (7) have passed the middle of the outer rail (9), finished the suction stroke and started the compression stroke (120 degrees).

Figure 6 - Front view without front cover (18) and rear cover (17). 1. pistons (7) are in the middle of the outer rail (9), have finished the suction stroke and started the compression stroke. 2. pistons (7) are in the middle of the inner rail (10), at the end of the work stroke and at the beginning of the exhaust stroke. 3. pistons (7) are about to approach the middle of the suction stroke. 4. pistons (7) are approaching the end of the compression stroke and of the outer rail (9) is about to enter a constant volume of 30 degrees according output shaft (180 degrees).

Figure 7 - The back-right-top perspective view without the rear cover (17) (180 degrees).

Figure 8 - The front-left-top perspective view of the cylinder block and parts running on and inside (the main shaft gear (15) is shown as a section cut).

Figure 9 - The front-bottom perspective view of the cylinder block and parts running on it.

Figure 10 - The front-left -top perspective view of the timing shaft (20).

Figure 11 - The back-right-bottom perspective view of the timing shaft (20).

The parts and sections in the figures are described below.

- (1) -Body
- (2) -Cylinder ring
- (3) -Output gear
- (4) -Injector

- (5) -Piston ball
- (6) -Piston spring
- (7) -Pistons
- (8) -Main shaft
- (9) -Outer rail
- (10) - Inner rail
- (11) -Intermediate gear
- (12) -Fuel and / or air intake / input
- (13) -Exhaust and / or air outlet
- (14) -Cylinder
- (15) -Main shaft gear
- (16) -Main shaft ring
- (17) -Rear cover
- (18) -Front cover
- (19) -Shaft of intermediate gear
- (20) -Time shaft

With energy-efficient high-torque motion mechanism and with piston, internal/external combustion rotary engine; **body (1)** that accommodates all parts, square section **inner rail (10)** and **main shafts (8)** with cylinders, in which the pistons (7) are pressure and rotate in the same direction with a rotation ratio of 1/1, **outer rail (15)**, which enable the pistons (7) to perform suction and compression strokes and to form a constant volume of 30 degrees of combustion, **pistons (7)**, piston ball (5) which are connected to this pistons (7), allowing the pistons (7) to rotate to the periphery of **rail (9 and 10)**, **time shaft (20)** allowing the fuel and / or air to enter into the cylinders (14) and the exit of the residual gases or air through the cylinders, **injectors (4)** injecting fuel into the cylinders (14), **rear drive gear (3)**, which enables the first movement and movement from the motor, **cylinders (14)** in which the pistons (7) move, main **shaft rings (16)** and **cylinder rings (22)** which prevent the compressed fuel-air mixture from escaping from the cylinder (14), **front cover (18)** which is connected to the main shaft (8), to the time shaft (20), to the outer rail (2) and connected to the body (1), **rear cover (17)** which is connected to the main shaft (8), to the time shaft (20), to the outer rail (2), intermediate gear shaft (19) and connected to the body (1), **piston springs (6)**, located on the pistons (7) which prevent the pistons (7) to rotate in the cylinders (14) and strike the combustion chamber, ascent from in the cylinders (14), the outer rails (9) and the main shafts (8) are formed from **intermediate gears (11)**, which ensure that they rotate in the same direction and in the same rate. In addition, standard motor elements and sections such as pins, pipes, records, washers, gaskets, bolts, bearings, lubrication and cooling channels are not numbered. With energy-efficient high-torque motion mechanism and with piston, internal/external combustion rotary engine, according to the different quantity and form of outer rail (9) and the cylinder (14), the form of inner rail (10), each piston (7) uses one or more combustion in at 360-degree cycle uses in the form of spark-ignition engines and diesel internal combustion engines producing can be used anywhere. It can

also be used as a compressor motor and / or a pump, or to obtain a circular motion by condensing the wind effect.

Claims


- [Claim 1] In general, the **main shafts (8)** that accommodate the pistons **(7)** and cylinders **(14)** which can be used more than **1** in sequence, square cross-section **inner rail (10)** rotating in the same direction and in the same rate as the main shafts (8), **outer rail (9)**, which form a constant volume of 30 degrees and ensure that the pistons (7) are always pressed at a 90 degree angle and that the pistons (7) remain unmoved within in the cylinders (14) for a certain period of time, the **pistons (7)** and **cylinders (14)** that can be shaped as circular, elliptical or prismatic to provide rotation by exerting pressure on the outer rail (9) and the inner rail (10), it includes the **time shaft (20)**, which enables the discharge of high-pressure gas at a constant volume of 30 degrees, allowing fuel and / or air to enter and the removal of residual gases, With energy-efficient high-torque motion mechanism and with piston, internal/external combustion rotary engine.
- [Claim 2] It can be used in more than 1 number in circumferential 1, 2 or more and / or sequentially, can be prismatically shaped according to circular, elliptical or radial motor design, which accommodates pistons (7) and cylinders (14) with the inner rail **(10)**, which has a **1/1** turnover ratio and is characterized by the **main shaft (8)**, and as in claim 1, With energy-efficient high-torque motion mechanism and with piston, internal/external combustion rotary engine.
- [Claim 3] The main shaft (8), the cylinder (14) and the piston (7) and the main shaft (8), with the main shaft (8), with the main shaft (8), rotating in the same direction, with the main shaft (8). according to the same direction of rotation between them and the internal combustion engine, compressed air-operated motor, compressor motor and / or pump, the purpose to be used, the main shafts (8) and the number of cylinders (14) according to the number of cross-sectional shape may be changed, **inner rail (10)** is characterized by and, as in claim 1, With energy-efficient high-torque motion mechanism and with piston, internal/external combustion rotary engine.
- [Claim 4] After the inner rail (10), the centers of the arc-shaped part of the arc of 30 degrees in the output shaft, which form the fixed volume area of the output shaft, are located in the center of the main shafts (8) facing the working surfaces, the radius values are the top of the pistons (7). In this way, the pistons (7) always act at a 90 degree angle and thus the pistons (7) remain stationary in the cylinders (14) for a certain period of time, thus allowing the combustion of the pistons (7) to occur in a period of 30 degrees in the output shaft. The movement mechanism which produces high torque using the energy efficiently and characterized by the **outer rail (9)** and as in claim 1, With energy-efficient high-torque motion mechanism and with piston, internal/external combustion rotary engine.
- [Claim 5] It is characterized by **pistons (7)** characterized by a plurality of annular, elliptical or radial designs which can be shaped to be prismatic in relation to one another or intertwined with each other by pressing the circumference of the outer rail (9) and the inner rail (10) with pressure effect. As in claim 1, With energy-efficient high-

torque motion mechanism and with piston, internal/external combustion rotary engine.


[Claim 6] Actuation mechanism and reciprocating mechanism for producing high torque using energy-efficient as characterized by **cylinders (14)** and characterized by cylinders (14), which can also be shaped as prismatic with respect to one or more annular, elliptical or radial design intersected with the pistons (7). As in claim 1, With energy-efficient high-torque motion mechanism and with piston, internal/external combustion rotary engine.

[Claim 7] If the thrust force is also required when the engine is running, the pistons (7) are in a constant volume range of 30 degrees, while the engine is running, allowing high-pressure gas burning in the combustion chamber, allowing the fuel and / or air to enter into the cylinders (14) and the exit of gases or air through the cylinders. The process of producing circular motion by condensing the internal combustion engine, compressed air-operated motor, compressor motor and / or pump or wind effect, allowing the propulsion force to be formed in such a way that it can be moved in a movable manner to allow the output from the exhaust outlet (13) to be allowed and characterized by the **time shaft (20)** and as in claim 1, With energy-efficient high-torque motion mechanism and with piston, internal/external combustion rotary engine.


[Fig.1]

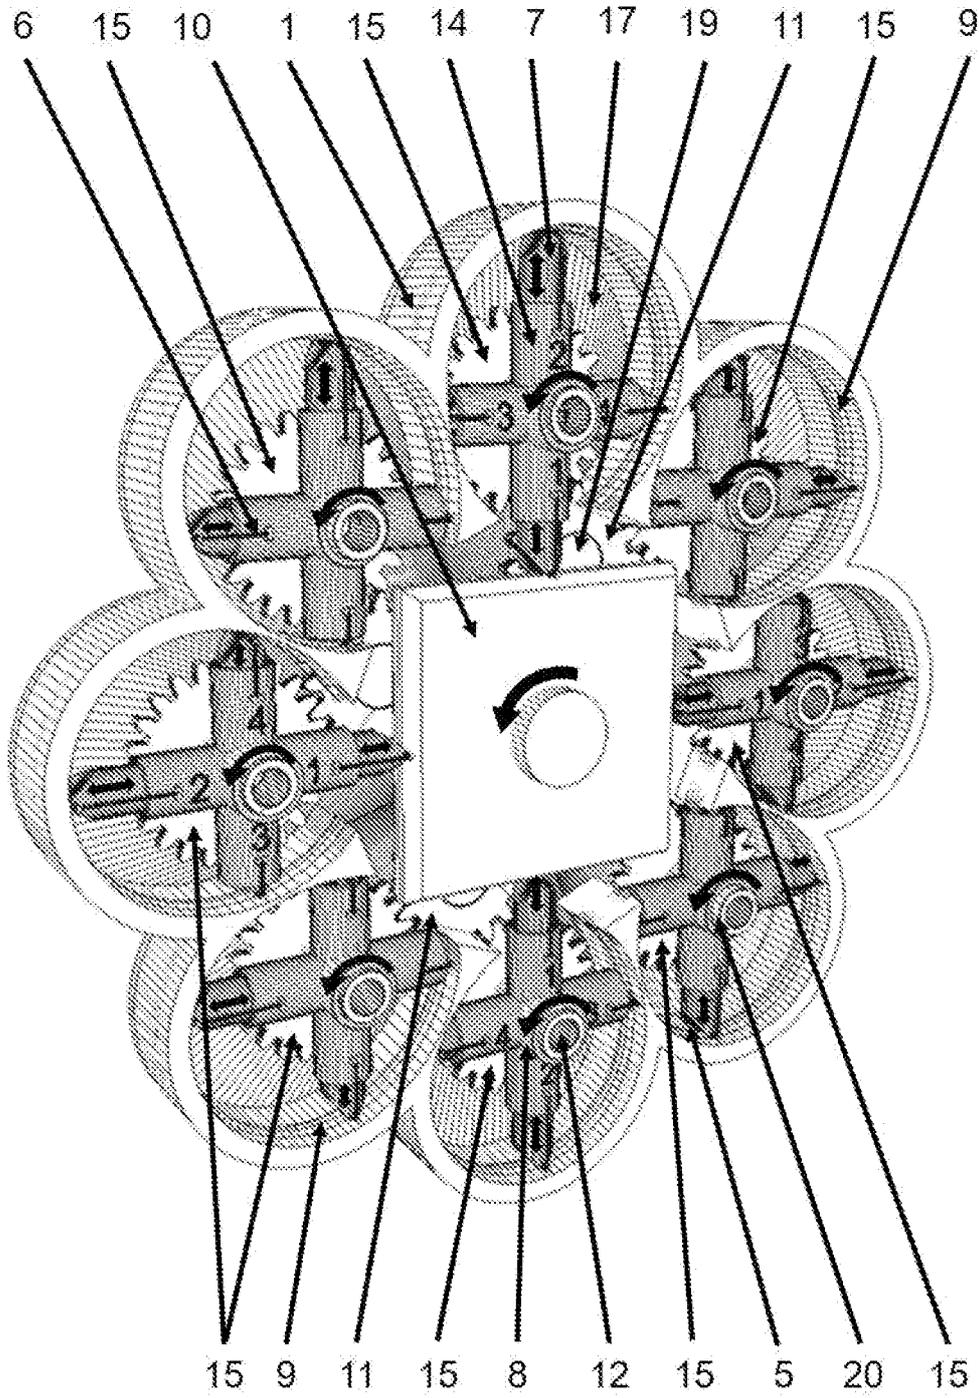


[Fig.4]

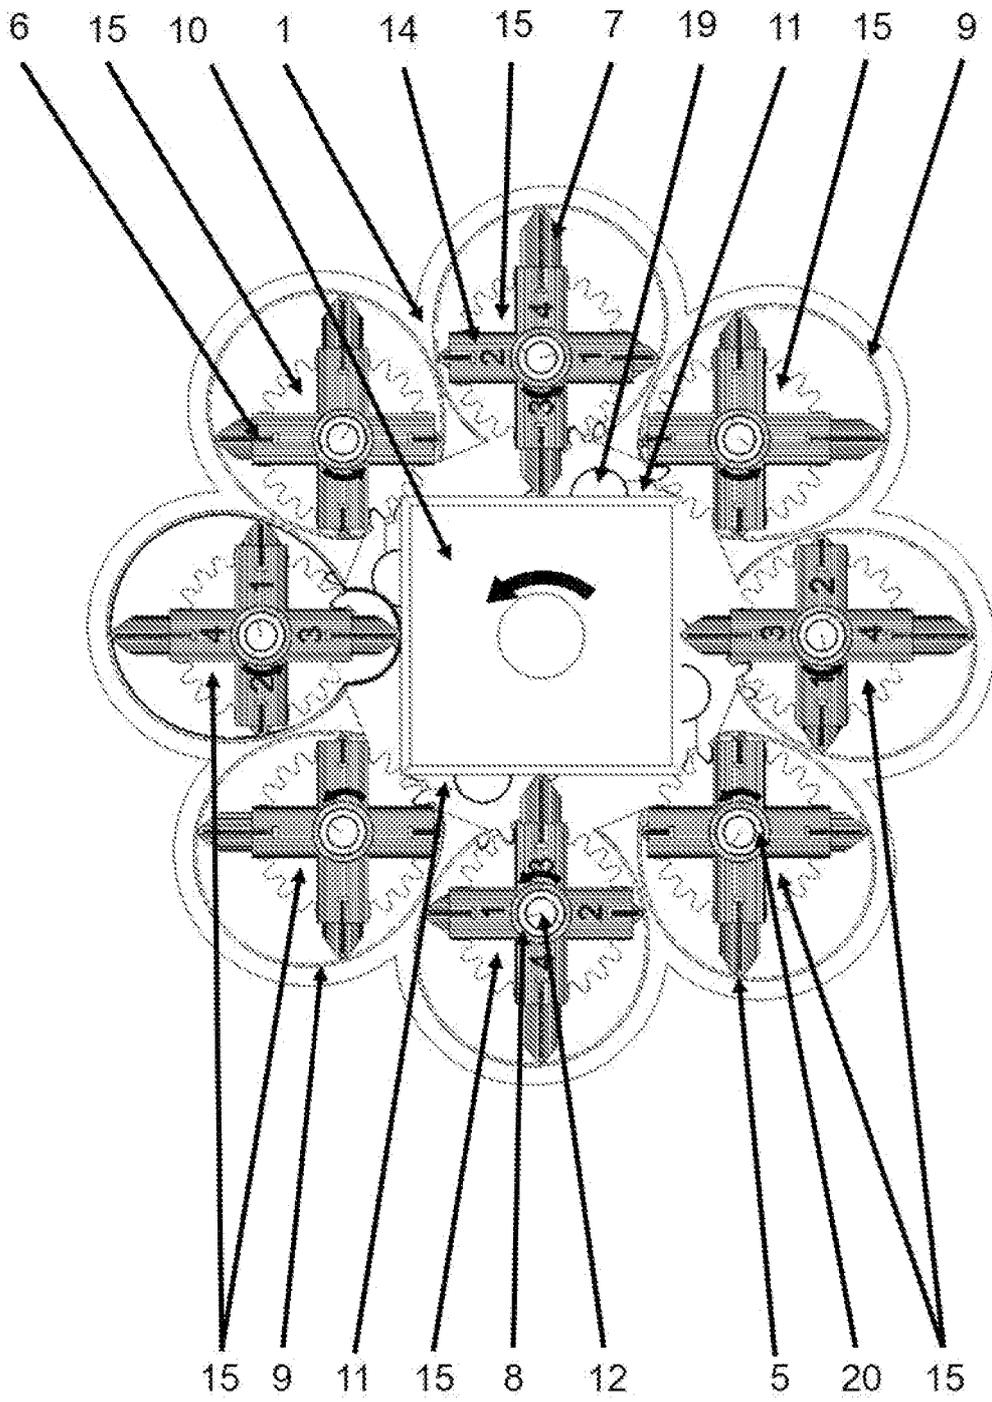


[Fig.5]

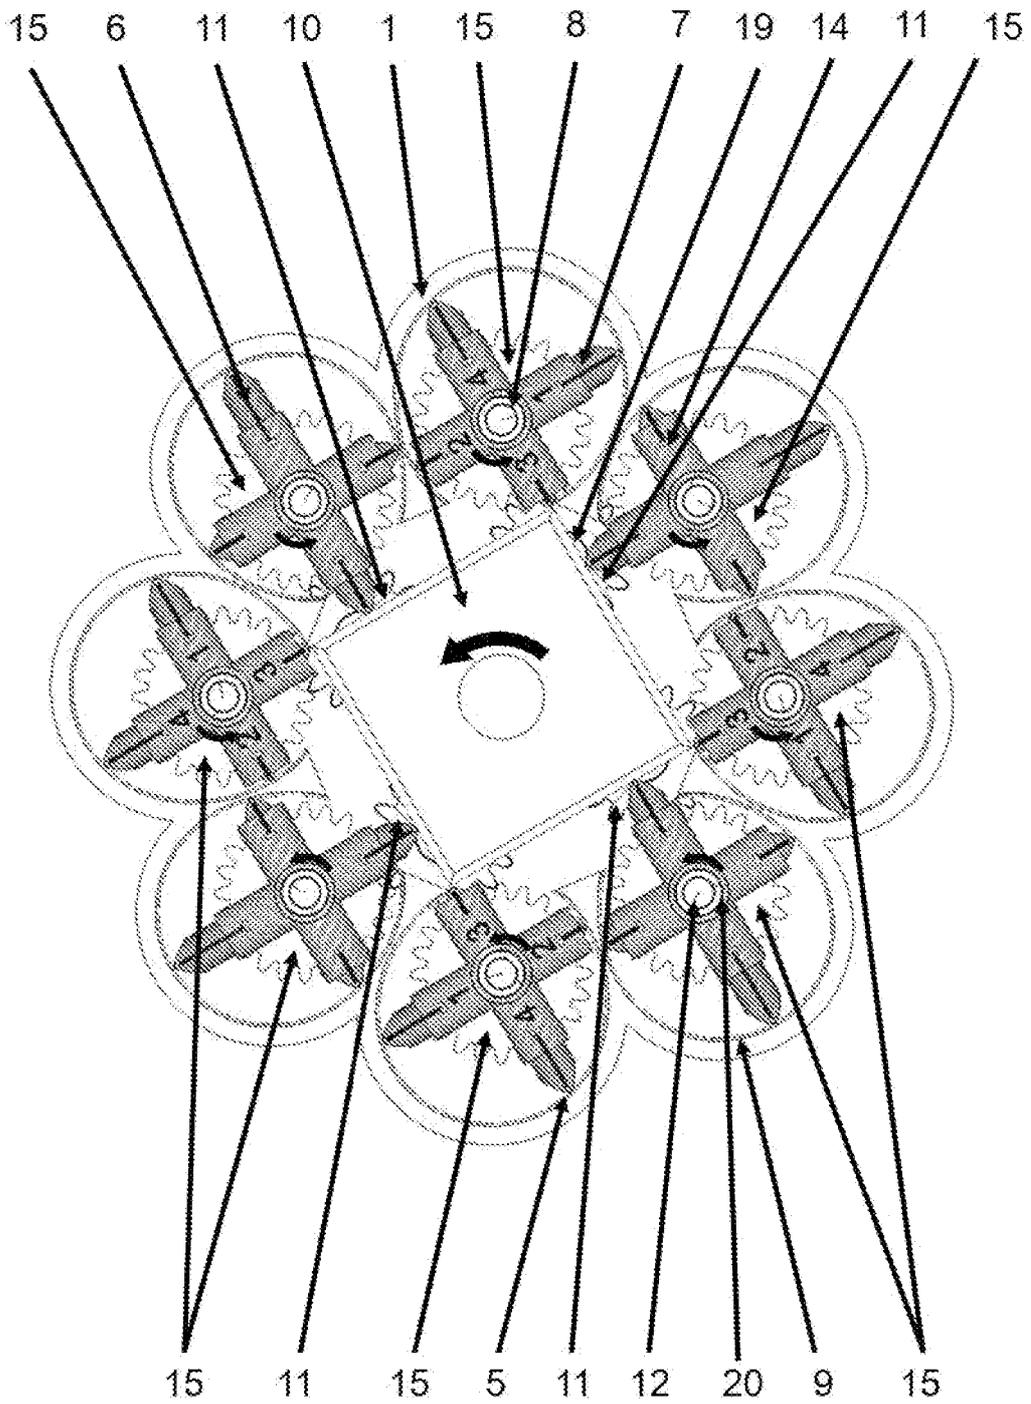


[Fig.6]

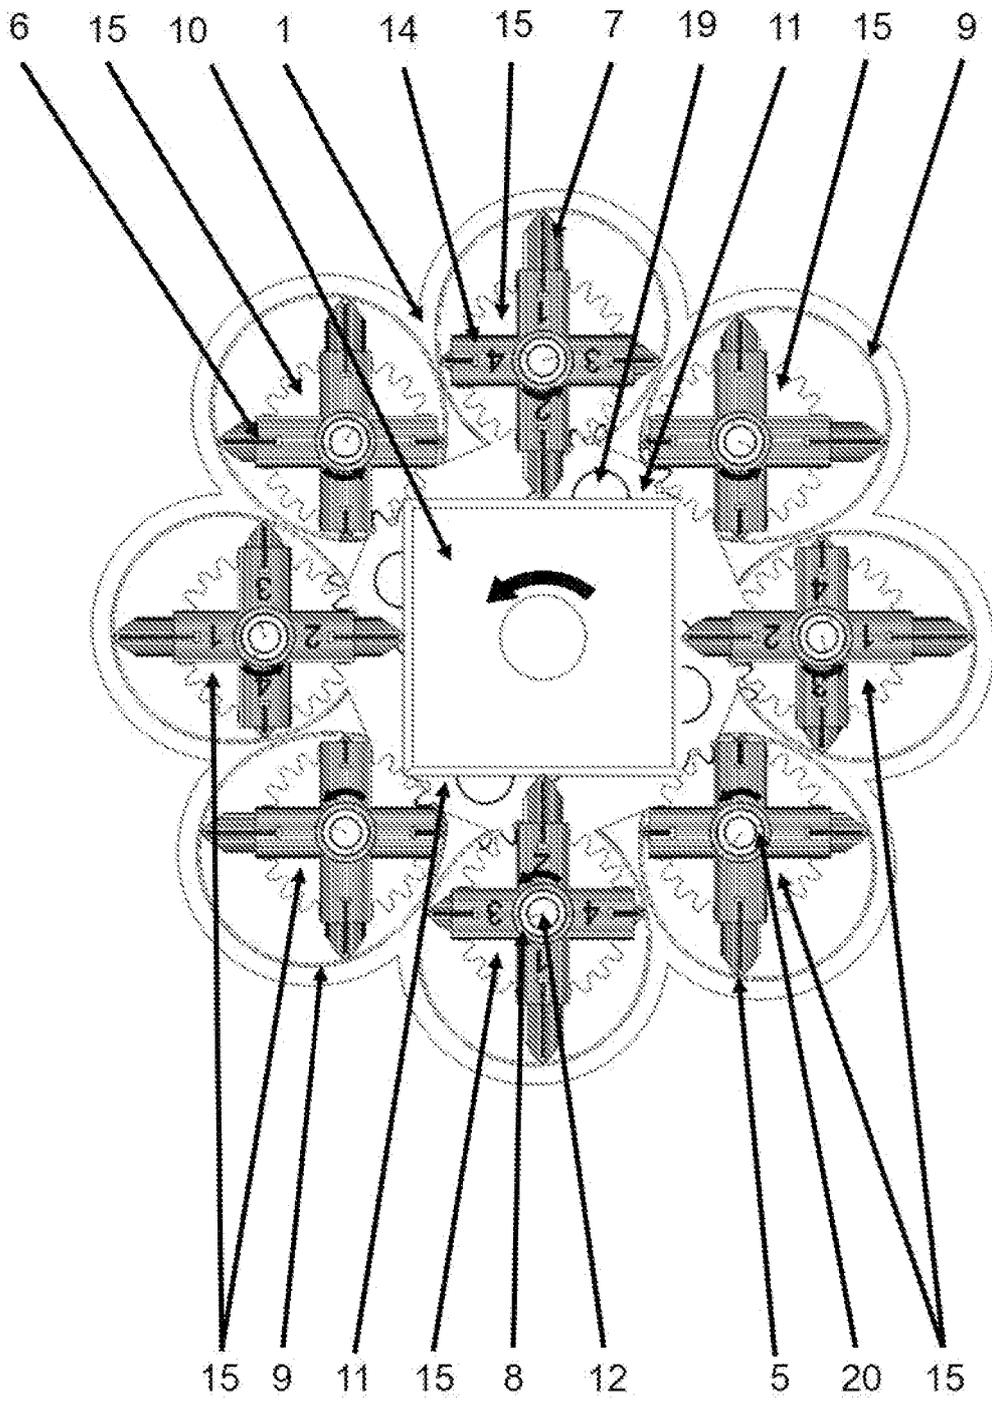


[Fig.7]

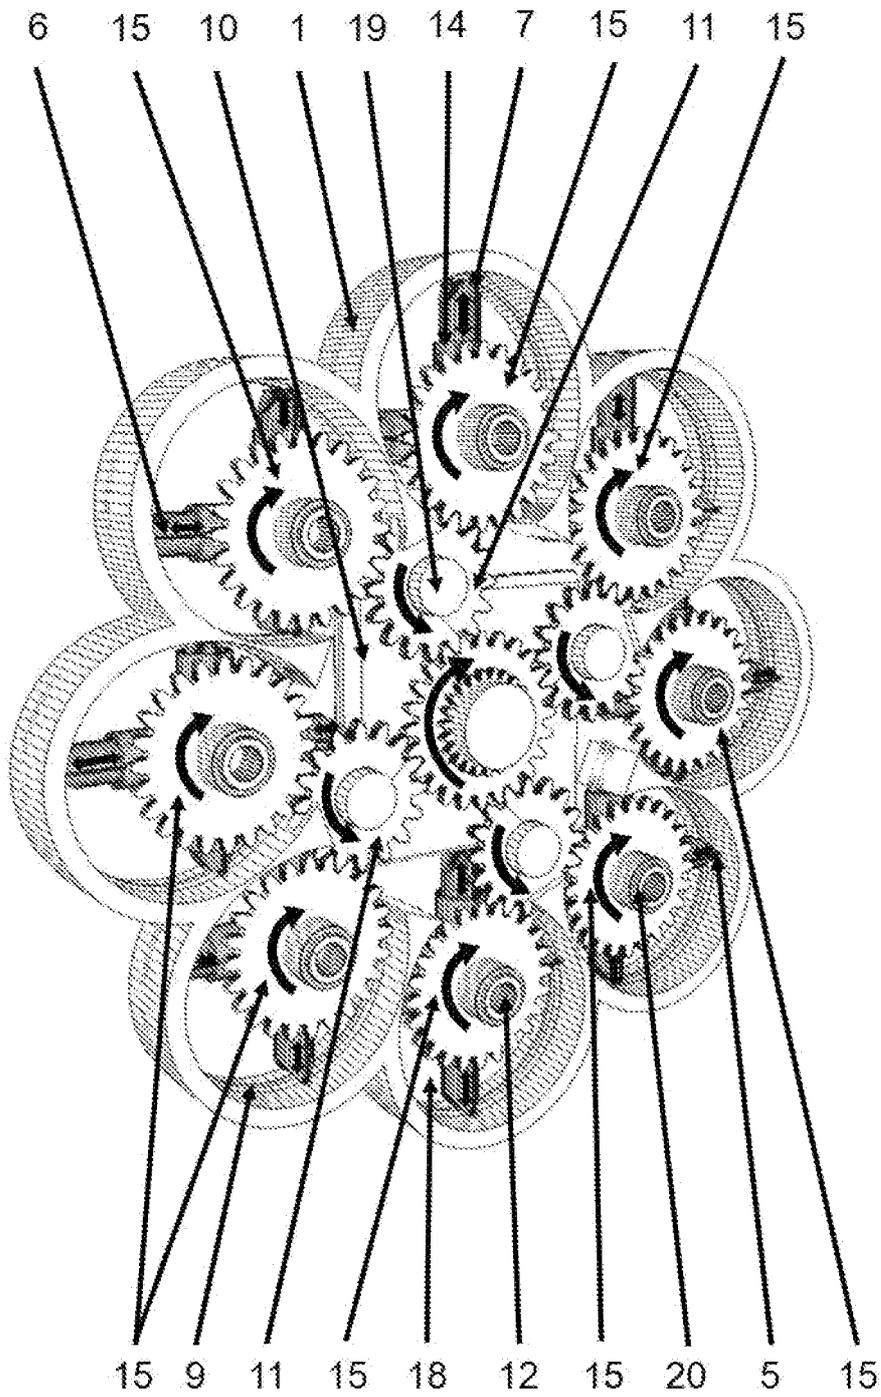


[Fig.8]

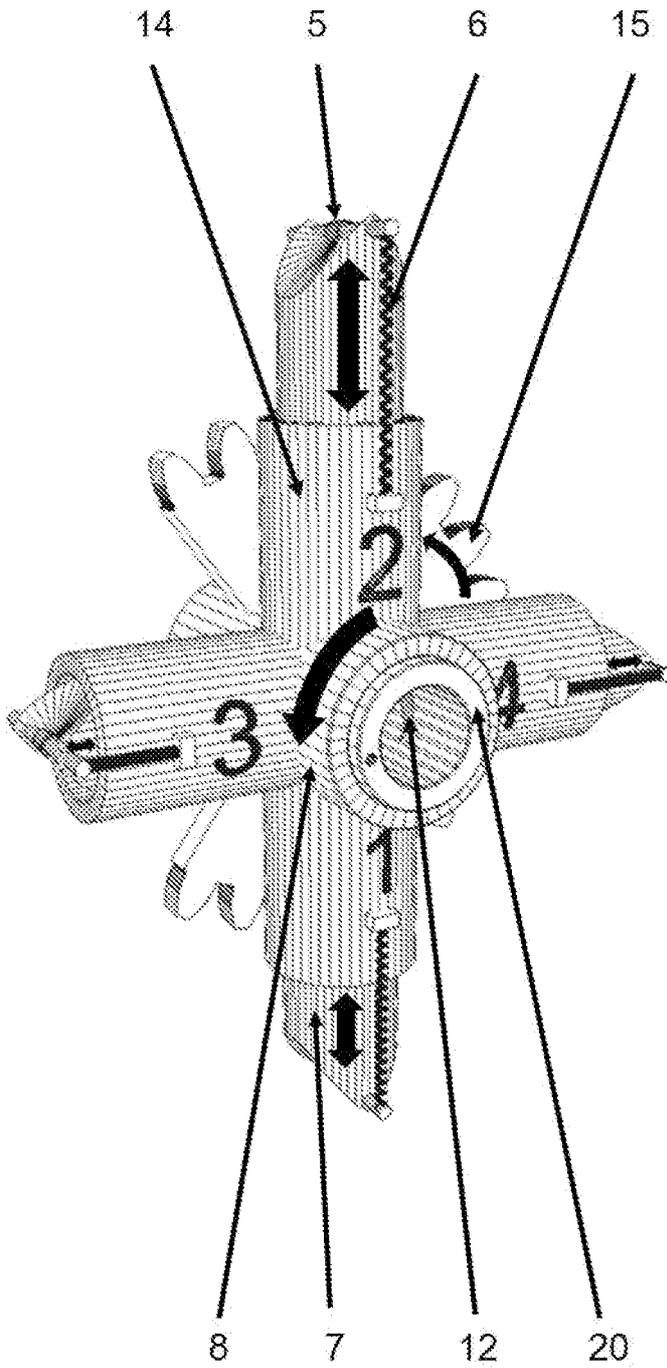

[Fig.9]

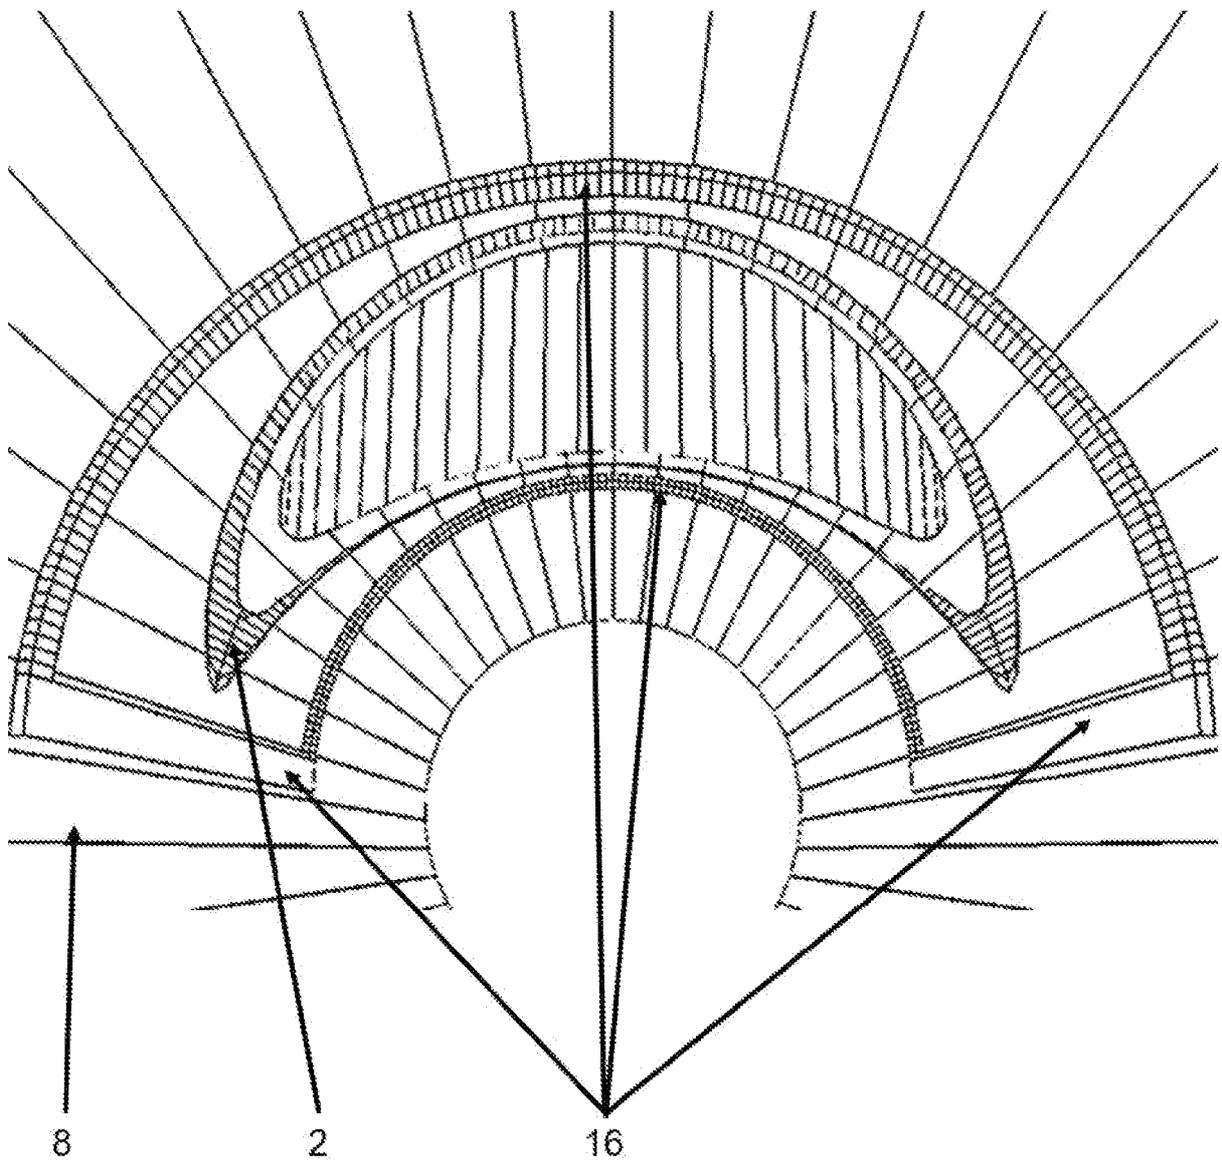

[Fig.10]

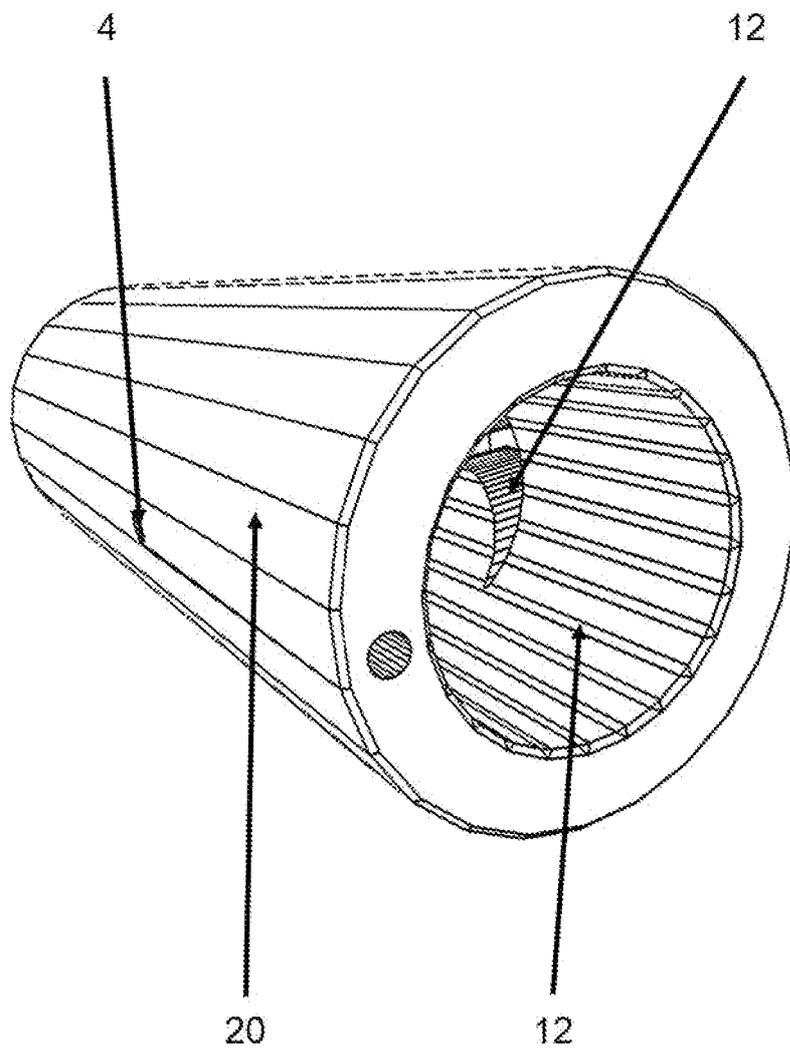

[Fig.11]

