

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
5 January 2006 (05.01.2006)

PCT

(10) International Publication Number  
**WO 2006/000811 A1**

(51) International Patent Classification<sup>7</sup>: **F01N 7/00**,  
7/08, B60K 13/04

(21) International Application Number:  
PCT/GB2005/002520

(22) International Filing Date: 28 June 2005 (28.06.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
2004-191152 29 June 2004 (29.06.2004) JP

(71) Applicant (for all designated States except US): **NISSAN MOTOR CO., LTD** [JP/JP]; 2, Takara-cho, Kanagawa-ku, Yokohama-shi, Kanagawa 221-0023 (JP).

(71) Applicant (for MG only): **NISSAN TECHNICAL CENTRE EUROPE LTD** [GB/GB]; Cranfield Technology Park, Bedfordshire MK43 0DB (GB).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **KOBAYASHI, Masanari** [JP/JP]; Shimotsuruma 3882-11, Yamato-shi, Kanagawa-ken 242-0001 (JP). **MITANI, Takefumi** [JP/JP]; Kamitsurumahoncho 1-32-4-205, Sagami-hara-shi, Kanagawa-ken 228-0818 (JP).

(74) Agent: **HOLMES, Matthew, William**; Intellectual Property Department, Nissan Technical Centre Europe Ltd, Cranfield Technology Park, Bedfordshire MK43 0DB (GB).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: ENGINE EXHAUST SYSTEM FOR A VEHICLE

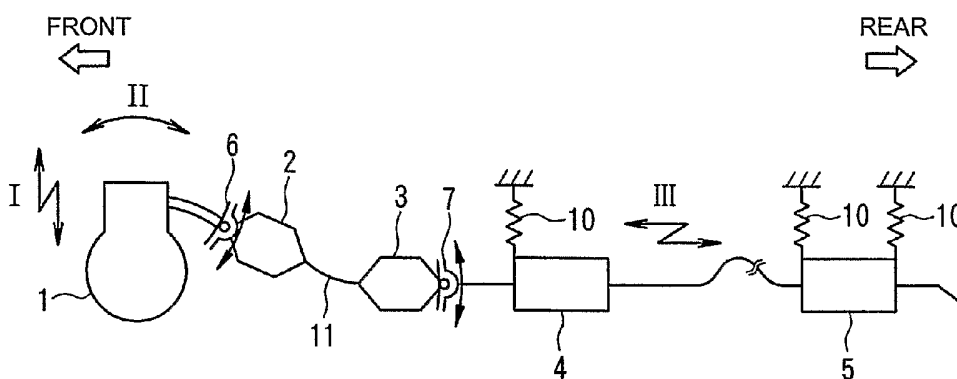

(57) Abstract: An engine exhaust system for a vehicle is provided in which it is possible to obtain necessary vibration damping performance even when there are layout restrictions. For instance, a spherical joint (6) on a front side of the vehicle and a spherical joint (7) on a rear side of the vehicle, are positioned before and after two catalysts (2, 3), and the components positioned between the front and rear spherical joints (6, 7) is unsupported by a vehicle body. Hence, a dynamic damper is formed. The resonant frequency of the dynamic damper, i.e. a frequency at which vibrations are absorbed can be adjusted by altering the modulus of elasticity and weight of the dynamic damper. Therefore, the necessary vibration damping performance can be obtained despite layout restrictions.

WO 2006/000811 A1

## ENGINE EXHAUST SYSTEM FOR A VEHICLE

The present invention relates to an engine exhaust system for a vehicle.

Conventionally, a flexible coupling such as a spherical joint used in an exhaust system of a vehicle performs a vibration damping function by preventing transmission of vibrations from the engine to the exhaust system or preventing vibrations caused by resonance in the exhaust system being transmitted to the engine. Accordingly, the spherical joint plays an important role in reducing vibrations transmitted to a vehicle body via the mounts of the exhaust system and the engine system.

An engine exhaust system for a vehicle using a spherical joint has been applied to a front exhaust engine as shown in Figure 7 of the drawings hereof, an example being disclosed in Japanese Unexamined Patent Publication No. 2002-371841, and to a rear exhaust engine as shown in Figures 8 and 9 of the drawings hereof, an example being disclosed in Japanese Unexamined Patent Publication No. 10-196358.

In the present specification, the terms 'front' and 'rear' and 'forward' and 'rearward' relate to the forward direction of travel of a vehicle. For example 'front exhaust' and 'rear exhaust' refer to the position of the exhaust manifold with respect to a transversely-mounted engine. The invention is not, however, limited to use in transverse-engine vehicles.

In the abovementioned conventional engine exhaust systems, it is necessary to arrange spherical joints in a particular way depending on their number, mounting location, and mounting angle. If vibrations of the exhaust system are to be absorbed effectively, the

spherical joints must allow movement in the direction of the vibration. However, layout restrictions make it difficult to arrange the spherical joints in such a way that they can effectively absorb the vibrations. Where the spherical joints cannot be mounted in ideal locations and orientations due to a layout restriction, it is difficult to obtain satisfactory vibration damping performance.

The present invention has been developed to solve the above-mentioned problems, and has an object to provide an engine exhaust system for a vehicle in which it is possible to obtain effective vibration damping performance even if there is a layout restriction.

To achieve the abovementioned object, the present invention resides in an engine exhaust system for a vehicle, the system comprising at least two flexible couplings having elastic characteristics, positioned at two different locations in the exhaust system, and an intermediate component positioned between the at least two flexible couplings and having mass. The invention is characterised in that a dynamic damper is formed by virtue of the elastic characteristics and the mass.

Thus, an engine exhaust system for a vehicle according to the present invention comprises a dynamic damper formed by flexible couplings having a modulus of elasticity positioned in at least two locations in an exhaust system with an intermediate exhaust system component between them, where the mass of the intermediate component is effectively supported only by the flexible couplings.

According to the engine exhaust system of the present invention in which flexible couplings such as spherical joints are positioned in at least two places in an exhaust

system and a dynamic damper is formed by an exhaust system component between the two flexible couplings as a mass body, it is possible to achieve necessary vibration damping performance even if there is a layout restriction in mounting the flexible couplings.

Preferred embodiments of an engine exhaust system for a vehicle according to the present invention will now be described, by way of example, with reference to the accompanying drawings in which:

Figure 1 is a schematic diagram showing a first preferred embodiment of an engine exhaust system.

Figure 2 shows a model of the engine exhaust system for the vehicle in Figure 1.

Figure 3 is a graph showing mount vibration level against frequency for the engine exhaust system of Figure 1.

Figures 4a to 4c are vibration frequency response graphs showing adjustment of the resonant frequency of the engine exhaust system of Figure 1.

Figure 5 is a schematic diagram showing a second preferred embodiment of an engine exhaust system.

Figure 6 is a schematic diagram showing a third preferred embodiment of an engine exhaust system.

Figure 7 (prior art) is a schematic diagram showing an example of a conventional engine exhaust system.

Figure 8 (prior art) is a schematic diagram showing another example of a conventional engine exhaust system.

Figure 9 (prior art) is a schematic diagram showing a further example of a conventional engine exhaust system.

The conventional engine exhaust system shown in Figure 7 has two spherical joints, one forward, one rearward, positioned between a catalyst and a centre muffler. The engine is a front exhaust engine in this instance. An exhaust pipe located between the spherical joints is supported by the vehicle body. As a result, the forward spherical joint nearest the engine absorbs vibrations of the exhaust system longitudinally with respect to the vehicle and the rearward spherical joint nearest the centre muffler absorbs roll oscillations and vibrations of the engine in a vertical direction with respect to the vehicle. These various vibrations and oscillations are shown by the arrows in Figure 7.

In another conventional engine exhaust system for a rear exhaust engine as shown in Figure 8, a forward spherical joint is positioned between the engine and the catalyst, a rearward spherical joint is positioned between the centre muffler and the rear muffler, and the vehicle body supports the centre muffler. As a result, the forward spherical joint absorbs roll oscillations and vibrations of the engine in the vertical direction with respect to the vehicle and the rearward spherical joint absorbs vibrations of the exhaust system in the longitudinal

direction with respect to the vehicle. Again, the various vibrations and oscillations are shown by the arrows in Figure 8.

Turning now to the present invention, Figure 1 shows an engine exhaust system for a vehicle in a first preferred embodiment of the invention. As shown, the exhaust system comprises a rear exhaust engine 1, front and rear catalysts 2 and 3 joined by a front pipe 11, a centre muffler 4, a rear muffler 5, and mount members 10 for mounting the mufflers 4 and 5 to a vehicle body. The front and rear catalysts 2, 3 are rigidly fixed to either end of the front pipe 11 and are movable as a single or unitary body, which arrangement provides good efficiency as a dynamic damper. Due to the weight of the centre muffler 4 and the rear muffler 5, these parts of the exhaust system are supported from the vehicle body via the mount members 10.

In the present preferred embodiment, forward and rearward spherical joints 6 and 7, which are flexible couplings, are positioned respectively ahead of front catalyst 2, that is, forwardly with respect to the normal direction of travel of the vehicle and behind rear catalyst 3, that is, rearwardly with respect to the direction of travel. Each of the spherical joints 6, 7 includes an elastic body to absorb vibrations.

Exhaust system components located downstream from the rearward spherical joint 7 with respect to the generally rearward flow direction of exhaust gases are supported by the vehicle body via the mount members 10. Conversely, exhaust system components located between the two spherical joints 6 and 7 are not supported by the vehicle body. Consequently, the spherical joints 6 and 7 and the exhaust system components between the spherical joints 6 and 7, in this case the front and rear catalysts 2 and 3 and the pipe 11, form a dynamic damper.

In the first preferred embodiment, as shown by the arrows in Figure 1, the forward spherical joint 6 absorbs roll oscillations of the engine 1 and longitudinal vibrations of the exhaust system with respect to the vehicle, and the rearward spherical joint absorbs vertical vibrations of the engine 1 with respect to the vehicle.

Figure 2 shows a vibration system model of the engine exhaust system in the first preferred embodiment, hence comprising the two spherical joints 6 and 7 and the exhaust system components therebetween. Assuming here that the mass of the front catalyst 2 is  $m_1$ , the mass of the rear catalyst 3 is  $m_2$ , the mass of the tube 11 between those two catalysts 2 and 3 is  $m_3$ , the modulus of elasticity of the forward spherical joint 6 is  $k_1$ , and the modulus of elasticity of the rearward spherical joint 7 is  $k_2$ , the mass  $M$  of the dynamic damper formed between the forward spherical joint 6 and the rearward spherical joint 7, is expressed by:

$$M = (m_1 + m_2 + m_3)$$

and its modulus of elasticity  $K$  is expressed by:

$$K = (k_1 + k_2)$$

The resonant frequency  $f$  of the dynamic damper is expressed by the following equation:

$$f = 1/2\pi (K/M)^{1/2}$$

Figure 3 compares the mount vibration level of the engine exhaust system in accordance

with the first preferred embodiment (A in the figure) and the mount vibration level of an engine exhaust system for a vehicle according to the conventional technology shown in Figure 9 (B in the figure) corresponding to JP 10-196358. As seen from Figure 3, the mount vibration level of the conventional engine exhaust system exceeds a target value at a low engine speed range, i.e. in a low-frequency region such as when the engine is idling, whereas the mount vibration level of the engine exhaust system embodiment of Figure 1 is below the target value, achieving a favourable vibration reducing effect.

The graphs in Figures 4a to 4c show how the resonant frequency of the dynamic damper can be adjusted so as efficiently to reduce vibrations at a particular frequency. Altering the modulus of elasticity  $K$  of the dynamic damper or increasing or decreasing the overall mass of the intermediate exhaust system components between the spherical joints 6 and 7 both have the effect of adjusting the resonant frequency.

In many cases, engine vibration is the main or only cause of vibration of the exhaust system. Since engine vibration frequency is usually found to be in the range of approximately 20 – 30Hz, the elastic characteristics of the dynamic damper and/or the mass of the intermediate exhaust components may be selected to ensure that the resonant frequency of the dynamic damper is less than this range. Thus, in the preferred embodiment,  $k_1$ ,  $k_2$  and/or  $M$  are selected so that the resonant frequency of the dynamic damper formed by the flexible couplings 6, 7 and the intermediate components 2, 3 and 11 is less than approximately 20 – 30Hz.

For example, when the modulus of elasticity  $K$  of the dynamic damper is increased, i.e. the rigidity of the spherical joints is enhanced relative to the system whose vibration



characteristics are shown in Figure 4a, the resonant frequency increases as shown by the arrow in Figure 4b. On the contrary, when the modulus of elasticity  $K$  of the dynamic damper is decreased, i.e. the rigidity of the spherical joints is reduced, the resonant frequency decreases. Also, when the mass  $M$  of the dynamic damper is increased, i.e. the weight of the intermediate components is increased, the resonant frequency decreases as shown in Figure 4c. On the contrary, the resonant frequency increases when the mass  $M$  of the dynamic damper is decreased, i.e. the weight of the exhaust system components is reduced. So, the engine exhaust system of the invention can easily achieve a vibration reducing effect with respect to a desired frequency, and has the advantage of being able to achieve a vibration reducing effect even if there is a restriction on the layout of the spherical joints.

An engine exhaust system according to the present invention is not limited to the above-mentioned first preferred embodiment but is applicable to any form of engine exhaust. For example, Figure 5 shows a second preferred embodiment of the present invention in which an engine exhaust system is applied to a rear exhaust engine as in the first preferred embodiment but in this instance the forward spherical joint 6 is disposed behind the rear catalyst 3 and the rearward spherical joint 7 is disposed behind the centre muffler 4. Sections of the exhaust system upstream and downstream of the respective spherical joints 6 and 7 are supported by and connected to the vehicle body via mount members 10, whereas the centre muffler 4 is not mounted to the vehicle body. As no part of the centre muffler is directly connected to the vehicle body; so, like the intermediate components of the first embodiment, the centre muffler is only supported by the spherical joints 6 and 7. Hence, a dynamic damper is formed between the forward spherical joint 6 and the rearward spherical joint 7. In this case, the major mass body of

the dynamic damper is the centre muffler 4.

In a further example, Figure 6 shows a third preferred embodiment of the invention in which an engine exhaust system for a vehicle is applied to a front exhaust engine. Here, the forward spherical joint 6 is positioned between the front catalyst 2 and the rear catalyst 3 and the rearward spherical joint 7 is positioned between the rear catalyst 3 and the centre muffler 4. No part of the rear catalyst 3 is supported by or directly connected to the vehicle body, so a dynamic damper is formed between the forward spherical joint 6 and the rearward spherical joint 7. In this case, the major mass body of the dynamic damper is the rear catalyst 3.

An engine exhaust system for a vehicle according to the present invention is provided with flexible couplings formed, for example, from spherical joints positioned in at least two locations in the exhaust system such that at least one exhaust system component, for example the front and rear catalysts, is suspended between the two spherical joints, unsupported by the vehicle body to form a dynamic damper. The vibration reducing effect of this dynamic damper can be adjusted by adjusting the resonant frequency of the exhaust system, which can be adjusted by altering the modulus of elasticity of the dynamic damper, i.e. the modulus of elasticity of the spherical joints, and/or the mass of the dynamic damper. Alteration of mass can be achieved by changing the mass of the components that form the dynamic damper or by altering the configuration or number of the components that are used to form the dynamic damper. For example, in the first preferred embodiment the dynamic damper is defined by the forward and rearward spherical joints, the front and rear catalysts and the front pipe. Conversely, in the second embodiment the dynamic damper is defined by the forward and rearward spherical joints,

the centre muffler and the associated pipes. These are examples of how the mass of the dynamic damper can be altered by changing the configuration or number of the components in various ways.

**CLAIMS**

1. An engine exhaust system for a vehicle, comprising:

at least two flexible couplings (6, 7) having elastic characteristics, positioned at two different locations in the exhaust system; and

an intermediate component (2, 3, 11) positioned between the at least two flexible couplings (6, 7) and having mass;

characterised in that a dynamic damper is formed by virtue of the elastic characteristics and the mass.

2. The exhaust system of claim 1, wherein the elastic characteristics of the flexible couplings (6, 7) are selected to optimize the resonant frequency of the dynamic damper.

3. The exhaust system of claim 1 or claim 2, wherein the mass of the intermediate component (2, 3, 11) is selected to optimize the resonant frequency of the dynamic damper.

4. The exhaust system of any preceding claim, wherein each of the at least two flexible couplings (6, 7) includes a spherical joint.

5. The exhaust system of any preceding claim, wherein an upstream flexible coupling (6) has a first elastic characteristic, a downstream flexible coupling (7) has a second elastic characteristic, the intermediate component (2, 3, 11) positioned between the upstream flexible coupling (6) and the downstream flexible coupling (7) is separated from a body of the vehicle, and a downstream component (4, 5) positioned further downstream of the

downstream flexible coupling (7) is mounted (10) to the body of the vehicle.

6. The exhaust system of claim 5, the system being arranged to be positioned between an engine (1) and a muffler (5), wherein the upstream flexible coupling (6) is closer to the engine (1) than to the muffler (5), the downstream flexible coupling (7) is closer to the muffler (5) than to the engine (1), and the downstream component (4) is positioned between the downstream flexible coupling (7) and the muffler (5), the downstream component (4) being mounted (10) to the body of the vehicle.

7. The exhaust system of any preceding claim, wherein one flexible coupling (6) has an elastic characteristic ( $k_1$ ) and another flexible coupling (7) has an elastic characteristic ( $k_2$ ), the elastic characteristics ( $K_1$ ,  $K_2$ ) being selected such that a resonant frequency ( $f$ ) of the section formed by the flexible couplings (6, 7) and the intermediate component (2, 3, 11) is lower than 30Hz.

8. The exhaust system of any preceding claim, wherein the intermediate component (2, 3, 11) has a mass ( $M$ ) which is selected such that a resonant frequency of the section formed by the flexible couplings (6, 7) and the intermediate component (2, 3, 11) is lower than 30 Hz.

9. An engine exhaust system for a vehicle, comprising:

at least two flexible couplings having elastic characteristics, positioned at two different locations in the exhaust system; and

an intermediate component positioned between the at least two flexible couplings and having mass so that a dynamic damper is formed by virtue of the elastic

characteristics and the mass.

10. An engine exhaust system for a vehicle according to claim 9, wherein the elastic characteristics of the flexible couplings are selected to optimize the resonant frequency of the dynamic damper.

11. An engine exhaust system for a vehicle according to claim 9, wherein the mass of the intermediate component is selected to optimize the resonant frequency of the dynamic damper.

12. An engine exhaust system for a vehicle according to claim 9, wherein each of the at least two flexible couplings includes a spherical joint.

13. An engine exhaust system for a vehicle, the vehicle having a body, the system comprising:

an upstream flexible coupling having a first elastic characteristic;

a downstream flexible coupling having a second elastic characteristic;

an intermediate component positioned between the upstream flexible coupling and the downstream flexible coupling and having a mass, the intermediate component being separated from a body of the vehicle; and

a downstream component positioned further downstream of the downstream flexible coupling, the downstream component being mounted to the body of the vehicle.

14. An engine exhaust system for a vehicle according to claim 13, wherein the elastic characteristics of the flexible couplings are selected to optimize the resonant frequency

of the vibration system formed of the couplings and the intermediate component.

15. An engine exhaust system for a vehicle according to claim 13, wherein the mass of the intermediate component is selected to optimize the resonant frequency of the vibration system formed of the couplings and the intermediate component.

16. An engine exhaust system for a vehicle according to claim 13, wherein each of the upstream flexible coupling and the downstream flexible coupling includes a spherical joint.

17. An engine exhaust system to be positioned between an engine and a muffler of a vehicle having a body, the system comprising:

an upstream flexible coupling closer to the engine than to the muffler;

a downstream flexible coupling closer to the muffler than to the engine;

an intermediate component positioned between the upstream flexible coupling and the downstream flexible coupling, the intermediate component being separated from the body of the vehicle; and

a downstream component positioned between the downstream flexible coupling and the muffler, the downstream component being mounted to the body of the vehicle.

18. An engine exhaust system for a vehicle according to claim 17, wherein each of the upstream flexible coupling and the downstream flexible coupling includes a spherical joint.

19. An engine exhaust system for a vehicle according to claim 17, wherein the upstream

flexible coupling has a first elastic characteristic and the downstream flexible coupling has a second elastic characteristic, the first and second elastic characteristics being selected such that a resonant frequency of the section formed by the upstream flexible coupling, the downstream flexible coupling, and the intermediate component is lower than 20-30Hz.

20. An engine exhaust system for a vehicle according to claim 17, wherein the intermediate component has a mass which is selected such that a resonant frequency of the section formed by the upstream flexible coupling, the downstream flexible coupling, and the intermediate component is lower than 20-30Hz.

21. An engine exhaust system for a vehicle according to claim 9 or claim 13 wherein the mass of the intermediate component and/or the elastic characteristics of the flexible couplings are selected to optimise the resonant frequency of the dynamic damper.



1/6

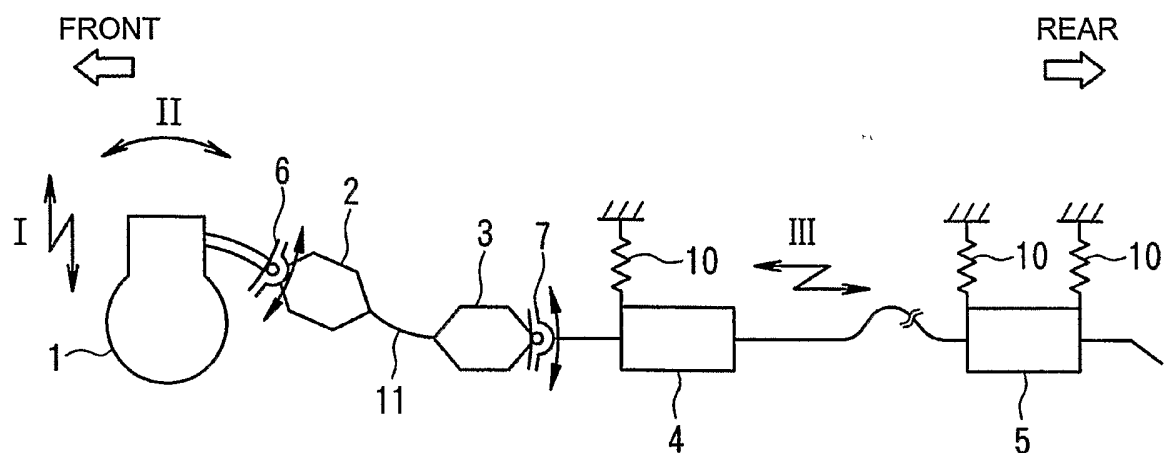


Fig.1

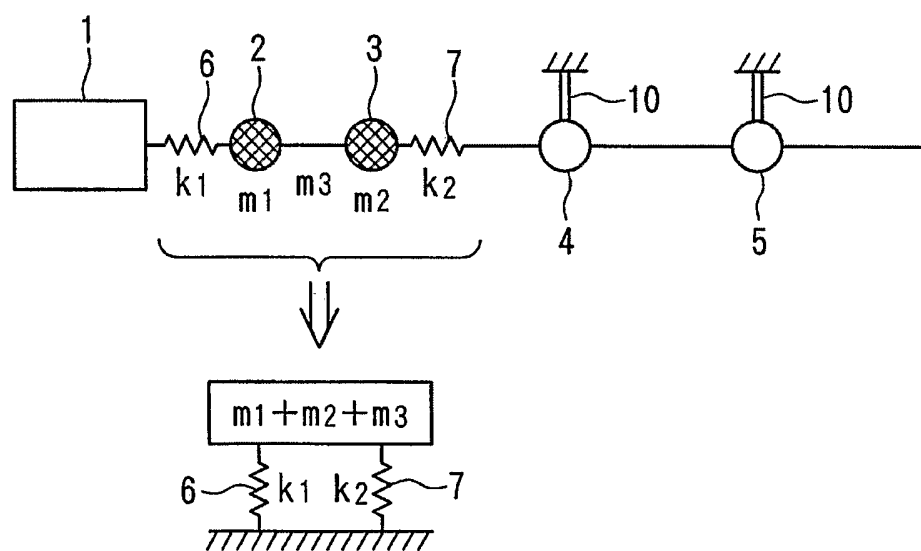


Fig.2

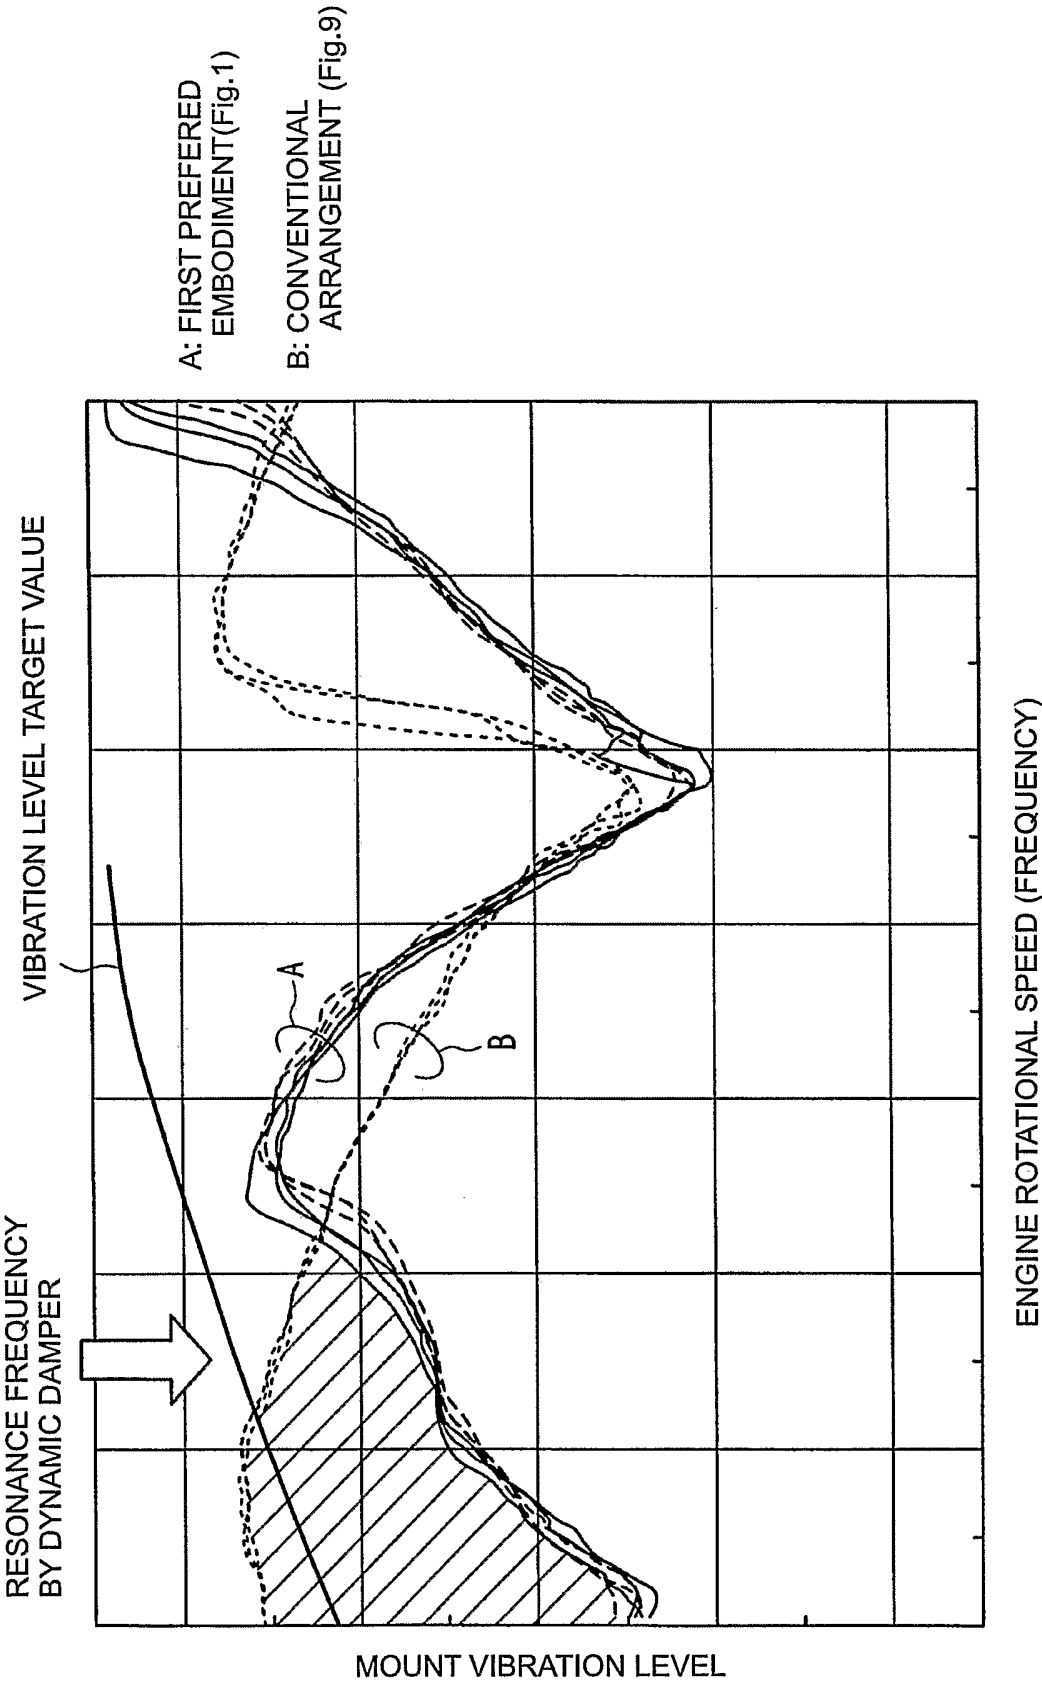


Fig.3

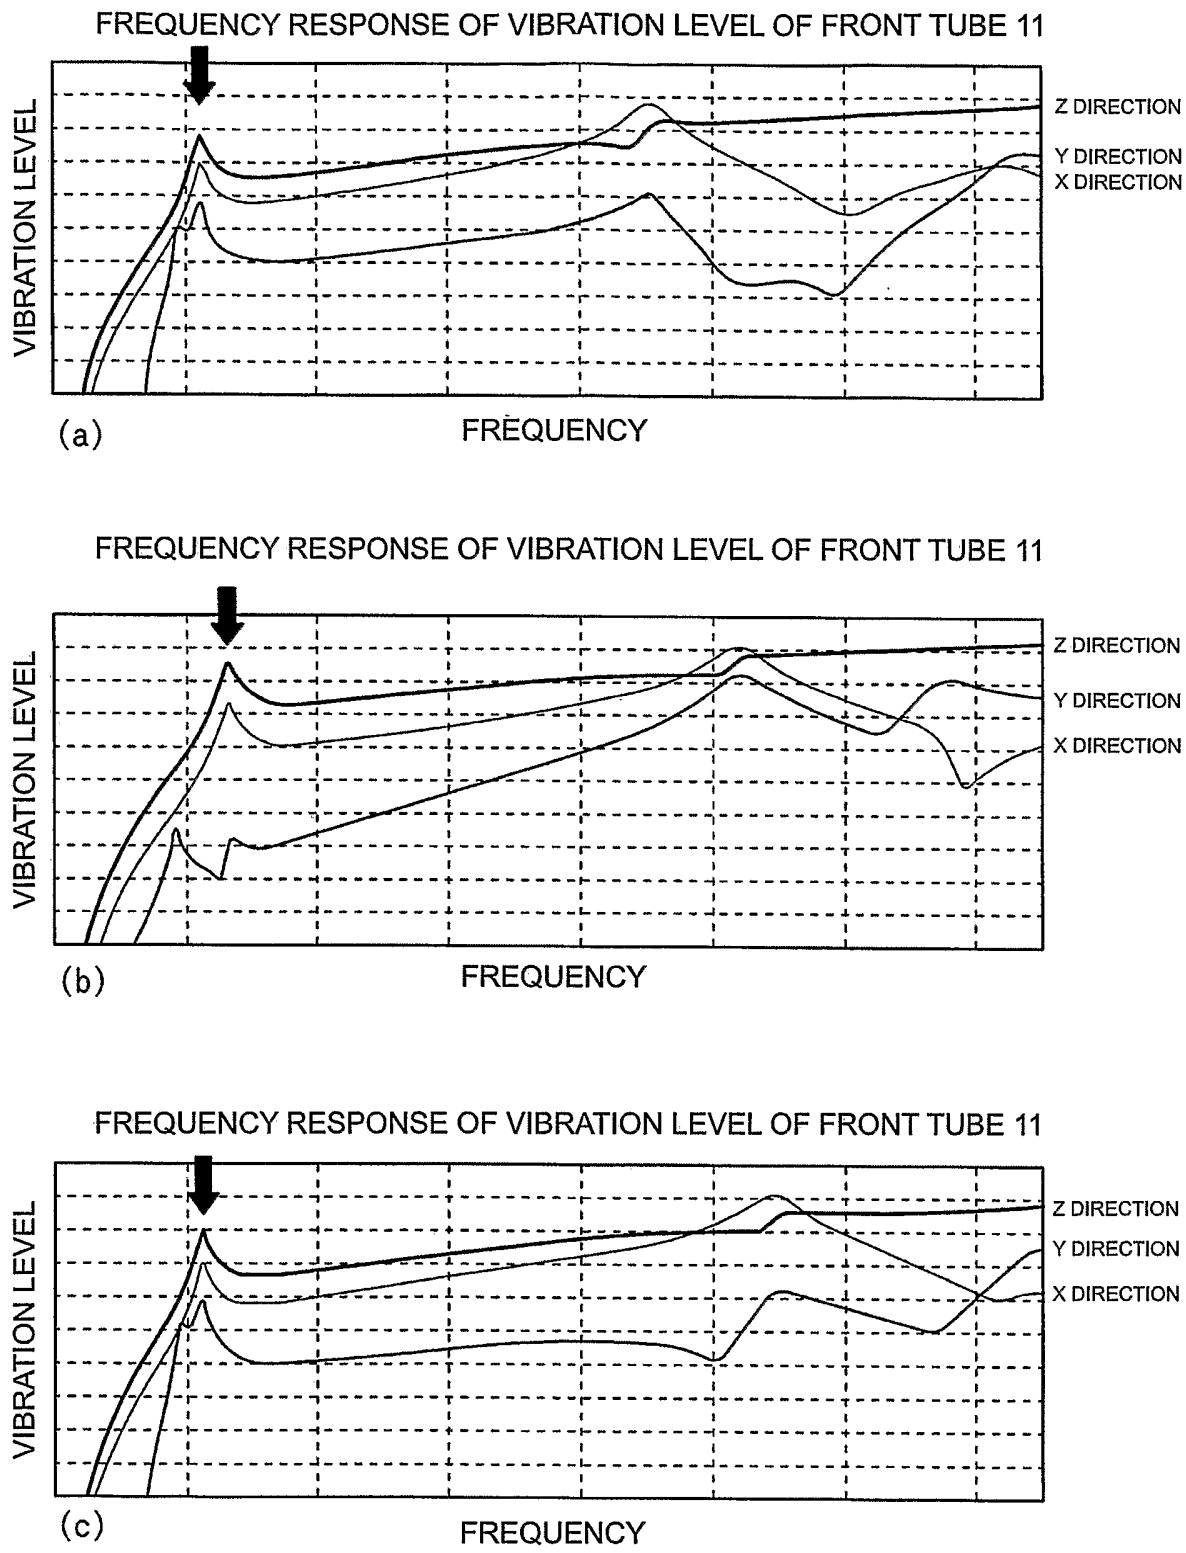


Fig.4

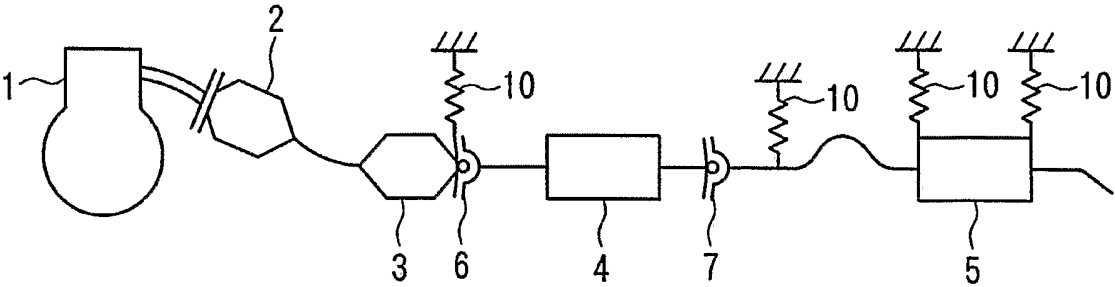


Fig.5

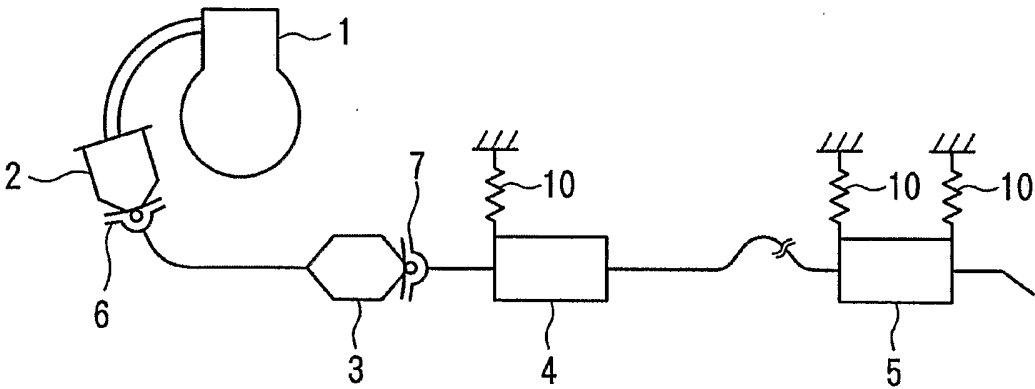


Fig.6

5/6

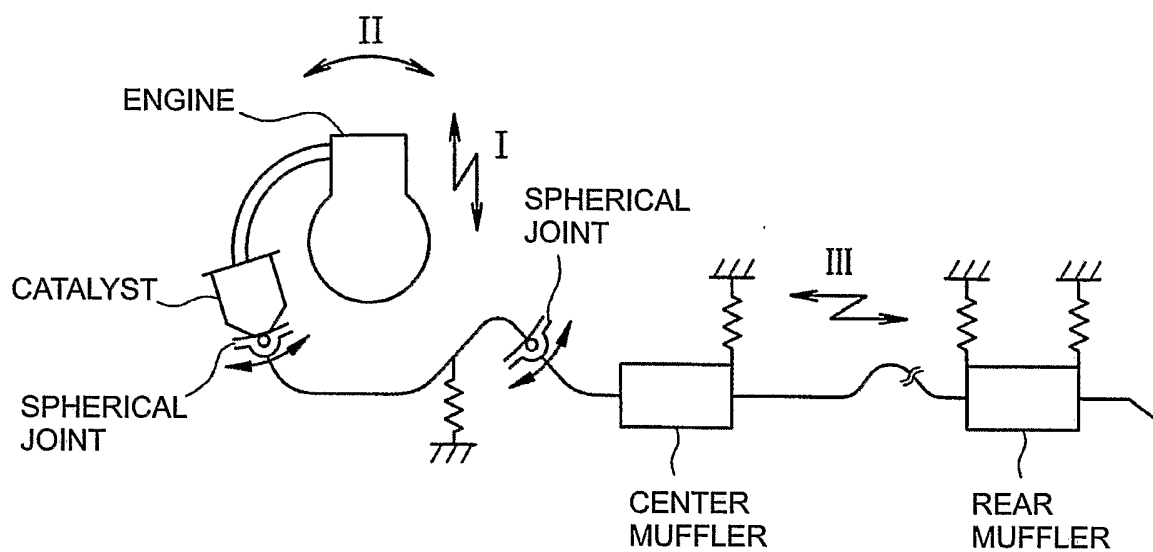


Fig.7

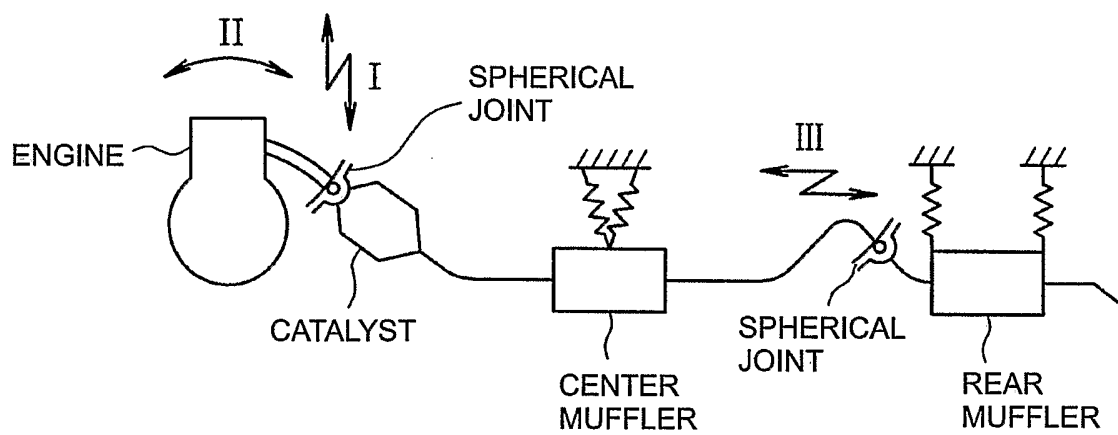


Fig.8

6/6

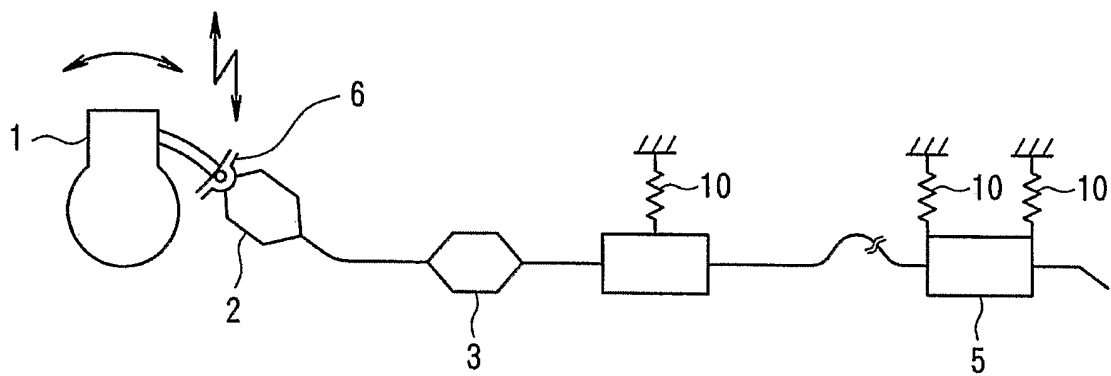


Fig.9

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/GB2005/002520

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 F01N7/00 F01N7/08 B60K13/04

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 F01N B60K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	PATENT ABSTRACTS OF JAPAN vol. 2000, no. 07, 29 September 2000 (2000-09-29) -& JP 2000 104543 A (HONDA MOTOR CO LTD), 11 April 2000 (2000-04-11) paragraphs '0003!', '0006!', '0023! - '0025! claim 1 figure 7	1-6, 9-18,21
A	US 5 323 989 A (HAMADA ET AL) 28 June 1994 (1994-06-28) column 3, line 1 - column 4, line 50 figure 1  ----- -/--	1-21

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

31 August 2005

Date of mailing of the international search report

07/09/2005

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Ikas, G

# INTERNATIONAL SEARCH REPORT

International Application No.  
PCT/GB2005/002520

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	PATENT ABSTRACTS OF JAPAN vol. 1998, no. 12, 31 October 1998 (1998-10-31) & JP 10 196358 A (TOYOTA MOTOR CORP), 28 July 1998 (1998-07-28) cited in the application abstract	1-21
A	PATENT ABSTRACTS OF JAPAN vol. 2003, no. 04, 2 April 2003 (2003-04-02) & JP 2002 371841 A (NISSAN MOTOR CO LTD), 26 December 2002 (2002-12-26) cited in the application abstract	1-21



# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No  
PCT/GB2005/002520

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
JP 2000104543	A	11-04-2000	JP 3497742 B2	16-02-2004
US 5323989	A	28-06-1994	JP 2521192 B2	31-07-1996
			JP 4252732 A	08-09-1992
JP 10196358	A	28-07-1998	JP 3252735 B2	04-02-2002
JP 2002371841	A	26-12-2002	NONE	