

(19)



(11)

EP 3 480 331 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention of the grant of the patent:

30.04.2025 Bulletin 2025/18

(21) Application number: **17820295.8**

(22) Date of filing: **29.06.2017**

(51) International Patent Classification (IPC):

| | |
|-----------------------------|-----------------------------|
| C22C 38/00 (2006.01) | C22C 38/58 (2006.01) |
| C23C 8/10 (2006.01) | C21D 1/76 (2006.01) |
| C22C 38/02 (2006.01) | C22C 38/04 (2006.01) |
| C22C 38/06 (2006.01) | C22C 38/20 (2006.01) |
| C22C 38/22 (2006.01) | C22C 38/24 (2006.01) |
| C22C 38/26 (2006.01) | C22C 38/28 (2006.01) |
| C22C 38/30 (2006.01) | C22C 38/32 (2006.01) |
| C23C 8/18 (2006.01) | C21D 8/10 (2006.01) |
| C21D 8/02 (2006.01) | C21D 6/00 (2006.01) |

(52) Cooperative Patent Classification (CPC):

C22C 38/001; C22C 38/002; C22C 38/005;
C22C 38/02; C22C 38/04; C22C 38/06;
C22C 38/20; C22C 38/22; C22C 38/24;
C22C 38/26; C22C 38/28; C22C 38/30;
C22C 38/32; C23C 8/18; C21D 6/002; (Cont.)

(86) International application number:

PCT/JP2017/024012

(87) International publication number:

WO 2018/003941 (04.01.2018 Gazette 2018/01)

(54) **A METHOD OF PRODUCING HEAT RESISTANT FERRITIC STEEL AND A METHOD FOR PRODUCING A FERRITIC HEAT TRANSFER MEMBER**

VERFAHREN ZUR HERSTELLUNG VON HITZEBESTÄNDIGEM FERRITISCHEM STAHL UND
VERFAHREN ZUR HERSTELLUNG EINES FERRITISCHEN WÄRMEÜBERTRAGUNGSTEILS

UN PROCÉDÉ DE FABRICATION D'ACIER FERRITIQUE RÉSISTANT À LA CHALEUR ET UN
PROCÉDÉ DE FABRICATION D'UN ÉLÉMENT DE TRANSFERT DE CHALEUR FERRITIQUE

(84) Designated Contracting States:

AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR

(30) Priority: **29.06.2016 JP 2016128431**

(43) Date of publication of application:

08.05.2019 Bulletin 2019/19

(73) Proprietor: **Nippon Steel Corporation**

Tokyo 100-8071 (JP)

(72) Inventors:

- **NISHIYAMA, Yoshitaka**
Tokyo 100-8071 (JP)
- **NOGAMI, Hiroshi**
Tokyo 100-8071 (JP)

(74) Representative: **J A Kemp LLP**

80 Turnmill Street
London EC1M 5QU (GB)

(56) References cited:

| | |
|----------------------------|---------------------------|
| WO-A1-2007/091535 | WO-A1-2013/077363 |
| CN-A- 103 334 056 | CN-A- 103 334 056 |
| JP-A- 2007 039 745 | JP-A- 2009 007 601 |
| JP-A- 2013 127 103 | JP-A- H0 885 847 |
| JP-A- H1 192 880 | US-A- 5 520 751 |
| US-A1- 2014 295 194 | |

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 3 480 331 B1

- SHUKLA AMARISH K ET AL: "Effect of Cold Working on Hot Corrosion Behavior of 9 Cr-1 Mo Ferritic Steel in 75 wt% Na₂SO₄ + 25 wt% K₂SO₄ Molten Salt Environment at 900 °C", TRANSACTIONS OF THE INDIAN INSTITUTE OF METALS, SPRINGER INDIA, IN, vol. 69, no. 5, 2 February 2016 (2016-02-02), pages 1049 - 1057, XP035964217, ISSN: 0972-2815, [retrieved on 20160202], DOI: 10.1007/S12666-015-0619-4
 - NIU KUN ET AL: "Corrosion performance of 13Cr stainless steel in high temperature and high pressure environments", FUSHI-YU-FANGHU ? = CORROSION AND PROTECTION, XX, CN, vol. 33, no. 5, 1 January 2012 (2012-01-01), pages 407 - 410, XP009517346, ISSN: 1005-748X
 - AUTORENKOLLEKTIV: "Spurenelemente im Stahl - Moeglichkeiten zur Beeinflussung im Smelzbetrieb", SPURENELEMENTE IN STAEBLEN, VERLAG STAHEISEN, DUESSELDORF, DE, 1 January 1985 (1985-01-01), pages 19 - 22, XP002433212
 - AUGUSTA MARTINELLI MIRANDA ET AL: "Monitoring of less-common residual elements in scrap feeds for EAF steelmaking", IRONMAKING & STEELMAKING: PROCESSES, PRODUCTS AND APPLICATIONS, vol. 46, no. 7, 9 August 2019 (2019-08-09), United Kingdom, pages 598 - 608, XP055752627, ISSN: 0301-9233, DOI: 10.1080/03019233.2019.1601851
 - IRVING MELVIN BERNSTEIN ET AL: "Residual and Minor Elements in Stainless Steels", HANDBOOK OF STAINLESS STEELS, XX, XX, 1 January 1977 (1977-01-01), pages 14 - 1, XP002430954
- (52) Cooperative Patent Classification (CPC): (Cont.)
C21D 8/0278; C21D 8/105; C21D 2211/005

Description

TECHNICAL FIELD

[0001] The present invention relates to a method of producing a heat resistant steel and a heat transfer member, and more particularly relates to a method of producing a heat resistant ferritic steel and a ferritic heat transfer member which are used under a high-temperature steam oxidation environment or the like.

BACKGROUND ART

[0002] From the viewpoints of suppressing the emission of CO₂ gas and economic efficiency, there is a demand to improve the power generation efficiency in thermal power plants. Therefore, there is a trend of increasing temperature and pressure of turbine steam in thermal power plants. Heat transfer members that are used in thermal power plants are exposed to high temperature and high pressure steam for long time periods. A heat transfer member is, for example, a boiler pipe. When exposed to high temperature steam for a long time period, oxide scale forms on the surface of the heat transfer member. If the steam oxidation resistance properties of the heat transfer member are insufficient, a large amount of oxide scale will form on the surface of the heat transfer member. The heat transfer member thermally expands and contracts due to starting and stopping of the boiler. Therefore, if a large amount of oxide scale is formed, the oxide scale will peel off and cause a blockage in the pipe. Furthermore, in a case where a large amount of oxide scale is formed, thermal conduction from outside the pipe to inside the pipe is inhibited by the oxide scale. Therefore, in order to maintain the temperature within the pipe at a high temperature, it will be necessary to apply a greater amount of heat from the outside. An increase in the temperature of the pipe causes a reduction in the creep strength. Therefore, high steam oxidation resistance properties are required for heat transfer members that are to be used in equipment such as thermal power boilers, turbines or steam pipes.

[0003] For example, a heat resistant austenitic steel and a heat resistant ferritic steel have been developed as materials that meet the demands regarding such properties. A heat resistant austenitic steel is, for example, a heat resistant austenitic steel having a Cr content of 18 to 25 mass%. A heat resistant ferritic steel is, for example, a heat resistant ferritic steel having a Cr content of 8 to 13 mass%. A heat resistant ferritic steel is less expensive than a heat resistant austenitic steel. A heat resistant ferritic steel also has a lower coefficient of thermal expansion and a higher thermal conductivity than a heat resistant austenitic steel. Therefore, a heat resistant ferritic steel is suitable as the material for a pipe in a thermal power plant. However, the Cr content of a heat resistant ferritic steel is lower than the Cr content of a heat resistant austenitic steel. Consequently, the steam oxidation resistance properties of the heat resistant ferritic steel are lower than the steam oxidation resistance properties of the heat resistant austenitic steel. Therefore, there is a need for a heat resistant ferritic steel that is excellent in steam oxidation resistance properties.

[0004] A heat resistant ferritic steel which inhibits oxide scale from falling off is disclosed, for example, in Japanese Patent Application Publication No. 11-92880 (Patent Literature 1). The heat resistant ferritic steel disclosed in Patent Literature 1 is a heat resistant ferritic steel containing a high Cr content that forms an oxide film on the surface during use, in which ultra-fine oxides having a diameter of 1 micron or less are formed at the boundary with the oxide film or in the vicinity thereof. Patent Literature 1 describes that, as a result, the adhesiveness between the oxide film and the base metal improves.

[0005] A method for improving steam oxidation resistance properties by increasing the Cr concentration at the surface of a heat resistant ferritic steel is disclosed, for example, in Japanese Patent Application Publication No. 2007-39745 (Patent Literature 2). According to the method disclosed in Patent Literature 2, powder particles containing Cr are caused to be carried at the surface of a heat resistant ferritic steel containing Cr, and a Cr-oxide layer having a high Cr concentration is formed on the ferritic steel surface under a high temperature. Patent Literature 2 describes that, according to this method, the (steam) oxidation resistance of a ferritic steel containing Cr can be easily and economically improved.

[0006] A method for improving oxidation resistance by forming a Cr-oxide coating on the surface of a heat resistant ferritic steel is disclosed, for example, in Japanese Patent Application Publication No. 2013-127103 (Patent Literature 3). An antioxidation treatment method for a heat resistant ferritic steel described in Patent Literature 3 includes subjecting a heat resistant ferritic steel containing chromium to a heat treatment under a gas atmosphere with a low oxygen partial pressure that consists of a gaseous mixture of carbon dioxide gas with an inert gas to thereby form an oxide coating that contains chromium on the surface of the heat resistant steel. Patent Literature 3 describes that, according to this method, the Cr concentration in the scale is increased, and the oxidation resistance of the heat resistant ferritic steel can be easily and economically improved.

[0007] A heat resistant ferritic steel in which steam oxidation resistance properties are improved by depositing Cr on the surface of the heat resistant ferritic steel is disclosed, for example, in Japanese Patent Application Publication No. 2009-179884 (Patent Literature 4). The heat resistant ferritic steel disclosed in Patent Literature 4 is a heat resistant ferritic steel that is used under a high-temperature and highpressure steam environment, and has on its surface a Cr oxide film

which is formed by subjecting Cr that was deposited by a shot peening treatment using a shot material of powdery Cr to a pre-oxidizing treatment. Patent Literature 4 describes that, because a protection film of oxides with oxidation resistance is formed on the heat resistant steel prior to use in an oxidation environment, the steam oxidation resistance properties of the heat resistant ferritic steel are improved.

CITATION LIST

PATENT LITERATURE

[0008]

Patent Literature 1: Japanese Patent Application Publication No. 11-92880
 Patent Literature 2: Japanese Patent Application Publication No. 2007-39745
 Patent Literature 3: Japanese Patent Application Publication No. 2013-127103
 Patent Literature 4: Japanese Patent Application Publication No. 2009-179884

[0009] US 2014/0295194 discloses a heat resistant ferritic steel including a base material including, by mass percent, C: 0.01 to 0.3%, Si: 0.01 to 2%, Mn: 0.01 to 2%, P: at most 0.10%, S: at most 0.03%, Cr: 7.5 to 14.0%, sol.Al: at most 0.3%, and N: 0.005 to 0.15%, the balance being Fe and impurities, and an oxide film that is formed on the base material and contains 25 to 97% of Fe and 3 to 75% of Cr. This heat resistant ferritic steel is excellent in photoselective absorptivity and oxidation resistance.

SUMMARY OF INVENTION

TECHNICAL PROBLEM

[0010] However, even when the aforementioned techniques are used, in some cases the heat transfer characteristics and steam oxidation resistance properties of a heat transfer member cannot be increased sufficiently. As described above, various kinds of studies have been conducted regarding methods for suppressing the formation of oxide scale by forming Cr oxides on the surface of a heat transfer member. However, the thermal conductivity of Cr oxides is low. Therefore, if Cr oxides are formed, even though the steam oxidation resistance properties of the heat transfer member will increase, the heat transfer characteristics will decrease.

[0011] An objective of the present invention is to provide a method of producing a ferritic heat transfer member that is excellent in heat transfer characteristics and steam oxidation resistance properties, and a heat resistant ferritic steel capable of realizing the ferritic heat transfer member.

SOLUTION TO PROBLEM

[0012] A method of producing heat resistance steel according to the invention is defined in claim 1. A method for producing a ferritic heat transfer member according to the invention is defined in claim 2.

ADVANTAGEOUS EFFECTS OF INVENTION

[0013] The heat resistant ferritic steel and the ferritic heat transfer member produced by the method according to the present embodiment are excellent in heat transfer characteristics and steam oxidation resistance properties.

BRIEF DESCRIPTION OF DRAWINGS

[0014]

[FIG. 1] FIG. 1 is a sectional view of a heat resistant ferritic steel produced by the method according to the present embodiment.
 [FIG. 2] FIG. 2 is a sectional view of a ferritic heat transfer member produced by the method according to the present embodiment.

DESCRIPTION OF EMBODIMENTS

[0015] The present embodiment is described in detail hereunder while referring to the drawings. Identical or equivalent

portions in the drawings are assigned the same reference symbols, and a description of such portions is not duplicated.

[0016] The present inventors conducted various studies regarding heat resistant ferritic steels and ferritic heat transfer members. As a result, the present inventors obtained the following findings.

(1) The heat resistant ferritic steel produced by the method of the present embodiment can be utilized as a heat transfer member such as a boiler pipe. A heat transfer member such as a boiler pipe comes in contact with high temperature steam. If exposed to high temperature steam for a long time period, oxide scale forms on the surface of the heat transfer member. Oxide scale is composed of various oxides and impurities. The oxides are, for example, Fe_3O_4 , Fe_2O_3 and Cr_2O_3 . The oxide scale forms an oxide film on the surface of the heat transfer member.

(2) If the thermal conductivity of the oxide film is low, the heat transfer characteristics with respect to the transfer of heat from outside of the heat transfer member to inside of the heat transfer member decrease. Therefore, in order to maintain the inside of the heat transfer member at a high temperature, the necessity arises to apply a large amount of heat from the outside of the heat transfer member, and thus the heat transfer characteristics of the boiler decrease. In a case where a large amount of heat is applied from outside of the heat transfer member, the creep strength of the heat transfer member may also decrease in some cases. Therefore, it is preferable that the thermal conductivity of the oxide film is high. However, in a case where the thermal conductivity of the oxide film is too high, the heat of high temperature steam is transmitted to the inner surface of the heat transfer member. Because the transmitted heat promotes an oxidation reaction on the inner surface of the heat transfer member, a large amount of oxide scale arises on the inner surface of the heat transfer member. The large amount of oxide scale peels off from the inner surface of the heat transfer member. In a case where the heat transfer member is a pipe, the oxide scale that peeled off causes a blockage in the pipe. Therefore, it is necessary for the thermal conductivity of the oxide film to be controlled within a certain fixed range.

(3) If the thickness of the oxide scale is too thick, thermal conduction from the outside of the heat transfer member to the inside of the heat transfer member will be inhibited. Therefore, the heat transfer characteristics of the boiler will decrease. Accordingly, it is preferable that the thickness of the oxide film is as thin as possible.

(4) Among the aforementioned oxides, Fe_3O_4 and Fe_2O_3 are formed in a thermodynamically stable manner under a high-temperature steam oxidation environment (hereunder, also referred to as a "high-temperature steam environment"). The thermal conductivity of Fe_3O_4 and Fe_2O_3 is also high. Accordingly, the thermal efficiency of the boiler will be improved if an oxide film containing a large amount of Fe_3O_4 and Fe_2O_3 is formed on the surface of a heat transfer member that comes in contact with high temperature steam. However, the thermal conductivity of an oxide film containing a large amount of Fe_3O_4 and Fe_2O_3 is too high. Therefore, if only such an oxide film is formed, as described above, a large amount of oxide scale will arise on the inner surface of the heat transfer member.

(5) In general, in a heat transfer member such as a boiler pipe, in many cases the Cr concentration of the inner surface of the pipe is increased, and an oxide film containing a large amount of Cr_2O_3 is formed on the inner surface of the heat transfer member. By this means, formation of a large amount of oxide scale is suppressed and the steam oxidation resistance properties of the heat transfer member improve. However, the thermal conductivity of an oxide film containing a large amount of Cr_2O_3 is low. Consequently, the heat transfer characteristics of the heat transfer member decrease. Therefore, the heat transfer characteristics of the boiler cannot be improved by means of only such an oxide film.

(6) Therefore, an oxide film that includes two layers which are an oxidized layer having excellent heat transfer characteristics and an oxidized layer that compatibly combines both steam oxidation resistance properties and heat transfer characteristics is formed on the inner surface of a heat transfer member under a high-temperature steam environment. By this means, both excellent heat transfer characteristics and excellent steam oxidation resistance properties can be compatibly realized.

(7) When an oxidized layer contains Fe_3O_4 and Fe_2O_3 in a total amount of 80% or more in volume ratio, the thermal conductivity of the oxidized layer is high. Consequently, the heat transfer characteristics of the boiler can be improved. Therefore, an oxidized layer B containing Fe_3O_4 and Fe_2O_3 in a total amount of 80% or more in volume ratio is formed on the surface of the heat transfer member that comes in contact with high temperature steam.

(8) On the other hand, as the oxidized layer that compatibly combines both steam oxidation resistance properties and heat transfer characteristics, an oxidized layer C is formed between the oxidized layer B and the base material. The oxidized layer C contains Cr and Mn in a total amount in a range of more than 5% to 30 mass%, and one or more types of elements selected from a group consisting of Mo, Ta, W and Re in a total amount in a range of 1 to 15 mass%.

[0017] Cr oxides and Mn oxides improve the steam oxidation resistance properties of the base material. However, if the Cr content is too high, the heat transfer characteristics of the oxide film decrease. If the Mn content is too high, the creep strength of the base material decreases. Therefore, the oxidized layer C contains Cr and Mn in a total amount in a range of more than 5% to 30 mass%.

[0018] When Mo, Ta, W and Re are contained in the oxidized layer C, the thermal conductivity of the oxidized layer C

increases. However, if the content of these elements is too high, in some cases the steam oxidation resistance properties of the oxidized layer C decrease. Accordingly, the oxidized layer C contains one or more types of element selected from a group consisting of Mo, Ta, W and Re in a total amount in a range of 1 to 15 mass%.

[0019] Thus, the oxidized layer C exhibits excellent heat transfer characteristics and excellent steam oxidation resistance properties.

[0020] (9) In order to form the oxidized layer B and oxidized layer C under a high-temperature steam environment, it is necessary to form the oxidized layer A on the base material in advance. The chemical composition of the oxidized layer A contains, in mass%, Cr and Mn in a total amount in a range of 20 to 45%. The chemical composition of the oxidized layer A contains, in mass%, one or more types of element selected from a group consisting of Mo, Ta, W and Re in a total amount in a range of 0.5 to 10%. When used in a high-temperature steam environment, the oxidized layer A changes to an oxide film including the oxidized layer B and the oxidized layer C. The term "high temperature" refers to, for example, a temperature in the range of 500 to 650°C.

[0021] A heat resistant ferritic steel produced by the method according to the present embodiment that was completed based on the above findings includes a base material, and an oxidized layer A on the surface of the base material. The base material has a chemical composition consisting of, in mass%, C: 0.01 to 0.3%, Si: 0.01 to 2.0%, Mn: 0.01 to 2.0%, P: 0.10% or less, S: 0.03% or less, Cr: 7.0 to 14.0%, N: 0.005 to 0.15%, sol. Al: 0.001 to 0.3%, one or more types of element selected from a group consisting of Mo: 0 to 5.0%, Ta: 0 to 5.0%, W: 0 to 5.0% and Re: 0 to 5.0%: 0.5 to 7.0% in total, one or more types of element selected from a group consisting of Cu: 0.005 to 5.0%, Ni: 0.005 to 5.0%, and Co: 0.005 to 5.0%, Ti: 0 to 1.0%, V: 0 to 1.0%, Nb: 0 to 1.0%, Hf: 0 to 1.0%, Ca: 0 to 0.1%, Mg: 0 to 0.1%, Zr: 0 to 0.1%, B: 0 to 0.1%, and rare earth metal: 0 to 0.1%, with the balance being Fe and impurities. The oxidized layer A includes a chemical composition containing, in mass%, 20 to 45% in total of Cr and Mn. The oxidized layer A includes a chemical composition excluding oxygen and carbon containing, in mass%, 0.5 to 10% in total of one or more types of element selected from a group consisting of Mo, Ta, W and Re.

[0022] The heat resistant ferritic steel produced by the method according to the present embodiment is excellent in heat transfer characteristics and steam oxidation resistance properties.

[0023] The chemical composition of the aforementioned base material may contain one or more types of element selected from a group consisting of Ti: 0.01 to 1.0%, V: 0.01 to 1.0%, Nb: 0.01 to 1.0% and Hf: 0.01 to 1.0%.

[0024] The chemical composition of the aforementioned base material may contain one or more types of element selected from a group consisting of Ca: 0.0015 to 0.1%, Mg: 0.0015 to 0.1%, Zr: 0.0015 to 0.1%, B: 0.0015 to 0.1% and rare earth metal: 0.0015 to 0.1%.

[0025] A ferritic heat transfer member produced by the method according to the present embodiment includes a base material, and an oxide film on the surface of the base material. The base material has the chemical composition described above. The oxide film includes an oxidized layer B and an oxidized layer C. The oxidized layer B contains, in vol%, 80% or more in total of Fe_3O_4 and Fe_2O_3 . The oxidized layer C is disposed between the oxidized layer B and the base material. The chemical composition excluding oxygen and carbon of the oxidized layer C contains Cr and Mn in a total amount in a range of more than 5% to 30 mass%, and contains one or more types of element selected from a group consisting of Mo, Ta, W and Re in a total amount in a range of 1 to 15 mass%.

[0026] The ferritic heat transfer member produced by the method according to the present embodiment is excellent in heat transfer characteristics and steam oxidation resistance properties.

[0027] Preferably, the oxidized layer B contains excluding oxygen and carbon Cr and Mn in a total amount of not more than 5 mass%.

[0028] Preferably, the oxidized layer C contains not more than 5 vol% of Cr_2O_3 .

[0029] In this case, the thermal conductivity of the oxide film is improved by suppressing the amount of precipitated Cr_2O_3 that has low thermal conductivity. Therefore, the heat transfer characteristics of the boiler can be enhanced.

[0030] Hereunder, the heat resistant ferritic steel and the ferritic heat transfer member produced according to the present invention are described in detail. The symbol "%" in relation to an element means "mass%" unless specifically stated otherwise.

[Heat resistant ferritic steel]

[0031] The shape of the heat resistant ferritic steel produced according to the present invention is not particularly limited. The heat resistant ferritic steel is, for example, a steel pipe, a steel bar, or a steel plate. Preferably, the heat resistant ferritic steel is a heat resistant ferritic steel pipe. An oxidation treatment is performed on the base material of the heat resistant ferritic steel according to the present embodiment. An oxidized layer A is formed on the surface of the base material of the heat resistant ferritic steel by the oxidation treatment.

[0032] FIG. 1 is a sectional view of the heat resistant ferritic steel produced according to the present embodiment. Referring to FIG. 1, a heat resistant ferritic steel 1 includes a base material 2 and an oxidized layer A. The heat resistant ferritic steel 1 that includes the base material 2 and the oxidized layer A is used as a heat transfer member under a high-

temperature steam environment. As a result, the oxidized layer A changes to an oxide film 3 that includes an oxidized layer B and an oxidized layer C.

[Chemical composition of base material 2]

[0033] The base material 2 has the following chemical composition.

C: 0.01 to 0.3%

[0034] Carbon (C) stabilizes austenite. C also increases the creep strength of the base material by solid-solution strengthening. However, if the C content of the base material 2 is too high, an excessive amount of carbides precipitate, and the workability and weldability of the base material 2 will decrease. Accordingly, the C content is set in a range of 0.01 to 0.3%. A preferable lower limit of the C content is 0.03%, and a preferable upper limit of the C content is 0.15%.

Si: 0.01 to 2.0%

[0035] Silicon (Si) deoxidizes the steel. Si also improves the steam oxidation resistance properties of the base material 2. However, if the Si content is too high, the toughness of the base material 2 decreases. Accordingly, the Si content is set in a range of 0.01 to 2.0%. A preferable lower limit of the Si content is 0.05%, and more preferably is 0.1%. A preferable upper limit of the Si content is 1.0%, and more preferably is 0.5%.

Mn: 0.01 to 2.0%

[0036] Manganese (Mn) deoxidizes the steel. Mn also combines with S in the base material 2 to form MnS, and suppresses grain-boundary segregation of S. Thus, the hot workability of the base material 2 improves. However, if the Mn content is too high, the base material 2 becomes brittle and, in addition, the creep strength of the base material 2 decreases. Accordingly, the Mn content is set in a range of 0.01 to 2.0%. A preferable lower limit of the Mn content is 0.05%, and more preferably is 0.1%. A preferable upper limit of the Mn content is 1.0%, and more preferably is 0.8%.

P: 0.10% or less

[0037] Phosphorus (P) is an impurity. P segregates at crystal grain boundaries of the base material 2, and decreases the hot workability of the base material 2. P also concentrates at the boundary between the oxide film 3 and the base material 2, and reduces the adhesiveness of the oxide film 3 with respect to the base material 2. Accordingly, the P content is preferably as low as possible. The P content is set to 0.10% or less, and preferably is 0.03% or less. A lower limit of the P content is, for example, 0.005%.

S: 0.03% or less

[0038] Sulfur (S) is an impurity. S segregates at crystal grain boundaries of the base material 2, and decreases the hot workability of the base material 2. S also concentrates at the boundary between the oxide film 3 and the base material 2, and reduces the adhesiveness of the oxide film 3 with respect to the base material 2. Accordingly, the S content is preferably as low as possible. The S content is set to 0.03% or less, and preferably is 0.015% or less. A lower limit of the S content is, for example, 0.0001%.

Cr: 7.0 to 14.0%

[0039] Chromium (Cr) improves the steam oxidation resistance properties of the base material 2. Cr is also contained in the oxide film 3 as oxides defined by Cr_2O_3 and $(\text{Fe}, \text{Cr})_3\text{O}_4$. The Cr oxides improve the steam oxidation resistance properties of the base material 2. The Cr oxides also improve the adhesiveness of the oxide film 3 with respect to the base material 2. However, if the Cr content is too high, the concentration of Cr_2O_3 in the oxide film 3 becomes high and the heat transfer characteristics of the oxide film 3 will decrease. Accordingly, the Cr content is set in a range of 7.0 to 14.0%. A preferable lower limit of the Cr content is 7.5%, and more preferably is 8.0%. A preferable upper limit of the Cr content is 12.0%, and more preferably is 11.0%.

N: 0.005 to 0.15%

[0040] Nitrogen (N) dissolves in the base material 2, and increases the strength of the base material 2. In addition, N

forms nitrides with alloy elements in the base material 2 and precipitates in the base material 2, thereby increasing the strength of the base material 2. However, if the N content is too high, the nitrides coarsen and the toughness of the base material 2 decreases. Accordingly, the N content is set in a range of 0.005 to 0.15%. A preferable lower limit of the N content is 0.01%. A preferable upper limit of the N content is 0.10%.

sol. Al: 0.001 to 0.3%

[0041] Aluminum (Al) deoxidizes the steel. However, if the Al content is too high, the hot workability of the base material 2 decreases. Accordingly, the Al content is set in a range of 0.001 to 0.3%. A preferable lower limit of the Al content is 0.005%, and a preferable upper limit of the Al content is 0.1%. In the present embodiment, the term "Al content" means the soluble Al (sol. Al).

[0042] 0.5 to 7.0% in total of one or more types of element selected from a group consisting of:

Mo: 0 to 5.0%,
Ta: 0 to 5.0%,
W: 0 to 5.0%, and
Re: 0 to 5.0%

[0043] One or more types of element selected from a group consisting of molybdenum (Mo), tantalum (Ta), tungsten (W) and rhenium (Re) is contained. Hereinafter, these elements are also referred to as "specific oxidized layer forming elements". The specific oxidized layer forming elements form the oxidized layer A on the surface of the base material 2. The specific oxidized layer forming elements also form the oxide film 3 including the oxidized layer B and the oxidized layer C under a high-temperature steam environment of 500 to 650°C. These effects are obtained if even one type of these elements is contained. However, if the content of the specific oxidized layer forming elements is too high, the toughness, ductility and workability of the base material 2 will decrease. Accordingly, the Mo content is set in a range of 0 to 5.0%, the Ta content is set in a range of 0 to 5.0%, the W content is set in a range of 0 to 5.0% and the Re content is set in a range of 0 to 5.0%. A preferable lower limit of the Mo content is 0.01%, and more preferably is 0.1%. A preferable lower limit of the Ta content is 0.01%, and more preferably is 0.1%. A preferable lower limit of the W content is 0.01%, and more preferably is 0.1%. A preferable lower limit of the Re content is 0.01%, and more preferably is 0.1%. A preferable upper limit of the Mo content is 4.0%, and more preferably is 3.0%. A preferable upper limit of the Ta content is 4.0%, and more preferably is 3.0%. A preferable upper limit of the W content is 4.0%, and more preferably is 3.0%. A preferable upper limit of the Re content is 4.0%, and more preferably is 3.0%. The total content of the specific oxidized layer forming elements is set in the range of 0.5 to 7.0%. A preferable lower limit of the total content of the specific oxidized layer forming elements is 0.6%, and more preferably is 1.0%. A preferable upper limit of the total content of the specific oxidized layer forming elements is 6.5%, and more preferably is 6.0%.

[0044] The balance of the base material 2 of the heat resistant ferritic steel according to the present embodiment is Fe and impurities. In the present embodiment, the term "impurities" refers to substances which are mixed in from ore or scrap that is utilized as a raw material of the steel or from the environment of the production process or the like, and are substances that are contained within a range that does not adversely affect a heat transfer member 4 according to the present embodiment. The impurities include, for example, oxygen (O), arsenic (As), antimony (Sb), thallium (Tl), lead (Pb) and bismuth (Bi).

[0045] The base material 2 of the heat resistant ferritic steel according to the present embodiment may further contain the following elements in lieu of a part of Fe.

Cu: 0 to 5.0%
Ni: 0 to 5.0%
Co: 0 to 5.0%

[0046] One or more types of element selected from a group consisting of Copper (Cu), nickel (Ni) and cobalt (Co) are contained in an amount of 0.005% or more. These elements stabilize austenite. By this means, retention of delta ferrite that lowers the shock resistance of the base material 2 is suppressed. This effect is obtained if even one type of these elements is contained. However, if the content of these elements is too high, the long-term creep strength of the base material 2 will decrease. Accordingly, the Cu content is set in a range of 0 to 5.0%, the Ni content is set in a range of 0 to 5.0%, and the Co content is set in a range of 0 to 5.0%. A preferable upper limit of the Cu content is 3.0%, and more preferably is 2.0%. A preferable upper limit of the Ni content is 3.0%, and more preferably is 2.0%. A preferable upper limit of the Co content is 3.0%, and more preferably is 2.0%.

Ti: 0 to 1.0%

V: 0 to 1.0%
 Nb: 0 to 1.0%
 Hf: 0 to 1.0%

[0047] Titanium (Ti), vanadium (V), niobium (Nb) and hafnium (Hf) are optional elements and need not be contained. If contained, these elements combine with carbon and nitrogen to form carbides, nitrides or carbo-nitrides. These carbides, nitrides and carbo-nitrides act to perform precipitation strengthening of the base material 2. This effect is obtained if even one type of these elements is contained. However, if the content of these elements is too high, the workability of the base material 2 will decrease. Accordingly, the Ti content is set in a range of 0 to 1.0%, the V content is set in a range of 0 to 1.0%, the Nb content is set in a range of 0 to 1.0% and the Hf content is set in a range of 0 to 1.0%. A preferable upper limit of the Ti content is 0.8%, and more preferably is 0.4%. A preferable upper limit of the V content is 0.8%, and more preferably is 0.4%. A preferable upper limit of the Nb content is 0.8%, and more preferably is 0.4%. A preferable upper limit of the Hf content is 0.8%, and more preferably is 0.4%. A preferable lower limit of the content of each of these elements is 0.01%.

Ca: 0 to 0.1%
 Mg: 0 to 0.1%
 Zr: 0 to 0.1%
 B: 0 to 0.1%
 Rare earth metal: 0 to 0.1%

[0048] Calcium (Ca), magnesium (Mg), zirconium (Zr), boron (B) and rare earth metal (REM) are optional elements, and need not be contained. If contained, these elements increase the strength, workability and oxidation resistance of the base material 2. This effect is obtained if even one type of these elements is contained. However, if the content of these elements is too high, the toughness and weldability of the base material 2 will decrease. Accordingly, the Ca content is set in a range of 0 to 0.1%, the Mg content is set in a range of 0 to 0.1%, the Zr content is set in a range of 0 to 0.1%, the B content is set in a range of 0 to 0.1% and the REM content is set in a range of 0 to 0.1%. A preferable upper limit of the Ca content is 0.05%. A preferable upper limit of the Mg content is 0.05%. A preferable upper limit of the Zr content is 0.05%. A preferable upper limit of the B content is 0.05%. A preferable upper limit of the REM content is 0.05%. A preferable lower limit of the content of each of these elements is 0.0015%. Herein, the term "REM" refers to one or more types of element selected from a group consisting of yttrium (Y) which is the element with atomic number 39, the elements from lanthanum (La) with atomic number 57 to lutetium (Lu) with atomic number 71 that are lanthanides, and the elements from actinium (Ac) with atomic number 89 to lawrencium (Lr) with atomic number 103 that are actinides.

[Oxidized layer A]

[0049] An oxidation treatment is performed on the base material 2 having the aforementioned chemical composition. The oxidized layer A is formed on the surface of the base material 2 by the oxidation treatment. The heat resistant ferritic steel 1 having the base material 2 and the oxidized layer A on the surface of the base material 2 is used under a high-temperature steam environment. Under a high-temperature steam environment, the oxidized layer A changes to the oxide film 3 that is excellent in heat transfer characteristics, while maintaining steam oxidation resistance properties. That is, the oxidized layer A is a starting material for forming the oxide film 3 that includes the oxidized layer B and the oxidized layer C. Although the mechanism by which the oxidized layer A changes into the oxide film 3 is not certain, it is surmised that the oxidized layer A principally contributes to formation of the oxidized layer C.

[0050] The thickness of the oxidized layer A is not particularly limited. If the oxidized layer A is formed even slightly, the oxide film 3 will be formed. The thickness of the oxidized layer A is preferably not less than 0.2 μm . In this case, under a high-temperature steam environment, the oxide film 3 can be uniformly formed on the surface of the base material 2 in a stable manner. Therefore, it is easy to completely cover the base material 2 with the oxide film 3. As a result, the thermal conductivity at the surface of the ferritic heat transfer member 4 increases. More preferably, the thickness of the oxidized layer A is not less than 1.0 μm . Although the upper limit of the thickness of the oxidized layer A is not particularly limited, in consideration of mass productivity, the upper limit is preferably not more than 20 μm .

[0051] The thickness of the oxidized layer A is determined by the following method. The heat resistant ferritic steel 1 that was subjected to an oxidation treatment that is described later is cut perpendicularly to the surface thereof. In a case where the heat resistant ferritic steel 1 is a steel pipe, the heat resistant ferritic steel 1 is cut perpendicularly to the axial direction of the steel pipe. A cross-section including the surface of the heat resistant ferritic steel 1 is observed using a scanning electron microscope (SEM) manufactured by JEOL Ltd. In a case where the heat resistant ferritic steel 1 is a steel pipe, SEM is used to observe a cross-section that includes the inner surface of the steel pipe. The observation magnification is 2000 times. In the observation visual field, the thickness of the oxidized layer on the surface of the heat resistant ferritic steel 1 (the inner surface in a case where the heat resistant ferritic steel 1 is a steel pipe) is measured. The measurement is

made on four different cross-sections of the heat resistant ferritic steel 1. In a case where the heat resistant ferritic steel 1 is a steel pipe, measurement is performed at four locations at a pitch of 45°. The average value of the measurement results is adopted as the thickness of the oxidized layer A.

[0052] The chemical composition of the oxidized layer A contains a total content of 20 to 45% of Cr and Mn. If the total content of Cr and Mn in the oxidized layer A is less than 20%, the total content of Cr and Mn in the oxidized layer C will be 5% or less under a high-temperature steam environment. In this case, the thermal conductivity of the oxidized layer C will be too high. In such case, the steam oxidation resistance properties of the ferritic heat transfer member 4 will decrease. On the other hand, if the total content of Cr and Mn in the oxidized layer A is more than 45%, the total content of Cr and Mn in the oxidized layer C will be more than 30% under a high-temperature steam environment. In this case, the thermal conductivity of the oxidized layer C will be too low. As a result, the heat transfer characteristics of the ferritic heat transfer member 4 will decrease. Therefore, the chemical composition of the oxidized layer A contains Cr and Mn in a total amount in a range of 20 to 45%. A preferable lower limit of the total content of Cr and Mn in the oxidized layer A is 22%. A preferable upper limit of the total content of Cr and Mn in the oxidized layer A is 40%.

[0053] The chemical composition of the oxidized layer A further contains a total of 1 to 10% of one or more types of element selected from the group consisting of Mo, Ta, W and Re (specific oxidized layer forming elements). If the total content of the specific oxidized layer forming elements of the oxidized layer A is less than 0.5%, the total content of the specific oxidized layer forming elements of the oxidized layer C will be less than 1% under a high-temperature steam environment. In this case, the thermal conductivity of the oxidized layer C will be too low. As a result, the heat transfer characteristics of the ferritic heat transfer member 4 will decrease. On the other hand, if the total content of the specific oxidized layer forming elements of the oxidized layer A is more than 10%, under a high-temperature steam environment the total content of the specific oxidized layer forming elements of the oxidized layer C will be more than 15%. In this case, the thermal conductivity of the oxidized layer C will be too high. As a result, the steam oxidation resistance properties of the ferritic heat transfer member 4 will decrease. Therefore, the chemical composition of the oxidized layer A contains the specific oxidized layer forming elements in a total amount that is in a range of 1 to 10%. A preferable upper limit of the total content of the specific oxidized layer forming elements is 8%.

[0054] The total content of Cr and Mn and the total content of the specific oxidized layer forming elements (Mo, Ta, W and Re) in the oxidized layer A is calculated by the following method. The heat resistant ferritic steel 1 that was subjected to an oxidation treatment that is described later is cut perpendicularly to the surface thereof. In a case where the heat resistant ferritic steel 1 is a steel pipe, the heat resistant ferritic steel 1 is cut perpendicularly to the axial direction of the steel pipe. A cross-section including the surface of the heat resistant ferritic steel 1 is observed using a scanning electron microscope (SEM) manufactured by JEOL Ltd. The oxidized layer A that appears with a comparatively white contrast of the surface of the heat resistant ferritic steel 1 (inner surface in a case where the heat resistant ferritic steel 1 is a steel pipe) is identified. At the center of the thickness of the oxidized layer A, an elemental analysis is performed using a field emission electron probe micro analyzer (FE-EPMA) manufactured by JEOL Ltd. The conditions for the elemental analysis are: detector: 30 mm² SD, accelerating voltage: 15 kV, and measurement time period: 60 secs. The elemental analysis is made on four different cross-sections of the heat resistant ferritic steel 1. In a case where the heat resistant ferritic steel 1 is a steel pipe, elemental analysis is performed at four locations at a pitch of 45°. Among the compositions for the respective elements that are obtained, a composition from which the quantities of oxygen (O) and carbon (C) are excluded is taken as 100%. The proportion (mass%) of the total amount of Cr and Mn is calculated. The proportion (mass%) of the total content of specific oxidized layer forming elements (Mo, Ta, W and Re) is calculated. Average values of the elemental analysis values obtained at the four locations are adopted as the total content (mass%) of Cr and Mn in the oxidized layer A, and the total content (mass%) of the specific oxidized layer forming elements (Mo, Ta, W and Re) in the oxidized layer A.

[Method for producing heat resistant ferritic steel 1]

[0055] A method for producing the heat resistant ferritic steel 1 according to the present invention includes a preparation process and an oxidation treatment process. In the preparation process, the base material 2 having the aforementioned chemical composition is prepared. The base material 2 is produced from a starting material having the aforementioned chemical composition. The starting material may be a slab, a bloom or a billet produced by a continuous casting process. The starting material may also be billet produced by an ingot-making process. A heating temperature when producing the starting material is, for example, in a range of 850 to 1200°C.

[0056] For example, in the case of producing a steel pipe, the prepared starting material is charged into a reheating furnace or a soaking pit and heated. The heated starting material is subjected to hot working to produce the base material 2. The hot working is, for example, the Mannesmann process. The Mannesmann process subjects the starting material to piercing-rolling using a piercing machine to thereby form the starting material into a material pipe. Thereafter, the starting material is subjected to drawing and rolling as well as sizing using a mandrel mill and a sizing mill. The temperature for the hot working is, for example, in a range of 850 to 1200°C. By this means, the base material 2 is produced as a seamless steel pipe. A process for producing the base material 2 is not limited to the Mannesmann process, and the base material 2 may

be produced by subjecting the starting material to hot extrusion or hot forging. In addition, the base material 2 produced by hot working may be subjected to a heat treatment or may be subjected to cold working. The base material 2 may also be a steel plate. In the case of producing the base material 2 as a steel plate, the starting material is subjected to hot working to produce the base material 2 as a steel plate. The steel plate may also be processed into a steel pipe by welding to produce the base material 2 as a welded steel pipe.

[Oxidation treatment process]

[0057] An oxidation treatment is performed on the aforementioned base material 2. The oxidation treatment is performed by heating the base material 2 in a gas atmosphere containing CO, CO₂ and N₂. The CO/CO₂ ratio of the gas used for the oxidation treatment is 0.6 or more in volume ratio. By making the CO/CO₂ ratio 0.6 or more, preferential oxidation of Fe can be suppressed. As a result, the oxidized layer A containing Cr and Mn in a total amount of 20 mass% or more and also containing specific oxidized layer forming elements in a total amount of 0.5 mass% or more is formed on the surface of the base material 2. The oxidized layer A changes into the oxide film 3 after the steam oxidation treatment that is described later. Although an upper limit of the CO/CO₂ ratio is not particularly provided, an upper limit of 2.0 is preferable in consideration of operational practicability.

[0058] On the other hand, in the present embodiment, the (CO+CO₂)/N₂ ratio of the gas that is used in the oxidation treatment is set as not more than 1.0 in volume ratio. If the (CO+CO₂)/N₂ ratio is more than 1.0, the base material 2 will carburize. Therefore, Cr and Mn in the oxidized layer A will form carbides. As a result, the total content of Cr and Mn in the oxidized layer A will be less than 20%. Although a lower limit of the (CO+CO₂)/N₂ ratio is not particularly provided, a lower limit of 0.1 is preferable in consideration of operational practicability.

[0059] The temperature for the oxidation treatment is in a range of 900 to 1130°C. If the oxidation treatment temperature is less than 900°C, because outward diffusion of specific elements in the base material 2 will be slow, the total content of specific oxidized layer forming elements in the oxidized layer A will be too low. In this case, under a high-temperature steam environment, the total content of specific oxidized layer forming elements in the oxidized layer C will be too low. As a result, the thermal conductivity of the oxidized layer C will be too low. Consequently, the thermal conductivity at the surface of the ferritic heat transfer member 4 will decrease. Therefore, the heat transfer characteristics of the ferritic heat transfer member 4 will decrease. If the oxidation treatment temperature is more than 1130°C, because the diffusion of Cr and Mn will be fast, the total content of Cr and Mn in the oxidized layer A will be more than 45%. As a result, under a high-temperature steam environment, the total content of Cr and Mn in the oxidized layer C will be more than 30%. In this case, the thermal conductivity of the oxidized layer C will be too low. As a result, the heat transfer characteristics of the ferritic heat transfer member 4 will decrease. Accordingly, the oxidation treatment temperature is set in the range of 900 to 1130°C. A preferable lower limit of the oxidation treatment temperature is 920°C, and more preferably is 950°C. A preferable upper limit of the oxidation treatment temperature is 1120°C.

[0060] The oxidation treatment time period is in a range of 1 minute to 1 hour. If the oxidation treatment time period is too short, because concentration of the specific oxidized layer forming elements will occur, the total content of the specific oxidized layer forming elements in the oxidized layer A will be more than 10%. Therefore, under a high-temperature steam environment, the total content of the specific oxidized layer forming elements in the oxidized layer C will be more than 15%. As a result, the thermal conductivity at the surface of the ferritic heat transfer member 4 will be too high. On the other hand, if the oxidation treatment time period is too long, productivity will decrease. When taking productivity into consideration, a shorter oxidation treatment time period is preferable. Furthermore, if the oxidation treatment time period is too long, the total content of Cr and Mn in the oxidized layer A will be less than 20% because Fe will preferentially oxidize. Thus, the oxidation treatment time period is set in the range of 1 minute to 1 hour. Preferably, an upper limit of the oxidation treatment time period is 30 minutes, and more preferably is 20 minutes. Preferably, a lower limit of the oxidation treatment time period is 3 minutes.

[0061] A tempering treatment (low-temperature annealing) may be performed after the oxidation treatment. In addition, although the oxidation treatment may be performed on the entire base material 2, the oxidation treatment may also be performed only on a face of the base material 2 which comes in contact with high temperature steam (for example, the inner surface of a steel pipe).

[0062] The oxidation treatment may be performed once, or may be performed multiple times. After the oxidation treatment, degreasing or cleaning or the like may be performed to remove dirt or oil that adhered to the surface of the base material 2. The oxidized layer A will not be affected even if degreasing or cleaning or the like is performed. Even if degreasing or cleaning or the like is performed, it will not affect formation of the oxide film 3 thereafter.

[0063] The heat resistant ferritic steel 1 is produced by the production method described above.

[Ferritic heat transfer member 4]

[0064] The ferritic heat transfer member 4 produced according to the present invention includes a base material 2 and an

oxide film 3. The base material 2 of the ferritic heat transfer member 4 is the same as the base material of the heat resistant ferritic steel 1 that is described above. Accordingly, the chemical composition of the base material 2 of the ferritic heat transfer member 4 is the same as the chemical composition of the base material 2 of the heat resistant ferritic steel 1 that is described above. The shape of the ferritic heat transfer member 4 produced according to the present embodiment is not particularly limited. The ferritic heat transfer member 4 is, for example, a pipe, a bar or a plate material. In the case where the ferritic heat transfer member 4 has a tubular shape, the ferritic heat transfer member 4 is used, for example, as a boiler pipe. Accordingly, the ferritic heat transfer member 4 is preferably a ferritic heat-transfer pipe.

[0065] FIG. 2 is a sectional view of the ferritic heat transfer member 4 produced according to the present embodiment. Referring to FIG. 2, the ferritic heat transfer member 4 includes the base material 2 and the oxide film 3. The oxide film 3 includes the oxidized layer B and the oxidized layer C.

[Oxide film 3]

[0066] The oxide film 3 is formed on the surface of the base material 2 by performing a steam oxidation treatment on the heat resistant ferritic steel 1 having the base material 2 and the oxidized layer A. Referring to FIG. 2, the oxide film 3 is an oxide film including two layers, namely, the oxidized layer B and the oxidized layer C. Because the oxide film 3 includes the oxidized layer B, the oxide film 3 is excellent in heat transfer characteristics. Because the oxide film 3 includes the oxidized layer C, the oxide film 3 is excellent in both steam oxidation resistance properties and heat transfer characteristics. That is, the oxide film 3 is not just excellent in steam oxidation resistance properties, but is also excellent in heat transfer characteristics. The oxidized layer B is formed as the uppermost layer of the ferritic heat transfer member 4. The oxidized layer C is disposed between the oxidized layer B and the base material 2. In a case where the ferritic heat transfer member 4 is a boiler pipe, the oxidized layer B corresponds to the inner surface side of the boiler pipe, and the base material 2 corresponds to the outer surface side of the boiler pipe. In this case, the oxidized layer B comes in contact with high temperature steam.

[Oxidized layer B]

[0067] The oxidized layer B contains, in vol%, a total of 80% or more of Fe_3O_4 and Fe_2O_3 . The thermal conductivity of Fe_3O_4 and Fe_2O_3 is high. Accordingly, the thermal conductivity of the oxidized layer B is high, and heat imparted from the outside of the ferritic heat transfer member 4 is transferred to the inside of the ferritic heat transfer member 4 without being significantly decreased. Therefore, the heat transfer characteristics of the boiler can be improved. Preferably, the oxidized layer B contains, in vol%, a total of 90% or more of Fe_3O_4 and Fe_2O_3 . Preferably, the Fe_2O_3 content of the oxidized layer B is less than 20 vol%. More preferably, the oxidized layer B is composed of Fe_3O_4 .

[0068] In some cases a part of Cr and Mn contained in the base material 2 forms an oxide and is contained in the oxidized layer B. The thermal conductivity of Cr_2O_3 , in particular, is low. Therefore, the Cr_2O_3 content of the oxidized layer B is preferably low. Accordingly, the chemical composition of the oxidized layer B preferably contains, in mass%, not more than 5% of Cr and Mn in total. More preferably, the chemical composition of the oxidized layer B contains, in mass%, not more than 3% of Cr and Mn in total.

[0069] A preferable thickness of the oxidized layer B is 10 to 400 μm .

[Oxidized layer C]

[0070] The oxidized layer C is disposed between the oxidized layer B and the base material 2, and contacts the base material 2.

[0071] The chemical composition of the oxidized layer C contains Cr and Mn in a total amount in a range of more than 5% to 30%. In the oxidized layer C, Cr and Mn are present as oxides represented by the chemical formula $(\text{Fe}, \text{M})_3\text{O}_4$. In the formula, Cr and Mn are substituted for M. The oxides represented by the chemical formula $(\text{Fe}, \text{M})_3\text{O}_4$ are oxides that have a so-called spinel crystal structure that is the same as Fe_3O_4 , and in which a part of Fe is substituted with Cr and Mn. In a case where the total amount of Cr and Mn contained in the oxidized layer C is 5% or less, the proportion of Fe_3O_4 and Fe_2O_3 in the oxidized layer C cannot be kept low. In this case, the thermal conductivity of the oxidized layer C becomes too high. Consequently, a large amount of oxide scale arises on the inner surface of the ferritic heat transfer member 4. On the other hand, in a case where the total amount of Cr and Mn contained in the oxidized layer C is greater than 30%, the thermal conductivity of the oxidized layer C becomes too low. In this case, the heat transfer characteristics of the boiler decrease. Accordingly, the content of Cr and Mn in the oxidized layer C is set in a range of more than 5% to 30% in total. By this means, the thermal conductivity of the oxidized layer C can be controlled within an appropriate range while maintaining the steam oxidation resistance properties. A preferable lower limit of the total content of Cr and Mn in the oxidized layer C is 10%, and more preferably is 13%. A preferable upper limit of the total content of Cr and Mn in the oxidized layer C is 28%, and more preferably is 25%.

[0072] The oxidized layer C contains one or more types of element selected from a group consisting of Mo, Ta, W and Re in a total amount in a range of 1 to 15%. If the total content of the specific oxidized layer forming elements (Mo, Ta, W and Re) of the oxidized layer C is less than 1%, the thermal conductivity of the oxidized layer C will be too low. On the other hand, if the total content of the specific oxidized layer forming elements of the oxidized layer C is more than 15%, the thermal conductivity of the oxidized layer C will be too high. In such case, the steam oxidation resistance properties of the ferritic heat transfer member 4 will decrease. Accordingly, the total content of the specific oxidized layer forming elements in the oxidized layer C is in the range of 1 to 15%. A preferable upper limit of the total content of the specific oxidized layer forming elements (Mo, Ta, W and Re) in the oxidized layer C is 10%, and more preferably is 9%. A preferable lower limit of the total content of the specific oxidized layer forming elements (Mo, Ta, W and Re) in the oxidized layer C is 1.5%.

[0073] In addition, preferably a major portion of the oxidized layer C is oxides having the aforementioned spinel crystal structure, and the oxidized layer C contains Cr_2O_3 in an amount that is not more than 5 vol%. By suppressing formation of Cr_2O_3 which has low thermal conductivity to an amount that is not more than 5 vol% and causing the formation of oxides having a spinel crystal structure, the thermal conductivity of the oxidized layer C can be controlled to be within an appropriate range. The content of Cr_2O_3 in the oxidized layer C is preferably 5 vol% or less, and more preferably is 3 vol% or less.

[0074] The thermal conductivity of the oxidized layer C is preferably controlled within a range of 1.2 to $3.0 \text{ W} \cdot \text{m}^{-1} \cdot \text{K}^{-1}$. If the thermal conductivity of the oxidized layer C is $1.2 \text{ W} \cdot \text{m}^{-1} \cdot \text{K}^{-1}$ or more, thermal conduction from the outside of the ferritic heat transfer member 4 to the inside of the ferritic heat transfer member 4 is not inhibited, and the heat transfer characteristics of the boiler stably increase. On the other hand, if the thermal conductivity of the oxidized layer C is not more than $3.0 \text{ W} \cdot \text{m}^{-1} \cdot \text{K}^{-1}$, the heat of high temperature steam that is transferred to the surface of the base material 2 can be stably controlled. By this means, excessive heating of the surface of the base material 2 is suppressed, and an oxidation reaction at the surface of the base material 2 is suppressed. Therefore, formation of a large amount of oxide scale at the surface of the base material 2 is stably suppressed. As a result, the steam oxidation resistance properties of the ferritic heat transfer member 4 stably increase. Accordingly, the thermal conductivity of the oxidized layer C is preferably controlled within the range of 1.2 to $3.0 \text{ W} \cdot \text{m}^{-1} \cdot \text{K}^{-1}$. In this case, it is easy to improve the steam oxidation resistance properties of the ferritic heat transfer member 4 without loss of the heat transfer characteristics. In the oxidized layer C, a preferable lower limit of the thermal conductivity is $1.3 \text{ W} \cdot \text{m}^{-1} \cdot \text{K}^{-1}$, and more preferably is $1.4 \text{ W} \cdot \text{m}^{-1} \cdot \text{K}^{-1}$. In the oxidized layer C, a preferable upper limit of the thermal conductivity is $2.8 \text{ W} \cdot \text{m}^{-1} \cdot \text{K}^{-1}$, and more preferably is $2.5 \text{ W} \cdot \text{m}^{-1} \cdot \text{K}^{-1}$.

[0075] The volume ratio of Fe_3O_4 and Fe_2O_3 in the oxidized layer B is measured by the following method. The ferritic heat transfer member 4 that has undergone a steam oxidation treatment which is described later is cut perpendicularly to the surface thereof. In a case where the ferritic heat transfer member 4 is a pipe, the ferritic heat transfer member 4 is cut perpendicularly to the axial direction of the pipe. At a cross-section (observation surface) including the oxidized layer B, a chemical composition analysis of the oxidized layer B is performed using a field emission electron probe micro analyzer (FE-EPMA) manufactured by JEOL Ltd. The conditions for the chemical composition analysis are: detector: $30 \text{ mm}^2 \text{ SD}$, accelerating voltage: 15 kV, and measurement time period: 60 secs. By means of the chemical composition analysis, regions in which Fe and O (oxygen) are detected and Cr is not detected are identified. Next, it is confirmed by means of the chemical composition analysis that all of the identified regions have Fe_3O_4 or Fe_2O_3 . Next, the strength of Fe in the oxidized layer B of the observation surface is subjected to binarization processing. At this time, the maximum strength of the grayscale extraction objects is set as 1/10 or more. It is confirmed that all regions other than the identified regions (regions confirmed as having Fe_3O_4 and Fe_2O_3) are included in black regions after binarization. After the binarization processing, the area fraction of black regions in the oxidized layer B of the observation surface is determined, and the resulting value is subtracted from 100%. The obtained area fraction is taken as the volume ratio of Fe_3O_4 and Fe_2O_3 in the oxidized layer B.

[0076] The volume ratio of Cr_2O_3 in the oxidized layer C is measured by the following method. The ferritic heat transfer member 4 that has undergone a steam oxidation treatment which is described later is cut perpendicularly to the surface thereof. In a case where the ferritic heat transfer member 4 is a pipe, the ferritic heat transfer member 4 is cut perpendicularly to the axial direction of the pipe. SEM is used to observe a cross-section (observation surface) including the oxidized layer B and the oxidized layer C, to thereby identify the oxidized layer C. In the SEM observation, the oxidized layer B and the oxidized layer C are distinguished from each other by means of a contrast difference obtained with an SEM backscattered electron image (BSE). The contrast of the oxidized layer B is brighter than the contrast of the oxidized layer C. The volume ratio of Cr_2O_3 in the oxidized layer C is determined by a similar method as the method used for determining the volume ratio of Fe_3O_4 and Fe_2O_3 in the oxidized layer B. That is, at a cross-section (observation surface) including the oxidized layer C, a chemical composition analysis is performed using a field emission electron probe micro analyzer (FE-EPMA) manufactured by JEOL Ltd. The conditions for the chemical composition analysis are: detector: $30 \text{ mm}^2 \text{ SD}$, accelerating voltage: 15 kV, and measurement time period: 60 secs. By means of the chemical composition analysis, regions in which Cr and O (oxygen) are detected and Fe is not detected are identified. Next, it is confirmed by means of the chemical composition analysis that all of the identified regions have Cr_2O_3 . Next, the strength of Cr in the oxidized layer C of the observation surface is subjected to binarization processing. At this time, the maximum strength of the grayscale

extraction objects is set as 1/10 or more. It is confirmed that all regions other than the identified regions (regions confirmed as having Cr_2O_3) are included in black regions after binarization. The area fraction of black regions after binarization processing of the observation surface is determined, and the resulting value is subtracted from 100%. The obtained area fraction is taken as the volume ratio of Cr_2O_3 in the oxidized layer C.

[0077] The total content of Cr and Mn and the total content of the specific oxidized layer forming elements (Mo, Ta, W and Re) in the oxidized layer B and the oxidized layer C are determined by a similar method as the method used with respect to the oxidized layer A. In the SEM observation, the oxidized layer B and the oxidized layer C are distinguished from each other by means of a contrast difference obtained with an SEM backscattered electron image (BSE). The contrast of the oxidized layer B is brighter than the contrast of the oxidized layer C. Under the same conditions as used in the case of the oxidized layer A, an elemental analysis is performed at the center of the thickness of the oxidized layer B and the center of the thickness of the oxidized layer C. In a similar manner as in the case of the oxidized layer A, the total content (mass%) of Cr and Mn and the total content (mass%) of the specific oxidized layer forming elements (Mo, Ta, W and Re) are determined based on the compositions of the respective elements that are obtained.

[0078] The thermal conductivity of the oxidized layer C is determined by the following method. After mechanically removing the oxidized layer B of the ferritic heat transfer member 4, the bulk density, specific heat and thermal diffusivity of the oxidized layer C including the base material 2 are measured. Next, after mechanically removing the oxidized layer C, the bulk density, specific heat and thermal diffusivity of the base material 2 are measured in a similar manner. The thermal conductivity κ can be determined by converting the differences between the respective measurement values to measurement values of the oxidized layer C, and substituting the resulting measurement values into the following formula.

$$\kappa = \rho \times C_p \times D$$

[0079] Where, the bulk density is substituted for ρ , the specific heat is substituted for C_p , and the thermal diffusivity is substituted for D .

[0080] A preferable lower limit of the thickness of the oxidized layer C is 10 μm .

[Thickness of oxide film 3]

[0081] Although the thickness of the oxide film 3 is not particularly limited, a thin thickness is preferable. If the oxide film 3 is thin, the heat transfer characteristics of the ferritic heat transfer member 4 increase. Therefore, the heat transfer characteristics of the boiler can be improved. When the ferritic heat transfer member 4 is used for a long time period, the oxide film 3 thickens. The oxide film 3 also thickens in a case where the temperature for a steam oxidation treatment of the ferritic heat transfer member 4 is high. When an oxidation treatment and a steam oxidation treatment that are described later are performed, the oxidized layer B and the oxidized layer C are formed to almost the same thickness. Accordingly, in a case where the oxidized layer C is thin, the oxide film 3 will also be thin.

[0082] The thicknesses of the oxidized layer B and the oxidized layer C are determined by the same method as the method used for determining the thickness of the oxidized layer A. The ferritic heat transfer member 4 that has undergone the steam oxidation treatment which is described later is prepared. The prepared ferritic heat transfer member 4 is observed by means of SEM by the same method as the method used for determining the thickness of the oxidized layer A. The oxidized layer B and the oxidized layer C are distinguished from each other by means of a contrast difference obtained with an SEM backscattered electron image. The contrast of the oxidized layer B is darker than the contrast of the oxidized layer C. The respective thicknesses of the oxidized layer B and the oxidized layer C are determined by the same method as the method used for determining the thickness of the oxidized layer A.

[Method for producing ferritic heat transfer member 4]

[0083] A method for producing ferritic heat transfer member 4 according to the present invention includes a steam oxidation treatment process.

[Steam oxidation treatment process]

[0084] A steam oxidation treatment is performed on the heat resistant ferritic steel that underwent the aforementioned oxidation treatment. The steam oxidation treatment is performed by exposing the heat resistant ferritic steel to steam at a temperature in a range from 500 to 650°C. An upper limit of the time period of the steam oxidation treatment is not particularly limited as long as the treatment time period is not less than 100 hours. By performing the steam oxidation treatment, the oxidized layer A changes to the oxide film 3 that includes the oxidized layer B and the oxidized layer C. By this means, the oxide film 3 that includes the oxidized layer B and the oxidized layer C is formed on the base material 2.

[0085] The ferritic heat transfer member 4 is produced by the above processes. A similar effect as the effect obtained in a case of performing the steam oxidation treatment is obtained by exposing the heat resistant ferritic steel 1 under a high-temperature steam environment. That is, if the heat resistant ferritic steel 1 is exposed under a high-temperature steam environment for not less than 100 hours, the ferritic heat transfer member 4 can be produced even without performing a steam oxidation treatment, this method of producing the ferritic heat transfer being outside of the claimed invention.

EXAMPLES

[0086] Respective cast pieces having the chemical compositions shown in Table 1 were produced, and an oxidation treatment and a steam oxidation treatment were performed under the conditions illustrated in Table 2. Specifically, ingots having the chemical compositions shown in Table 1 were prepared. Each of the obtained ingots was subjected to hot rolling and cold rolling to produce a steel plate, which was adopted as the base material. A test specimen was prepared from each of the obtained base materials, and each test specimen was subjected to an oxidation treatment under the conditions shown in Table 2.

[Table 1]

[0087]

TABLE 1

| Steel No. | Chemical Composition (mass%; balance is Fe and impurities) | | | | | | | | | |
|-----------|--|------|------|-------|--------|------|------|--------|--------------|-----------------------|
| | C | Si | Mn | P | S | Cr | N | sol.Al | Mo,Ta,W,Re | Others |
| 1 | 0.07 | 0.20 | 0.33 | 0.013 | 0.001 | 11.6 | 0.02 | 0.01 | 1.6W | - |
| 2 | 0.11 | 0.25 | 0.40 | 0.015 | <0.001 | 8.9 | 0.04 | 0.006 | 0.9Mo | 0.2V |
| 3 | 0.08 | 0.15 | 0.48 | 0.009 | 0.002 | 9.0 | 0.03 | 0.02 | 0.5Mo, 1.9W | 0.06Nb, 0.004B |
| 4 | 0.08 | 0.25 | 0.49 | 0.011 | 0.004 | 9.1 | 0.01 | 0.02 | 2.8Ta | 2.6Co, 0.05Zr, 0.02Ca |
| 5 | 0.07 | 0.11 | 0.16 | 0.013 | 0.002 | 8.8 | 0.04 | 0.01 | 2.2Re | 0.02Nd |
| 6 | 0.08 | 0.18 | 0.56 | 0.011 | 0.002 | 9.2 | 0.03 | 0.02 | 0.8Mo | 0.25Ti, 0.01Mg |
| 7 | 0.07 | 0.14 | 0.51 | 0.013 | 0.002 | 8.9 | 0.04 | 0.01 | 2.0W | 0.3Hf |
| 8 | 0.05 | 0.08 | 0.21 | 0.014 | 0.001 | 9.1 | 0.03 | 0.03 | 0.5Ta, 4.3Re | 0.3Cu, 1.2Ni, 0.03Ce |
| 9 | 0.12 | 0.31 | 0.55 | 0.014 | 0.002 | 8.9 | 0.03 | 0.02 | 0.6Mo, 1.6W | 0.05Nb, 0.03Nd |
| 10 | 0.11 | 0.32 | 0.41 | 0.011 | 0.003 | 9.4 | 0.04 | 0.01 | - | - |
| 11 | 0.11 | 0.16 | 0.45 | 0.013 | 0.001 | 15.4 | 0.02 | 0.02 | 1.5Mo | 1.6Cu, 1.3Ni |
| 12 | 0.15 | 0.25 | 0.64 | 0.009 | 0.002 | 5.2 | 0.04 | 0.02 | 0.9Mo | 0.2V |
| 13 | 0.09 | 0.33 | 0.32 | 0.013 | 0.001 | 9.6 | 0.03 | 0.01 | 8.1W | 0.03La, 0.003B |

[Table 2]

[0088]

TABLE 2

| Test No. | Steel No. | Oxidation Treatment | | | | Oxidized Layer A | | | Steam Oxidation Treatment | | Oxidized Layer B | | Oxidized Layer C | | | Performance Evaluation | |
|----------|-----------|---------------------|-------------|---------------------------|--|------------------|-------------------------------|------------------------------------|---------------------------|--------------|---|-------------------------------|---|-------------------------------|------------------------------------|--|------------------------------------|
| | | Temperature (°C) | Time (mins) | CO/C-O ₂ Ratio | (CO+CO ₂)/N ₂ Ratio | Thickness (μm) | Total Amount of Cr+Mn (mass%) | Total Amount of Mo+Ta+W+Re (mass%) | Temperature (°C) | Time (hours) | Fe ₃ O ₄ Volume Ratio (%) | Total Amount of Cr+Mn (mass%) | Cr ₂ O ₃ Volume Ratio (%) | Total Amount of Cr+Mn (mass%) | Total Amount of Mo+Ta+W+Re (mass%) | Thermal Conductivity of Oxidized Layer C (W·m ⁻¹ ·K ⁻¹) | Thickness of Oxidized Layer C (μm) |
| 1 | 1 | 1050 | 10 | 1.2 | 0.2 | 2.3 | 41.7 | 2.0 | 560 | 5000 | Fe ₃ O ₄ (96) | 1.2 | 4.7 | 25.6 | 2.1 | 1.3 | 23.5 |
| 2 | 1 | 1150 | 1 | 0.8 | 0.5 | 12.5 | 49.2 | 2.5 | 560 | 5000 | Fe ₃ O ₄ (97) | 4.2 | 8.5 | 35.4 | 3.3 | 1.0 | 13.2 |
| 3 | 2 | 1060 | 20 | 1.0 | 0.6 | 4.6 | 35.9 | 1.3 | 600 | 5000 | Fe ₃ O ₄ (99) | <0.1 | <0.1 | 20.4 | 2.0 | 1.5 | 34.2 |
| 4 | 2 | - | - | - | - | - | - | - | 600 | 5000 | Fe ₃ O ₄ (85) | 6.5 | 10.2 | 26.8 | 0.8 | 1.0 | 20.9 |
| 5 | 2 | 850 | 15 | 1.2 | 0.3 | 0.2 | 32.2 | 0.4 | 600 | 5000 | Fe ₃ O ₄ (100) | <0.1 | <0.1 | 19.6 | 0.4 | 1.0 | 25.4 |
| 6 | 2 | 1050 | 12 | 1.3 | 0.8 | 2.6 | 30.5 | 1.8 | 600 | 5000 | Fe ₃ O ₄ (94) | 0.3 | <0.1 | 20.7 | 3.3 | 1.7 | 37.9 |
| 7 | 2 | 1070 | 20 | 0.4 | 0.2 | 4.1 | 8.2 | 0.7 | 630 | 5000 | Fe ₂ O ₃ +Fe ₃ O ₄ (65) | <0.1 | <0.1 | 3.7 | 3.2 | 3.4 | 77.8 |
| 8 | 2 | 1080 | 80 | 1.6 | 0.4 | 6.9 | 6.5 | 1.8 | 600 | 5000 | Fe ₃ O ₄ (100) | <0.1 | <0.1 | 3.2 | 3.1 | 3.2 | 72.8 |
| 9 | 3 | 1010 | 2 | 1.6 | 0.3 | 1.1 | 22.8 | 8.7 | 630 | 5000 | Fe ₃ O ₄ (97) | <0.1 | <0.1 | 12.4 | 13.5 | 2.5 | 52.6 |
| 10 | 3 | 1130 | 30 | 0.7 | 0.2 | 23.5 | 34.5 | 0.7 | 560 | 5000 | Fe ₃ O ₄ (100) | <0.1 | 1.1 | 27.4 | 1.1 | 1.2 | 31.7 |
| 11 | 3 | 1040 | 15 | 0.9 | 0.5 | 1.9 | 34.2 | 3.4 | 600 | 5000 | Fe ₃ O ₄ (98) | <0.1 | <0.1 | 19.1 | 6.0 | 2.0 | 34.2 |
| 12 | 4 | 960 | 20 | 1.2 | 0.3 | 1.3 | 25.6 | 5.6 | 560 | 5000 | Fe ₃ O ₄ (100) | <0.1 | <0.1 | 18.3 | 13.5 | 2.7 | 43.5 |
| 13 | 5 | 1120 | 5 | 0.9 | 0.3 | 3.2 | 28.9 | 4.3 | 560 | 5000 | Fe ₃ O ₄ (93) | 0.8 | 2.5 | 24.1 | 4.8 | 1.7 | 32.8 |
| 14 | 6 | 1060 | 10 | 1.0 | 0.2 | 2.4 | 28.5 | 0.9 | 560 | 5000 | Fe ₃ O ₄ (95) | <0.1 | <0.1 | 21.0 | 1.9 | 1.4 | 22.6 |
| 15 | 7 | 1060 | 10 | 1.0 | 0.7 | 3.5 | 27.6 | 2.6 | 560 | 5000 | Fe ₃ O ₄ (98) | <0.1 | <0.1 | 19.3 | 5.8 | 2.0 | 34.6 |
| 16 | 8 | 1080 | 0.5 | 1.2 | 0.4 | 0.5 | 24.2 | 12.9 | 560 | 5000 | Fe ₃ O ₄ (100) | <0.1 | <0.1 | 11.5 | 17.2 | 3.5 | 65.4 |
| 17 | 9 | 1050 | 12 | 1.1 | 0.4 | 1.8 | 30.4 | 1.6 | 630 | 5000 | Fe ₃ O ₄ (100) | <0.1 | <0.1 | 22.4 | 2.5 | 1.5 | 25.2 |
| 18 | 10 | 1050 | 10 | 1.1 | 0.3 | 4.5 | 28.6 | <0.1 | 560 | 5000 | Fe ₃ O ₄ (100) | <0.1 | 3.8 | 26.4 | <0.1 | 1.1 | 24.3 |
| 19 | 11 | 1040 | 15 | 1.1 | 0.4 | 1.3 | 47.6 | 2.7 | 600 | 5000 | Fe ₃ O ₄ (95) | 0.4 | 34.2 | 56.7 | 3.4 | 0.8 | 18.9 |
| 20 | 12 | 1060 | 12 | 1.0 | 0.3 | 13.2 | 16.3 | 2.1 | 600 | 5000 | Fe ₃ O ₄ (97) | <0.1 | <0.1 | 1.3 | 2.2 | 3.3 | 82.4 |

(continued)

| Test No. | Steel No. | Oxidation Treatment | | | | Oxidized Layer A | | Steam Oxidation Treatment | | Oxidized Layer B | | Oxidized Layer C | | | Performance Evaluation | |
|----------|-----------|---------------------|-------------|---------------------------|---|------------------|-------------------------------|------------------------------------|------------------|------------------|---|-------------------------------|---|------------------------------------|--|------------------------------------|
| | | Temperature (°C) | Time (mins) | CO/C-O ₂ Ratio | (CO+CO ₂)/-N ₂ Ratio | Thickness (μm) | Total Amount of Cr+Mn (mass%) | Total Amount of Mo+Ta+W+Re (mass%) | Temperature (°C) | Time (hours) | Fe ₃ O ₄ Volume Ratio (%) | Total Amount of Cr+Mn (mass%) | Cr ₂ O ₃ Volume Ratio (%) | Total Amount of Mo+Ta+W+Re (mass%) | Thermal Conductivity of Oxidized Layer C (W·m ⁻¹ ·K ⁻¹) | Thickness of Oxidized Layer C (μm) |
| 21 | 13 | 1060 | 15 | 1.0 | 0.3 | 2.9 | 22.9 | 13.9 | 580 | 5000 | Fe ₃ O ₄ (95) | 13.2 | <0.1 | 18.6 | 3.8 | 72.5 |
| 22 | 2 | 1060 | 20 | 1.0 | 1.3 | 2.4 | 10.6 | 0.7 | 600 | 5000 | Fe ₃ O ₄ (97) | 4.6 | <0.1 | 1.2 | 3.4 | 70.1 |

[Oxidized layer A thickness measurement test]

[0089] The thickness of the oxidized layer A of each test specimen was determined by the method described above. The results are shown in Table 2.

[Oxidized layer A metallic element content measurement test]

[0090] The content of each metallic element in a cross-section of each test specimen was determined by the method described above. For the oxidized layer A, the total content (mass%) of Cr and Mn, and the total content (mass%) of Mo, Ta, W and Re were determined. The results are shown in Table 2.

[0091] Each test specimen was subjected to a steam oxidation treatment under the conditions in Table 2. Each of the obtained test specimens was subjected to the following measurement tests.

[Tests to measure Fe_3O_4 and Fe_2O_3 volume ratio in oxidized layer B, and Cr_2O_3 volume ratio in oxidized layer C]

[0092] The total volume ratio of Fe_3O_4 and Fe_2O_3 in a cross-section (that is, a cross-section of the oxidized layer B) of each test specimen was determined by the method described above. Furthermore, the volume ratio of Cr_2O_3 in a cross-section of the oxidized layer C was determined. The results are shown in Table 2.

[Metallic element content measurement test]

[0093] The content of each metallic element in a cross-section of each test specimen was determined by the method described above. With respect to the oxidized layer B, the total content (mass%) of Cr and Mn was determined. The results are shown in Table 2. With respect to the oxidized layer C, the total content (mass%) of Cr and Mn, and the total content (mass%) of Mo, Ta, W and Re were determined. The results are shown in Table 2.

[Oxidized layer C thermal conductivity measurement test]

[0094] The thermal conductivity of the oxidized layer C of each test specimen was determined by the method described above. The results are shown in Table 2.

[Oxidized layer C thickness measurement test]

[0095] The thickness of the oxidized layer C of each test specimen was determined by the method described above. The results are shown in Table 2.

[Evaluation results]

[0096] Referring to Table 1 and Table 2, the production conditions of the steels of Test Nos. 1, 3, 6, 9, 11 to 13, 15 and 17 were appropriate. Therefore, the oxidized layer A of each of these Test Nos. contained Cr and Mn in a total amount in a range of 20 to 45%, and contained one or more types of element selected from the group consisting of Mo, Ta, W and Re in a total amount in a range of 1 to 10%. As a result, the oxidized layer B formed on the base material after the steam oxidation treatment contained Fe_3O_4 and Fe_2O_3 in a total amount of 80% or more in vol%. In addition, the total content of Cr+Mn in the oxidized layer C was in a range of more than 5% to 30%, and the total content of the specific oxidized layer forming elements was in a range of 1 to 15%. As a result, the thermal conductivity of the oxidized layer C was within the range of 1.2 to $3.0 \text{ W} \cdot \text{m}^{-1} \cdot \text{K}^{-1}$, and thus exhibited excellent thermal conductivity. In addition, the thickness of the oxidized layer C was not more than $60 \mu\text{m}$, and thus exhibited excellent steam oxidation resistance properties.

[0097] In contrast, in Test No. 2, the oxidation treatment temperature was too high, and consequently the total amount of Cr and Mn in the oxidized layer A was more than 45%. Therefore, the Cr+Mn amount in the oxidized layer C was more than 30%, and the thermal conductivity was less than $1.2 \text{ W} \cdot \text{m}^{-1} \cdot \text{K}^{-1}$.

[0098] In Test No. 4, although the chemical composition was appropriate, an oxidation treatment was not performed, and the oxidized layer A was not formed. Consequently, the thermal conductivity of the oxidized layer C was less than $1.2 \text{ W} \cdot \text{m}^{-1} \cdot \text{K}^{-1}$. It is considered that because the total amount of the specific oxidized layer forming elements in the oxidized layer C was less than 1%, the thermal conductivity was decreased.

[0099] In Test No. 5, because the oxidation treatment temperature was too low, the total amount of the specific oxidized layer forming elements in the oxidized layer A was 0.4%, which was too low. Consequently, the total amount of the specific oxidized layer forming elements in the oxidized layer C was less than 1.0%. As a result, the thermal conductivity of the oxidized layer C was $1.0 \text{ W} \cdot \text{m}^{-1} \cdot \text{K}^{-1}$, which was too low.

[0100] In Test No. 7, the CO/CO_2 ratio in the oxidation treatment was less than 0.6. Therefore, the total content of Cr and Mn in the oxidized layer A was less than 20%. Consequently, the total content of Cr and Mn in the oxidized layer C was not more than 5%, and the thermal conductivity of the oxidized layer C was more than $3.0 \text{ W}\cdot\text{m}^{-1}\cdot\text{K}^{-1}$. Further, because the Fe_3O_4 volume ratio in the oxidized layer B was less than 80%, the inward flux of oxygen was large and growth of the oxidized layer C was promoted, and the thickness of the oxidized layer C was more than $60 \mu\text{m}$.

[0101] In Test No. 8, although the chemical composition was appropriate, the oxidation treatment time period was too long. Therefore, the total content of Cr and Mn in the oxidized layer A was 6.5%, which was too low. Consequently, the total content of Cr and Mn in the oxidized layer C was 3.2%, which was too low. As a result, the thermal conductivity of the oxidized layer C was $3.2 \text{ W}\cdot\text{m}^{-1}\cdot\text{K}^{-1}$, which was too high. Furthermore, in Test No. 8, the thickness of the oxidized layer C was more than $60 \mu\text{m}$. It is considered that this was because the thermal conductivity of the oxidized layer C was too high.

[0102] In Test No. 16, the oxidation treatment time period was too short. Therefore, the total content of the specific oxidized layer forming elements in the oxidized layer A was 12.9%, which was too high. Consequently, the total content of the specific oxidized layer forming elements in the oxidized layer C was 17.2%, which was too high. As a result, the thermal conductivity of the oxidized layer C was $3.5 \text{ W}\cdot\text{m}^{-1}\cdot\text{K}^{-1}$, which was too high. Furthermore, in Test No. 16, the thickness of the oxidized layer C was more than $60 \mu\text{m}$. It is considered that this was because the thermal conductivity of the oxidized layer C was too high.

[0103] In Test No. 18, the steel did not contain any of the specific oxidized layer forming elements. Therefore, even though the production method was appropriate, the total content of the specific oxidized layer forming elements in the oxidized layer A was less than 0.1%, which was too low. Consequently, the total content of the specific oxidized layer forming elements in the oxidized layer C was less than 0.1%, which was too low. As a result, the thermal conductivity of the oxidized layer C was $1.1 \text{ W}\cdot\text{m}^{-1}\cdot\text{K}^{-1}$, which was too low.

[0104] In Test No. 19, the Cr content was too high. Therefore, even though the production method was appropriate, the total content of Cr and Mn in the oxidized layer A was 47.6%, which was too high. Consequently, the total content of Cr and Mn in the oxidized layer C was 56.7%, which was too high. As a result, the thermal conductivity of the oxidized layer C was $0.8 \text{ W}\cdot\text{m}^{-1}\cdot\text{K}^{-1}$, which was too low.

[0105] In Test No. 20, the Cr content was too low. Therefore, even though the production method was appropriate, the total content of Cr and Mn in the oxidized layer A was 16.3%, which was too low. Consequently, the total content of Cr and Mn in the oxidized layer C was 1.3%, which was too low. As a result, the thermal conductivity of the oxidized layer C was $3.3 \text{ W}\cdot\text{m}^{-1}\cdot\text{K}^{-1}$, which was too high. Furthermore, in Test No. 20, the thickness of the oxidized layer C was more than $60 \mu\text{m}$. It is considered that this was because the thermal conductivity of the oxidized layer C was too high.

[0106] In Test No. 21, the content of the specific oxidized layer forming elements was too high. Therefore, the total content of the specific oxidized layer forming elements in the oxidized layer A was 13.9%, which was too high. Consequently, the total content of the specific oxidized layer forming elements in the oxidized layer C was 18.6%, which was too high. As a result, the thermal conductivity of the oxidized layer C was $3.8 \text{ W}\cdot\text{m}^{-1}\cdot\text{K}^{-1}$, which was too high. Furthermore, in Test No. 21 the thickness of the oxidized layer C was more than $60 \mu\text{m}$. It is considered that this was because the thermal conductivity of the oxidized layer C was too high.

[0107] In Test No. 22, the $(\text{CO}+\text{CO}_2)/\text{N}_2$ ratio was more than 1.0. Therefore, the total content of Cr and Mn in the oxidized layer A was 10.6%, which was too low. Consequently, the total content of Cr and Mn in the oxidized layer C was 4.6%, which was too low. As a result, the thermal conductivity of the oxidized layer C was $3.4 \text{ W}\cdot\text{m}^{-1}\cdot\text{K}^{-1}$, which was too high. Furthermore, in Test No. 22, the thickness of the oxidized layer C was more than $60 \mu\text{m}$. It is considered that this was because the thermal conductivity of the oxidized layer C was too high.

[0108] An embodiment of the present invention has been described above. However, the foregoing embodiment is merely an example for implementing the present invention. Accordingly, the present invention is not limited to the above embodiment, and the above embodiment can be appropriately modified within a range that does not deviate from the claims.

REFERENCE SIGNS LIST

[0109]

- 1 Heat Resistant Ferritic Steel
- 2 Base Material
- 3 Oxide Film
- 4 Ferritic Heat Transfer Member
- A Oxidized Layer A
- B Oxidized Layer B
- C Oxidized Layer C

Claims

1. A method of producing heat resistant ferritic steel, wherein the heat resistant ferritic stainless steel comprises:

a base material, and
an oxidized layer A on a surface of the base material;
wherein:
the base material has a chemical composition consisting of, in mass%:

C: 0.01 to 0.3%,
Si: 0.01 to 2.0%,
Mn: 0.01 to 2.0%,
P: 0.10% or less,
S: 0.03% or less,
Cr: 7.0 to 14.0%,
N: 0.005 to 0.15%,
sol. Al: 0.001 to 0.3%,
one or more types of element selected from a group consisting of Mo: 0 to 5.0%, Ta: 0 to 5.0%, W: 0 to 5.0%
and Re: 0 to 5.0%; 0.5 to 7.0% in total,
one or more types of element selected from a group consisting of Cu: 0.005 to 5.0%, Ni: 0.005 to 5.0%, and
Co: 0.005 to 5.0%,
Ti: 0 to 1.0%,
V: 0 to 1.0%,
Nb: 0 to 1.0%,
Hf: 0 to 1.0%,
Ca: 0 to 0.1%,
Mg: 0 to 0.1%,
Zr: 0 to 0.1%,
B: 0 to 0.1%, and
rare earth metal: 0 to 0.1%,
with the balance being Fe and impurities;
wherein the rare earth metal is one or more types of element selected from the elements with atomic numbers
39, 57 to 71 and 89 to 103, and
the oxidized layer A has a chemical composition excluding oxygen and carbon containing, in mass%, as
measured according to the method described in the description:

Cr and Mn: 20 to 45% in total, and
one or more types of element selected from a group consisting of Mo, Ta, W and Re: 0.5 to 10% in total,
wherein the method includes a preparation process and an oxidation treatment process,
wherein in the preparation process, the base material having the aforementioned chemical composition
is prepared, and
the oxidation treatment process is performed on the aforementioned base material prepared in the
preparation process by heating the base material prepared in the preparation process in a gas atmo-
sphere containing CO, CO₂ and N₂, wherein the CO/CO₂ ratio of the gas used for the oxidation treatment
is 0.6 or more in volume ratio and the (CO+CO₂)/N₂ ratio of the gas used in the oxidation treatment is set
at no more than 1.0 in volume ratio; and
the temperature for the oxidation treatment process is in a range of 900 to 1130°C and an oxidation
treatment time period is in a range of 1 minute to 1 hour.

2. A method for producing a ferritic heat transfer member, the method comprising the method of producing heat resistant
ferritic steel of claim 1, and further comprising performing a steam oxidation treatment by exposing the heat resistant
ferritic steel to steam at a temperature in a range from 500 to 650°C for not less than 100 hours, wherein the ferritic heat
transfer member, comprises:
a base material having a chemical composition consisting of, in mass %:

C: 0.01 to 0.3%,
Si: 0.01 to 2.0%,
Mn: 0.01 to 2.0%,

P: 0.10% or less,
 S: 0.03% or less,
 Cr: 7.0 to 14.0%,
 N: 0.005 to 0.15%,
 5 sol. Al: 0.001 to 0.3%,
 one or more types of element selected from a group consisting of Mo: 0 to 5.0%, Ta: 0 to 5.0%, W: 0 to 5.0% and
 Re: 0 to 5.0%: 0.5 to 7.0% in total,
 one or more types of element selected from a group consisting of Cu: 0.005 to 5.0%, Ni: 0.005 to 5.0%, and Co:
 10 0.005 to 5.0%,
 Ti: 0 to 1.0%,
 V: 0 to 1.0%,
 Nb: 0 to 1.0%,
 Hf: 0 to 1.0%,
 Ca: 0 to 0.1%,
 15 Mg: 0 to 0.1%,
 Zr: 0 to 0.1%,
 B: 0 to 0.1%, and
 rare earth metal: 0 to 0.1%,
 with the balance being Fe and impurities;
 20 wherein the rare earth metal is one or more types of element selected from the elements with atomic numbers 39,
 57 to 71 and 89 to 103, and
 an oxide film on a surface of the base material;
 wherein:
 the oxide film comprises:

25 an oxidized layer B containing Fe_3O_4 and Fe_2O_3 in a total amount of 80% or more in vol%, as measured
 according to the method described in the description, and
 an oxidized layer C that is disposed between the oxidized layer B and the base material; the oxidized layer C
 contacts the base material; and
 30 a chemical composition excluding oxygen and carbon of the oxidized layer C contains, in mass%, as
 measured according to the method described in the description:

35 Cr and Mn: more than 5% to 30% in total, and
 one or more types of element selected from a group consisting of Mo, Ta, W and Re: 1 to 15% in total,
 wherein in the oxidized layer C, Cr and Mn are present as oxides represented by the chemical formula
 $(\text{Fe}, \text{M})_3\text{O}_4$ in which Cr and Mn are substituted for M and the oxides represented by the chemical formula
 $(\text{Fe}, \text{M})_3\text{O}_4$ are oxides that have a so-called spinel crystal structure that is the same as Fe_3O_4 , and in
 which a part of Fe is substituted with Cr and Mn.

Patentansprüche

1. Verfahren zur Herstellung von hitzebeständigem ferritischem Stahl, wobei der hitzebeständige ferritische Edelstahl
 Folgendes umfasst:

45 ein Basismaterial, und
 eine oxidierte Schicht A auf einer Oberfläche des Basismaterials;
 wobei:
 das Basismaterial eine chemische Zusammensetzung aufweist, die in Massenprozent besteht aus:

50 C: 0,01 bis 0,3 %,
 Si: 0,01 bis 2,0 %,
 Mn: 0,01 bis 2,0 %,
 55 P: 0,10 % oder weniger,
 S: 0,03 % oder weniger,
 Cr: 7,0 bis 14,0 %,
 N: 0,005 bis 0,15 %,
 löslichem Al: 0,001 bis 0,3 %,

einer oder mehreren Elementarten, ausgewählt aus einer Gruppe bestehend aus Mo: 0 bis 5,0 %, Ta: 0 bis 5,0 %, W: 0 bis 5,0 % und Re: 0 bis 5,0 %: insgesamt 0,5 bis 7,0 %,
einer oder mehreren Elementarten, ausgewählt aus einer Gruppe bestehend aus Cu: 0,005 bis 5,0 %, Ni: 0,005 bis 5,0 % und Co: 0,005 bis 5,0 %,

Ti: 0 bis 1,0 %,
V: 0 bis 1,0 %,
Nb: 0 bis 1,0 %,
Hf: 0 bis 1,0 %,
Ca: 0 bis 0,1 %,
Mg: 0 bis 0,1 %,
Zr: 0 bis 0,1 %,
B: 0 bis 0,1 % und
Seltenerdmetall: 0 bis 0,1 %,

wobei der Rest Fe und Verunreinigungen ist;

wobei das Seltenerdmetall eine oder mehrere Elementarten ist, die ausgewählt sind aus den Elementen mit den Ordnungszahlen 39, 57 bis 71 und 89 bis 103, und
die oxidierte Schicht A eine chemische Zusammensetzung aufweist, die Sauerstoff und Kohlenstoff ausschließt und in Massenprozent, gemessen gemäß dem in der Beschreibung beschriebenen Verfahren, Folgendes enthält:

Cr und Mn: insgesamt 20 bis 45 %, und
eine oder mehrere Elementarten, ausgewählt aus einer Gruppe bestehend aus Mo, Ta, W und Re: insgesamt 0,5 bis 10 %,
wobei das Verfahren einen Herstellungsprozess und einen Oxidationsbehandlungsprozess umfasst, wobei im Herstellungsprozess das Basismaterial mit der oben genannten chemischen Zusammensetzung hergestellt wird, und
der Oxidationsbehandlungsprozess an dem oben genannten Basismaterial, das in dem Herstellungsprozess hergestellt wurde, durchgeführt wird, indem das in dem Herstellungsprozess hergestellte Basismaterial in einer Gasatmosphäre, die CO, CO₂ und N₂ enthält, erhitzt wird, wobei das CO/CO₂-Verhältnis des für die Oxidationsbehandlung verwendeten Gases 0,6 oder mehr im Volumenverhältnis beträgt und das (CO+CO₂)/N₂-Verhältnis des in der Oxidationsbehandlung verwendeten Gases auf nicht mehr als 1,0 im Volumenverhältnis eingestellt ist; und
die Temperatur für den Oxidationsbehandlungsprozess in einem Bereich von 900 bis 1130 °C liegt und eine Oxidationsbehandlungszeitdauer in einem Bereich von 1 Minute bis 1 Stunde liegt.

2. Verfahren zur Herstellung eines ferritischen Wärmeübertragungselements, wobei das Verfahren das Verfahren zur Herstellung von hitzebeständigem ferritischem Stahl nach Anspruch 1 umfasst und ferner die Durchführung einer Dampfoxidationsbehandlung umfasst, indem der hitzebeständige ferritische Stahl Dampf bei einer Temperatur im Bereich von 500 bis 650 °C für nicht weniger als 100 Stunden ausgesetzt wird, wobei das ferritische Wärmeübertragungselement Folgendes umfasst:
ein Basismaterial mit einer chemischen Zusammensetzung, die in Massenprozent besteht aus:

C: 0,01 bis 0,3 %,
Si: 0,01 bis 2,0 %,
Mn: 0,01 bis 2,0 %,
P: 0,10 % oder weniger,
S: 0,03 % oder weniger,
Cr: 7,0 bis 14,0 %,
N: 0,005 bis 0,15 %, löslichem Al: 0,001 bis 0,3 %, einer oder mehreren Elementarten, ausgewählt aus einer Gruppe bestehend aus Mo: 0 bis 5,0 %, Ta: 0 bis 5,0 %, W: 0 bis 5,0 % und Re: 0 bis 5,0 %: insgesamt 0,5 bis 7,0 %, einer oder mehreren Elementarten, ausgewählt aus einer Gruppe bestehend aus Cu: 0,005 bis 5,0 %, Ni: 0,005 bis 5,0 % und Co: 0,005 bis 5,0 %, Ti: 0 bis 1,0 %, V: 0 bis 1,0 %, Nb: 0 bis 1,0 %, Hf: 0 bis 1,0 %,

Ca: 0 bis 0,1 %,

Mg: 0 bis 0,1 %,

Zr: 0 bis 0,1 %,

B: 0 bis 0,1 % und

Seltenerdmetall: 0 bis 0,1 %,

wobei der Rest Fe und Verunreinigungen ist;

wobei das Seltenerdmetall ein oder mehrere Elementarten ist, die ausgewählt sind aus den Elementen mit den Ordnungszahlen 39, 57 bis 71 und 89 bis 103, und

einem Oxidfilm auf einer Oberfläche des Basismaterials;

wobei:

der Oxidfilm Folgendes umfasst:

eine oxidierte Schicht B, die Fe_3O_4 und Fe_2O_3 in einer Gesamtmenge von 80 Vol.-% oder mehr enthält, gemessen gemäß dem in der Beschreibung beschriebenen Verfahren, und

eine oxidierte Schicht C, die zwischen der oxidierten Schicht B und dem Basismaterial angeordnet ist;

wobei die oxidierte Schicht C das Basismaterial berührt; und

eine chemische Zusammensetzung, die Sauerstoff und Kohlenstoff ausschließt, der oxidierten Schicht C in Massenprozent, gemessen gemäß dem in der Beschreibung beschriebenen Verfahren, Folgendes enthält:

Cr und Mn: insgesamt mehr als 5 % bis 30 %, und

eine oder mehrere Elementarten, ausgewählt aus einer Gruppe bestehend aus Mo, Ta, W und Re:
insgesamt 1 bis 15 %,

wobei in der oxidierten Schicht C, Cr und Mn als Oxide vorhanden sind, die durch die chemische Formel $(\text{Fe, M})_3\text{O}_4$ dargestellt werden, in der Cr und Mn M ersetzen, und

die Oxide, die durch die chemische Formel $(\text{Fe}, \text{M})_3\text{O}_4$ dargestellt werden, Oxide sind, die eine sogenannte Spinelstruktur aufweisen, die der von Fe_3O_4 entspricht, und in denen ein Teil von Fe durch Cr und Mn ersetzt ist.

Revendications

1. Procédé de production d'acier ferritique résistant à la chaleur, dans lequel l'acier inoxydable ferritique résistant à la chaleur comprend :

un matériau de base, et

une couche oxydée A sur une surface du matériau de base ;

dans lequel :

le matériau de base a une composition chimique constituée de, en % de masse :

C : 0,01 à 0,3 %,

Si : 0,01 à 2,0 %,

Mn : 0,01 à 2,0 %,.

P : 0,10 % ou moins,

S : 0,03 % ou moins.

Cr : 7,0 à 14,0 %,

N : 0,005 à 0,15 %.

Al massif : 0,001 à 0,3 %.

un ou plusieurs types d'éléments sélectionnés dans un groupe constitué de Mo : 0 à 5,0 %, Ta : 0 à 5,0 %, W : 0 à 5,0 % et Re : 0 à 5,0 % : 0,5 à 7,0 % au total,

un ou plusieurs types d'éléments sélectionnés dans un groupe constitué de Cu : 0,005 à 5,0 %, Ni : 0,005 à 5,0 %, et Co : 0,005 à 5,0 %.

Ti : 0 à 1,0 %,

V : 0 à 1,0 %,

Nb : 0 à 1,0 %,

Hf : 0 à 1,0 %,

Ca : 0 à 0.1 %.

Mg : 0 à 0,1 %.

Zr : 0 à 0,1 %,

EP 3 480 331 B1

B : 0 à 0,1 %, et
un métal du groupe des terres rares : 0 à 0,1 %,
le reste étant constitué de Fe et d'impuretés ;
dans lequel le métal du groupe des terres rares est un ou plusieurs types d'éléments sélectionnés parmi les
5 éléments ayant des numéros atomiques de 39, 57 à 71 et 89 à 103, et
la couche oxydée A a une composition chimique excluant l'oxygène et le carbone contenant, en % en masse,
telle que mesurée selon le procédé décrit dans la description :

Cr et Mn : 20 à 45 % au total, et
10 un ou plusieurs types d'éléments sélectionnés dans un groupe constitué de Mo, Ta, W et Re : 0,5 à 10 %
au total,
dans lequel le procédé inclut un processus de préparation et un processus de traitement par oxydation,
dans lequel, dans le processus de préparation, le matériau de base ayant la composition chimique
susmentionnée est préparé, et
15 le processus de traitement par oxydation est réalisé sur le matériau de base susmentionné préparé
pendant le processus de préparation par chauffage du matériau de base préparé pendant le processus
de préparation dans une atmosphère gazeuse contenant CO, CO₂ et N₂, dans lequel le rapport CO/CO₂
du gaz utilisé pour le traitement par oxydation est de 0,6 ou plus en volume et le rapport (CO + CO₂) / N₂
du gaz utilisé pendant le traitement par oxydation est fixé à pas plus de 1,0 en volume ; et
20 la température pour le processus de traitement par oxydation se situe dans une plage de 900 à 1130 °C et
la durée de traitement par oxydation se situe dans une plage de 1 minute à 1 heure.

2. Procédé de production d'un organe ferritique de transfert de chaleur, le procédé comprenant le procédé de production
d'acier ferritique résistant à la chaleur de la revendication 1, et comprenant en outre la réalisation d'un traitement par
25 oxydation à la vapeur par exposition de l'acier ferritique résistant à la chaleur à la vapeur à une température dans
une plage de 500 à 650°C pendant au moins 100 heures, dans lequel l'organe ferritique de transfert de chaleur,
comprend :

un matériau de base ayant une composition chimique constituée de, en % de masse :

30 C : 0,01 à 0,3 %,
Si : 0,01 à 2,0 %,
Mn : 0,01 à 2,0 %,
P : 0,10 % ou moins,
S : 0,03 % ou moins,
35 Cr : 7,0 à 14,0 %,
N : 0,005 à 0,15 %,
Al massif : 0,001 à 0,3 %,
un ou plusieurs types d'éléments sélectionnés dans un groupe constitué de Mo : 0 à 5,0 %, Ta : 0 à 5,0 %, W : 0 à
5,0 % et Re : 0 à 5,0 % : 0,5 à 7,0 % au total,
40 un ou plusieurs types d'éléments sélectionnés dans un groupe constitué de Cu : 0,005 à 5,0 %, Ni : 0,005 à 5,0 %, et
Co : 0,005 à 5,0 %, et
Ti : 0 à 1,0 %, et
V : 0 à 1,0 %, et
45 Nb : 0 à 1,0 %, et
Hf : 0 à 1,0 %, et
Ca : 0 à 0,1 %, et
Mg : 0 à 0,1 %, et
Zr : 0 à 0,1 %, et
50 B : 0 à 0,1 %, et
un métal du groupe des terres rares : 0 à 0,1 %, et
le reste étant constitué de Fe et d'impuretés ;
dans lequel le métal du groupe des terres rares est un ou plusieurs types d'éléments sélectionnés parmi les
éléments ayant des numéros atomiques de 39, 57 à 71 et 89 à 103, et
un film d'oxyde sur une surface du matériau de base ;
55 dans lequel :
le film d'oxyde comprend :

une couche oxydée B contenant Fe₃O₄ et Fe₂O₃ dans une quantité totale de 80 % ou plus en % en volume,

EP 3 480 331 B1

telle que mesurée selon le procédé décrit dans la description, et
une couche oxydée C qui est disposée entre la couche oxydée B et le matériau de base ;
la couche oxydée C est en contact avec le matériau de base ; et
une composition chimique excluant l'oxygène et le carbone de la couche oxydée C contient, en % en masse,
tel que mesurée selon le procédé décrit dans la description :

Cr et Mn : plus de 5 % à 30 % au total, et
un ou plusieurs types d'éléments sélectionnés dans un groupe constitué de Mo, Ta, W et Re : 1 à 15 % au
total,
dans lequel, dans la couche oxydée C, Cr et Mn sont présents sous forme d'oxydes représentés par la
formule chimique $(\text{Fe}, \text{M})_3\text{O}_4$ dans laquelle Cr et Mn sont substitués à M et les oxydes représentés par la
formule chimique $(\text{Fe}, \text{M})_3\text{O}_4$ sont des oxydes qui ont une structure cristalline dite spinelle qui est la
même que Fe_3O_4 , et dans laquelle une partie de Fe est substituée par Cr et Mn.

FIG. 1


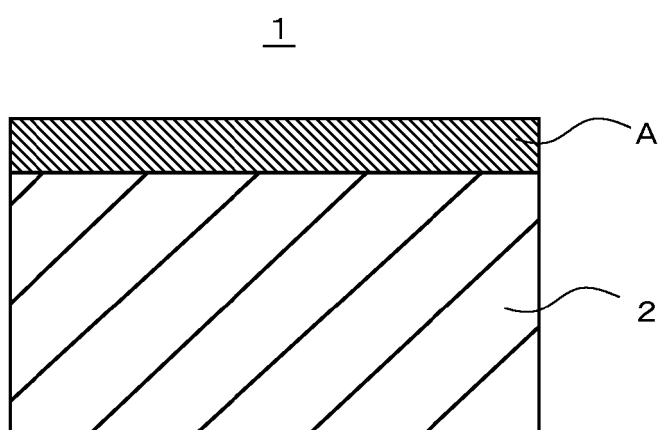


FIG. 2

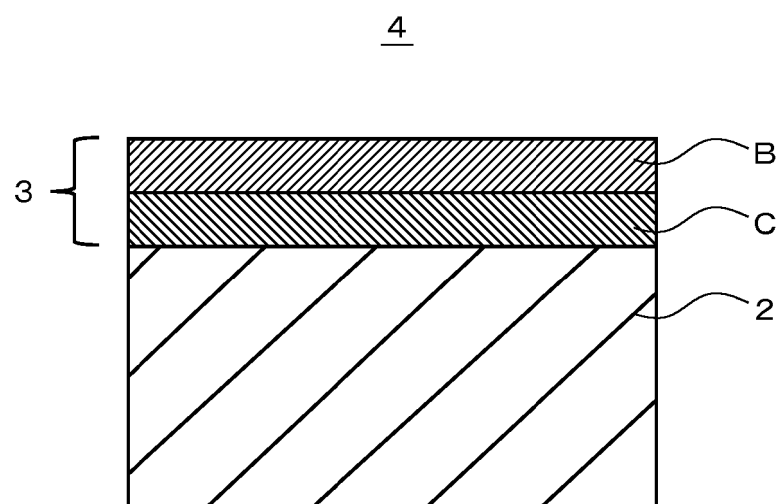

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 11092880 A [0004] [0008]
- JP 2007039745 A [0005] [0008]
- JP 2013127103 A [0006] [0008]
- JP 2009179884 A [0007] [0008]
- US 20140295194 A [0009]