



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

| | | |
|--|-----------|--|
| (51) International Patent Classification ⁷ : C23F 11/10 | A1 | (11) International Publication Number: WO 00/52230 (43) International Publication Date: 8 September 2000 (08.09.00) |
| (21) International Application Number: PCT/US00/05613 (22) International Filing Date: 2 March 2000 (02.03.00) (30) Priority Data: 09/260,684 2 March 1999 (02.03.99) US (71) Applicant: CHEMAX, INC. [US/US]; 30 Old Augusta Road, P.O. Box 6067, Peidmont, SC 29673 (US). (72) Inventor: KYLE, Gerald, H.; 6 Heatherstone Court, Simp- sonville, SC 29680 (US). (74) Agent: DORITY & MANNING, P.A.; P.O. Box 1449, 700 E. North Street, Greenville, SC 29601 (US). | | (81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i> |
| (54) Title: CORROSION INHIBITOR AND PROCESS | | |
| (57) Abstract A corrosion inhibitor composition for metal working and a method for making the same is provided. The composition is made by reacting maleated tall oil fatty acids with alkanolamines. The alkanolamines suitable for the present invention may be ethanolamines or other alkanolamines such as di-glycolamine if ethanolamines are not environmentally preferred. The resulting reaction product salts provide an effective corrosion inhibitor suitable for incorporation into aqueous products such as buffing compounds, cutting fluids, drawing compounds, cleaning fluids and forging aids. | | |

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

| | | | | | | | |
|-----------|--------------------------|-----------|--|-----------|--|-----------|--------------------------|
| AL | Albania | ES | Spain | LS | Lesotho | SI | Slovenia |
| AM | Armenia | FI | Finland | LT | Lithuania | SK | Slovakia |
| AT | Austria | FR | France | LU | Luxembourg | SN | Senegal |
| AU | Australia | GA | Gabon | LV | Latvia | SZ | Swaziland |
| AZ | Azerbaijan | GB | United Kingdom | MC | Monaco | TD | Chad |
| BA | Bosnia and Herzegovina | GE | Georgia | MD | Republic of Moldova | TG | Togo |
| BB | Barbados | GH | Ghana | MG | Madagascar | TJ | Tajikistan |
| BE | Belgium | GN | Guinea | MK | The former Yugoslav Republic of Macedonia | TM | Turkmenistan |
| BF | Burkina Faso | GR | Greece | ML | Mali | TR | Turkey |
| BG | Bulgaria | HU | Hungary | MN | Mongolia | TT | Trinidad and Tobago |
| BJ | Benin | IE | Ireland | MR | Mauritania | UA | Ukraine |
| BR | Brazil | IL | Israel | MW | Malawi | UG | Uganda |
| BY | Belarus | IS | Iceland | MX | Mexico | US | United States of America |
| CA | Canada | IT | Italy | NE | Niger | UZ | Uzbekistan |
| CF | Central African Republic | JP | Japan | NL | Netherlands | VN | Viet Nam |
| CG | Congo | KE | Kenya | NO | Norway | YU | Yugoslavia |
| CH | Switzerland | KG | Kyrgyzstan | NZ | New Zealand | ZW | Zimbabwe |
| CI | Côte d'Ivoire | KP | Democratic People's Republic of Korea | PL | Poland | | |
| CM | Cameroon | KR | Republic of Korea | PT | Portugal | | |
| CN | China | KZ | Kazakstan | RO | Romania | | |
| CU | Cuba | LC | Saint Lucia | RU | Russian Federation | | |
| CZ | Czech Republic | LI | Liechtenstein | SD | Sudan | | |
| DE | Germany | LK | Sri Lanka | SE | Sweden | | |
| DK | Denmark | LR | Liberia | SG | Singapore | | |
| EE | Estonia | | | | | | |

CORROSION INHIBITOR AND PROCESS**Field of the Invention**

5 The present invention is generally directed to
a corrosion inhibitor and a process for using the
inhibitor. More particularly, the present
invention is directed to a corrosion inhibitor
particularly well suited for preventing corrosion
10 during various metal working operations.

Background of the Invention

This invention relates to corrosion inhibitors
used in metal working. As used herein, metal
working includes, but is not limited to, metal
15 polishing, cutting, grinding, stamping, cleaning,
drawing, forming, forging, and other processes
where metal oxidation and corrosion is a problem.

It is well known in the metal working
industries to combine corrosion inhibitors with
20 cutting fluids, cleaners, and drawing compounds.
Traditionally, typical inhibitors employ alkyl
diacids of C₆ to C₁₂ chain length such as
dodecanedioic acid to protect the metal.

U.S. Patent No. 5,292,480 to Fischer, et al.
25 Discloses a corrosion inhibitor for metal parts
which is produced by reacting a fatty acid Diels-
Alder adduct or fatty acid-ene with a polyalcohol
to form an acid-anhydride ester corrosion
inhibitor. The resulting ester may be further
30 reacted with amines, metal hydroxides, metal
oxides, ammonia, and combinations thereof to
neutralize the ester. The corrosion inhibitor is
disclosed as having utility for controlling
corrosion in down-hole oil field and piping
35 equipment.

U.S. Patent No. 5,643,534 to Minevski

discloses a corrosion inhibiting composition
supplied as a concentrate which includes a blend of
salicylic acid; a reaction product of maleated tall
oil fatty acid polyhydroxy polyalkane and ammonium
5 or potassium hydroxide; tallow diamine quaternary
dichloride or alkanediol; and alkanol or
alkanolamine. The inhibitor is disclosed as being
useful in acid gas removal amine units which employ
alkanol amine solutions.

10 While these corrosion inhibitors are believed
satisfactory for their intended purposes, there
exists room for improvement within the art. The
present invention is an improvement in that it
provides an effective corrosion inhibitor which is
15 cost effective, easy to manufacture, and affords
superior corrosion protection. A preferred
embodiment of the composition has been found
useful as an aqueous-based corrosion inhibitor
which is compatible with a variety of metal working
20 formulations and processes.

Summary of the Invention

It is an object of the present invention to
provide a composition useful as a corrosion
inhibitor for metal working applications.

25 It is another object of the present invention
to provide a corrosion inhibitor composition which
is compatible with conventional additives used in
the metal working industry.

30 It is a further and more particular object of
this invention to provide a corrosion inhibitor
with a broad range of utility and which has low
toxicity.

It is a further object of this invention to
provide a process of preventing corrosion in worked
35 metals which comprises the use of a reaction

product of a maleated tall oil fatty acid with one or more alkanolamines.

These and other objects of the present invention are achieved by providing a metal corrosion inhibitor composition. The corrosion inhibitor composition includes a reaction product of a maleated tall oil fatty acid with an alkanolamine. The alkanolamine can be, for instance, an ethanolamine, such as monoethanolamine, triethanolamine, and mixtures thereof. When in use, the corrosion inhibitor composition of the present invention can be contained in a dilute aqueous solution. For instance, the corrosion inhibitor composition can be present in the solution in an amount up to about 20% by weight, and particularly in an amount up to about 5% by weight.

In one embodiment of the present invention, the corrosion inhibitor composition can further include a reaction product of an alkanolamine and a C₆ to C₁₈ alkyl carboxylic acid. The C₆ to C₁₈ alkyl carboxylic acid can be, for example, neodecanoic acid, isononanoic acid, and mixtures thereof.

The metal corrosion inhibitor composition of the present invention is well suited to protecting metals when the metals are contacted with fluids, such as water, that can cause corrosion. For example, in one embodiment, the corrosion inhibitor of the present invention can be incorporated into a lubricating solution that lubricates the metal during metal working operations. The corrosion inhibitor composition can also be incorporated into rinsing solutions.

Description of Preferred Embodiments

It is to be understood by one of ordinary

skill in the art that the present discussion is a description of exemplary embodiments only, and is not intended as limiting the broader aspects of the present invention, which broader aspects are embodied in the exemplary construction.

A composition and process for treating metals, especially ferrous metals, to prevent corrosion are provided. Generally, the composition comprises a reaction mixture of a maleated tall oil fatty acid with one or more alkanolamines. Maleated tall oil fatty acid is known as an intermediate chemical for various corrosion inhibitors. However, the specific reaction products of the present invention offer improved qualities over other known derivatives of maleated tall oil fatty acid. The resulting reaction products of the present invention comprise alkanolamine salts of the maleated tall oil fatty acid and afford excellent corrosion resistance to worked metals. The reaction product(s) are water soluble; are compatible with typical metal working additives commonly used in metal finishing, buffing compounds, cutting fluids, and other metal working compounds; and have low toxicity.

An additional advantage of the present compositions and process is the ease of manufacture. The present inhibitor formulation is made according to a process which takes place in simple reactor vessels at ambient laboratory conditions and pressures. While the reaction is slightly exothermic, no external pressure or temperature regulation is required. Further, the reaction proceeds quickly, in contrast to conventional teachings where elevated pressures,

temperatures and/or reaction times are needed.

As described above, in general, the corrosion inhibitor composition of the present invention includes the reaction products of a maleated tall oil fatty acid with one or more alkanolamines. Alkanolamines that may be used in the present invention can vary depending upon the particular application and the particular result desired. For most applications, ethanolamines can be used to neutralize the maleated tall oil fatty acid. Particular ethanolamines that can be used include triethanolamine and monoethanolamine. In fact, it has been discovered that when a mixture of triethanolamine and monoethanolamine are used to neutralize the tall oil fatty acid, superior results are achieved. For instance, a triethanolamine and monoethanolamine mixture can be used to neutralize the fatty acid in which triethanolamine is present in the mixture in an amount of at least 30% by weight, particularly at least 50% by weight and, in one embodiment, present in an amount of about 66% by weight.

In general, one or more alkanolamines are combined with a maleated tall oil fatty acid in an amount sufficient to completely neutralize the fatty acid. Preferably, excess amounts of alkanolamines are present. For most applications, the weight ratio of alkanolamines to the maleated tall oil fatty acid is about 2 to 1.

Besides at least one alkanolamine and the maleated tall oil fatty acid, the reaction mixture of the present invention can include various other ingredients. For instance, various additives can be included in order to facilitate the reaction or in order to enhance the final properties of the

composition. For example, in one embodiment, one or more alkyl carboxylic acids having from a C₆ to a C₁₈ carbon chain may be added to the reaction mixture. Specifically, the alkyl carboxylic acid
5 can be added in order to improve the properties of the final product. During the reaction, the alkyl carboxylic acid also becomes neutralized by the alkanolamines.

Examples of alkyl carboxylic acids that may be
10 used in the process of the present invention include neodecanoic acid and isonononoic acid.

Once reacted, the corrosion inhibitor composition of the present invention should generally have a pH of greater than about 6, and preferably has a pH of greater than about 7. In
15 one embodiment, the composition can have a pH of from about 7 to about 9. It should be understood, however, that higher pHs are possible.

When used in metal working applications, the
20 reaction products of the present invention can be combined in an aqueous solution. For most applications, the corrosion inhibitor composition of the present invention can be heavily diluted with water during use. For instance, the
25 concentration of the reactant products in an aqueous solution during use is typically from about 0.25% to about 1% by weight.

The corrosion inhibitor of the present invention has been found to be compatible with a
30 variety of standard additives found in metal working applications. For instance, the corrosion inhibitor composition can be combined with other corrosion inhibitors, surfactants, and lubricants.

For instance, in one embodiment of the present
35 invention, the corrosion inhibitor composition can

be contained within a lubricating solution that is intended to treat metal substrates when the substrates are subjected to various metal working processes. Examples of surfactants that may be used with the composition of the present invention include, but are not limited to, fatty acid alkoxyates, fatty amine alkoxyates, alcohol alkoxyates, alkylphenol alkoxyates, castor oil alkoxyates, phosphate esters and polyols.

Further, it is believed that any ethoxylated or propoxylated derivative may be combined and used with the composition of the present invention.

Metal lubricants that may be used with the composition of the present invention include most synthetic or nonsynthetic lubricants. Examples of lubricants include, for instance, mineral oil, vegetable oil, fatty esters, polyol esters, and any of the above described surfactants, which sometimes also serve as lubricants. In general, when treating metals, a lubricant solution can contain a lubricant in an amount up to about 80% by weight, particularly in an amount up to about 50% by weight, and more particularly in an amount from about 3% to about 40% by weight. The remainder of the solution can include the corrosion inhibitor composition of the present invention, any surfactants, and water.

When in use, a lubricating composition is typically applied to a metal while the metal is being subjected to some type of process, such as a forming, cutting, stamping, drawing, polishing, grinding, or forging process. After the metal has been worked, the lubricating solution containing the corrosion inhibitor composition of the present invention is typically washed off. Of particular

advantage, as described above, the corrosion inhibitor composition of the present invention is nontoxic and thus can be easily disposed of.

5 Besides being contained in a lubricating solution, the corrosion inhibitor composition of the present invention can also be contained in the rinsing solution and in other various solutions that contact the metal.

Example 1

A first preferred embodiment of the present invention is provided by the reaction of a maleated tall oil fatty acid (herein after "tall oil"), such as that available from Westvaco as TENAX 2010, with a mixture of alkanolamines, such as monoethanolamine (MEA) and triethanolamine (TEA). The maleated tall oil fatty acid used herein, has a monomer content of less than about 10%.

10 The reaction products are obtained as follows:

A 24.4% by weight of water is placed in a reaction vessel with stirring. 12.2% by weight of MEA (Dow; Union Carbide) and 37.8% by weight of TEA (Dow; Union Carbide) are added to the water with constant stirring or agitation. Once thoroughly mixed, 25.6% by weight of TENAX 2010 brand of tall oil is slowly added with constant stirring. The resulting exothermic reaction is allowed to proceed for approximately 30 minutes. A final pH of between 7-9 is obtained for the reaction product and may be adjusted using additional TEA or other similar acids.

25 The resulting reaction products are the amine salts of a polycarboxylic acid such as the tricarboxylic acid set forth below. The reaction products are in the form of a viscous, dark amber solution. The reaction and resulting reaction products are set forth in the following equation:

30

35

part of MEA has been found to perform best under the described test conditions. However, the use of TEA as the sole alkanolamine also provides a reaction product useful as a corrosion inhibitor.

5 Beneficial results are achieved using diethanolamine (DEA) as the alkanolamine. However, as a suspected carcinogen, the use of DEA is not preferred. The formulations described above are preferred and achieve the beneficial results set

10 forth in the additional examples below.

Example 2

A second preferred embodiment of the corrosion inhibitor formulation was prepared as described above, using the ingredients and proportions set

15 forth in Table 1. The stock corrosion inhibitor as set forth in Table 1 was mixed in distilled water to provide working concentrations of 1%, 0.75%, 0.5%, and 0.25%.

Each working concentration was used to

20 evaluate the corrosion inhibiting properties with respect to cast iron chips in an open environment. Specifically, the above solutions were tested for their ability to inhibit corrosion according to standard test method ASTM-D4627-86. 10 grams of

25 cast iron chips were placed in contact with a circular filter paper contained within a 9 cm petri dish bottom. 40 mls of the respective concentrations of the corrosion inhibitor were added to the petri dish, uniformly covering and

30 wetting the cast iron chips. Air bubbles were displaced by gentle tapping of the petri dish, ensuring all the iron chips were in contact with the inhibitor solution.

Following an incubation period of 30 minutes,

35 the inhibitor solution was decanted and the excess

free fluid was removed. The iron chips were left undisturbed for 24 hours in the open petri container and under standard ambient laboratory conditions. After 24 hours, the iron chips were removed from the filter paper and the number of rust spots appearing on the paper were recorded. The results are reported based upon the following rankings:

0-5 spots Excellent
10 5-10 spots Good
10-20 spots Fair
>20 spots Poor

Observations of the surface of the iron chips were also made. Further, qualitative assessments were possible by comparing the intensity of stains present on the filter paper.

TABLE 1

| | 1 | 2 |
|---|-----------|-----------|
| H ₂ O | 22.0 | 22.0 |
| MEA | 11.0 | 11.0 |
| TEA | 34.0 | 34.0 |
| TENAX 2010 | 23.0 | 23.0 |
| Neodecanoic Acid | 10.0 | -- |
| Isonononoic Acid | -- | 10.0 |
| Results of Cast Iron Chip Test at 1% | Excellent | Excellent |
| Results of Cast Iron Chip Test at 0.75% | Excellent | Excellent |
| Results of Cast Iron Chip Test at 0.5% | Excellent | Excellent |
| Results of Cast Iron Chip Test at 0.25% | Fair | Poor |

All values are in wt. %.

As seen in reference to Table 1, the corrosion inhibitor provided excellent corrosion protection to the test iron particles.

Example 3

5 By way of comparison, Table 2 sets forth data
on formulations where the maleated tall oil fatty
acid was replaced with various carboxylic acids.
The carboxylic acids evaluated are known and used
for their corrosion inhibiting properties. In each
10 instance, the listed formulations were evaluated
using the chip iron protocol of Example 2 and the
results reported in Table 2.

TABLE 2

| | 1 | 2 | 3 | 4 | 5 | 6 |
|--|------|------|------|------|------|------|
| H ₂ O | 35.0 | 35.0 | 30.0 | 30.0 | 20.0 | 20.0 |
| TEA | 34.0 | 34.0 | 34.0 | 34.0 | 52.0 | 52.0 |
| MEA | 11.0 | 11.0 | 11.0 | 11.0 | 5.0 | 5.0 |
| Octadecenyl Succinic Acid Anhydride | 10.0 | 10.0 | 15.0 | 15.0 | -- | -- |
| D. Basic Acid | -- | -- | -- | -- | 8.0 | 8.0 |
| Azelaic Acid | -- | -- | -- | -- | 15.0 | -- |
| Sebacic Acid | -- | -- | -- | -- | -- | 15.0 |
| Neodecanoic Acid | 10.0 | -- | 10.0 | -- | -- | -- |
| Isonononoic Acid | -- | 10.0 | -- | 10.0 | -- | -- |
| Results of Cast Iron Chip Test at 1% | Poor | Poor | Fair | Poor | Poor | Poor |
| Results of Cast Iron Chip Test at 0.75% | Fail | Fail | Poor | Fail | Fail | Fail |
| Results of Cast Iron Chip Test at 0.5% | Fail | Fail | Fail | Fail | Fail | Fail |
| Results of Cast Iron Chip Test at 0.25% | Fail | Fail | Fail | Fail | Fail | Fail |

All values are in wt. %.

Example 4

As set forth in Tables 3 and 4, various combinations of formulations were evaluated using TENAX 2010 in combination with other amino alcohols. In particular, in this example, the monoethanolamine and the triethanolamine were replaced with the amino alcohols. The protocols and testing procedures used in Example 2 were followed. Results are as reported in Tables 3 and 4.

TABLE 4

| | 1 | 2 | 3 | 4 | 5 | 6 |
|---|------|------|------|------|------|------|
| H ₂ O | 20.0 | 20.0 | 20.0 | 15.2 | 15.4 | 11.3 |
| TENAX 2010 | 40.0 | 40.0 | 40.0 | 54.5 | 46.7 | 44.6 |
| 2 amino - 2 ethyl - 1,3 propanediol (85% conc.) | -- | 40.0 | 20.0 | -- | -- | 20.0 |
| 2 amino - 2 methyl - 1 propanol (95% conc.) | 40.0 | -- | 20.0 | 30.3 | 26.6 | 24.1 |
| Neodecanoic Acid | -- | -- | -- | -- | 11.3 | -- |
| Results of Cast Iron Chip Test at 1% | Fair | Poor | Poor | Poor | Poor | Poor |
| Results of Cast Iron Chip Test at 0.75% | Poor | Fail | Fail | Fail | Fail | Fail |
| Results of Cast Iron Chip Test at 0.5% | Fail | Fail | Fail | Fail | Fail | Fail |
| Results of Cast Iron Chip Test at 0.25% | Fail | Fail | Fail | Fail | Fail | Fail |

All values are in wt. %.

TABLE 3

| | 1 | 2 | 3 | 4 | 5 | 6 | 7 |
|---|------|------|------|------|------|------|------|
| H ₂ O | 20.0 | -- | -- | 16.7 | 15.3 | 18.2 | 18.2 |
| TENAX 2010 | 50.0 | 50.0 | 50.0 | 41.7 | 46.2 | 54.5 | 54.5 |
| 2 amino - 2 ethyl - 1,3 propanediol (85% conc.) | 25.0 | 25.0 | -- | 10.4 | 23.1 | -- | -- |
| 2 amino - 2 methyl - 1 propanol (95% conc.) | 25.0 | -- | 25.0 | 10.4 | -- | 27.3 | -- |
| Monoisopropanol amine | -- | 25.0 | 25.0 | 20.8 | 7.7 | -- | 27.3 |
| Neodecanoic Acid | -- | -- | -- | -- | 7.7 | -- | -- |
| Results of Cast Iron Chip Test at 1% | Poor | Poor | Poor | Poor | Poor | Poor | Poor |
| Results of Cast Iron Chip Test at 0.75% | Fail | Fail | Fail | Fail | Fail | Fail | Fail |
| Results of Cast Iron Chip Test at 0.5% | Fail | Fail | Fail | Fail | Fail | Fail | Fail |
| Results of Cast Iron Chip Test at 0.25% | Fail | Fail | Fail | Fail | Fail | Fail | Fail |

All values are in wt. %.

As set forth above, the preferred embodiment of the corrosion inhibitor affords significant corrosion protection to the test metals.

Compositions replacing the tall oil with other
5 carboxylic acids (Table 2) resulted in products which performed poorly compared to the tall oil reaction products of the present invention.

Similar substitution efforts with respect to the preferred alkanolamines (Table 3 and 4), also

10 failed to achieve results as good as the preferred compositions. The combination of MEA/TEA with the maleated tall oil produces a reaction product having superior performance qualities. In fact, a true synergy is achieved in the preferred
15 combinations when compared to the corrosion inhibiting properties of the various reagents as evaluated in Tables 3 and 4.

The preferred embodiment of the present invention has demonstrated its effectiveness

20 compared to other corrosion inhibitors evaluated. The corrosion inhibitors of the present invention offer greater protection than conventional inhibitors. Further, the present formulation achieves improved results while using lower
25 concentrations than prior art formulations.

Accordingly, the present formulations are advantageous in terms of economy of cost as well as effectiveness.

It will be understood that the invention is
30 not limited to the particular embodiments or processes described herein, nor the particular parameters or dimensions described therefor. It should also be understood that other basic fatty acid material equivalent to that described falls
35 within the scope of the present invention.

Preparation routes of the compositions and process steps therefore are merely exemplary so as to enable one of ordinary skill in the art to employ the method and compositions described herein and used in accordance with the present process. It will also be understood that while the form of the invention shown and described herein constitutes a preferred embodiment of the invention, this description is not intended to illustrate all possible forms of the invention. Aspects of the various embodiments may be interchanged both in whole or in part. The words used are words of description rather than of limitation. Various changes and variations may be made to the present invention without departing from the spirit and scope of the following claims.


WHAT IS CLAIMED:

1. A metal corrosion inhibitor composition comprising:

a reaction product of a maleated tall oil fatty acid with an alkanolamine.

2. The composition as defined in claim 1, wherein said alkanolamine is an ethanolamine selected from the group consisting of monoethanolamine, triethanolamine, and mixtures thereof.

3. The composition as defined in claim 2, wherein said reaction products have a general chemical structure consisting of:

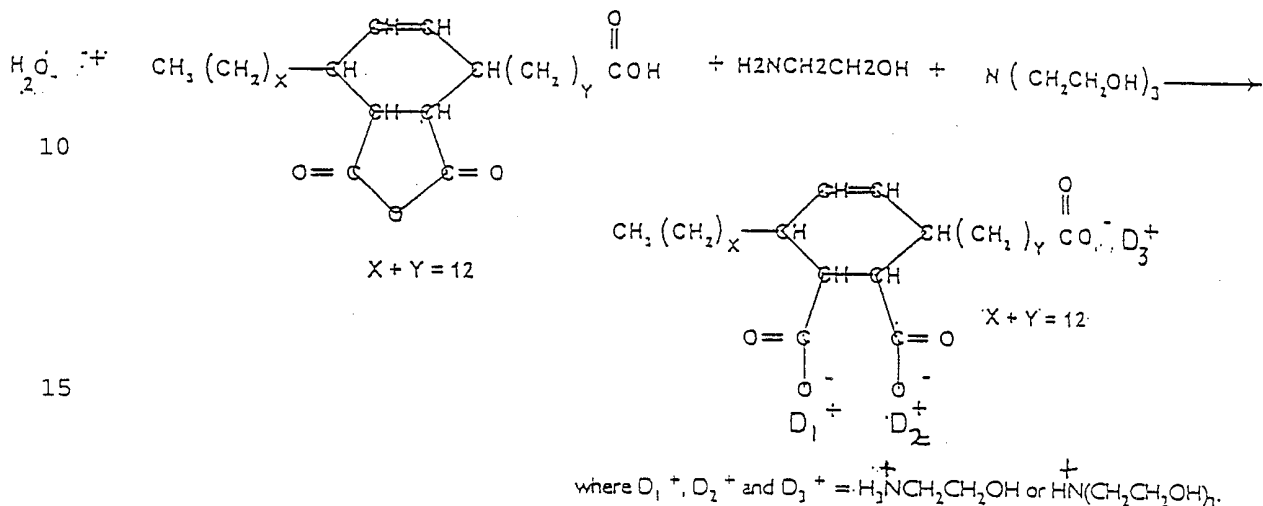

4. The composition according to claim 1, wherein said maleated tall oil fatty acid and said alkanol-amine is reacted in the presence of neodecanoic acid.

5. The composition according to claim 1, wherein said maleated tall oil fatty acid and said alkanol-amine is reacted in the presence of isonononoic acid.

6. The composition according to claim 1, wherein said maleated tall oil fatty acid and said alkanol-amine is reacted in the presence of a mixture of isonononoic acid and neodecanoic acid.

7. The composition according to claim 2, wherein about 1 part of said maleated tall oil fatty acid is present to about 2 parts of said alkanolamines.

8. The composition according to claim 1, wherein said maleated tall oil fatty acid and said alkanolamine are reacted in the presence of a C₆ to C₁₈ alkyl carboxylic acid.

9. The composition according to claim 1, wherein said composition comprises an aqueous solution.

10. The composition according to claim 2, wherein said alkanolamine comprises a mixture of monoethanolamine and triethanolamine, and wherein about 1 part of said monoethanolamine is present to about 3 parts of said triethanolamine.

11. The composition as defined in claim 1, wherein, said alkanolamine comprises a material selected from the group consisting of a glycolamine, tri-isopropanolamine, mono-isopropanolamine, and mixtures thereof.

12. A process of inhibiting corrosion of metals, said method comprising adding to a metal an effective amount of an aqueous solution containing a corrosion inhibiting composition, said
5 composition comprising a reaction product of a maleated tall oil fatty acid and an alkanolamine.

13. The process as defined in claim 12, wherein said alkanolamine comprises at least one ethanolamine.

14. The process according to claim 13, wherein said ethanolamine is triethanolamine.

15. The process according to claim 13, wherein said ethanolamine is monoethanolamine.

16. The process according to claim 13, wherein said ethanolamine is a mixture of monoethanolamine and triethanolamine.

17. The process according to claim 16, wherein said mixture of monoethanolamine and triethanolamine contains at least 50% by weight triethanolamine.

18. A process as defined in claim 12, wherein said corrosion inhibiting composition further comprises a reaction product of an alkanolamine with a C₆ to C₁₂ alkyl carboxylic acid.

19. The process according to claim 18, wherein said C₆ to C₁₈ alkyl carboxylic acid comprises a material selected from the group consisting of neodecanoic acid, isonononoic acid
5 and mixtures thereof.

20. The process according to claim 12, wherein said alkanolamine comprises a material selected from the group consisting of a glycolamine, tri-isopropanolamine, mono-

5 isopropanolamine, and mixtures thereof.

21. A process for working metals, said process comprising the steps of:

5 providing a metal substrate;
contacting said metal substrate with an aqueous
5 solution, said aqueous solution containing a
lubricant and a corrosion inhibitor, said corrosion
inhibitor comprising a reaction product of a
maleated tall oil fatty acid and an alkanolamine;
and

10 working said treated metal substrate in
order to modify the shape of said substrate.

22. A process as defined in claim 21, wherein
said alkanolamine comprises at least one
ethanolamine.

23. A process as defined in claim 22, wherein
said ethanolamine comprises monoethanolamine.

24. A process as defined in claim 22, wherein
said ethanolamine comprises triethanolamine.

25. A process as defined in claim 22, wherein
said ethanolamine comprises a mixture of
triethanolamine and monoethanolamine.

26. A process as defined in claim 25, wherein
said mixture of said monoethanolamine and
triethanolamine comprises at least 50% by weight
triethanolamine.

27. A process as defined in claim 21, wherein
said aqueous solution further comprises a
surfactant.

28. A process as defined in claim 21, wherein
said corrosion inhibitor further comprises a
reaction product of an alkanolamine and a material
selected from the group consisting of neodecanoic

5 acid, isonononoic acid, and mixtures thereof.

29. The process according to claim 21,
wherein said alkanolamine comprises a material
selected from the group consisting of a
glycolamine, tri-isopropanolamine, mono-
5 isopropanolamine, and mixtures thereof.

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US00/05613

A. CLASSIFICATION OF SUBJECT MATTER

IPC(7) :C23F 11/10

US CL :422/16,17; 252/392

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 422/7, 16, 17; 252/390, 393

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
NONE

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

STN: structure search and text search: tall oil fatty acid, maleic, maleated, amine

C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category* | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
|---------------|--|---|
| X --- A | US 5,759,485 A (FISCHER ET AL) 02 June 1998 (02.06.98), see entire document. | 1, 9, 12, 13, 18,21,22, 27 ----- 2-8,10,11, 14-17,19, 20,23-26, 28,29 |
| A | EP 0711850 A1 (BOCKOWSKI ET AL) 15 May 1996 (15.05.96), see entire document. | 1-29 |

Further documents are listed in the continuation of Box C. See patent family annex.

| | |
|---|--|
| * Special categories of cited documents: | "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention |
| "A" document defining the general state of the art which is not considered to be of particular relevance | "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone |
| "E" earlier document published on or after the international filing date | "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art |
| "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) | "G" document member of the same patent family |
| "O" document referring to an oral disclosure, use, exhibition or other means | |
| "P" document published prior to the international filing date but later than the priority date claimed | |

Date of the actual completion of the international search
19 MAY 2000

Date of mailing of the international search report
20 JUN 2000

Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231
Facsimile No. (703) 305-3230

Authorized officer

LEIGH MCKANE

Telephone No. (703) 308-0661

DEBORAH THOMAS
PARALEGAL SPECIALIST