



(51) International Patent Classification:

A47L 13/16 (2006.01) B32B 5/02 (2006.01)
A47L 13/20 (2006.01)

(21) International Application Number:

PCT/US2018/050371

(22) International Filing Date:

11 September 2018 (11.09.2018)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

15/700,396 11 September 2017 (11.09.2017) US

(71) Applicant: **THE PROCTER & GAMBLE COMPANY**
[US/US]; One Procter & Gamble Plaza, Cincinnati, Ohio
45202 (US).

(72) Inventor: **POLICICCHIO, Nicola, John**; One Procter &
Gamble Plaza, Cincinnati, Ohio 45202 (US).

(74) Agent: **KREBS, Jay A.**; c/o THE PROCTER & GAMBLE
COMPANY, Global IP Services, One Procter & Gamble
Plaza, C9, Cincinnati, Ohio 45202 (US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP,
KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,

(54) Title: CLEANING ARTICLE WITH IRREGULARLY SPACED TOW TUFTS

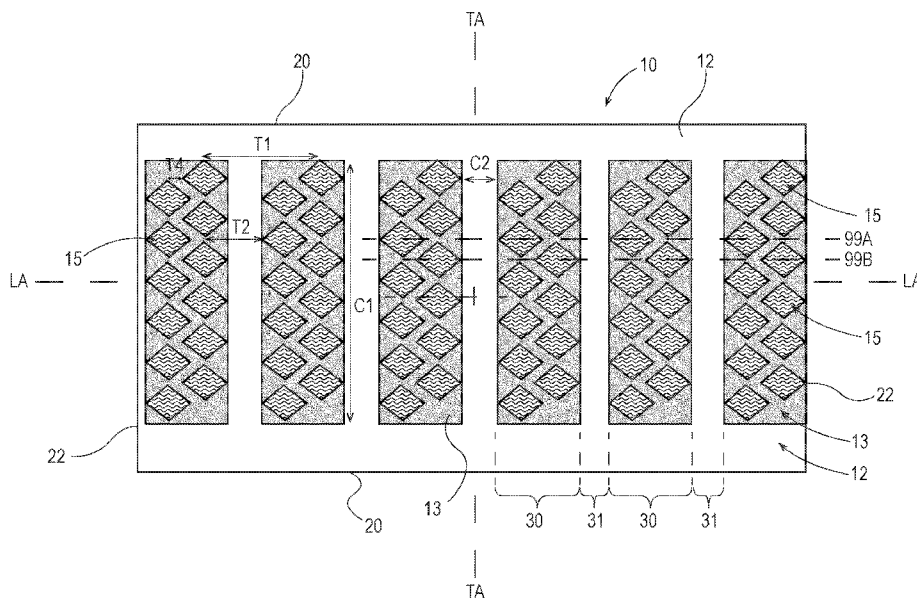


Fig. 1

(57) Abstract: A cleaning article. The cleaning article has tufts of tow fibers. At least some of the tufts are unequally spaced from adjacent tufts, to provide improved collection and retention of debris from a target surface. The tufts may be disposed in rows, which are unequally spaced from adjacent rows. The cleaning article may be made by cutting out spaces between tufts from a precursor sheet and attaching the precursor sheet to a carrier sheet. The cleaning article may be made by cutting a precursor sheet having tufts into discrete portions. The discrete portions are bonded to a carrier sheet.



WO 2019/051457 A1

MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

CLEANING ARTICLE WITH IRREGULARLY SPACED TOW TUFTS

FIELD OF THE INVENTION

The present invention relates to cleaning articles having irregularly spaced tufts of tow fibers for
5 cleaning.

BACKGROUND OF THE INVENTION

Various cleaning articles have been created for dusting and light cleaning. For example, cloth
10 rags and paper towels used dry or wetted with polishing and cleaning compositions have been
used on relatively flat surfaces such as countertops, showers, sinks and floors. Laminiferous
wipes have been proposed, as disclosed in 9,296,176. But, rags, wipes, and paper towels are
problematic for reasons such as hygiene (the user's hands may touch chemicals, dirt or the
surface during cleaning), reach (it may be difficult to insert the user's hand with the rag, wipe or
15 paper towel into hard-to-reach places) and inconvenience (cleaning between closely-spaced
articles typically requires moving the articles).

To overcome the problems associated with using rags and paper towels, various reusable dust
gathering devices using felt and hair have been utilized for more than a century, as illustrated by
20 US 823,725 issued in 1906 to Hayden and using yarns as illustrated in 4,145,787. To address the
problems with reusable dust gathering devices, disposable cleaning articles have been developed
which have limited re-usability. These disposable cleaning articles may include synthetic fiber
tufts, called tow fibers, attached to a sheet as shown in 2006/0171764; 6,143,393; 6,241,835;
6,319,593; 6,329,308; 6,554,937; 6,774,070; 6,813,801; 6,830,801; 6,984,615; 7,003,856;
25 7,566,671; 7,712,178; 7,779,502; 7,870,635; 7,937,797; 8,146,197; 8,151,402; 8,161,594,
8,186,001; 8,225,453; 8,245,349; 8,646,144; 8,528,151; 8,617,685; 8,646,144; 8,752,232;
8,756,746; 8,763,197; 8,793,832; 9,113,768; 9,198,553 and in commonly assigned 8,075,977.

Disposable dusters having tow fibers may provide for wet cleaning as disclosed in 7,566,671 and
30 in commonly assigned 7,803,726 and commonly assigned US 2008/0028560. But tow fibers

may become matted when wet and not be suitable for cleaning a large or heavily wetted surface, such as a floor. Thus, dusters may not be suitable for cleaning extremely large or heavily soiled surfaces.

5 Thus various sheets have been proposed for cleaning larger target surfaces, such as floors. Webs with elastic behavior have been proposed in commonly assigned 5,691,035. Sheets with recesses have also been proposed, as disclosed in 6,245,413; and 7,386,907. Sheets with cavities have been proposed, as disclosed in 6,550,092. An adhesive cleaning sheet is proposed in 7,291,359. Tufts are taught in commonly assigned 7,682,686, 7,838,099 and/or 8,075,977. Yet other
10 attempts use coatings of wax and/or oil. Coatings, such as wax and oil are generally disclosed in 6,550,092; 6,777,064; 6,797,357; 6,936,330; 6,984,615; 7,386,907; 7,560,398; 7,786,030; 8,536,074; 9,204,775; 9,339,165. Specific amphiphilic coatings are disclosed in 8,851,776.

Some of the prior art attempted to focus on debris as simply large and small, based upon the size
15 of the debris intended to be collected. But these teachings do not always address the proper use of tow fibers to collect the range of debris commonly found when cleaning a floor. Dense, granular debris, such as dirt, is not necessarily captured by tow fibers. Low density, more voluminous debris, such as hair, is not necessarily captured by nonwovens. Prior art attempts to incorporate tow fibers into cleaning sheets did not account for such differences in volume and
20 density. Tow fibers which are too closely spaced may not intercept and hold the more voluminous, lower density debris. Tow fibers which are spaced too far apart may not even come in contact with dense, granular debris – much less clean such debris from the surface. Even if such debris is initially captured, prior art sheets have not addressed the problem of how to retain such debris by the sheet.

25 Accordingly, this invention addresses the problem of how to incorporate tow fibers into a hard surface cleaning article for capture and retention of the wide range of debris encountered in everyday cleaning by through the preferential placement of tow tufts on a cleaning sheet.

SUMMARY OF THE INVENTION

The invention comprises a cleaning article having a longitudinal axis and comprising a nonwoven carrier sheet. The cleaning article also has a plurality of discretely spaced tufts of tow fibers joined to the carrier sheet. The tufts are disposed in spaced apart rows. At least some of the rows are unequally spaced from adjacent rows. The rows may be oriented within plus or minus 45 degrees of the longitudinal axis and spaced apart from adjacent rows by a space having a width. The width of the space may decrease as the longitudinal axis is approached.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a schematic top view of a cleaning article according to the present invention and having discrete tufts, spaced in rows.

Figure 1A is a schematic flow chart of a process usable to produce the cleaning article of Figure 1.

Figure 2 is a schematic top view of a cleaning article according to the present invention and having discrete tufts, with tapered intra-tuft spaces therebetween.

Figure 2A is a schematic flow chart of a process usable to produce the cleaning article of Figure 2.

Figure 3 is a schematic top view of a cleaning article according to the present invention and having discrete tufts, with herringbone shaped trans-tuft spaces therebetween.

Figure 3A is a schematic flow chart of a process usable to produce the cleaning article of Figure 3.

Figure 4.1 is a schematic top view of a cleaning article according to the present invention and having two rows of discrete tufts, one row being disposed on either side of the longitudinal axis, and having a center space therebetween, the center space disposed on the longitudinal axis.

- 5 Figure 4.2 is a schematic top view of a cleaning article according to the present invention and having three rows of discrete tufts, one row being disposed on either side of the longitudinal axis, and having a center row therebetween, the center row being disposed on the longitudinal axis.

10 Figure 4A is a schematic flow chart of a process usable to produce the cleaning article of Figure 4.1.

Figure 5.1 is a schematic top view of a hybrid cleaning article according to the present invention and having discrete tufts, with the features of Figures 1 – 4 and further having flexible strips and a center cleaning strip element.

15

Figure 5.2 is a broken schematic bottom view of a cleaning article according to the present invention, showing a bond pattern aligned with the transverse axis on the left side of the cleaning article and a bond pattern aligned with the longitudinal axis and skewed relative thereto on the right side of the cleaning article.

20

Figure 6A is a perspective view of a floor cleaning implement suitable for use with the claimed invention and having a cleaning article attached thereto.

25 Figure 6B is a perspective view of a floor cleaning implement suitable for use with the present invention and which sprays liquid cleanser on the floor.

Figure 6C is a perspective view of a handle suitable for use with a duster type cleaning article according to the claimed invention.

DETAILED DESCRIPTION OF THE INVENTION

5 Referring to Figs. 1 – 5.2, the cleaning article 10 may be generally elongate, and rectangular, although other shapes are contemplated and feasible. The cleaning article 10 may comprise two or more components joined in a laminate form to provide cleaning article 10 suitable for floor cleaning. The cleaning article 10 may have a carrier sheet 12, which forms a chassis for attachment of other components thereto. The cleaning article 10 has a plurality of tufts 15. The
10 tufts 15 are disposed in rows 30, with spaces 31 between the rows 30. The spaces 31 may be arranged in lanes, providing distance between the rows 30 of tufts 15. This arrangement provides for advantageous debris collection and retention over the uniform tuft 15 geometry found in the prior art.

15 The cleaning article 10 may be disposable. By disposable it is meant that the cleaning article 10 may be used for one cleaning task, or generally for not more than several square meters, then discarded. In contrast, a reusable cleaning article 10 is laundered or otherwise restored after use.

The cleaning article 10 may have a longitudinal axis LA and a transverse axis TA orthogonal
20 thereto. The cleaning article 10, and respective components thereof, may have two longitudinal edges 20 parallel to the longitudinal axis LA and two transverse edges 22 parallel to the transverse axis TA.

The length of the cleaning article 10 is taken in the longitudinal direction. The width of the
25 cleaning article 10 corresponds to the transverse direction perpendicular to the length direction and disposed within the plane of the sheet 12. The thickness is defined as the dimension in the Z-direction. The XY plane is defined as the plane defined by the cleaning article 10. The Z-direction of the cleaning article 10 is the direction perpendicular to the plane of the cleaning article 10. The cleaning article 10 may have a length from 20 to 50 cm and a width of 10 to 20
30 cm. The cleaning article 10 may particularly be 30 +/- 2 cm long by 14 +/- 2 cm wide, as measured at the greatest dimensions, in order to fit the head 74 of a typical cleaning implement

70, as discussed below. An optional core may particularly have a width of 6.5 +/- 2 cm and a length of 26 +/- 2 cm. Of course, one of skill will recognize that other shapes are feasible and within the scope of the present invention.

- 5 The cleaning article 10 may have an outwardly facing cleaning side and an attachment side opposed thereto. The cleaning article 10 is intended to be used dry, although wet cleaning is contemplated and within the scope of the present invention. The cleaning article 10 may also have an optional absorbent core for wet cleaning.
- 10 More particularly, the cleaning article 10 may comprise a construction of at least one tow fiber tuft 15 and at least one carrier sheet 12. The tow fiber tuft 15 and carrier are joined in face-to-face relationship with at least one permanent bond 38 to form a laminate. The tow fiber tuft(s) 15 may be distended from and protrude outwardly from the plane of the carrier sheet 12.
- 15 The tufts 15 may be disposed directly on a carrier sheet 12. Optionally, the tufts 15 may be bonded to a precursor sheet 13, which in turn, is joined to a carrier sheet 12 as described below.

The carrier sheet 12 and/or precursor sheet 13 may particularly comprise a synthetic nonwoven. A carrier sheet 12 and/or precursor sheet 13 having synthetic fibers provides for convenient
20 joining of the tow fibers thereto. Nonwovens include spun bonded, carded and airlaid materials, as are known in the art and made from synthetic fibers. A suitable nonwoven sheet may be made according to commonly assigned 6,797,357. The carrier sheet 12 and/or precursor sheet 13 may optionally comprise a polyolefinic film, or a microfiber and be liquid pervious or impervious.

- 25 The carrier sheet 12 and/or precursor sheet 13 may comprise cellulose, to provide absorptive capacity. A cellulosic sheet may have permanent wet strength resin added thereto, as is known in the art. Or the carrier sheet 12 and/or precursor sheet 13 may preferably comprise a mixture of cellulosic and synthetic fibers, to provide both absorptive and barrier properties, and for convenient joining of the cleaning strip element 25. By cellulosic it is meant that the component
30 comprises a predominant weight percentage of cellulosic fibers.

The carrier sheet 12 and/or precursor sheet 13 may comprise a hydroentangled spunbond nonwoven with a basis weight of 20 to 80 gsm. A 45 gsm nonwoven from Avgol Nonwovens of Tel-Aviv, Israel has been found suitable. The carrier sheet 12 and/or precursor sheet 13 may
5 comprise a laminate of two, three or more plies joined together using adhesive 32 and/or thermal bonds 38 as are known in the art. Optional attachment stripes of loop or similar material may be joined to the attachment side to removably join the cleaning article 10 to a handle 72 or implement 70. One or more plies may comprise a microfiber, particularly a nylon microfiber, as is known in the art.

10

The cleaning article 10 may have an optional cleaning strip element 25. Particularly, the carrier sheet 12 may serve as a chassis for attachment of the cleaning strip element 25 thereto. The cleaning strip element 25 may comprise a polyolefinic film, having integral protrusions as disclosed in commonly assigned 8,407,848 or a rope of tow fibers. The cleaning strip element 25
15 may preferably comprise a mixture of wet laid fibers formed into a tissue which is bonded onto a synthetic nonwoven using a process such as spun lace or hydroentangling. The cleaning element 25 may particularly comprise a 23 gsm tissue with a 17 gsm polypropylene spunbond as a composite, sold under the name Genesis tissue by Suominen of Helsinki, Finland. Or, the cleaning strip element 25, precursor sheet 13 and/or the carrier sheet 12 may alternatively or
20 additionally comprise nylon microfiber.

25

The tow fibers, and tufts 15 formed therewith, may be synthetic, comprising polymers including polyester, polypropylene, polyethylene, bio-derived polymers such as polylactic acid, bio-polyethylene, bio-polyester and the like. Tow fibers may also include fibers from natural sources
25 such as cellulose, cellulose acetate, flax, hemp, jute and mixtures thereof manufactured wherein the individual fibers are relatively long strands manufactured in bundles. Preferred tow fibers are bicomponent fibers having a PP or PE core with a polyethylene sheath. The tow fibers may have a denier per filament of 1.5 to 8.0 and a total crimped denier in the tow band of 15,000 to 95,000. Tow fibers are a component in Swiffer® Dusters™ sold by the instant assignee.

30

The carrier sheet 12, precursor sheet 13 and tow fiber tuft(s) 15 may be joined by a plurality of permanent bonds 38. The bonds 38 are intended to minimize or prevent stray or dislodged tow fibers from becoming loose. Such sheets 12 and tow fiber tuft(s) 15 may typically be directly superimposed on one another, with or without intervening members or components
5 therebetween. The bonds 38 may be ultrasonic bonds 38, adhesive 32 bonds 38, thermal bonds 38 or a combination thereof, as are known in the art.

Referring particularly to Fig. 1, the cleaning article 10 may have discrete tow fiber tufts 15 disposed in rows 30. The rows 30 of tufts 15 may be cascaded to form a grid of tufts 15. The
10 rows 30 may be parallel to the transverse axis, and generally aligned in the back and forth direction in ordinary use. This arrangement provides the benefit that larger debris can be intercepted in the space between the rows 30 during ordinary use, while smaller debris is intercepted by the tufts 15.

15 While six parallel and equally spaced rows 30 are shown, the invention is not so limited. Prophetically from two to 15 rows 30 could be used, with equal or unequal spacing and equal or unequal width and equal or unequal tuft 15 density. The rows 30 may be mutually parallel to the transverse axis, mutually skewed thereto or be mutually skewed relative to other rows 30. Optionally, adhesive 32 may be disposed in the spaces 31 between the rows 30. The rows 30
20 may extend throughout the transverse direction as shown, or be interrupted at the longitudinal axis.

In one particularly nonlimiting embodiment the tufts 15 may be spaced on an inter-row pitch T1 of 1 to 3 cm, a center to edge tuft 15 distance T2 of 0.5 to 1.5 cm, and a transverse tuft 15
25 spacing T4 of 0.1 to 0.5 cm. The rows 30 may have a length in the transverse direction C1 of 8 to 16 cm and a spaced apart in the longitudinal direction C2 0.5 to 1.5 cm.

This geometry provides the benefit that when used with a common sized cleaning implement 70, such as the Swiffer® Sweeper™ implement 70 sold by the instant assignee, the rows 30 and
30 spaces 31 may wrap the nose of the head 74 of the cleaning implement. Wrapping the nose of

the head 74 of the cleaning implement 70 is believed to improve cleaning along walls and baseboards.

Referring to Fig. 1A, this cleaning article 10 may be made by providing a precursor sheet 13 as in
5 Step 1. Tow fibers are stretched across the precursor sheet 13 in the longitudinal direction, as shown in Step 2. The tow fibers are bonded to the precursor sheet 13 in the transverse direction, as shown in Step 3. Tufts 15 are created by slitting the precursor sheet 13 between the bonds 38, as shown in Step 3. The precursor sheet 13 and tufts 15 are cut into discrete rows 30 and separated, as shown in Steps 4 - 5. A carrier sheet 12 is provided, as in Step 6. The carrier sheet
10 12 is coated with adhesive 32, as shown in Step 7. The rows 30 of tufts 15 are disposed on the carrier sheet 12 and held in place by the adhesive 32, as shown in Step 8. Optionally the tufts 15 may be fluffed with blowing air to enlarge the tufts 15, as in Step 9.

Referring particularly to Fig. 2, the cleaning article 10 may have discrete tow fiber tufts 15
15 disposed in variable width rows 30. The variable width rows 30 may be generally parallel to the transverse axis, and generally aligned in the back and forth direction in ordinary use. Between the rows 30 of tufts 15 are variable width spaces 31. This arrangement provides the benefit that larger debris can be intercepted in the space 31 between the rows 30 during ordinary use, while smaller debris is intercepted by the tufts 15. The variable width provides the benefit that larger
20 debris can transversely enter the space 31 further and further until intercepted by the adjacent rows 30. The spaces 31 may taper inwardly as the longitudinal axis is approached.

While four generally parallel and equally spaced rows 30 are shown, the invention is not so limited. Prophetically from two to 15 rows 30 could be used, with equal or unequal spacing and
25 equal or unequal variable widths and equal or unequal tuft 15 density. The rows 30 may be mutually parallel to the transverse axis, mutually skewed thereto or be mutually skewed relative to other rows 30. Optionally, adhesive 32 may be disposed in the spaces 31 between the rows 30. The rows 30 may both extend throughout the transverse direction and be interrupted at the longitudinal axis. The tapered intra-tuft 15 spaces 31 between the tufts 15 provide the benefit
30 that no tufts 15 are interrupted by the spaces 31. Thus all tufts 15 can be selected to be of a size large enough for efficacious cleaning.

In one particularly nonlimiting embodiment the spaces 31 may have an opening T1 of 1 to 3 cm. The rows 30 may have a width at the edge of the cleaning article 10 T2 of 0.5 to 1.5 cm, and width nearer the end of the space 31 T3 of 0.5 to 1 cm. A transverse tuft 15 spacing T4 of 0.1 to 0.5 cm may be used. The spaces 31 may have a length in the transverse direction C1 of 3 to 8
5 cm and be spaced apart in the longitudinal direction C2 0.5 to 1.5 cm. The rows 30 may be longitudinally separated by a distance S1 of 2 to 8 cm.

This geometry provides the benefit that when used with a common sized cleaning implement 70, such as the Swiffer® Sweeper™ implement 70 sold by the instant assignee, the rows 30 and
10 spaces 31 may wrap the nose of the head 74 of the cleaning implement. Wrapping the nose of the head 74 of the cleaning implement 70 is believed to improve cleaning along walls and baseboards. The amount of tufts 15 on the nose can be controlled by and is inversely proportional to the width of the spaces 31.

15 Referring to Fig. 2A, this cleaning article 10 may be made by providing a precursor sheet 13 as in Step 1. Tow fibers are stretched across the precursor sheet 13 in the longitudinal direction, as shown in Step 2. The tow fibers are bonded to the precursor sheet 13 in the transverse direction, as shown in Step 3. Tufts 15 are created by slitting the precursor sheet 13 between the bonds 38, as shown in Step 3. The precursor sheet 13 and tufts 15 are cut to provide prospective spaces 31,
20 as shown in Step 4. The waste material of precursor sheet 13 and unused tufts 15 are vacuumed away, to yield the spaces 31, as shown in Step 5. A carrier sheet 12 is provided, as in Step 6. The carrier sheet 12 is coated with adhesive 32, as shown in Step 7. The precursor sheet 13 and tufts 15 are disposed on the carrier sheet 12 and held in place by the adhesive 32, as shown in Step 8. Optionally the tufts 15 may be fluffed with blowing air to enlarge the tufts 15, as in Step
25 9.

Referring particularly to Fig. 3, the cleaning article 10 may have rows 30 defined by trans-tuft 15 spaces 31. These rows 30 and spaces 31 may be disposed in a herring bone pattern. The spaces 31 and rows 30 may be of constant width as shown or discrete tow fiber tufts 15 may be disposed
30 in variable width rows 30. The rows 30 may be generally skewed to the transverse axis, and generally mis-aligned in the back and forth direction in ordinary use. Between the rows 30 of tufts 15 are constant or variable width spaces 31. This arrangement provides the benefit that

larger debris can be intercepted in the space 31 between the rows 30 during ordinary use, while smaller debris is intercepted by the tufts 15. The skewed row 30 direction provides the benefit that captured debris is not dislodged and released during back and forth movements during ordinary cleaning.

5

While seven generally parallel and equally spaced rows 30 are shown, the invention is not so limited. Prophetically from two to 15 rows 30 could be used, with equal or unequal spacing and equal or unequal widths and equal or unequal tuft 15 density. The widths of the rows 30 and spaces 31 may be constant or variable. The rows 30 adjacent one longitudinal edge may be mutually skewed to the transverse axis or be mutually skewed relative to other rows 30. The rows 30 on opposed longitudinal edges may be herring bone shaped, may be mutually parallel, or may be disposed in any other suitable pattern. Optionally, adhesive 32 may be disposed in the spaces 31 between the rows 30. The rows 30 may extend throughout the transverse direction or be interrupted at the longitudinal axis. The trans-tuft 15 spaces 31 provide the benefit that different sizes of tufts 15 are formed, for different sizes of debris piles. Thus, if a smaller tuft 15 becomes loaded with debris, a larger tuft 15 can intercept debris later encountered during the cleaning process.

In one particularly nonlimiting embodiment the spaces 31 may have an opening T1 of 0.5 to 3 cm. The row 30 may have a width at the edge of the cleaning article 10 T2 of 0.5 to 1.5 cm. The spaces 31 may have a length C1 of 3 to 8 cm. The rows 30 may be longitudinally separated by a transverse distance S1 of 2 to 8 cm.

This geometry provides the benefit that when used with a common sized cleaning implement 70, such as the Swiffer® Sweeper™ implement 70 sold by the instant assignee, the rows 30 and spaces 31 may wrap the nose of the head 74 of the cleaning implement. Wrapping the nose of the head 74 of the cleaning implement 70 is believed to improve cleaning along walls and baseboards. The amount of tufts 15 on the nose can be controlled by and is inversely proportional to the width of the spaces 31.

30

Referring to Fig. 3A, this cleaning article 10 may be made by providing a precursor sheet 13 as in Step 1. Tow fibers are stretched across the precursor sheet 13 in the longitudinal direction, as shown in Step 2. The tow fibers are bonded to the precursor sheet 13 in the transverse direction, as shown in Step 3. Tufts 15 are created by slitting the precursor sheet 13 between the bonds 38, as shown in Step 3. The precursor sheet 13 and tufts 15 are cut to provide prospective spaces 31, as shown in Step 4. The waste material of carrier sheet 13 and unused tufts 15 are vacuumed away, to yield the spaces 31, as shown in Step 5. A carrier sheet 12 is provided, as in Step 6. The carrier sheet 12 is coated with adhesive 32, as shown in Step 7. The precursor sheet 13 and tufts 15 are disposed on the carrier sheet 12 and held in place by the adhesive 32, as shown in Step 8. Optionally the tufts 15 may be fluffed with blowing air to enlarge the tufts 15, as in Step 9.

Referring generally to Figs. 1 – 3A, the tufts 15 may be disposed on a differential pitch. The pitch is the distance between centers of tufts 15 taken parallel to the longitudinal axis or parallel to the transverse axis. As shown on imaginary lines 99A and 99B, the pitch may change as the longitudinal axis is approached, providing a differential pitch, and thus a differential tuft 15 density. The pitch may increase, and density decrease, as a longitudinal edge (parallel to the longitudinal axis) is approached, or vice versa. This arrangement provides the benefit that debris is more easily entrapped and retained by the cleaning article 10.

20

If desired, a precursor sheet 13 having cutouts may be used without a carrier sheet 12. This arrangement provides the benefit of conserving material, but may sacrifice strength.

The pitch, and thus tuft 15 density, may be constant at any predetermined spacing from the longitudinal edge. The tufts 15 may be bilaterally staggered relative to the longitudinal axis and transverse axis. The tufts 15 may fully overlap the position of adjacent tufts 15, in both directions, to provide adequate spacing therebetween and debris retention during back and for the sweeping. Alternatively, each tuft 15 having a maximum diameter, or other maximum dimension taken parallel to the longitudinal axis, and the pitch between adjacent tufts 15 in a particular row may be greater than the maximum diameter/dimension.

30

The cleaning article according may be tri-folded generally parallel to said longitudinal axis, as is common in the art. This arrangement provides two outboard trisections, commonly used for attachment to the head 74 of a cleaning implement. If desired, tufts 15 may be disposed in at least one of, and optionally both of, the outboard trisections, to provide for cleaning along walls
5 and baseboards.

Referring particularly to Figs. 4.1 and 4.2, the cleaning article 10 may have discrete tow fiber tufts 15 disposed in rows 30 with at least one longitudinal space 31 therebetween. The rows 30 may be parallel to the longitudinal axis, and generally aligned across the back and forth direction
10 in ordinary use. This arrangement provides the benefit that larger debris can be intercepted in the space 31 between the rows 30 during ordinary use, while smaller debris is intercepted by the tufts 15. The space 31 between the rows 30 can be used to capture debris during turning to the side or by using a stomp motion at the end of a cleaning process. This arrangement provides efficacious hair pickup and is suitable for households having pets.

15

While two parallel and equally sized rows 30 are shown, the invention is not so limited. Prophetically from two to 10 rows 30 could be used, with equal or unequal spacing and equal or unequal width and equal or unequal tuft 15 density. The rows 30 may be of constant or variable width. The rows 30 may be mutually parallel to the longitudinal axis, mutually skewed thereto or
20 be mutually skewed relative to other rows 30. Optionally, adhesive 32 may be disposed in the spaces 31 between the rows 30. The rows 30 may extend throughout the longitudinal direction as shown, or be interrupted at the transverse axis.

In one particularly nonlimiting embodiment with two rows 30, as shown in Fig. 4.1, the rows 30
25 may have a width S1 of 2 to 8 cm. The space 31 between the rows 30 S2 may be 1 to 4 cm. In one particularly nonlimiting embodiment with three rows 30, as shown in Fig. 4.2, the outboard rows 30 may have a width S1 of 1 to 8 cm. The center row 30 may have a width S3 of 1 to 6 cm. The space 31 between the rows 30 S2 may be 0.5 to 4 cm.

30 This geometry provides the benefit that when used with a common sized cleaning implement 70, such as the Swiffer® Sweeper™ implement 70 sold by the instant assignee, the rows 30 and

spaces 31 may wrap the nose of the head 74 of the cleaning implement. Wrapping the nose of the head 74 of the cleaning implement 70 is believed to improve cleaning along walls and baseboards. Wrapping the nose of the cleaning implement is believed to improve cleaning along walls and baseboards.

5

Referring to Fig. 4A, the cleaning article 10 of Fig. 4.1 may be made by providing a precursor sheet 13 as in Step 1. Tow fibers are stretched across the precursor sheet 13 in the longitudinal direction, as shown in Step 2. The tow fibers are bonded to the precursor sheet 13 in the transverse direction, as shown in Step 3. Tufts 15 are created by slitting the precursor sheet 13 between the bonds 38, as shown in Step 3. The precursor sheet 13 and tufts 15 are cut into discrete rows 30 and separated, as shown in Steps 4 - 5. A carrier sheet 12 is provided, as in Step 6. The carrier sheet 12 is coated with adhesive 32, as shown in Step 7. The rows 30 of tufts 15 are disposed on the carrier sheet 12 and held in place by the adhesive 32, as shown in Step 8. Optionally the tufts 15 may be fluffed with blowing air to enlarge the tufts 15, as in Step 9. The cleaning article 10 of Fig. 4.2, and similar cleaning articles 10

10
15

Referring to Fig. 5.1, the cleaning article 10 may optionally have strips 17. The strips 17 have an aspect ratio of length to width greater than 1. Optionally, an elongate tow fiber rope oriented generally parallel to and optionally coincident the longitudinal axis LA may be used. A cleaning strip element 25 may be disposed partially on or throughout the longitudinal axis LA. A combination of intra-tuft 15 spaces 31 and trans-tuft 15 spaces 31 may be used to create rows 30 of constant width, variable width, equal and unequal spacing, parallel to the longitudinal axis, parallel to the transverse axis and skewed relative thereto.

20
25

Differential pitch may be achieved as a function of tuft 15 size. The tufts 15 may increase in size, and thus pitch, as the longitudinal axis is approached. Alternatively, the tufts 15 may maintain constant pitch relative to the longitudinal axis, and decrease in size as one or both longitudinal edges are approached. Thus the tufts 15 may increase in size and decrease in pitch as the longitudinal axis is approached. One tuft 15 may touch an adjacent tuft 15 or be spaced therefrom.

30

As shown in Figs. 5.1 and 5.2, differential spacing between adjacent tufts 15 may simply be accomplished by disposing different tufts 15, and preferably rows thereof, on different pitches. This arrangement provides the benefit that the differential spacing may be obtained without
5 complex and extraneous manufacturing steps. Preferably the differential pitch increases by at least 25%, 50%, 100% or 200% of the smaller pitch under consideration. This difference is believed to be suitable for entrapment of large debris, while a smaller difference may not be efficacious.

10 Referring particularly to Fig. 5.2 the differential pitch of the tufts 15 may be accomplished by differential spacing of the bonds 38. This arrangement advantageously results in different sizes of tufts 15. If the cuts are not aligned and the bonds 38 are aligned without an intervening cut, this arrangement advantageously also provides bridge portions of bonded tow fibers between the tufts
15

15

Referring generally to any of Figs. 1 –5.2, any of the carrier sheet 12, precursor sheet 13 and/or tufts 15 of tow fibers may optionally be completely or partially coated with adhesive 32, wax, Newtonian oils and/or non-Newtonian oils or a combination thereof, in order to improve cleaning and increase retention of absorbed debris. Particularly, the tow fiber tuft 15, in any
20 configuration, may be coated with a mineral oil coating. The coating may comprise a mixture of mineral oil and surfactant at a ratio of about 90% to 10% oil to surfactant. The surfactant provides the benefit inducing the oil to wet the tow fibers by reducing the surface energy. The surfactant may be a non-ionic surfactant.

25 The carrier sheet 12 and precursor sheet 13 may both comprise a nonwovens and be ultrasonically bonded. Or the carrier sheet 12 and precursor sheet 13 may be adhesively 32 bonded. This arrangement provides the benefit that if the carrier sheet 12 is adhesively 32 coated throughout, adhesive 32 will be disposed in the spaces 31 between the rows 30 and be available for collection and retention of debris.

30

The spaces 31 between the tufts 15 may range from 0.3, 0.5, 0.7, 1, 1.5 cm to 8, 7, 6, 5, or 4 cm, and particularly from 0.5 to 3 cm, 0.5 to 2.5 cm, 0.8 cm to 2 cm, or 1 to 1.5 cm or any range

therebetween, and encompassing any of the aforementioned endpoints in any combination. A space 31 having this width between adjacent tufts 15 may form a lane between adjacent tufts 15 and is believed to be suitable for picking up large debris which is not always captured by the tow fibers. The lane may form a straight line, to allow entry of debris. The width of a space 31 is measured between the closest portions of adjacent tufts 15 when the tufts are in a normal configuration as lightly compressed against a target surface.

This spacing may provide a differential pitch between tufts 15. The differential pitch is measured in a straight line 99A, 99B between the centers of adjacent tufts 15 and is independent of the size of the tufts 15. The lines 99A, 99B may be parallel to the longitudinal axis LA, the transverse axis TA or skewed. The pitch may have a difference of at 25%, 50%, 100% or 200% of the smaller pitch under consideration to provide for efficacious collection of both large and small debris.

Referring to Figs. 6A and 6B, the cleaning article 10 may be removably attachable to a cleaning implement 70 for use with dry, wet and/or prewetted cleaning, depending upon the particular task. The cleaning implement 70 may have a head 74 for receiving the cleaning article 10 and an elongate handle 72 joined thereto. A typical floor cleaning implement 70 has a handle 72 for grasping by the user and a head 74 attached thereto, and preferably pivotally attached thereto. The head 74 moves against the floor, or other target surface. The cleaning article 10 may be removably attached to the bottom of the head 74. An attachment system may provide for removable attachment of the cleaning article 10 to a suitable and optional handle 72. Removable attachment of the cleaning article 10 to the implement 70 may be accomplished using adhesive 32, hook and loop systems, elongate sleeves, grippers, etc. Grippers and a suitable cleaning implement 70 are disclosed in commonly assigned 6,484,356.

Referring to Fig. 6B, the cleaning article 10 may optionally be used with a cleaning solution or other solution usable for other purposes such as treating the surface for appearance or disinfectant, etc. A floor cleaning implement 70 may allow for cleaning of the floor while the user is upright, and may also provide for spraying of cleaning solution or other liquid to the floor from a reservoir 75 through one or more nozzles 76. Suitable spray implements 70 are disclosed in commonly assigned 5,888,006; 5,988,920; 6,842,936; 7,182,537; 7,536,743; 7,676,877 and

8,186,898. The cleaning solution may be pre-applied to the cleaning article 10, creating a pre-moistened cleaning article 10 or may be contained within a separate reservoir 75 for dosing onto the cleaning article 10 and/or target surface. The cleaning solution may comprise a majority water, and at least about 0.5, 2, 5 or 10 weight percent solids, or at least about 30 or 50 weight percent aqueous solvents, non-aqueous solutions or mixtures thereof. A suitable implement 70 having an optional vacuum is disclosed in 7,137,169.

Referring to Fig. 6C, the implement 70 may have a handle 72 and head 74 used in fixed relationship and comprising one or more tines 73. The tines 73 may be inserted into sleeves in the cleaning article 10. This arrangement allows the cleaning article 10 to be conveniently used as a duster for cleaning small object and tight spaces 31. Suitable implements 70 for a duster type cleaning article 10 are disclosed in commonly assigned US 8,578,564 and D674,949 S.

If desired, the cleaning article 10 may be used with and removably attached to an autonomously moving robot or drone. Suitable examples of robots and drones for use with the cleaning article of the present invention are found in commonly assigned patents 6,941,199; 6,810,305; 6,779,217; 6,481,515; 6,459,955 and Serial No. 14/992,195, filed Jan. 11, 2016, P&G Case 14189. Examples of robots for use with wet and dry cleaning are found in 7,389,156; 8,774,966 and 8,855,813. A data control system may be utilized with the cleaning article 10, as described in 7,431,524.

The cleaning article 10 may also be used manually, without a handle 72 or implement 70. If desired, various cleaning articles 10 described herein may be packaged and sold in a kit. This arrangement provides the benefit that the user has a choice of different cleaning articles 10 for different tasks. For example, if desired, plural sizes of the cleaning articles 10 may be sold together as a single kit. This arrangement allows the user to select the particular cleaning article 10 best suited for the immediate task.

The cleaning article according to the present invention may be made according to any of the following nonlimiting paragraphs, in any combination.

A. A cleaning article having a longitudinal axis and comprising:

a nonwoven carrier sheet,

5 a plurality of discretely spaced tufts of tow fibers joined to said carrier sheet, said tufts being disposed in spaced apart rows, said rows being oriented within plus or minus 45 degrees of said longitudinal axis and spaced apart from adjacent rows by a space, each said space having a width, wherein said widths of said at least some said spaces are unequal.

B. A cleaning article according to paragraph A wherein said tufts in said rows are of the same size.

10

C. A cleaning article according to paragraphs A and B wherein said tufts are bilaterally staggered and said rows non-monotonically taper intra-tuft as said longitudinal axis is approached.

15

D. A cleaning article according to paragraphs A, B and C wherein said spaces do not intercept said longitudinal axis.

E. A cleaning article according to any preceding paragraph wherein said spaces cross said longitudinal axis.

20

F. A cleaning article according to any preceding paragraph having two longitudinal edges parallel to said longitudinal axis and further comprising strips intercepting each said longitudinal axis.

25

G. A cleaning article having a longitudinal axis and a transverse axis perpendicular thereto, said cleaning article comprising:

a nonwoven carrier sheet,

30 a plurality of discretely spaced tufts of tow fibers joined to said carrier sheet, said tufts being disposed in spaced apart rows, said rows being oriented within plus or minus 45 degrees of said transverse axis and spaced apart from adjacent rows by a space, rows being disposed in a herringbone pattern.

- H. A cleaning article according to paragraph G wherein said rows are of substantially constant width.
- I. A cleaning article according to paragraphs G and H wherein said rows are of substantially constant width, and further comprising tufts disposed on said longitudinal axis.
- J. A cleaning article according to paragraphs G, H and I wherein said rows are of substantially constant width and said spaces are of substantially constant width.
- K. A cleaning article according to paragraphs G, H, I and J further comprising adhesive in said spaces between said rows.
- L. A cleaning article having a longitudinal axis, a transverse axis perpendicular thereto, a pair of spaced apart longitudinal edges, and pair of spaced apart transverse edges and comprising:
a nonwoven carrier sheet, and
a plurality of discretely spaced tufts of tow fibers joined to said carrier sheet, said tufts being disposed in spaced apart rows, said rows having a row width and being oriented substantially parallel to one of said longitudinal axis or said transverse axis, each said row being spaced apart from adjacent rows by a space having a space width, said space width being at least 0.5 cm
- M. A cleaning article according to paragraph L wherein said rows are substantially parallel to said transverse axis and each said row has a width parallel to said longitudinal axis, said space width being at least 1 cm, said spaces extending substantially between said transverse edges.
- N. A cleaning article according to paragraph L wherein said rows are substantially parallel to said longitudinal axis and each said row has a width parallel to said longitudinal axis, said spaces being rectilinear, said spaces extending substantially between said transverse edges.

5 O. A cleaning article according to paragraphs L and M, wherein said rows are substantially parallel to said transverse axis and each said row has a width parallel to said longitudinal axis, said width in a plurality of said rows being defined by at least two adjacent tufts, said spaces between said rows intercepting both said longitudinal edges without interruption by tufts.

10 P. A cleaning article according to paragraphs L and N, wherein said rows are substantially parallel to said longitudinal axis and each said row has a width parallel to said transverse axis, said spaces between said rows intercepting said transverse edges.

Q. A cleaning article according to paragraphs L, N and P comprising two said rows disposed substantially parallel to said longitudinal axis, one said row being disposed on each side of said longitudinal axis, whereby said longitudinal axis is free of tufts.

15 R. A cleaning article according to paragraphs L, N, P and Q comprising at least two said rows disposed substantially parallel to said longitudinal axis, one said row being disposed on each side of said longitudinal axis, whereby said longitudinal axis is free of tufts, said rows and said space therebetween having substantially mutually equivalent widths.

20 S. A cleaning article according to paragraphs L, N, P, Q and R comprising at least two said rows disposed substantially parallel to said longitudinal axis, one said row being disposed on each side of said longitudinal axis, whereby said longitudinal axis is free of tufts and further comprising outboard trisections disposed outwardly of said rows and being free of said tufts.

25 T. A cleaning article according to paragraphs L, N, P, Q, R and S comprising at least two said rows disposed substantially parallel to said longitudinal axis, one said row being disposed on each side of said longitudinal axis, whereby said longitudinal axis is free of tufts and further comprising adhesive in said spaces between said rows.

The dimensions and values disclosed herein are not to be understood as being strictly limited to the exact numerical values recited. Instead, unless otherwise specified, each such dimension is intended to mean both the recited value and a functionally equivalent range surrounding that value. For example, a dimension disclosed as “40 mm” is intended to mean “about 40 mm” and
5 a pressure disclosed as “about 1100 kPa” is intended to include 1103.2 kPa.

Every document cited herein, including any cross referenced or related patent or application, is hereby incorporated herein by reference in its entirety unless expressly excluded or otherwise limited. The citation of any document is not an admission that it is prior art with respect to any
10 invention disclosed or claimed herein or that it alone, or in any combination with any other reference or references, teaches, suggests or discloses any such invention. Further, to the extent that any meaning or definition of a term in this document conflicts with any meaning or definition of the same term in a document incorporated by reference, the meaning or definition assigned to that term in this document shall govern. All limits shown herein as defining a range
15 may be used with any other limit defining a range. That is the upper limit of one range may be used with the lower limit of another range, and vice versa.

While particular embodiments of the present invention have been illustrated and described, it would be obvious to those skilled in the art that various other changes and modifications can be
20 made without departing from the spirit and scope of the invention. It is therefore intended to cover in the appended claims all such changes and modifications that are within the scope of this invention.

What is claimed is:

1. A cleaning article 10 having a longitudinal axis LA, a transverse axis TA perpendicular thereto, two spaced apart longitudinal edges 20, two spaced apart transverse edges 22 and comprising:

5 a nonwoven carrier sheet 12,

a plurality of discretely spaced tufts 15 of tow fibers joined to said carrier sheet 12, said tufts 15 being disposed in spaced apart rows 30, characterized by being spaced apart from adjacent rows 30 by a space 31, each said space 31 having a width, wherein said widths of said at least some said spaces 31 are unequal.

10

2. A cleaning article 10 according to claim 1 wherein said tufts 15 in said rows 30 are of the same size.

15

3. A cleaning article 10 according to any of claims 1 or 2 wherein said tufts 15 are bilaterally staggered and said rows 30 non-monotonically taper intra-tuft 15 as said longitudinal axis LA is approached.

4. A cleaning article 10 according to any previous claim wherein said rows 30 are disposed in a herringbone pattern.

20

5. A cleaning article 10 according to any of claims 1 or 2, each said row 30 having a row width and being oriented substantially parallel to one of said longitudinal axis LA or said transverse axis TA, each said row 30 being spaced apart from adjacent rows 30 by a space 31 having a space width, said space width being at least 0.5 cm.

25

6. A cleaning article 10 according to any of claims 1 or 2 wherein said rows 30 are substantially parallel to said transverse axis TA and each said row 30 has a width parallel to said longitudinal axis LA, said space width being at least 1 cm, said spaces 31 extending substantially between said transverse edges 22.

30

7. A cleaning article 10 according to claim 6, wherein said rows 30 are substantially parallel to said transverse axis TA and each said row 30 has a width parallel to said longitudinal axis LA, said widths in a plurality of said rows 30 being defined by at least two adjacent tufts 15, said spaces 31 between said rows 30 intercepting both said longitudinal edges 20 without interruption by said tufts 15.
8. A cleaning article 10 according to any of claims 1 or 2 wherein said rows 30 are substantially parallel to said longitudinal axis LA and each said row 30 has a width parallel to said longitudinal axis LA, said spaces 31 being rectilinear, said spaces 31 extending substantially between said transverse edges 22.
9. A cleaning article 10 according to any of claims 1, 2 or 8 comprising two said rows 30 disposed substantially parallel to said longitudinal axis LA, one said row 30 being disposed on each side of said longitudinal axis, whereby said longitudinal axis LA is free of tufts 15.
10. A cleaning article 10 according to the preceding claim wherein, said rows 30 and said spaces 31 therebetween has substantially mutually equivalent widths.
11. A cleaning article 10 according to any of claims 1, 2, or 4 wherein said rows 30 are of substantially constant width.
12. A cleaning article 10 according to the preceding claims further comprising tufts 15 disposed on said longitudinal axis LA.
13. A cleaning article 10 according to claim 11 wherein said spaces 31 are of substantially constant width.
14. A cleaning article 10 according to any previous claim further comprising adhesive 32 in said spaces 31 between said rows 30.
15. A cleaning article 10 according to any preceding claim having two longitudinal edges parallel to said longitudinal axis LA and further comprising strips 17 intercepting each said longitudinal axis.

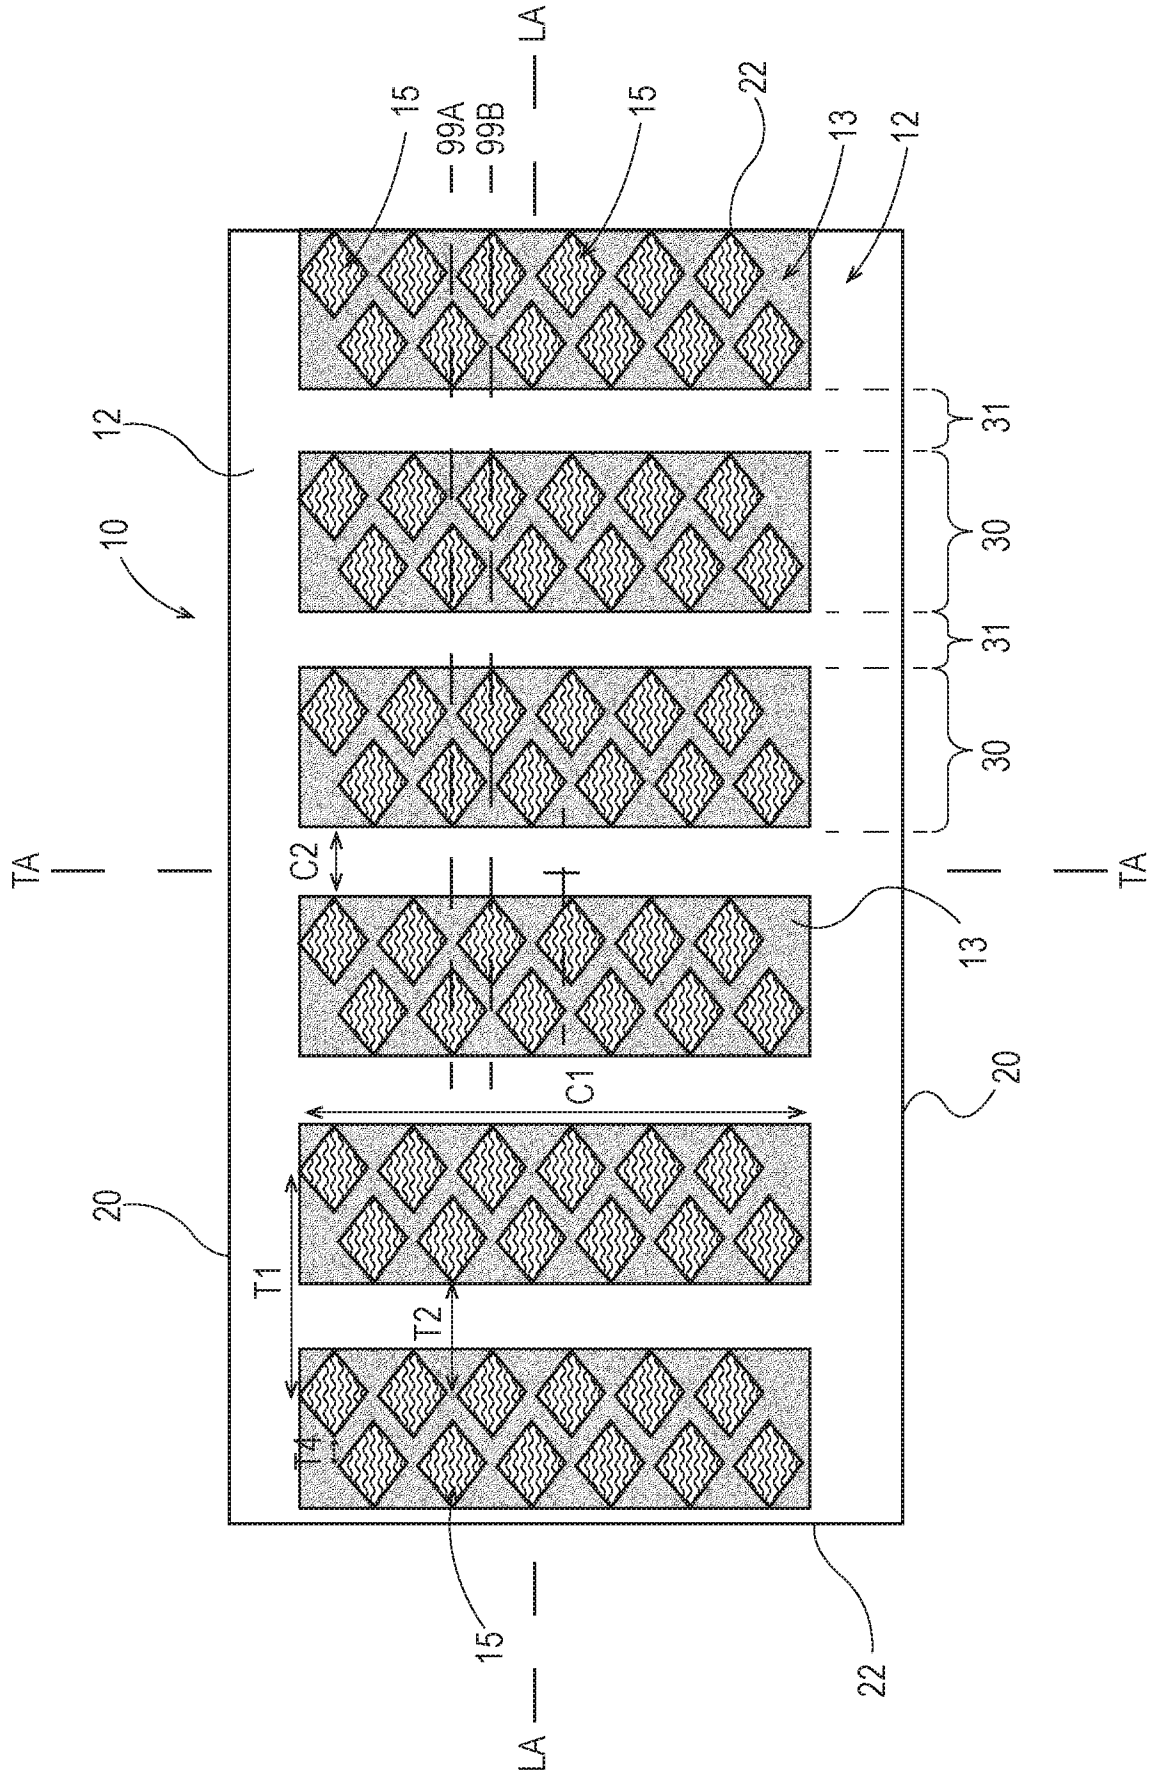


Fig. 1


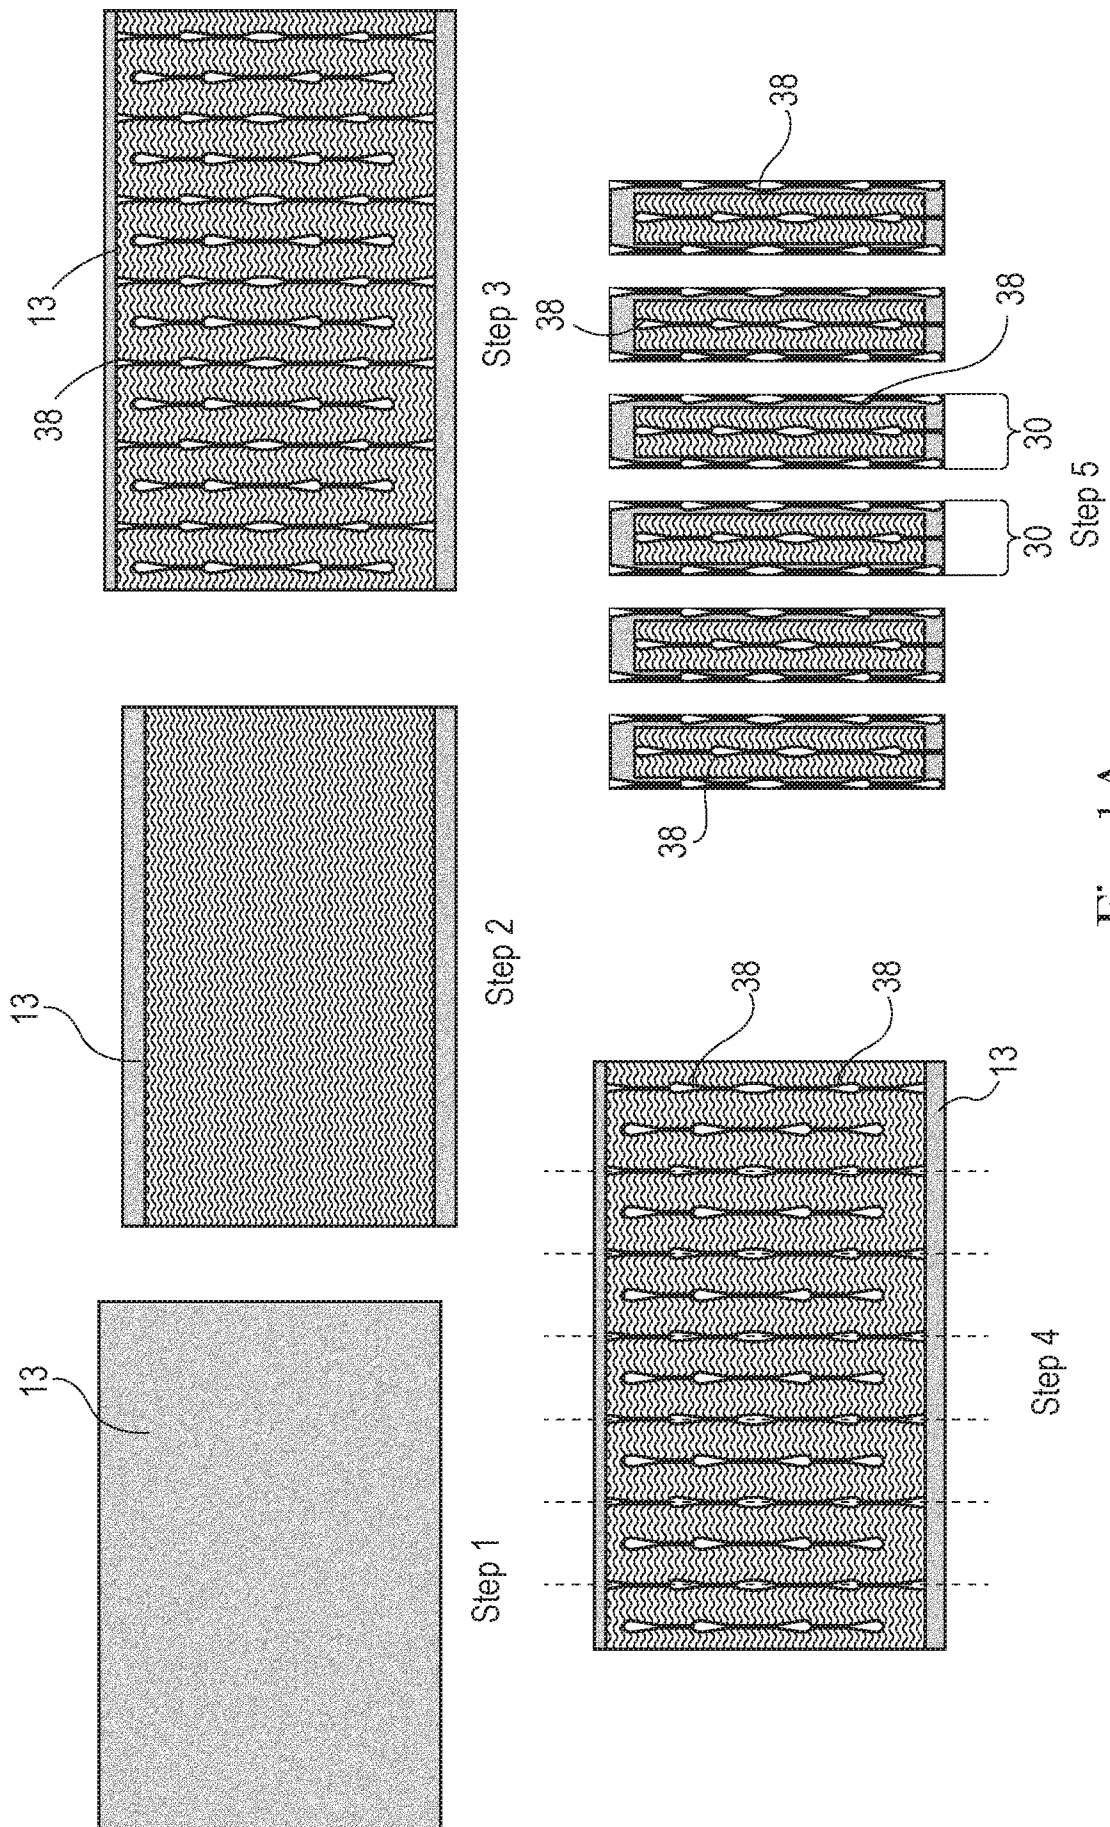


Fig. 1A

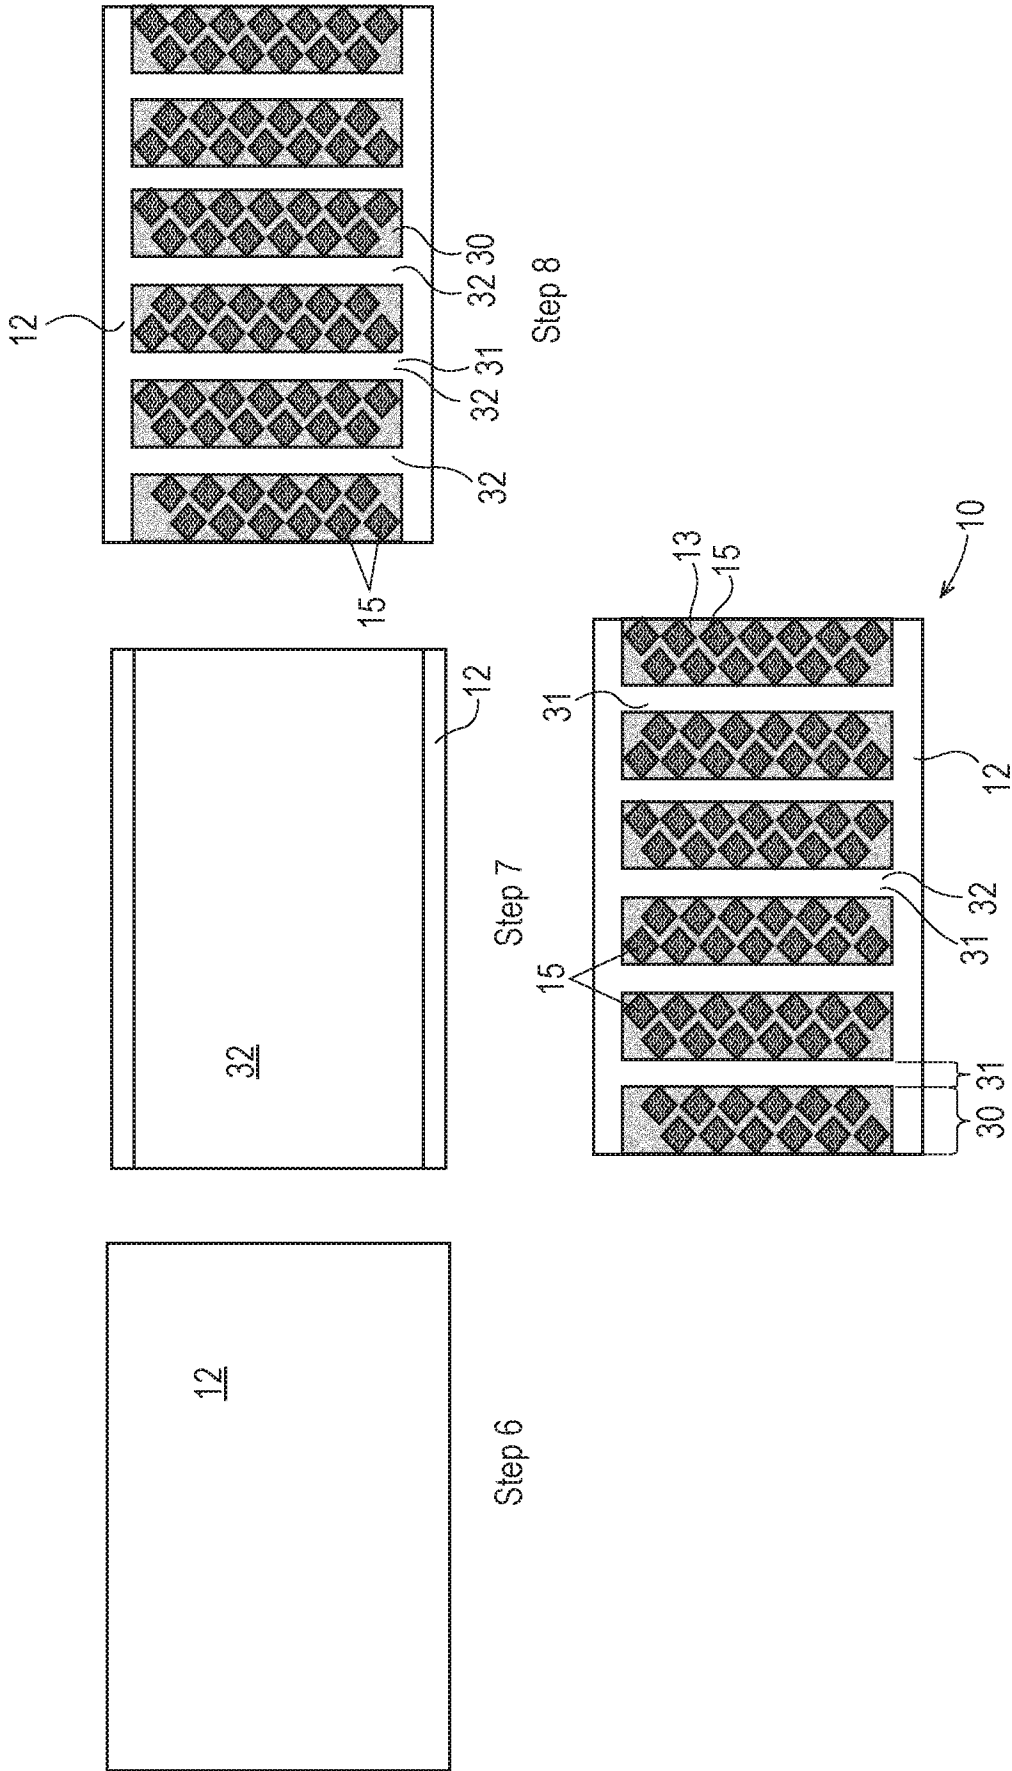

Step 9
Fig. 1A
(continued)

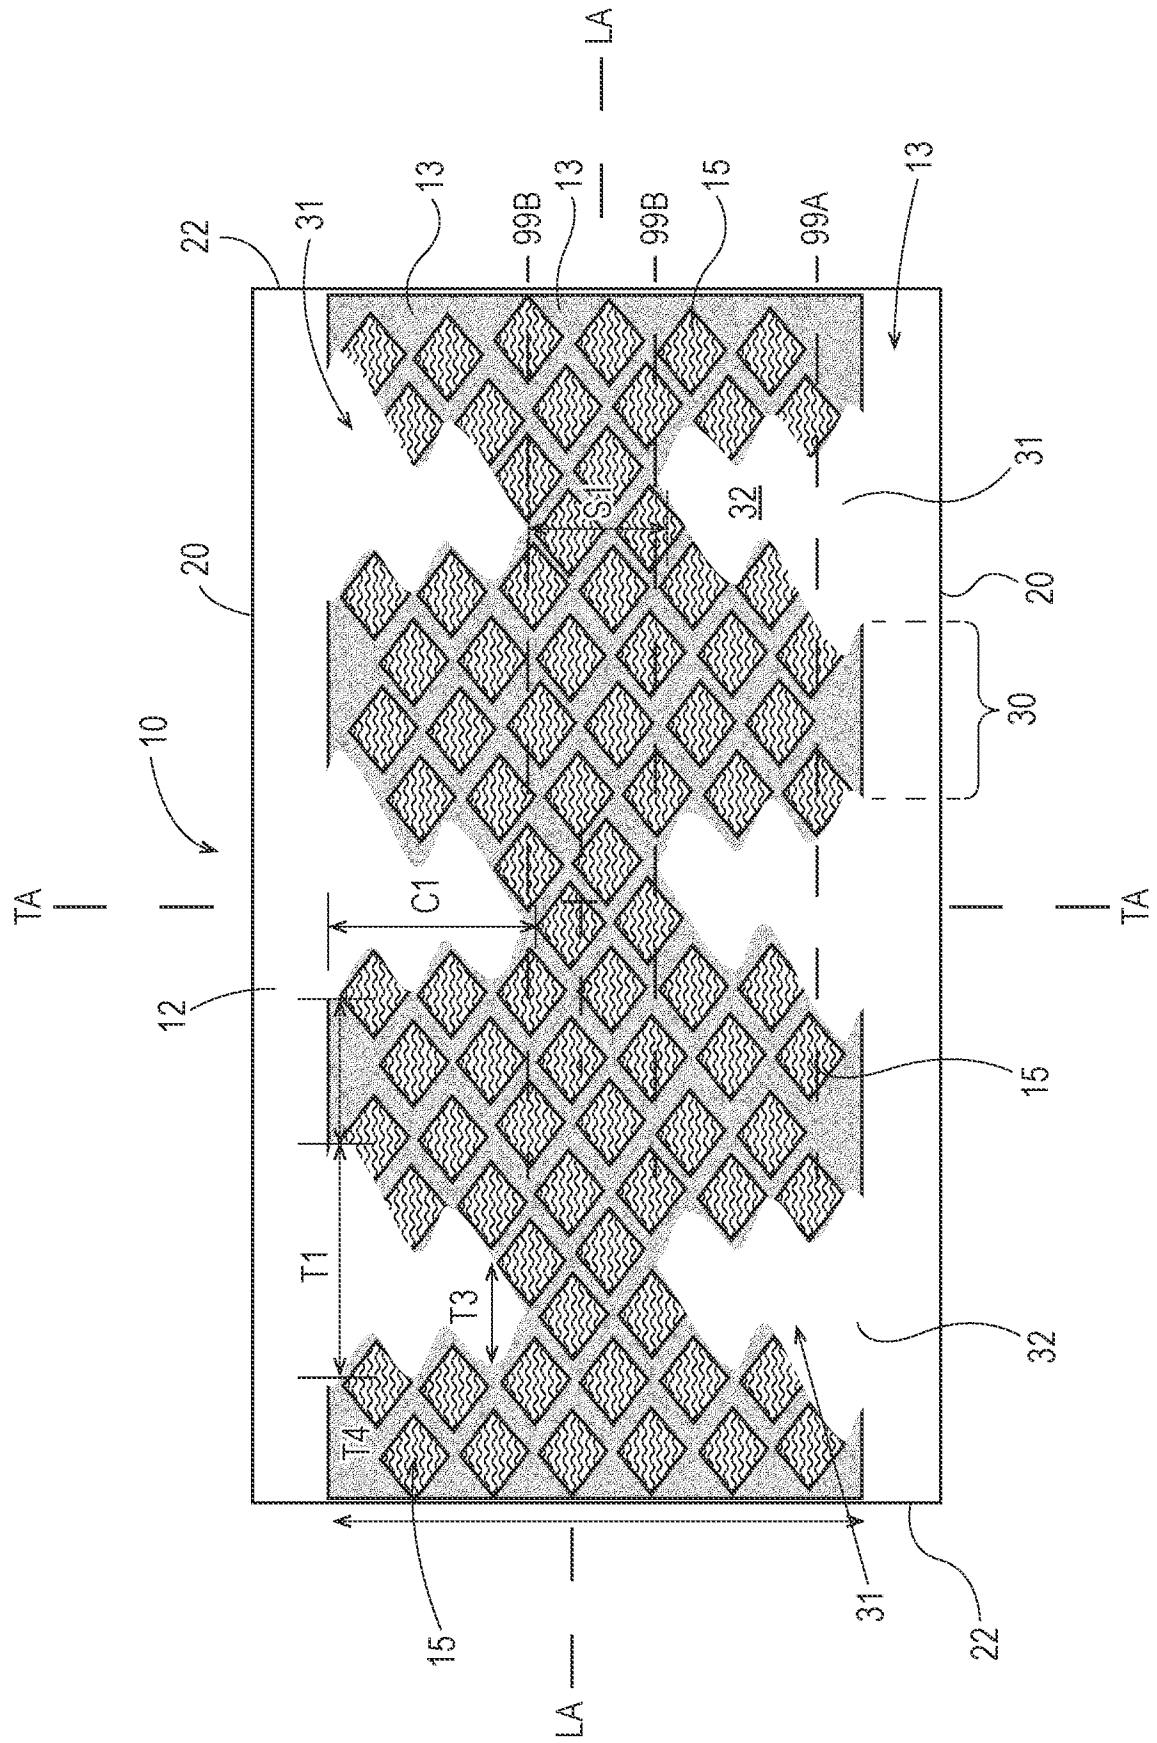


Fig. 2

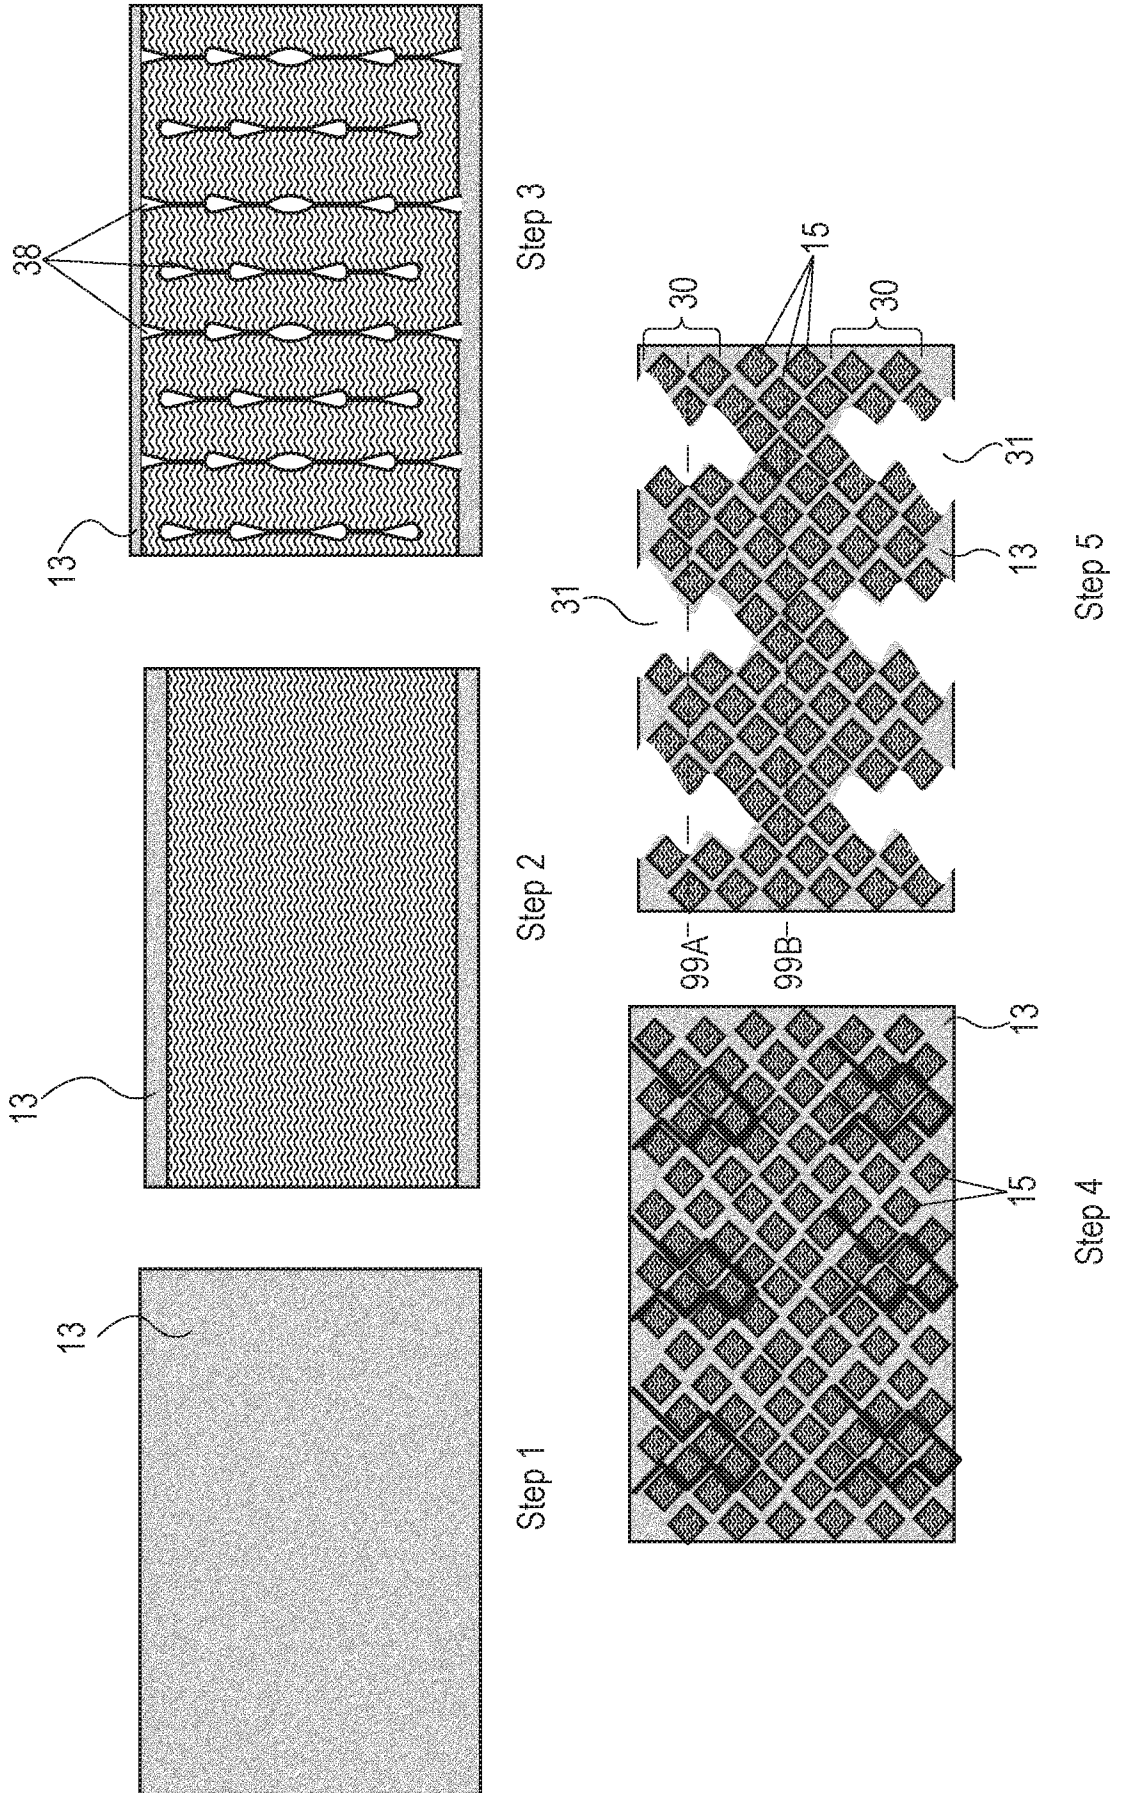


Fig. 2A

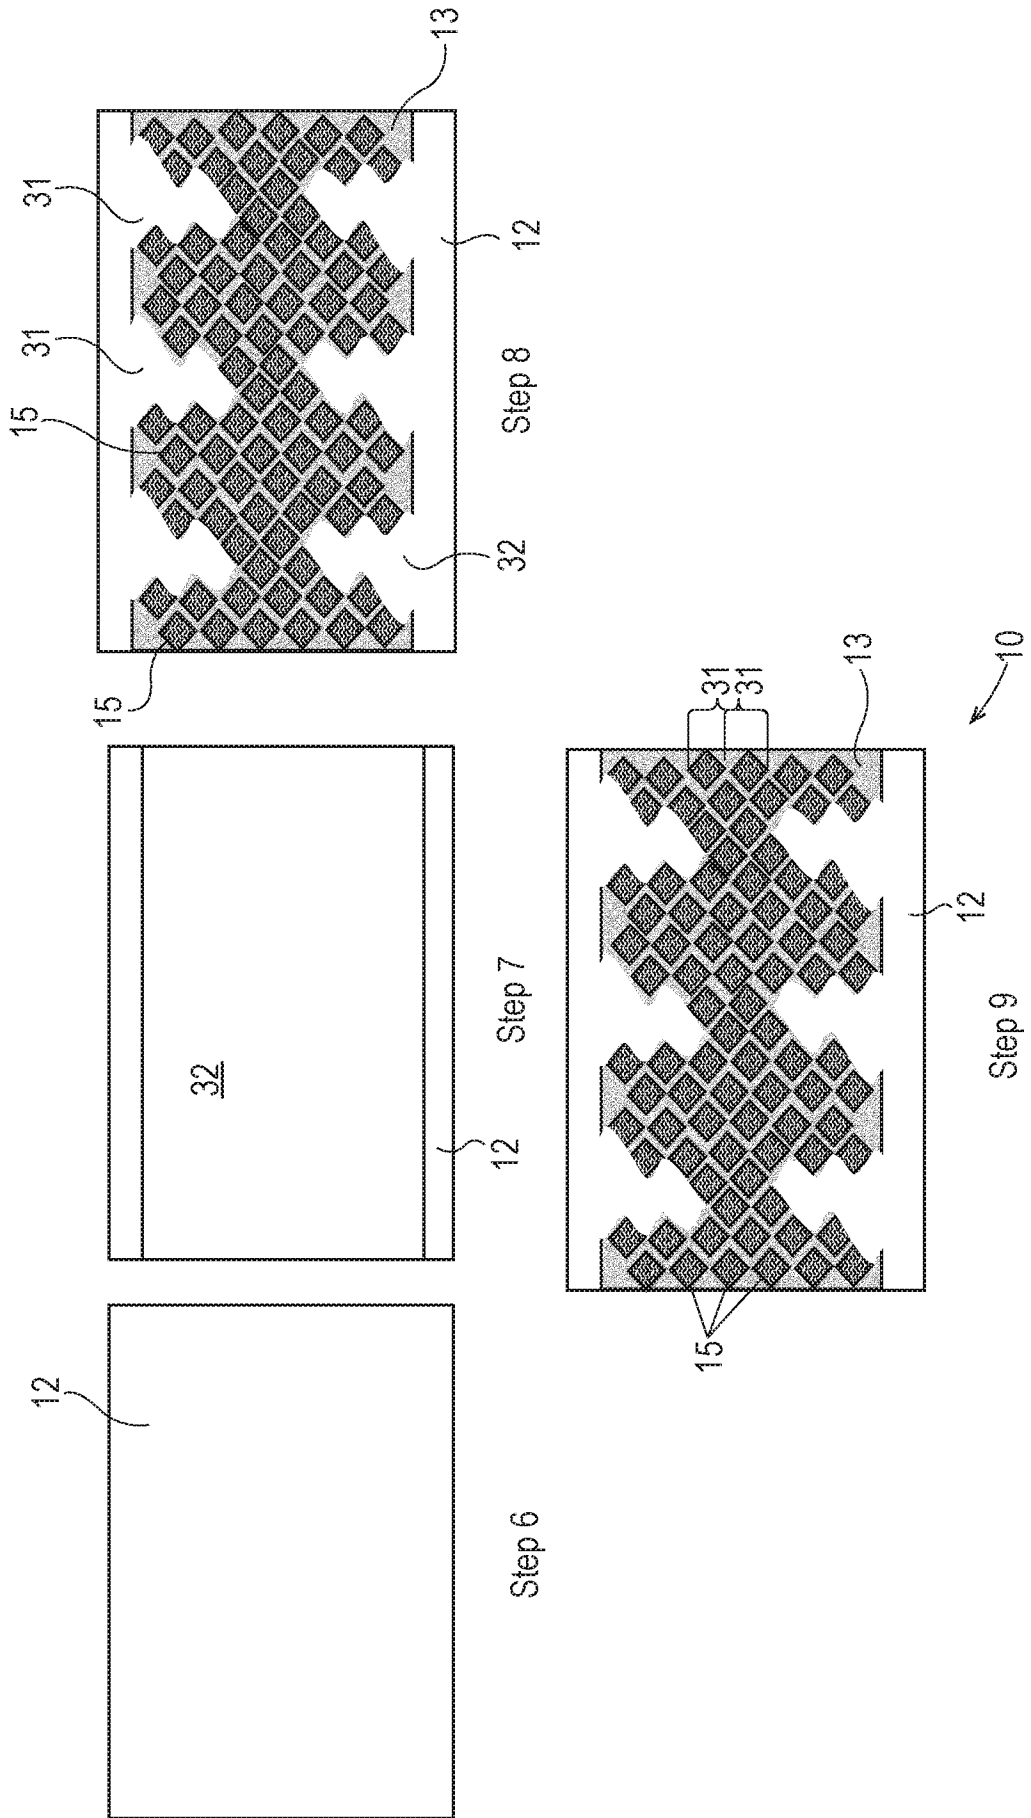


Fig. 2A
(continued)

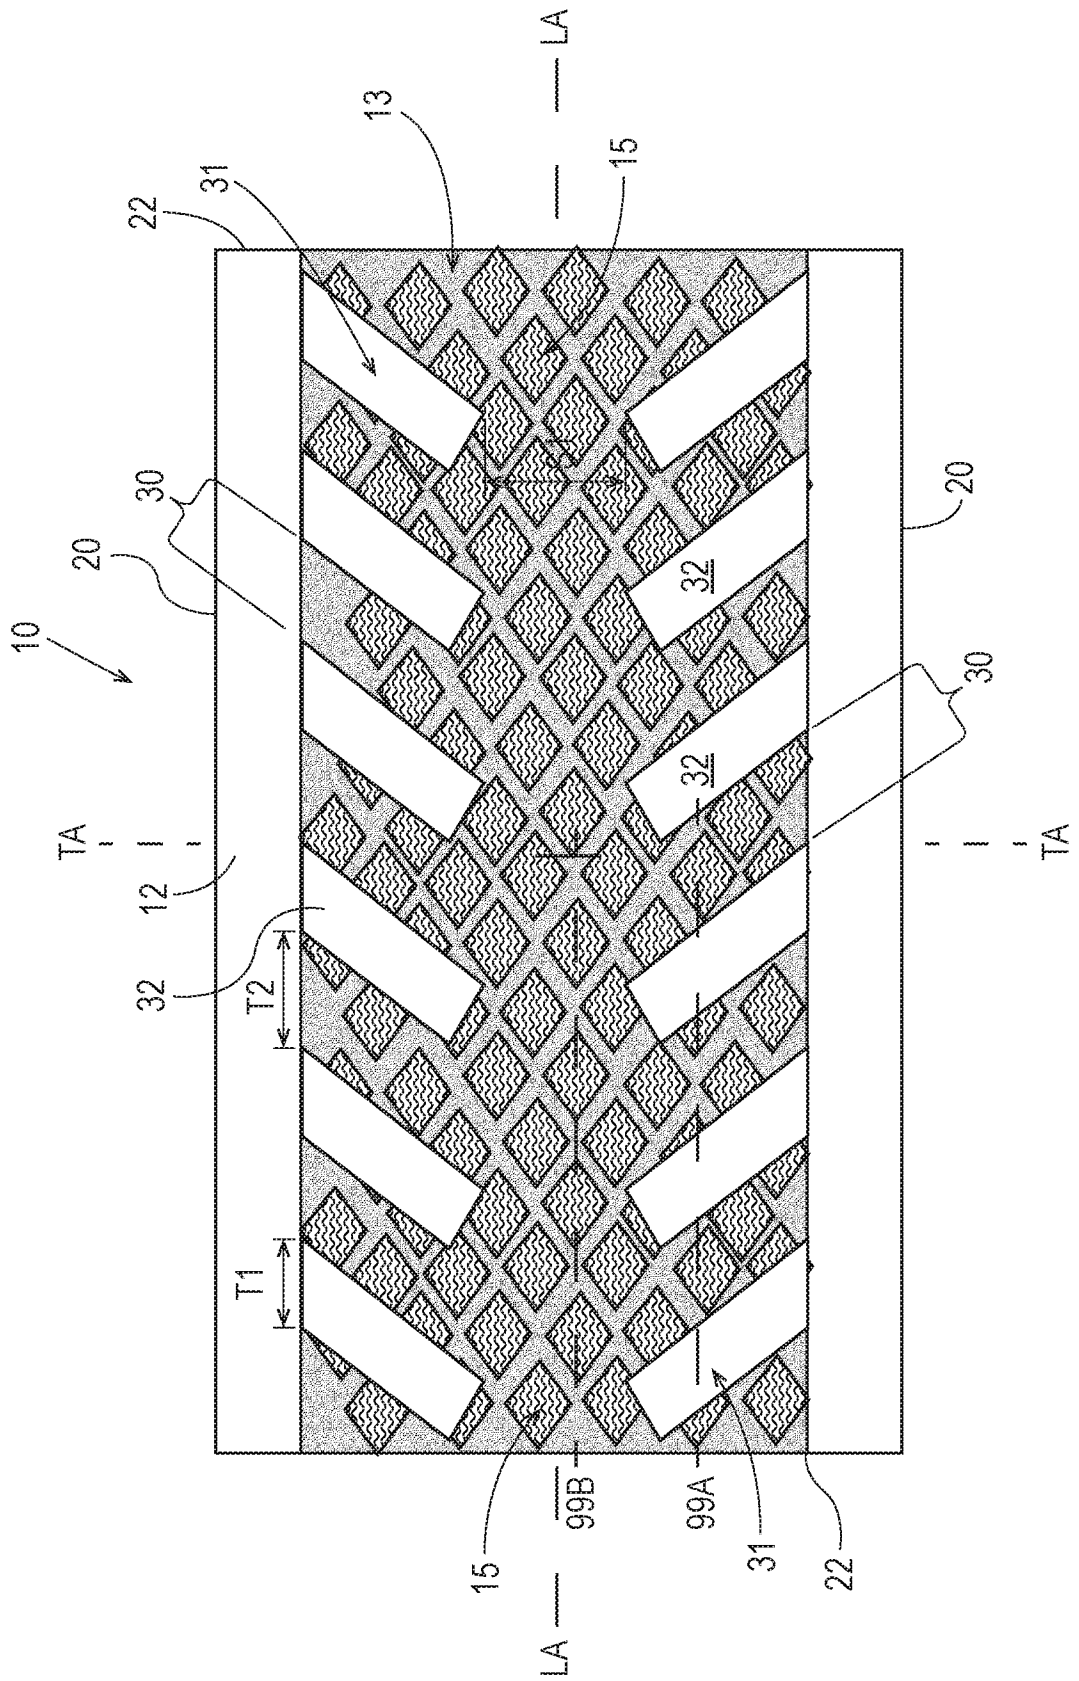


Fig. 3

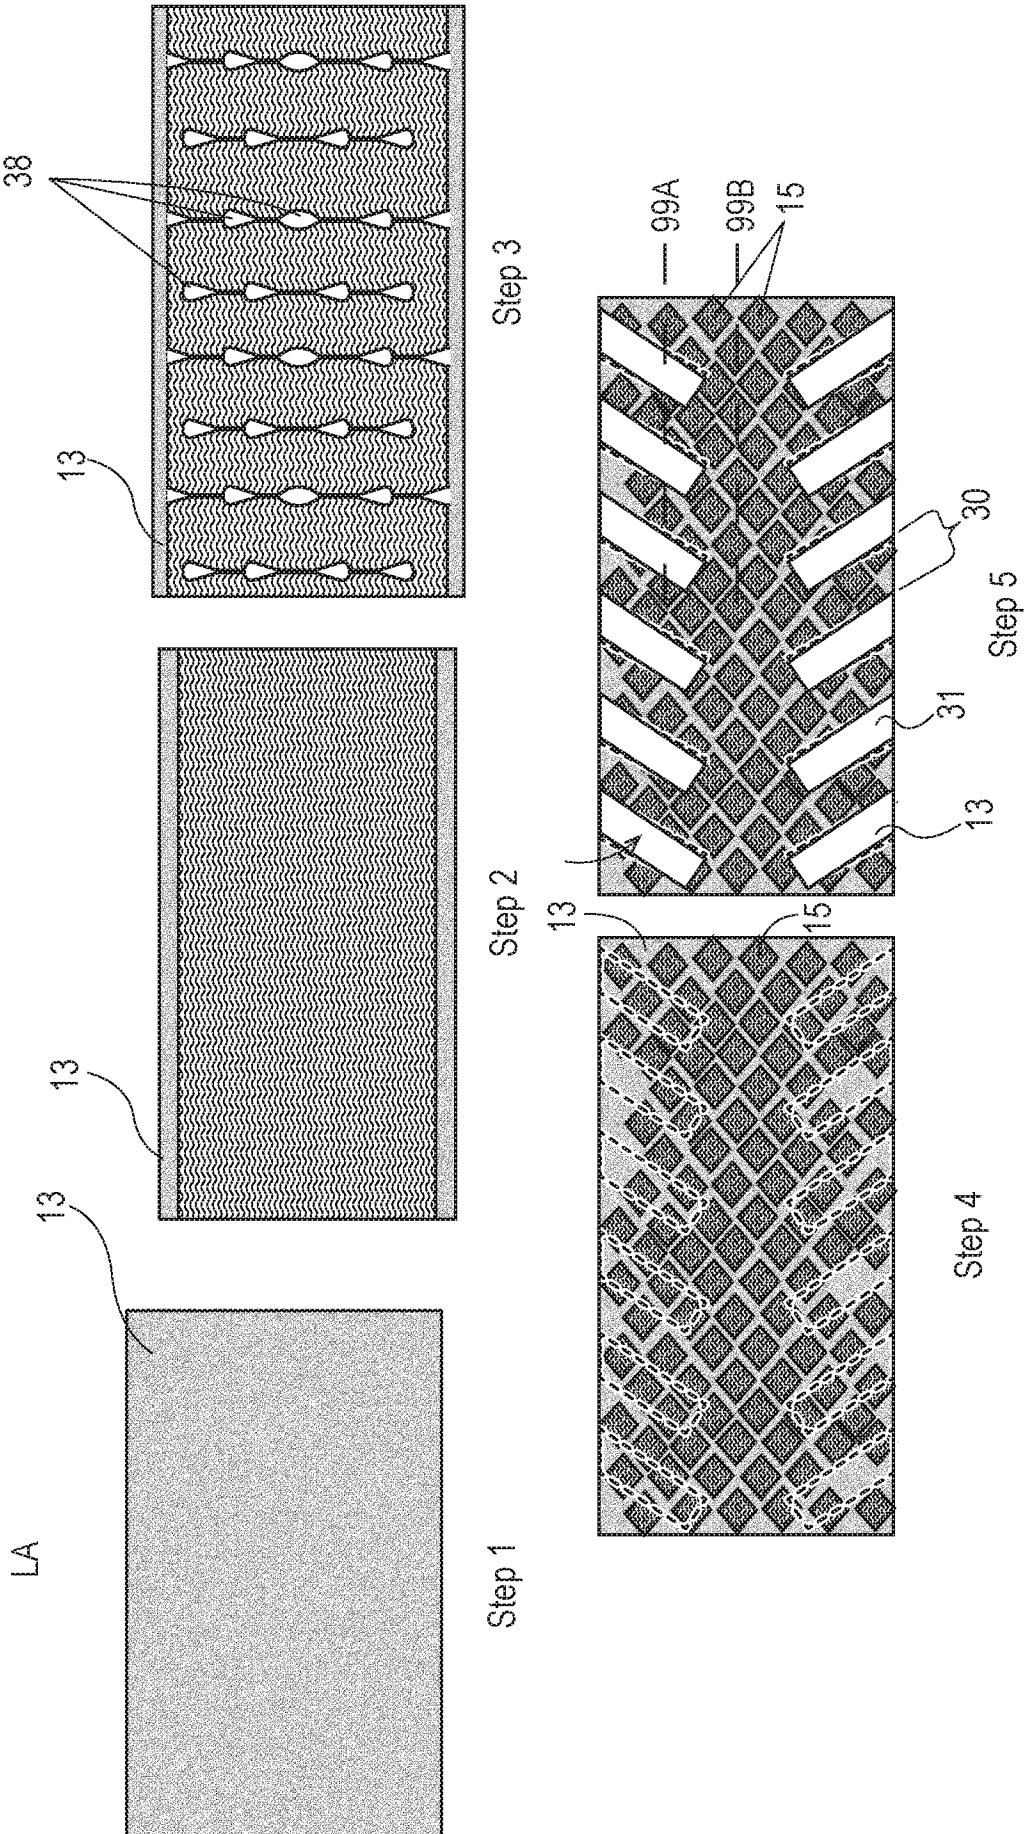


Fig. 3A

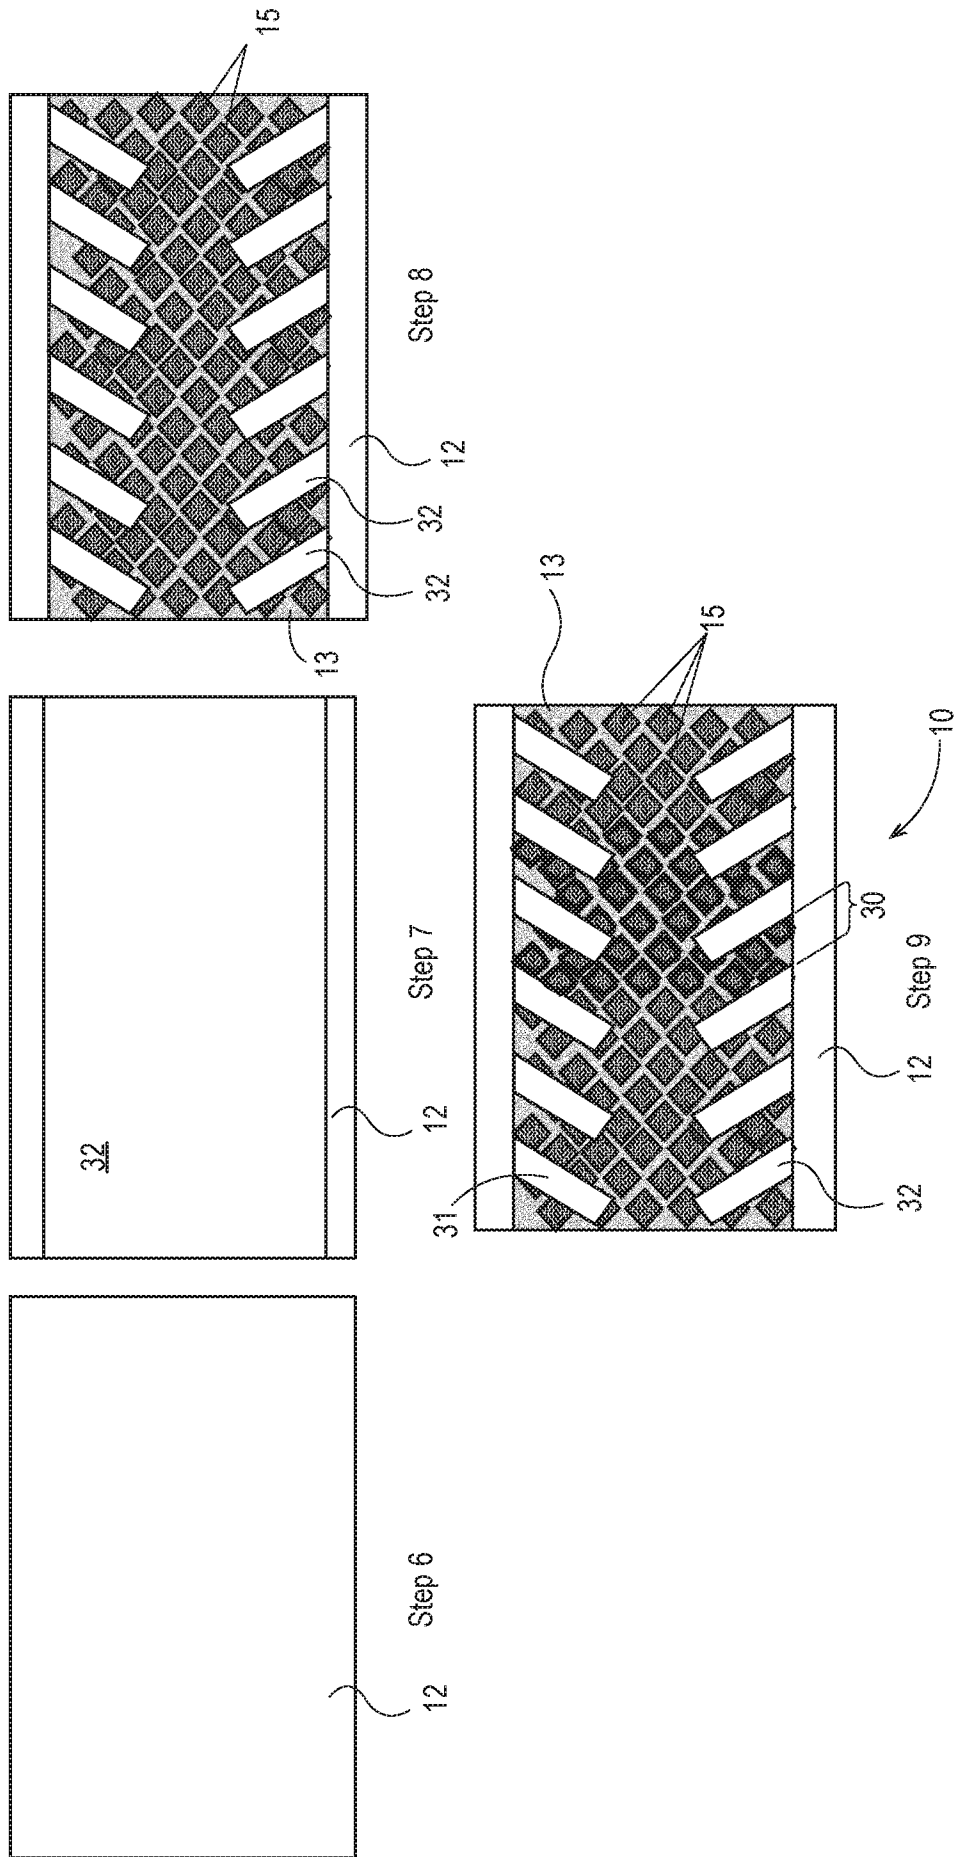


Fig. 3A
(continued)

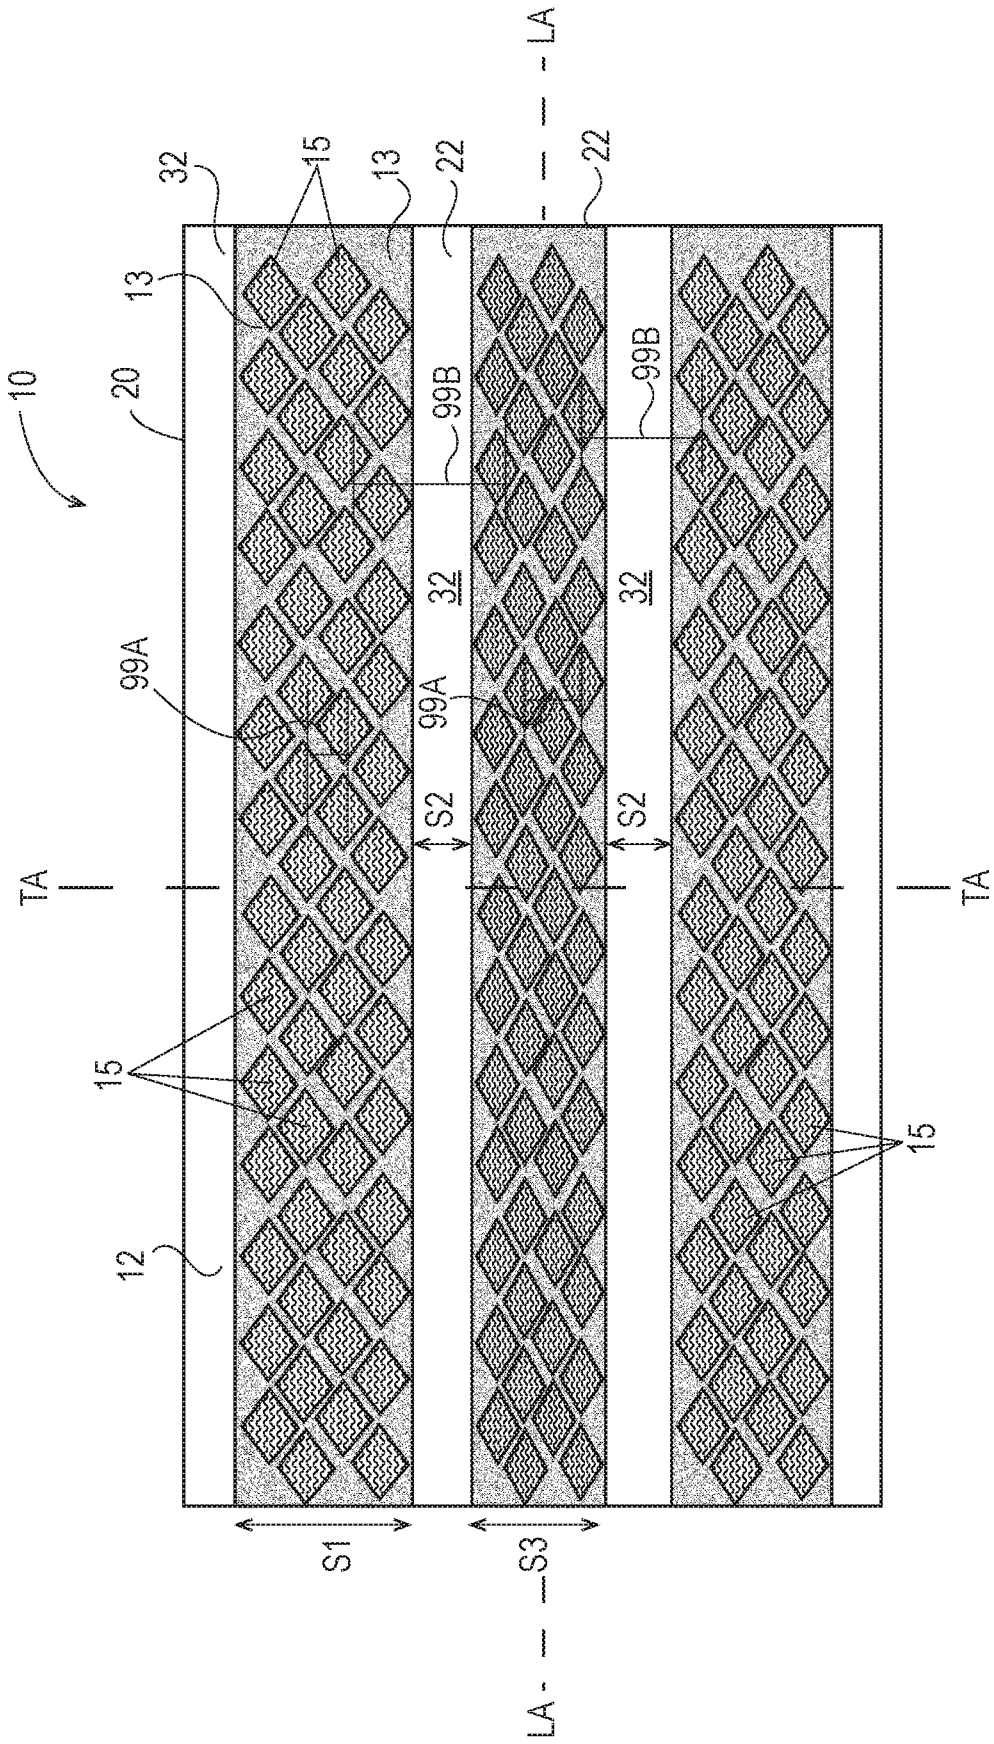


Fig. 4.2


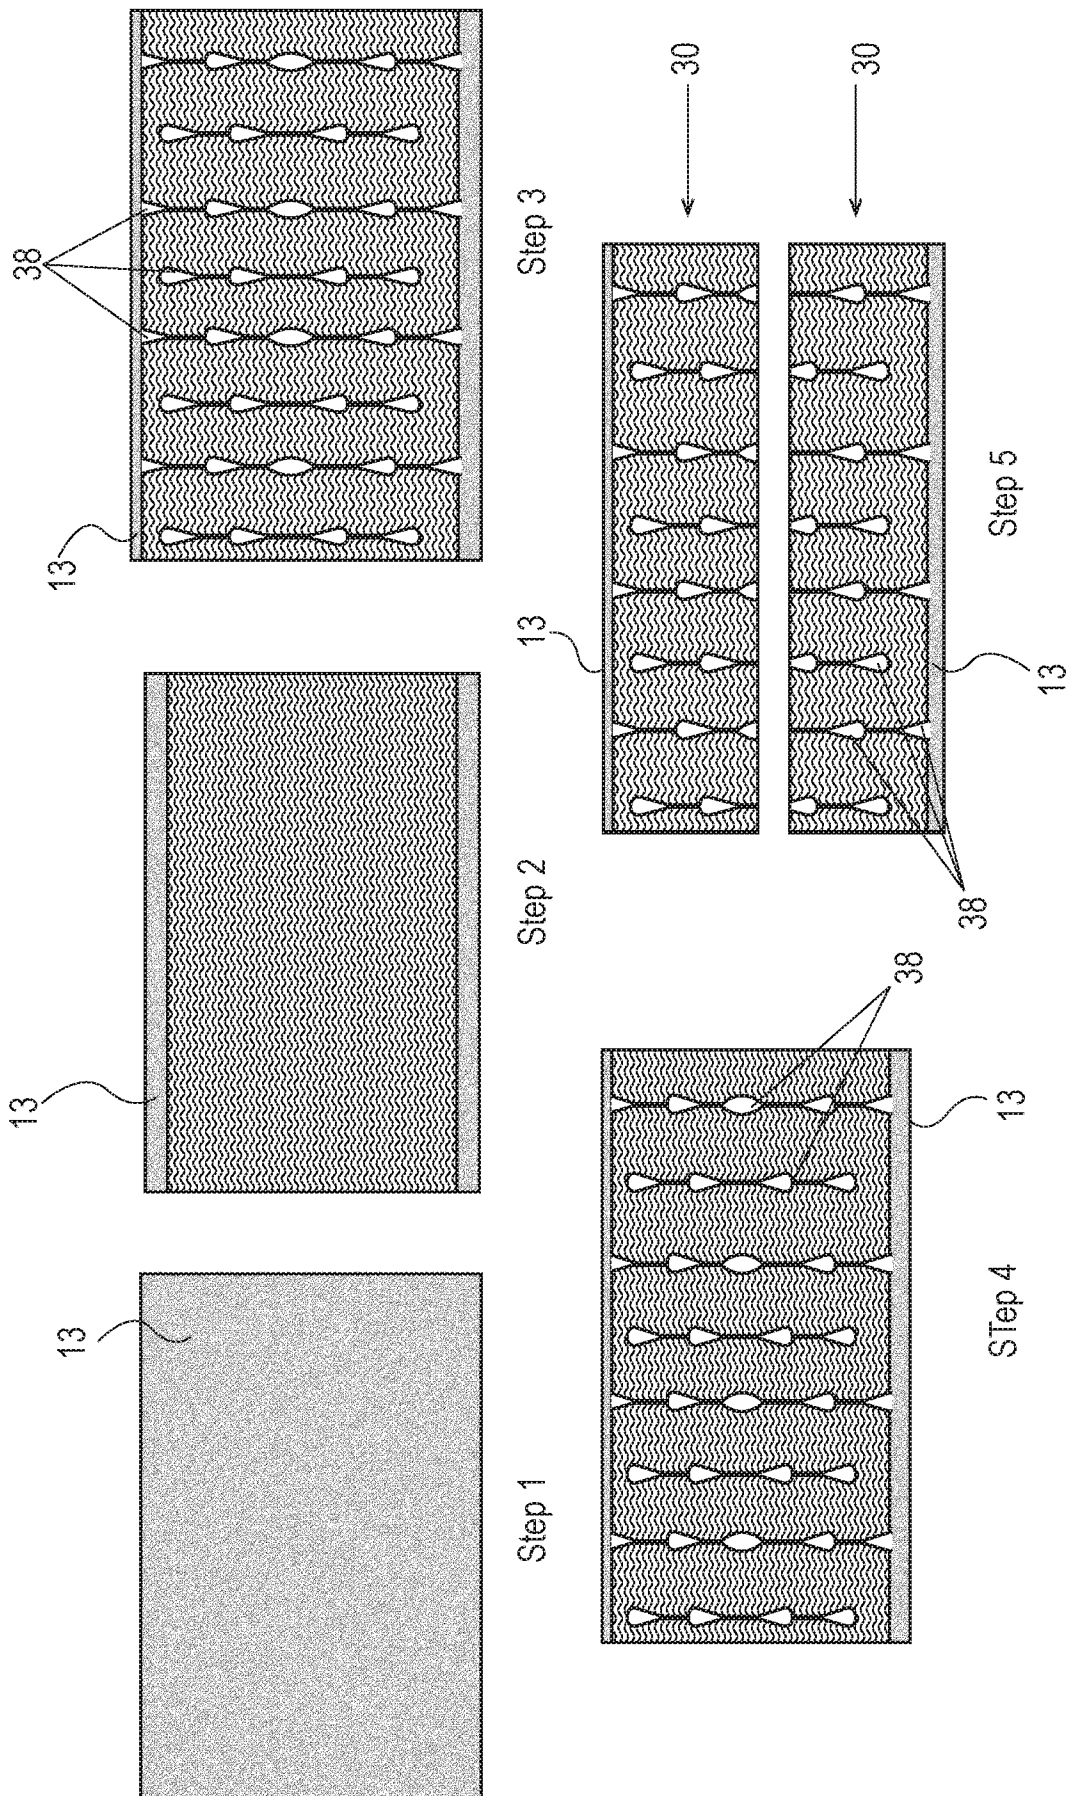


Fig. 4A

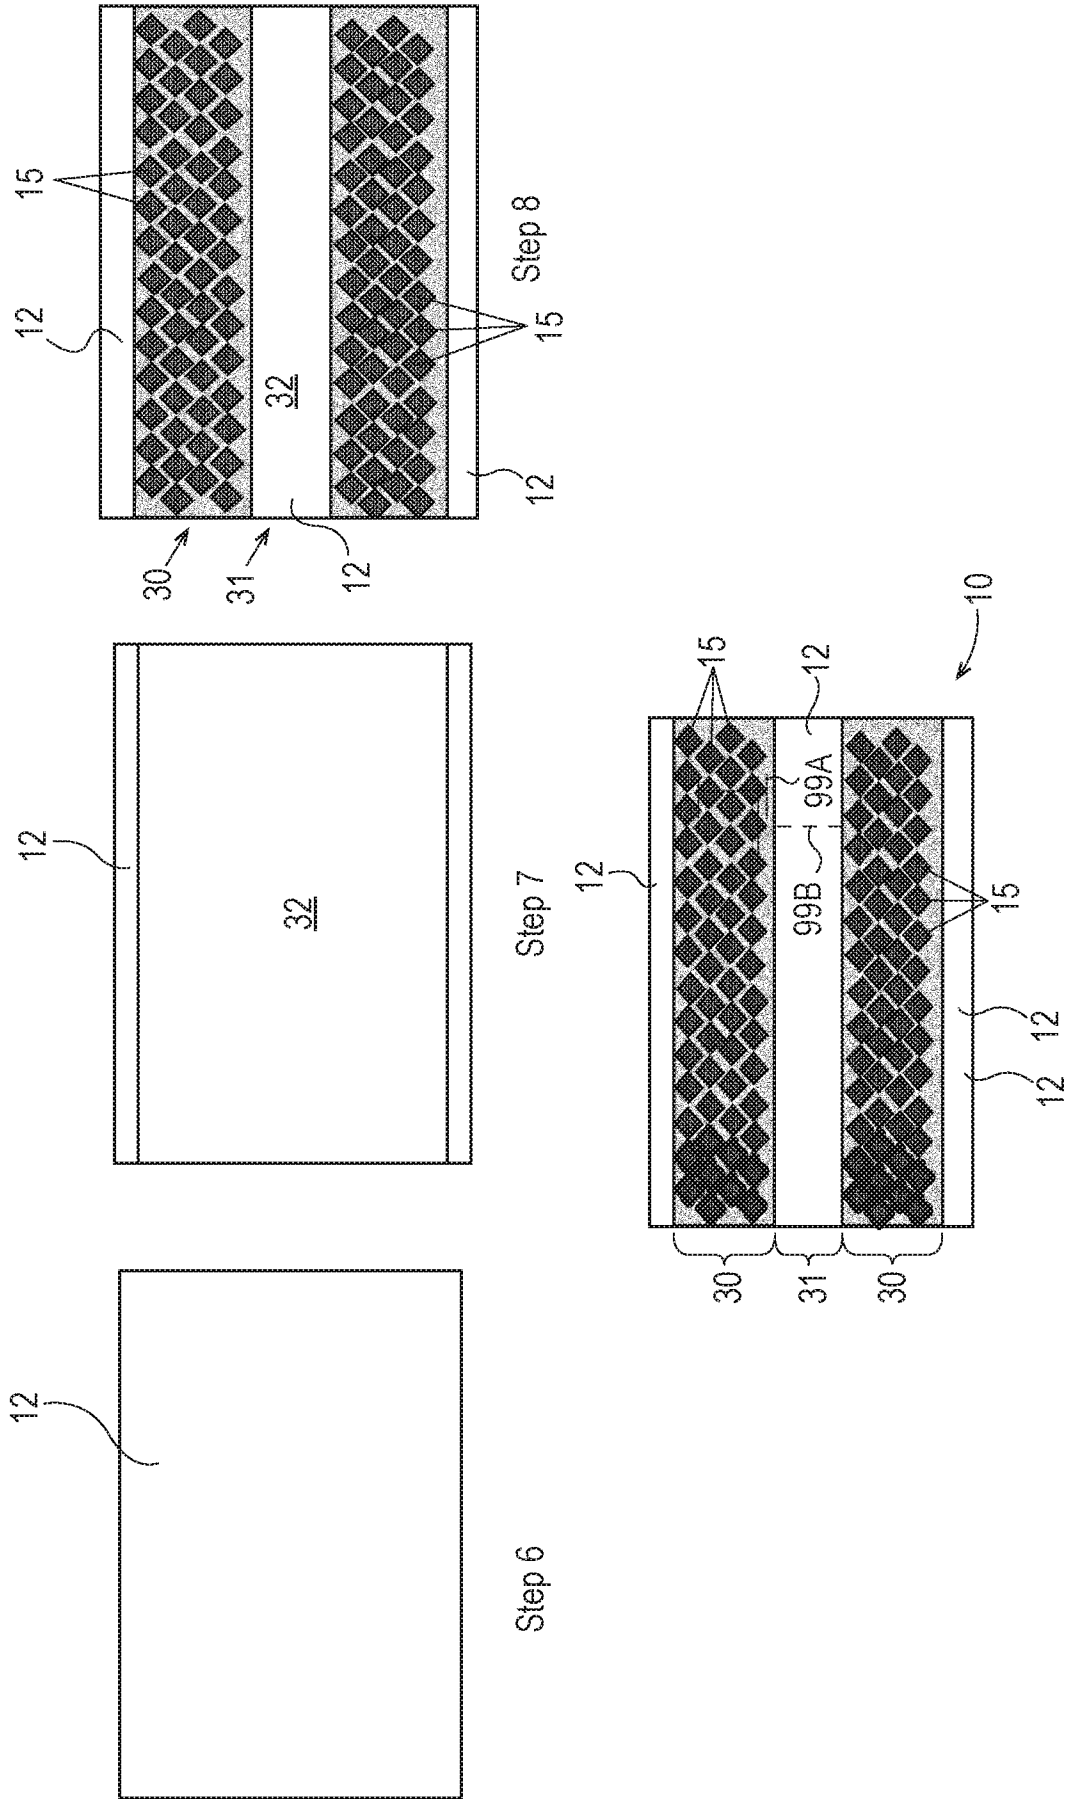

Step 9
Fig. 4A
(continued)




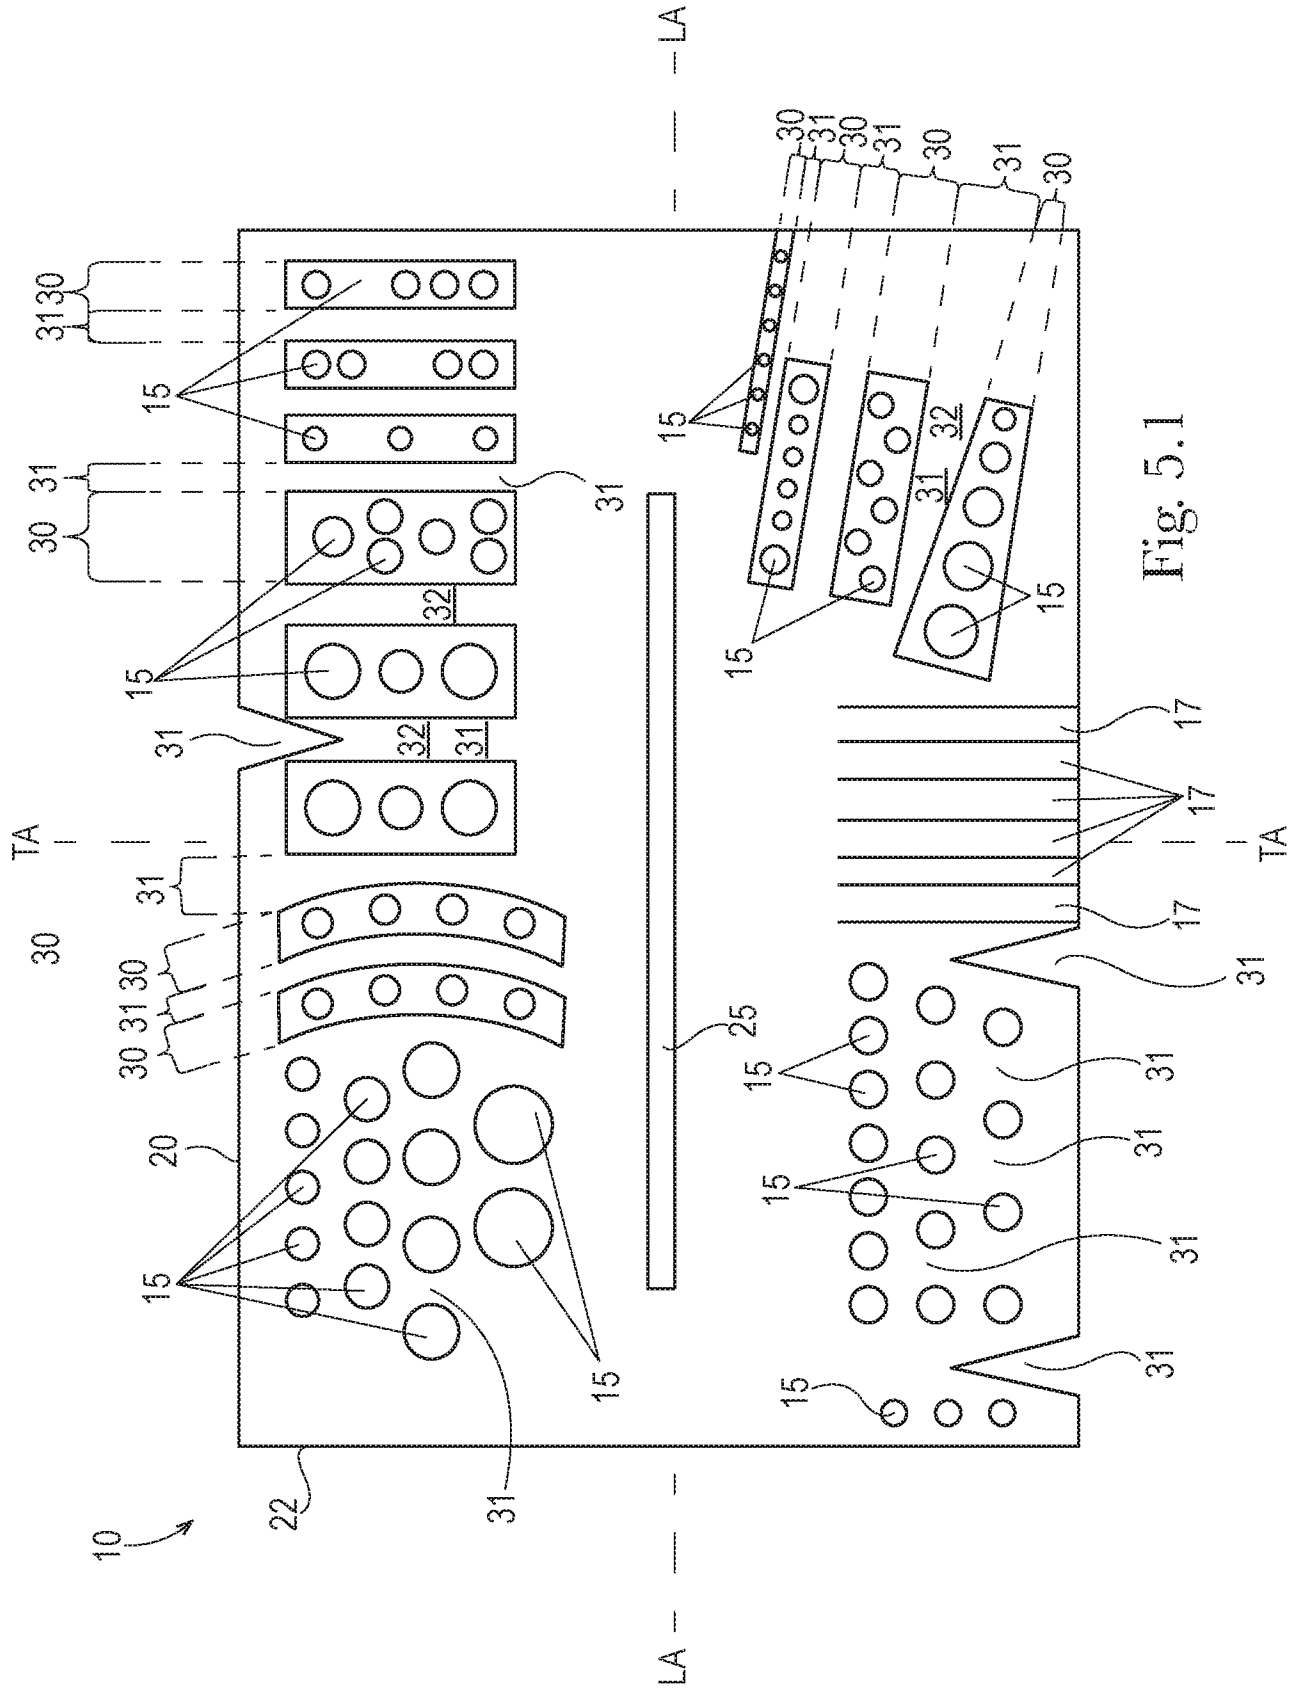


Fig. 5.1

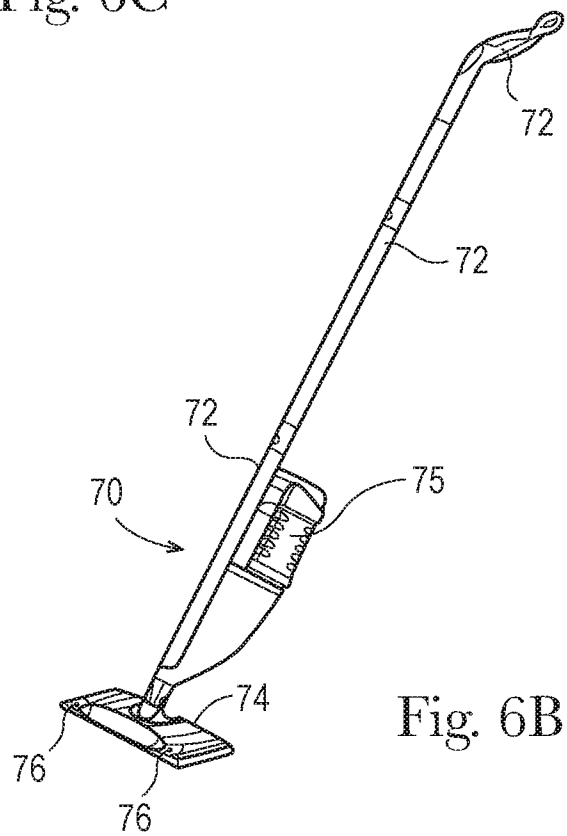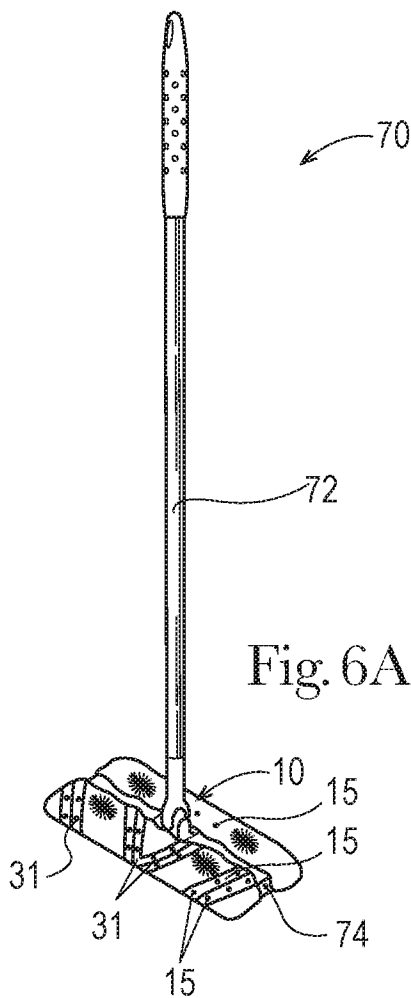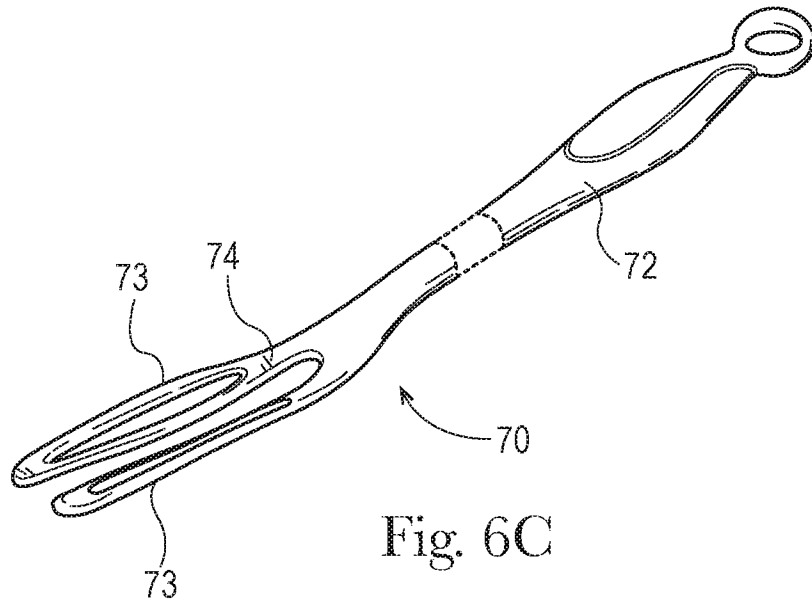

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2018/050371

A. CLASSIFICATION OF SUBJECT MATTER
INV. A47L13/16 A47L13/20 B32B5/02
ADD.
According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED
Minimum documentation searched (classification system followed by classification symbols)
A47L B32B
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2010/036346 A1 (HAMMONS JOHN LEE [US] ET AL) 11 February 2010 (2010-02-11)	1-14
A	paragraph [0080] paragraphs [0132] - [0150]; figure 19	15
A	US 2014/366293 A1 (ROE DONALD CARROLL [US] ET AL) 18 December 2014 (2014-12-18) abstract; figures 1-11	1-15
A	EP 1 656 875 A2 (UNI CHARM CORP [JP]) 17 May 2006 (2006-05-17) abstract; figures 1-11	1-15
A	EP 0 923 902 A2 (UNI CHARM CORP [JP]) 23 June 1999 (1999-06-23) abstract; figures 1-7	1-15
	----- -/--	

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents :

<p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier application or patent but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p>	<p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"&" document member of the same patent family</p>
---	---

Date of the actual completion of the international search 20 December 2018	Date of mailing of the international search report 08/01/2019
---	--

Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer Hubrich, Klaus
--	--

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2018/050371

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 6 506 472 B1 (TANAKA YOSHINORI [JP] ET AL) 14 January 2003 (2003-01-14) abstract; figure 5 -----	1-15

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2018/050371

Patent document cited in search report	Publication date	Patent family member(s)	Publication date	
US 2010036346	A1	11-02-2010	CN 102112083 A	29-06-2011
			EP 2309964 A1	20-04-2011
			JP 2011530340 A	22-12-2011
			US 2010036346 A1	11-02-2010
			WO 2010017352 A1	11-02-2010

US 2014366293	A1	18-12-2014	EP 3010387 A1	27-04-2016
			US 2014366293 A1	18-12-2014
			WO 2014205015 A1	24-12-2014

EP 1656875	A2	17-05-2006	CA 2515926 A1	16-05-2006
			CN 1775162 A	24-05-2006
			CN 2808051 Y	23-08-2006
			EP 1656875 A2	17-05-2006
			EP 1656876 A2	17-05-2006
			EP 2436297 A1	04-04-2012
			ES 2425222 T3	14-10-2013
			JP 4785369 B2	05-10-2011
			JP 2006141483 A	08-06-2006
			KR 20060055361 A	23-05-2006
			TW M274919 U	11-09-2005
			TW 200616575 A	01-06-2006
			US 2006101601 A1	18-05-2006

EP 0923902	A2	23-06-1999	AU 739525 B2	18-10-2001
			BR 9805268 A	16-11-1999
			CA 2256094 A1	16-06-1999
			CN 1221599 A	07-07-1999
			DE 69816250 T2	27-05-2004
			EP 0923902 A2	23-06-1999
			ES 2197428 T3	01-01-2004
			ID 21459 A	17-06-1999
			SG 73596 A1	20-06-2000
			TW 394679 B	21-06-2000

US 6506472	B1	14-01-2003	AR 022842 A1	04-09-2002
			AT 551940 T	15-04-2012
			AU 758344 B2	20-03-2003
			BR 0005255 A	09-01-2001
			CA 2324553 A1	14-09-2000
			CN 1296442 A	23-05-2001
			EG 22706 A	30-07-2003
			EP 1095763 A1	02-05-2001
			EP 2308362 A1	13-04-2011
			HU 0101436 A2	28-09-2001
			ID 27093 A	01-03-2001
			IL 139444 A	08-02-2004
			KR 100389609 B1	27-06-2003
			PL 343803 A1	10-09-2001
			RU 2211655 C2	10-09-2003
			TR 200003207 T1	20-04-2001
			TW 418078 B	11-01-2001
			US 6506472 B1	14-01-2003
			WO 0053407 A1	14-09-2000
			ZA 200006074 B	10-04-2001
