

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
18 June 2009 (18.06.2009)

PCT

(10) International Publication Number
WO 2009/076038 A2

(51) International Patent Classification:
F16K 17/04 (2006.01) *F16K 1/36* (2006.01)
F16K 1/52 (2006.01)

(21) International Application Number:
PCT/US2008/084313

(22) International Filing Date:
21 November 2008 (21.11.2008)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
11/951,550 6 December 2007 (06.12.2007) US

(71) Applicant (for all designated States except US): **BAKER HUGHES INCORPORATED** [US/US]; P.O. Box 4740, Houston, TX 77210-4740 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **GAUDETTE, Sean, L.** [US/US]; 23322 Dunhill Court, Katy, TX 77494 (US).
HOLMES, Kevin, C. [US/US]; 4110 Whitman Street, Houston, TX 77027 (US).

(74) Agents: **DUPHORNE, Darin, H.** et al.; Baker Oil Tools Division - Baker Hughes Inc., Division Intellectual Property Counsel, P.O. Box 4740, Houston, TX 77210-4740 (US).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *without international search report and to be republished upon receipt of that report*

(54) Title: VALVE RESPONSIVE TO FLUID PROPERTIES

(57) Abstract: A valve for downhole use has the ability to throttle between fully open and closed and is fully variable in positions in between. The valve is preferably responsive to flowing fluid viscosity and uses a three dimensional flow through restrictor in combination with a relatively movable cover. At a given flow, a higher viscosity fluid will create a greater relative movement and make it possible for flowing fluid to bypass more of the flow through member. In a particular application involving production from a zone, an array of such valves can allow more production where the viscosity is higher and less production where the viscosity drops due to, for example, water production.



WO 2009/076038 A2

APPLICATION FOR PATENT

Title: Valve Responsive to Fluid Properties

Inventors: Kevin C. Holmes and Sean L. Gaudette

FIELD OF THE INVENTION

[0001] The field of the invention is separation devices for downhole use and more particularly valves responsive to flowing fluid properties.

BACKGROUND OF THE INVENTION

[0002] Valves called chokes are commonly used in oil and gas service to throttle between pressure levels between a fully open and fully closed position. One way they operate is by having a movable sleeve in a stationary housing. The sleeve has a series of longitudinally spaced holes on a common circumference and is manipulated axially for alignment of different sized holes with the fixed port in the outer housing. While this arrangement allows for some setting variability it still leaves gaps in the control because of the step change in sizes between adjacent holes that are longitudinally spaced. Beyond that there are considerations of erosion from high velocity flows, particularly in gas service where solids can be entrained.

[0003] One way the present invention addresses this design issue is to move away from the prior design of overlapping openings by using a porous media with a quantifiable resistance per unit length to act as a resistance to flow. Access through the medium is increased or decreased between end positions where one defines the substantially no flow condition and another provides substantially full access over the length of the medium to define the fully open position.

[0004] In another aspect, the valve features an ability to respond to a property of the flowing liquid to vary its position responsive, for example, to flowing liquid viscosity. In a screen application, for example, multiple such valves can be in position. When the desired hydrocarbon that has a much higher viscosity than water is flowing, the movable member can leave more of the flow through valve member exposed to reduce resistance

to flow. This encourages portions of a zone that are making pure hydrocarbons to continue to do so over other locations where the onset of water production has reduced viscosity. The reduced viscosity allows a closure device to cover more of the flow through the member so as to reduce or cut off flow from areas where water is being produced. This can be accomplished without even having to measure viscosity by making the mechanical components responsive in predetermined ways to an expected range of viscosities. Totally manual as well as totally automatic operations are also contemplated.

[0005] These and other aspects of the present invention will become more apparent to those skilled in the art from a review of the description of the preferred embodiment and associated drawings while recognizing that the full scope of the invention is given by the claims.

SUMMARY OF THE INVENTION

[0006] A valve for downhole use has the ability to throttle between fully open and closed and is fully variable in positions in between. The valve is preferably responsive to flowing fluid viscosity and uses a three dimensional flow through restrictor in combination with a relatively movable cover. At a given flow, a higher viscosity fluid will create a greater relative movement and make it possible for flowing fluid to bypass more of the flow through member. In a particular application involving production from a zone, an array of such valves can allow more production where the viscosity is higher and less production where the viscosity drops due to, for example, water production.

BRIEF DESCRIPTION OF THE DRAWINGS

[0007] FIG. 1 is a section view of a valve featuring a flow through media partially uncovered due to fluid flow of a low viscosity displacing a sleeve;

[0008] FIG. 2 is the view of Fig. 1 with a low viscosity fluid present that allows the flow through media sleeve to be spring biased to cover more of the flow through media;

[0009] FIG. 3 is an alternative embodiment to FIG. 1 showing the inverse of the FIG. 1 design where the blank sleeve is movable rather than the flow through media;

[0010] FIG. 4 is the view of FIG. 3 where a low viscosity fluid is flowing that allows the sleeve to advance over the flow through media to retard flow;

[0011] FIG. 5 is a manual design that allows moving the flow through media with respect to a surrounding stationary sleeve;

[0012] FIG. 6 is the reverse of FIG. 5 where the sleeve is movable with respect to a stationary flow through media.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

[0013] In the preferred embodiments the valve assemblies are arrayed in conjunction with an assembly of screens 10 that can span for thousands of feet depending on the configuration of the producing interval. The structural support for the screen assembly 10 is commonly known as a base pipe 12 which runs the length of the screen assembly 10. The base pipe over its length has openings 14. The openings 14 are generally disposed in arrays of multiple openings on a given spacing pattern. While some inflow balancing can be done by varying the cross-sectional area of the arrays along a length of screen 10, another technique is to associate a valve 16 with a given array 14. In the present invention the valve 16 associated with an array 14 is responsive to a fluid property for the fluid flowing through it. In one embodiment the fluid property is viscosity. When a high viscosity desirable hydrocarbon is being produced, the flow in combination with that higher viscosity produced a high enough force on the element 18 to displace it against spring 20 and to offset the element 18 from stationary sleeve 22. Thus in the position of FIG. 1 the element 18 which preferably is made of a pack of beads of a known diameter yielding a network of passages though it of a known size configuration, winds up being short circuited as more flow can exit laterally through side 24 without having to flow to the end 26. Thus the flow paths to end 26 have an axis that intersects with flow paths through side 24, which, in the preferred embodiment, happens to be a cylindrical surface. To complete the structure, an outer tube 28 is used to create an annular space 30 between the screen 10 and the openings 14. In order for flow represented by arrow 32 to reach the openings 14 it has to flow through the porous material element 18 which is movably mounted over sleeve 22 which is fixed. The flow

passing through element 18 creates a pressure drop and a net force that compressed the spring 20. As the spring 20 is compressed and the element 18 shifts to the left, more of the side 24 of element 18 comes out of alignment with sleeve 22. The more viscous the material is that represents flow 32 the greater the force exerted on spring 20, the more element 18 shifts left and as a result the less resistance to flow is offered to the viscous fluid as more of the flow entering the element 18 can make a fast lateral exit out the side surface 24 that is no longer in alignment with sleeve 22.

[0014] On the other hand, if the viscosity drops, indicating the appearance of water, for example, or some other unwanted fluid, the net pressure exerted for a given flow rate against the element 18 will drop as that given flow rate can move through the porous element with less resistance. When that happens, the spring 20 can shift the element 18 to the right to an extreme position where the element 18 comes into alignment with sleeve 22, as shown in FIG. 2. The end 34 can be made impervious and depending on the strength of spring 20 the valve 16 in the FIG. 2 position can be fully closed to fluids. A seat 36 that also acts as a travel stop for the element 18 can be provided in the form of an inner and outer seal rings such that if combined with an impervious end 34 and a strong enough spring 20 can actually close the valve 16 if the viscosity drops low enough due to production of an unwanted fluid such as water.

[0015] FIGS. 3 and 4 are simply a reverse of the design of FIGS. 1 and 2. The element 18 is now fixed to a retainer 38. The sleeve 22 is movably mounted with a peripheral seal ring 40. When the viscosity of the flowing fluid 32 is high the force against sleeve 22 will overcome the spring 20 and expose more of the side surface 24 of the element 18 which will mean a reduction of resistance to flow and enhanced flow of the desirable hydrocarbon through screen 10. On the other hand, if the viscosity drops, for a given flow rate the force on sleeve 22 will decrease to allow spring 20 to shift element 18 to the FIG. 4 position such that the side surface 24 is substantially within the sleeve 22 and resistance to flow goes higher because all the flow has to go clean through the length of the element 18 to the only exit at end 26. Optionally, end 34 can be impervious and come up against a seal ring 36. Then, if the spring 20 is strong enough, the valve in the FIG. 4 position can exclude fluid.

[0016] FIGS. 5 and 6 illustrate totally manual operation. In FIG. 5, the element **18** is secured to an operator **46** with sleeve **22** held fixed. The sleeve **18** is movable relative to fixed sleeve **22**. In FIG. 6 the element **18** is held fixed by retainer **38** while the sleeve **22** is moved by the adjustment mechanism **46**. Optionally an impervious end cap **34** can be used to shut off flow while the resistance to flow is infinitely variable by simply positioning the element **18** either more in alignment with sleeve **22** or less so.

[0017] Element **18** is preferably a cylindrical shape of a bead pack or a sintered material or some other porous material. The passages or openings through it need not be uniform. Rather the structure needs to be responsive to a change in fluid property and respond to such a change for a given flow rate with a change in force applied to a closure device. In the preferred embodiment the fluid property that changes that affects the movement of the element **18** or its associated sleeve **22** is viscosity. The actual viscosity need not be locally measured but it can be and in association with a processor connected to an operator that replaces spring **20** can achieve the same result. The illustrated preferred embodiments are just simpler and cheaper and more reliable in that they need not literally measure the fluid property change that affects their performance. Instead, what needs to be known for a given configuration of porous element is its pressure versus flow characteristics for a given viscosity.

[0018] On the other hand using a system, schematically illustrated as **S**, that senses an actual fluid property and can convert that signal using a processor into a proportional movement, the same effect of keeping out undesirable ingredients can be accomplished if there is a fluid property that identifies the undesirable ingredient. For example pH may be used as a measured quantity to affect changes in relative position between the element **18** and the sleeve **22**.

[0019] While the element **18** has been depicted as a cylinder surrounded by a sleeve **22** the arrangement can be inverted using an impervious cylindrical plug surrounded by a porous annularly shaped member as shown in FIGS. 1 and 2. While a coil spring **20** is illustrated, equivalents such as pressurized chambers, Belleville washer stacks or other devices that store potential energy could be used. Alternatively a control

system can use motors of various types such as a stepper motor or a ball screw assembly to create the relative movement responsive to fluid property change.

[0020] In another variation, the actual flowing fluid can be analyzed as it passes a sensor to specifically identify ingredients and operate the valve 16 to exclude the unwanted fluids.

[0021] The design of a pair of members where there is relative movement and flow through one of the members allows infinite variability in a throttling application such as a choke with a possibility of dramatically reducing or cutting off unwanted flows. Another advantage is better resistance to the erosive effects of high velocities and a cheaper way to rebuild the valve if necessary by simply replacing a porous element.

[0022] The above description is illustrative of the preferred embodiment and many modifications may be made by those skilled in the art without departing from the invention whose scope is to be determined from the literal and equivalent scope of the claims below.

We claim:

1. A valve assembly, comprising:
a housing;
a valve member in said housing for regulating flow therethrough, said flow entering said valve member in a plurality of directions having multi-planar intersecting axes.
2. The assembly of claim 1, wherein:
flow in one of said directions is restricted independently of flow in another direction.
3. The assembly of claim 1, wherein:
a physical property of the flow through said valve member affects flow in at least one of said directions.
4. The assembly of claim 1, wherein:
relative movement between said valve member and said housing regulates flow in at least one of said directions.
5. The assembly of claim 3, wherein:
said physical property comprises viscosity.
6. The assembly of claim 4, wherein:
said valve member comprises a longitudinal axis and an elongated exterior surface surrounding said axis: and
said directions for said flow comprise flow paths extending substantially along said longitudinal axis and other paths entering said valve member through said exterior surface.
7. The assembly of claim 1, wherein:
said relative movement selectively covers said exterior surface.
8. The assembly of claim 7, wherein:
the amount of said relative movement for a predetermined flow rate is determined by a physical property of the flowing fluid.
9. The assembly of claim 8, wherein:
said relative movement is resisted by bias force acting in a direction to cover said exterior surface.

10. The assembly of claim 9, wherein:
said physical property comprises viscosity such that the force exerted by said flow against said bias is increased to expose more of said exterior surface when the viscosity rises for a predetermined flow rate and decreases to expose less of said exterior surface for that flow rate when the viscosity decreases.
11. The assembly of claim 10, wherein:
said relative movement occurs without measurement of said viscosity.
12. The assembly of claim 11, wherein:
said valve member increasing resistance to flow therethrough from relative movement induced by flow of water as opposed to a more viscous hydrocarbon.
13. The assembly of claim 12, wherein:
said assembly comprises a plurality of valves situated adjacent spaced openings in a base pipe of a screen assembly;
said valves that experience a reduction in viscosity of the flow increasing resistance to flow as compared to other valves where the viscosity of the flow is higher.
14. The assembly of claim 13, wherein:
said valve members having an impervious inlet end surface adjacent said exterior surface for selectively restricting flow through said valve member when said exterior surface is covered by said housing.
15. The assembly of claim 4, wherein:
said valve member is movable with respect to said housing.
16. The assembly of claim 4, wherein:
a portion of said housing is movable with respect to a stationary valve member.
17. The assembly of claim 1, wherein:
said valve member is porous.
18. The assembly of claim 17, wherein:
said valve member is made of a pack of beads or a sintered metal.
19. The assembly of claim 18, wherein:
said valve member is one of a cylindrical or annular shape.

20. The assembly of claim 3, wherein:

said assembly further comprises a control system to sense a physical property of said flow and create relative movement between said valve member and said housing responsive to said sensed physical property.

1/3

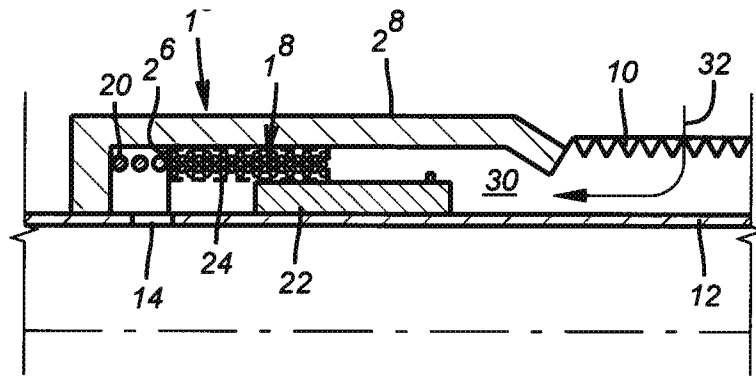


FIG. 1

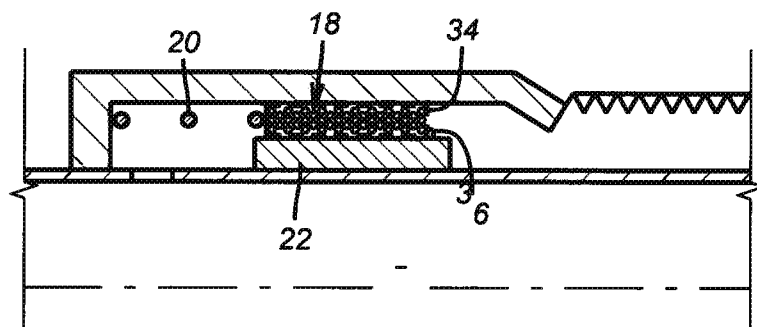


FIG. 2

2/3

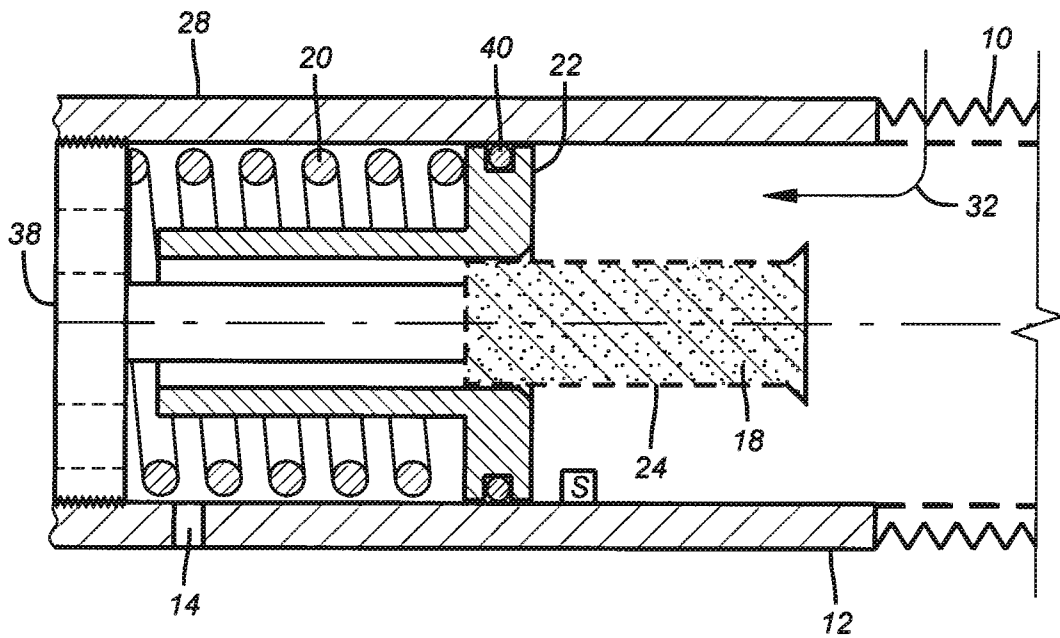


FIG. 3

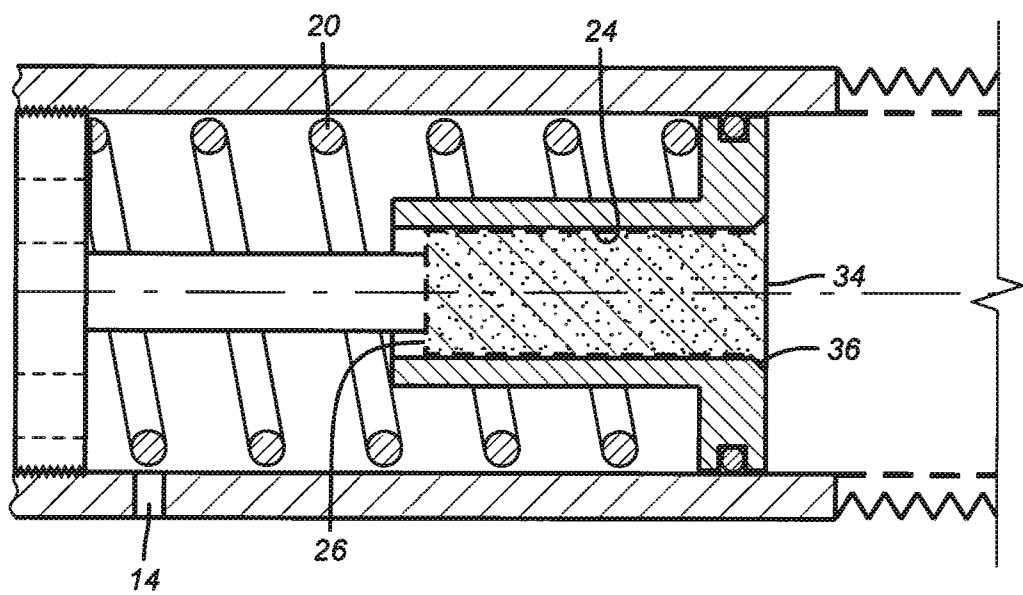


FIG. 4

3/3

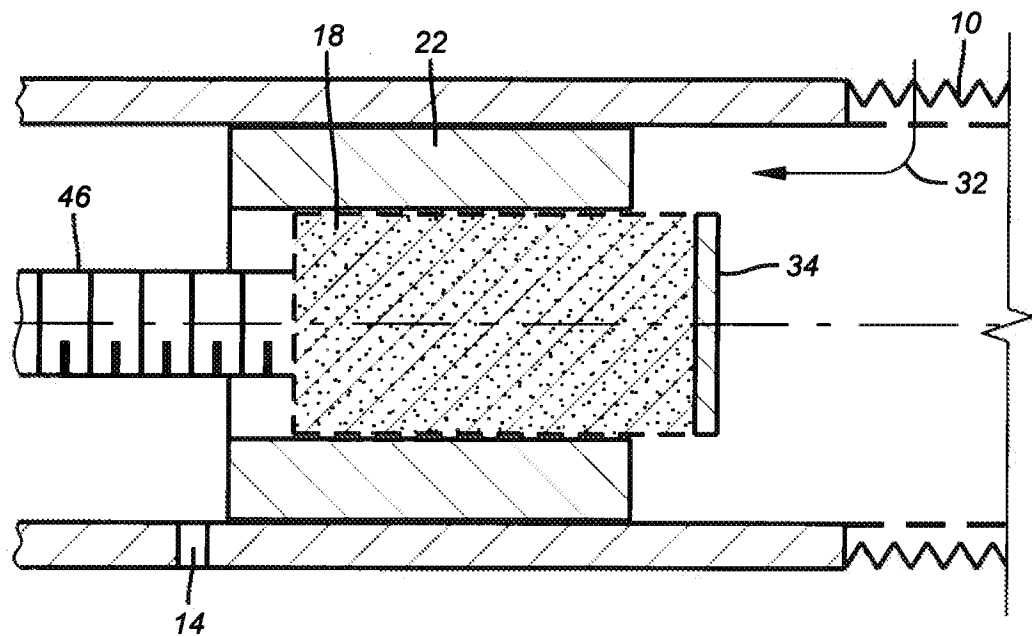


FIG. 5

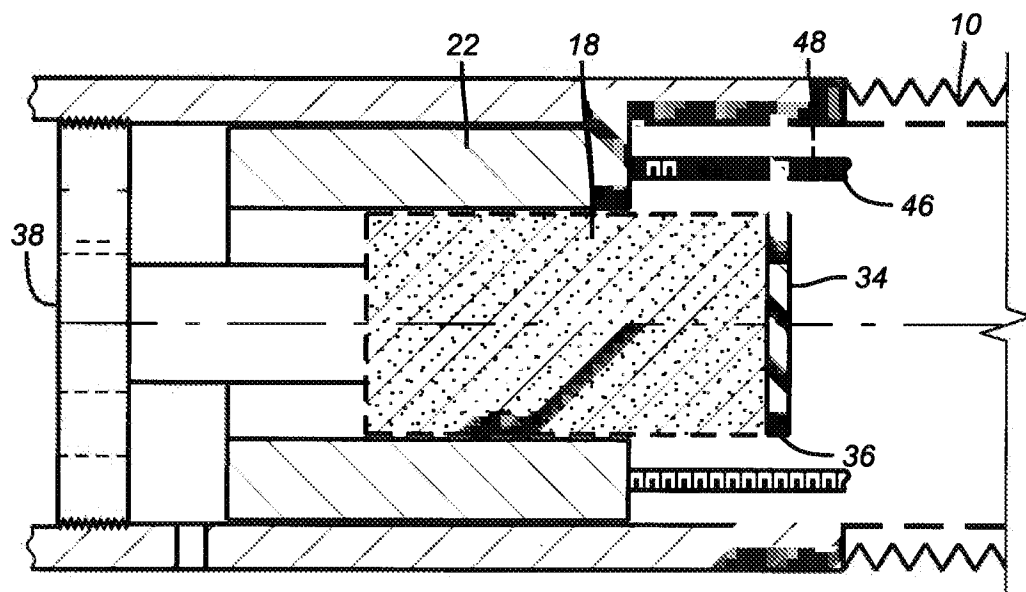


FIG. 6