US00D472256S

(12) **United States Design Patent** (10) **Patent No.: US D472,256 S**
Schick (45) **Date of Patent: ** Mar. 25, 2003**

(54) **SIGHTING DEVICE**

(75) Inventor: **Darin W. Schick**, Livonia, MI (US)

(73) Assignee: **Trijicon, Inc.**, Wixom, MI (US)

(**) Term: **14 Years**

(21) Appl. No.: **29/162,503**

(22) Filed: **Jun. 17, 2002**

(51) **LOC (7) Cl.** **16-06**
(52) **U.S. Cl.** **D16/132**
(58) **Field of Search** D16/130, 132, D16/135, 200, 202; D22/108, 109; 356/252; 359/350, 351, 353, 399, 400, 404, 419, 407, 420

(56) **References Cited**

U.S. PATENT DOCUMENTS

2,780,130 A 2/1957 Mauer

(List continued on next page.)

FOREIGN PATENT DOCUMENTS

WO WO97/00419 1/1997

Primary Examiner—Paula A. Mortimer
(74) *Attorney, Agent, or Firm*—Harness, Dickey & Pierce, P.L.C.


(57) **CLAIM**

The ornamental design for a design for sighting device, substantially as shown and described.

DESCRIPTION

FIG. **1** is a perspective view of a sighting device taken generally from the front upper end of the sighting device;
FIG. **2** is a perspective view of the sighting device of FIG. **1** taken generally from the rear upper end of the sighting device;
FIG. **3** is a side elevational view of the sighting device of FIG. **1** showing the side opposite of the side shown in FIGS. **1** and **2**;
FIG. **4** is a side elevational view of the sighting device of FIG. **1** of the side as shown in FIGS. **1** and **2** and opposite from the side shown in FIG. **3**;
FIG. **5** is an end elevational view of the sighting device of FIG. **1** generally as seen in FIG. **2**;
FIG. **6** is a front elevational view of the sighting device of FIG. **1** generally as seen in FIG. **1**;
FIG. **7** is a top elevational view of the sighting device of FIG. **1**; and
FIG. **8** is a bottom elevational view of the sighting device of FIG. **1**;
FIG. **1***a* is a perspective view of a sighting device of a design modified from that of FIG. **1** and taken generally from the front upper end of the sighting device;
FIG. **2***a* is a perspective view of the sighting device of FIG. **1**a taken generally from the rear upper end of the sighting device;
FIG. **3***a* is a side elevational view of the sighting device of FIG. **1**a showing the side opposite of the side shown in FIGS. **1***a* and **2***a*;
FIG. **4***a* is a side elevational view of the sighting device of FIG. **1***a* of the side as shown in FIGS. **1***a* and **2***a* and opposite from the side shown in FIG. **3***a*;
FIG. **5***a* is an end elevational view of the sighting device of FIG. **1***a* generally as seen in FIG. **2***a*;
FIG. **6***a* is a front elevational view of the sighting device of FIG. **1***a* generally seen as FIG. **1***a*;
FIG. **7***a* is a top elevational view of the sighting device of FIG. **1***a*; and
FIG. **8***a* is a bottom elevational view of the sighting device of FIG. **1***a*;
FIG. **1***b* is a perspective view of a sighting device of a design modified from that of FIGS. **1** and **1***a* and taken generally from the front upper end of the sighting device;
FIG. **2***b* is a perspective view of the sighting device of FIG. **1***b* generally from the rear upper end of the sighting device;
FIG. **3***b* is a side elevational view of the sighting device of FIG. **1***b* showing the side opposite of the side shown in FIGS. **1***b* and **2***b*;
FIG. **4***b* is a side elevational view of the sighting device of FIG. **1***b* of the side as shown in FIGS. **1***b* and **2***b* and opposite from the side shown in FIG. **3***b*;
FIG. **5***b* is an end elevational view of the sighting device of FIG. **1***b* generally as seen in FIG. **2***b*;
FIG. **6***b* is a front elevational view of the sighting device of FIG. **1***b* generally as seen in FIG. **1***b*;
FIG. **7***b* is a top elevational view of the sighting device of FIG. **1***b*; and,
FIG. **8***b* is a bottom elevational view of the sighting device of FIG. **1***b*.

1 Claim, 20 Drawing Sheets

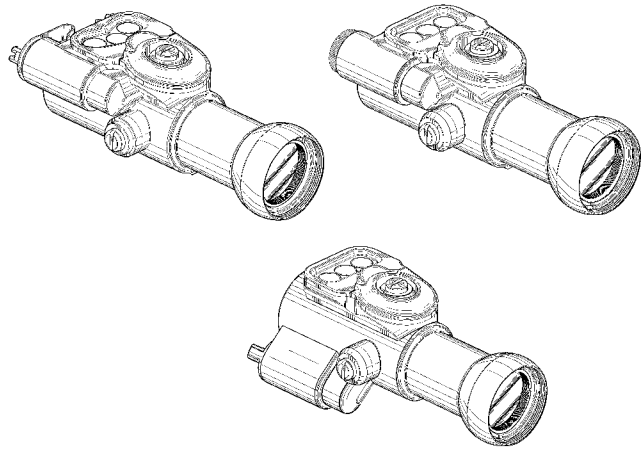

U.S. PATENT DOCUMENTS

4,417,814	A		11/1983	Doliber	
D287,977	S	*	1/1987	Cannon	D16/132
4,665,622	A		5/1987	Idan	
4,764,011	A		8/1988	Goldstein	
4,806,007	A		2/1989	Bindon	
4,877,324	A		10/1989	Hauri et al.	
D312,089	S	*	11/1990	Jörlöv	D16/132
D344,531	S	*	2/1994	Nemoto	D16/132
D365,858	S	*	1/1996	Tomita	D22/109
D369,367	S	*	4/1996	Tomita	D16/132
D374,022	S	*	9/1996	Meinzer	D16/132
5,653,034	A		8/1997	Bindon	
D395,440	S	*	6/1998	Ogasawara et al.	D16/132
5,924,234	A		7/1999	Bindon et al.	
D414,835	S		10/1999	Otteman et al.	
D415,546	S		10/1999	Otteman et al.	
D416,972	S		11/1999	Otteman et al.	
D420,718	S		2/2000	Otteman et al.	
D439,259	S	*	3/2001	Yamaguchi	D16/132

* cited by examiner

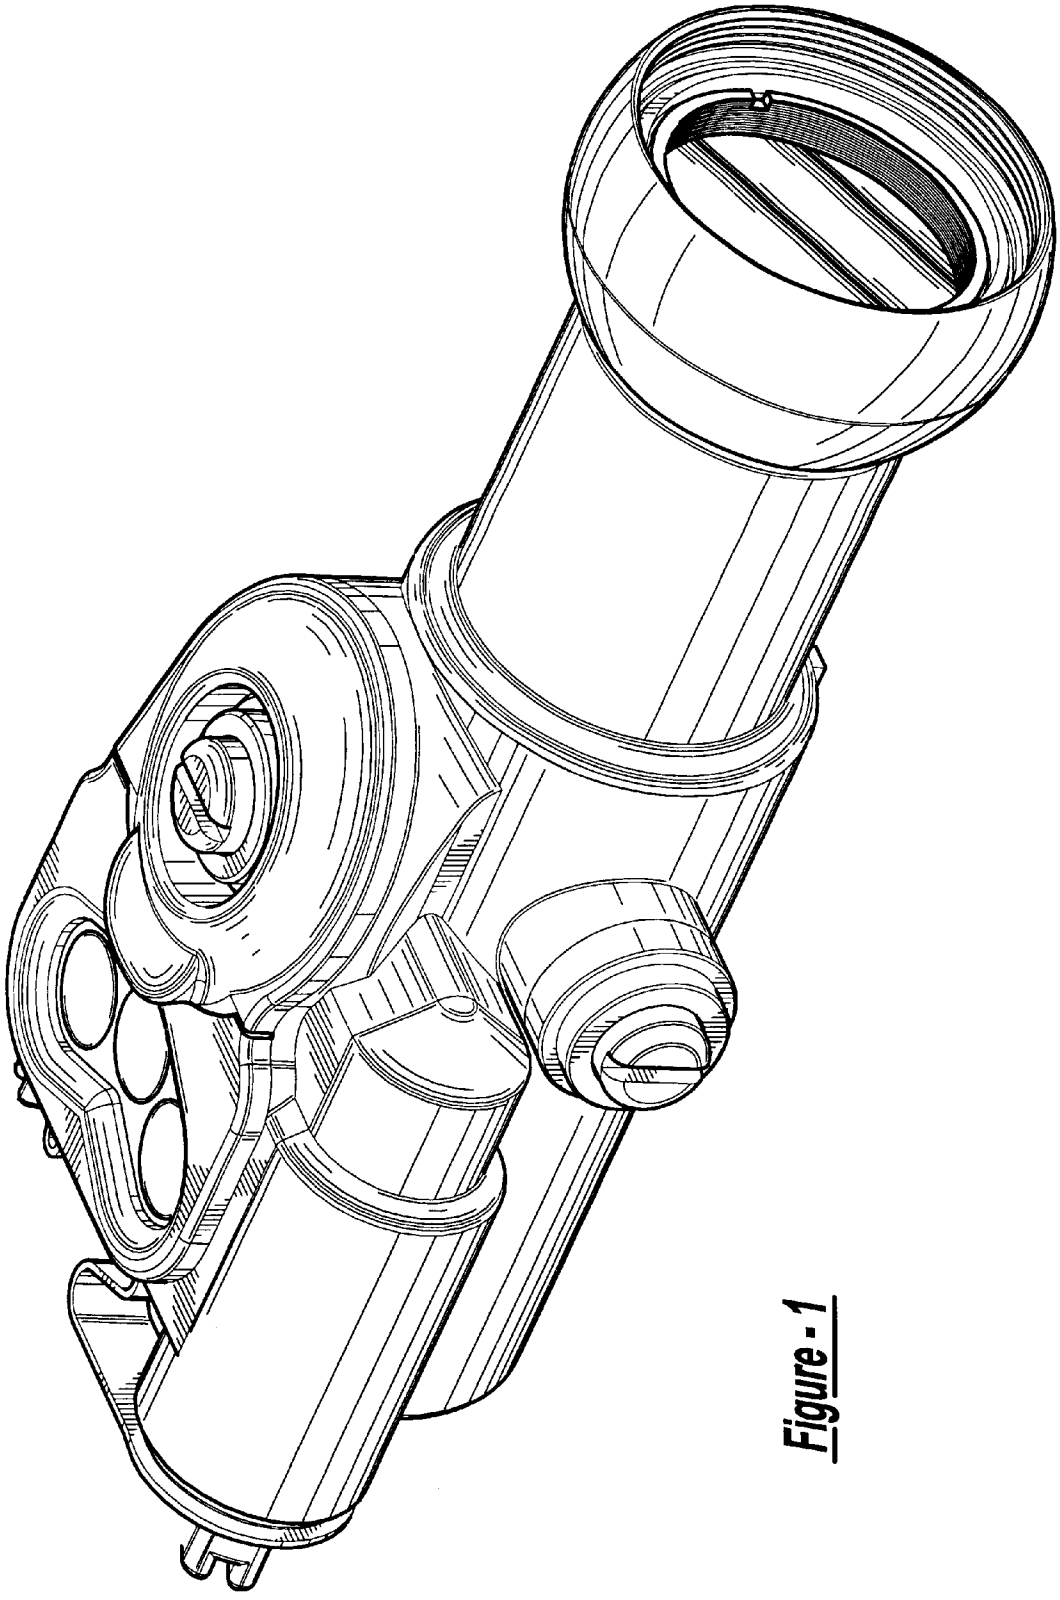


Figure - 1

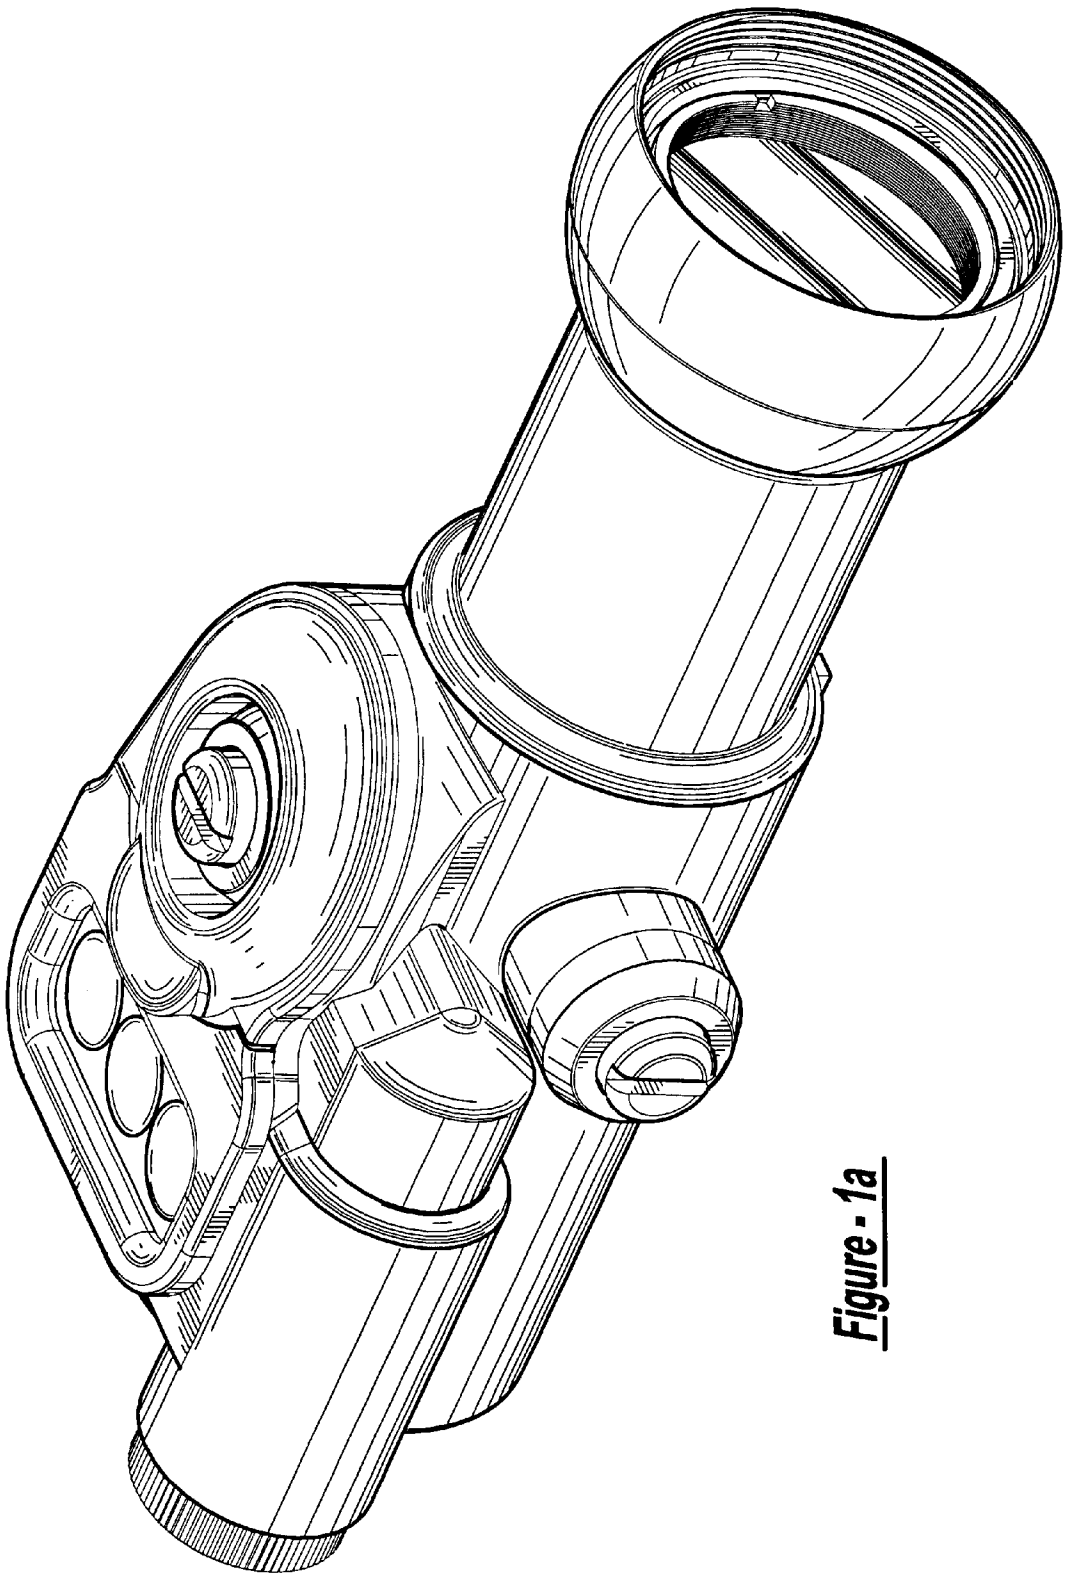


Figure - 1a

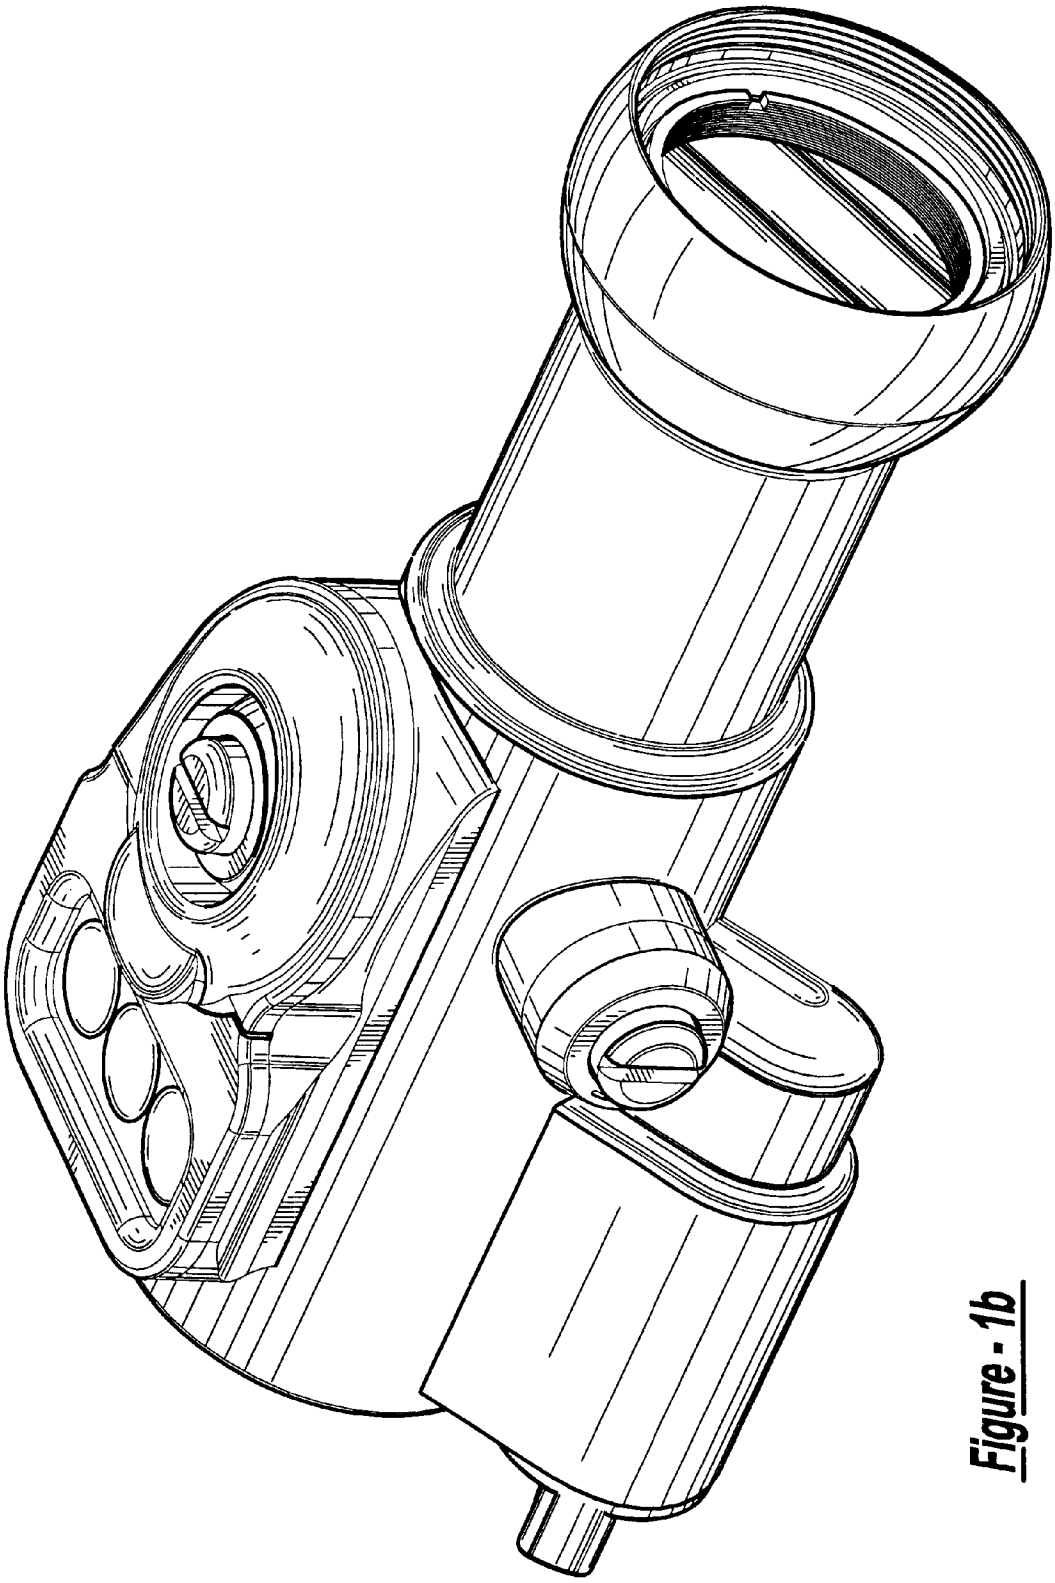


Figure - 1b

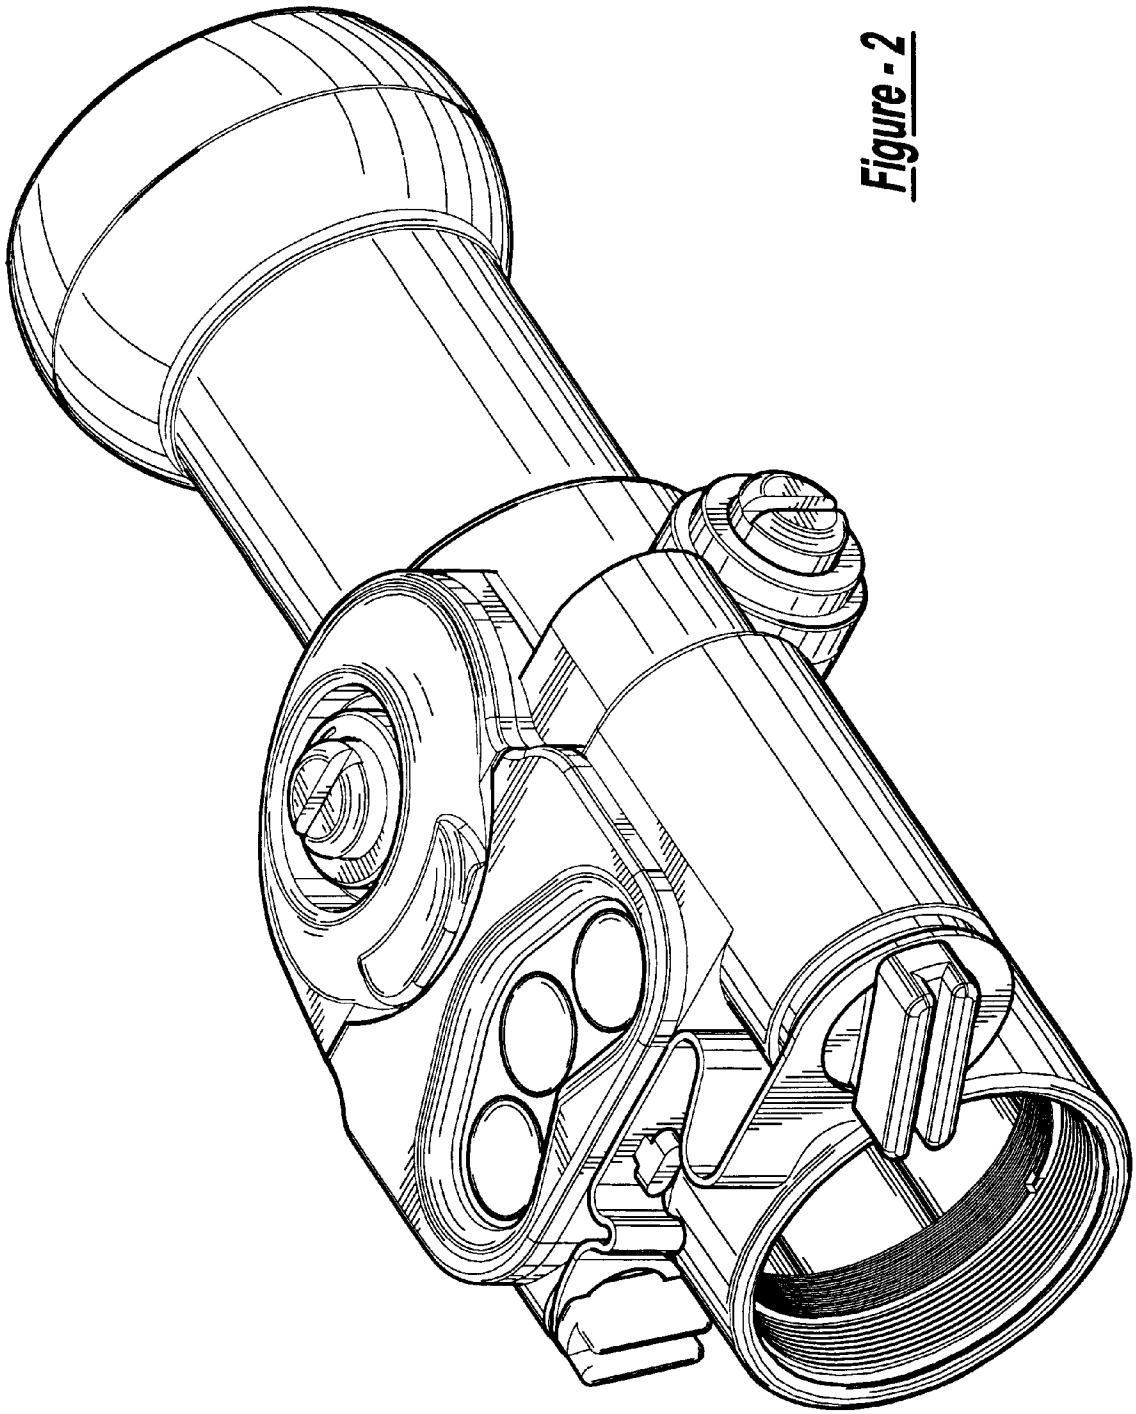


Figure - 2

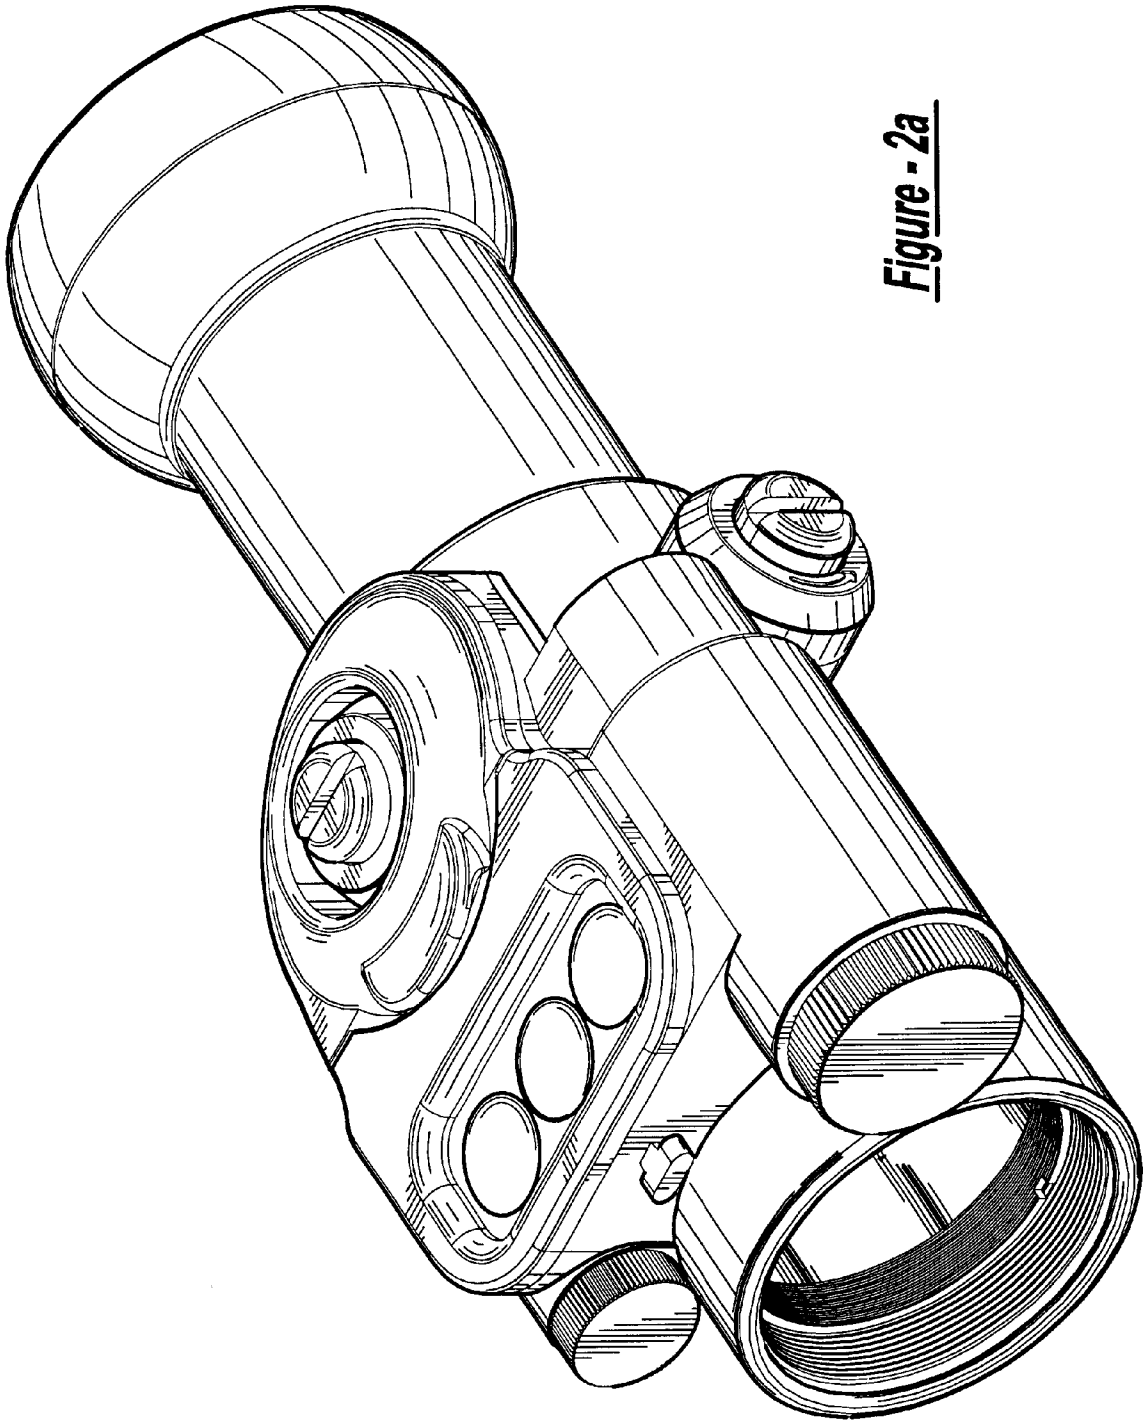


Figure - 2a

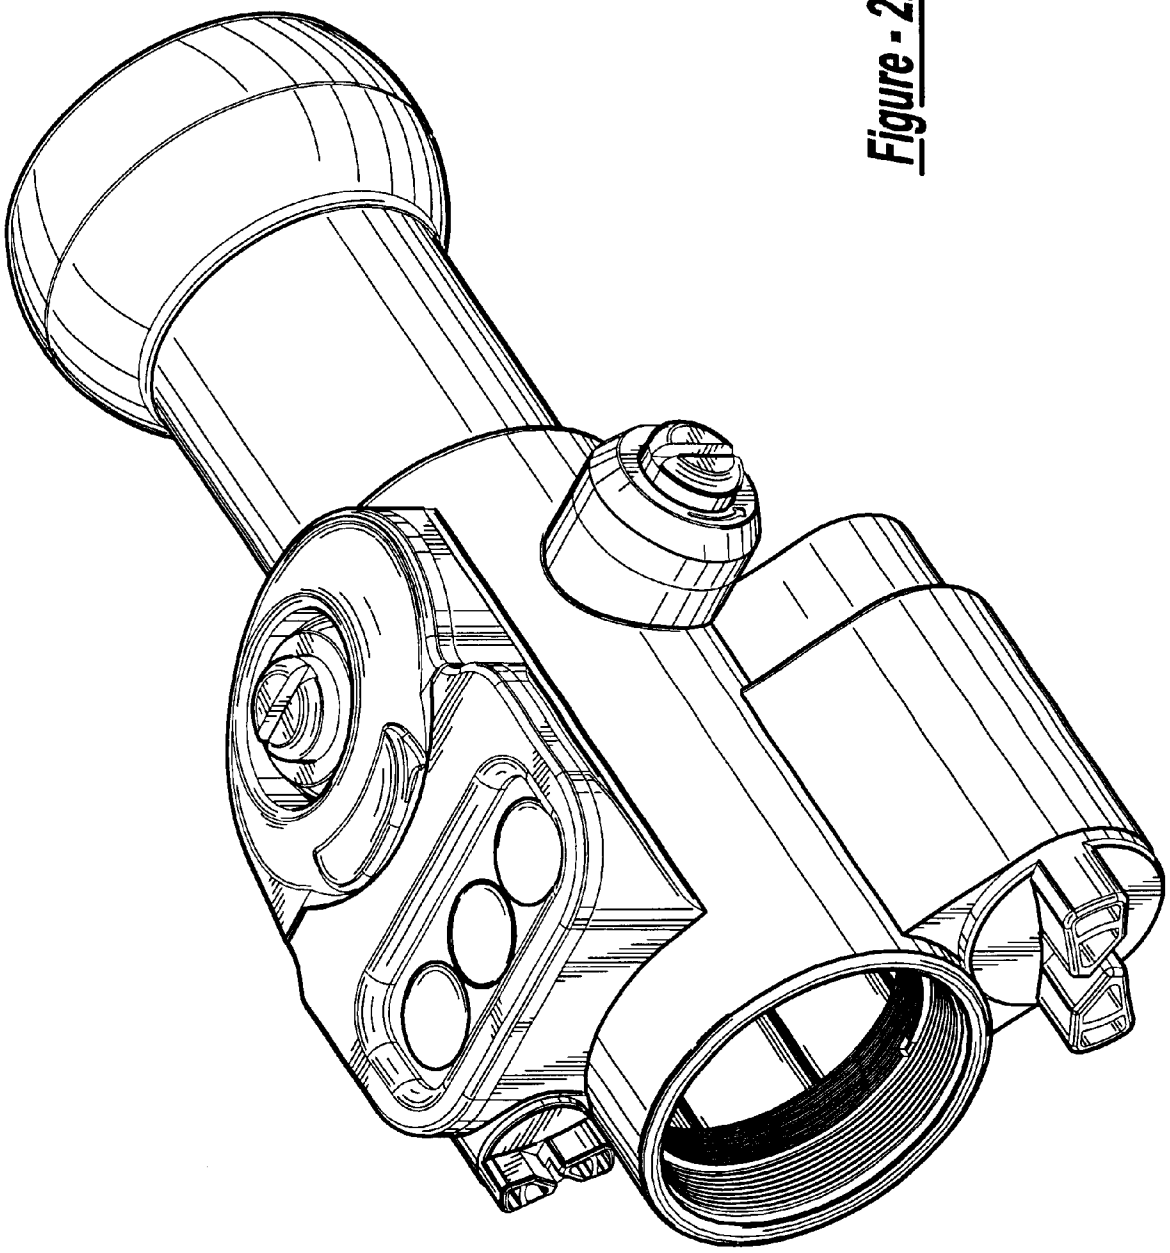


Figure - 2b

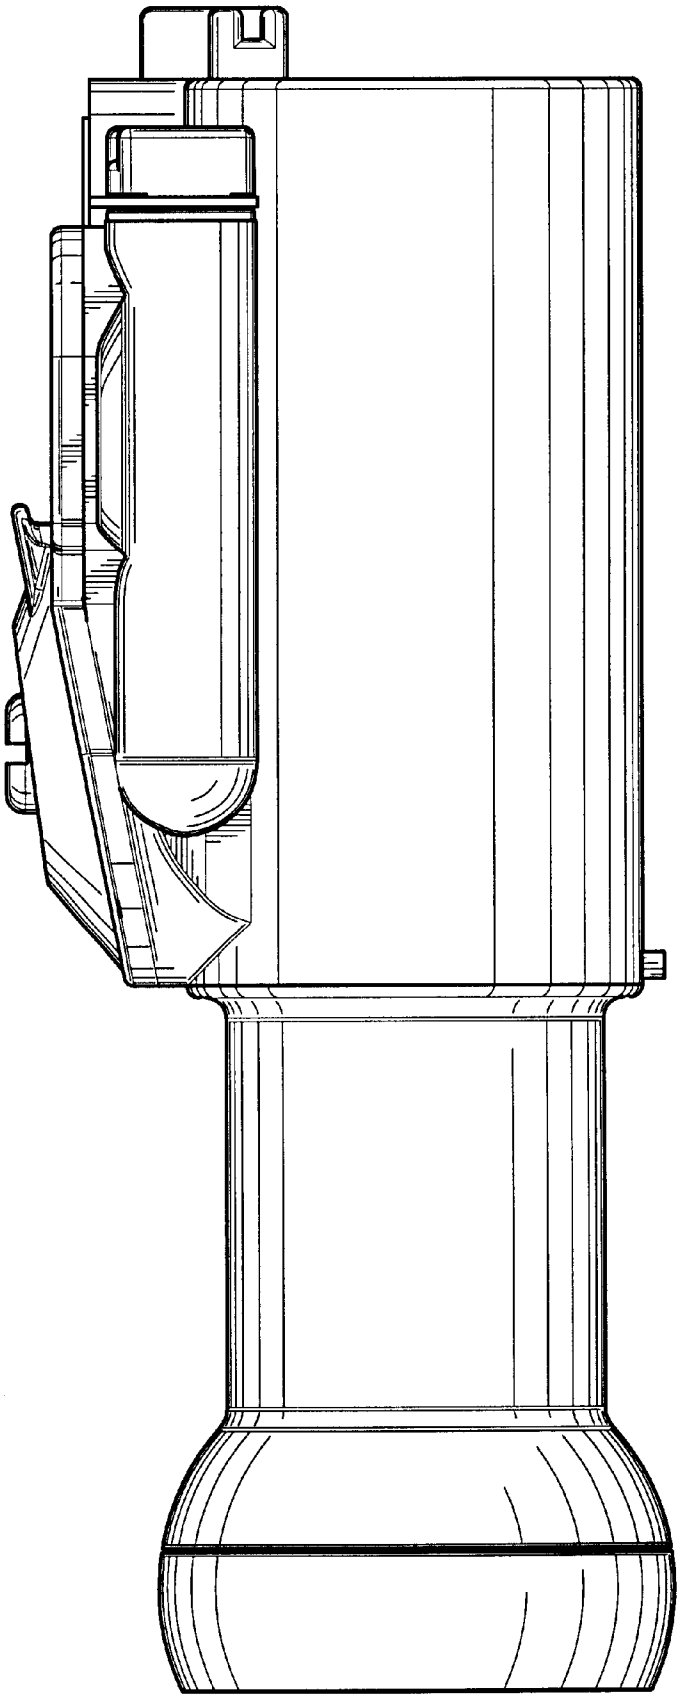
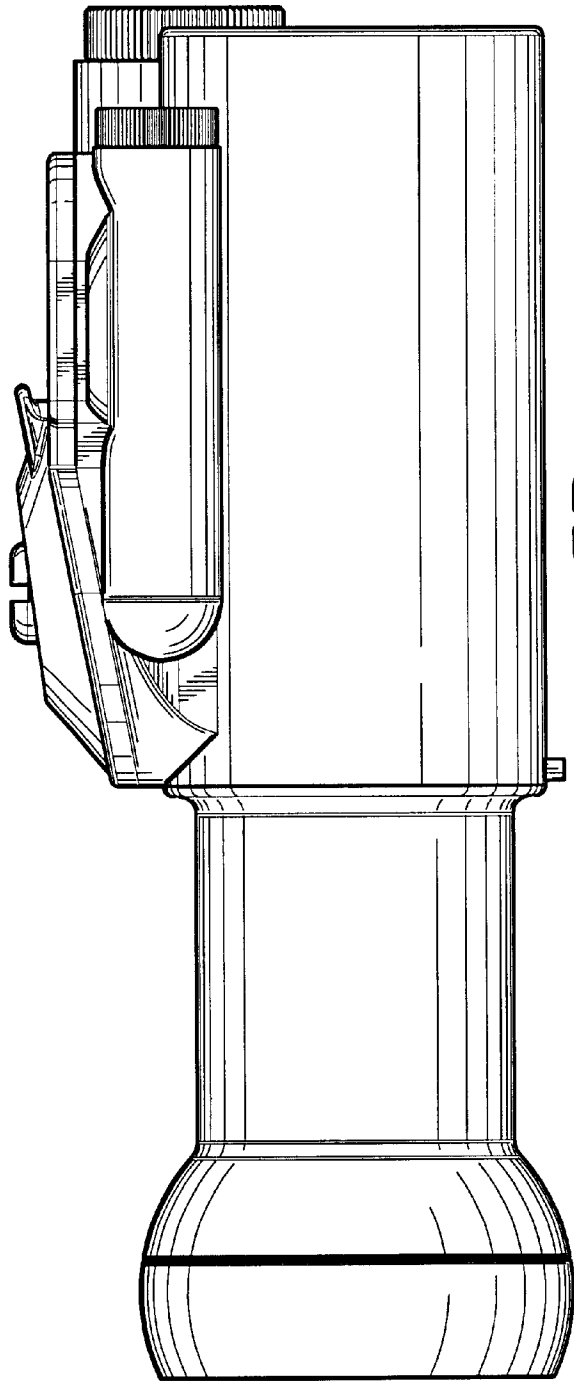


Figure - 3

Figure - 3a



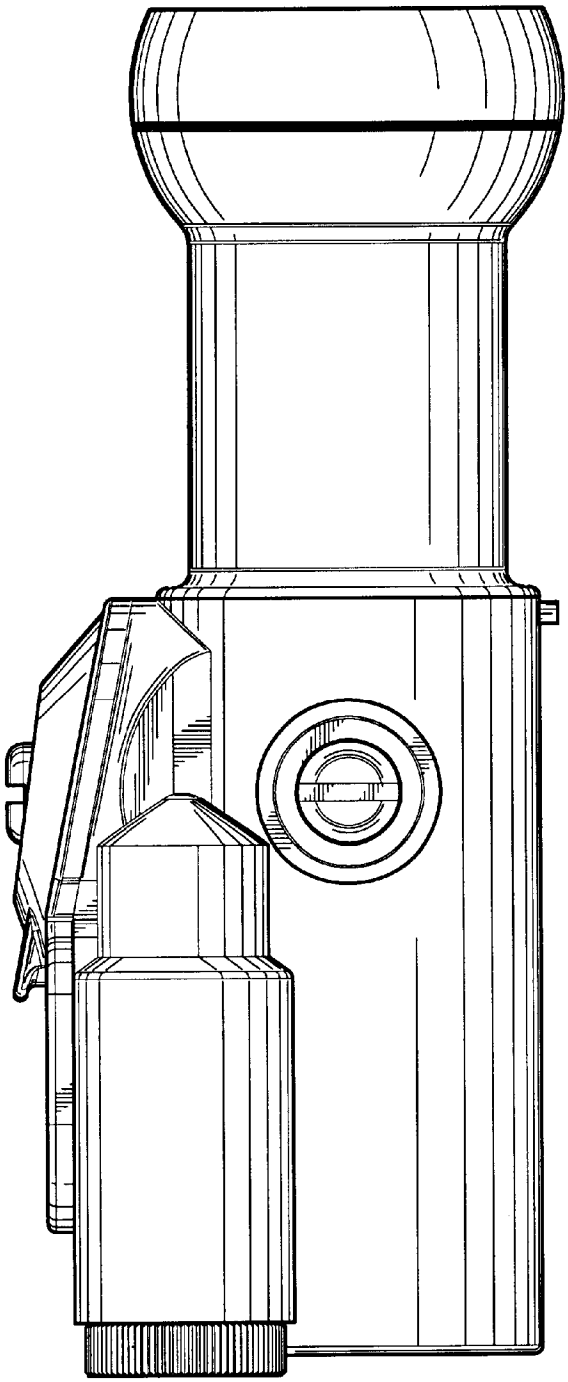


Figure - 4a

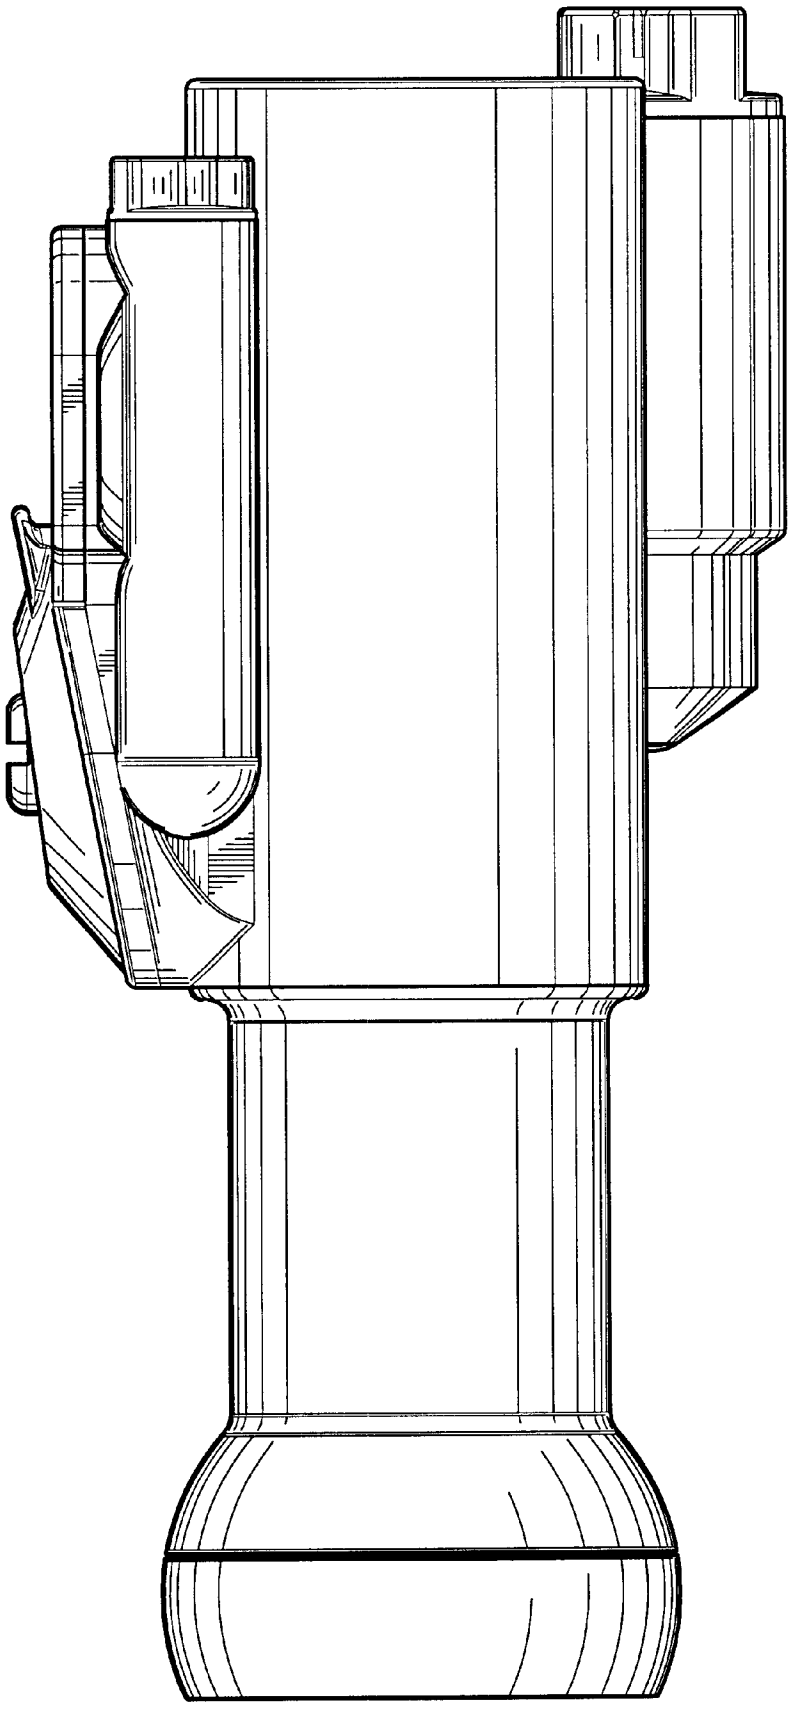


Figure - 3b

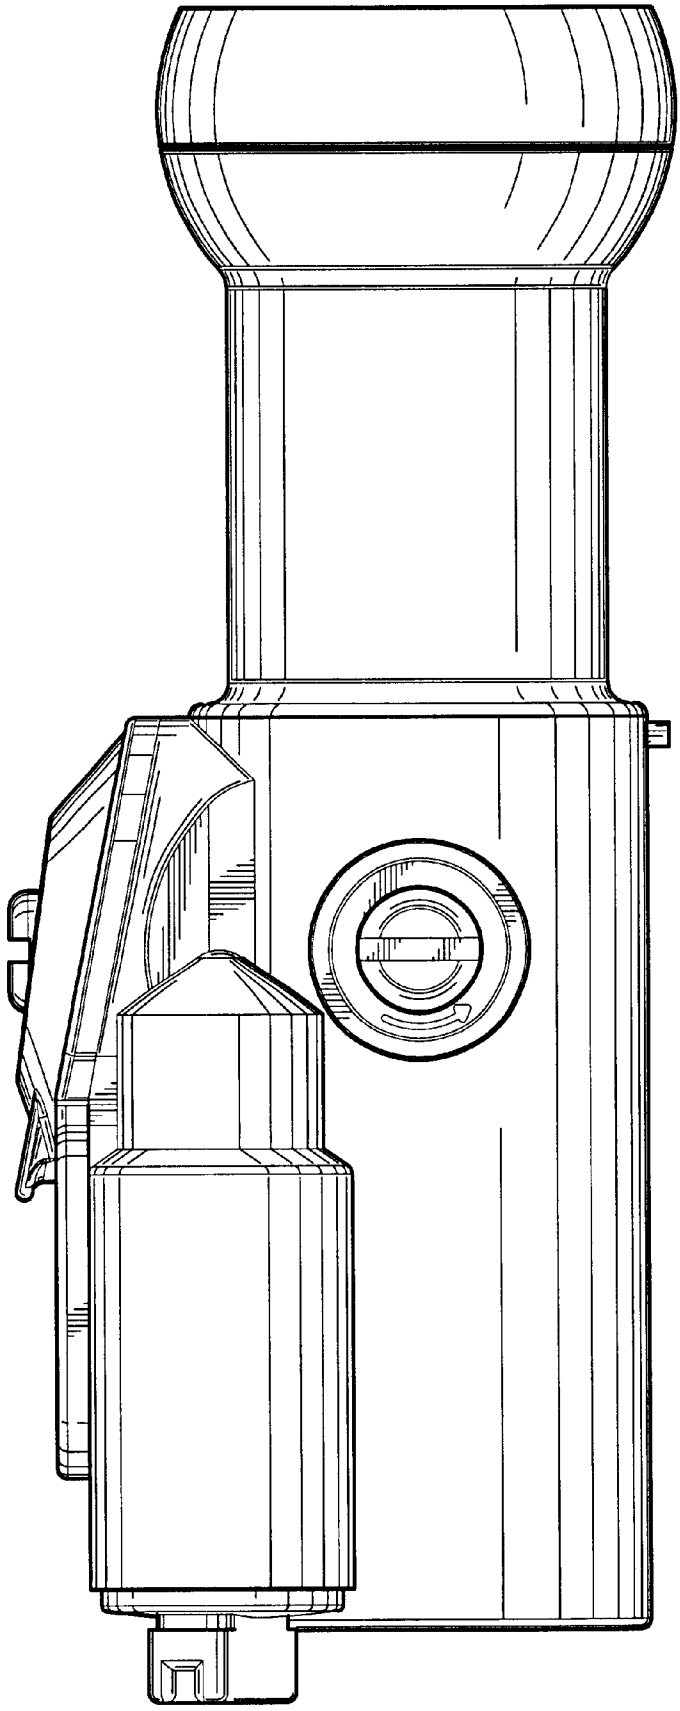


Figure - 4

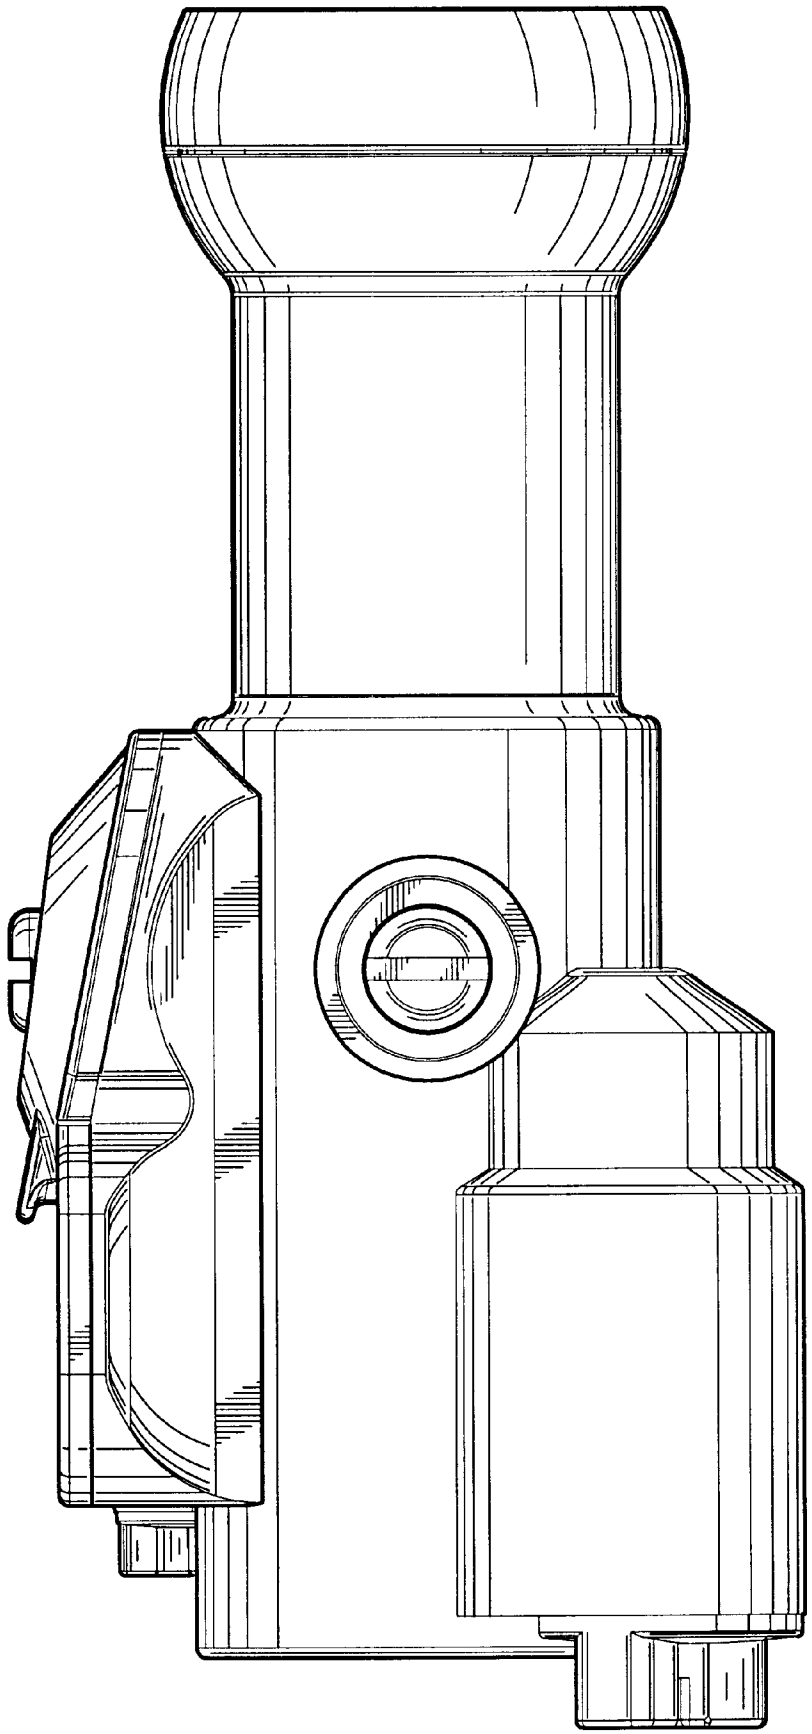


Figure - 4b

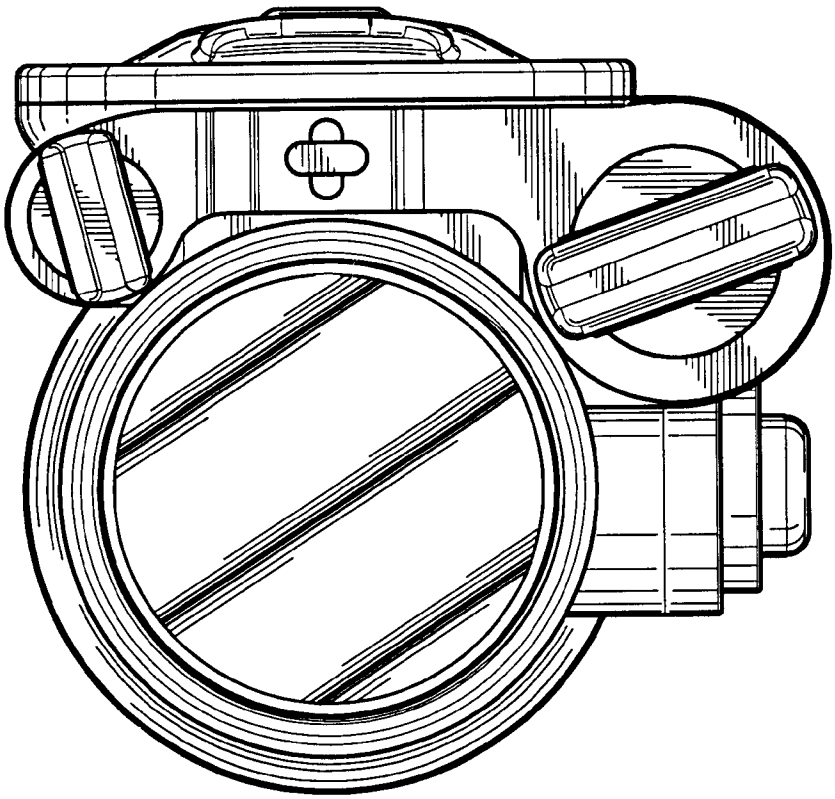


Figure - 5

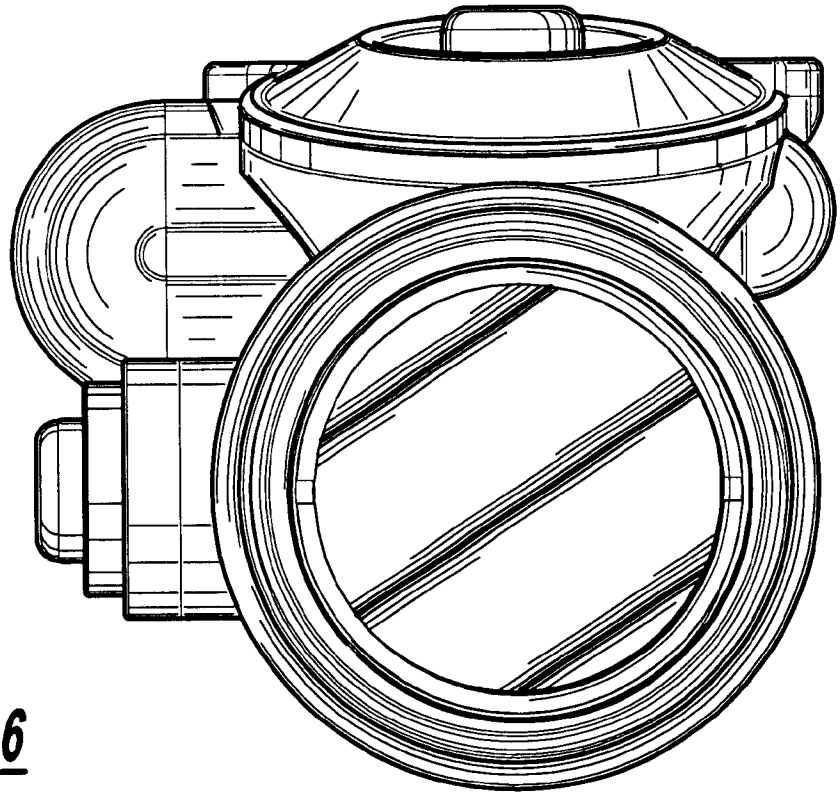


Figure - 6

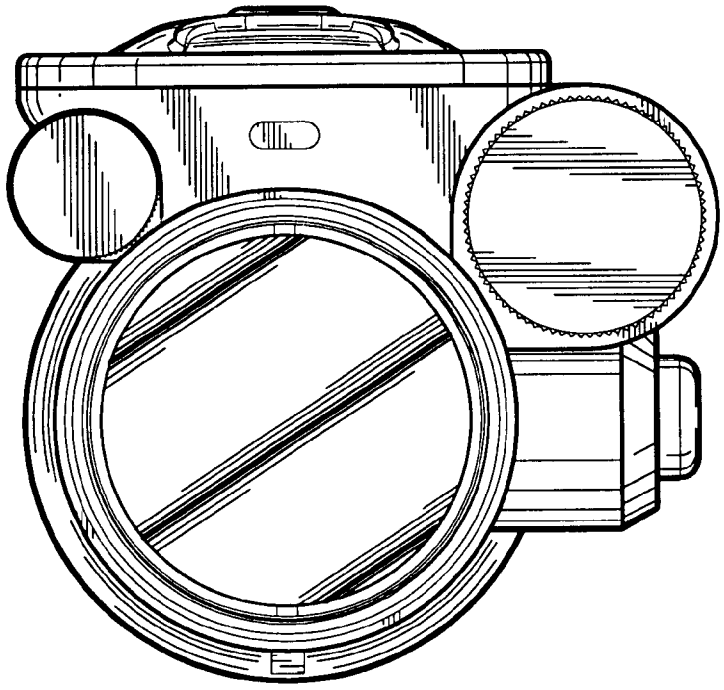


Figure - 5a

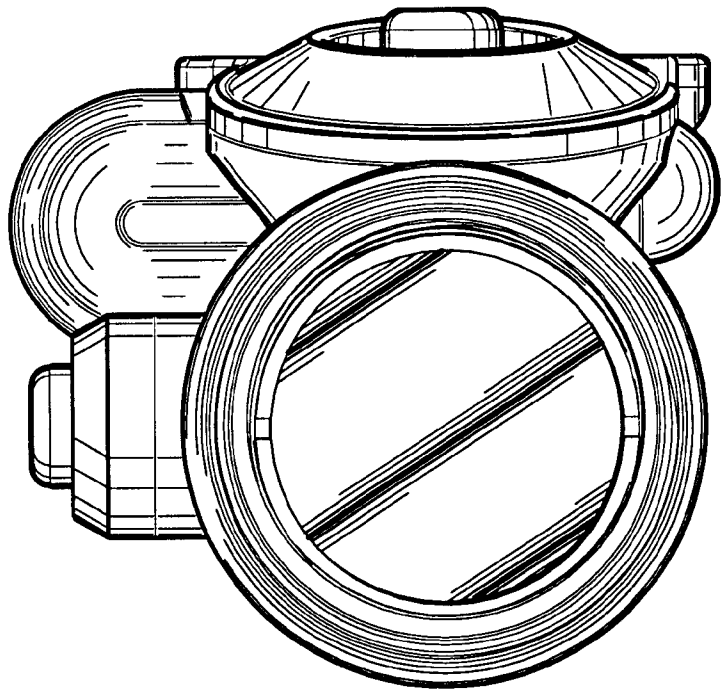


Figure - 6a

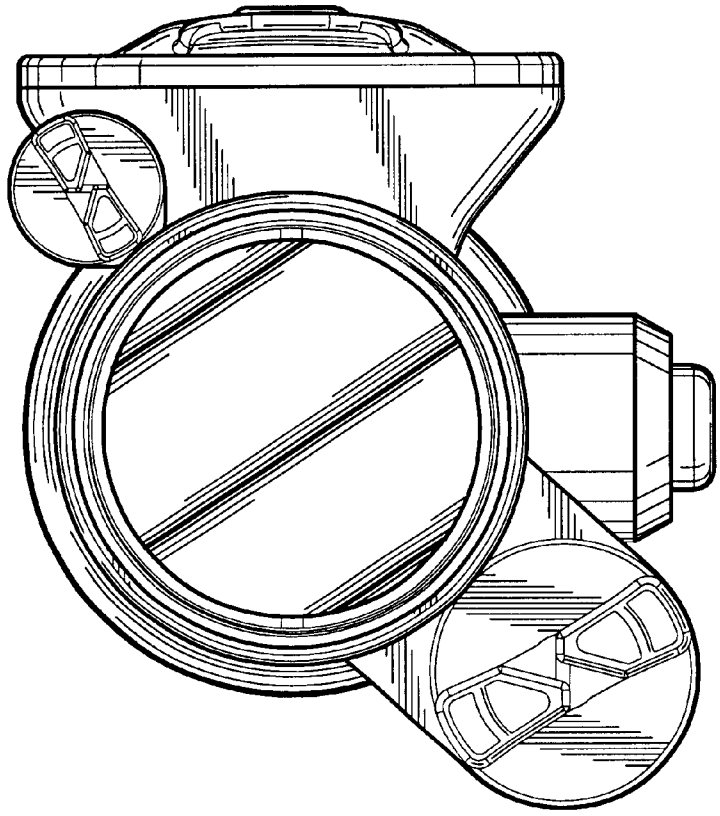


Figure - 5b

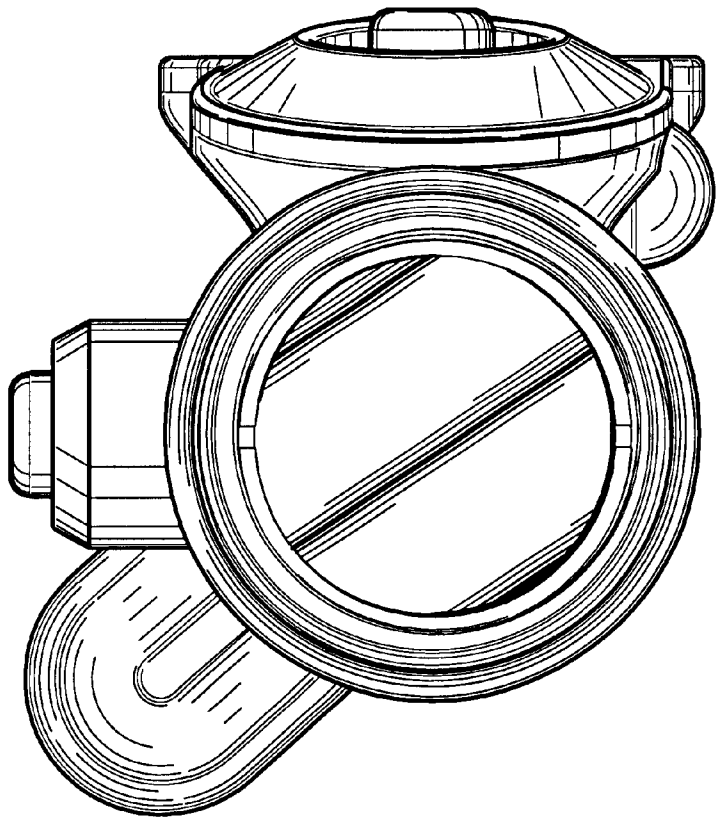


Figure - 6b

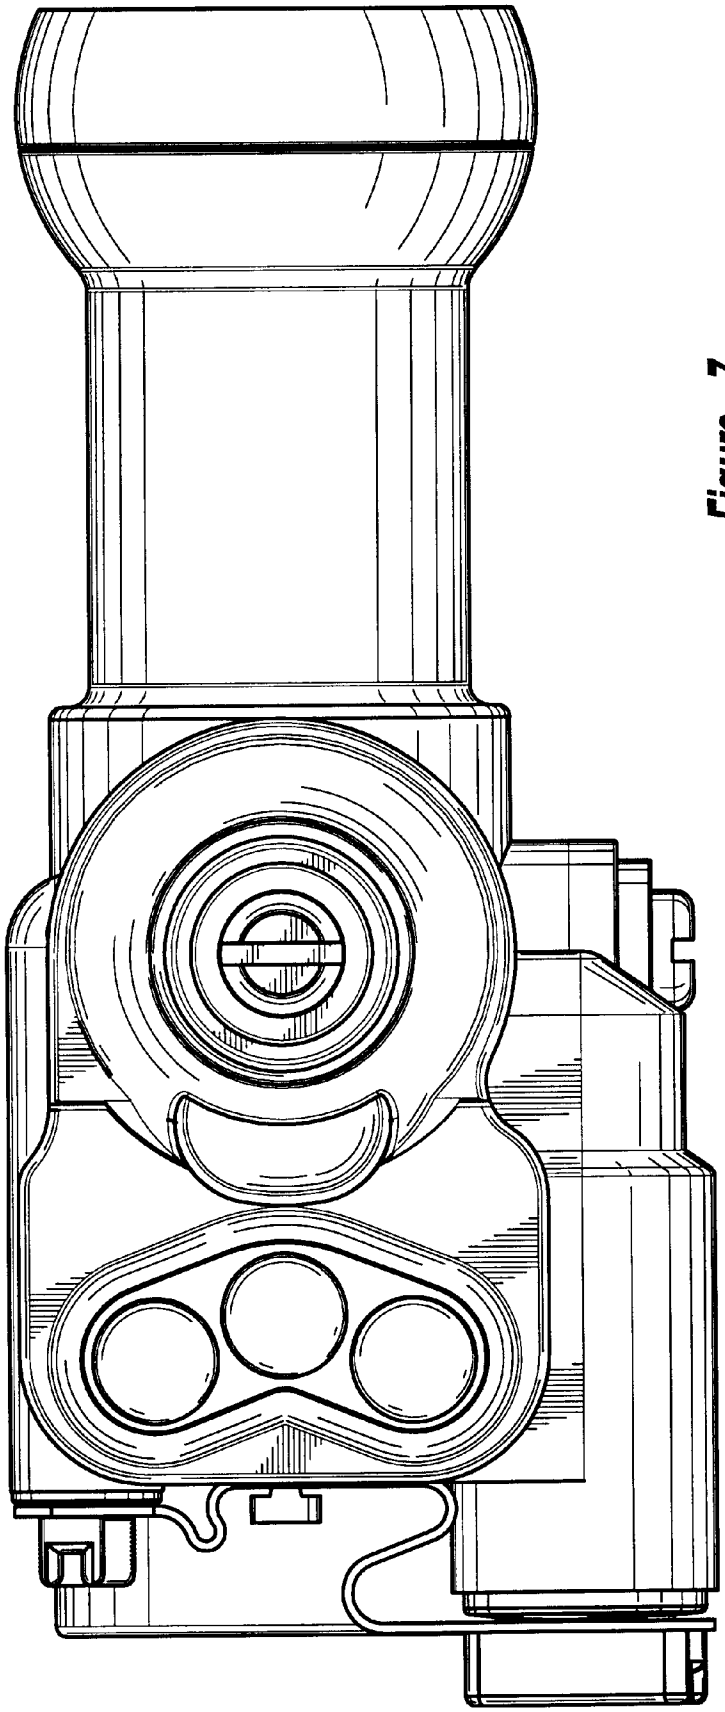


Figure - 7

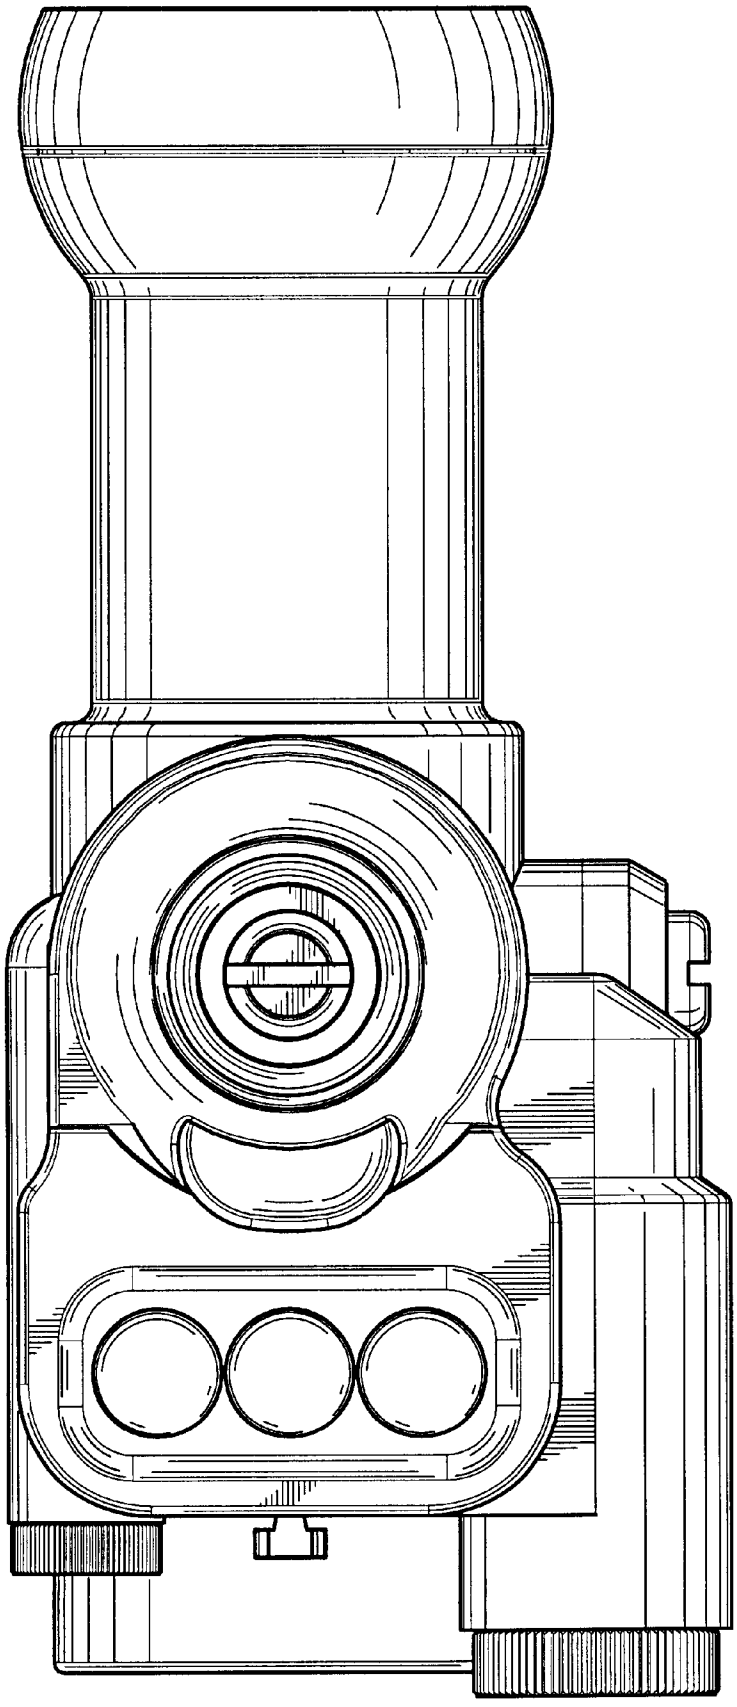


Figure - 7a

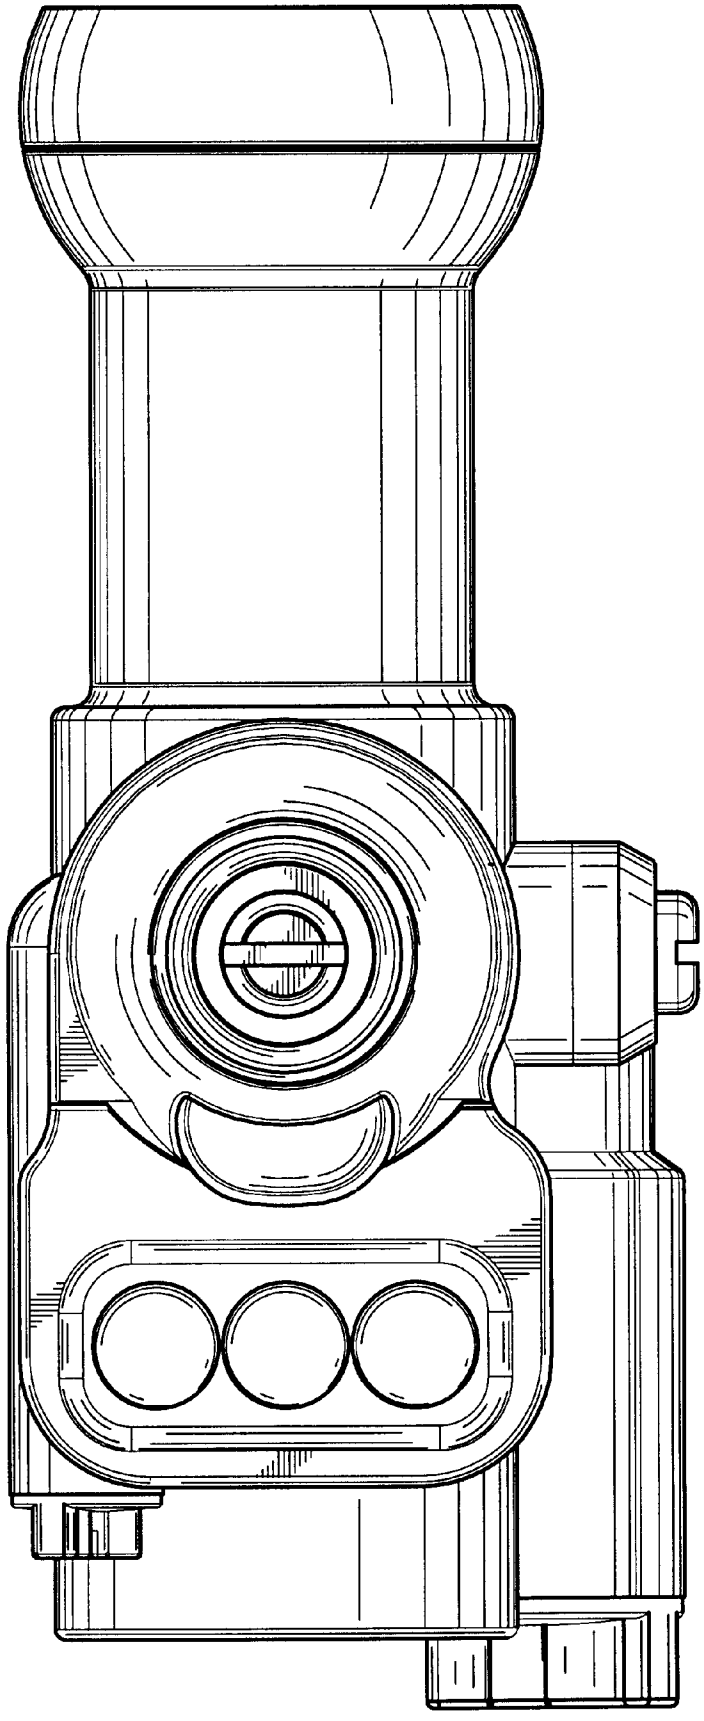


Figure - 7b

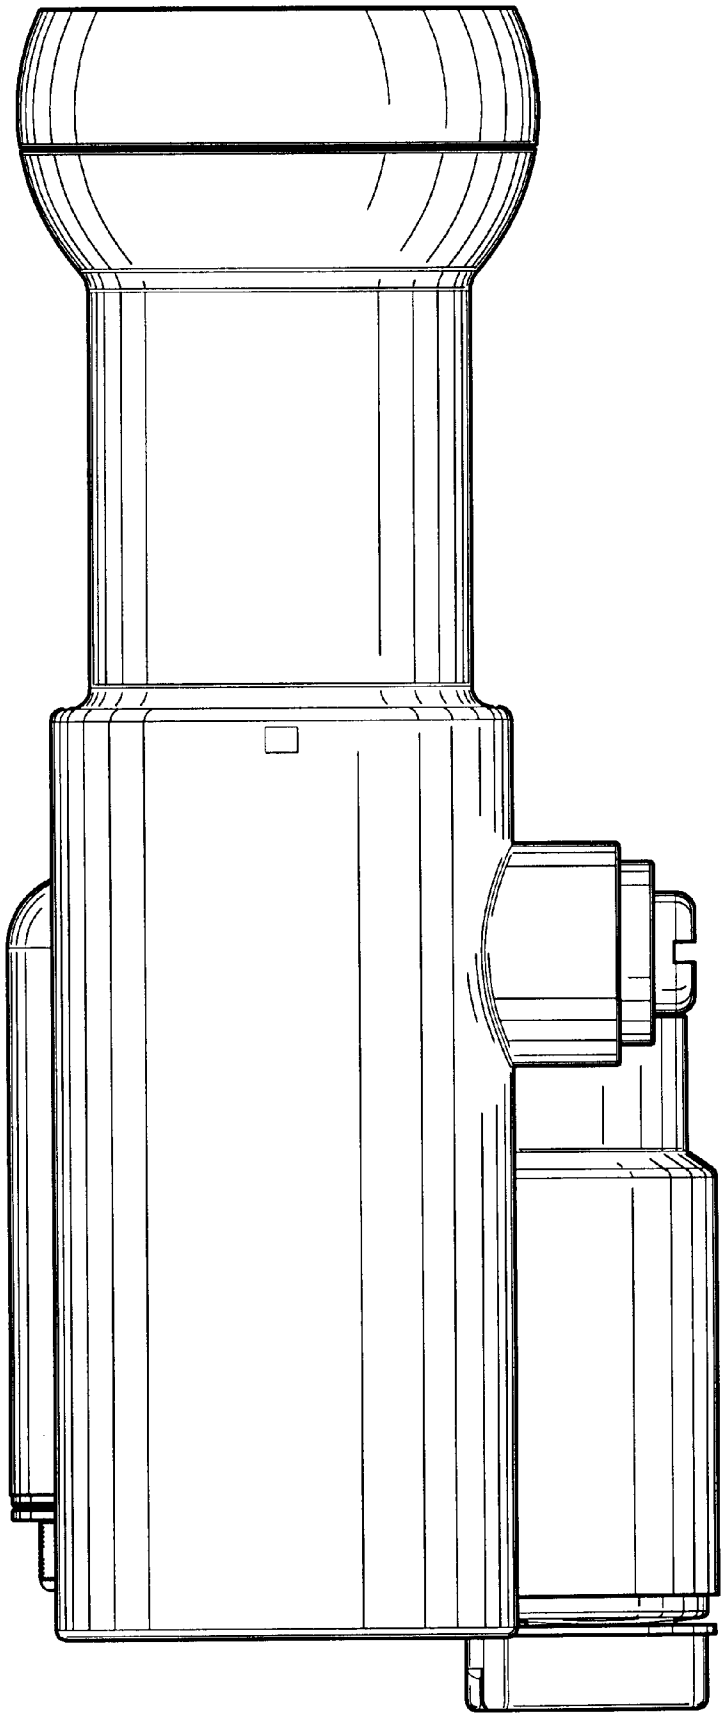


Figure - 8

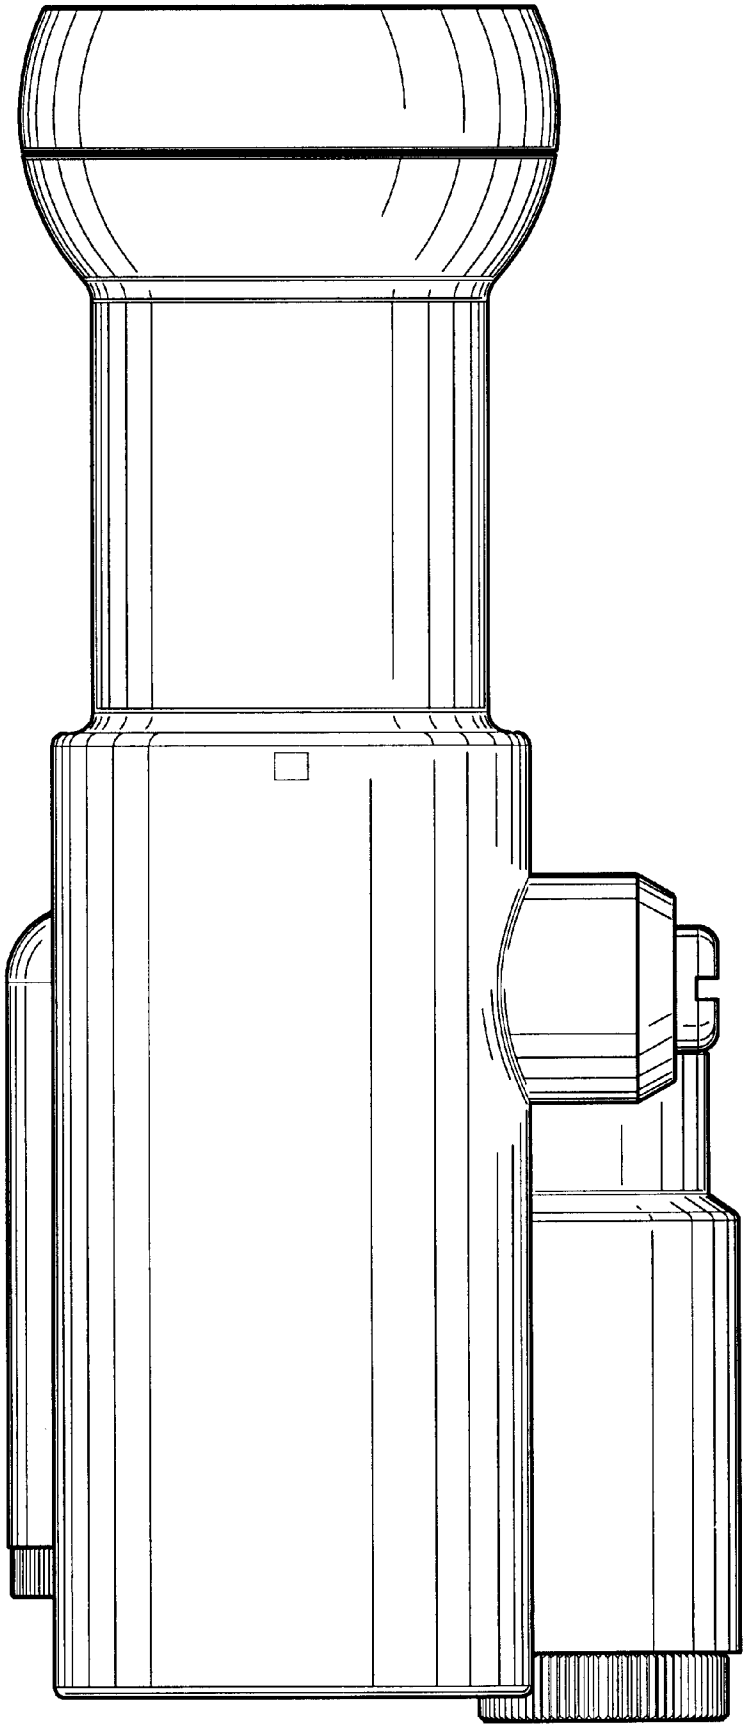


Figure - 8a

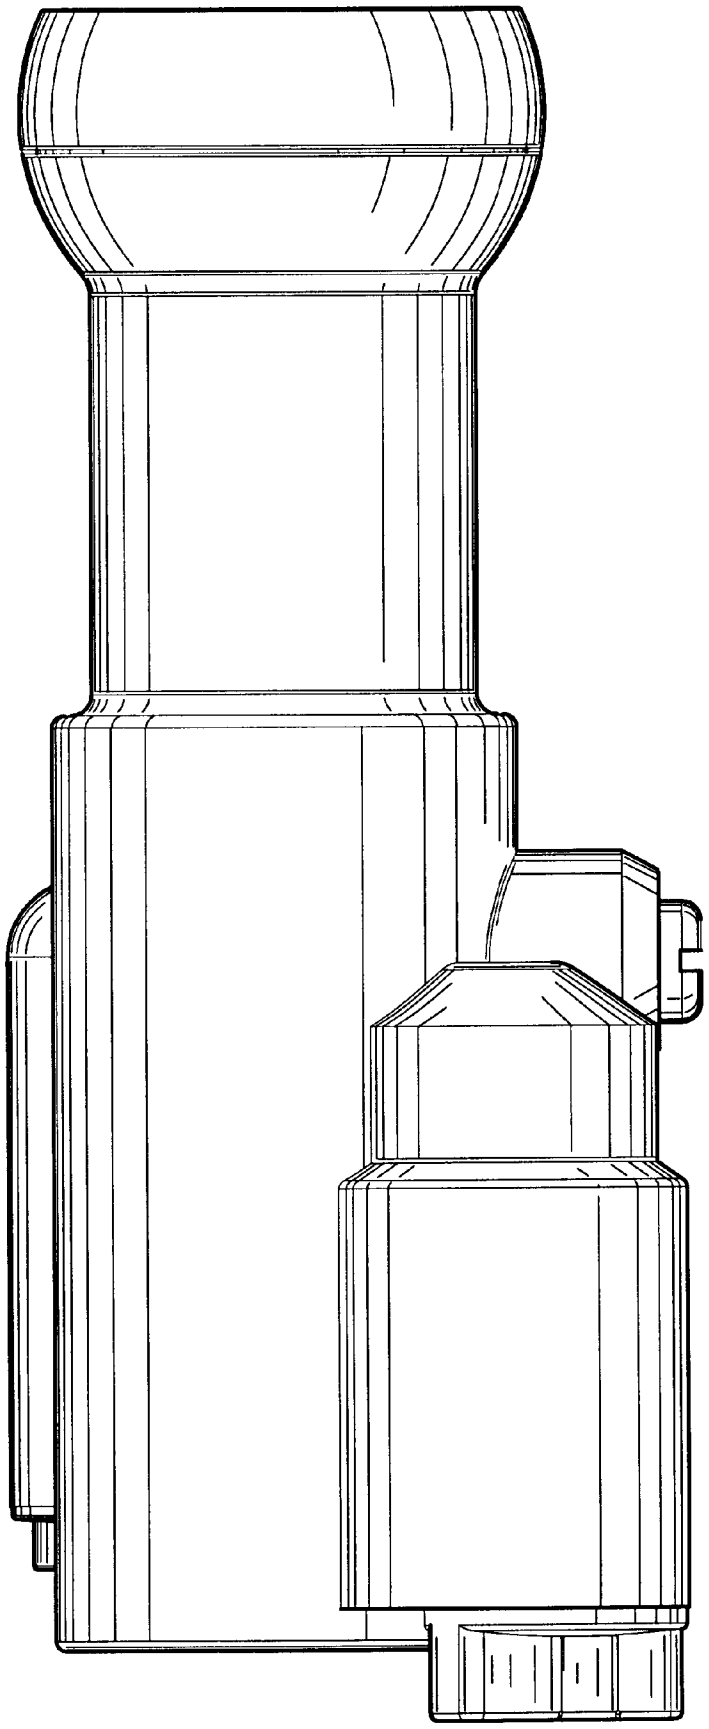


Figure - 8b

UNITED STATES PATENT AND TRADEMARK OFFICE

CERTIFICATE OF CORRECTION

PATENT NO. : Des. 472,256 S
DATED : March 25, 2003
INVENTOR(S) : Darin W. Schick

It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

Column 2,
Line 22, after "generally" insert -- as --
Line 22, after "seen" delete -- as --
Line 22, after "1a" second occurrence, insert -- and is substantially the same as FIG. 6 --

Signed and Sealed this

Sixth Day of May, 2003



JAMES E. ROGAN
Director of the United States Patent and Trademark Office