




(86) Date de dépôt PCT/PCT Filing Date: 2012/10/26
(87) Date publication PCT/PCT Publication Date: 2014/05/01
(45) Date de délivrance/Issue Date: 2018/02/20
(85) Entrée phase nationale/National Entry: 2014/10/24
(86) N° demande PCT/PCT Application No.: CA 2012/000984
(87) N° publication PCT/PCT Publication No.: 2014/063223

(51) Cl.Int./Int.Cl. *F03B 13/14* (2006.01),
F03G 7/08 (2006.01), *H02K 1/06* (2006.01),
H02K 1/34 (2006.01)
(72) Inventeur/Inventor:
SULLIVAN, WILLIAM PAUL, CA
(73) Propriétaire/Owner:
SULLIVAN, WILLIAM PAUL, CA
(74) Agent: MURRAY, SEAN

(54) Titre : SYSTÈME ET APPAREIL DE GENERATION D'ELECTRICITE A PARTIR DU MOUVEMENT D'UN FLUIDE
(54) Title: SYSTEM AND APPARATUS FOR GENERATING ELECTRICITY FROM MOTION OF FLUID

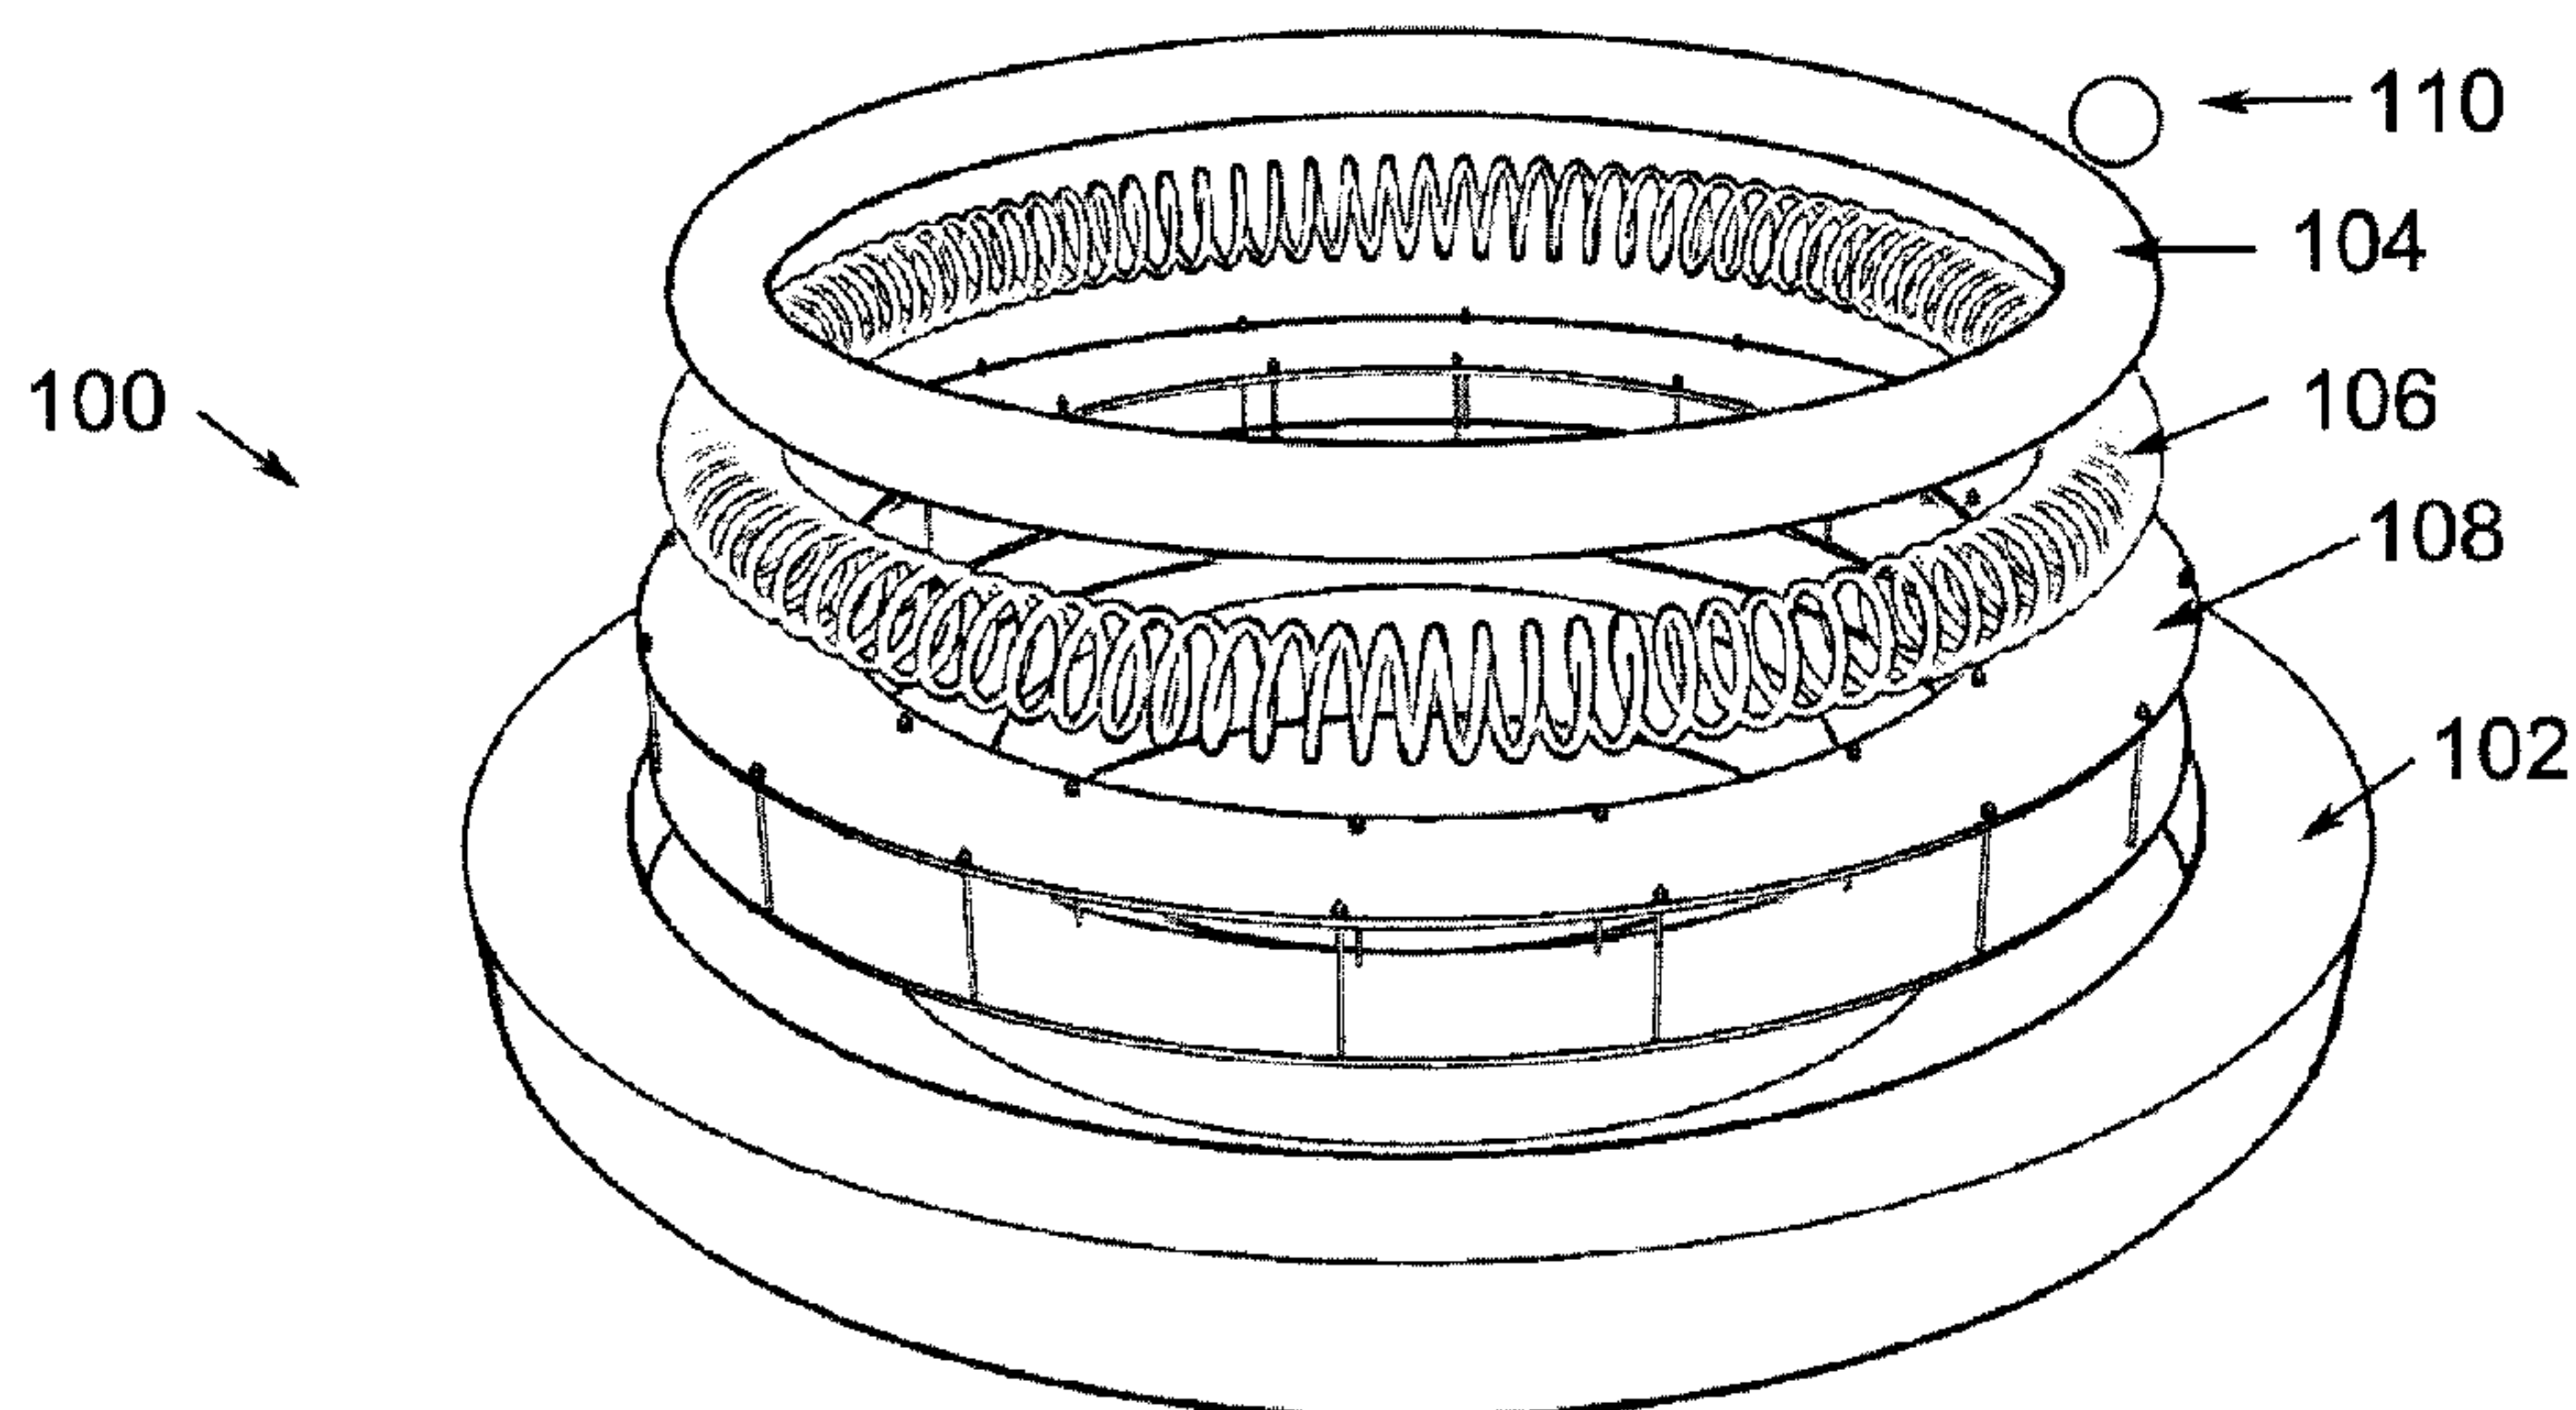

(57) **Abrégé/Abstract:**

A module for generating electricity from waves in a body of water is disclosed. The module comprises: a housing operable to float in the body of water; a tube formed into a circle integrated within the housing; a magnet element operable to move within the tube; and an electrically conductive coil surrounding substantially all of the tube. The housing is operable to be angularly displaced by waves within the body of water and the angular displacement of the housing is operable to cause movement of the magnet element within the tube surrounded by the coil. The movement of the magnet element through the tube surrounded by the coil generates a voltage on the coil through electromagnetic induction. The voltage on the coil can be rectified and subsequently stored, transmitted or utilized. In some implementations, a plurality of modules may be integrated together to form an array.

ABSTRACT

A module for generating electricity from waves in a body of water is disclosed. The module comprises: a housing operable to float in the body of water; a tube formed into a circle integrated within the housing; a magnet element operable to move within
5 the tube; and an electrically conductive coil surrounding substantially all of the tube. The housing is operable to be angularly displaced by waves within the body of water and the angular displacement of the housing is operable to cause movement of the magnet element within the tube surrounded by the coil. The movement of the magnet
10 element through the tube surrounded by the coil generates a voltage on the coil through electromagnetic induction. The voltage on the coil can be rectified and subsequently stored, transmitted or utilized. In some implementations, a plurality of modules may be integrated together to form an array.

SYSTEM AND APPARATUS FOR GENERATING ELECTRICITY FROM MOTION OF FLUID

CROSS-REFERENCE TO RELATED APPLICATION

- 5 The present application is a Canadian national entry of PCT Patent Application No. PCT/CA2012/000984 filed on October 26, 2012.

FIELD OF THE INVENTION

- 10 The invention relates generally to generating electricity and, more particularly, to system and apparatus for generating electricity from motion of fluid.

BACKGROUND

- According to International Energy Agency data, from 1990 to 2008, the average energy usage per person increased by 10% while world population increased by 27%,
15 resulting in a 39% increase in energy use worldwide. Growth in regional energy use over this period was especially high in emerging economies. Energy use in the Middle East increased by 170%, China by 146%, India by 91%, and Africa by 70%. In 2008, total worldwide energy consumption was 474 exajoules. ExxonMobil's 2012 "The Outlook for Energy: A View to 2040" states that global energy demand
20 will be about 30% higher in 2040 compared to 2010, as economic output more than doubles and prosperity expands, with the need for energy to make electricity remaining the single biggest driver of demand.

- In 2006, oil, coal and gas combined represented 88% of the world energy supply
25 according to the National Energy Board of Canada. Both hydroelectric power and nuclear accounted for 6% each. Burning fossil fuels results in greenhouse gas emissions, which leads to climate change and an increase in extreme weather events. Combustion of fossil fuels also produces other air pollutants which contribute to smog and acid rain, which have adverse health impacts on humans as well as negative
30 environmental impacts. Harvesting, processing, and distributing fossil fuels also create environmental concerns. Nuclear energy also has many unresolved environmental problems. Nuclear waste, power plant leaks, and catastrophic nuclear disasters are all negative consequences of nuclear power. The generation of

hydroelectric power has environmental impacts as well. Hydroelectric dams and transmission lines have significant effects on water and biodiversity.

Currently, there are a number of alternative energy options in use or under
5 development, but they make up a tiny proportion of world energy use due to the
limitations currently associated with these technologies. Solar panels are currently
very expensive to produce, and studies by the Electric Power Research Institute and
elsewhere show that solar thermal technologies are far more expensive than coal.
Though they emit no pollution while in use, there are environmental, health, and
10 safety issues related to how they are manufactured, installed, and ultimately disposed
of. The large amount of land required for utility-scale solar power plants poses an
additional environmental problem. Solar power has limited performance – it works
only during daylight hours, with peak production from 11am to 1pm on clear sunny
days. There are also issues around site suitability, as solar panels require
15 unobstructed, direct sunlight in a relatively cloud-free climate to operate at peak
performance. Wind turbines also have high costs associated with construction and
installation, though one of the biggest concerns associated with this form of energy is
the potential impact on human health from Wind Turbine Syndrome caused by the
low frequency noise emitted by the turbines. Bird and bat deaths as a result of
20 collisions with the turbines is a major biological issue related to this form of
alternative energy. Harnessing tidal energy is currently being explored as an
alternative energy option, but tidal energy is only available twice a day which leads to
low energy generation. Further, there is a high cost associated with the construction
and installation of the large barrier dams necessary for energy capture, and there is a
25 high environmental cost associated with harnessing this energy source as these dams
restrict fish migration and cause silt build up which affects tidal basin ecosystems in
negative ways.

There are many existing ideas for devices that extract energy from waves to provide
30 electric power. To date none of these ideas has reached practical implementation.
Existing ideas have proven to be uneconomical due either to high capital costs, or
mechanical unreliability leading to short working life, or high maintenance costs.
Most devices have two stages of conversion in which wave motion is converted to
hydraulic or pneumatic power and then to electricity. Reliability problems can be

traced to mechanical complexity of the devices in combination with the corrosive marine environment, or an inability to absorb higher than design wave conditions without damage to the mechanism.

- 5 A practical wave energy device would ideally feature low capital costs, minimal moving parts, high corrosion resistance, direct conversion from wave motion to electricity and a high tolerance for extreme wave conditions. Against this background, there is a need for solutions that will mitigate at least one of the above problems, particularly enabling the generation of electricity from motion of fluid such
10 as ocean waves and river currents in an economical and/or efficient manner.

SUMMARY OF THE INVENTION

The present invention is directed to a module for generating electricity from waves in a body of water is disclosed. The module comprises: a housing operable to float on
15 the body of water; a tube formed into a circle integrated within the housing; a magnet element operable to move within the tube; and an electrically conductive coil surrounding substantially all of the tube. The housing is operable to be angularly displaced by waves within the body of water and the angular displacement of the housing is operable to cause movement of the magnet element within the tube
20 surrounded by the coil. The movement of the magnet element through the tube surrounded by the coil generates a voltage on the coil through electromagnetic induction. The voltage on the coil can be rectified and subsequently stored, transmitted or utilized. In some implementations, a plurality of modules may be integrated together to form an array.

25

According to a first broad aspect, the present invention is an apparatus for generating electricity comprising: a housing operable to float in a fluid; a tube within the housing; a magnet element operable to move within the tube; and an electrically conductive coil surrounding at least a portion of the tube; whereby movement of the
30 magnet element within the tube in response to movement of the fluid generates a voltage on the coil through electromagnetic induction.

In various embodiments, the tube is circular and the magnet element is operable to move clockwise or counterclockwise through the tube depending upon the movement

of the fluid. The coil may comprise a plurality of wraps comprising copper wire and the wraps may substantially surround all of the tube. The apparatus may further comprise a voltage rectifier coupled to the coil, the voltage rectifier operable to rectify the voltage on the coil and output a substantially DC current. The magnet element
5 may comprise a spherical element.

In other embodiments, the magnet element may comprise a cylindrical magnet operable to move within the tube without substantially changing the direction of its polarization. In this case, the polarization of the cylindrical magnet may be
10 substantially perpendicular to wraps of the coil. Further, the cylindrical magnet may comprise a cap on each end, each of the caps comprising one or more wheels that aid in the movement of the cylindrical element through the tube. In yet another embodiments, the magnet element may comprise a magnet core and one or more guide elements and the tube may comprise guide grooves corresponding to the guide
15 elements that enable the magnet core to move within the tube without substantially changing the direction of its polarization. In this case, the polarization of the magnet core may be substantially perpendicular to wraps of the coil.

In various implementations, the housing may be operable to be angularly displaced in
20 response to movement of the fluid and the magnet element may be operable to move within the tube in response to the housing being angularly displaced. The fluid may be a body of water and the housing may be operable to be angularly displaced by waves within the body of water.

25 According to a second broad aspect, the present invention is a system comprising a plurality of apparatus according to the first broad aspect. In this case, the apparatus are integrated together within an array and each of the apparatus are operable to move independently in response to movement of the fluid. Within each apparatus, movement of the magnet element within its corresponding tube in response to
30 movement of the fluid generates a voltage on its corresponding coil through electromagnetic induction. Each of the apparatuses may further comprise a voltage rectifier coupled to its corresponding coil, each of the voltage rectifiers operable to rectify the voltage on its corresponding coil and output a substantially DC current.

The outputs from the voltage rectifiers within the plurality of apparatuses may be coupled together.

According to a third broad aspect, the present invention is an apparatus for generating
5 electricity from waves in a body of water comprising: a housing operable to float in
the body of water; a tube formed into a circle integrated within the housing; a magnet
element operable to move within the tube; and an electrically conductive coil
surrounding substantially all of the tube. The housing is operable to be angularly
displaced by waves within the body of water and the angular displacement of the
10 housing is operable to cause movement of the magnet element within the tube
surrounded by the coil. Movement of the magnet element through the tube
surrounded by the coil generates a voltage on the coil through electromagnetic
induction.

15 According to a fourth broad aspect, the present invention is a method of generating
electricity from waves in a body of water. The method comprises: enabling floatation
of an apparatus in the body of water, the apparatus comprising a circular tube
surrounded at least partially by an electrically conductive coil; and enabling
movement of a magnet element within the circular tube in response to waves in the
20 body of water. Movement of the magnet element within the tube surrounded by the
coil generates a voltage on the coil through electromagnetic induction.

These and other aspects of the invention will become apparent to those of ordinary
skill in the art upon review of the following description of certain embodiments of the
25 invention in conjunction with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

A detailed description of embodiments of the invention is provided herein below, by
way of example only, with reference to the accompanying drawings, in which:

30

Figures 1A and 1B are a perspective view and a breakout view of a module for
generating electricity according to an embodiment of the present invention;

Figures 2A, 2B and 2C are illustrations of the module of Figures 1A and 1B in various operational states caused by surface wave displacement;

Figure 3A is a perspective view of a plurality of modules according to Figures 1A and 1B interconnected into an array according to an embodiment of the present invention;

Figure 3B is a view of an interconnection element that may be used to interconnect modules into an array;

Figure 3C is an illustration of the array of modules of Figure 3A in a sample operational state caused by surface wave displacement;

Figures 4A and 4B are example electrical circuits that may be implemented within the module of Figure 1A and the array of Figure 3A respectively according to implementations of the present invention;

Figure 4C is an example wiring diagram for the module of Figure 1A according to one implementation of the present invention;

Figure 5A is a breakout view of a module for generating electricity according to an alternative embodiment of the present invention in which a series of inset coils are implemented;

Figure 5B is a breakout view of a module for generating electricity according to an alternative embodiment of the present invention in which a series of vertically displaced coils are implemented;

Figure 6A is a perspective view of a wheeled magnet carriage according to an embodiment of the present invention;

30

Figures 6B, 6C and 6D are a perspective view, a cross-sectioned view and a zoomed-in view respectively of the wheeled magnet carriage of Figure 6A within a tube;

Figures 7A and 7B are a perspective view and a cross-sectioned view respectively of a magnetic element with guide elements within a tube with corresponding guide grooves according to an embodiment of the present invention; and

- 5 Figures 8A, 8B and 8C are a perspective view, a side view and a bottom view respectively of a module that may be used in a river according to an alternative embodiment of the present invention.

10 It is to be expressly understood that the description and drawings are only for the purpose of illustration of certain embodiments of the invention and are an aid for understanding. They are not intended to be a definition of the limits of the invention.

DETAILED DESCRIPTION OF EMBODIMENTS

The present invention is directed to system and apparatus for generating electricity
 15 from movement of fluid, such as from surface wave displacement in bodies of water. Modules according to embodiments of the present invention are buoyant in water and can be displaced at various angles as a result of shifting movement of water through natural wave activity or other motion. In particular implementations, the modules may comprise a circular tube surrounded by a coil made of a conductive material such
 20 as copper and a magnet element free to move within the tube and therefore through the coil. As the module is displaced on various angles or otherwise physically moved, the magnet element can move within the tube, generating an electrical voltage on the coil through electromagnetic induction as the magnet element passes through the coil. With the shifting movement of surface waves, the module's center of balance is
 25 repeatedly shifted, resulting in the magnet element traveling within the circular tube and hence through the coil, potentially with significant momentum. The movement of the magnet element through the coil continues to provide an electrical voltage on the coil through electromagnetic induction. A voltage rectifier coupled to the coil can be used to output a DC current for storage and/or usage.

30

Figure 1A is a perspective view of an electricity generation module 100 according to an embodiment of the present invention and Figure 1B is a breakout view of the module 100. As shown, the module 100 comprises: a buoyancy ring 102, a circular tube 104 integrated within the ring 102, a coil 106 that surrounds the tube 104 and is

made of a conductive material such as copper, and a tube housing 108 that protects the tube 104 and coil 106 while securing these elements to the buoyancy ring 102. Further, the module 100 comprises a magnetic element 110 that is operable to traverse the circular tube 104.

5

The buoyancy ring 102 may take many forms that allow for the module 100 to float in water or another fluid as required. In one embodiment, the ring 102 may comprise a molded plastic encasement that encompasses the entire module 100, potentially providing buoyancy and water protection so that water is prevented from interfering with the operation of the module and/or prevented from degrading the components in the module 100. In another embodiment, the buoyancy ring may comprise a form defined ring made of a buoyant material such as a foam ring. It should be understood that, to float in a fluid, the module 100 may float on the surface of the fluid, be semi-submerged in the fluid or be completely submerged within the fluid while maintaining some buoyancy in the fluid.

The tube 104 in various embodiments may comprise a plastic tube shaped into a circle, though in alternative embodiments the tube may comprise alternative materials and potentially even other shapes as will be described. The tube 104 operates to provide a path for the magnetic element 110 through the coil 106. In one embodiment, the magnetic element 110 is a spherical magnet and the diameter of the inside of the tube is slightly larger than the diameter of the magnet, thus allowing for movement of the magnetic element through the tube 104. To reduce friction between the magnetic element 110 and the tube 104, the tube 104 may be smooth on the inside and may be lubricated with various lubricants such as oils.

The coil 106 may comprise copper wire wrapped around the tube 104. As depicted in Figure 1B, the coil 106 in one implementation may have a set of wraps with a diameter similar to the diameter of the tube 104 with a small distance between the wraps. In different cases, the coil 106 may be implemented with various widths of copper wire, number of wraps, distances between wraps, diameters of the wraps and conductive material. In operation, the coil 106 receives an electrical voltage through electromagnetic induction as the magnet element passes through the tube 104 and therefore through the coil 106.

As shown in Figure 1B, the tube housing 108 in one implementation may comprise two flat circular donut elements connected together by a series of spacer elements. In other embodiments, the tube housing 108 may take on various other forms to protect the tube 104 and coil 106. In some embodiments, the tube housing 108 may be integrated with the buoyancy ring 102 or the tube housing 108 may be omitted and the buoyancy ring 102 may act to protect the tube 104 and coil 106. The tube housing 108 may be made of many materials including wood or plastic. In particular embodiments, the tube housing 108 is designed to be low weight while at the same time sufficiently tough to protect the tube 104 and coil 106 and of a non-conductive material.

The magnet element 110 may comprise a spherical element with a diameter similar but slightly smaller than the diameter of the tube 104. The magnet element 110 of Figure 1B comprises a rare earth magnet with north and south polarization at different sides of the spherical element. When installed within the tube 104, the magnet element 110 is operable to move through the tube freely as a result of gravity and subsequently due to momentum as the module changes in angular displacement. In some embodiments, a lubricant may be added to the inside of the tube 104 in order to reduce friction between the magnet element 110 and the internal wall of the tube 104, thus increasing the movement of the magnet element 110. The magnet element 110 may take many alternative forms, some of which will be described with reference to Figures 6A-6D and 7A-7B.

Figures 2A, 2B and 2C are illustrations of the module of Figures 1A and 1B in various operational states caused by surface wave displacement. In these illustrations, the module 100 is shown floating on a surface of water 202 and being displaced by waves. These illustrations may depict typical displacements of the module 100 in a case where the module 100 is floating in a body of water which has rolling waves. As shown in Figure 2A, the module 100 has been displaced to an angle approximately 45 degrees down to the right. In this illustration, the magnet element 110 is shown rolling due to gravity towards the lower portion of the tube within the module 100, which in this case is the right side. Due to momentum, the magnet element 110 may

pass the lowest point of the tube 104 and continue rolling through the tube 104, in this case in a counter clockwise direction.

As shown in Figure 2B, as the wave on the surface of the water 202 shifts, the module
5 100 may subsequently be displaced to an angle approximately 45 degrees down to the left. This shifts the location of the low point in the tube 104 and therefore shifts how gravity acts on the magnet element 110. As shown, in the example of Figure 2B, the magnet element 110 continues to traverse the tube 104 in a counter clockwise rotation, gaining momentum as it rolls towards the new low point in the tube 104 on
10 the left side of the module 100. As before, the magnet element 110 continues to move through the tube 104 past the low point due to momentum. Figure 2C illustrates a scenario in which the surface of the water 202 levels out flat and the module is flat, if only for a short period of time. In this case, the magnet element 110 is not pulled by gravity to a particular location within the tube 104 but may still move through the
15 tube 104 due to momentum from previous displacements of the module 100.

Although depicted as travelling through the tube 104 in a counter clockwise direction, it should be understood that the magnet element 110 could traverse the tube 104 in either direction and, in fact, may shift directions often as a result of changes in
20 displacement of the module 100. Further, although Figure 2A, 2B and 2C illustrate three sample displacements for the module 100, it should be understood that the module 100 may be displaced in many random manners due to waves or other changes in the surface of a liquid that the module is floating on.

25 The movement of the magnet element 110 through the tube 104 results in the magnet element going through the coil 106, which in turn generates voltage on the coil 106 through electromagnetic induction. Generally, the more movement of the magnet element 110 within the tube 104, the more voltage is generated on the coil 106. The amount of movement of the magnet element 110 can be affected by numerous
30 different factors. In many cases, increased displacement of the module 100 from waves in terms of severity of angles and frequency of displacement can directly result in more movement of the magnet element 110 and therefore more voltage being generated on the coil 106. Many additional factors may affect the movement of the magnet element 110 and the generation of the voltage on the coil 106.

Figure 3A is a perspective view of a plurality of modules according to Figures 1A and 1B interconnected into an array according to an embodiment of the present invention. As shown, the array of Figure 3A comprises twelve modules 100 interconnected by
5 interconnection elements 302. Each module 100 may generate a limited amount of electricity through electromagnetic induction as described with reference to Figures 1A and 1B. By combining a plurality of the modules 100 into an array, the electricity generated from the modules may be combined and stored, used or transmitted for various purposes. Further, the combination of modules 100 may be scalable based on
10 space available in a body of water, the required amount of electricity desired and/or the budget for capital expenditures.

Figure 3B is a view of the interconnection element 302 that may be used to interconnect modules 100 into an array. As shown, the interconnection element 302,
15 in one implementation, comprises first and second rings 304a, 304b respectively connected together by an interconnection rod 306. With this implementation, each of the rings 304a,304b may connect to a different module 100 using a latch or other connection element and each module may independently be displaced by movement on the surface of a body of water that the array floats. It should be understood that
20 numerous other designs could be used to interconnect modules 100 together into an array and still allow each module 100 to be displaced. For instance, in some embodiments, the modules 100 may be interconnected using rope, netting, cables or other non-rigid elements.

25 Figure 3C is an illustration of the array of modules 100 of Figure 3A in a sample operational state caused by surface wave displacement. As shown in this sample case, each of the modules 100 may be independently displaced in various different angular directions. Within each module 100, the magnet element 110 may be moving through the corresponding tube 104 and hence the corresponding coil 106, thus generating
30 voltage on the coil through electromagnetic induction. The amount of electricity generated in each module 100 may be different due to different displacements and different amounts of movement of the magnet elements, but each of the modules 100 could generate electricity. The electricity generated within the modules 100 of the array of Figure 3C may be combined together using various methods.

Figure 4A is an example electrical circuit that may be implemented within the module of Figures 1A and 1B according to an implementation of the present invention. As shown, the coil 106 may be coupled to a voltage rectifier 402 operable to rectify the voltage being generated on the coil 106. The voltage rectifier 402 may comprise four diodes, such as OA91 germanium diodes, connected through a parallel combination of a zener diode, such as a 5.1 volt zener diode, and a capacitor. Alternatively, the voltage rectifier 402 may comprise numerous other configurations as one skilled in the art would contemplate to generate a DC voltage from a fluctuating voltage source. The voltage rectifier 402 is coupled to positive/negative voltage lines 404 and can output a DC current to the lines 404 as voltage is generated on the coil 106.

Figure 4B is an example electrical circuit that may be implemented within the array of Figure 3A according to an implementation of the present invention. In this embodiment, the electrical circuit comprises a plurality of circuits similar to that of Figure 4A, one for each of the modules 100 within the array. As shown, there are three coils 106a, 106b, 106c each coupled respectively to a voltage rectifier 402a, 402b, 402c similar to that of Figure 4A. Each of the voltage rectifiers 402a, 402b, 402c are coupled to the same positive/negative voltage lines 404. As voltage is generated on the coils 106a, 106b, 106c, the voltage rectifiers 402a, 402b, 402c rectify the voltage and apply DC current to the lines 404. The current from the various rectifiers is combined on the lines and the array of modules will generate a higher level of current on the lines 404 than any one of the modules could generate on its own. Although three coil/rectifier circuits are shown in Figure 4B, it should be understood that there may be more or less circuits depending upon the number of modules within an array of modules.

Figure 4C is an example wiring diagram for the module 100 of Figures 1A and 1B according to one implementation of the present invention. As depicted, the module 100 comprises the coil 106, though other components of Figure 1B are not illustrated for simplicity. The coil 106 is coupled to a voltage rectifier 402, depicted as a box in Figure 4C. The rectifier 402 is coupled to the voltage lines 404 which comprise first and second plugs 406, 408. The plugs may be used to connect the voltage lines 404 to adjacent modules within an array or to an output of the array that may go to a storage

unit, a power transmission system, a component to utilize the electricity generated or another component that may store, use or transmit the electrical power generated within the modules 100.

- 5 In the case of Figure 4C, the first and second plugs 406, 408 are at opposite ends of the module 100 to allow for increased flexibility in connecting modules together within an array. In alternative embodiments, the plugs may be located in different positions within the module 100 and/or there may be only one or more than two plugs to connect to other modules 100.

10

As described within Figures 1A and 1B, the module 100 comprises a single circular tube 104 wrapped with a coil 106 integrated within a buoyancy ring 102. This design allows for electrical power generation from the movement of one or more magnet elements 110 through the tube 104. In alternative embodiments, in order to increase
15 the electricity generated, a plurality of tubes wrapped with coils may be implemented within a single buoyancy ring.

Figure 5A is a breakout view of a module according to an alternative embodiment of the present invention in which a series of inset coils are implemented. In this sample
20 implementation, a module 500 comprises a plurality of tubes 504a, 504b, 504c that are each wrapped by a respective coil 506a, 506b, 506c and are integrated within buoyancy ring 502. The tubes 504a, 504b, 504c form circles of different diameters such that they form three inset tubes, the smallest tube 504a when wrapped by coil 506a fitting within the medium sized tube 504b and the medium sized tube 504b
25 when wrapped by coil 506b fitting within the largest tube 504c. The different tubes wrapped by coils may be isolated physically and electrically by electromagnetic shielding materials 512, though other barriers may be used, made of various materials.

The module 500 of Figure 5A further comprises a plurality of magnet elements 510a,
30 510b, 510c, each of which are positioned within a corresponding one of the tubes 504a, 504b, 504c and are free to move through their corresponding tube and therefore through the corresponding coil. Similar to previously described, movement of the magnet elements 510a, 510b, 510c through their tubes may be caused by external changes in the displacement of the module 500, for example from angular

displacement due to waves on the surface of a body of water. As the magnet elements 510a, 510b, 510c move through their respective tubes 504a, 504b, 504c and therefore through their respective coils 506a, 506b, 506c, voltage is generated on their coils through electromagnetic induction. The three coils may each be coupled to a separate voltage rectifier with their combined DC current being output to a common voltage line, similar to the electrical circuit of Figure 4B. In other embodiments, the voltages on the coils 406a, 406b, 406c may be combined in other manners.

Figure 5B is a breakout view of a module according to an alternative embodiment of the present invention in which a series of vertically displaced coils are implemented. In this implementation, a module 520 comprises a plurality of tubes 524a, 524b, 524c that are each wrapped by a respective coil 526a, 526b, 526c and are integrated within buoyancy ring 522. The tubes 524a, 524b, 524c each form a circle of the same diameter but are vertically displaced from one another within the buoyancy ring 522. The different tubes wrapped by coils may be isolated physically and electrically by electromagnetic shielding materials 532, though other barriers may be used, made of various materials.

The module 520 of Figure 5B further comprises a plurality of magnet elements 530a, 530b, 530c, each of which are positioned within a corresponding one of the tubes 524a, 524b, 524c and are free to move through their corresponding tube and therefore through the corresponding coil. Similar to previously described, movement of the magnet elements 530a, 530b, 530c through their tubes may be caused by external changes in the displacement of the module 520, for example from angular displacement due to waves on the surface of a body of water. As the magnet elements 530a, 530b, 530c move through their respective tubes 524a, 524b, 524c and therefore through their respective coils 526a, 526b, 526c, voltage is generated on their coils through electromagnetic induction. The three coils may each be coupled to a separate voltage rectifier with their combined DC current being output to a common voltage line, similar to the electrical circuit of Figure 4B. In other embodiments, the voltages on the coils 426a, 426b, 426c may be combined in other manners.

There may be various benefits of the single tube implementation of Figures 1A and 1B, the inset tube implementation of Figure 5A and the vertically displaced tube

implementation of Figure 5C. Advantages of the single tube implementation of Figure 1A include the limited relative cost of materials and manufacturing, as well as the reduced weight. The reduced weight may allow the module 100 to more severely and/or more frequently be angularly displaced by movement on the surface of a body of water and therefore potentially generate more movement of the magnet element 110 within tube 104 relative to the movement of each of the magnet elements in modules 500,520. The advantage of the inset tube implementation of module 500 and the vertically displaced tube implementation of module 520 is the potential to generate more electricity within the same surface area of water by increasing the number of coils that are generating voltages.

One should understand that the various embodiments described of modules 100, 500, 520 are not meant to limit the scope of the present invention. In particular, in some embodiments, two or more than three tubes with wrapped coils could be implemented inset similar to that depicted in Figure 5A. Further, two or more than three tubes with wrapped coils could be implemented vertically displaced similar to that depicted in Figure 5B. Yet further, a combination of the implementations of Figures 5A and 5B could be implemented, in which a plurality of tubes with wrapped coils are inset from one another while also additional tubes with wrapped coils are also vertically displaced. Also, it should be understood that although shown as integrated within a single buoyancy ring in Figures 5A and 5B, in some embodiments, a plurality of buoyancy rings could be utilized for various buoyancy affects.

Although the magnet elements of Figures 1B, 5A and 5B are shown as spherical elements, it should be understood that alternative shapes and designs for the magnet elements may be used in alternative implementations of the present invention. In particular, in some embodiments of the invention, the magnet element's polarization is controlled to increase the voltage generated through electromagnetic induction on the coils that the magnet element is traversing. Magnets passing through coils generate an increased voltage on the coil through electromagnetic induction when the magnet's polarization is perpendicular to the coil's wraps and a decreased voltage as the magnet's polarization increasingly becomes parallel to the coil's wraps. Using a spherical magnet element as described with reference to Figures 1B, 5A and 5B may be useful to keep the module simple and to decrease friction between the magnet

element and its tube. A spherical magnet will not ensure that the polarization of the magnet is perpendicular to the coil, hence potentially not optimizing the voltage generated on the coil while the magnet element moves through the tube.

- 5 Figure 6A is a perspective view of a wheeled magnet carriage according to an embodiment of the present invention. Figures 6B, 6C and 6D are a perspective view, a cross-sectioned view and a zoomed-in view respectively of the wheeled magnet carriage of Figure 6A within a tube. In the embodiment of Figures 6A-6D, the magnet element comprises a magnet barrel 602 in the shape of a cylinder which may
10 comprise a series of disk magnets with a cap 604 on each end. The caps 604 may comprise various different materials, such as plastic. As shown in Figures 6A-6D, the caps 604 are integrated with a plurality of rolling wheels 606 that aid in the movement of the wheeled magnet carriage through a tube, such as the tube 104 of Figure 1B.
- 15 The barrel 602 comprises one or more magnets that have a north-south polarization along the length of its cylinder such that as the barrel passes through a tube wrapped with a coil, the magnet's polarization are perpendicular to the coil's wraps. Unlike a spherical element, the cylindrical shape of the wheeled magnet carriage forces the orientation of the magnet to maximize the voltage generated on the coil as the magnet
20 passes through the tube wrapped with the coil. The wheels 606 allow for a reduced friction as the wheeled magnet carriage traverses the tube as it reduces the contact area between the magnet element and the tube. In alternative embodiments, other solutions may be implemented to reduce friction. In some embodiments, the magnet element may be cylindrical to maintain the orientation of polarization but may not
25 include the wheels 606, hence potentially increasing friction between the magnet element and the tube and reducing the overall movement of the magnet element within the tube.

Figures 7A and 7B are a perspective view and a cross-sectioned view respectively of a
30 magnetic element with guide elements according to an embodiment of the present invention. In this implementation, the magnet element comprises a magnet core 702 that may take on various shapes, shown as a relatively spherical element in Figures 7A and 7B that may comprise a single element or plurality of disks, and includes guide elements 704. A tube 706, in this implementation, may replace the tube 104 of

Figure 1B and be wrapped with the coil 106. The tube 706 comprises guide grooves 708 that allows for the guide elements 704 to slide while forcing the magnet core 702 to remain with its polarization perpendicular to the coil wraps around the tube 706. In Figures 7A and 7B, the magnet element comprises two guide elements, though it
5 should be understood that one or more than two may be utilized. Further, other guidance mechanisms could be used to maintain the polarization of the magnet element perpendicular to the coil wraps.

Figures 8A, 8B and 8C are a perspective view, a side view and a bottom view
10 respectively of a module according to an alternative embodiment of the present invention that may be used in a river or another body of water with a current. As shown, a module 800 may be very similar to the module 100 of Figure 1B or any one of the other modules 500, 520, with a buoyancy ring 102 encasing at least one circular tube with a coil. The module 800 may comprise a baffle wing 802 hinged below the
15 buoyancy ring 102 and a stabilizing fin 804. The baffle wing could cause the module 800 to be pushed out of its horizontal plane, such as downward below the surface of the water, with an oncoming current in a river and the buoyancy ring 102 could be used to subsequently cause the module 800 to rise back to the surface of the water and attempt to move the module back to its horizontal plane. This movement of the
20 module 800 up and down would result in angular displacement of the tube within the module and therefore movement of the magnet element through the tube and generation of voltage on the coil wrapped around the tube through which the magnet element moves. The stabilizing fin 804 can aid in keeping the module 800 pointed in the correct direction and stable.

25

In some embodiments, various other designs could be employed to have current within a river directly or indirectly cause angular displacements of a module similar to that of Figures 8A-8C. For instance, in some embodiments, a plurality of baffle wings could be employed or there may be no stabilizing fin or a plurality of
30 stabilizing fins. Further, a baffle wing could be coupled to a different location of the module 800 in addition to or instead of the baffle wing 802 coupled to the bottom of the module 800. For instance, a baffle wing may be coupled to the side or top of the module 800 and may be operable to move the module 800 out of its horizontal plane in a different manner in response to the current of the river. Similar to the array

described with reference to Figures 3A-3C, the module 800 may be implemented within an array configuration. In this case, all of the modules 800 may include elements such as baffle wings and stabilizing fins or only a subset of the modules may include such elements and adjacent modules may be affected by each other's
5 displacements.

Although depicted in the sample implementations as a circular tube, it should be understood that in some embodiments of the present invention, the tube could be in a different shape such as a straight tube. In this case, the coil would surround the
10 straight tube and the magnet would move only back and forth within the tube. Similar to the embodiments described above, a buoyancy element encasing the tube and coil may be displaced angularly due to waves or other disturbances in the surface of the water and the magnet element would move within the tube in response. The movement of the magnet element through the coil that occurs would cause voltage to
15 be generated on the coil through electromagnetic induction. The movement of the magnet element would not likely be as significant as in the case of a circular tube since momentum would not be able to continue the movement significantly and therefore the generation of electricity would be reduced.

20 There are numerous advantages of the module according to the present invention compared to other solutions that attempt to generate electricity from ocean waves or other movement of fluids. In particular, implementations of the present invention can have relatively low capital costs and low maintenance costs while directly converting energy from fluid motion (i.e. waves) to electricity. The low capital costs can result
25 from the simple design with few components and the scalable architecture. The low maintenance costs can result from the few moving parts and the high corrosion resistance that can be built into the modules through the use of a sealed housing. Further, the module of the present invention can be built to tolerate extreme wave conditions due to its compact design and limited mechanical elements.

30 Although various embodiments of the present invention have been described and illustrated, it will be apparent to those skilled in the art that numerous modifications and variations can be made without departing from the scope of the invention, which is defined in the appended claims.

WHAT IS CLAIMED IS:

1. An apparatus for generating electricity comprising:
 - a housing operable to float in a fluid;
 - a circular tube within the housing;
 - 5 - an electrically conductive coil comprising a plurality of wraps surrounding at least a portion of the tube; and
 - a cylindrical magnet element operable to move clockwise or counter-clockwise through the tube depending upon movement of the fluid; wherein the cylindrical magnet element is operable to move within the
 - 10 tube without substantially changing direction of its polarization and polarization of the cylindrical magnet element is substantially perpendicular to the wraps of the coil;

whereby movement of the cylindrical magnet element within the tube in response to movement of the fluid generates a voltage on the coil through

 - 15 electromagnetic induction.
2. An apparatus according to claim 1 further comprising a voltage rectifier coupled to the coil, the voltage rectifier operable to rectify the voltage on the coil and output a substantially DC current.
 - 20 3. An apparatus according to one of claims 1 to 2, wherein the tube is a first circular tube, the cylindrical magnet element is a first cylindrical magnet element and the coil is a first coil; wherein the apparatus further comprises a second circular tube within the housing in a similar horizontal orientation as
 - 25 the first circular tube, a second cylindrical magnet element operable to move clockwise or counter-clockwise through the second circular tube depending upon movement of the fluid and a second electrically conductive coil surrounding at least a portion of the second tube.
 - 30 4. An apparatus according to claim 3, wherein the first circular tube forms a circle of a first diameter and the second circular tube forms a circle of a second diameter that is smaller than the first diameter; and wherein the second circular tube and the second coil surrounding at least a portion of the second

circular tube are inset within a center open portion of the first circular tube and the first coil surrounding at least a portion of the first circular tube.

5. An apparatus according to claim 3, wherein the second circular tube is
5 vertically displaced within the housing from the first circular tube.
6. An apparatus according to claim 5, wherein the first circular tube forms a
circle of a first diameter and the second circular tube forms a circle of a
second diameter that is substantially similar to the first diameter; and wherein
10 the second circular tube and the second coil surrounding at least a portion of
the second circular tube are vertically displaced above the first circular tube
and the first coil surrounding at least a portion of the first circular tube.
7. An apparatus according to one of claims 3 to 6, wherein the first circular tube
15 and the first coil surrounding at least a portion of the first circular tube are
isolated from the second tube and the second coil surrounding at least a
portion of the second circular tube using electromagnetic shielding material.
8. An apparatus according to one of claims 1 to 7, wherein the cylindrical magnet
20 element comprises at least one rare earth magnet.
9. An apparatus according to one of claims 1 to 8, wherein the cylindrical magnet
comprises a cap on each end, the cap comprising one or more wheels that aid
in the movement of the cylindrical element through the tube.
- 25 10. An apparatus according to one of claims 1 to 9, wherein the cylindrical magnet
element comprises a magnet core and one or more guide elements and the
circular tube comprises guide grooves corresponding to the guide elements
that enable the magnet core to move within the circular tube without
30 substantially changing the direction of its polarization.
11. An apparatus according to one of claims 1 to 10, wherein the housing is
operable to be angularly displaced in response to movement of the fluid and
the cylindrical magnet element is operable to move within the tube in response
35 to the housing being angularly displaced.

12. An apparatus according to claim 11, wherein the fluid is a body of water and the housing is operable to be angularly displaced by waves within the body of water.
- 5 13. An apparatus according to one of claims 1 to 10 further comprising a baffle wing hinged below the housing and spaced away from the housing; wherein the fluid is a body of water with a current; whereby the baffle wing is operable to pull the housing out of its horizontal plane in response to the current of the body of water and angularly displace the housing.
- 10 14. An apparatus according to claim 13 further comprising a stabilizing fin integrated to the bottom of the housing.
- 15 15. A system comprising a plurality of apparatuses according to one of claims 1 to 14, wherein the apparatuses are integrated together within an array, each of the apparatuses operable to move independently in response to movement of the fluid; whereby, within each apparatus, movement of the cylindrical magnet element within its corresponding circular tube in response to movement of the fluid generates a voltage on its corresponding coil through electromagnetic induction.
- 20 16. A system according to claim 15, wherein each of the apparatuses further comprises a voltage rectifier coupled to its corresponding coil, each of the voltage rectifiers operable to rectify the voltage on its corresponding coil and output a substantially DC current.
- 25 17. A system according to claim 16, wherein the output from the voltage rectifiers within the plurality of apparatuses are coupled together.
- 30 18. An apparatus for generating electricity comprising:
- a housing operable to float in a fluid;
 - first and second circular tubes within the housing in similar horizontal orientations;
 - a first electrically conductive coil comprising a plurality of wraps
- 35 surrounding at least a portion of the first tube and a second electrically

conductive coil comprising a plurality of wraps surrounding at least a portion of the second tube; and

- a first magnet element operable to move clockwise or counter-clockwise through the first tube depending upon movement of the fluid and a second magnet element operable to move clockwise or counter-clockwise through the second tube depending upon movement of the fluid;

whereby movement of the first and second magnet elements within the first and second tubes respectively in response to movement of the fluid generates a voltage on the first and second coils respectively through electromagnetic induction.

19. An apparatus according to claim 18, wherein the first circular tube forms a circle of a first diameter and the second circular tube forms a circle of a second diameter that is smaller than the first diameter; and wherein the second circular tube and the second coil surrounding at least a portion of the second circular tube are inset within a center open portion of the first circular tube and the first coil surrounding at least a portion of the first circular tube.
20. An apparatus according to claim 18, wherein the second circular tube is vertically displaced within the housing from the first circular tube.
21. An apparatus according to claim 20, wherein the first circular tube forms a circle of a first diameter and the second circular tube forms a circle of a second diameter that is substantially similar to the first diameter; and wherein the second circular tube and the second coil surrounding at least a portion of the second circular tube are vertically displaced above the first circular tube and the first coil surrounding at least a portion of the first circular tube.
22. An apparatus according to one of claims 18 to 21, wherein the first circular tube and the first coil surrounding at least a portion of the first circular tube are isolated from the second circular tube and the second coil surrounding at least a portion of the second circular tube using electromagnetic shielding material.

23. An apparatus according to one of claims 18 to 22 further comprising first and second voltage rectifiers coupled to the first and second coils respectively, the voltage rectifiers operable to rectify the voltage on the first and second coils and output a substantially DC current
- 5 24. An apparatus according to one of claims 18 to 23, wherein the first and second magnet elements comprise first and second cylindrical magnets respectively operable to move within the first and second tubes respectively without substantially changing the direction of their polarization; wherein the
- 10 polarization of each of the cylindrical magnets is substantially perpendicular to the wraps of their respective coil.
25. An apparatus according to claim 24, wherein the first and second cylindrical magnets each comprise a cap on each end, the cap comprising one or more
- 15 wheels that aid in the movement of the cylindrical magnets through their respective tubes.
26. An apparatus according to one of claims 18 to 23, wherein the first and second magnet elements comprise first and second spherical magnet elements
- 20 respectively.
27. An apparatus according to one of claims 18 to 26, wherein the first and second magnet elements each comprise a magnet core and one or more guide elements and the first and second circular tubes each comprise guide grooves
- 25 corresponding to the guide elements that enable the respective magnet core to move within the circular tube without substantially changing the direction of its polarization; wherein the polarization of each of the magnet cores is substantially perpendicular to the wraps of their respective coil.
- 30 28. An apparatus according to one of claims 18 to 27, wherein the first and second magnet elements each comprise at least one rare earth magnet.
29. An apparatus according to one of claims 18 to 28, wherein the housing is operable to be angularly displaced in response to movement of the fluid and
- 35 the magnet elements are operable to move within their respective circular tubes in response to the housing being angularly displaced.

30. An apparatus according to claim 29, wherein the fluid is a body of water and the housing is operable to be angularly displaced by waves within the body of water.
- 5 31. An apparatus according to one of claims 18 to 28 further comprising a baffle wing hinged below the housing and spaced away from the housing; wherein the fluid is a body of water with a current; whereby the baffle wing is operable to pull the housing out of its horizontal plane in response to the current of the
10 body of water and angularly displace the housing.
32. An apparatus according to claim 31 further comprising a stabilizing fin integrated to the bottom of the housing.
- 15 33. A system comprising a plurality of apparatuses according to one of claims 18 to 32, wherein the apparatuses are integrated together within an array, each of the apparatuses operable to move independently in response to movement of the fluid; whereby, within each apparatus, movement of the magnet elements within their corresponding circular tubes in response to movement of the fluid
20 generates a voltage on its corresponding coil through electromagnetic induction.
34. A system according to claim 33, wherein each of the apparatuses further comprises a voltage rectifier coupled to its corresponding first and second
25 coils, each of the voltage rectifiers operable to rectify the voltage on its corresponding coils and output a substantially DC current.
35. A system according to claim 34, wherein the output from the voltage rectifiers within the plurality of apparatuses are coupled together.
- 30 36. An apparatus for generating electricity comprising:
- a housing operable to float in a body of water with a current;
 - a baffle wing hinged below the housing and spaced away from the housing;
 - 35 - a circular tube within the housing;

- an electrically conductive coil comprising a plurality of wraps surrounding at least a portion of the tube; and
- a magnet element operable to move clockwise or counter-clockwise through the tube depending upon movement of the fluid;

5 whereby the baffle wing is operable to pull the housing out of its horizontal plane in response to the current of the body of water and angularly displace the housing; and movement of the magnet element within the tube in response to the housing being angularly displaced generates a voltage on the coil through electromagnetic induction.

10

37. An apparatus according to claim 36 further comprising a stabilizing fin integrated to the bottom of the housing.

15

38. An apparatus according to one of claims 36 to 37 further comprising a voltage rectifier coupled to the coil, the voltage rectifier operable to rectify the voltage on the coil and output a substantially DC current.

20

39. An apparatus according to one of claims 36 to 38, wherein the tube is a first circular tube, the magnet element is a first magnet element and the coil is a first coil; wherein the apparatus further comprises a second circular tube within the housing in a similar horizontal orientation as the first circular tube, a second magnet element operable to move clockwise or counter-clockwise through the second circular tube depending upon movement of the fluid and a second electrically conductive coil surrounding at least a portion of the second tube.

25

30

40. An apparatus according to claim 39, wherein the first circular tube forms a circle of a first diameter and the second circular tube forms a circle of a second diameter that is smaller than the first diameter; and wherein the second circular tube and the second coil surrounding at least a portion of the second circular tube are inset within a center open portion of the first circular tube and the first coil surrounding at least a portion of the first circular tube.

35

41. An apparatus according to claim 39, wherein the second circular tube is vertically displaced within the housing from the first circular tube.

42. An apparatus according to claim 41, wherein the first circular tube forms a circle of a first diameter and the second circular tube forms a circle of a second diameter that is substantially similar to the first diameter; and wherein the second circular tube and the second coil surrounding at least a portion of the second circular tube are vertically displaced above the first circular tube and the first coil surrounding at least a portion of the first circular tube.
43. An apparatus according to one of claims 39 to 42, wherein the first circular tube and the first coil surrounding at least a portion of the first circular tube are isolated from the second tube and the second coil surrounding at least a portion of the second circular tube using electromagnetic shielding material.
44. An apparatus according to one of claims 36 to 43, wherein the magnet element comprises a cylindrical magnet element operable to move within the circular tube without substantially changing the direction of its polarization; wherein the polarization of the cylindrical magnet element is substantially perpendicular to the wraps of the coil.
45. An apparatus according to claim 44, wherein the cylindrical magnet element comprises a cap on each end, the cap comprising one or more wheels that aid in the movement of the cylindrical magnet element through the circular tube.
46. An apparatus according to one of claims 36 to 43, wherein the magnet element comprises a spherical magnet element.
47. An apparatus according to one of claims 36 to 46, wherein the magnet element comprises a magnet core and one or more guide elements and the circular tube comprises guide grooves corresponding to the guide elements that enable the magnet core to move within the circular tube without substantially changing the direction of its polarization; wherein the polarization of the magnet core is substantially perpendicular to the wraps of the coil.
48. An apparatus according to one of claims 36 to 47, wherein the magnet element comprises at least one rare earth magnet.

49. A system comprising a plurality of apparatuses according to one of claims 36 to 48, wherein the apparatuses are integrated together within an array, each of the apparatuses operable to move independently in response to movement of the fluid; whereby, within each apparatus, movement of the magnet element within its corresponding circular tube in response to movement of the fluid generates a voltage on its corresponding coil through electromagnetic induction.
50. A system according to claim 49, wherein each of the apparatuses further comprises a voltage rectifier coupled to its corresponding coil, each of the voltage rectifiers operable to rectify the voltage on its corresponding coil and output a substantially DC current.
51. A system according to claim 50, wherein the output from the voltage rectifiers within the plurality of apparatuses are coupled together.





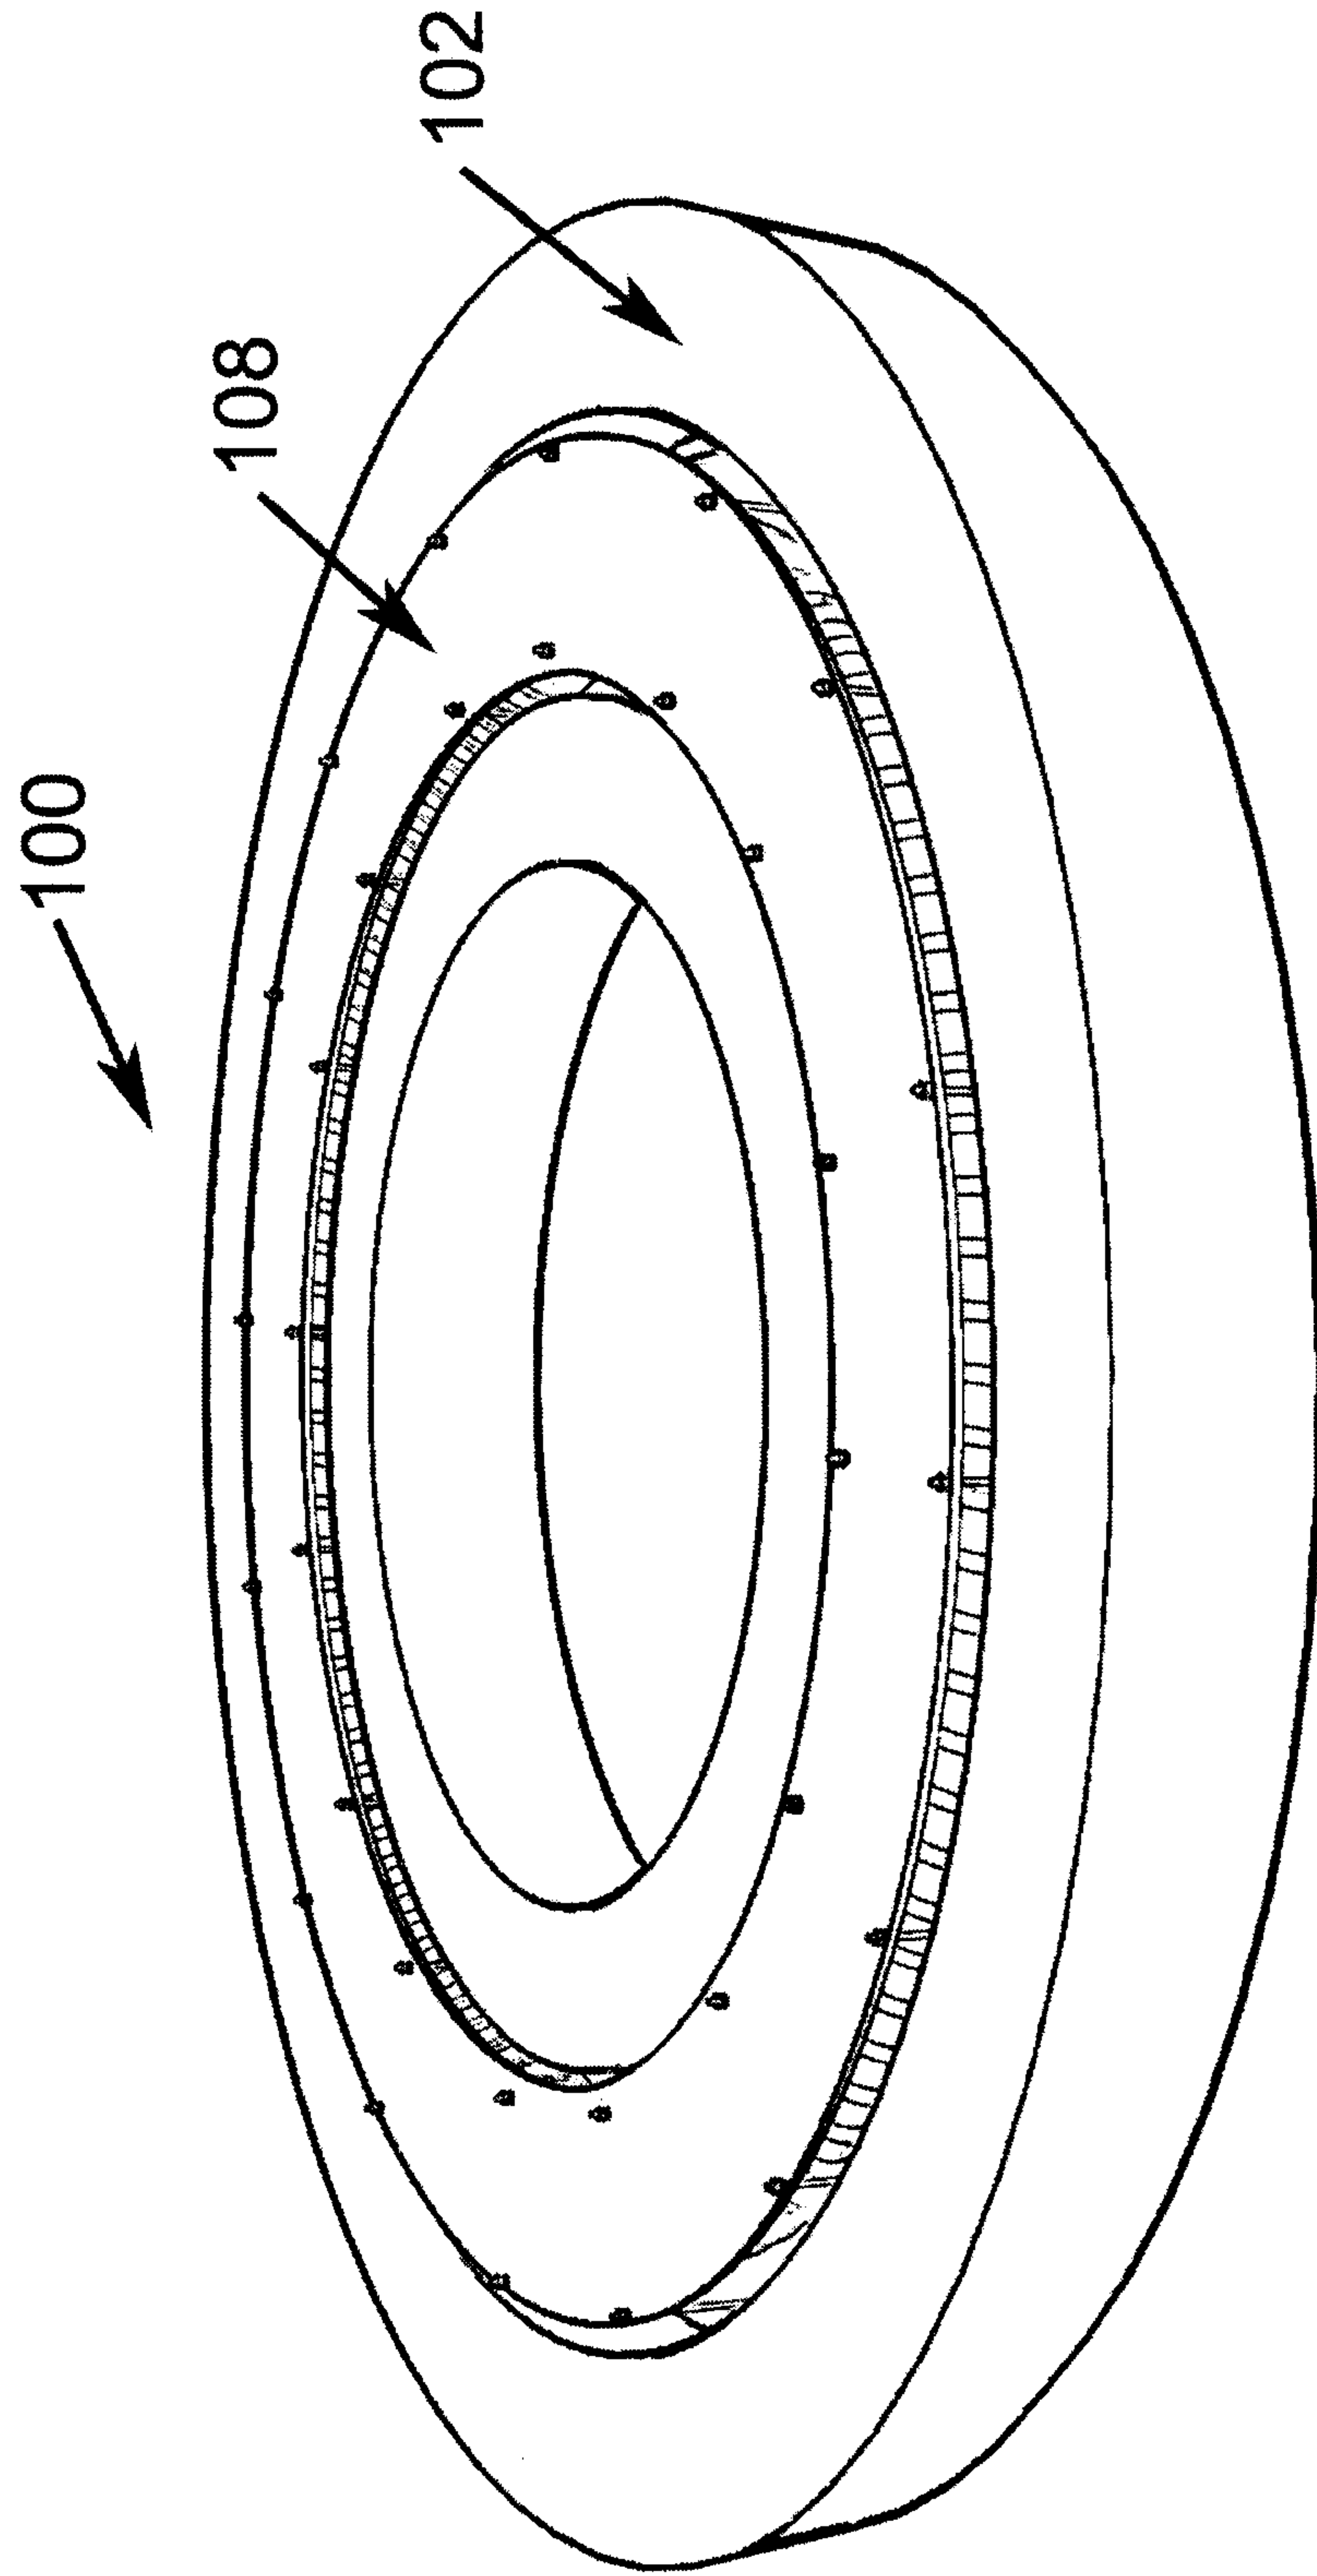


FIGURE 1A

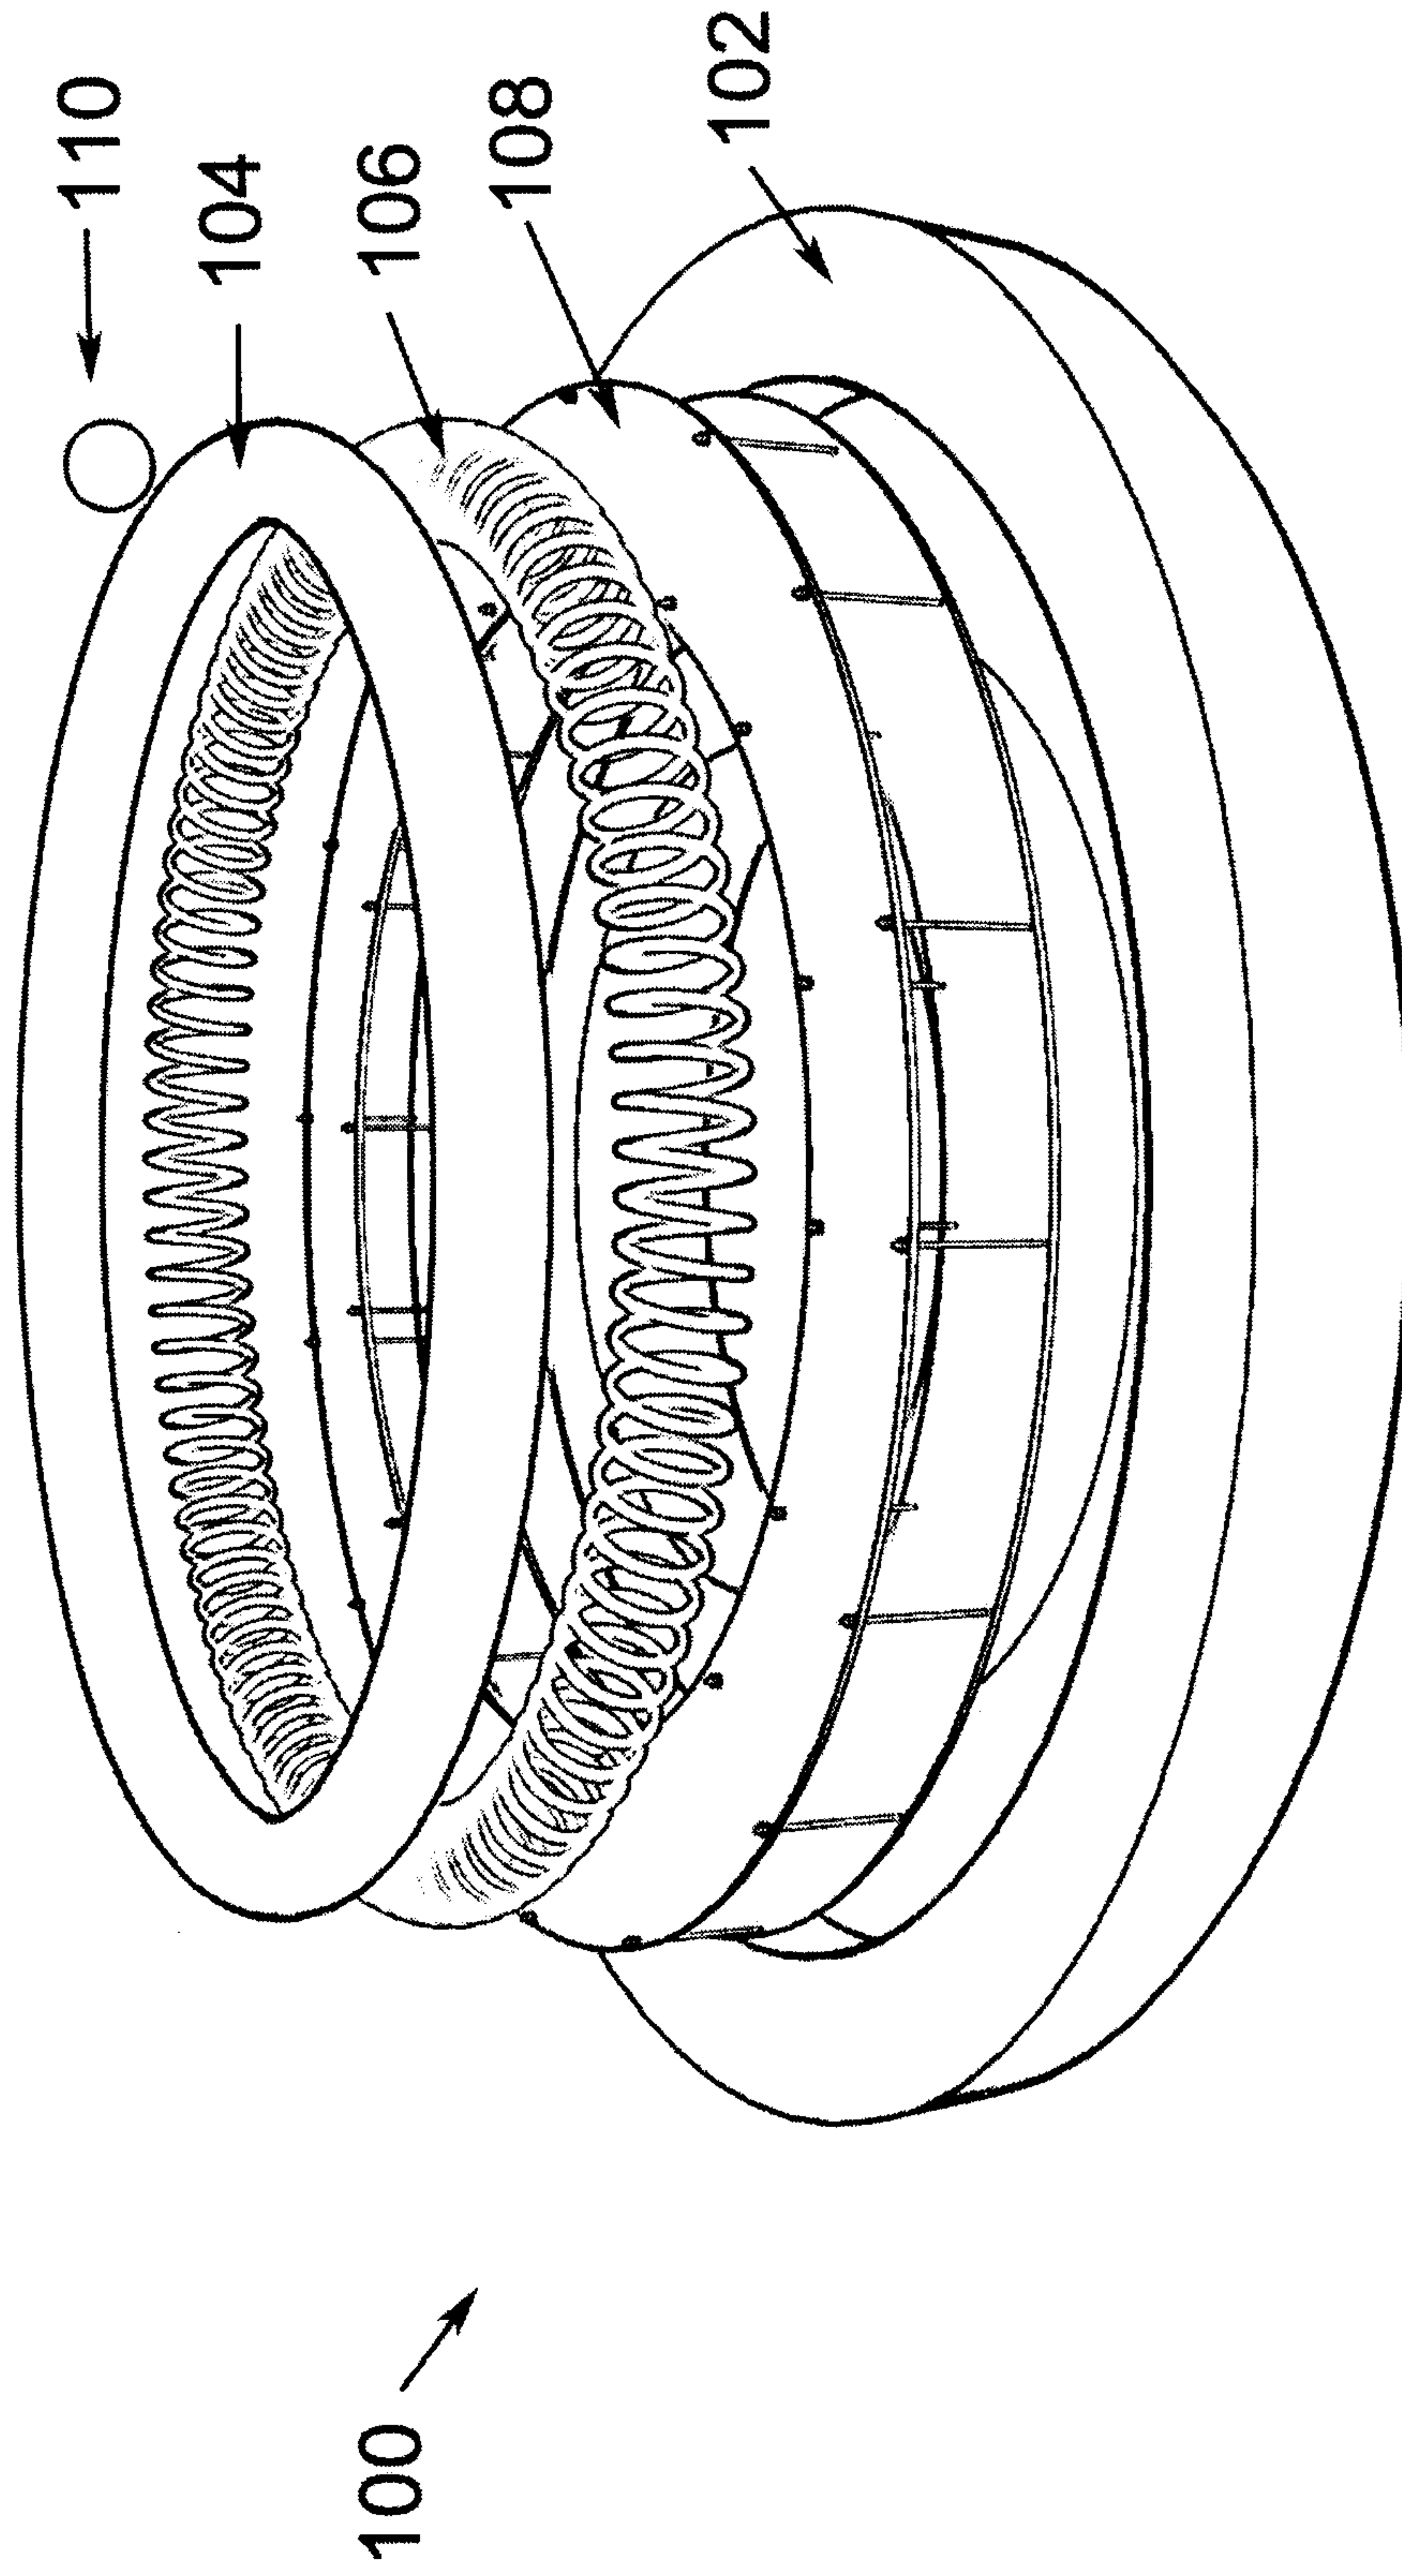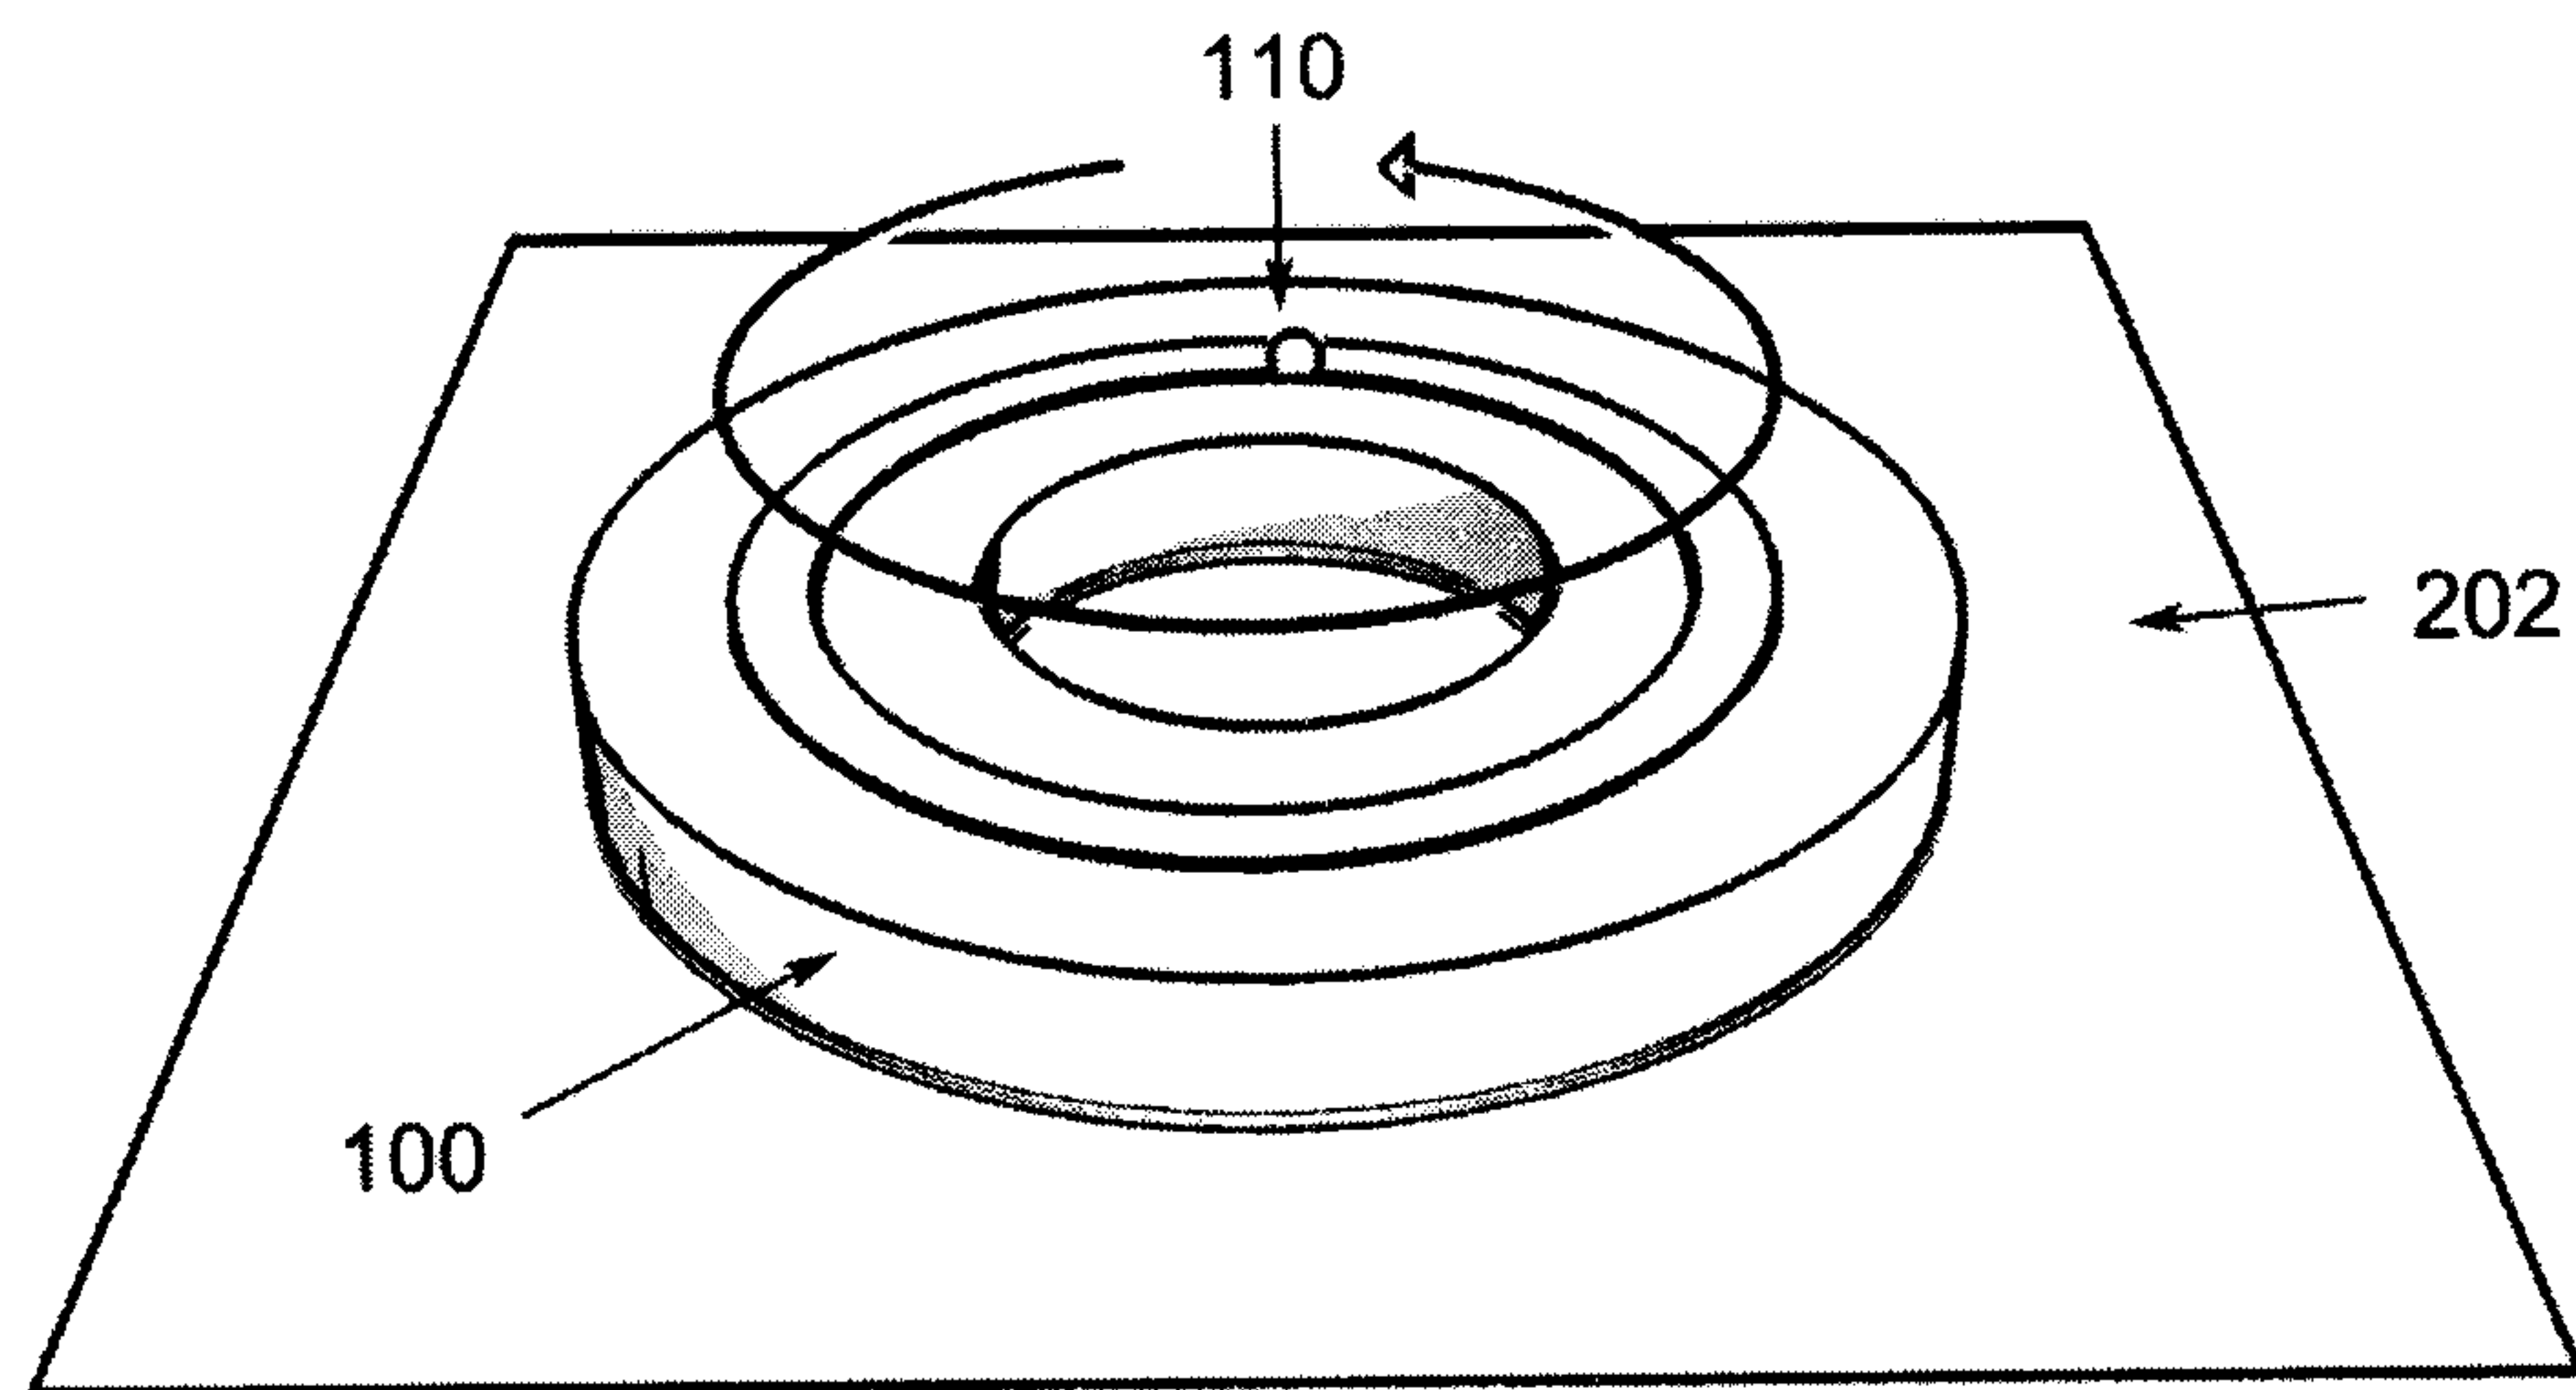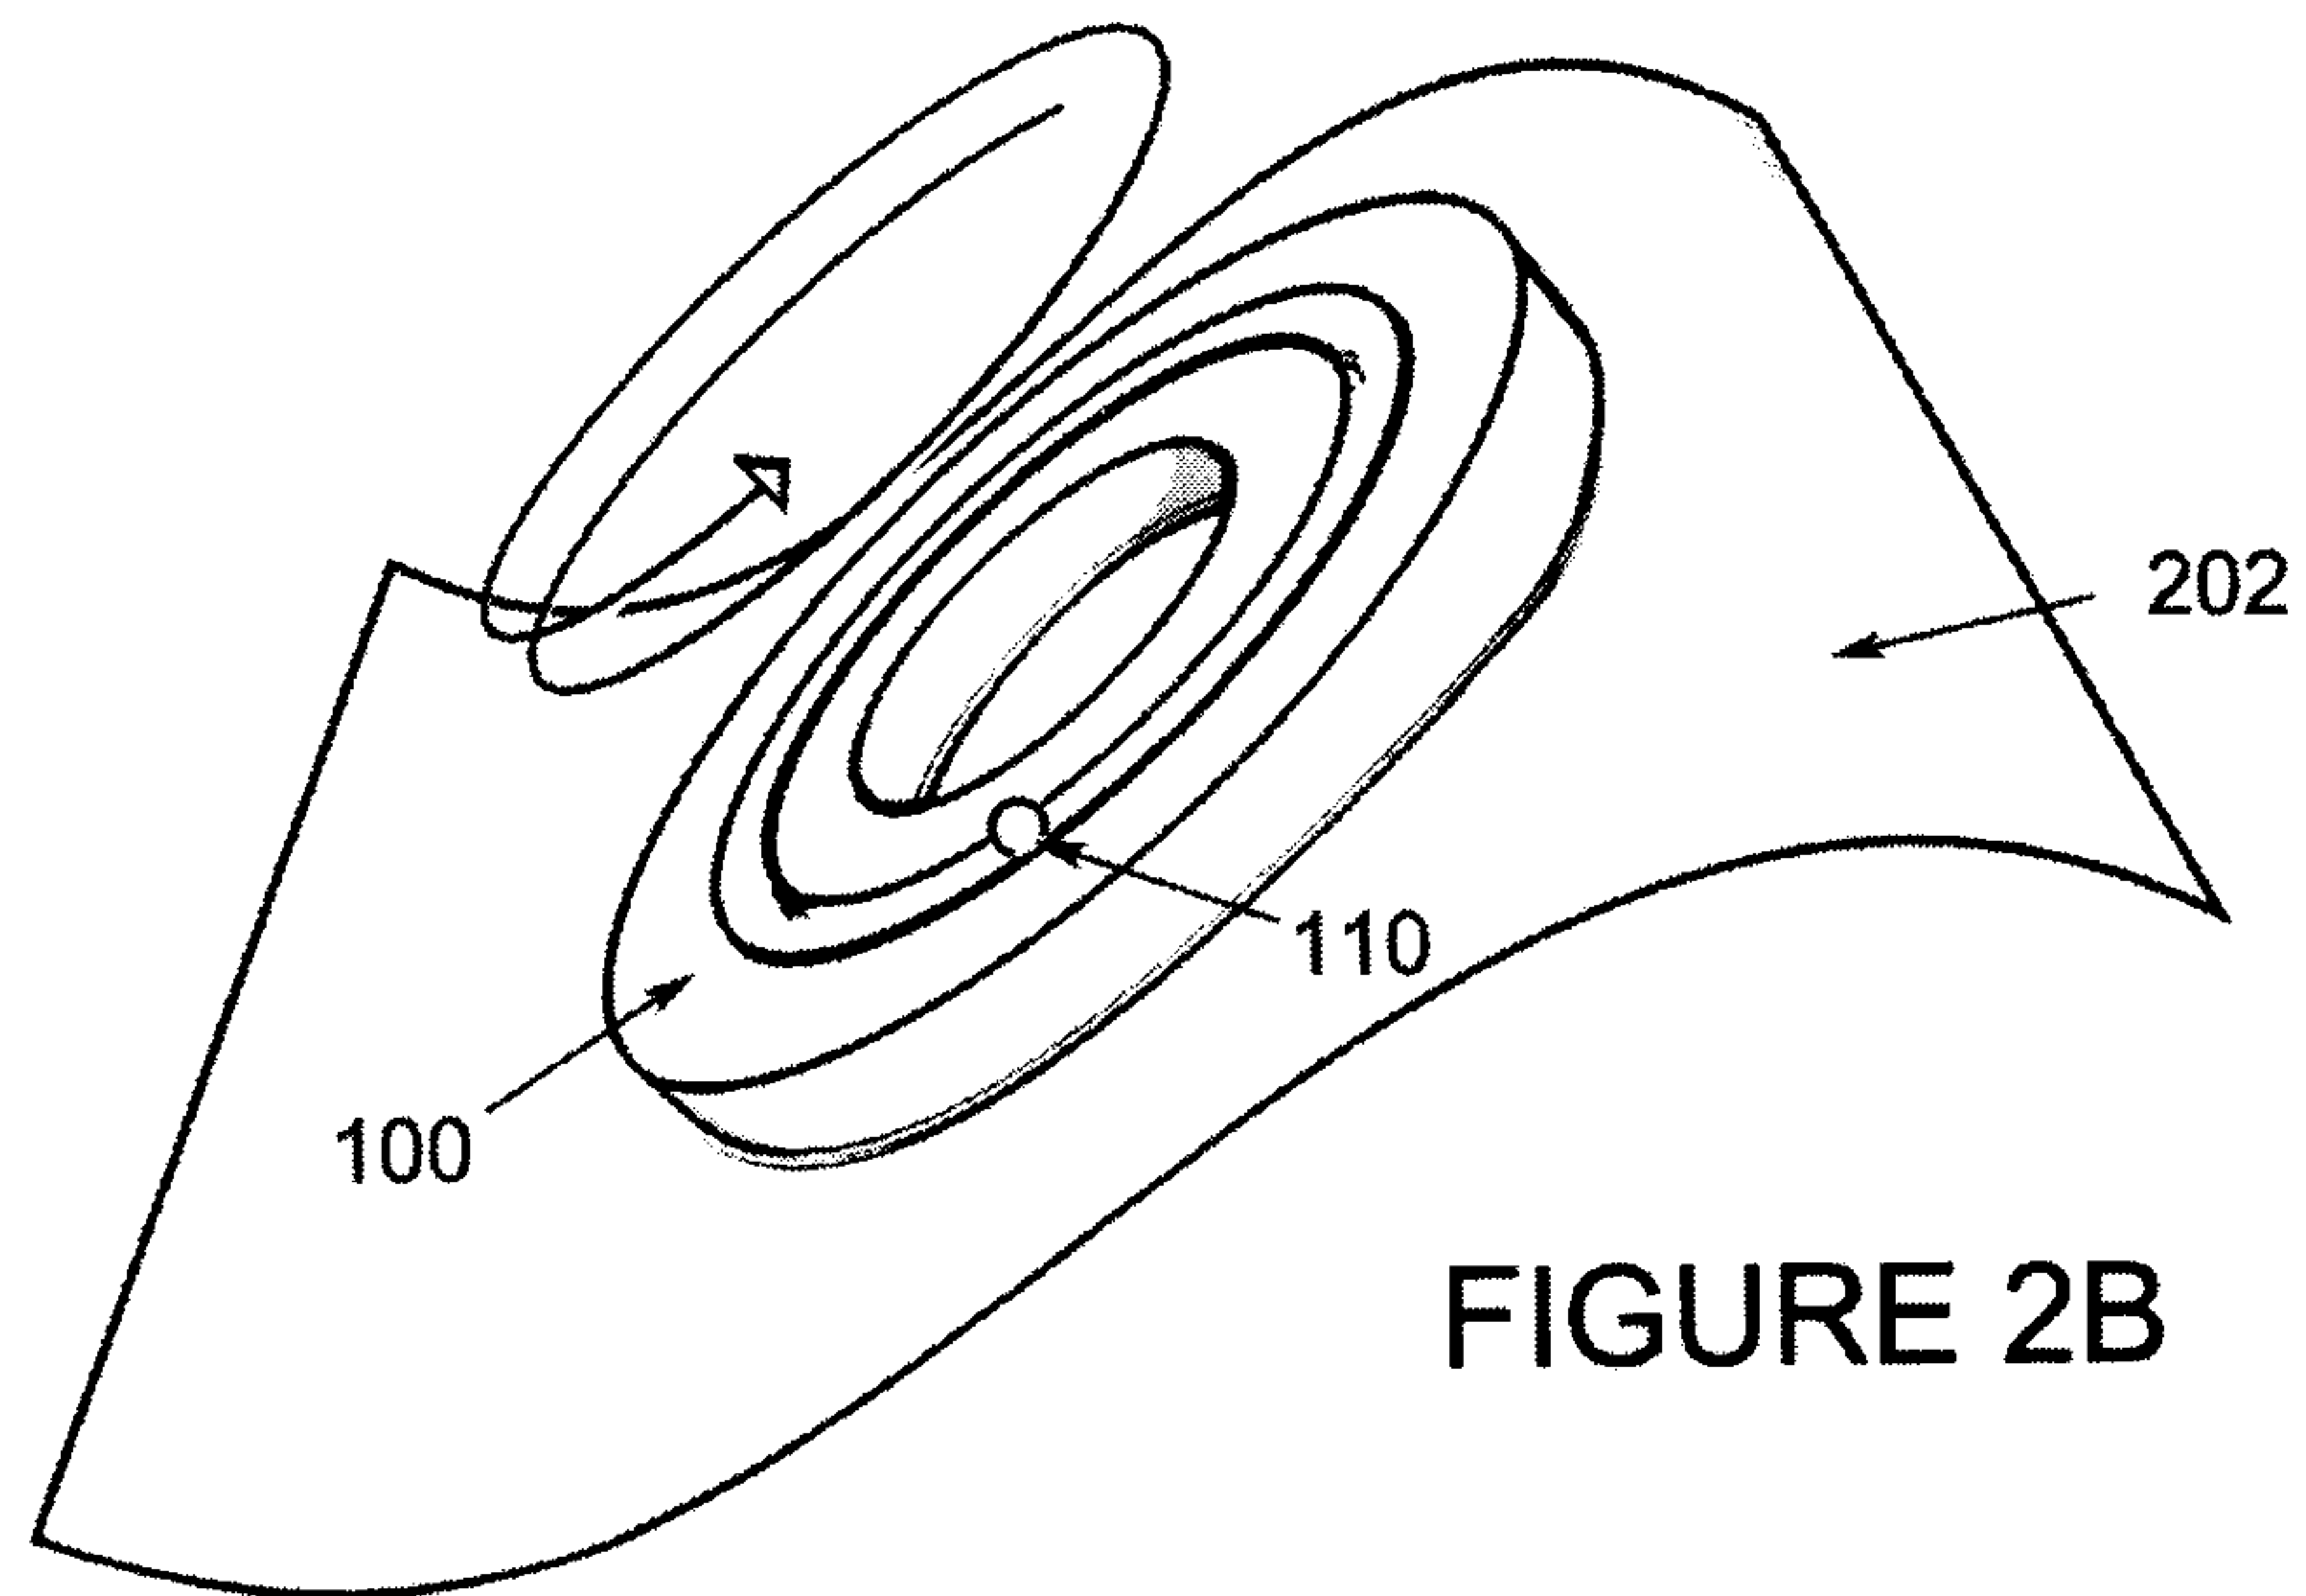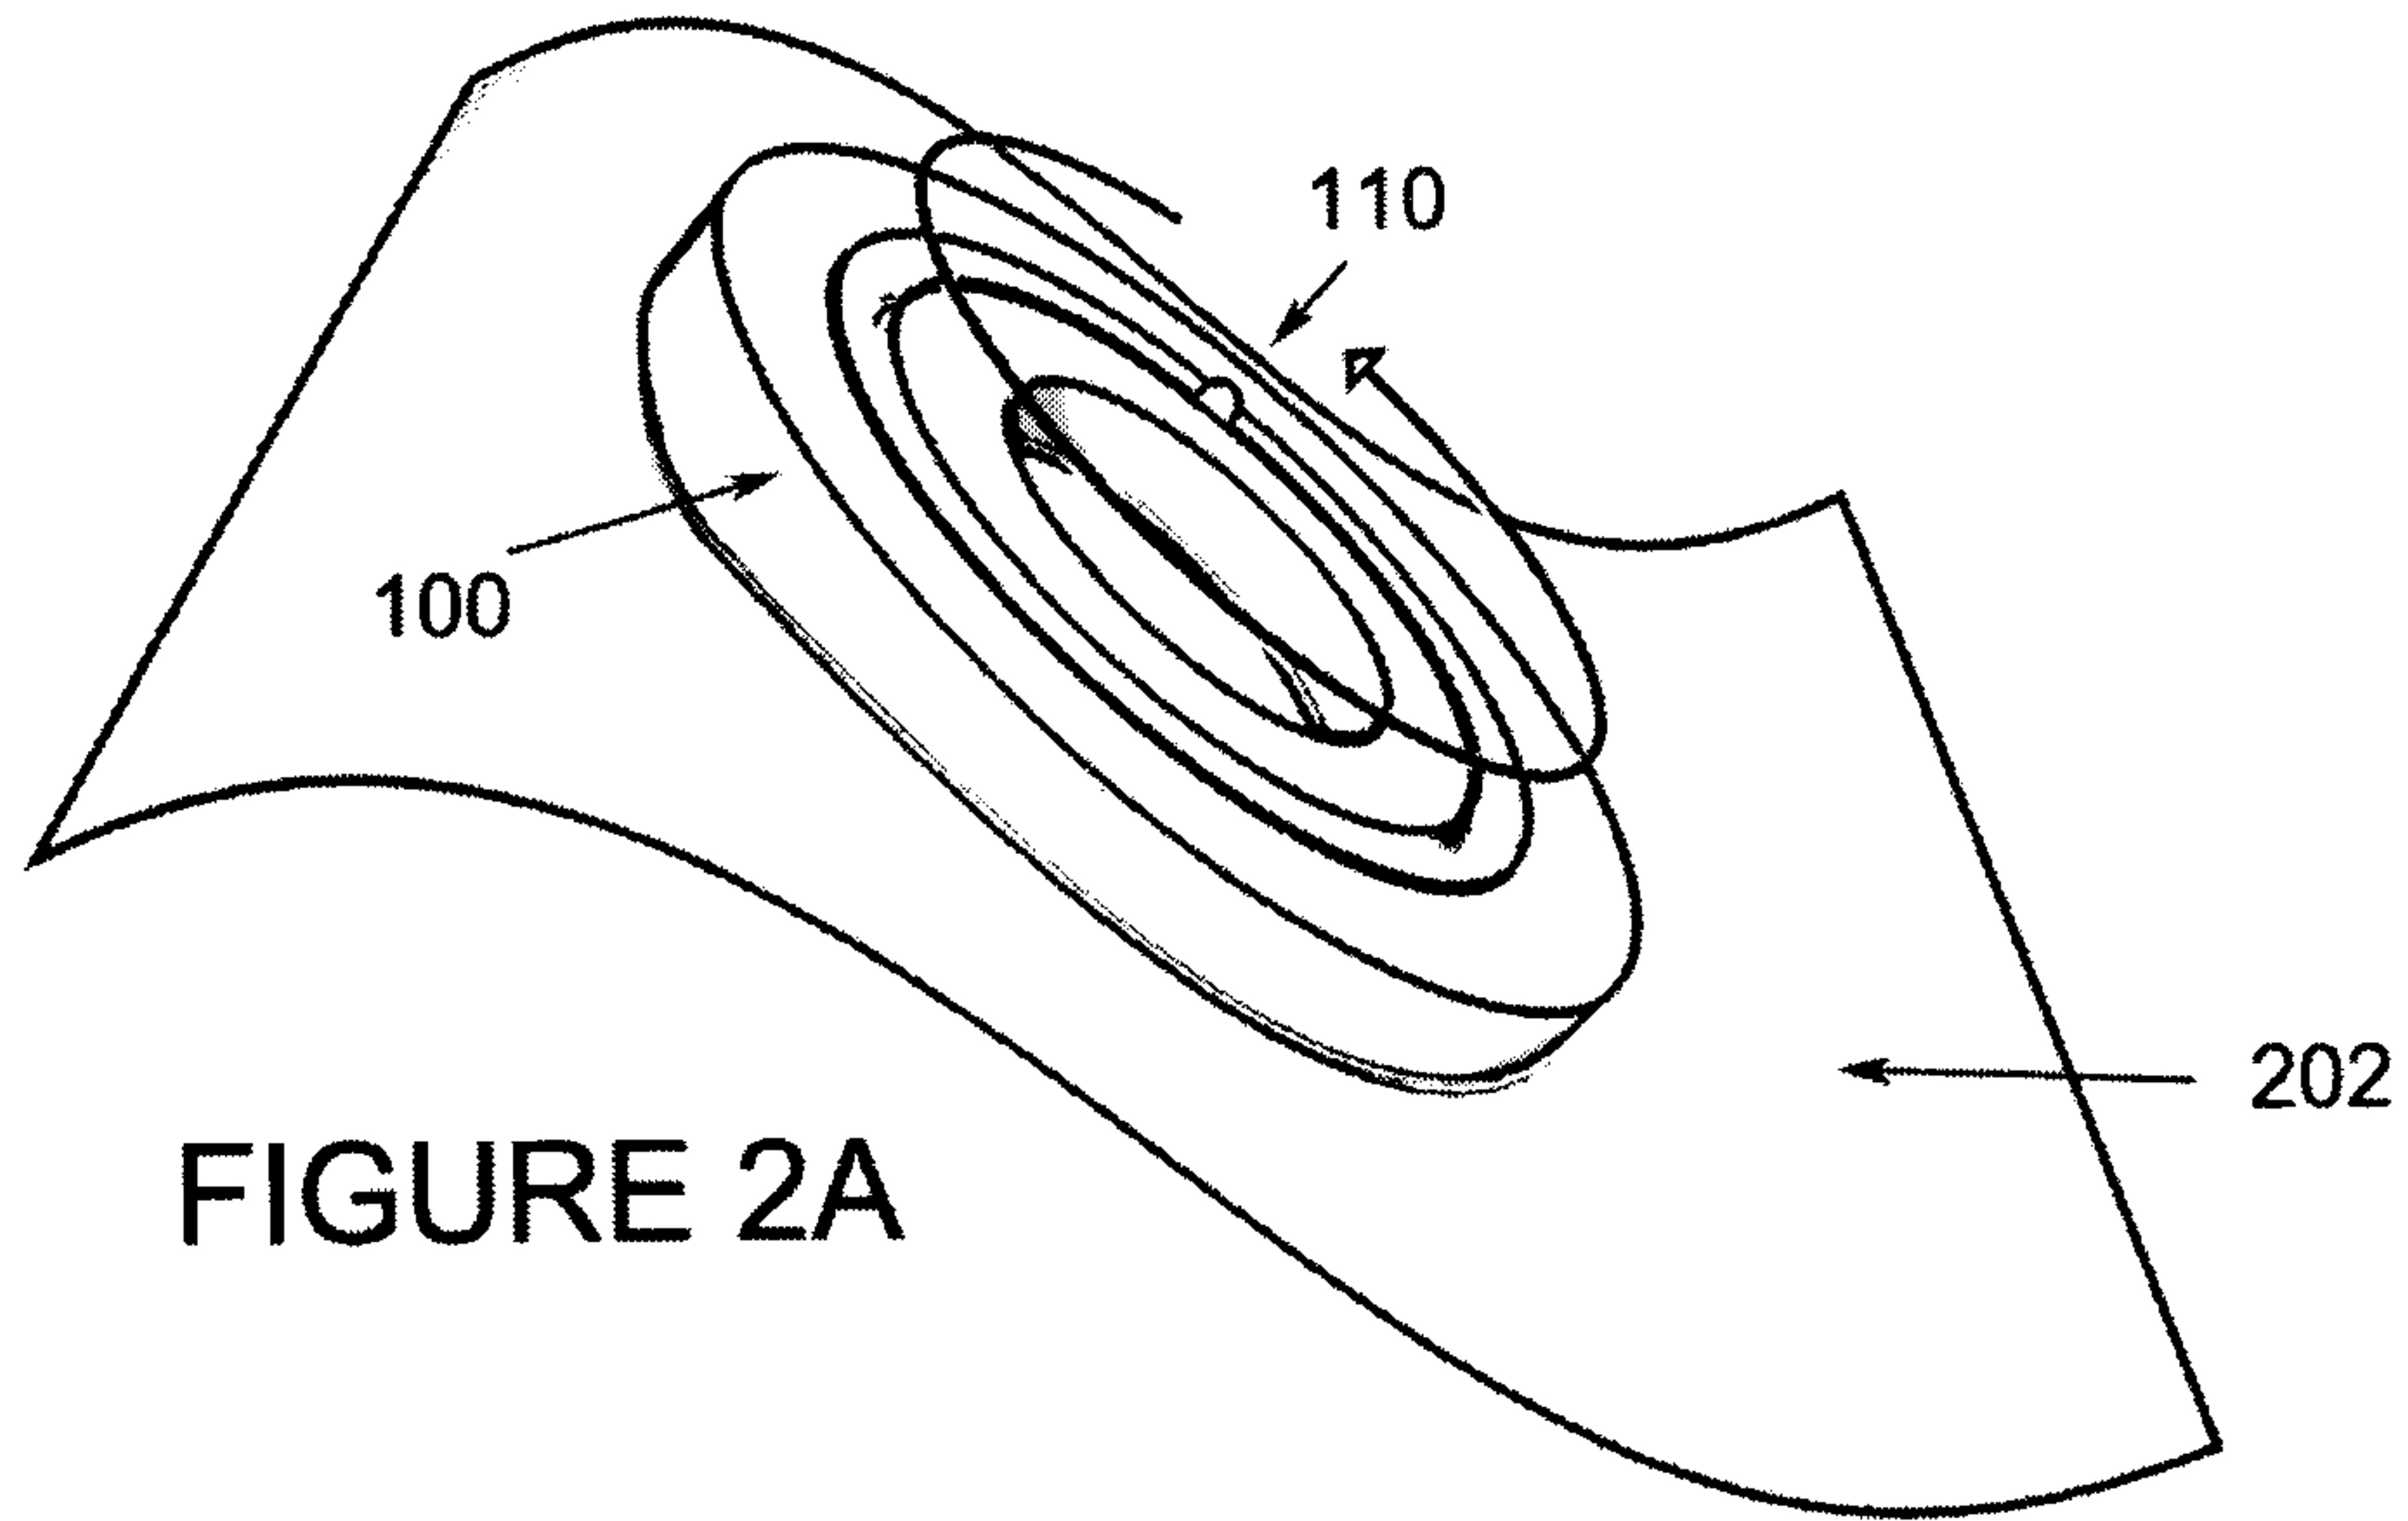

3/16



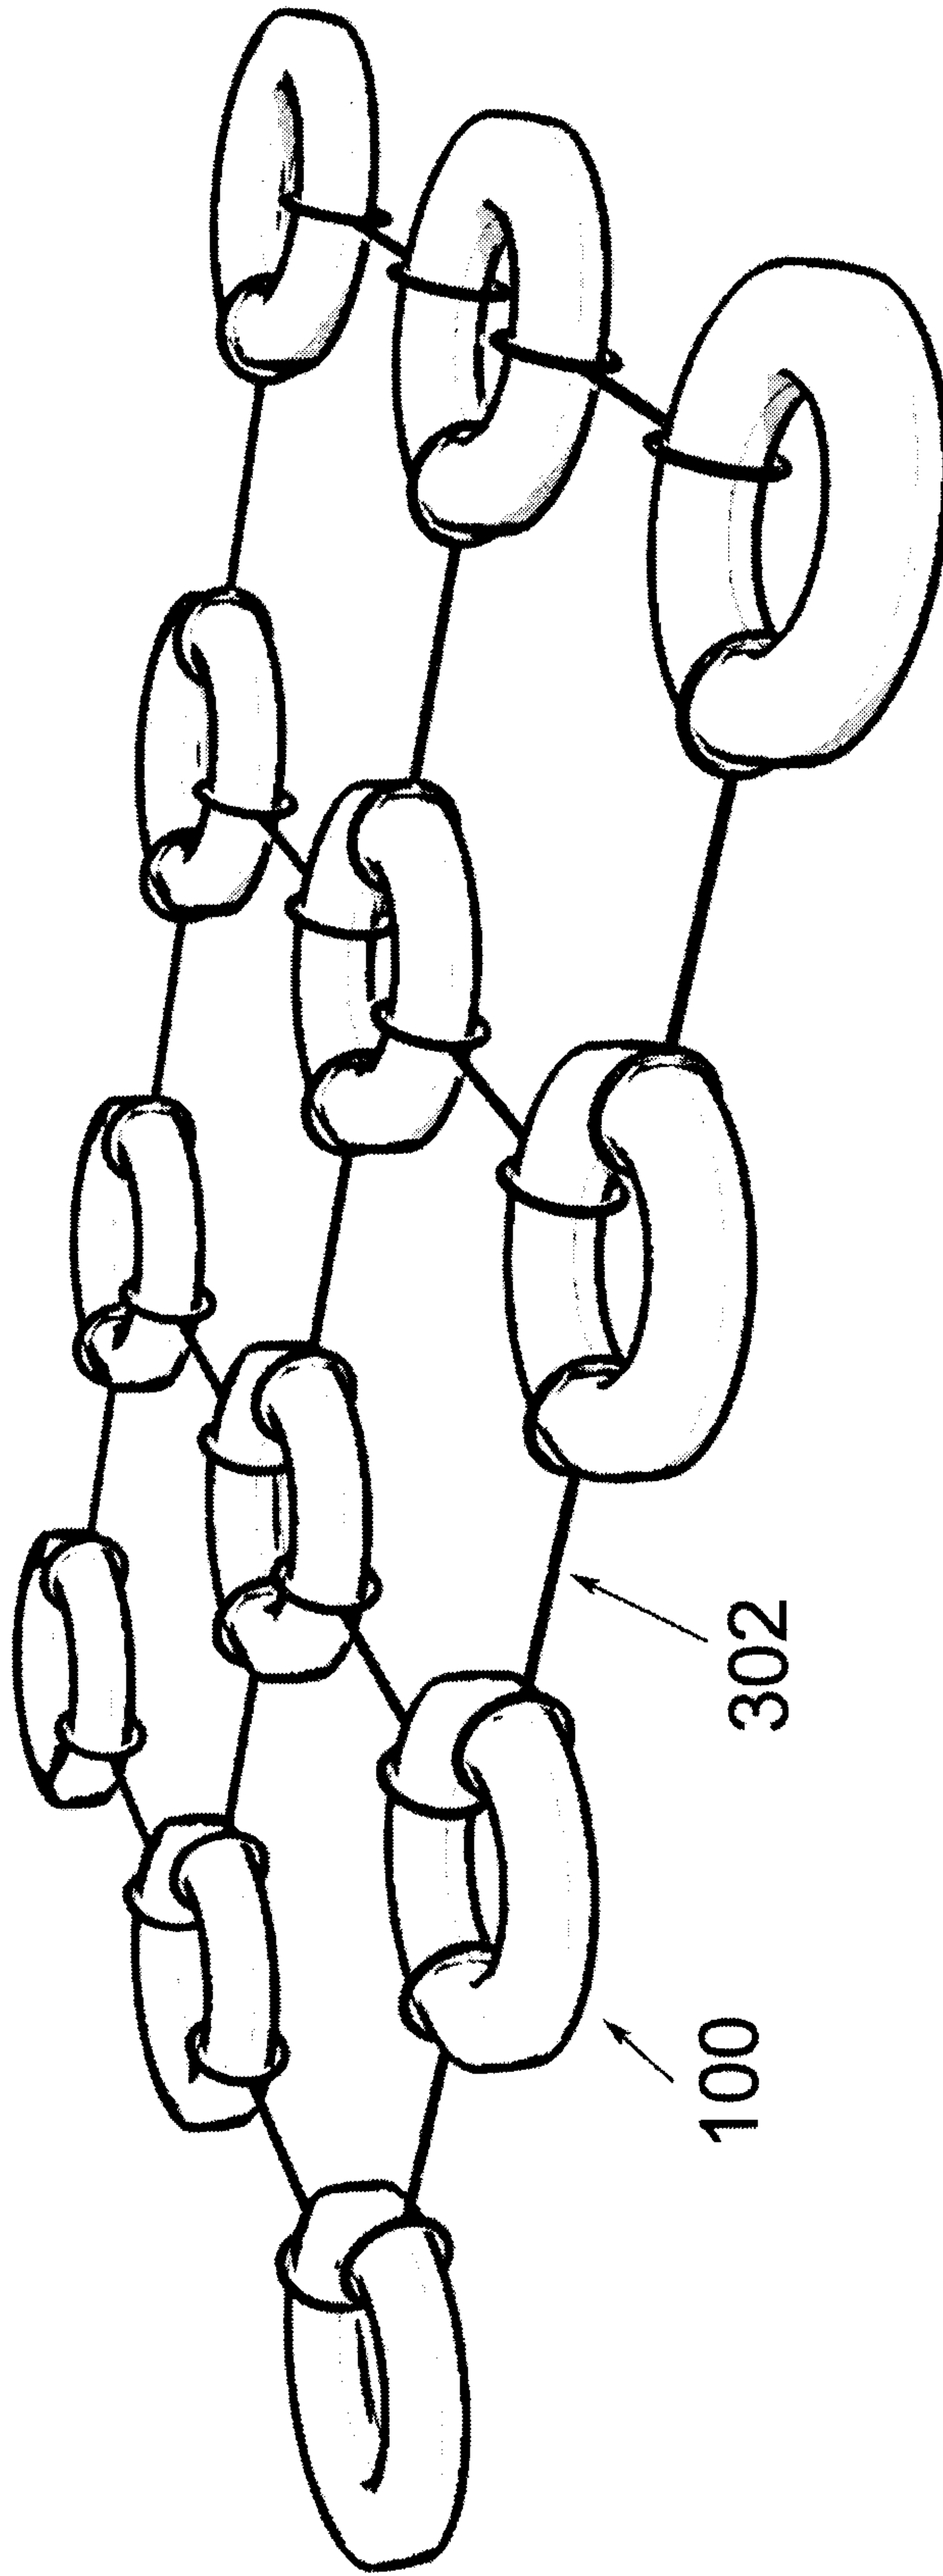


FIGURE 3A

5/16

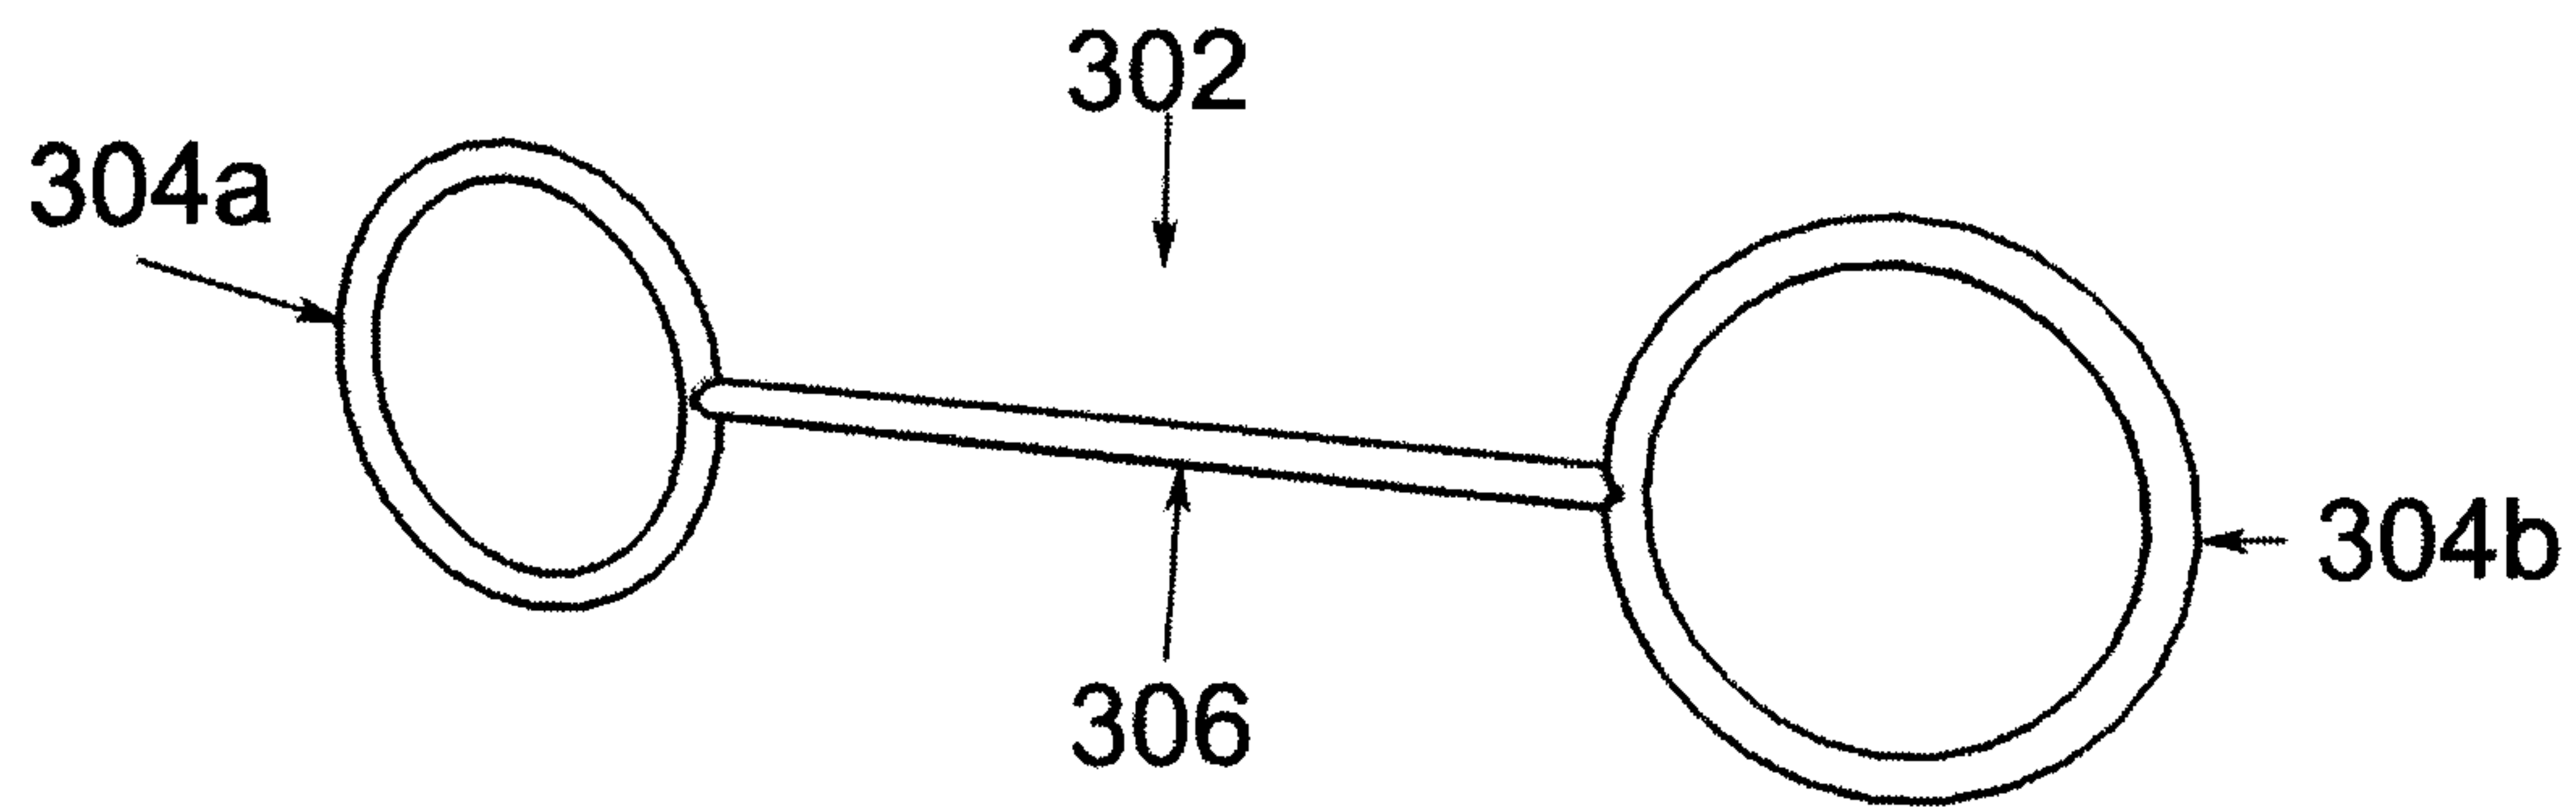


FIGURE 3B

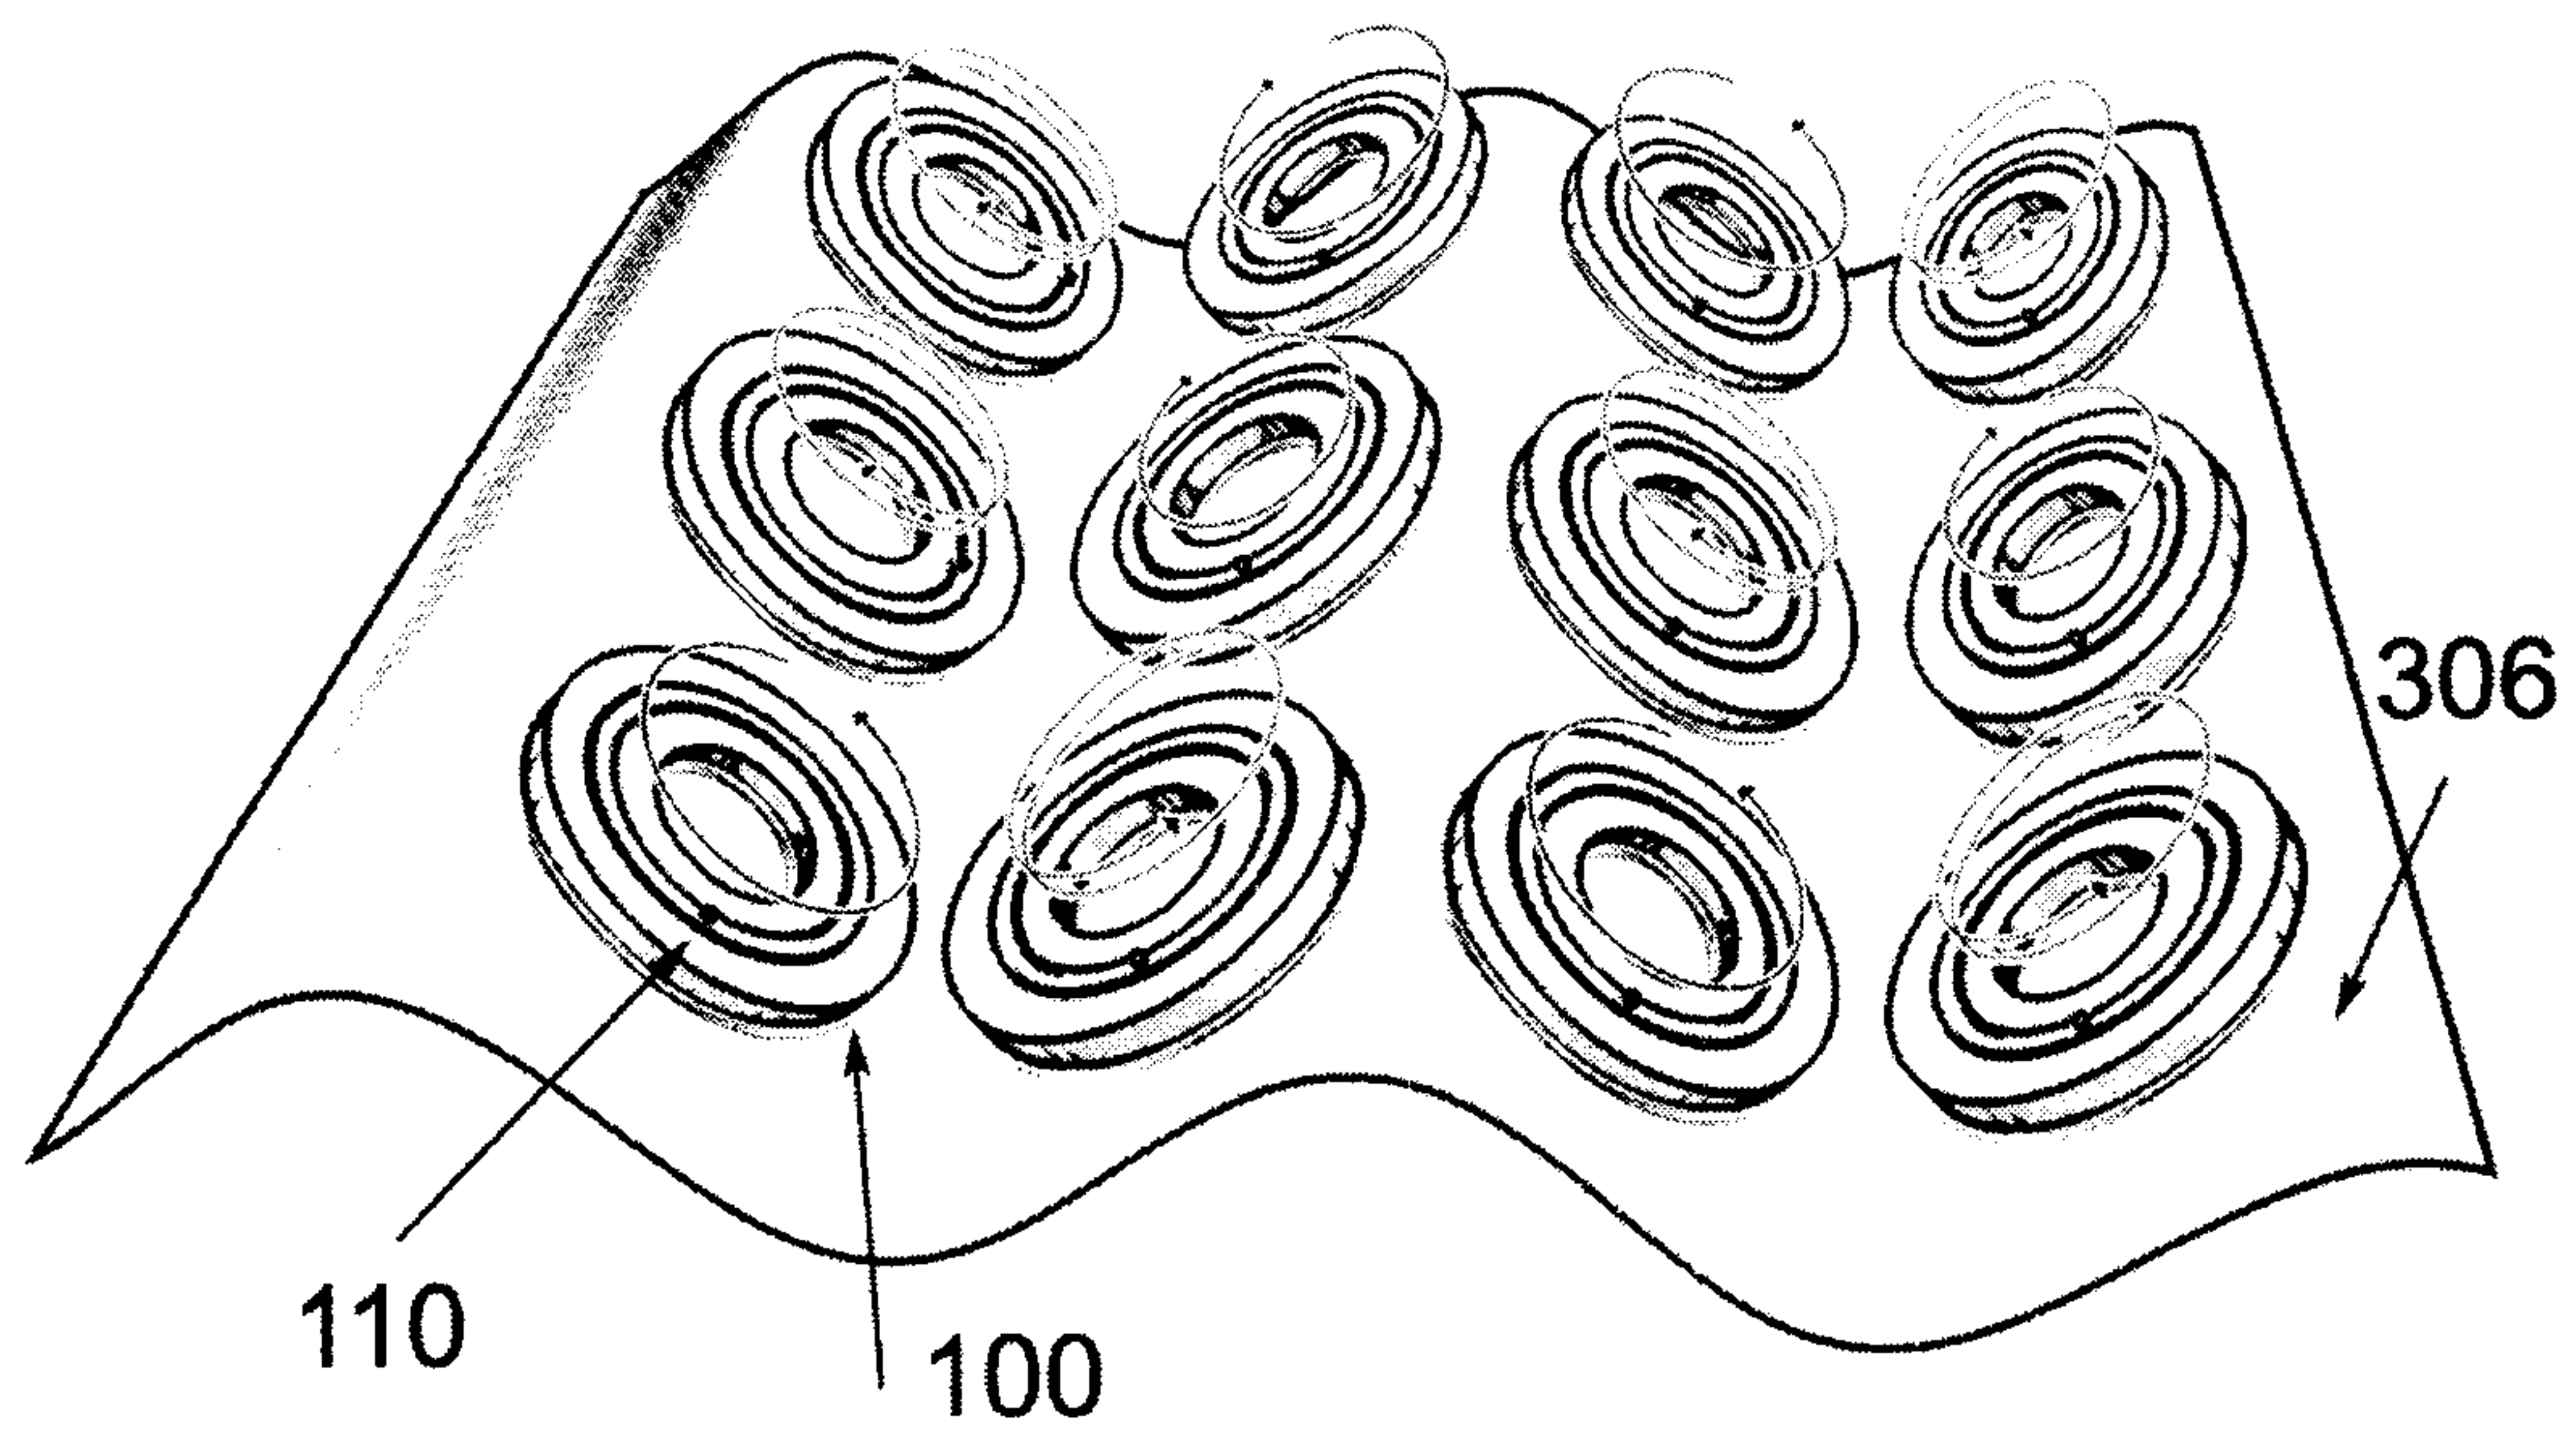


FIGURE 3C

6/16

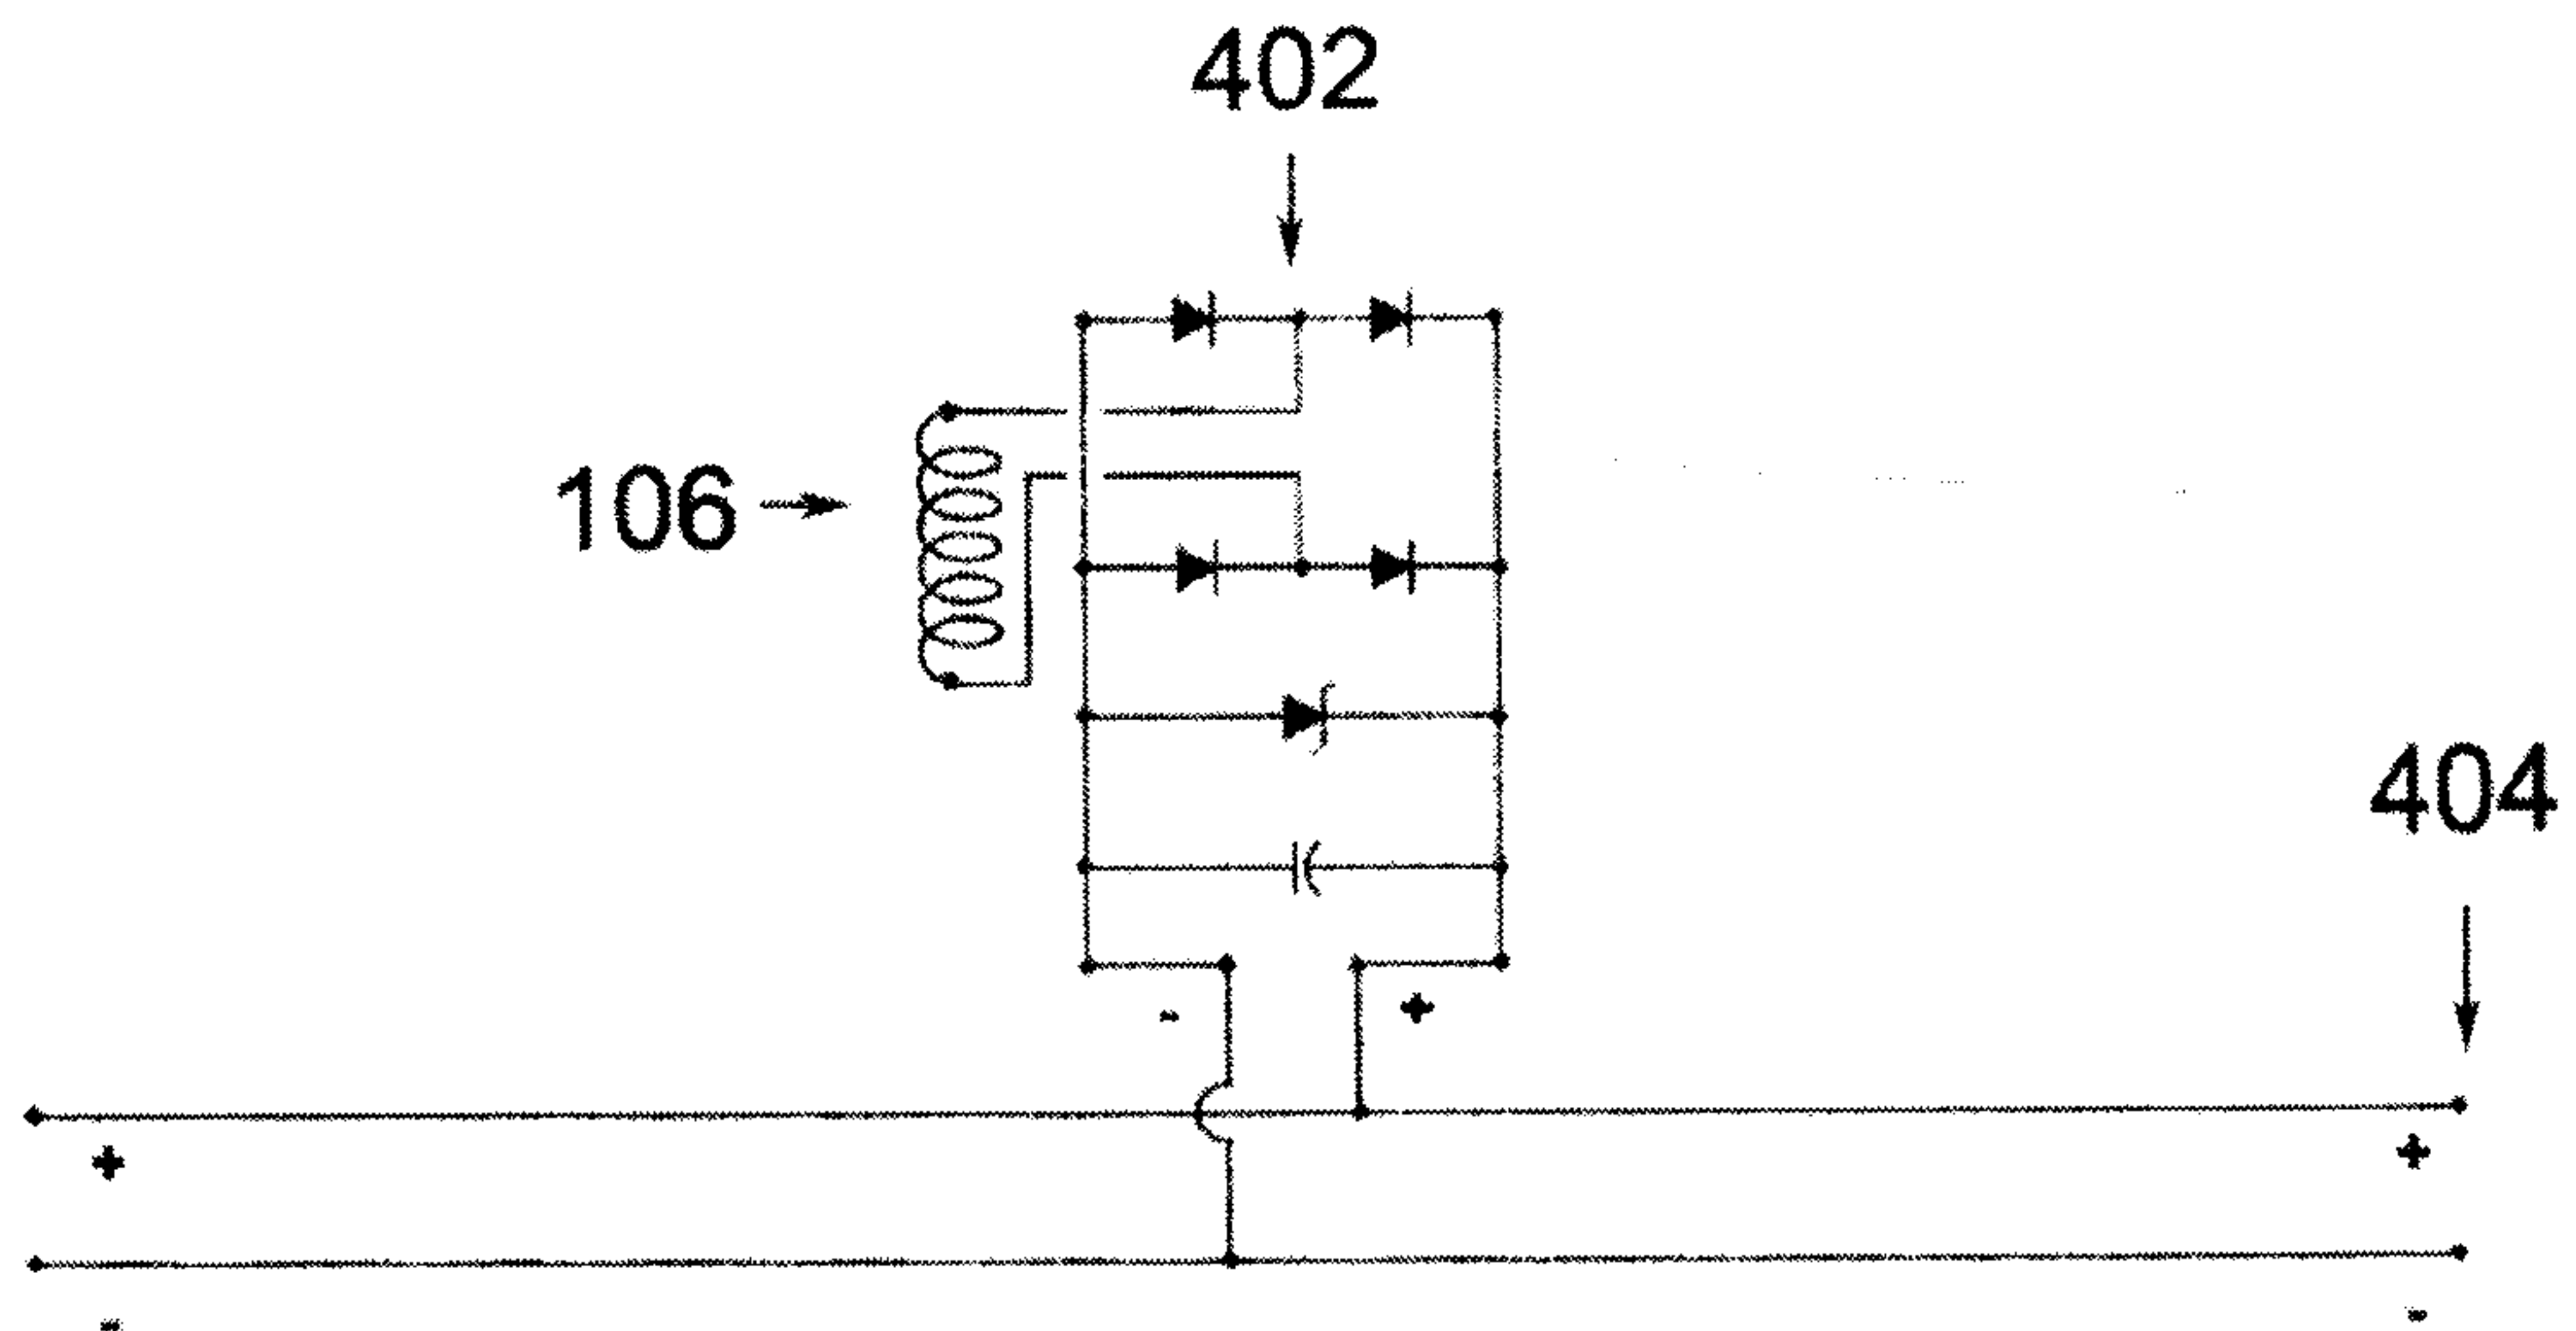


FIGURE 4A

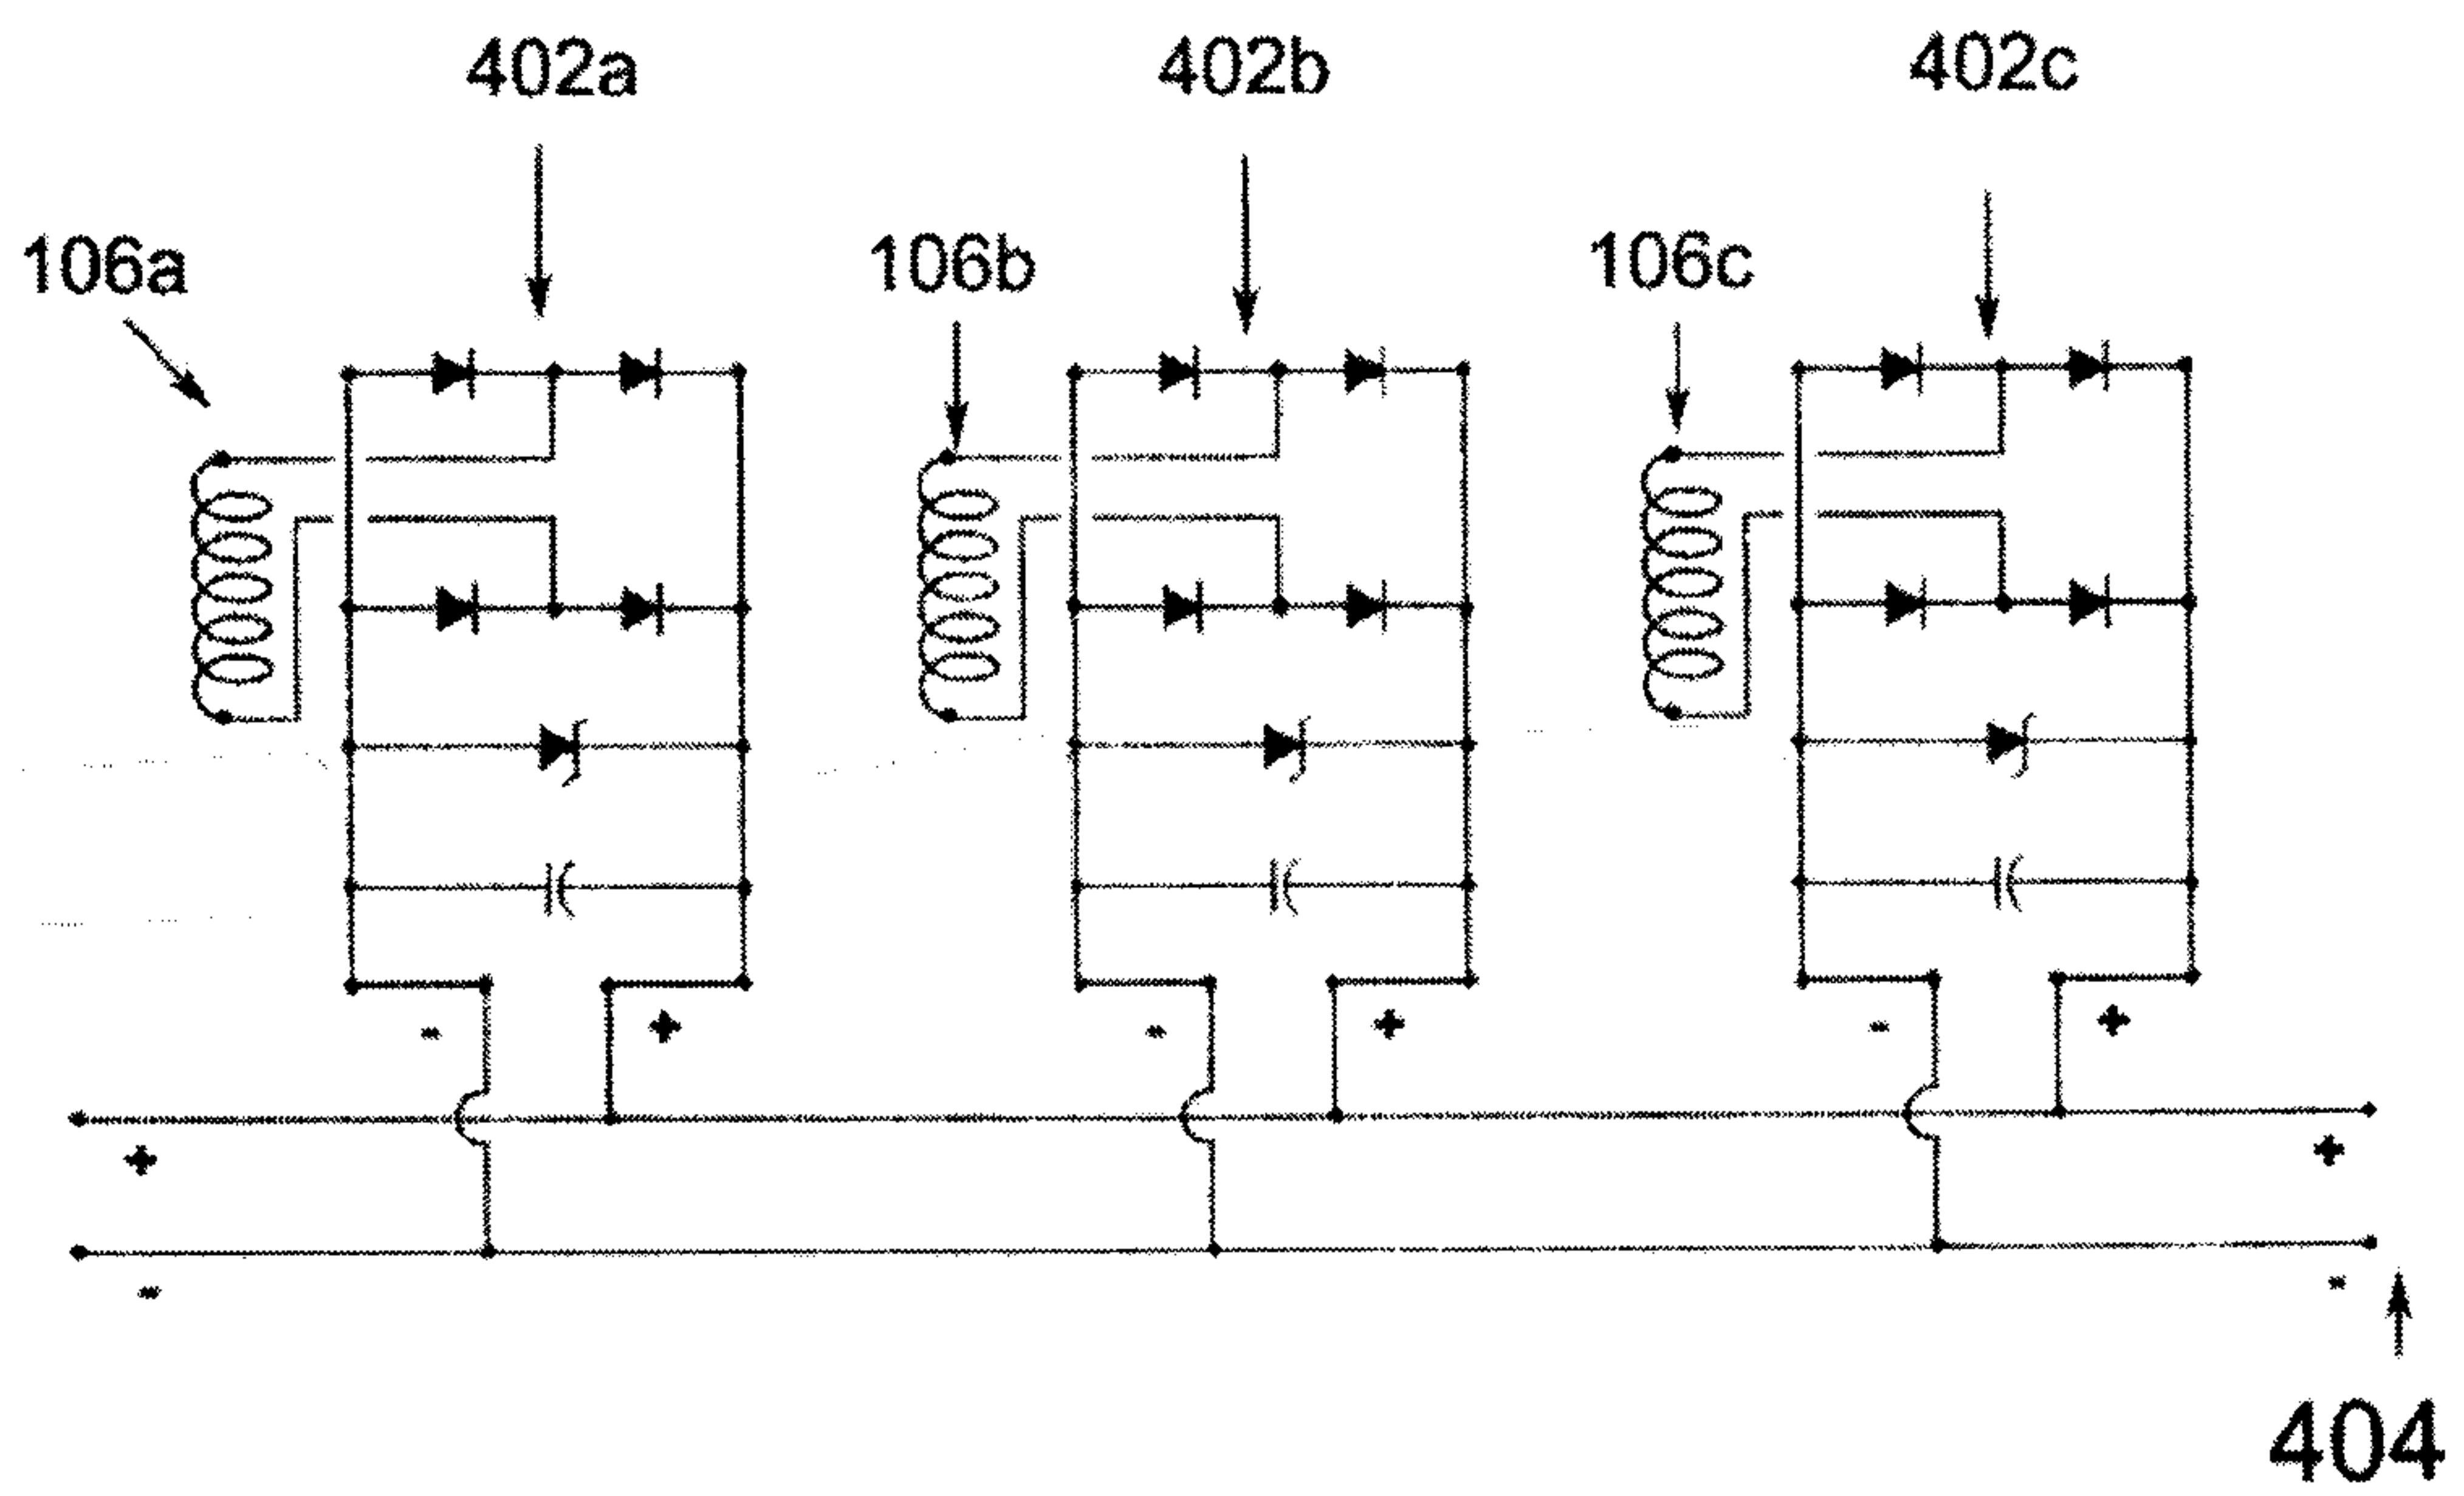


FIGURE 4B

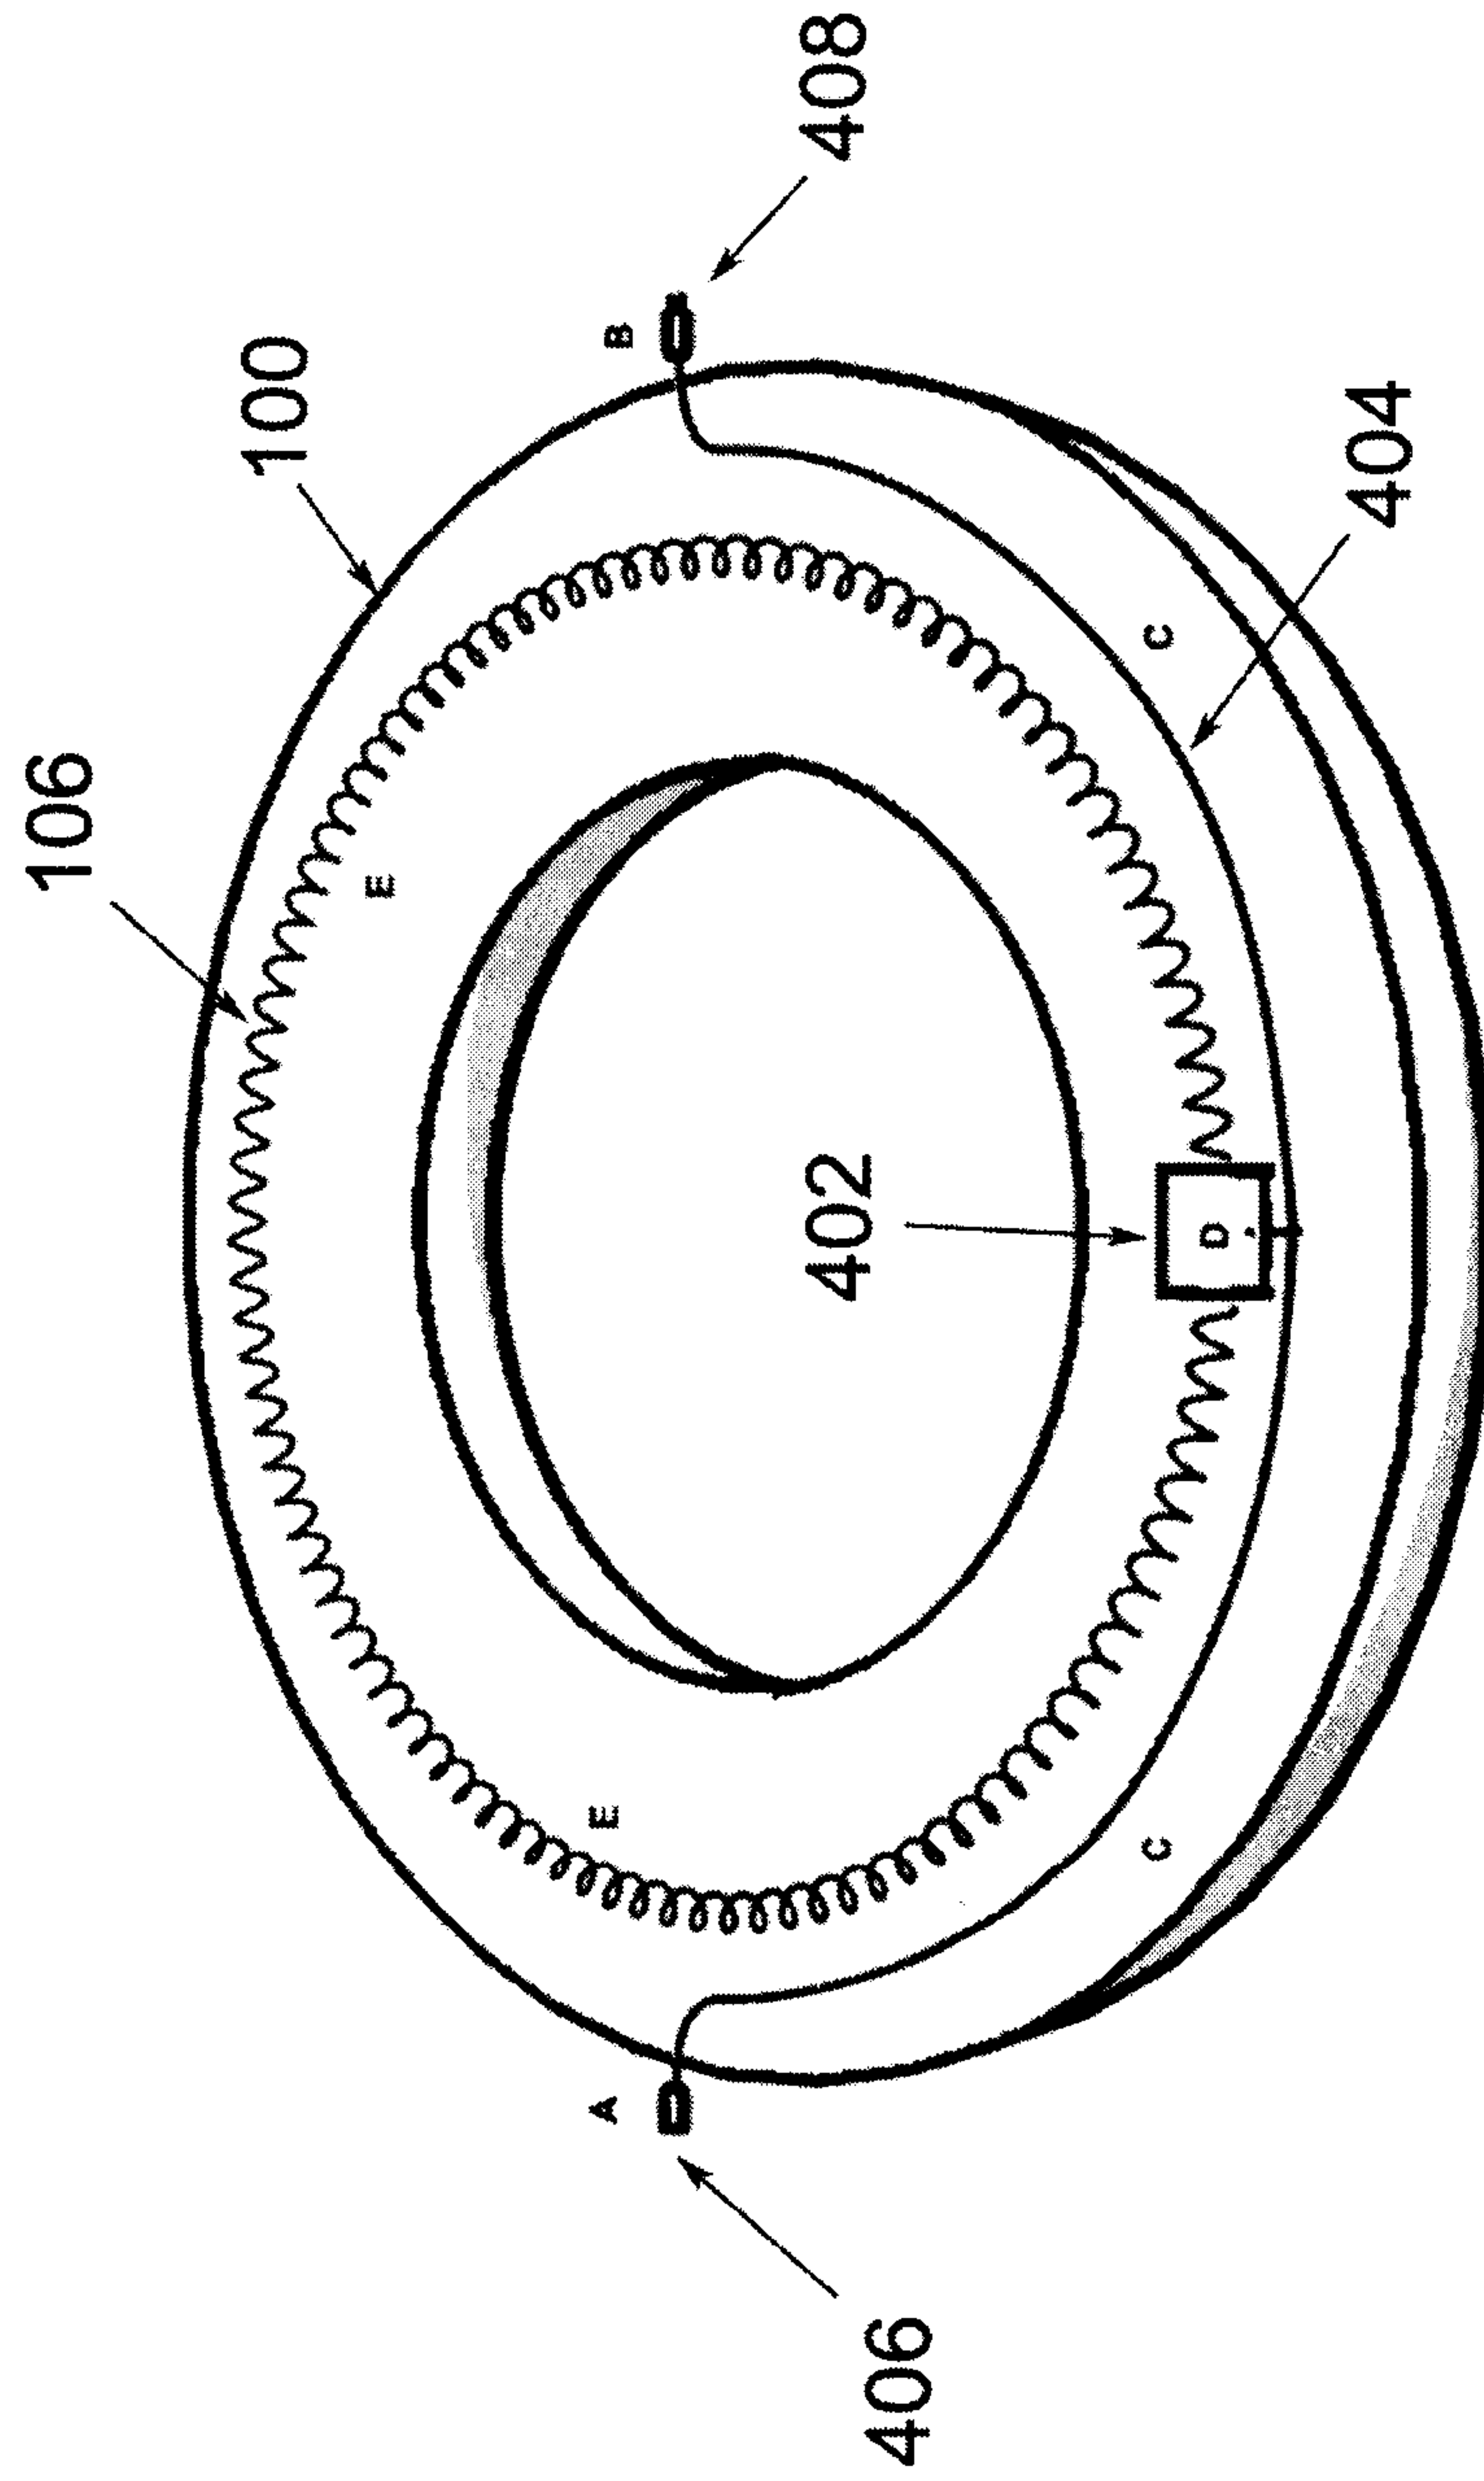


FIGURE 4C

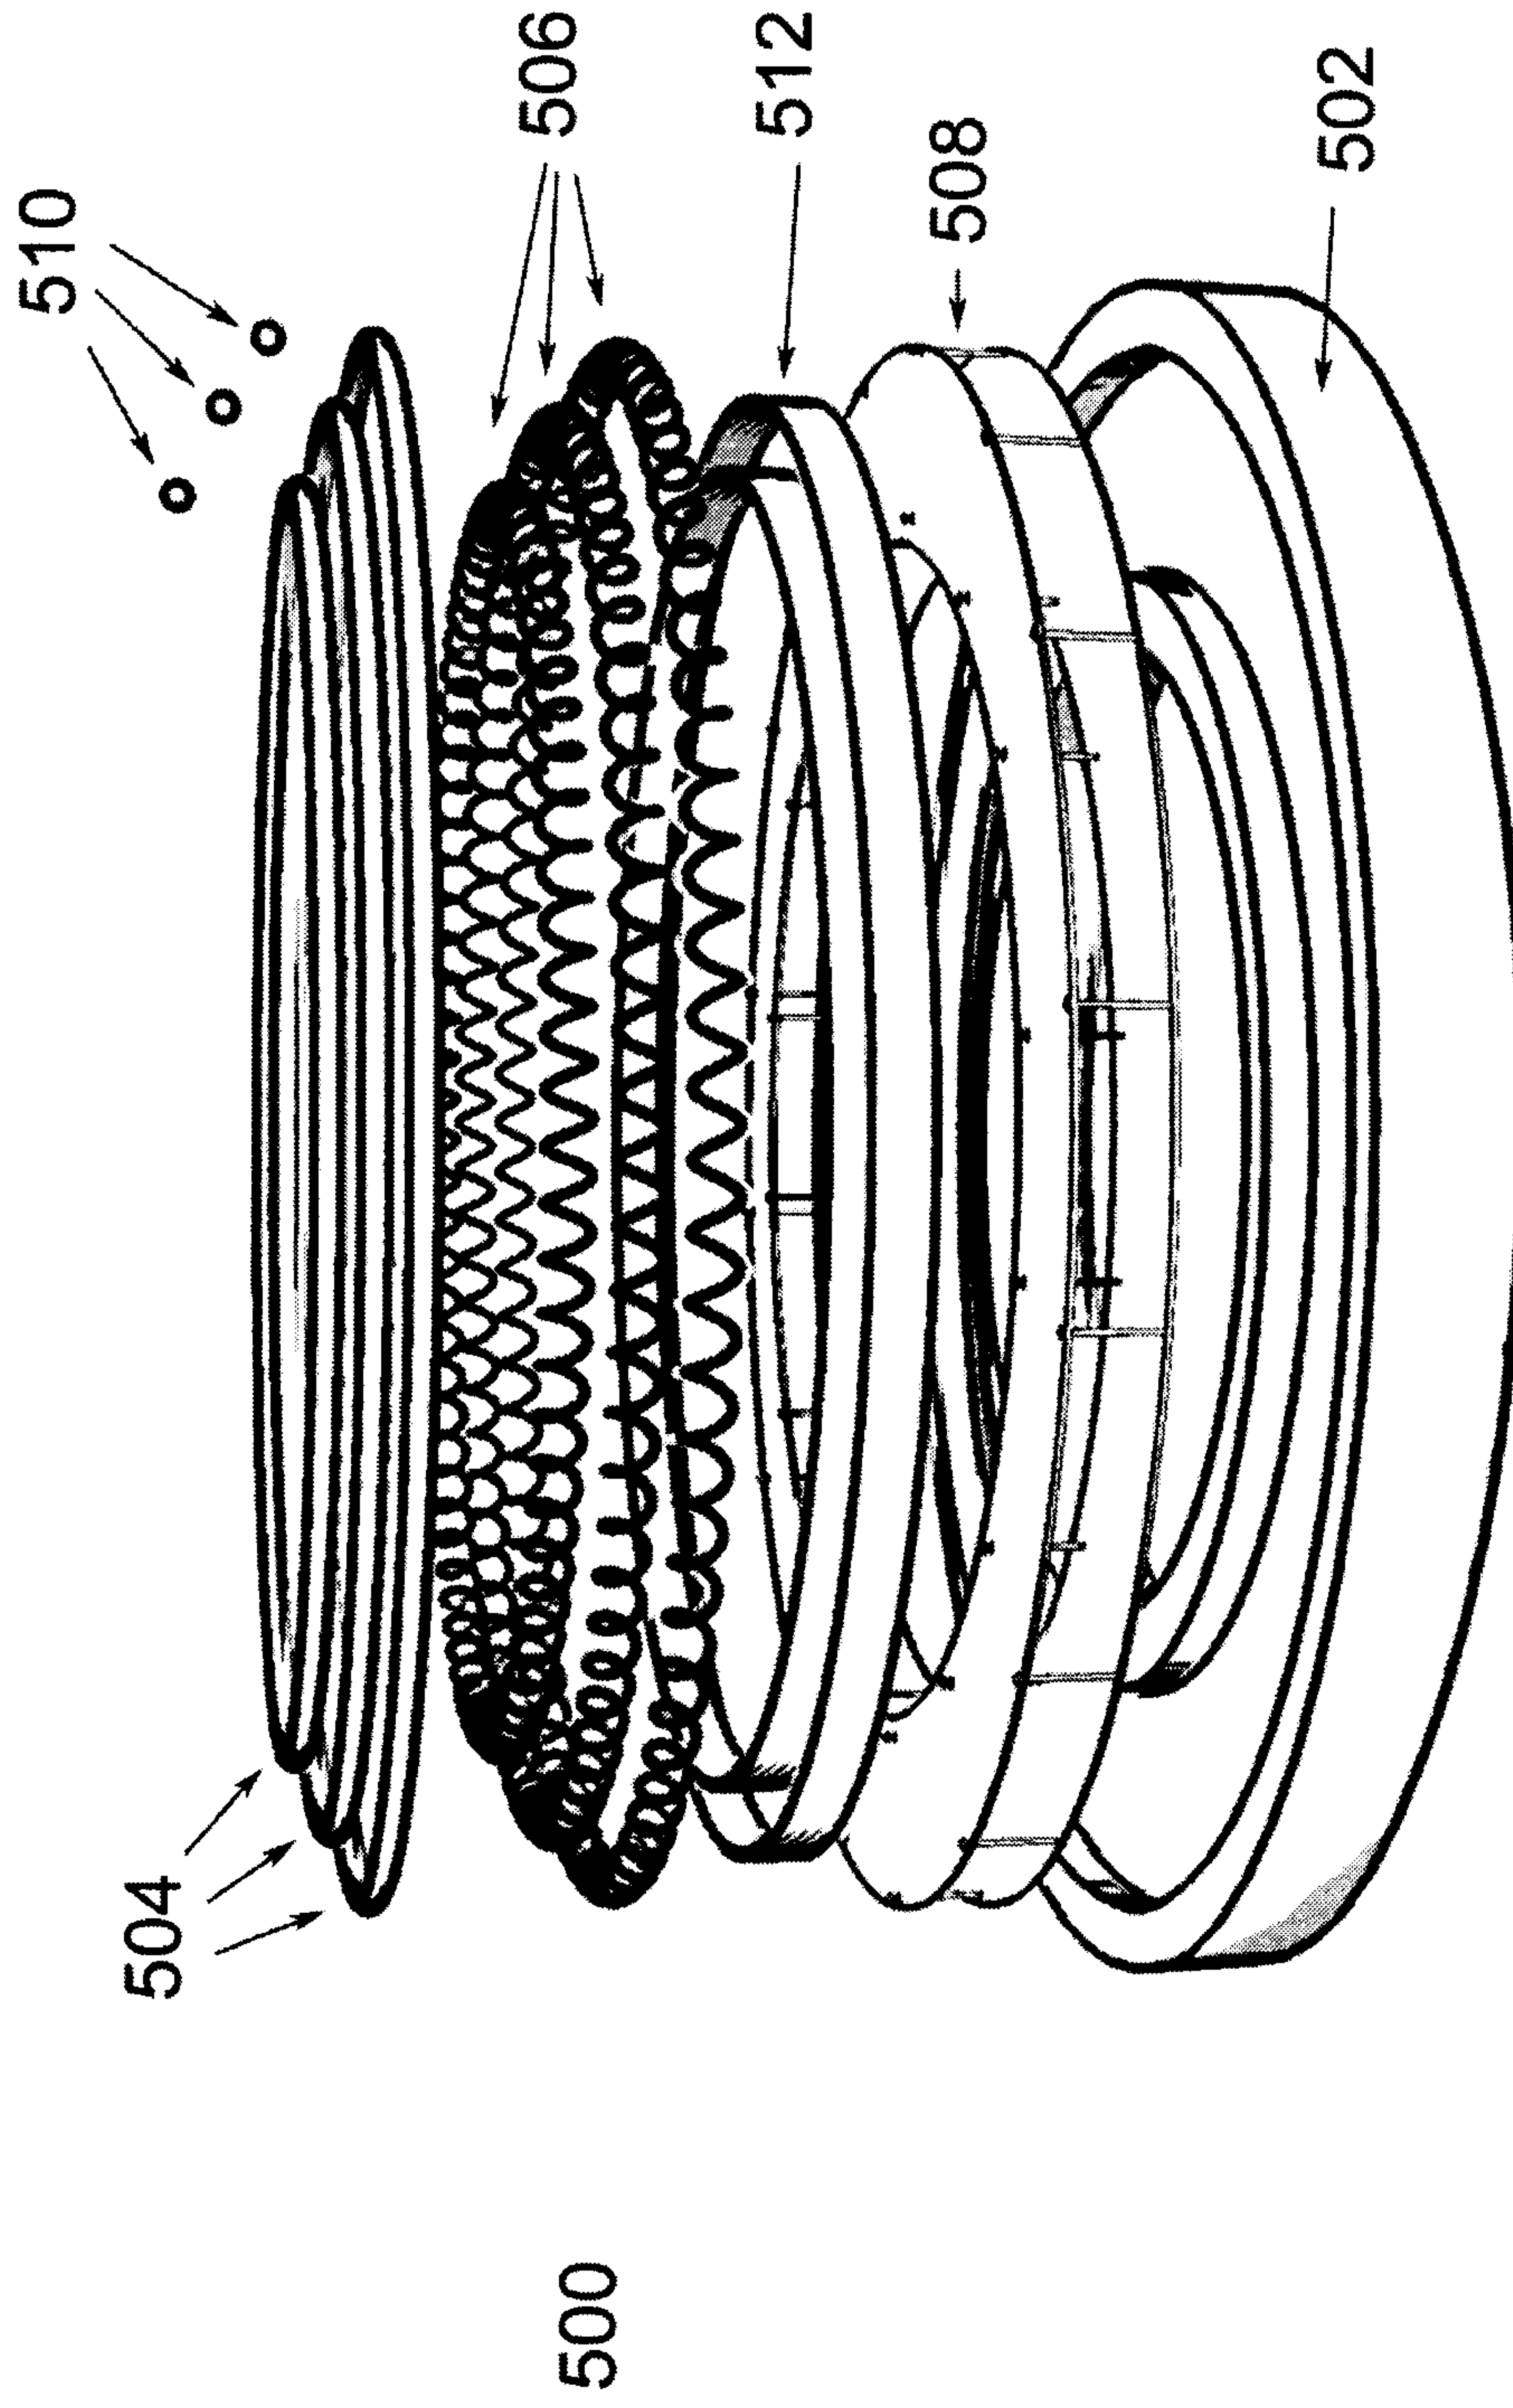


FIGURE 5A

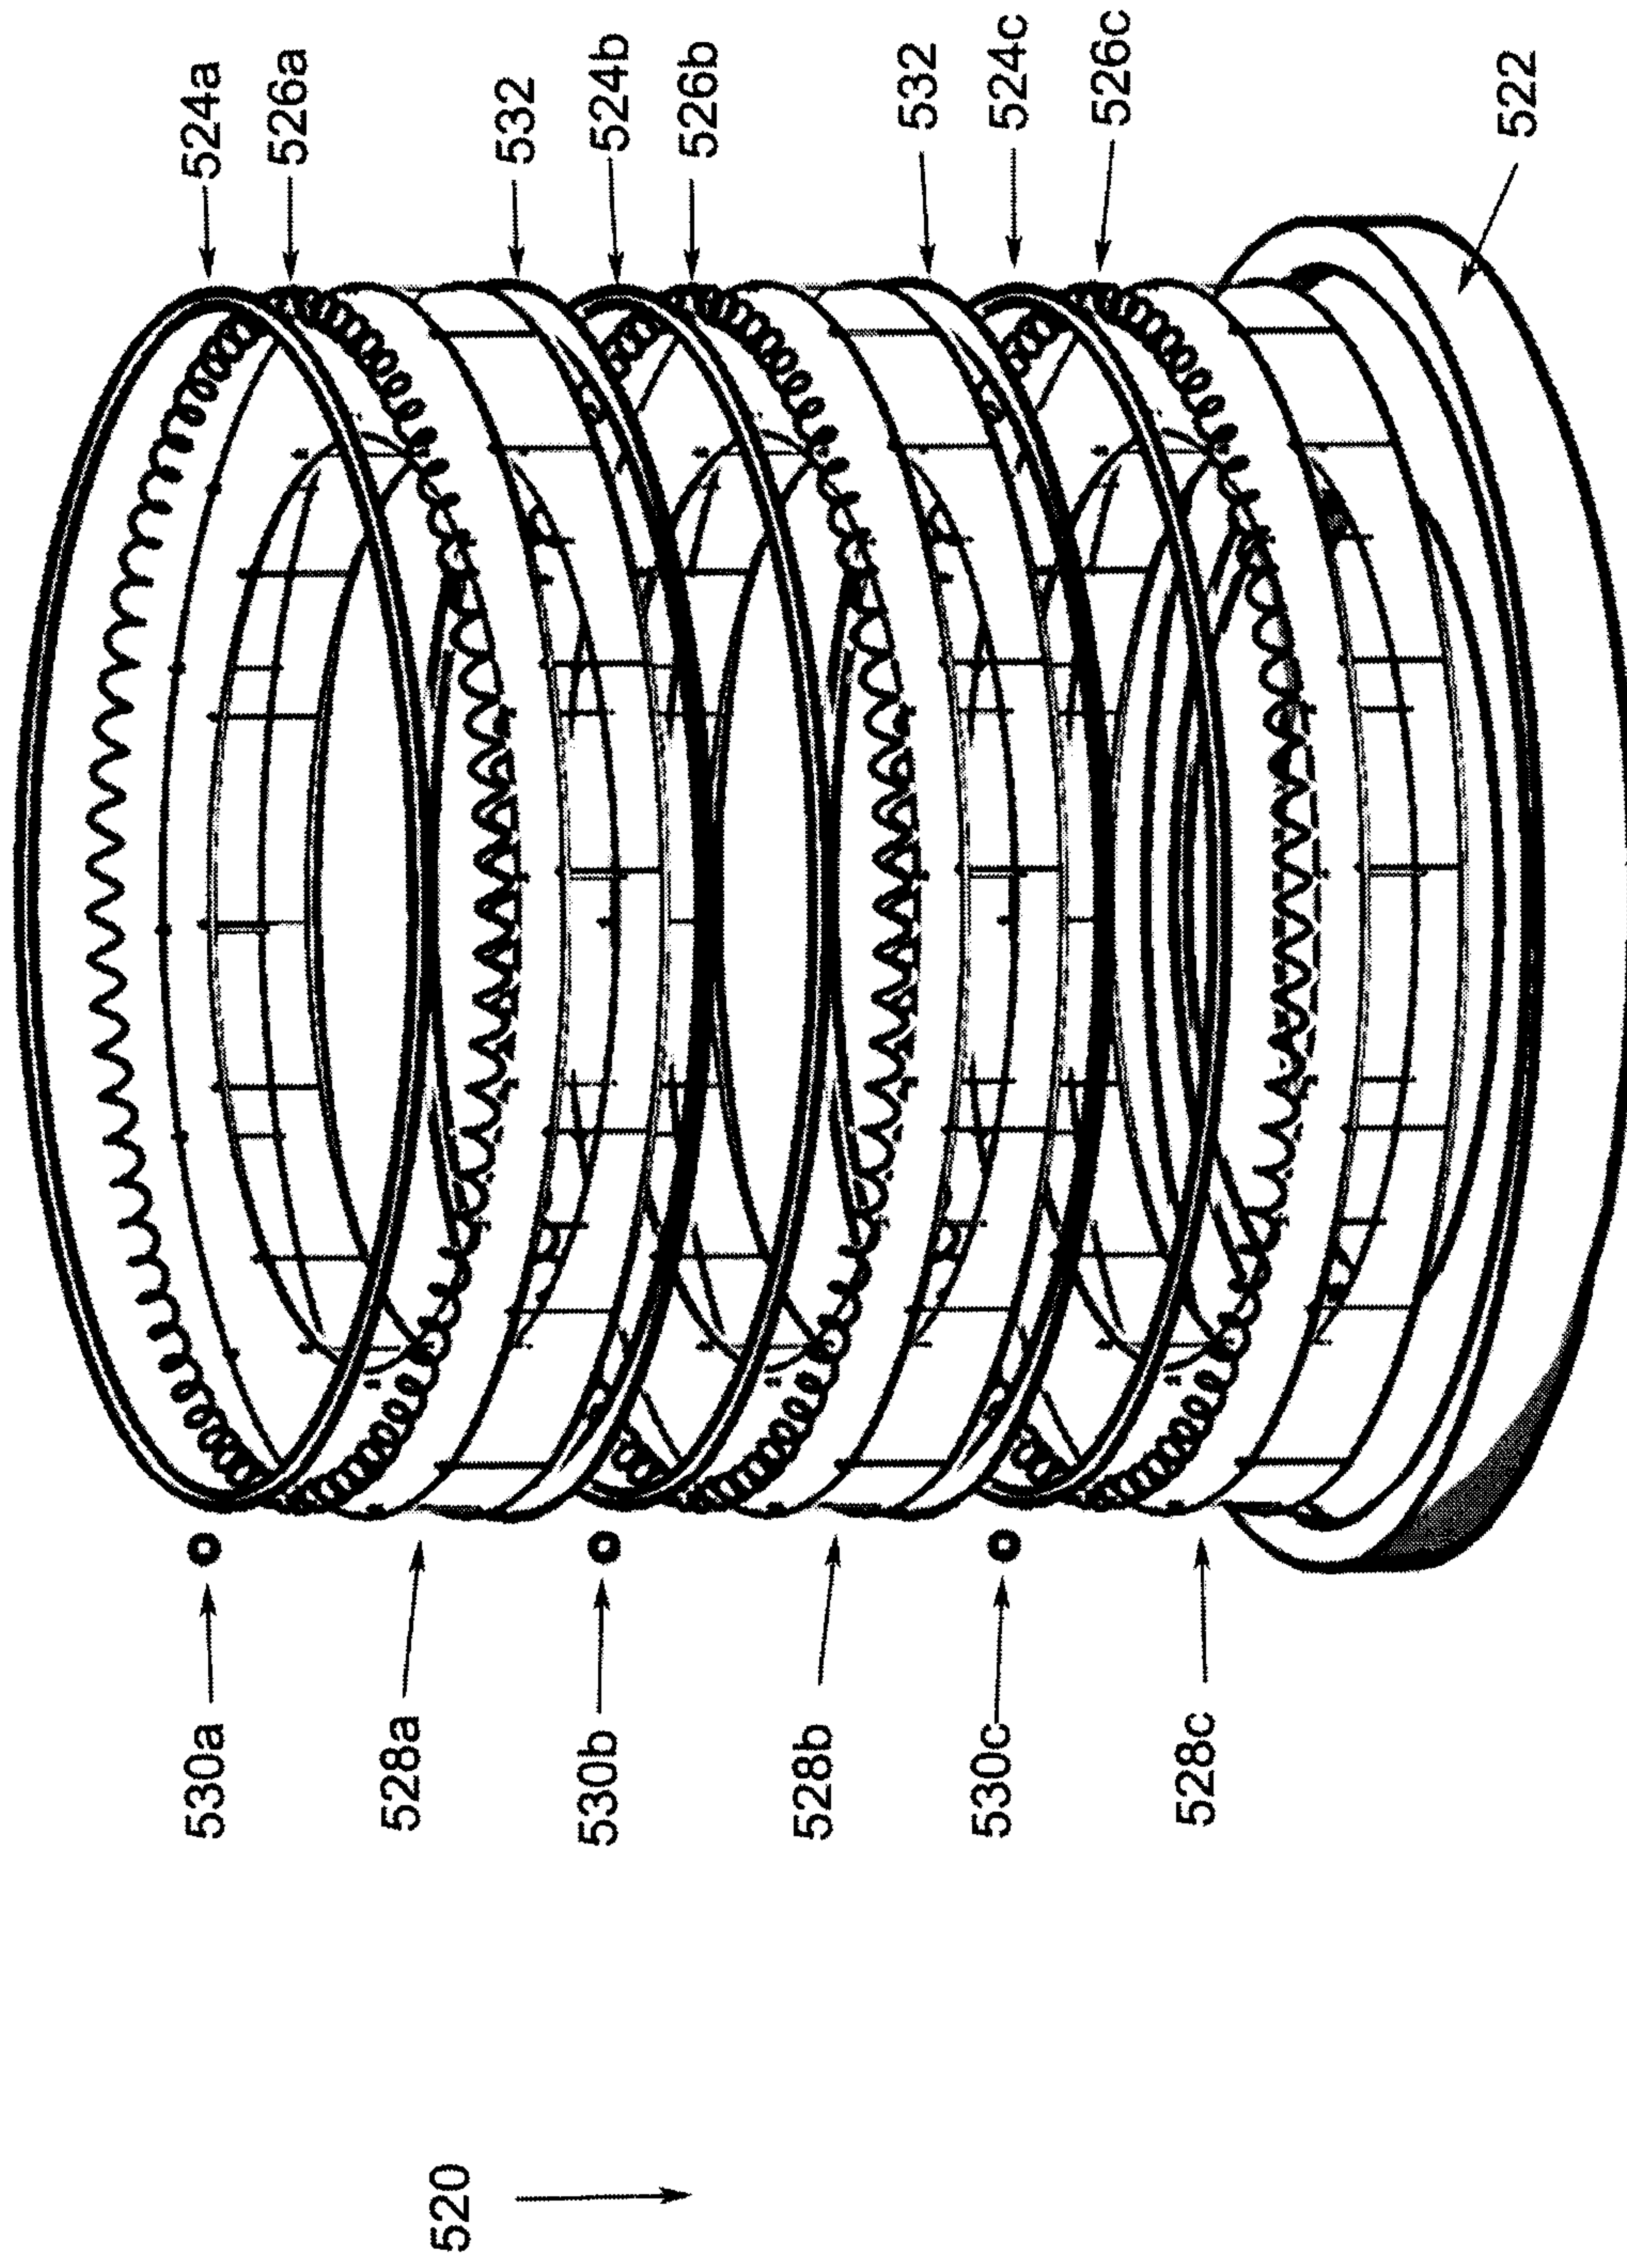


FIGURE 5B

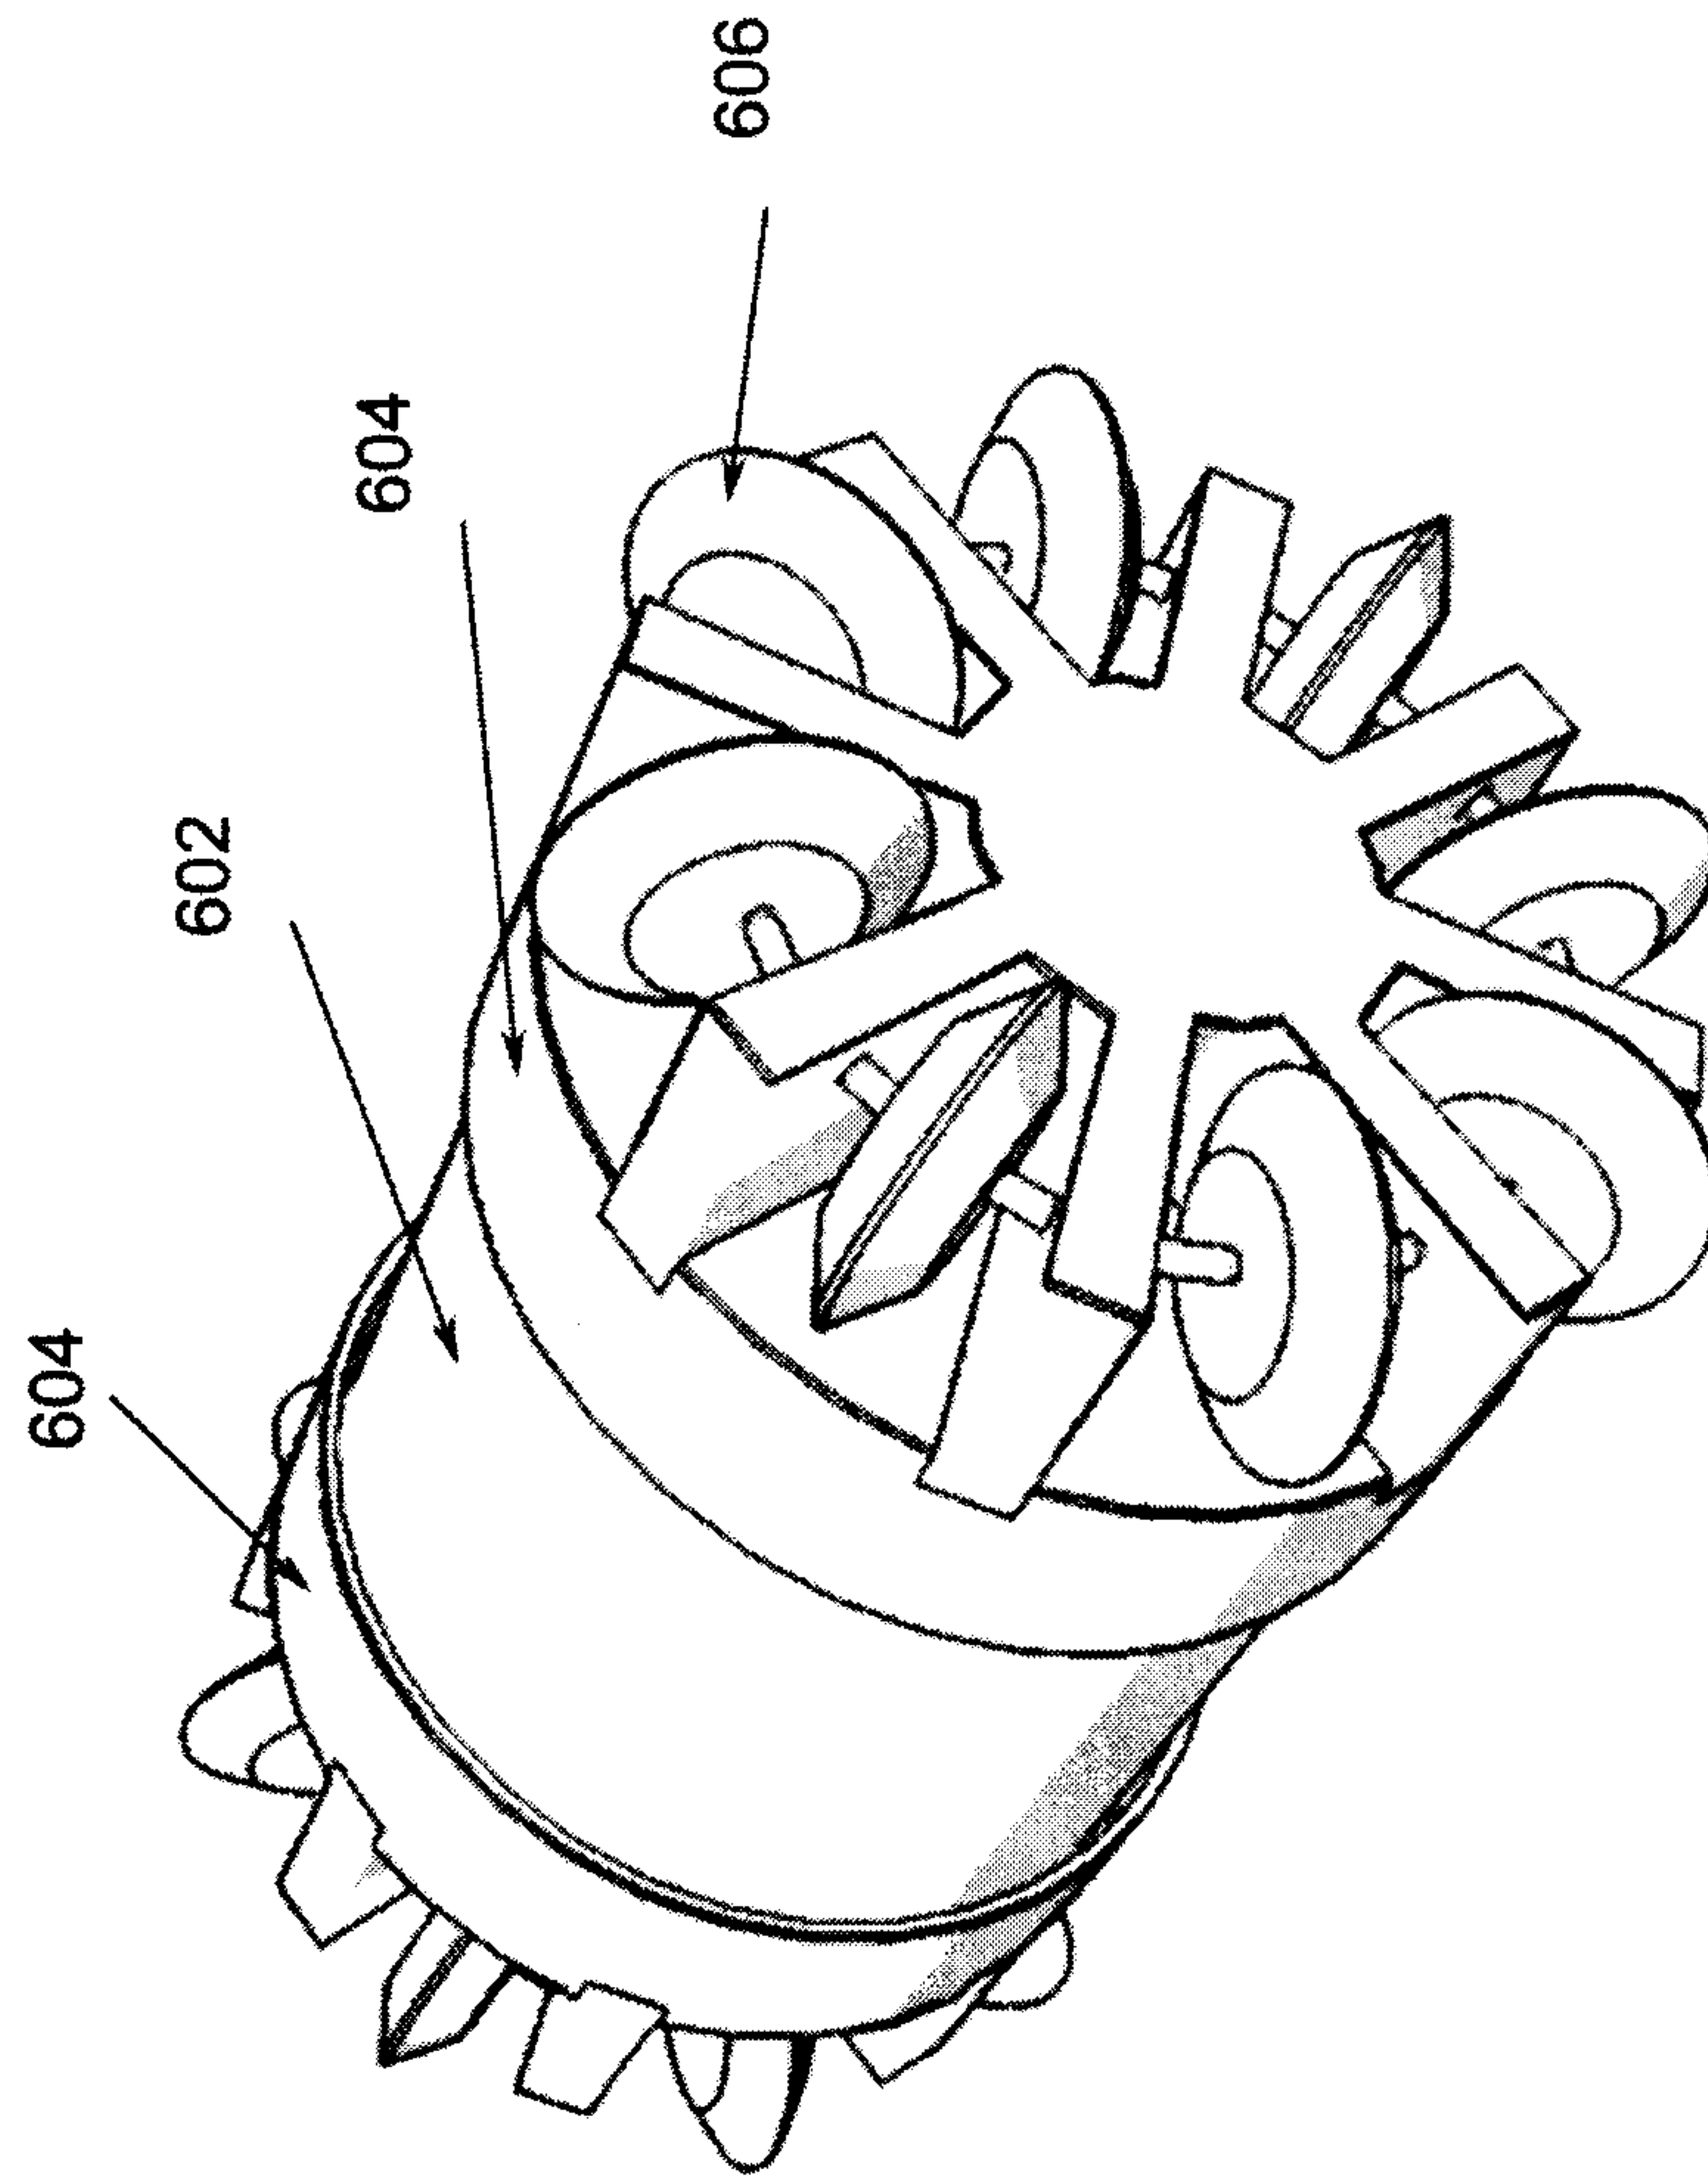


FIGURE 6A

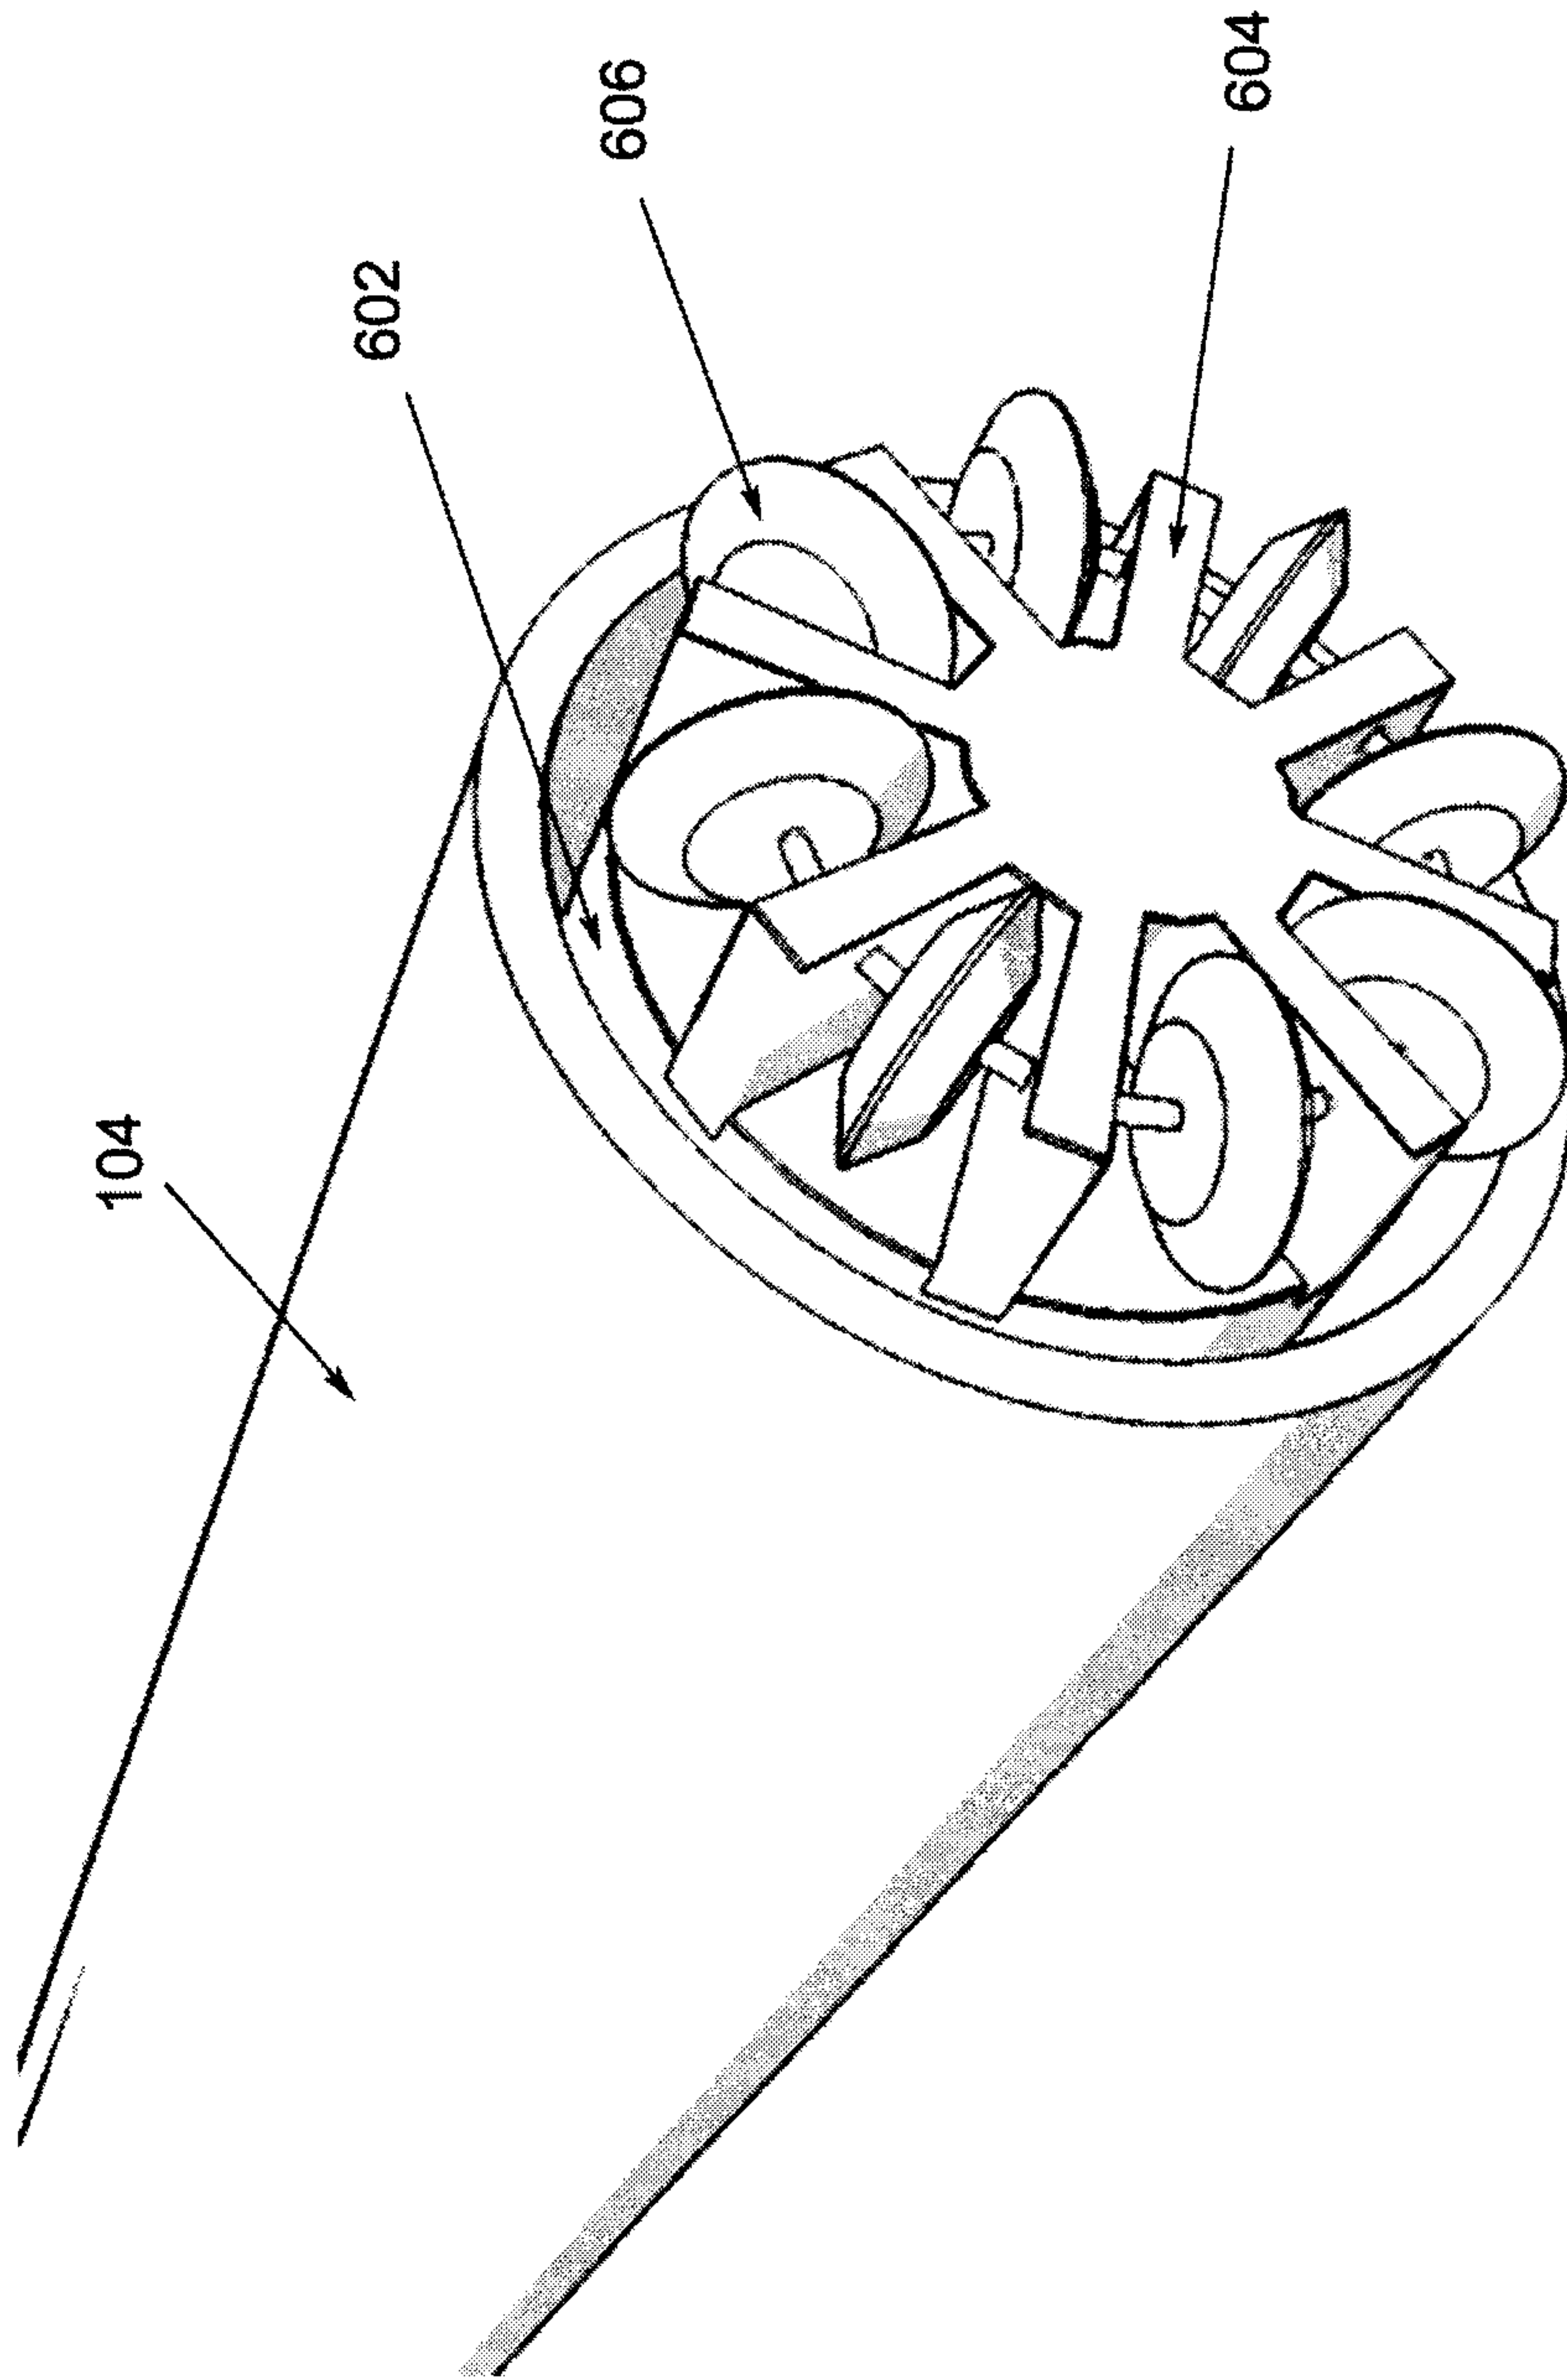


FIGURE 6B

12/16

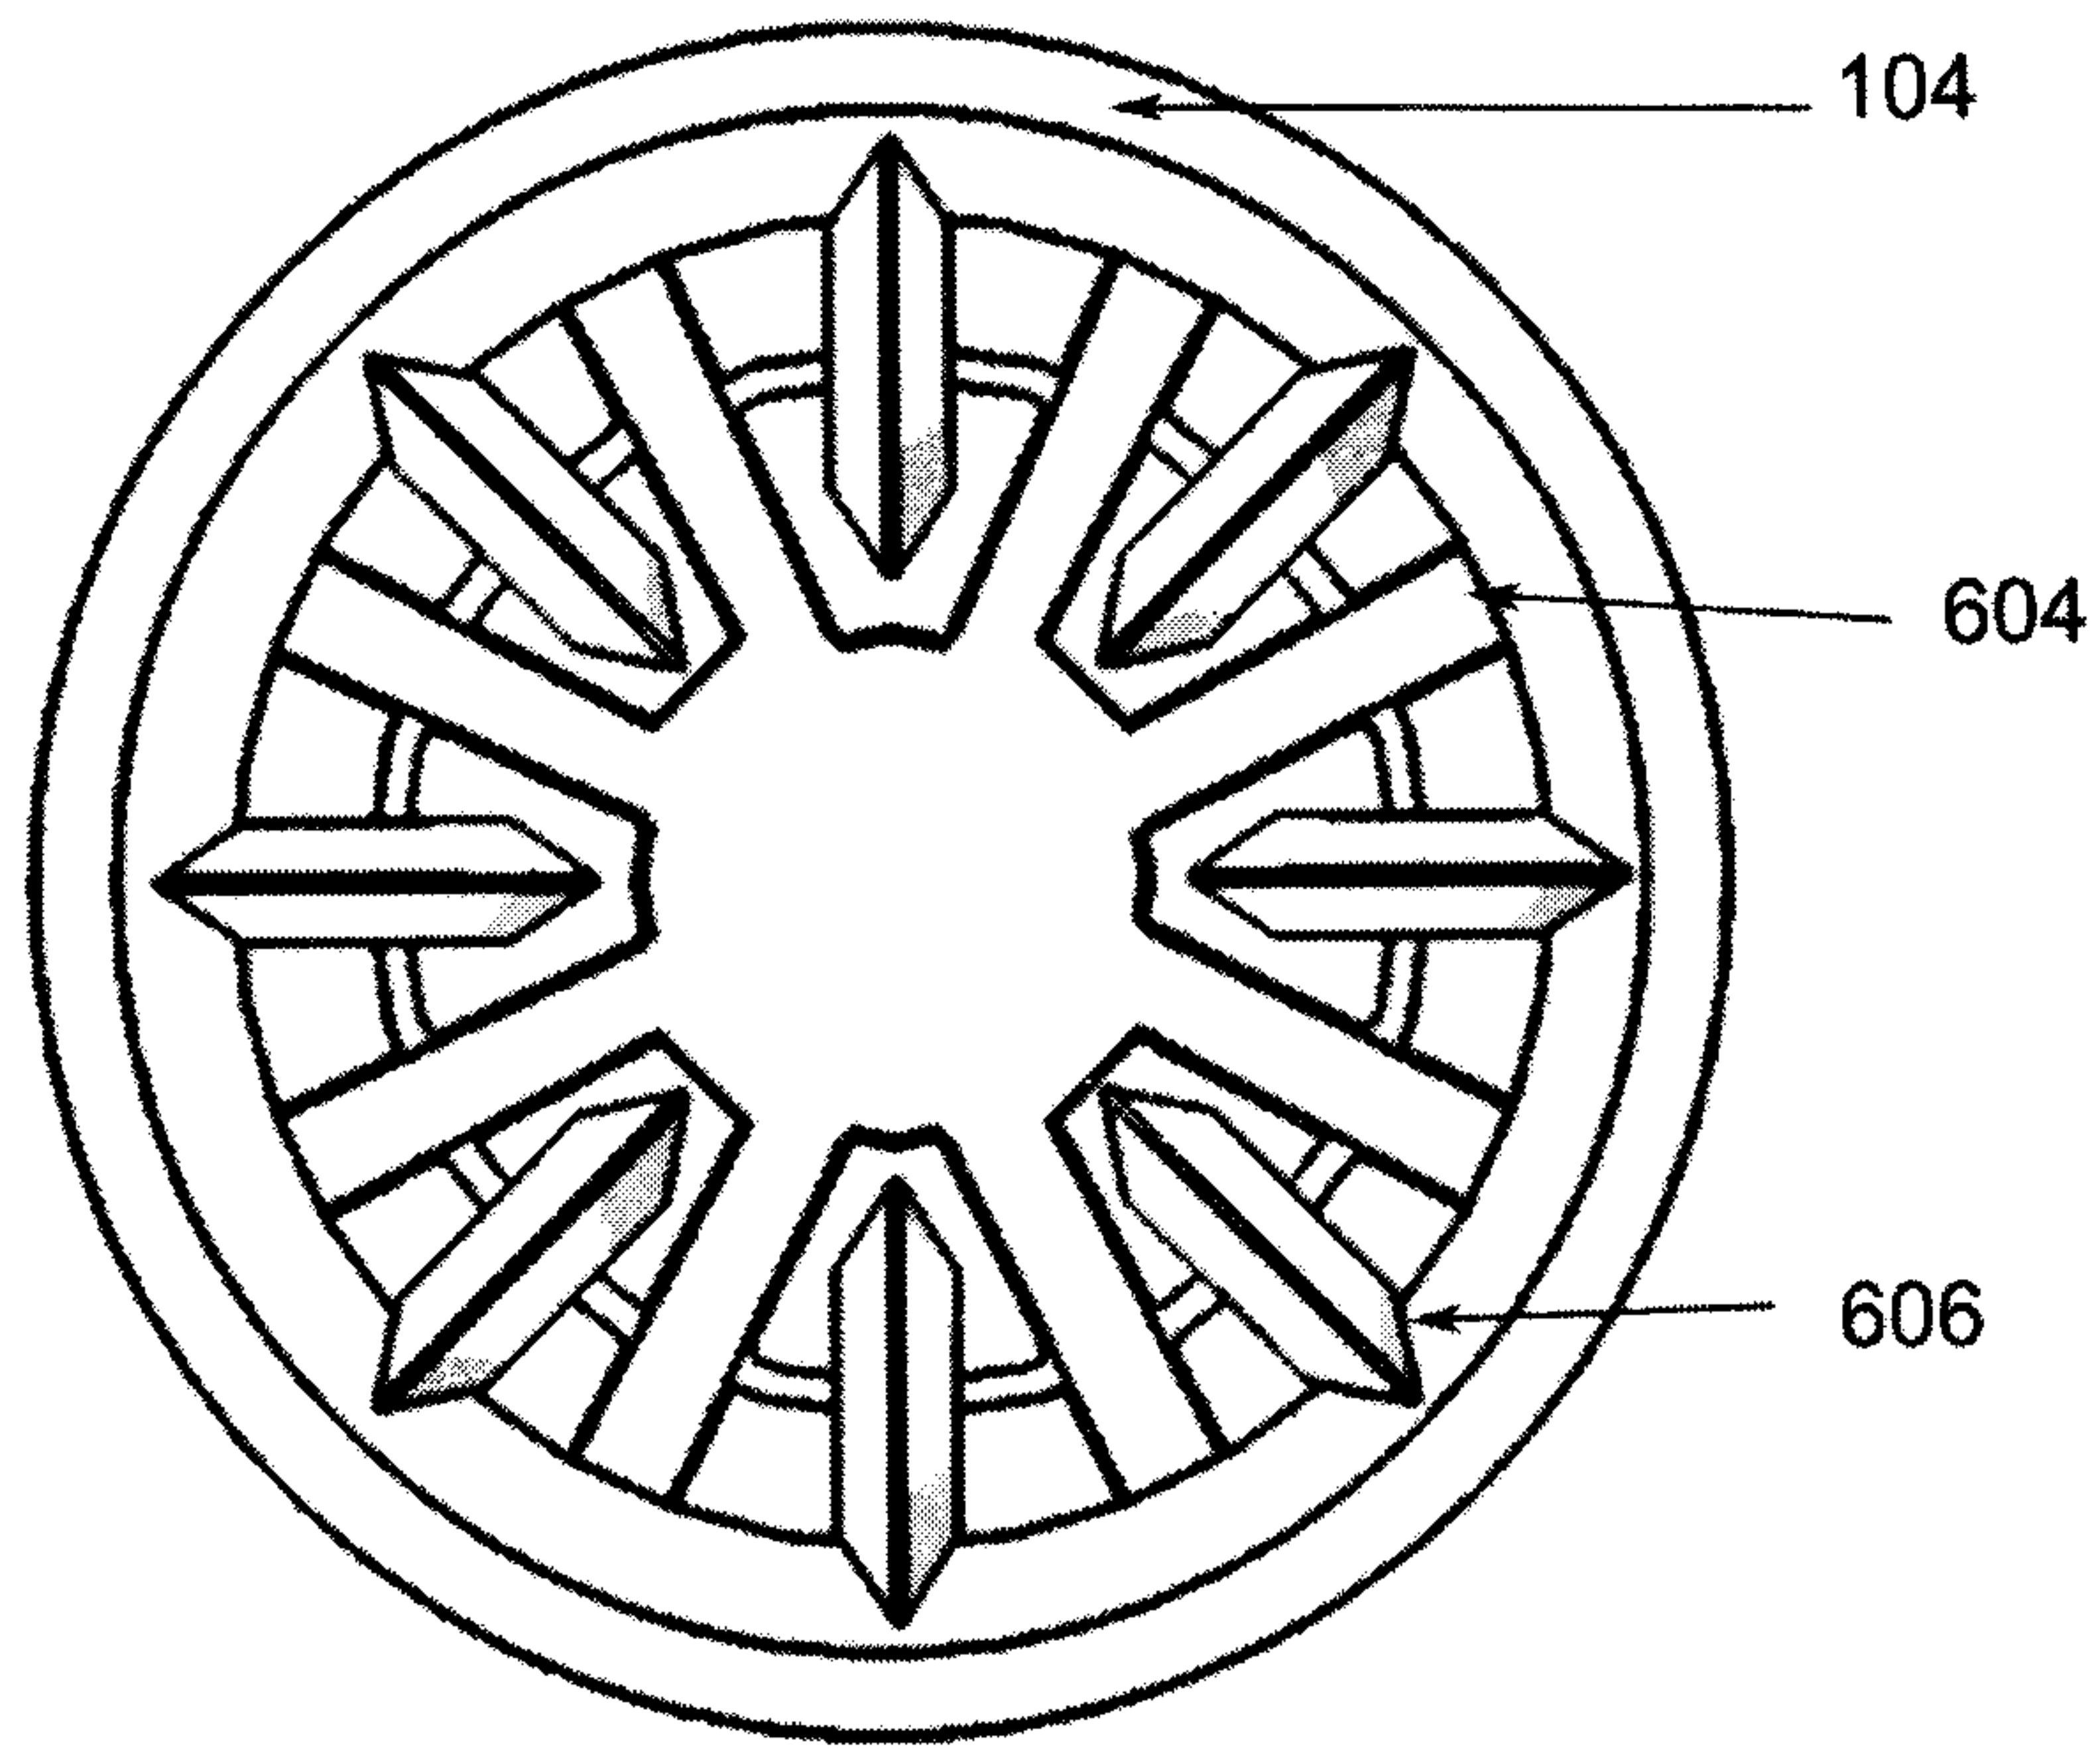


FIGURE 6C

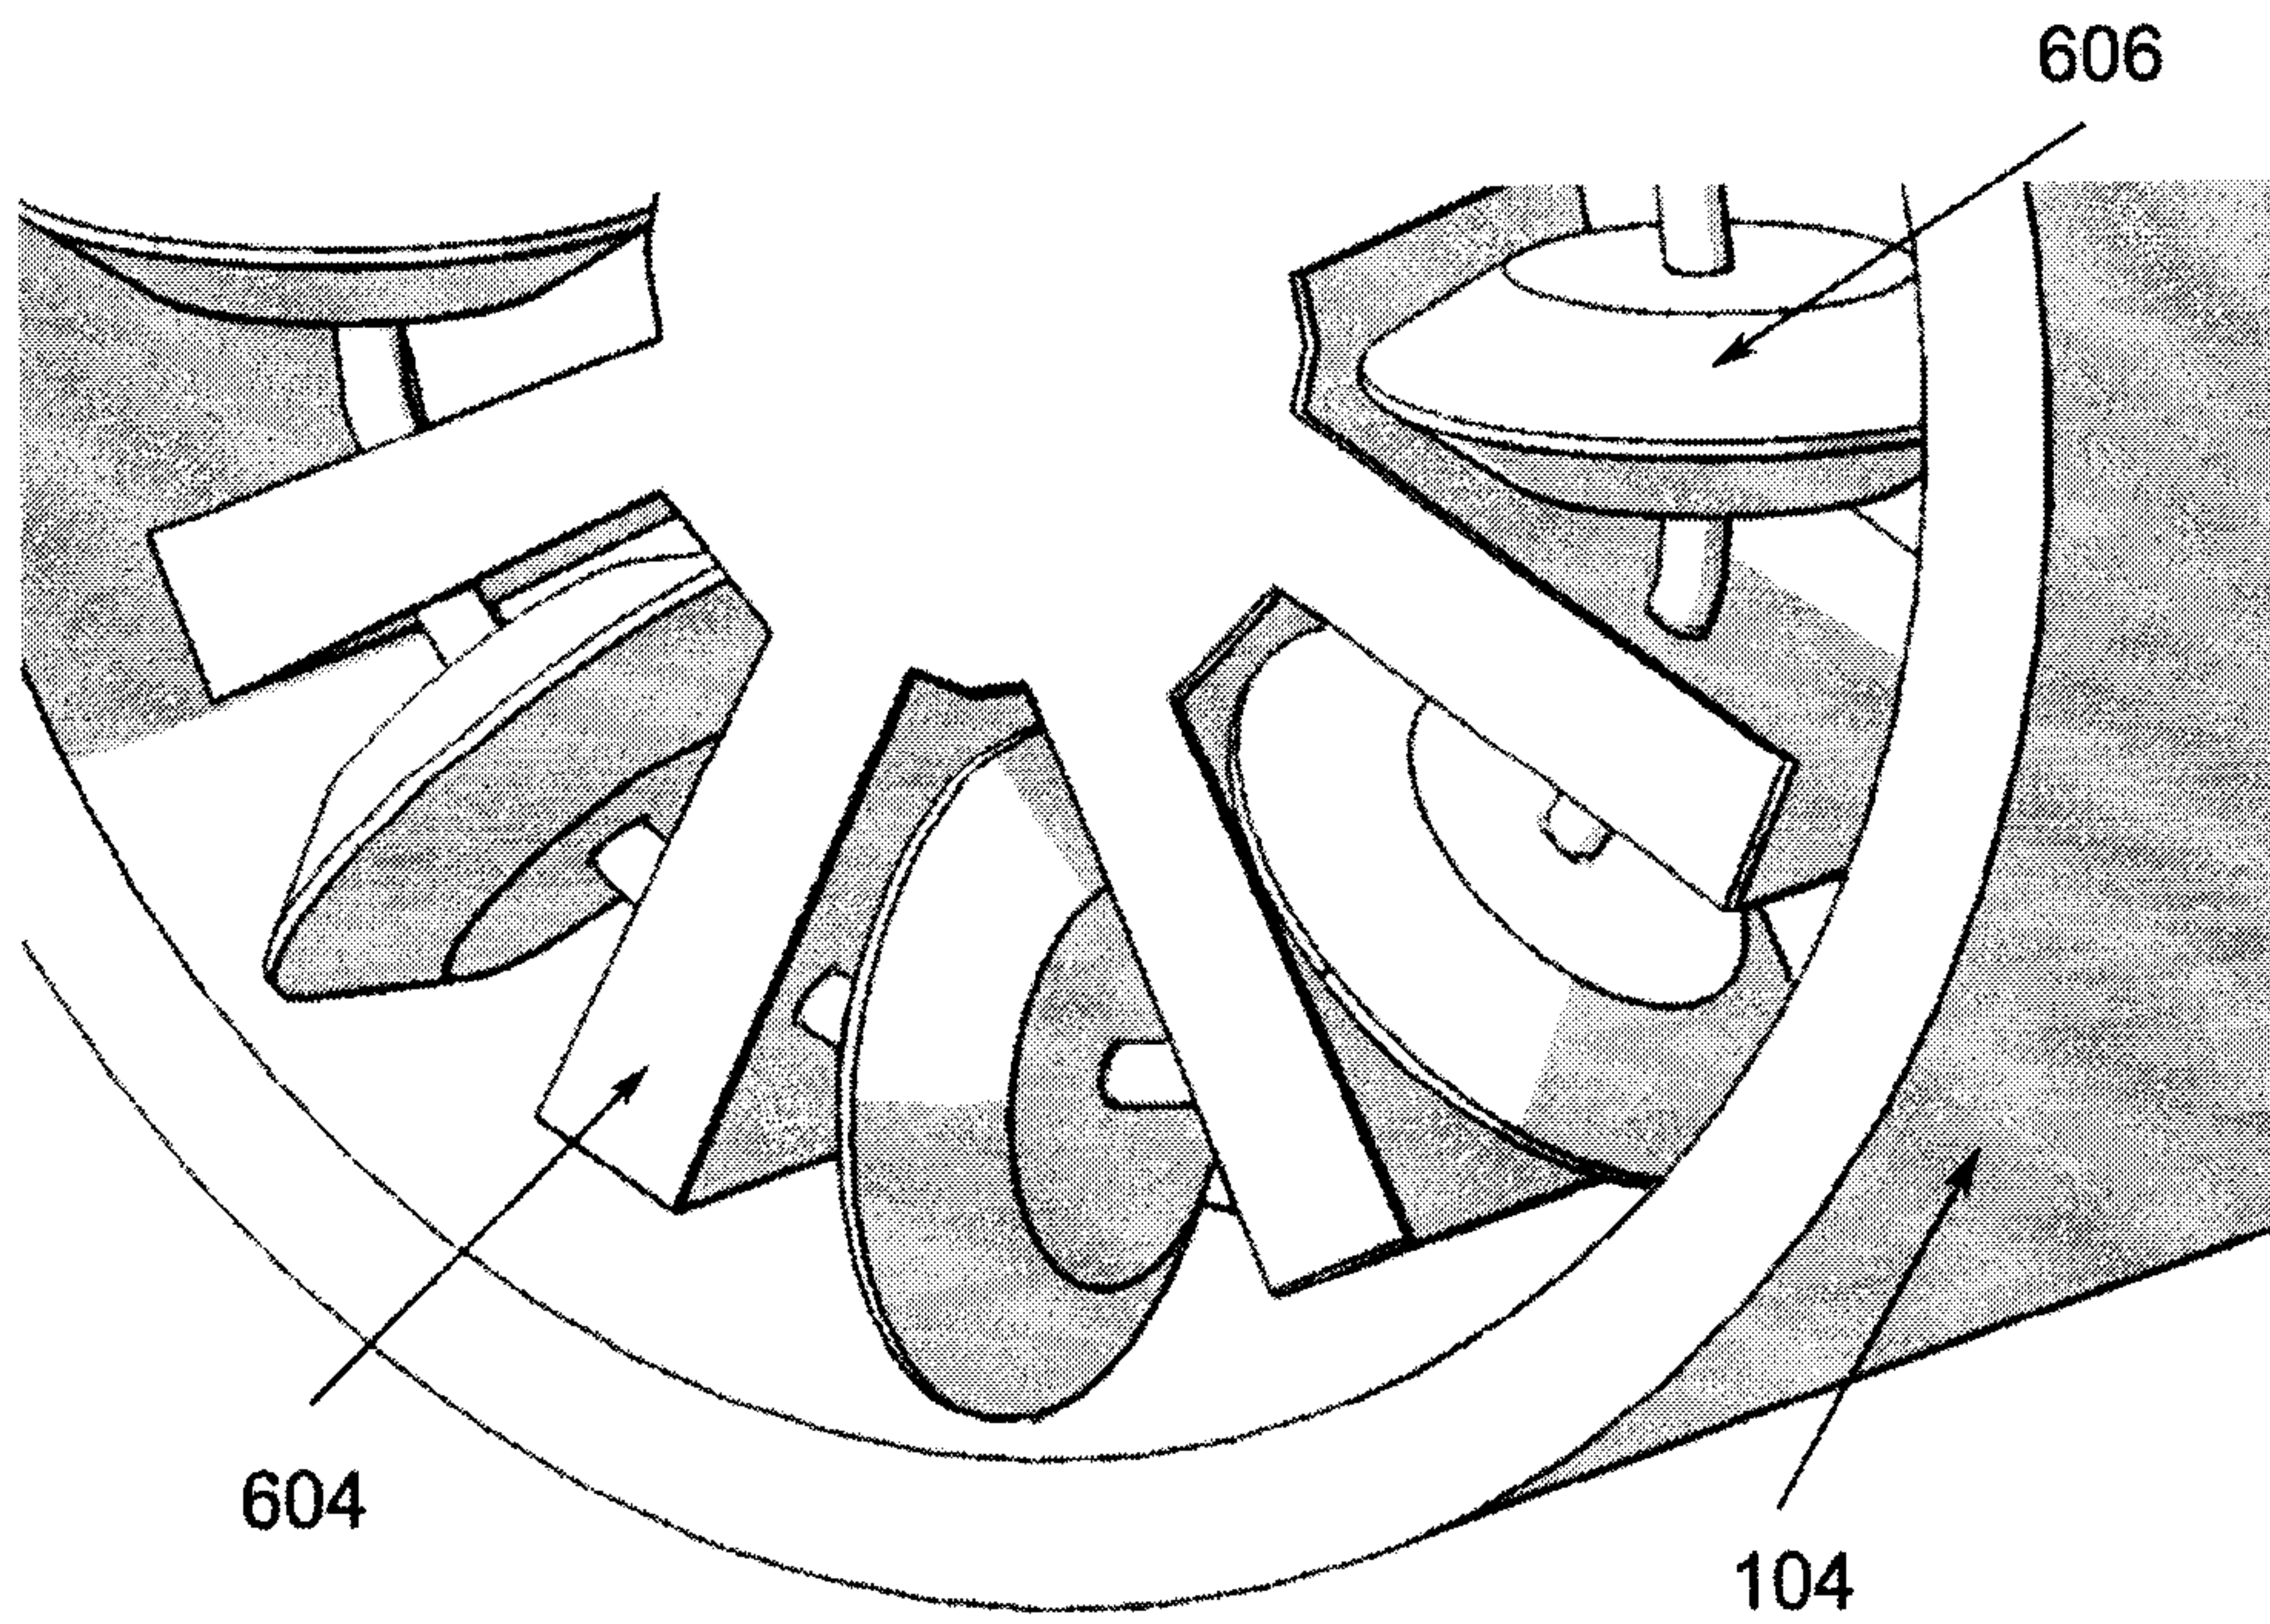


FIGURE 6D

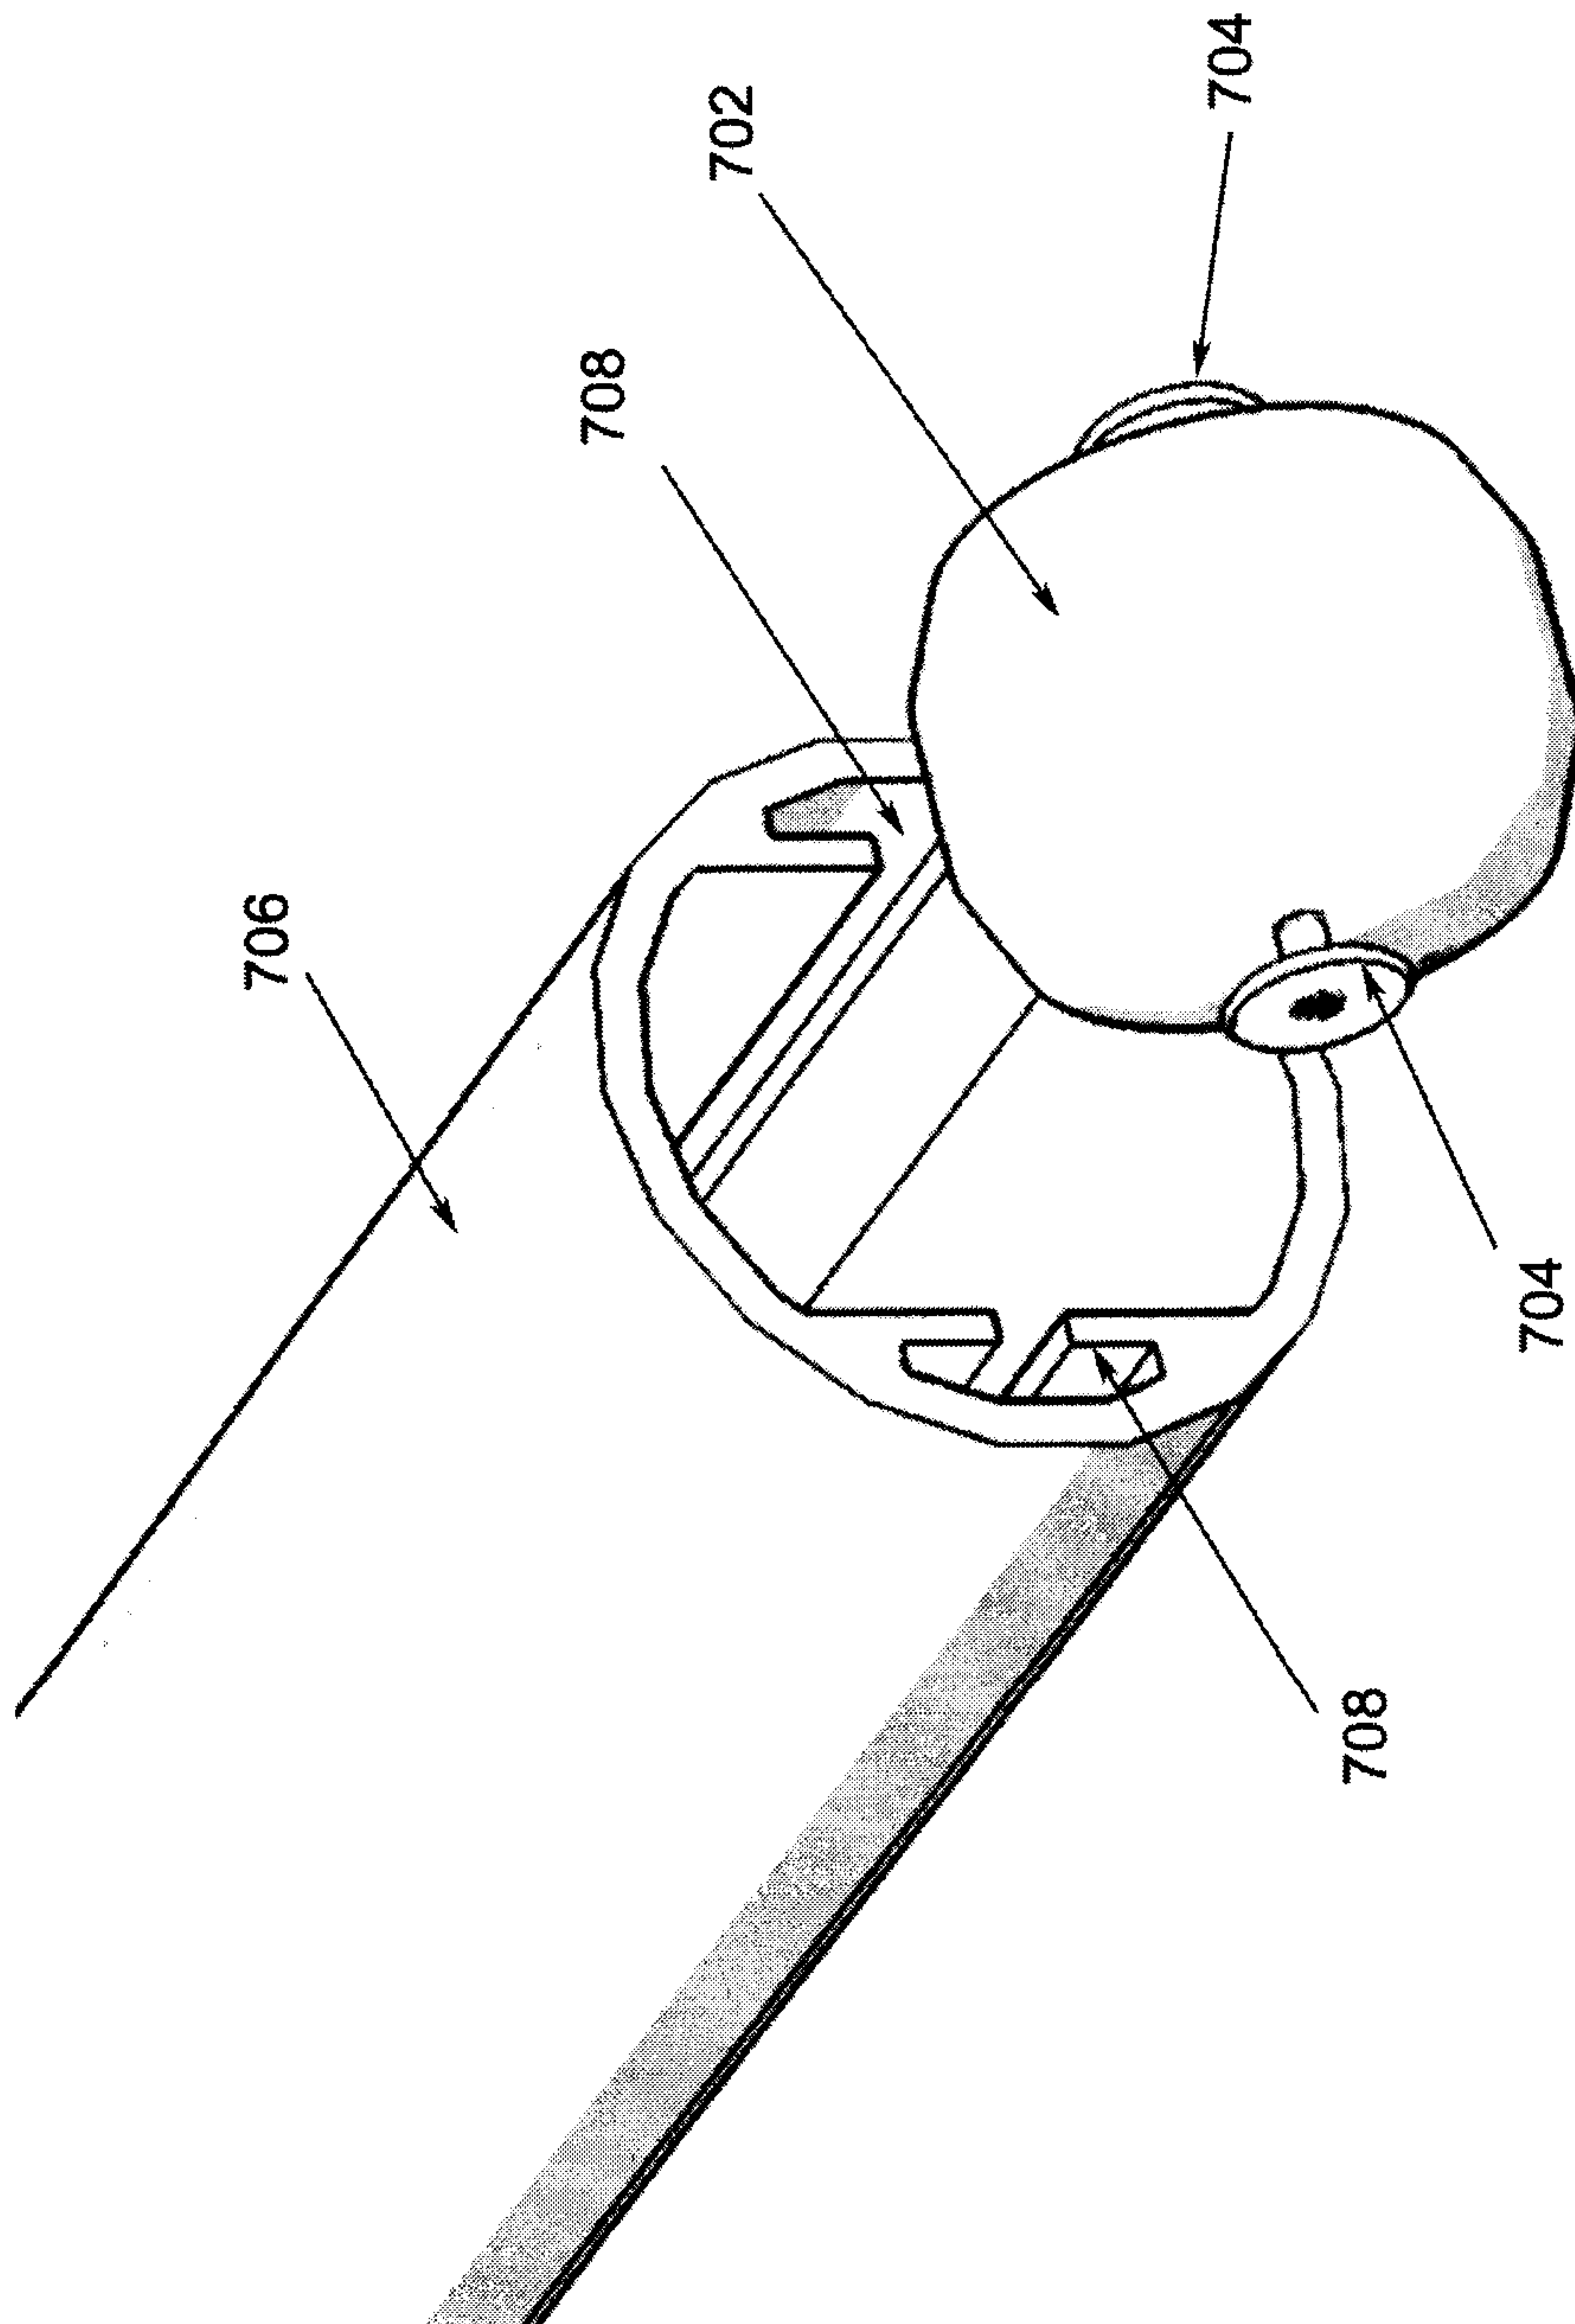


FIGURE 7B

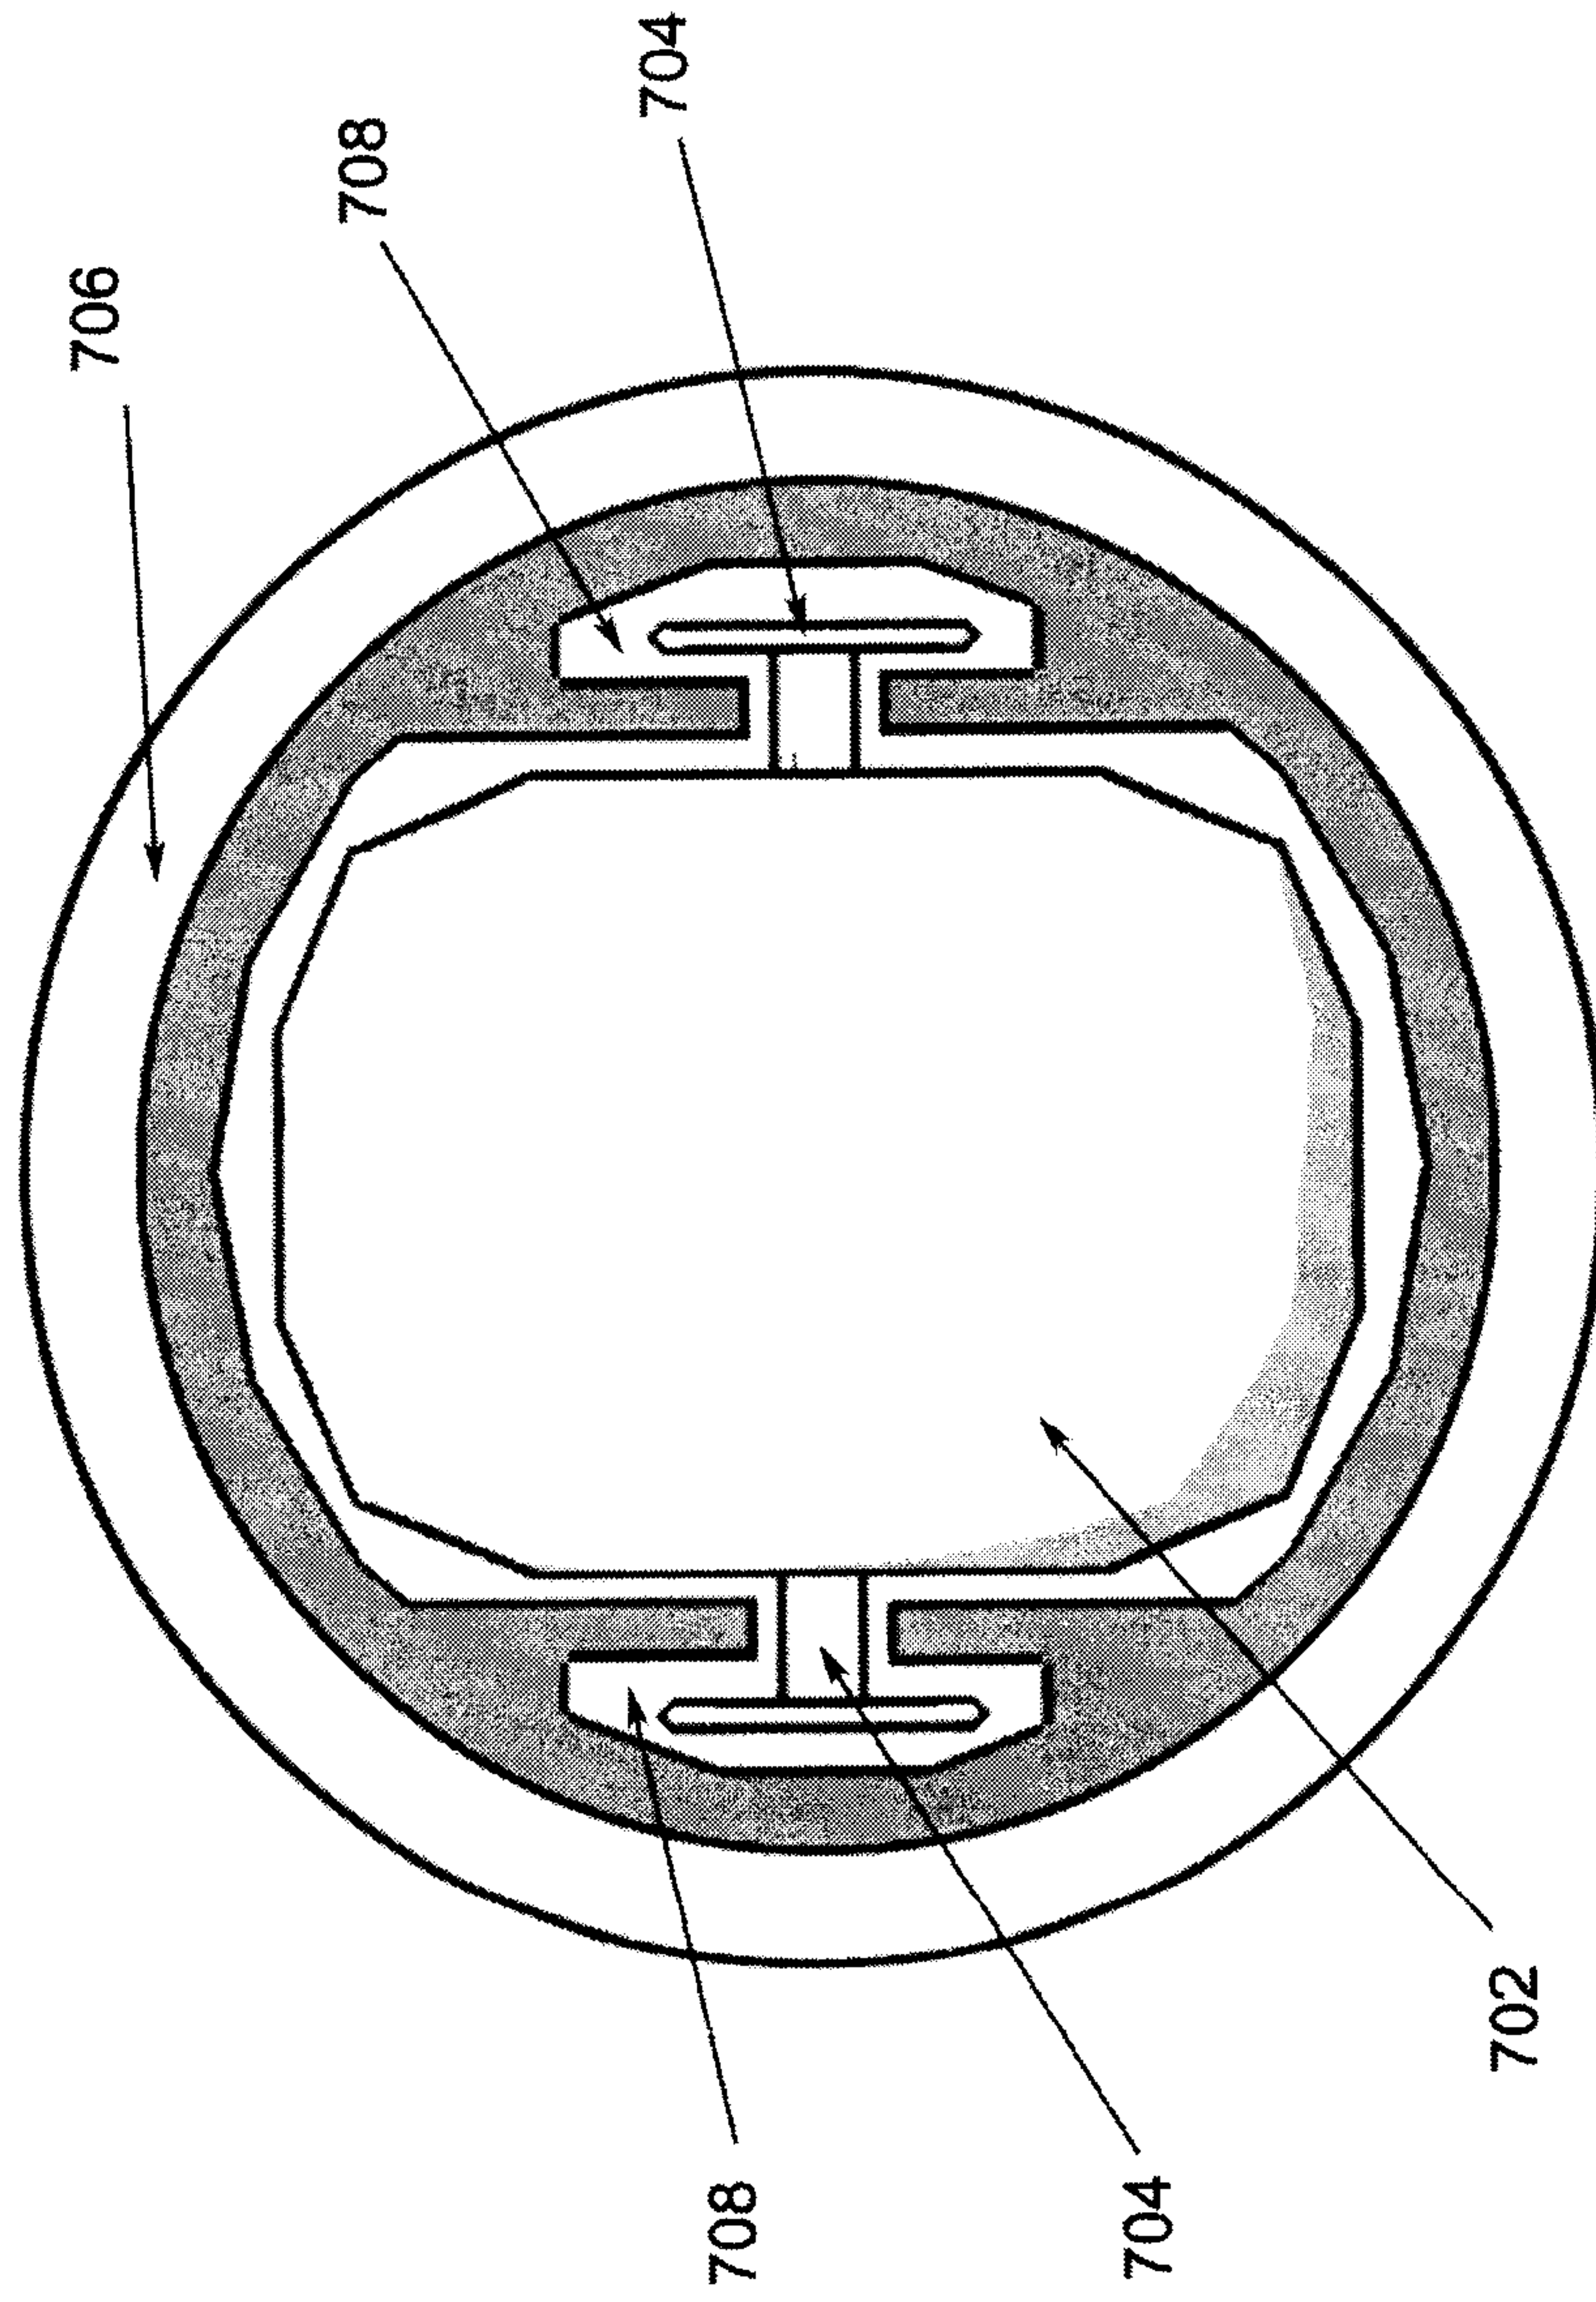


FIGURE 7B

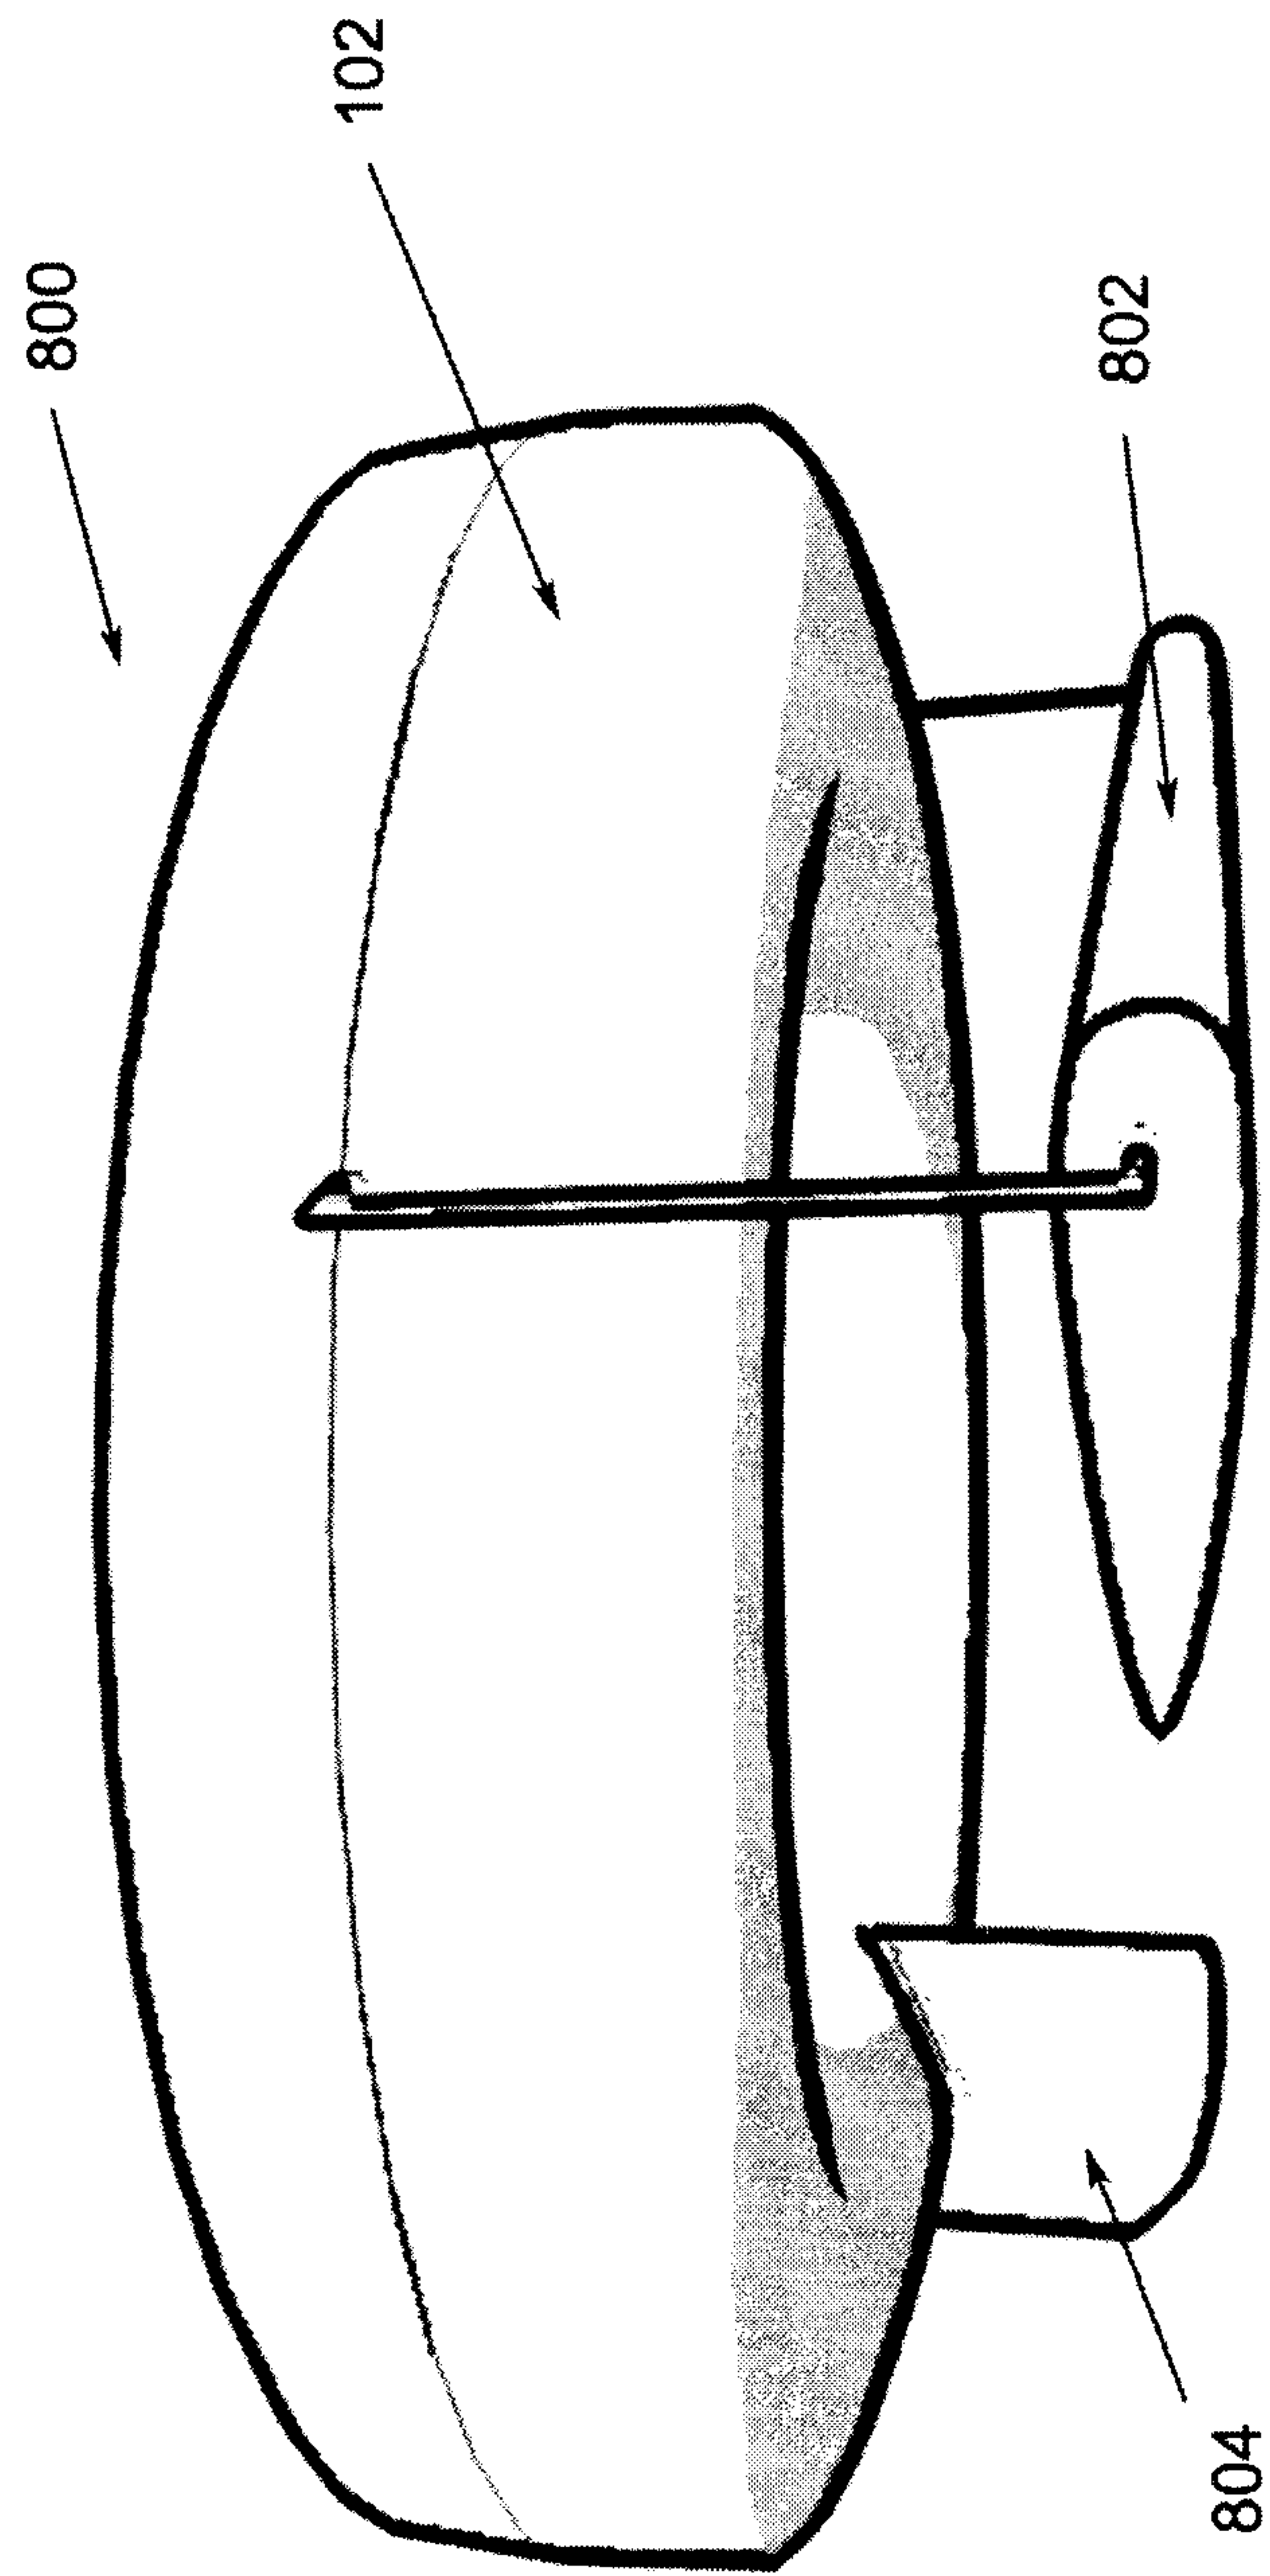


FIGURE 8B

16/16

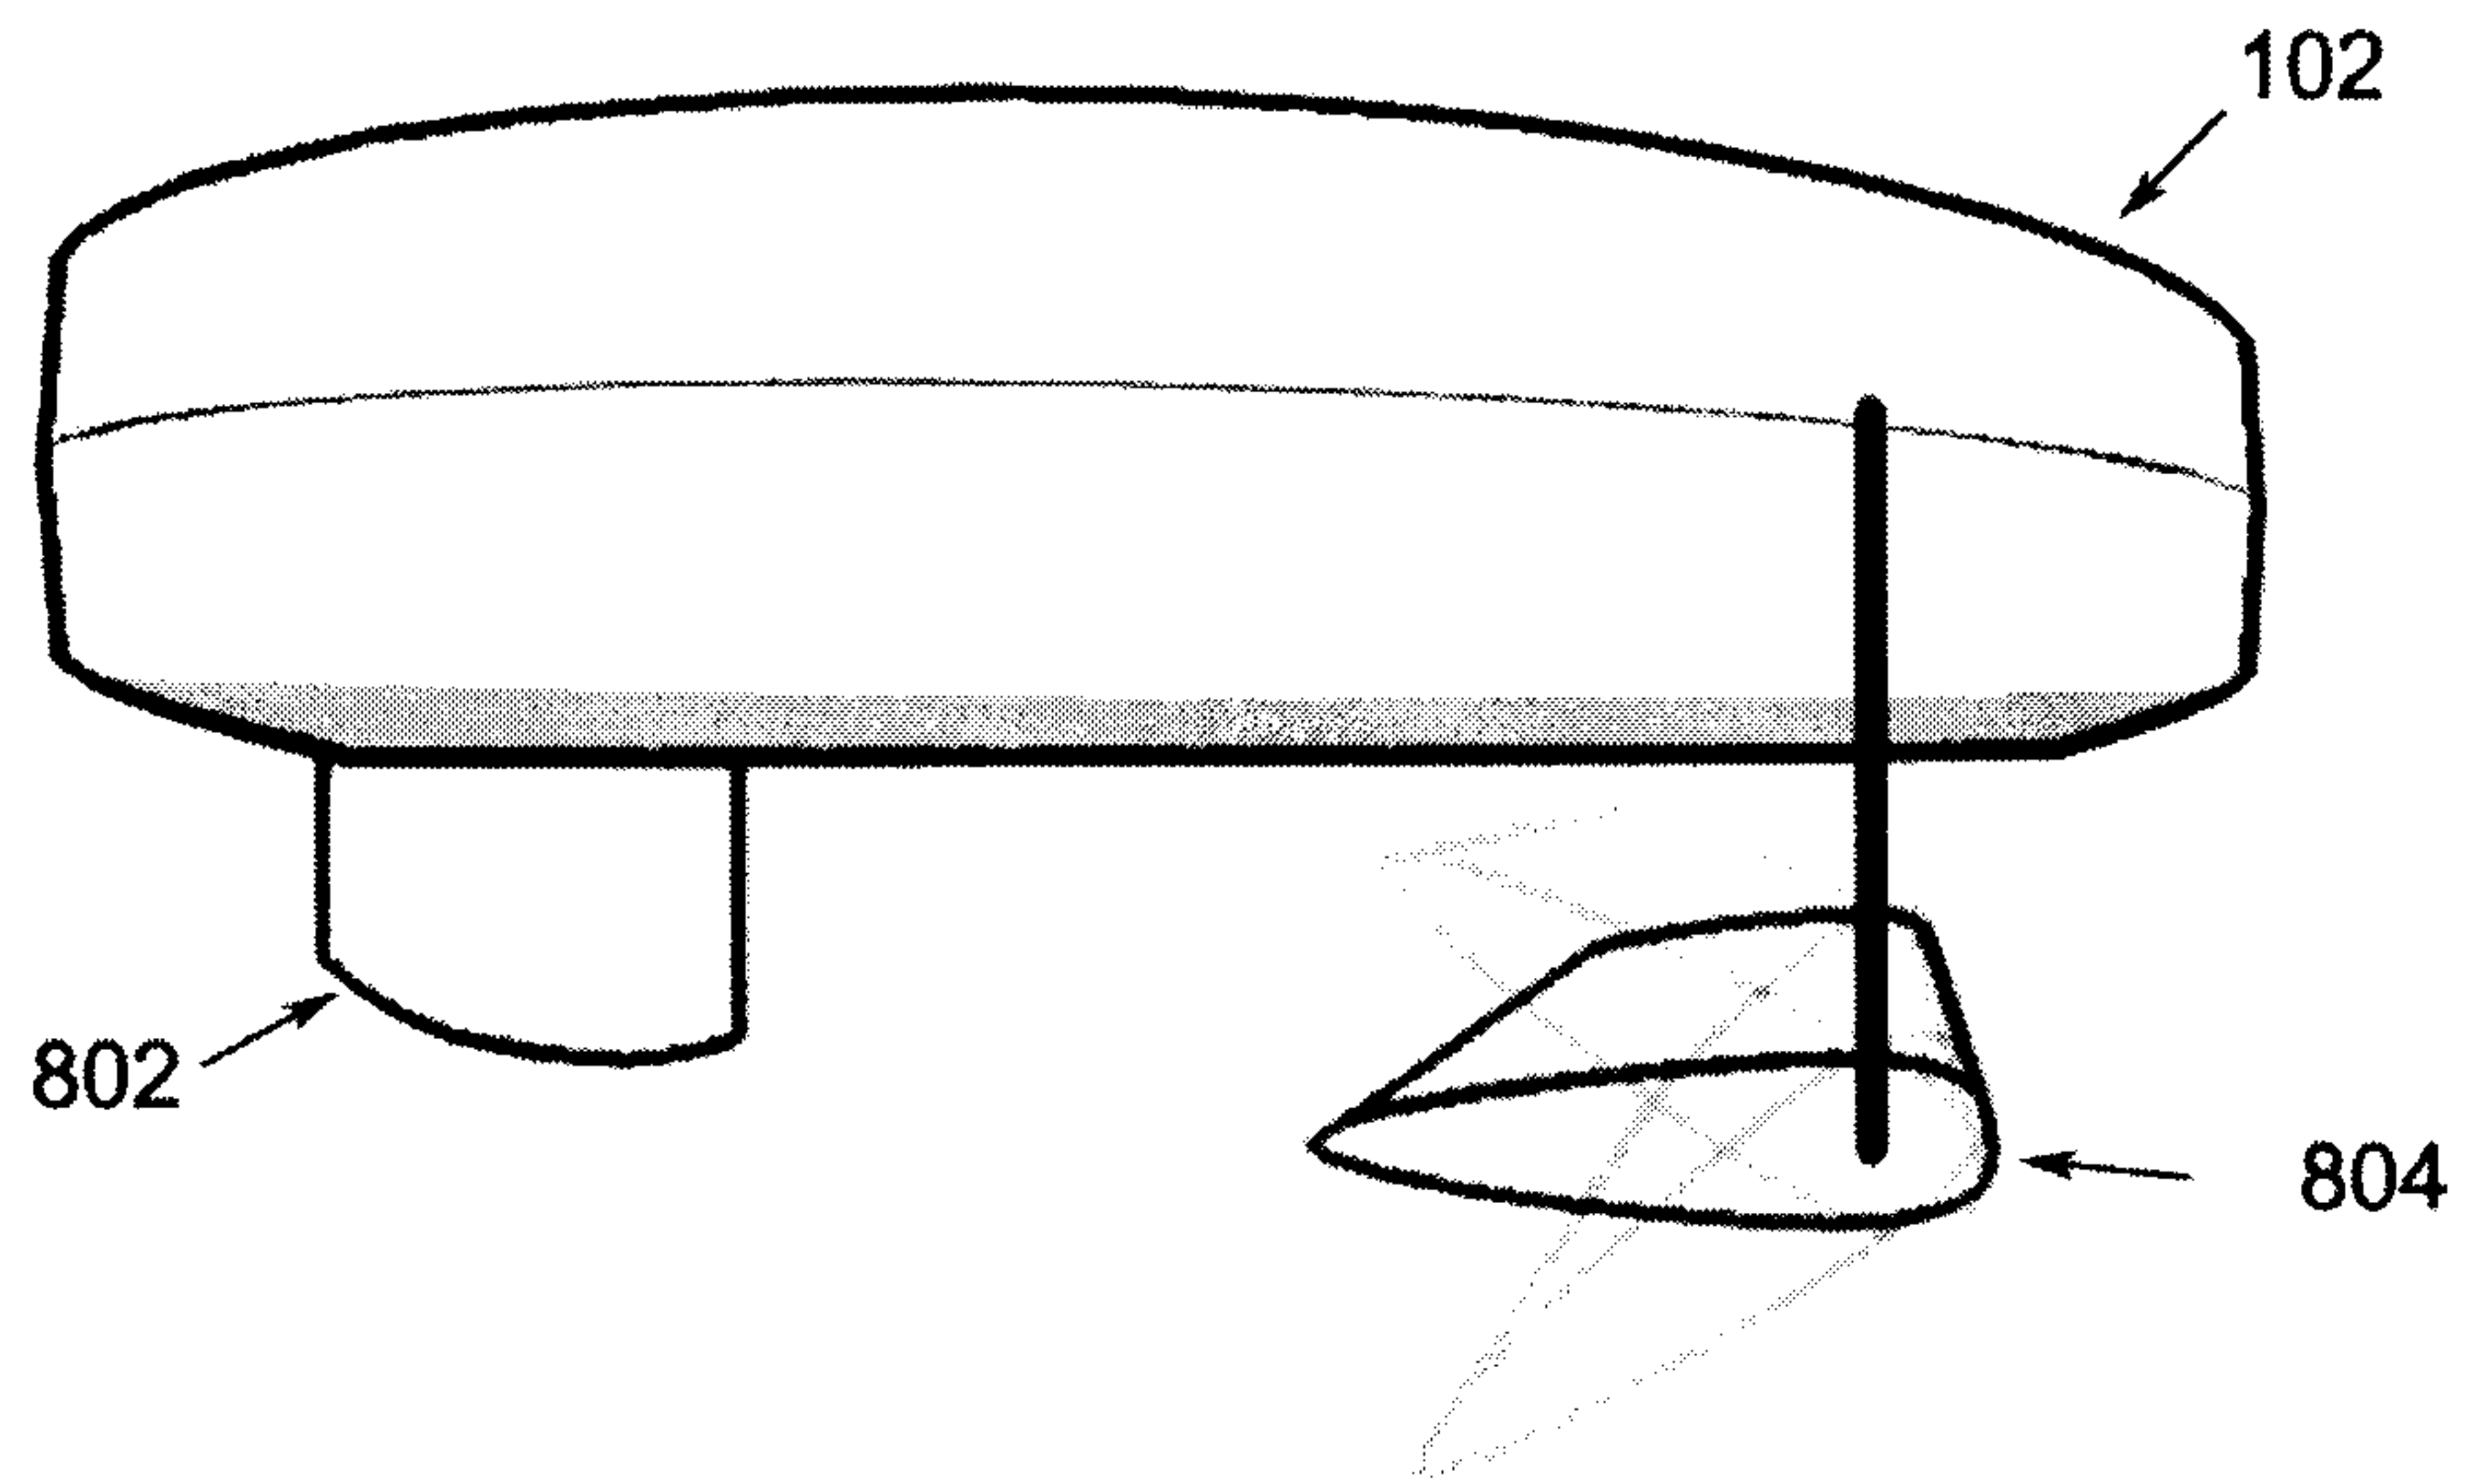


FIGURE 8B

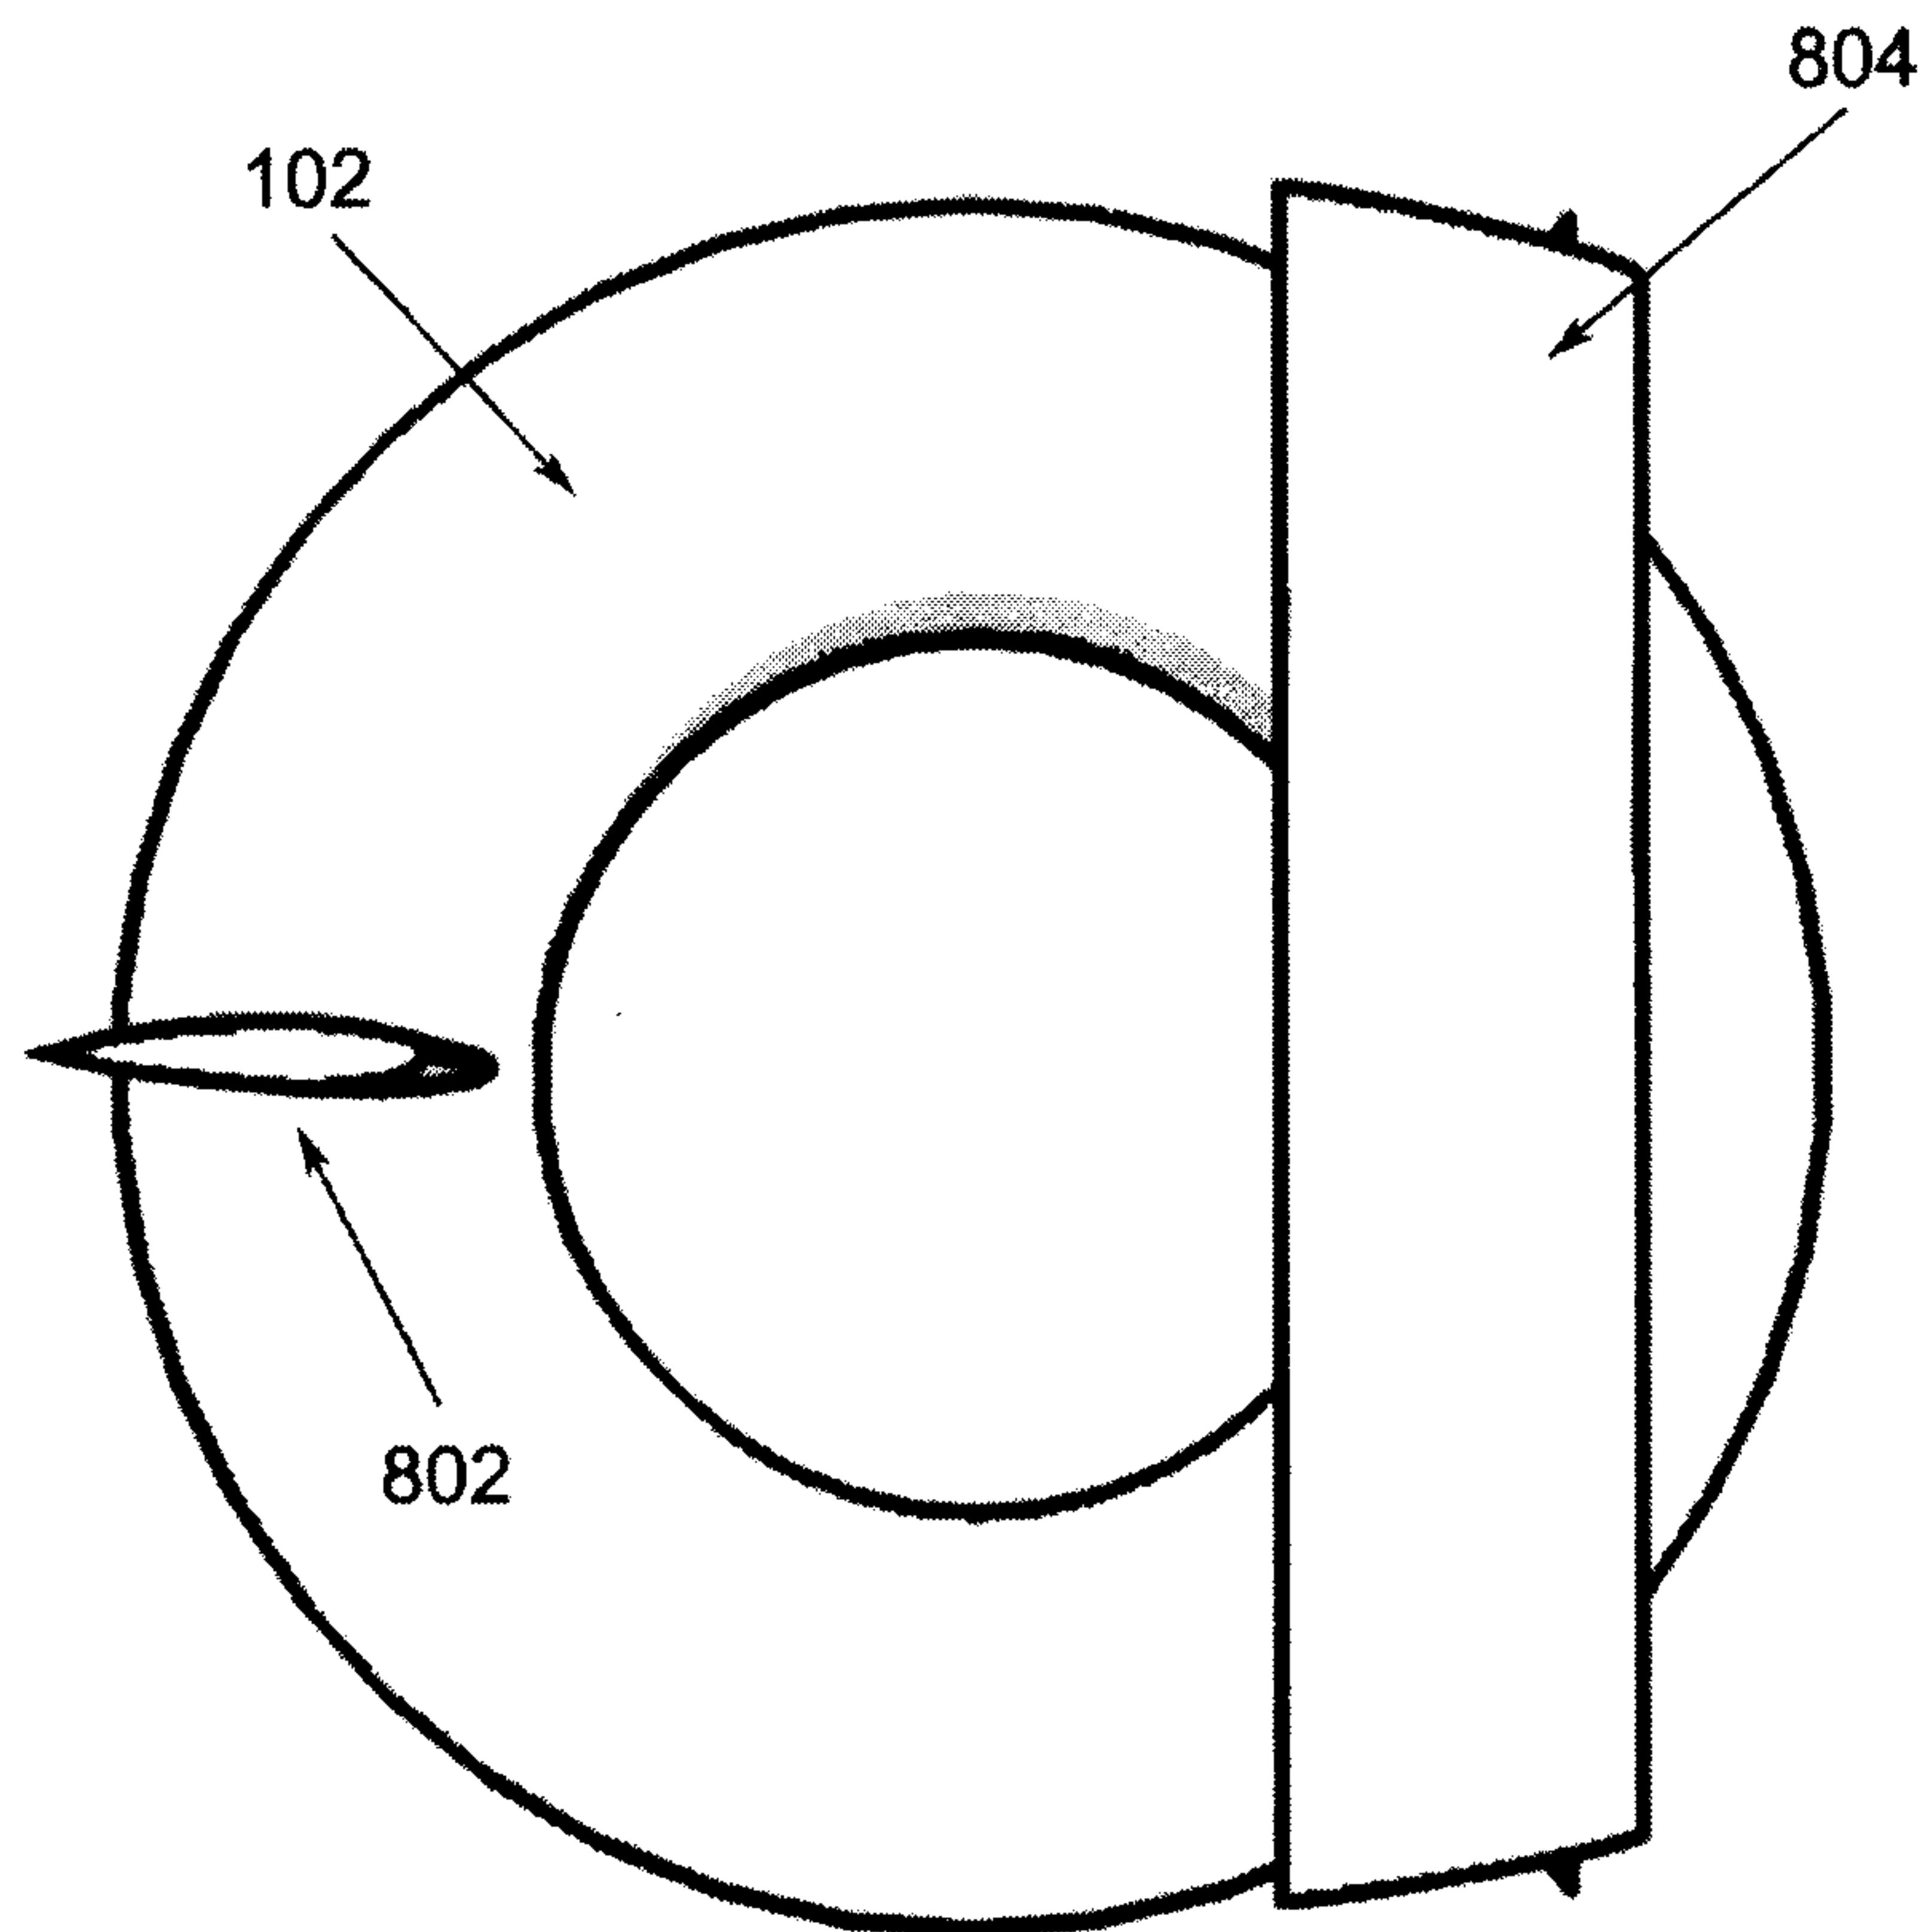


FIGURE 8C

