



Office de la Propriété
Intellectuelle
du Canada

Un organisme
d'Industrie Canada

Canadian
Intellectual Property
Office

An agency of
Industry Canada

CA 2395793 C 2008/10/14

(11)(21) **2 395 793**

(12) **BREVET CANADIEN
CANADIAN PATENT**

(13) **C**

(86) Date de dépôt PCT/PCT Filing Date: 2000/12/25
(87) Date publication PCT/PCT Publication Date: 2001/07/05
(45) Date de délivrance/Issue Date: 2008/10/14
(85) Entrée phase nationale/National Entry: 2002/06/26
(86) N° demande PCT/PCT Application No.: JP 2000/009197
(87) N° publication PCT/PCT Publication No.: 2001/048318
(30) Priorité/Priority: 1999/12/27 (JP11/371800)

(51) Cl.Int./Int.Cl. *D21H 27/00* (2006.01),
A24D 1/02 (2006.01), *D21H 11/12* (2006.01)
(72) Inventeurs/Inventors:
TANAKA, YASUO, JP;
NAGAO, ATSUSHI, JP
(73) Propriétaire/Owner:
JAPAN TOBACCO INC., JP
(74) Agent: ROBIC

(54) Titre : PAPIER CIGARETTE A PROPRIETE DE DIFFUSION DE CENDRES REDUITE
(54) Title: CIGARETTE WRAPPER PAPER WITH SUPPRESSED SCATTERING OF ASH

(57) **Abrégé/Abstract:**

A wrapping paper for a cigarette, characterized in that it is prepared from a pulp containing a fibrous component in an amount of 60 wt % or more, in particular, a flax pulp. The wrapping paper for a cigarette can be used for reducing markedly the scattering property of a cigarette ash without increasing the amount of a filler accelerating burning or a burning aid.



(12)特許協力条約に基づいて公開された国際出願

(19) 世界知的所有権機関
国際事務局(43) 国際公開日
2001 年 7 月 5 日 (05.07.2001)

PCT

(10) 国際公開番号
WO 01/48318 A1

- (51) 国際特許分類: D21H 27/00, 11/12 (74) 代理人: 鈴江武彦, 外(SUZUYE, Takehiko et al.); 〒100-0013 東京都千代田区霞が関3丁目7番2号 鈴榮内外国特許法律事務所内 Tokyo (JP).
- (21) 国際出願番号: PCT/JP00/09197
- (22) 国際出願日: 2000 年 12 月 25 日 (25.12.2000)
- (25) 国際出願の言語: 日本語
- (26) 国際公開の言語: 日本語
- (30) 優先権データ:
特願平 11/371800
1999 年 12 月 27 日 (27.12.1999) JP
- (81) 指定国 (国内): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (84) 指定国 (広域): ARIPO 特許 (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), ユーラシア特許 (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), ヨーロッパ特許 (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI 特許 (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- (71) 出願人 (米国を除く全ての指定国について): 日本たばこ産業株式会社 (JAPAN TOBACCO INC.) [JP/JP]; 〒105-8422 東京都港区虎ノ門二丁目2番1号 Tokyo (JP).
- (72) 発明者; および
- (75) 発明者/出願人 (米国についてのみ): 田中康男 (TANAKA, Yasuo) [JP/JP]. 長尾淳史 (NAGAO, Atsushi) [JP/JP]; 〒227-0052 神奈川県横浜市青葉区梅が丘6番2 日本たばこ産業株式会社内 Kanagawa (JP).
- 添付公開書類:
— 国際調査報告書
- 2 文字コード及び他の略語については、定期発行される各 PCT ガゼットの巻頭に掲載されている「コードと略語のガイダンスノート」を参照。

(54) Title: WRAPPING PAPER FOR CIGARETTE REDUCED IN SCATTERING PROPERTY OF ASH THEREFROM

(54) 発明の名称: 灰の飛散性が低減されたシガレット用巻紙

(57) Abstract: A wrapping paper for a cigarette, characterized in that it is prepared from a pulp containing a fibrous component in an amount of 60 wt % or more, in particular, a flax pulp. The wrapping paper for a cigarette can be used for reducing markedly the scattering property of a cigarette ash without increasing the amount of a filler accelerating burning or a burning aid.

(57) 要約:

繊維質成分を 60 重量%以上含むパルプ、特に亜麻パルプ、から構成されるシガレット用巻紙。このシガレット用巻紙は、燃焼促進性を有する填料や助燃剤の添加量を増加させることなくシガレット灰の飛散性を大幅に低減させ得る。

WO 01/48318 A1

D E S C R I P T I O N

CIGARETTE WRAPPER PAPER WITH
SUPPRESSED SCATTERING OF ASH

5

Technical Field

The present invention relates to a cigarette wrapper paper, and more particularly, to a cigarette wrapper paper that permits suppressing the scattering of the ash formed by the combustion of the cigarette wrapper paper.

Background Art

A cigarette is provided by wrapping a tobacco filler material, such as cut tobacco, by a cigarette wrapper paper. The cigarette wrapper paper is formed of pulps of, for example, wood or flax, and contains a loading material such as calcium carbonate to increase the opaqueness and whiteness of the cigarette wrapper paper and to increase the combustion capability of the cigarette wrapper paper, and a combustion assistant to control the combustion capability of the cigarette wrapper paper. The cigarette wrapper paper thus prepared regulates the combustion characteristics of the cigarette. In addition, the cigarette wrapper paper controls the properties of the ash, particularly the scattering properties of the ash, of the cigarette formed by the combustion.

25

The ash of the cigarette, if separated easily

from the cigarette so as to be scattered, contaminates the surroundings. Some improvements of the cigarette wrapper paper have been proposed for suppressing the scattering of the ash of the cigarette. For example, it is proposed in Jpn. Pat. KOKAI Publication No. 11-36193 that calcium carbonate particles having a specified particle size are added to the cigarette wrapper paper. Also, it is disclosed in U.S. Patent 5,161,551 that calcium carbonate particles having a specified particle size are added in an increased amount to a cigarette wrapper paper.

However, calcium carbonate, though required for the combustion of the cigarette wrapper paper, has a detrimental effect on the taste and flavor of the cigarette if the addition amount thereof is excessively large. In addition, the combustion rate of the cigarette wrapper paper is promoted and the mechanical strength of the cigarette wrapper paper is lowered so as to bring about an inconvenience in the making of the cigarette if calcium carbonate is added in an excessively large amount.

Therefore, an object of the present invention is to provide a cigarette wrapper paper that permits suppressing the scattering of the ash of the cigarette without increasing the amount of loading material promoting the combustion such as calcium carbonate and the amount of the combustion assistant.


Disclosure of the Invention

As a result of extensive research conducted in an attempt to overcome the above-noted problems, the present inventors have found that, if the cigarette wrapper paper is formed of a flax pulp and if the bast fiber content of the flax pulp is increased, it is possible to suppress significantly the scattering of the ash of the cigarette without increasing the amount of loading material having combustion promoting property, such as calcium carbonate, and without increasing the amount of the combustion assistant. The present invention is based on these findings.

Accordingly, the present invention provides a cigarette wrapper paper capable of suppressing cigarette ash scattering, the cigarette wrapper paper being formed of a flax pulp containing at least 70% by weight of bast fiber components.

A cigarette wrapper paper according to the present invention may have a basis weight of 20 to 70 g/m²

Further, a cigarette wrapper paper according to the present invention may further contain a loading material which exhibits combustion promotion, or a combustion assistant.

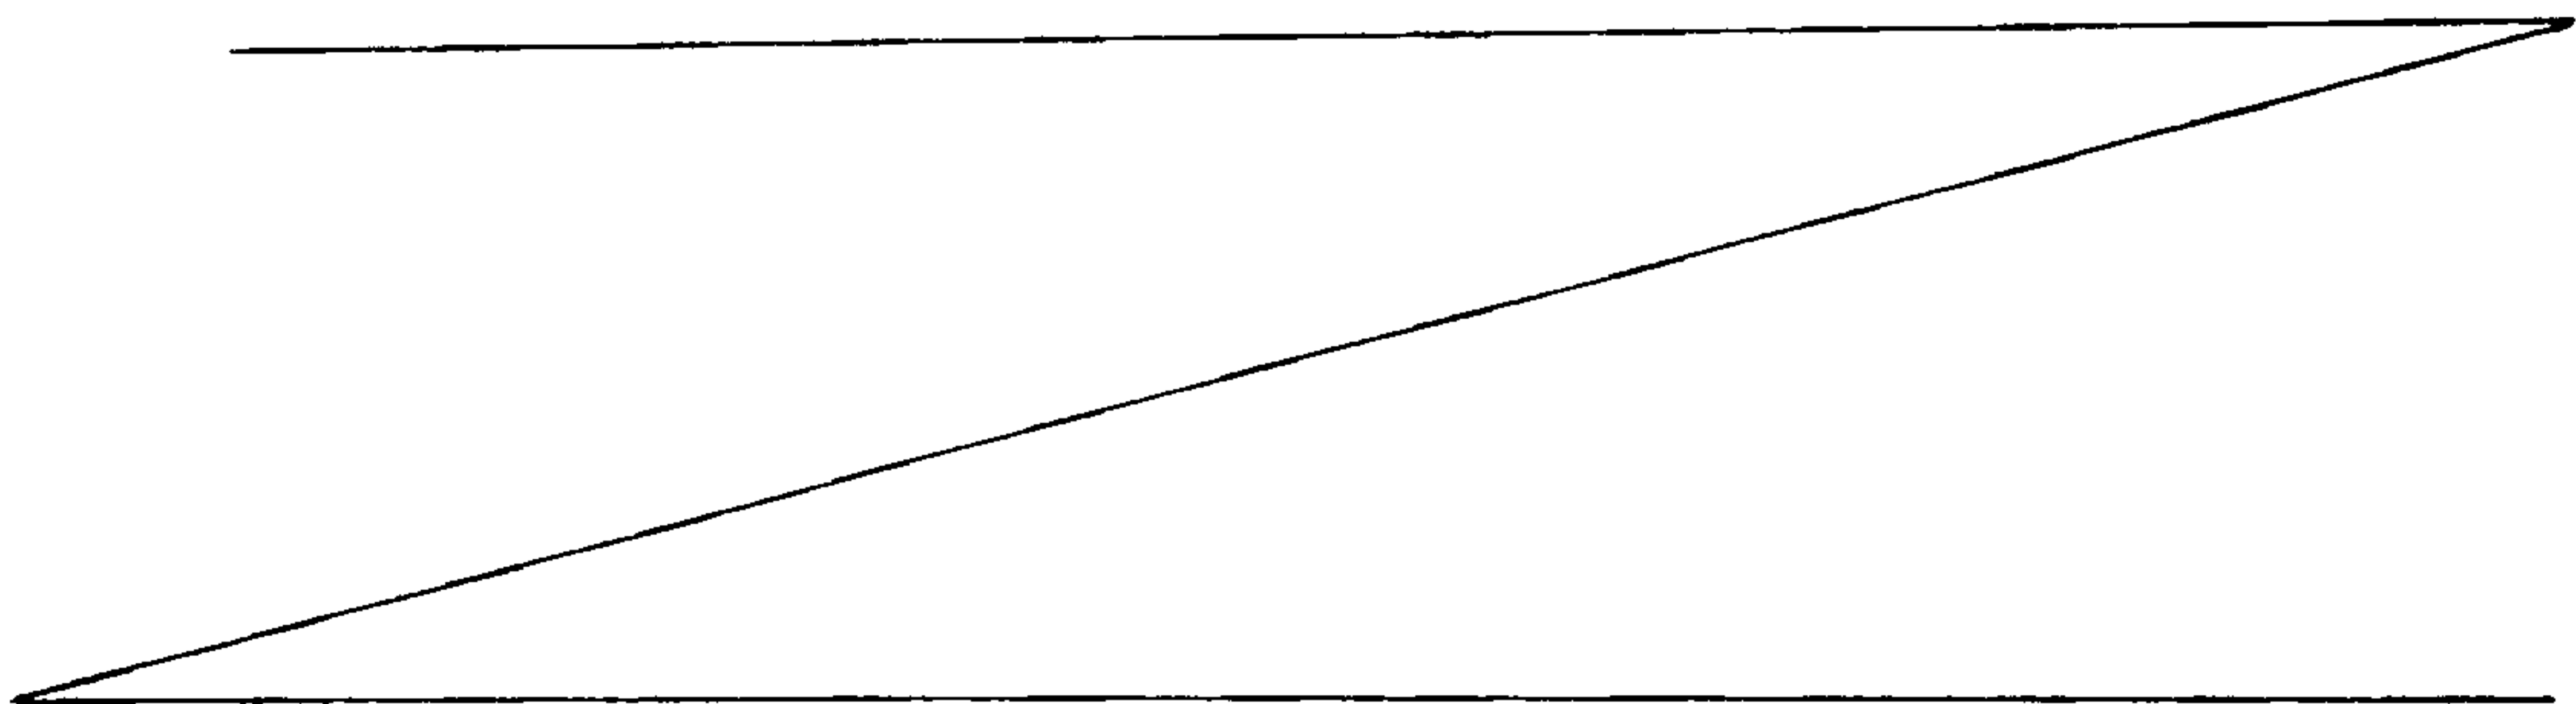

Best Mode of Carrying Out of the Invention

The present invention will now be described in more detail below.

The present inventors have looked into the
5 scattering mechanism of the ash formed by the
combustion of cigarette wrapper paper. It has been
found that cigarette wrapper paper is shrunk by the
combustion heat, and the shrinkage acts on the contact
resistance point between the ash of the cigarette
10 wrapper paper and the ash of the cut tobacco leaves so
as to bring about cracking in the ash, with the result
that fine broken pieces drop down as ash. It follows
that the scattering of the ash of the cigarette wrapper
paper can be suppressed by decreasing the shrinkage of
15 the cigarette wrapper paper caused by the combustion
heat and by decreasing the number of cracks generated
in the ash formed by the combustion of the cigarette
wrapper paper.

The pulp forming the cigarette wrapper paper of
20 the present invention is not particularly limited, and
the pulp generally used for preparing cigarette wrapper
paper, including, for example, a flax pulp, a wood pulp
such as N-BKP or L-BKP, a herbaceous bast fiber pulp
such as hemp, jute or kenaf, a leaf fiber pulp such as
25 Manila hemp or sisal hemp, a true grass pulp such as
straw or esparto, and a seed fluff fiber pulp such as
cotton or linters, can be used. A flax pulp is

particularly preferred.

The pulp forming the cigarette wrapper paper of the present invention contains at least 60% by weight of fibrous components and the balance of a ligneous component. The fibrous component in the wood pulp corresponds to the wood portion and the fibrous component in the non-wood pulp corresponds to the bast fiber. The flax pulp used preferably in the present invention is manufactured through the processes of reaping, removal of seeds and small branches, refining, drying, pulverization of the stalk, beating, and cutting into linear state. Particularly, it is possible to control the ratio of the bast fiber component by the pulverizing process of the stalk.

In the present invention, it is possible to suppress markedly the scattering of the cigarette ash (particularly the ash generated from the cigarette wrapper paper itself), without increasing the amount of the loading material for promoting the combustion such as calcium carbonate and the amount of the combustion assistant, by setting the fibrous component of the pulp constituting the cigarette wrapper paper at 60% by weight or more, particularly, by setting the bast fiber component in the flax pulp at 60% by weight or more. For example, where the addition amount of calcium carbonate is set constant, it is possible to decrease the scattering rate of the cigarette ash by about 30%

or more by simply increasing the bast fiber component of the flax pulp from 45% by weight to 80% by weight. Where the rate of decrease of this level is to be achieved, it is necessary to increase the amount of the loading material for promoting combustion to a level two times or more (e.g., in the case of calcium carbonate, to increase the amount from the ordinary level of 4.5 g/m² to 9 g/m², or to increase the addition amount of the combustion assistant (e.g., a citrate salt) to a level 10 times or more (e.g., to increase from the ordinary level of not higher than 1% to 10%). It is desirable for the amount of the fibrous component in the pulp, particularly, the amount of the bast fiber component in the flax pulp, to be at least 70% by weight, more desirably at least 75% by weight, and most desirably at least 80% by weight.

The cigarette wrapper paper of the present invention may be added with coated with a loading material promoting combustion such as calcium carbonate and a combustion assistant. Any combustion assistant used in ordinary cigarette wrapper paper such as an alkali metal salt may be used. Sodium citrate, potassium citrate or a mixture thereof is particularly preferred. As calcium powder, use may be made of a calcium carbonate powder having an average particle diameter of about 0.2 to 0.5 μ m. Calcium carbonate is added typically in an amount of 10 to 35% by weight,

though the effect of suppressing the ash scattering can be promoted with increase in the mixing amount of calcium carbonate. On the other hand, the combustion assistant, when added, is added to the cigarette wrapper paper typically in an amount of 0.7 to 1.3% by weight, though the effect of suppressing the ash scattering can be promoted with increase in the mixing amount of the combustion assistant. At any rate, the scattering of the cigarette ash can be significantly suppressed by setting the amount of the fibrous component in the pulp at 60% by weight or more according to the present invention, making it possible to decrease the mixing amounts of the loading material promoting the combustion and the combustion assistant in accordance with the desired degree of decrease in the scattering amount of the cigarette ash or to increase the mixing amounts of the loading material promoting the combustion and the combustion assistant for further decreasing the scattering amount of the cigarette ash.

Usually, the cigarette wrapper paper of the present invention has a basis weight of 20 g/m² to 70 g/m².

In the present invention, the shrinkage of the cigarette wrapper paper in the combustion stage can be measured in accordance with the method disclosed in the thesis "BURNING PROCESS OF CELLULOSIC FIBERS COMPOSING

FILTER PAPER DURING FLAME SPREAD" by Shotaro Suzuki
et al. in the academic magazine "Fire Science and
Technology, pp 499-504 (1992)". Specifically, the
cylindrical cigarette wrapper paper obtained by taking
5 out the cut tobacco leaves from a cigarette is disposed
vertically, and fire is set to the upper edge of the
cylindrical cigarette wrapper paper so as to burn the
cylindrical cigarette wrapper paper under static burn
conditions. Under these conditions, the progression
10 speed of the combustion line (the char line or the
leading edge in which the paper is turned black) and
the moving speed of the point moving in accordance with
the shrinkage of the cigarette wrapper paper (the
moving speed of a point in the formed ash region) are
15 measured under observation at a magnification of about
100, followed by dividing the former value by the
latter value, so as to obtain the shrinkage of the
cigarette wrapper paper in the combustion stage.
It should be noted that the progression speed of the
20 combustion line corresponds to the progression amount
of combustion per unit time, and the moving speed of
the point moving in accordance with the shrinkage
corresponds to the moving amount accompanying the
shrinkage of the cigarette wrapper paper per unit time.
25 It follows that, since the progression speed of the
combustion line and the moving speed of the moving
point are common to each other in the lapse of time,

it is possible to obtain the shrinkage moving amount per unit amount in the progress of combustion, i.e., the combustion shrinkage of the cigarette wrapper paper, by dividing the former by the latter.

5 Also, in the present invention, the number of cracks in the ash is measured as follows. Specifically, a cigarette is disposed vertically such that the tip of the cigarette (fire catching edge) constitutes the uppermost edge, and fire is set to the
10 tip of the cigarette so as to burn the cigarette under static burn conditions. Under this state, the number of cracks generated in the ash formed in the central portion, which has a width of 5 mm, of the cigarette in the longitudinal direction ranging between a point
15 10 mm away from the tip of the cigarette and a point 40 mm away from the tip of the cigarette (i.e., the central portion having a length of 30 mm and a width of 5 mm) is visually counted by observation under magnification of about 35. In counting the number
20 of cracks, the size of the crack is not taken into account. However, the crack formed to extend over two stages or cracks extending from a single original crack are counted as two cracks.

 Further, in the present invention, the scattering
25 rate of the cigarette ash can be measured as follows. Specifically, a cigarette sample is mounted on a vibrating module, and the vibrating module is driven

by a control unit such that the vibrating module is vibrated by continuous driving at a frequency of 160 Hz and an acceleration of 14 G so as to simulate the situation that a cigarette held by the smoker's hand is being moved, while the cigarette sample is subjected to the static burn from the tip to a point 10 mm away from the tip. The amount of the scattered ash is measured so as to calculate as the scattering rate the scattered amount of the ash relative to the total weight of the ash that is formed when the cigarette sample is subjected to the combustion to a point 10 mm away from the tip. The ash scattering rate is measured similarly for 5 cigarette samples having the same specification. The reduction rate of the scattering of the cigarette ash is obtained by the formula " $[(A - B)/A] \times 100$ (%)", where "A" denotes the ash scattering rate of a reference cigarette, e.g., an ordinary cigarette, and "B" denotes the ash scattering rate of the target cigarette. Incidentally, the ash formed when the cigarette is subjected to the combustion to a point 10 mm away from the tip of the cigarette is the ash of mainly the cigarette wrapper paper.

Examples of the present invention will now be described. However, the present invention should not be limited by these Examples.

Example 1

A cigarette wrapper paper was manufactured by

using the flax pulp having the specification shown in Table 1. Cigarettes each having a filter attached thereto were wrapped by the cigarette wrapper paper. Each cigarette had a circumference of 25 mm and an
5 entire length of 84 mm. Also, 0.70g of cut tobacco leaves was loaded in each cigarette. In order to measure the combustion shrinkage of the cigarette wrapper paper by the method described above, the cut tobacco leaves were taken out of the cigarette.
10 Each cigarette was used as it was in order to count the number of cracks generated in the ash formed by the combustion of the cigarette by the method described above. Table 1 also shows the results.

Table 1

| Sample No. | Specification of flax pulp cigarette wrapper paper | | | | Results of measurement | |
|------------|--|----------------------------------|--|--|------------------------|------------------|
| | Bast fiber component (% by weight) | Basis weight (g/m ²) | Amount of calcium carbonate* (% by weight) | Amount of sodium citrate (% by weight) | Combustion Shrinkage | Number of cracks |
| 1 | 61.7 | 23 | 31.6 | 1.1 | 20.9 | 93.6 |
| 2 | | | | 2.1 | 19.7 | 107.2 |
| 3 | | | | 4.7 | 16.2 | 59.0 |
| 4 | 81.2 | 23 | 33.8 | 1.2 | 18.8 | 79.7 |
| 5 | | | | 2.0 | 17.9 | 79.6 |
| 6 | | | | 4.8 | 13.2 | 50.6 |
| 7 | 81.9 | 23 | 41.5 | 1.0 | 15.2 | 63.6 |
| 8 | | | | 2.2 | 13.2 | 68.4 |
| 9 | | | | 4.9 | 10.8 | 57.1 |

* Trade name: PCX-850 available form Shiroishi Kogyo K.K.

Table 1 clearly shows that the combustion shrinkage of the cigarette wrapper paper and the number of cracks can be decreased by increasing the bast fiber content of the flax pulp. This clearly indicates that the scattering of the cigarette ash can be suppressed by increasing the bast fiber content of the flax pulp.

Example 2

A cigarette wrapper paper was manufactured by using flax pulp having the specification shown in Table 2. Cigarettes each having a filter attached thereto were wrapped by the cigarette wrapper paper. Each cigarette had a circumference of 25 mm and an entire length of 84 mm. Also, 0.70g of cut tobacco leaves was loaded in each cigarette. Incidentally, the cigarette for the Comparative Example corresponds to the ordinary cigarette.

The cigarette ash scattering rate, etc., were measured by, for example, the method of measuring the scattering of the cigarette ash described above in respect of each of the cigarettes prepared. Table 2 also shows the results.

Table 2

| Sample | Specification of flax pulp cigarette wrapper paper | | | Ash scattering characteristics | | |
|-----------|--|----------------------------------|---|---|----------------------------|-----------------|
| | Bast fiber component (% by weight) | Basis Weight (g/m ²) | Amount of CaCO ₃ * (% by weight) | Total ash amount during 10 mm combustion (mg) | Ash scattering amount (mg) | Scattering Rate |
| Example 2 | 80 | 63 | 10 | 1.70 | 0.92 | 54% |
| Comp. Ex. | 45 | 62 | 10 | 1.67 | 1.31 | 78% |

* Trade name: Multiflex available from Specialty Minerals Inc., U.S.A.

As apparent from Table 2, the cigarette wrapper paper of the present invention permits markedly decreasing the ash scattering rate. The rate of reduction in the ash scattering achieved by the cigarette wrapper paper of the present invention is calculated to be about 30% relative to the cigarette wrapper paper for the Comparative Example.

As described above, the cigarette wrapper paper of the present invention permits markedly lowering the scattering of the cigarette ash without increasing the addition amount of the loading material for promoting the combustion or the addition amount of the combustion assistant.

WHAT IS CLAIMED IS:

1. A cigarette wrapper paper capable of suppressing cigarette ash scattering, said cigarette wrapper paper being formed of a flax pulp containing at least 70% by weight of bast fiber components.
2. The cigarette wrapper paper according to claim 1, wherein said cigarette wrapper paper has a basis weight falling within a range of 20 to 70 g/m.^{sup.2}.
3. The cigarette wrapper paper according to claim 1, further comprising a loading material for promoting combustion or a combustion assistant.
4. The cigarette wrapper paper according to claim 1 or 2, wherein said pulp
10 contains at least 80% by weight of bast fiber component.
5. The cigarette wrapper paper according to claim 1, wherein said pulp contains at least 75% by weight of bast fiber component.
6. The cigarette wrapper paper according to claim 4, further comprising a loading material for promoting combustion or a combustion assistant.