



US 20040237984A1

(19) **United States**

(12) **Patent Application Publication**
Figlar et al.

(10) **Pub. No.: US 2004/0237984 A1**

(43) **Pub. Date: Dec. 2, 2004**

(54) **CIGARETTE FILTER**

388, filed on Aug. 1, 2001. Provisional application No. 60/309,435, filed on Aug. 1, 2001.

(76) Inventors: **James N Figlar**, Macon, GA (US);
Brian E Tucker, Macon, GA (US); **F Kelley St Charles**, Perry, GA (US)

Publication Classification

(51) **Int. Cl.⁷** **A24D 3/04**
(52) **U.S. Cl.** **131/344; 131/342; 131/341**

Correspondence Address:
John F Salazar
Middleton Reutlinger
2500 Brown & Williamson Tower
Louisville, KY 40202 (US)


(57) **ABSTRACT**





(21) Appl. No.: **10/485,479**
(22) PCT Filed: **Jul. 30, 2002**
(86) PCT No.: **PCT/US02/24240**

Related U.S. Application Data

(63) Continuation of application No. 10/011,841, filed on Oct. 30, 2001, now abandoned.
(60) Provisional application No. 60/309,388, filed on Aug. 1, 2001. Provisional application No. 60/309,435, filed on Aug. 1, 2001. Provisional application No. 60/309,

A cigarette filter that includes a multiple section filter which reduces the level of predetermined smoke constituents. The filter (130) consists of a fibrous filter plug (132) located at the mouth-end of the cigarette, a section (136) containing a selective adsorbent material, and a section (134) containing a general adsorbent material. The selective adsorbent material, such as a phenol-formaldehyde resin matrix surface-functionalized with mainly primary and secondary amine functional groups, removes specific smoke constituents from the tobacco smoke. The general adsorbent material, such as activated charcoal, is preferably capable of adsorbing a range of chemical compounds without a high degree of specificity. Structurally, the fibrous filter plug, the selective adsorbent section, and the general adsorbent section are co-axially aligned in tandem.

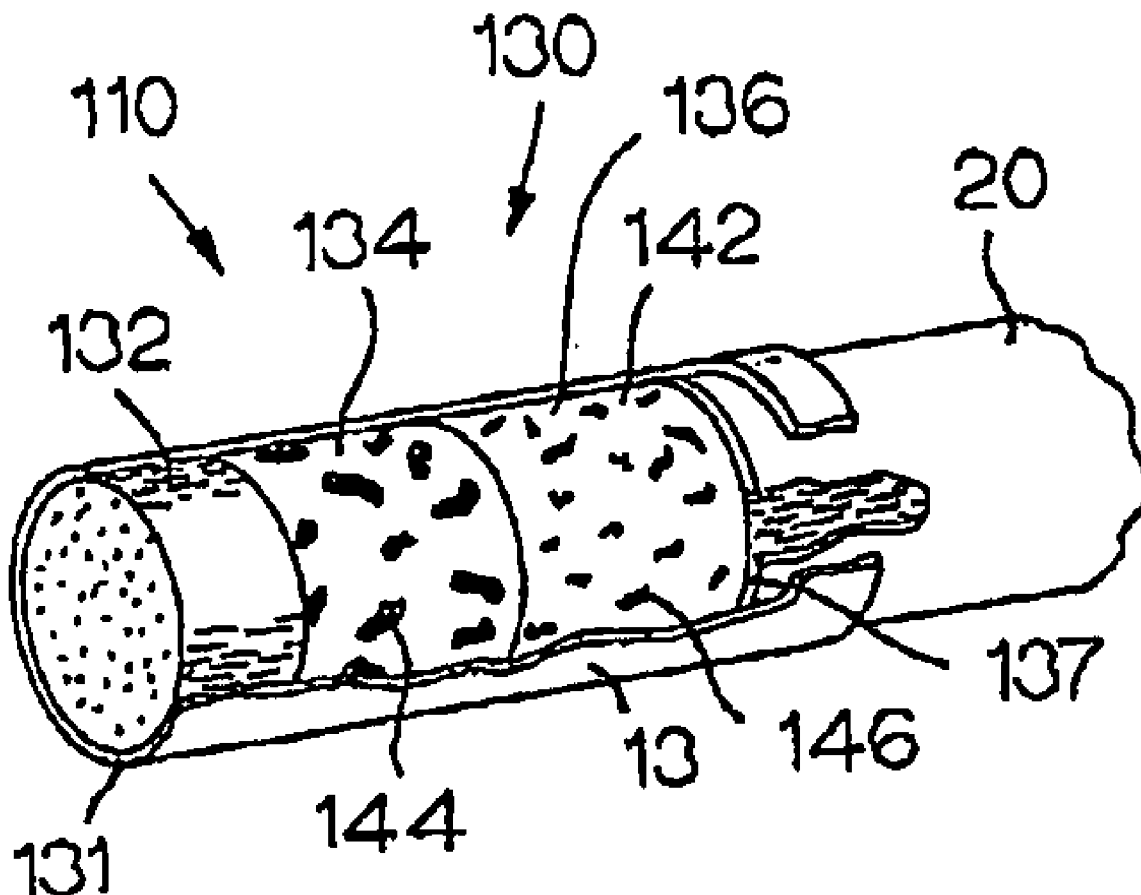

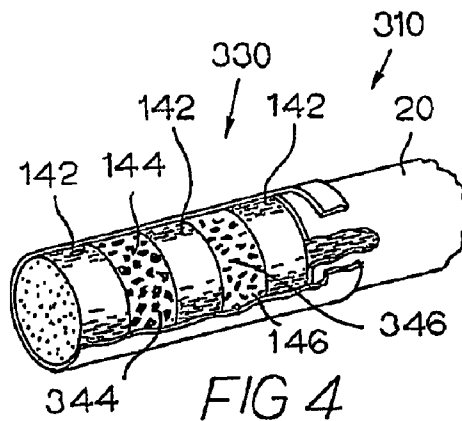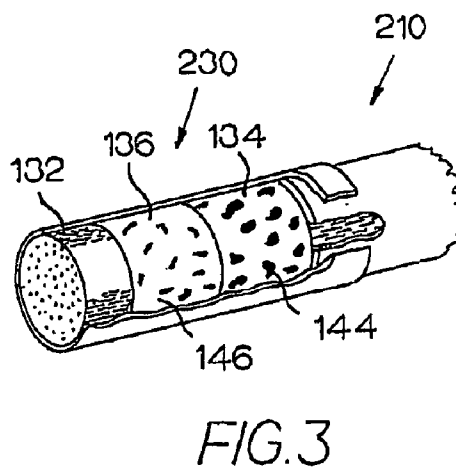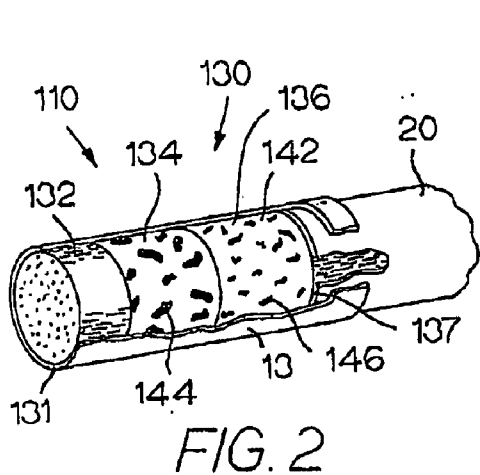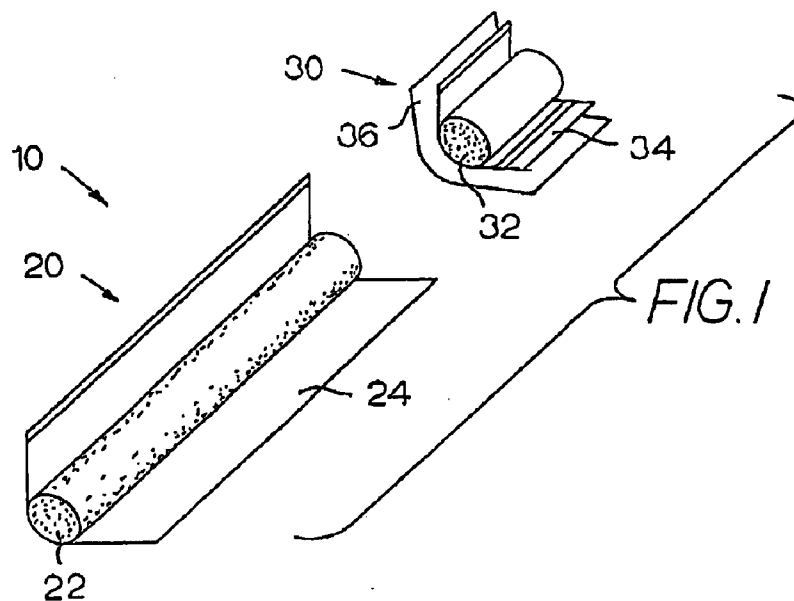

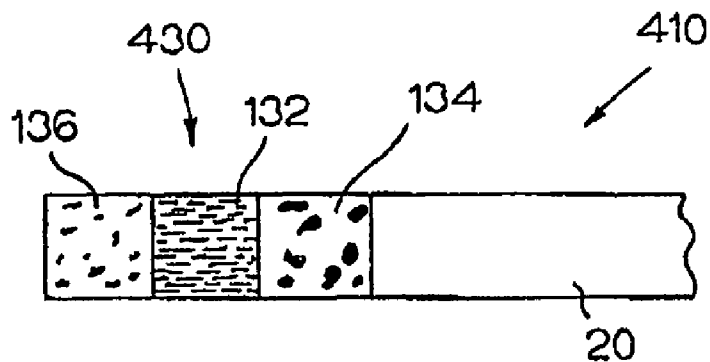


FIG. 5

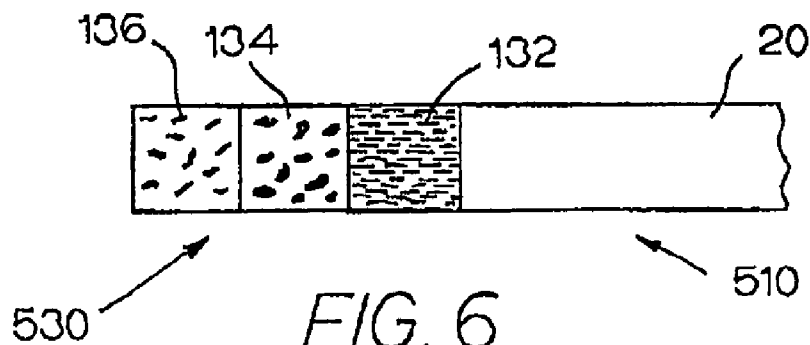


FIG. 6

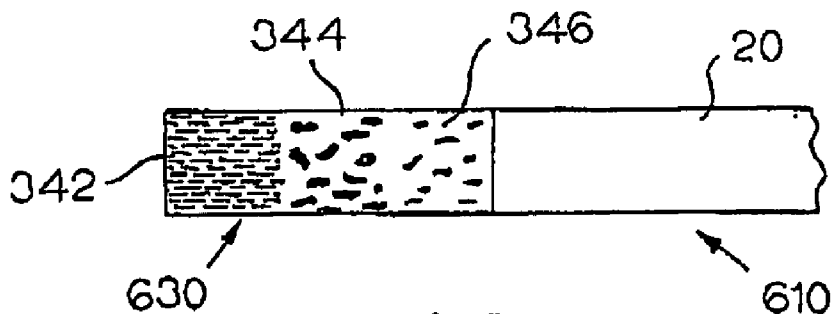


FIG. 7

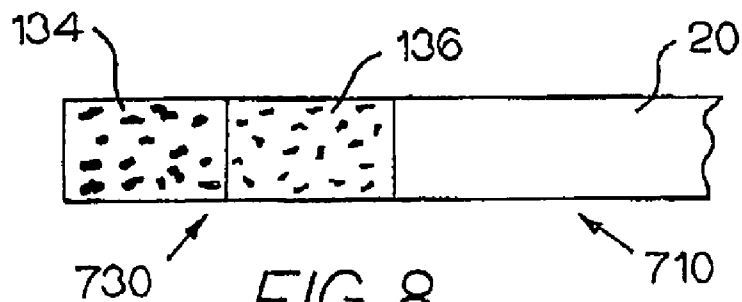


FIG. 8

CIGARETTE FILTER

CROSS-REFERENCE TO RELATED PATENT APPLICATIONS

[0001] This application claims priority from U.S. Provisional Application Ser. No. 60/309,38S, filed Aug. 1, 2001, which application is incorporated herein by reference in its entirety, from U.S. Provisional Application Ser. No. 60/309,435, filed Aug.1, 2001, which application is incorporated herein by reference in its entirety and U.S. patent application Ser. No. 10/011,841, filed Oct.30, 2001.

BACKGROUND OF THE INVENTION

[0002] The present invention relates to a cigarette filter that includes a smoke constituent adsorbent which, when combined with a carbon-based filtering material, demonstrates synergistic reductions in smoke vapor constituents.

[0003] Cigarettes include tobacco rods or columns which, when burned, produce a particulate and a vapor phase. About 70 years ago, filters began to be attached to an end of the tobacco column. Among other things, the filter removed various smoke components. Filters made from filamentary or fibrous material, such as cellulose acetate tow or paper, remove the particulate phase of tobacco smoke by mechanical means. However, the fibrous materials are not effective at removing volatile constituents, such as aldehydes, hydrogen cyanide and sulfides, which are found in the vapor phase. Typically, an adsorbent or absorbent is combined with the fibrous material to improve removal of the vapor phase components. For example, cigarette filters have included activated carbon, porous minerals such as meerscham, silica gel, cation-exchange resins and anion-exchange resins.

[0004] Charcoal has a high specific surface area and is a relatively strong adsorbent for vapor-phase constituents of tobacco smoke. When coated with a mixture of metallic oxides, charcoal is particularly effective in removing acidic gases. Meerscham has a large adsorption area with a strong adsorption affinity for charged species, but a considerably low adsorption affinity for non-polar species. Silica gels are generally regarded as weakly retentive adsorbents for vapor-phase constituents of tobacco smoke. Although silica gel readily adsorbs aldehydes and hydrogen cyanide, the constituents also readily desorb from the silica gel. Cation exchange resins have been proposed for nicotine removal. Anion exchange resins have been proposed for the removal of smoke acids, but strongly basic anion exchangers have no effect on smoke vapor phase aldehydes. Weakly basic anion-exchange resins of porous structure are suitable for the removal of smoke acids and aldehydes, but their efficiency diminishes during smoking, as does that of carbon and porous minerals.

[0005] Two or more adsorbents can be used in combination in cigarette filters. For example, U.S. Pat. No.2,815,760 describes the use of an ion exchange material with materials which "chemically react with the harmful, nonalkaline and nonacid components of the smoke to form non-volatile compounds, thus retaining the latter to the filter." However, the aforesaid additives have not yielded satisfactory selective removal of such smoke phase components, as smoke aldehydes, particularly acetaldehyde and acrolein. U.S. Pat. No.4,300,577 describes the use of a weakly retentive absor-

bent for vapor-phase constituents intermingled with a second component having mainly primary amino functional groups for the removal of vapor-phase constituents, including aldehydes and hydrogen cyanide from tobacco smoke. However, the filter of the '577 patent has not been shown to demonstrate adequate consumer acceptance or commercial viability.

SUMMARY OF THE INVENTION

[0006] The present invention relates to a cigarette filter that includes a multiple section filter which reduces the level of predetermined smoke constituents. The filter consists of a fibrous filter plug located at the mouth-end of the cigarette, a section containing a selective adsorbent material, and a section containing a general adsorbent material.

[0007] The filter plug can be any filter plug known in the art, such as cellulose acetate tow. The general adsorbent material is preferably selected from a group of relatively high surface area materials, such as activated charcoal, which are capable of adsorbing a range of chemical compounds without a high degree of specificity. The selective adsorbent material is chosen based on the specific smoke constituents targeted for removal. Preferably, the selective adsorbent material is selected from a group of surface functionalized resins, wherein each resin consists of an essentially inert carrier with a surface area of greater than about 35 m²/g. In an embodiment of the present invention, the selective adsorbent material has a phenol-formaldehyde resin matrix surface-functionalized with mainly primary and secondary amine functional groups.

[0008] Structurally, the selective adsorbent material may be adjacent to a tobacco rod and the general adsorbent material positioned between the selective adsorbent section and the filter plug. Alternatively, the general adsorbent material may be positioned adjacent to the tobacco rod and the selective adsorbent material between the general adsorbent section and the filter plug. Preliminary data indicates that the former orientation produces a synergistic effect in smoke constituent reductions relative to the latter orientation. Further, the selective adsorbent and general adsorbent may be interspersed in a traditional filter plug material, such as cellulose acetate, or the adsorbents may be packed as a bed or thin layer sections within filter plug material.

BRIEF DESCRIPTION OF THE DRAWINGS

[0009] FIG. 1 is a perspective view of a prior art filter-tipped cigarette;

[0010] FIG. 2 is a perspective view of a filter for a cigarette made in accordance with the present invention wherein the adsorbents are dispersed throughout a filter plug material, and the general adsorbent section is positioned between the filter plug and the selective adsorbent section;

[0011] FIG. 3 is a perspective view of a filter for a cigarette made in accordance with the present invention wherein the adsorbents are dispersed throughout a filter plug material, and the selective adsorbent section is positioned between the filter plug and the general adsorbent section;

[0012] FIG. 4 is a perspective view of a filter for a cigarette made in accordance with the present invention wherein the adsorbents are packed as beds within a segment of a filter plug material;

[0013] FIG. 5 is a cross-sectional view of an embodiment of the present invention with the filter plug disposed between the general adsorbent section and the selective adsorbent section;

[0014] FIG. 6 is a cross-sectional view of an embodiment of the present invention with the filter plug adjacent one end of a tobacco rod;

[0015] FIG. 7 is a cross-sectional view of an embodiment of the present invention with the adsorbents being sectionalized in a single length of fibrous filter material; and,

[0016] FIG. 8 is a cross-sectional view of an embodiment of the present invention absent a filter plug section.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

[0017] The cigarette filter of the present invention includes a multiple section filter which reduces the levels of predetermined smoke constituents. The filter consists of a fibrous filter plug located at the mouth-end of the cigarette, a section containing a selective adsorbent material, and a section containing a general adsorbent material.

[0018] As shown in FIG. 1 and as is known in the art, a typical filter-tipped cigarette 10 has a filter 30 attached to a tobacco rod 20. The tobacco rod 20 consists of a loose tobacco-containing mixture 22 wrapped in a cigarette paper 24, and the filter 30 includes a filter plug 32 wrapped in a plug wrap 34. A sheet of tipping paper 36 joins the filter 30 to the tobacco rod 20.

[0019] In the present invention, as shown in FIG. 2, a cigarette 110 has a multiple section filter 130 attached to the tobacco rod 20. The filter 130 includes a filter plug 132, a section containing a general adsorbent 134 and a section containing a selective adsorbent 136. The filter plug 132 is adjacent a first or mouth end 131 of the filter 130. The bed of the selective adsorbent 136 is adjacent a second or tobacco-rod end 137 of the filter 130. The bed of the general adsorbent 134 is positioned between the filter plug 132 and the selective adsorbent bed 136.

[0020] The filter plug 132 is made from a filamentary or fibrous material and provides a clean, neat appearance at the mouth end 131 of the cigarette. The filter plug 132 also retains a firmness at the mouth end 131 as the cigarette 110 is consumed. As is known in the art, the filter plug 132 can be made from a variety of materials, among the most common being cellulose, cellulose acetate tow, paper, cotton, polypropylene web, polypropylene tow, polyester web, polyester tow or combinations thereof. Optionally, a plasticizer may be included.

[0021] The general adsorbent section 134 includes a general adsorbent material 144 dispersed throughout a filter plug material 142, such as in a "dual-dalmatian" filter, known in the art. The general adsorbent material 144 is preferably selected from a group of relatively high surface area materials which are capable of adsorbing smoke constituents without a high degree of specificity. For example, the general adsorbent can be selected from activated charcoal, activated coconut carbon, activated coal-based carbon, zeolite, silica gel, meerschaum, aluminum oxide, or combining thereof, as well as a mineral-based charcoal made from semi-anthracite coal with a density about 50% greater than coconut-based charcoal (available from Calgon Carbon, Pittsburgh, Pa.), Ambersorb 572 or Ambersorb 563 (a carbonaceous resin derived from the pyrolysis of sulfonated

styrene-divinylbenzene available from Rohm and Haas, 5000 Richmond Street, Philadelphia, Pa. 19137), other materials having similar particle sizes, surface area and binding affinities, or combinations thereof. To further enhance the efficacy of the general adsorbent, metal oxides or other metal-based complexes may be included in the general adsorbent section.

[0022] The selective adsorbent section 136 includes a selective adsorbent material 146 dispersed throughout a filter plug material 142, such as in a "dual-dalmatian" filter, known in the art. The selective adsorbent material 146 is preferably selected based on the material's 146 specificity for a predetermined class of chemical compounds. For example, the selective adsorbent material 146 may be an ion-exchange resin, such as Duolite A7 (available from Rohm and Haas, 5000 Richmond Street, Philadelphia, Pa. 19137), or a material having similar functional groups and binding affinities. The Duolite A7 has a phenol-formaldehyde resin matrix and is surface-functionalized with primary and secondary amino groups, thereby enhancing the resin's specificity toward the aldehydes and hydrogen cyanide found in tobacco smoke.

[0023] Further, the selective adsorbent material 146 must be selected taking into consideration that the contact conditions between the tobacco smoke and the adsorbent 146 are dependent on a number of variables, including how strongly the smoker pulls the smoke through the filter as the cigarette is being smoked and how much of the tobacco rod has been consumed prior to each puff. Thus, it is advantageous that the selective adsorbent 146 have a surface area of greater than about 35 m²/g so that there is minimal diffusional resistance and the surface area functional sites are easily accessible. Materials with greater surface areas also demonstrate less noticeable performance decline if part of the surface is covered with a plasticizer, as might occur when the adsorbent 146 is dispersed in the filter plug 142.

[0024] When the cigarette is consumed, the tobacco smoke is puffed by the smoker through the filter 130. The smoke initially passes over the selective adsorbent section 136 where the targeted smoke constituents are adsorbed on the surface of the selective adsorbent material 146 and particulate matter in the smoke is retained by the filter plug material 142. The remaining smoke then passes over the general adsorbent section 134 where other constituents may be retained by the adsorbent material 144 and additional particulate matter is retained by the filter plug material 142. Finally, the remaining smoke then passes through the filter plug 132 where additional particulate matter can be removed. The filtered smoke is then delivered to the smoker.

[0025] In a first example embodiment of the present invention, as shown in FIG. 2, the multiple section filter 110 is made having a filter plug 132 made of cellulose acetate tow and being about 7 mm in length, and having a general adsorbent section 134 consisting of 40 mg of activated coconut charcoal 144 dispersed throughout cellulose acetate tow 142 cut to deliver a section 134 about 10 mm in length wherein the cellulose acetate tow is treated with a plasticizer, and having a selective adsorbent section 136 consisting of 40 mg of Duolite A7 dispersed throughout cellulose acetate tow 142 cut to deliver a section 136 about 10 mm in length wherein the cellulose acetate tow is treated with a plasticizer. When the tobacco rod is burned with a normal puff/rest cycle, analysis of the smoke vapor exiting at the mouth end 131 of the cigarette 110 shows statistically significant reductions in the levels of hydrogen cyanide, furan, propionalde-

hyde, acetone, methyl ethyl ketone/butyraldehyde, hydrogen sulfide, 1,3-butadiene, 2-methylpropanal, isoprene, styrene, pyridine, toluene and benzene as compared to cigarettes using similar resin-only filters. When the tobacco rod is burned with a normal puff/rest cycle, analysis of the smoke vapor exiting at the mouth end **131** of the cigarette **110** shows statistically significant reductions in the levels of pyridine, hydrogen cyanide, hydrogen sulfide, styrene, 2-methylpropanal, benzene, propionaldehyde, furan, isoprene, 1,3-butadiene, crotonaldehyde, acetone, acrylonitrile, acetaldehyde, toluene, carbon disulfide, methyl ethyl ketone/butyraldehyde, propionaldehyde, acetonitrile, and methanol as compared to cigarettes using charcoal-only filters.

[0026] As shown in FIG. 2, the multiple section filter **130** has the filter plug **132** adjacent the mouth end **131**, the selective adsorbent section **136** adjacent the tobacco-rod end **137**, and the general adsorbent section **134** positioned between the filter plug **132** and the selective adsorbent section **136**.

[0027] In an alternative embodiment, such as shown in FIG. 3, a cigarette **210** has a multiple section filter **230** wherein the filter plug **132** is positioned at the mouth end **131**, the general adsorbent section **134** is adjacent the tobacco-rod end **137**, and the selective adsorbent section **136** is sandwiched between the filter plug **132** and the general adsorbent section **134**. In this embodiment, during a normal puff, the smoke first passes through the general adsorbent section **134**, then through the selective adsorbent section **136**, and finally through the filter plug **132**. Moreover, the multiple section filter **230** is essentially identical to the filter **130** (FIG. 2) of the first example embodiment except that the general adsorbent section **134** is adjacent to the tobacco rod **20** and the selective adsorbent section **136** is sandwiched between the filter plug **132** and the general adsorbent section **134**. When the tobacco rod is burned with a normal puff/rest cycle, analysis of the smoke vapor exiting at the mouth end **131** of the cigarette **210** (FIG. 3) shows statistically significant reductions in the levels of propionaldehyde, acetone, methyl ethyl ketone/butyraldehyde, crotonaldehyde, hydrogen sulfide, 2-methylpropanal, pyridine, acrolein, toluene, acetaldehyde, acrylonitrile, methanol and benzene as compared to cigarettes using similar resin-only filters. When the tobacco rod is burned with a normal puff/rest cycle, analysis of the smoke vapor exiting at the mouth end **131** of the cigarette **210** shows statistically significant reductions in the levels of pyridine, hydrogen cyanide, benzene, propionitrile, crotonaldehyde, acetone, acrylonitrile, acetaldehyde, toluene, carbon disulfide, methyl ethyl ketone/butyraldehyde, propionaldehyde, acetonitrile, and methanol as compared to cigarettes using charcoal-only filters.

[0028] As shown in another embodiment in FIG. 4, in a multiple section filter **330** of a cigarette **310**, the adsorbents **144**, **146** are packed within the filter plug material as thin layer sections of general adsorbent **344** and selective adsorbent **346**. In this embodiment, the layer packed adsorbents are exposed to less plasticizer than the tow-dispersed adsorbents and retain more surface area for interacting with smoke constituents. Moreover, as shown in FIG. 7, a multi-section filter **630** for a cigarette **610** includes the general adsorbent **344** and the selective adsorbent **346** dispersed in separate sections within a single length of fibrous filter material **342**.

[0029] An advantage of the embodiment **110** of FIG. 2 is that the smoke passes over the selective adsorbent material **146** before passing over the general adsorbent **144**. This

allows the selective adsorbent **146** to remove some specific smoke constituents before the general adsorbent **144** is exposed to the smoke, thereby allowing the general adsorbent **144** to be more effective in removing the remaining smoke constituents. Thus, there is a synergistic effect observed for the adsorbents in the cellulose acetate/general adsorbent/specific adsorbent orientation as compared to the cellulose acetate/specific adsorbent/general adsorbent orientation.

[0030] As shown in FIGS. 5 and 6, in a multiple section filter **430** and **530** of cigarettes **410** and **510**, respectively, the filter plug **132** is disposed between the general adsorbent section **134** and the selective adsorbent section **136** in FIG. 5 and is adjacent one end of the tobacco rod **20** in FIG. 6. In FIG. 5 the selective adsorbent section **136** is at the mouth end of the filter **430** and in FIG. 6 the general adsorbent section **134** is at the mouth end of the filter **530**. Moreover, as shown in FIG. 8, a multiple section filter **730** of a cigarette **710** includes only a general adsorbent section **134** and a selective adsorbent section **136**.

[0031] The following examples are representative of the embodiments which can be prepared in accordance with the present invention and the smoke constituent removal performance of those embodiments. The embodiments presented are intended for example purposes only and are not intended to be limiting in scope.

EXAMPLE 1

[0032] A cigarette **110** with a multiple section filter **130** is prepared as shown in FIG. 2 wherein a filter plug **132** is made of cellulose acetate tow and is about 7 mm in length, a general adsorbent section **134** consists of about 40 mg of activated coconut charcoal **144** dispersed throughout plasticizer-treated cellulose acetate tow **142** cut to deliver a section **134** about 10 mm in length, and a selective adsorbent section **136** consists of about 40 mg of Duolite A7 dispersed throughout plasticizer-treated cellulose acetate tow **142** cut to deliver a section **136** about 10 mm in length. The filter is attached to a tobacco rod having a length of about 56.5 mm and containing about 617 mg of a typical non-menthol cigarette blend wrapped in a 50 Coresta cigarette paper with about 1.8% citrate. The cigarette delivers about 10.3 mg tar per cigarette.

EXAMPLE 2

[0033] A cigarette **210** with a multiple section filter **230** is prepared with the section orientations as shown in FIG. 3 wherein the filter plug **132**, the general adsorbent section **134**, and the selective adsorbent section **136** are essentially identical to the filter plug **132**, the general adsorbent section **134**, and the selective adsorbent section **136** of Example 1. The filter is attached to a tobacco rod having a length of about 56.5 mm and containing about 617 mg of a typical non-menthol cigarette blend wrapped in a 50 Coresta cigarette paper with about 1.8% citrate. The cigarette delivers about 10.0 mg tar per cigarette.

EXAMPLE 3

[0034] Cigarettes are prepared as in Example 1 except that about 20 mg Duolite A7 is used in the selective adsorbent section **136** instead of 40 mg. The cigarette delivers about 10.2 mg tar per cigarette.

EXAMPLE 4

[0035] Cigarettes are prepared as in Example 2 except that about 20 mg Duolite A7 is used in the selective adsorbent section **136** instead of 40 mg. The cigarette delivers about 10.9 mg tar per cigarette.

EXAMPLE 5

[0036] Cigarettes are prepared as in Example 1 except that about 60 mg Duolite A7 is used in the selective adsorbent section 136 instead of 40 mg. The cigarette delivers about 10.0 mg tar per cigarette.

EXAMPLE 6

[0037] Cigarettes are prepared as in Example 2 except that about 60 mg Duolite A7 is used in the selective adsorbent section 136 instead of 40 mg. The cigarette delivers about 10.3 mg tar per cigarette.

EXAMPLE 7

[0038] Cigarettes are prepared as in Example 1 except that about 69 mg of a mineral-based charcoal made from semi-anthracite coal is used in the general adsorbent section 136 instead of 40 mg of activated coconut charcoal. The cigarette delivers about 10.1 mg tar per cigarette.

EXAMPLE 8

[0039] Cigarettes are prepared as in Example 2 except that about 69 mg of a mineral-based charcoal made from semi-anthracite coal is used in the general adsorbent section 136 instead of 40 mg of activated coconut charcoal. The cigarette delivers about 10.2 mg tar per cigarette.

EXAMPLE 9

[0040] Representative cigarettes of Examples 1-6 are smoked to a butt length of about 4 mm from the tipping using a Borgwalt RM-20 smoking machine. Following the procedures set forth by the FTC, smoke constituents exiting the filter end of each cigarette are passed through a Cambridge filter pad, the vapor phase is collected in a bag and analyzed by GC/MS. The data is normalized to about 10 mg tar per cigarette.

Cigarettes Prepared by Example: mg Duolite/cigarette	Average Vapor Phase Yields ($\mu\text{g}/\text{cig}$)					
	1	2	3	4	5	6
	40		20		60	
Filter Segment Order	CA/GA/SA	CA/SA/GA	CA/GA/SA	CA/SA/GA	CA/GA/SA	CA/SA/GA
Acetaldehyde	330.9	333.7	380.7	346.2	320.3	310.9
Isoprene	231.4	240.4	252.1	246.1	227.4	227.2
Acetone	144.1	163.5	156.0	160.5	148.0	151.4
Methanol	104.9	127.6	114.5	142.8	111.7	98.5
Acetonitrile	59.8	72.0	67.0	77.4	62.8	57.3
Acrolein	29.6	31.4	33.6	32.2	28.5	29.9
Methyl ethyl ketone	29.3	35.9	30.9	38.5	30.1	31.6
Formaldehyde	23.5	25.8	25.5	25.0	22.1	24.5
Propionaldehyde	25.7	27.4	29.3	28.5	25.3	25.0
1,3-Butadiene	25.5	25.9	27.5	25.5	25.8	25.0
Toluene	22.5	25.3	22.0	27.5	23.9	22.5
Benzene	20.6	23.6	21.6	24.1	21.1	21.4
Acrylonitrile	16.8	17.7	18.0	18.0	17.0	16.5
Furan	16.2	17.0	17.3	16.4	16.4	16.2
Hydrogen cyanide	15.1	16.4	20.7	19.6	13.6	14.8
Hydrogen sulfide	12.9	13.0	14.0	12.9	13.1	12.7

-continued

Cigarettes Prepared by Example: mg Duolite/cigarette	Average Vapor Phase Yields ($\mu\text{g}/\text{cig}$)					
	1	2	3	4	5	6
	40		20		60	
Filter Segment Order	CA/GA/SA	CA/SA/GA	CA/GA/SA	CA/SA/GA	CA/GA/SA	CA/SA/GA
Propionitrile	12.9	15.0	13.5	15.9	13.6	12.8
2-Methylpropanal	6.4	6.7	7.0	7.0	6.6	6.4
Crotonaldehyde	5.1	5.9	5.5	6.3	5.3	5.0
Carbon disulfide	2.5	2.6	2.7	2.6	2.6	2.5
Styrene	2.0	1.8	2.2	1.9	2.1	1.7
Pyridine	1.9	1.9	1.9	1.8	1.9	1.8

CA = cellulose acetate filter plug;

GA = general adsorbent section;

SA = selective adsorbent section

EXAMPLE 10

[0041] Representative cigarettes of Examples 7 and 8 are smoked to a butt length of about 4 mm from the tipping using a Borgwalt RM-20 smoking machine. Following the procedures set forth by the FTC, smoke constituents exiting the filter end of each cigarette are passed through a Cambridge filter pad, the vapor phase is collected in a bag and analyzed by GC/MS. The data is normalized to about 10 mg tar per cigarette.

Cigarettes Prepared by Example: mg Duolite/cigarette	Average Vapor Phase Yields ($\mu\text{g}/\text{cig}$)	
	7	8
	40	
Filter Segment Order	CA/GA/SA	CA/SA/GA
Acetaldehyde	343.4	364.2
Isoprene	225.0	268.9
Acetone	138.6	162.3
Methanol	95.1	134.7
Acetonitrile	61.4	84.6
Acrolein	9.8	35.3
Methyl ethyl ketone	28.3	39.8
Propionaldehyde	26.4	30.2
1,3-Butadiene	25.4	27.7
Toluene	18.7	24.2
Benzene	21.3	27.3
Acrylonitrile	7.5	9.0
Furan	17.0	18.4
Hydrogen cyanide	16.7	19.5
Hydrogen sulfide	14.7	14.1
Propionitrile	15.7	20.3
2-Methylpropanal	13.0	14.8
Crotonaldehyde	3.3	5.1
Carbon disulfide	2.8	2.8
Styrene	1.8	2.1
Pyridine	1.3	1.4

CA = cellulose acetate filter plug;

GA = general adsorbent section;

SA = selective adsorbent section

[0042] From a production perspective, there are some advantages to dispersing the selective adsorbent material

146 and the general adsorbent material **144** throughout the filter tow **142**. Specifically, when the adsorbents **144**, **146** are dispersed within the tow **142**, the adsorbents are easier to handle than they are as loose particles. However, when the adsorbents **144**, **146** are dispersed within the tow **142**, there is a risk that any plasticizer which is used on the tow **142** will affect the surface of the adsorbents **144**, **146**, thereby reducing the adsorption capacity. Thus, as shown in **FIG. 4**, the adsorbents **144**, **146** may be packed within the filter plug material **142** as thin layer sections of general adsorbent **344** and selective adsorbent **346**. Because the layer packed adsorbents would not be exposed to the same level of plasticizer as the tow-dispersed adsorbents, the adsorbents would retain more available surface area for interacting with smoke constituents.

[0043] From a reading of the above, one with ordinary skill in the art should be able to devise variations to the inventive features. For example, the filter plug, the general adsorbent section, and the selective adsorbent section may vary in length and diameter, relative to any dimensions specified herein and relative to each other. Further, the various section dimensions may be optimized for a particular tobacco blend or for particular tobacco rod dimensions. These and other variations are believed to fall within the spirit and scope of the attached claims.

1. A multiple section cigarette filter comprising:
 - (a) a selective adsorbent section comprising a selective adsorbent material having an affinity for a predetermined class of chemical compounds dispersed throughout a fibrous material; and
 - (b) a general adsorbent section comprising a general adsorbent material having a high surface area and being capable of adsorbing smoke constituents without a high degree of specificity, said selective adsorbent section, and said general adsorbent section being axially aligned in tandem.
2. The cigarette filter of claim 1 wherein said selective adsorbent material is an ion-exchange resin.
3. The cigarette filter of claim 2 wherein said selective adsorbent material has a surface area sufficient to ensure that the surface functional sites are easily accessible to a smoke constituent.
4. The cigarette filter of claim 2 wherein said ion-exchange resin has a phenol-formaldehyde resin matrix and is surface-functionalized with primary and secondary amine groups.
5. The cigarette filter of claim 2 wherein said selective adsorbent section comprises said selective adsorbent material dispersed throughout a fibrous material.
6. The cigarette filter of claim 2 wherein said selective adsorbent section comprises a close-packed bed of said selective adsorbent material.
7. The cigarette filter of claim 1 wherein said general adsorbent material is selected from the group consisting of activated charcoal, activated coconut carbon, activated coal-based carbon, zeolite, silica gel, meerschau, aluminum oxide, a coal-based charcoal made from semi-anthracite coal, a carbonaceous resin derived from the pyrolysis of sulfonated styrene-divinylbenzene, or combinations thereof.
8. The cigarette filter of claim 7 wherein said general adsorbent section comprises said general adsorbent material dispersed throughout a fibrous material.

9. The cigarette filter of claim 7 wherein said general adsorbent section comprises a close-packed bed of said general adsorbent material.

10. The cigarette filter of claim 7 wherein said general adsorbent section further includes a metal oxide or other metal-based complex.

11. The cigarette filter of claim 1 including a fibrous filter plug wherein said filter plug is made from cellulose, cellulose acetate tow, paper, cotton, polypropylene web, polypropylene tow, polyester web, polyester tow or a combination thereof, said fibrous filter plug being co-axially aligned in tandem with said selective adsorbent section and said general adsorbent section.

12. The cigarette filter of claim 11 wherein said filter plug further includes a plasticizer, a liquid additive, a flavoring agent or a combination thereof.

13. The cigarette filter of claim 11 wherein said general adsorbent section is positioned between said fibrous filter plug and said selective adsorbent section.

14. The cigarette filter of claim 11 wherein said selective adsorbent section is positioned between said fibrous filter plug and said general adsorbent section.

15. The cigarette filter of claim 11, said fibrous filter plug being positioned between said selective adsorbent section and said general adsorbent section.

16. The cigarette filter of claim 1, including a plug wrap circumscribing said general adsorbent section and said selective adsorbent section.

17. The cigarette filter of claim 1, said selective adsorbent material having a surface area greater than about 35 m²/g.

18. A multiple section cigarette filter comprising:

(a) a fibrous filter plug selected from the group consisting of cellulose, cellulose acetate tow, paper, cotton, polypropylene web, polypropylene tow, polyester web, polyester tow or a combination thereof;

(b) a selective adsorbent section comprising an ion-exchange resin having a surface area sufficient to ensure that the surface functional sites are easily accessible to a smoke constituent; and

(c) a general adsorbent section comprising a general adsorbent material selected from the group consisting of activated charcoal, activated coconut carbon, activated coal-based carbon, zeolite, silica gel, meerschau, aluminum oxide, a coal-based charcoal made from semi-anthracite coal, a carbonaceous resin derived from the pyrolysis of sulfonated styrene-divinylbenzene, or combinations thereof, said fibrous filter plug, said selective adsorbent section, and said general adsorbent section being axially aligned in tandem.

19. The cigarette filter of claim 18 wherein said ion-exchange resin has a phenol-formaldehyde resin matrix and is surface-functionalized with primary and secondary amine groups.

20. The cigarette filter of claim 18 wherein said selective adsorbent section comprises said ion-exchange resin dispersed throughout a fibrous material.

21. The cigarette filter of claim 18 wherein said selective adsorbent section comprises a close-packed bed of said ion-exchange resin.

22. The cigarette filter of claim 18 wherein said general adsorbent section comprises said general adsorbent material dispersed throughout a fibrous material.

23. The cigarette filter of claim 22 wherein said general adsorbent section further includes an additive selected from a metal oxide or other metal-based complex.

24. The cigarette filter of claim 18 wherein said general adsorbent section comprises a close-packed bed of said general adsorbent material.

25. The cigarette filter of claim 24 wherein said general adsorbent section further includes an additive selected from a metal oxide or a metal-based complex.

26. The cigarette filter of claim 18 wherein said filter plug is made from cellulose acetate tow.

27. The cigarette filter of claim 18 wherein said filter plug further includes a plasticizer, a liquid additive, a flavoring agent or a combination thereof.

28. The cigarette filter of claim 18 wherein said general adsorbent section is positioned between said fibrous filter plug and said selective adsorbent section.

29. The cigarette filter of claim 18 wherein said selective adsorbent section is positioned between said fibrous filter plug and said general adsorbent section.

30. The cigarette filter of claim 18, said fibrous filter plug being positioned between said selective adsorbent section and said general adsorbent section.

31. The cigarette filter of claim 18, said selective adsorbent material having a surface area greater than 35 m²/g.

* * * * *