



(86) **Date de dépôt PCT/PCT Filing Date:** 2012/11/26
(87) **Date publication PCT/PCT Publication Date:** 2013/05/30
(45) **Date de délivrance/Issue Date:** 2017/03/21
(85) **Entrée phase nationale/National Entry:** 2014/05/23
(86) **N° demande PCT/PCT Application No.:** JP 2012/081219
(87) **N° publication PCT/PCT Publication No.:** 2013/077474
(30) **Priorités/Priorities:** 2011/11/25 (JP2011-258358);
2011/11/25 (JP2011-258356);
2011/11/25 (JP2011-258355);
2012/06/18 (JP2012-137077);
2012/11/12 (JP2012-248855);
2012/11/22 (JP2012-256921)

(51) **Cl.Int./Int.Cl.** **G03G 15/08** (2006.01)


(72) **Inventeurs/Inventors:**
HOSOKAWA, HIROSHI, JP;
KATO, SHUNJI, JP;
TAMAKI, SHINJI, JP;
IKEGUCHI, HIROSHI, JP;
TERAZAWA, SEIJI, JP;
YAMABE, JUNJI, JP;
MITSUISHI, KAORI, JP;
...

(73) **Propriétaire/Owner:**
RICOH COMPANY, LIMITED, JP

(74) **Agent:** SMART & BIGGAR

(54) **Titre : RESERVOIR A POUDRE ET APPAREIL DE FORMATION D'IMAGES**

(54) **Title: POWDER CONTAINER AND IMAGE FORMING APPARATUS**

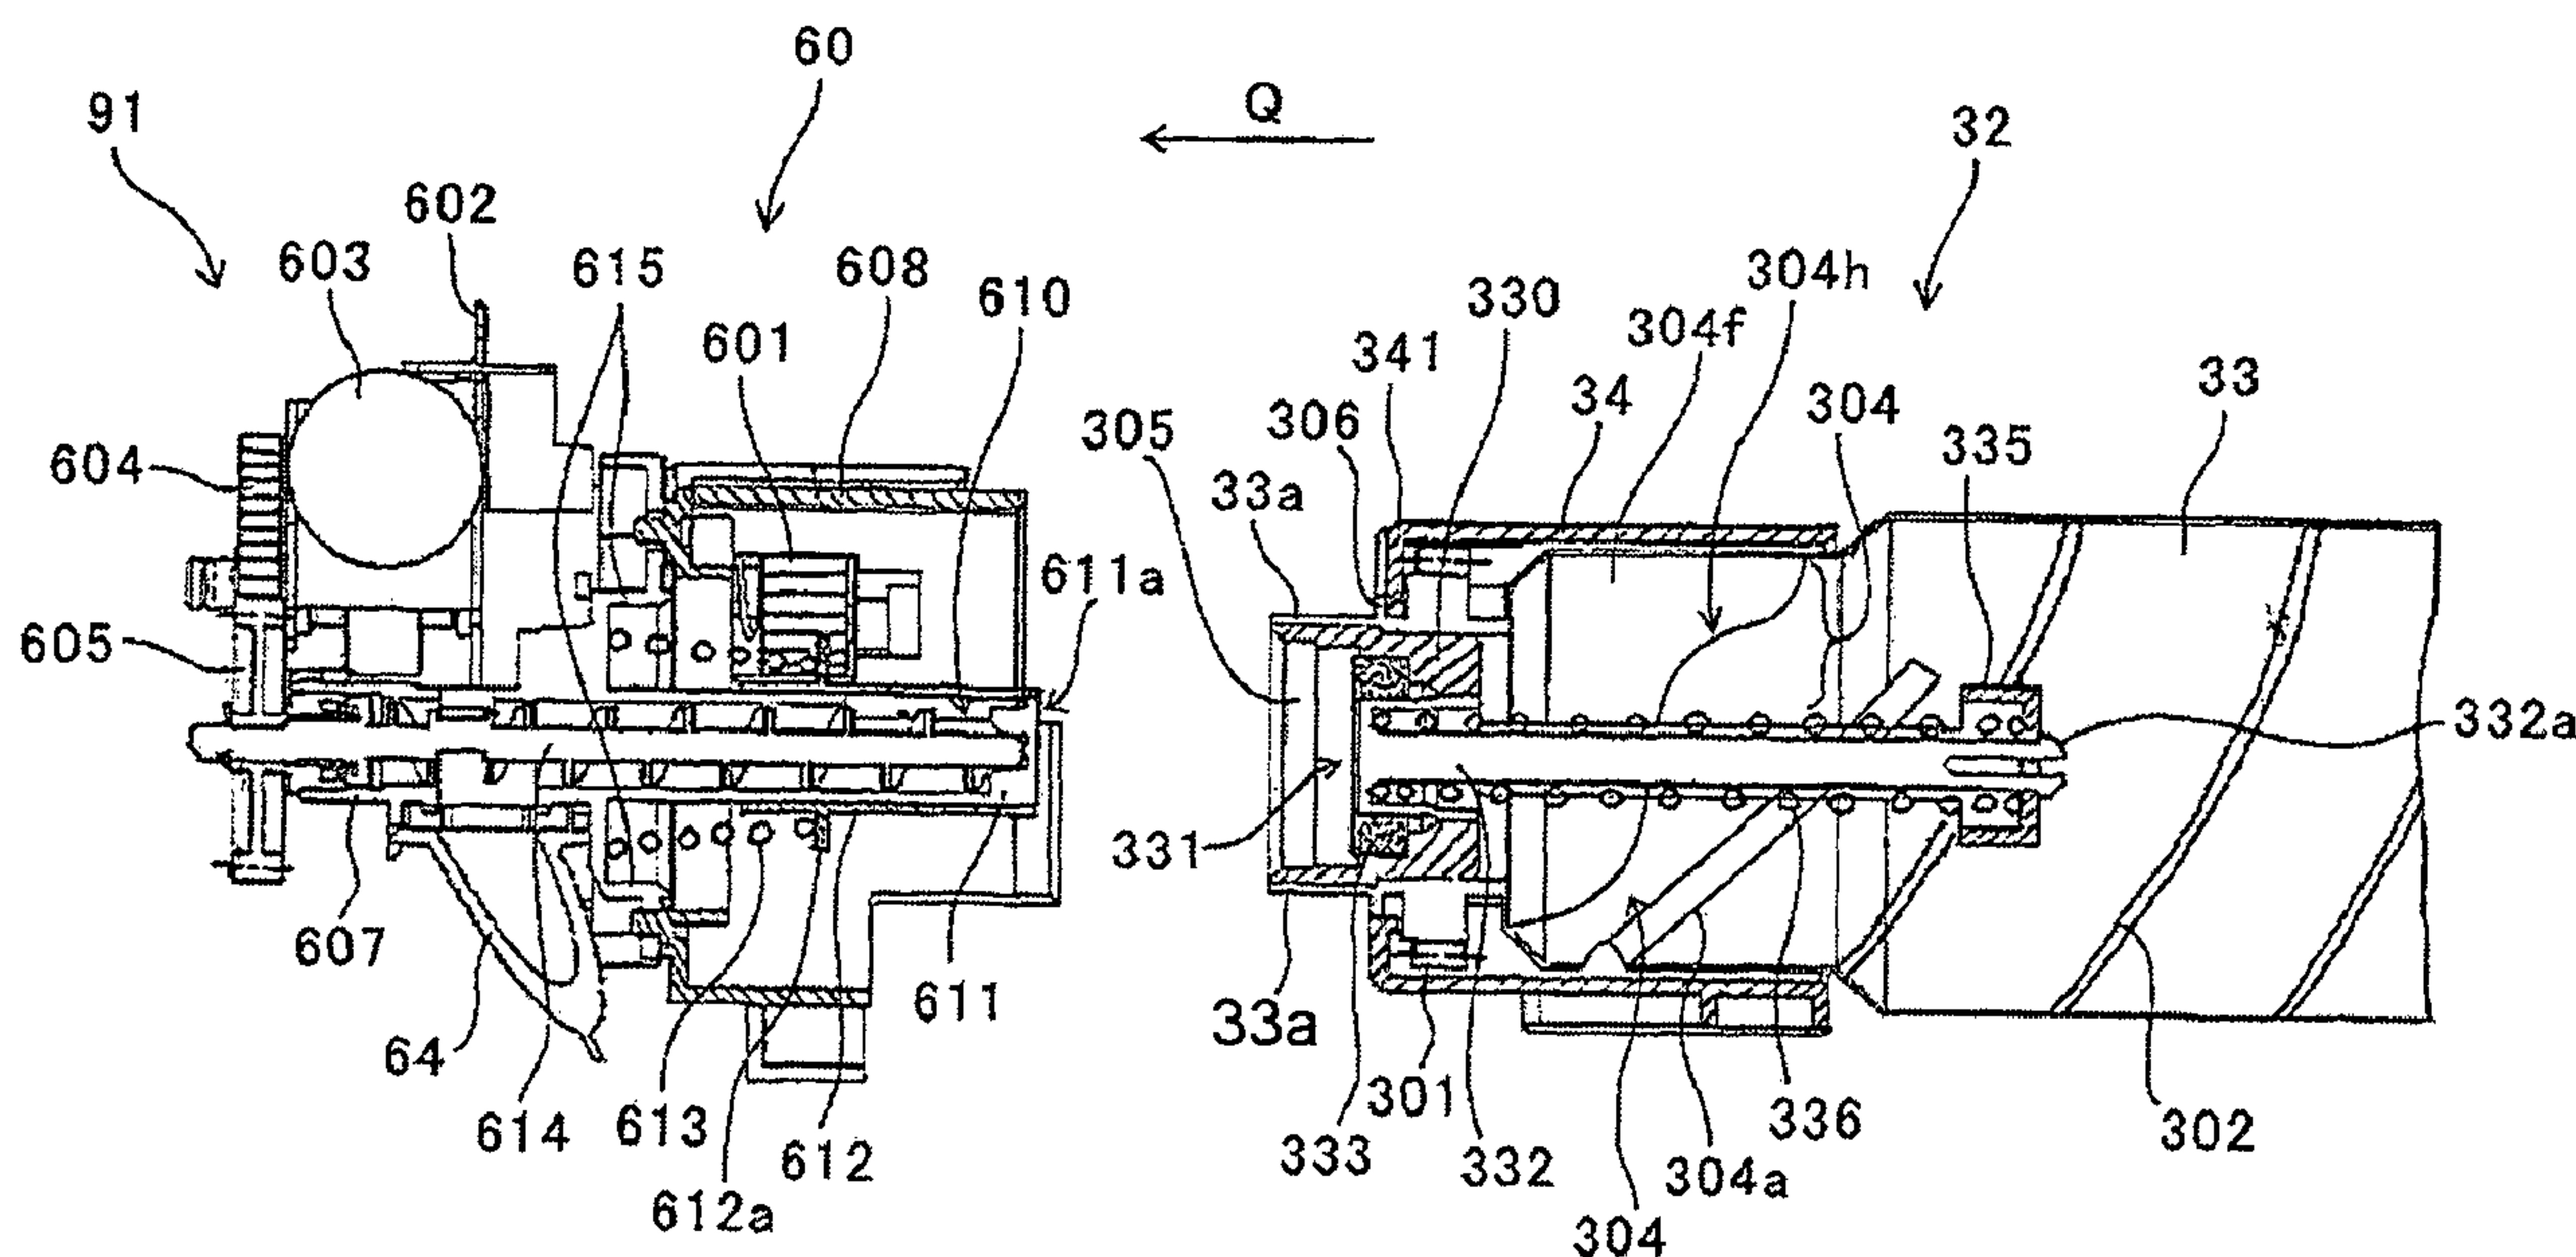

(57) **Abrégé/Abstract:**

A powder container that is removably attachable to an image forming apparatus and that includes a container body, including a container opening in a first end and containing image forming powder; a conveyor, arranged inside the container body, to convey the powder from a second end of the container body to the first end along a longitudinal direction of the container body; a nozzle receiver, arranged in the container opening and including a nozzle receiving opening to receive a powder conveying nozzle of the image forming apparatus, to guide the powder conveying nozzle to the inside of the container body; and a scooping portion, scooping up the powder received from the conveyor with the rotation of the scooping portion, to move the powder to a powder receiving opening of the powder conveying nozzle. The nozzle receiving opening is arranged on the inner bottom of the container opening.

(72) **Inventeurs(suite)/Inventors(continued):** TOMOTAKA, TOSHIHIDE, JP; WATANABE, TSUNEHIRO, JP; KIKUCHI, KENJI, JP

79602-26

Abstract

A powder container is to be attached to a powder conveying device with a longitudinal direction of the powder container parallel to a horizontal direction. The powder conveying device includes a conveying nozzle, provided with a powder receiving opening to receive powder from the powder container, to convey the powder; an open/close member to open and close the powder receiving opening; a flange provided to the open/close member; a biasing member to bias the open/close member to close the powder receiving opening; and a container setting section to which a part of the powder container is to be fit. The powder container includes a conveyor, arranged inside the powder container, to convey the powder from a second end of the powder container to a first end along the longitudinal direction of the powder container; a container opening protruding from the first end of the powder container; a nozzle receiving opening, provided in the container opening, into which the conveying nozzle provided to the powder conveying device is to be inserted; and a butting portion provided in the container opening, to butt against the flange so as to move the open/close member to open the powder receiving opening. When the powder container is attached to the powder conveying device, the container opening is fitted to the container setting section, and the flange and the biasing member are housed in an inner space of the container opening.

DESCRIPTION

POWDER CONTAINER AND IMAGE FORMING APPARATUS

5 TECHNICAL FIELD

The present invention relates to a powder container for containing powder, such as toner, and an image forming apparatus that conveys the powder from the powder container to a conveying destination.

10

BACKGROUND ART

In image forming apparatuses, such as copiers, printers, or facsimile machines, using an electrophotographic process, a latent image formed on a photoreceptor is developed with toner provided by a developing device. Because the toner is consumed through development of latent images, it is necessary to replenish the developing device with toner. Therefore, a toner replenishing device as a powder supply device provided in an apparatus body conveys toner from a toner container as a powder container to the developing device so that the developing device can be replenished with toner. The developing device that can be replenished with toner as described above enables continuous development.

25 Furthermore, the toner container is detachably attached to the toner replenishing device. If the toner contained in the toner container is used up, the toner container is replaced with one containing new toner.

Regarding the toner container detachably attached to the toner replenishing device, a toner container is known that has a spiral rib formed on a cylindrical inner surface of a toner storage member for containing toner (see Patent

30

Document 1: Japanese Patent Application Laid-open No. 2003-241496, Patent Document 2: Japanese Patent Application Laid-open No. 2005-221825, Patent Document 3: Japanese Patent No. 4342958, Patent Document 4: Japanese Patent Application Laid-open No. 2002-202656, and Patent Document 5: Japanese Patent Application Laid-open No. 2003-233247). In such a toner container, the toner storage member is rotated while the toner container is attached to the toner replenishing device, so that the stored toner is conveyed from one end to the other end in the rotation axis direction. Thereafter, the toner is discharged via an opening arranged on the other end of the toner storage member to the main body of the toner replenishing device.

Regarding the toner container that conveys toner stored therein from one end to the other end by rotating the toner storage member, Patent Document 6 (Japanese Patent Application Laid-open No. 2009-276659) describes a toner container in which a conveying nozzle fixed to the toner replenishing device is inserted via the opening on the other end of the toner storage member. Specifically, a toner receiving opening is formed in the vicinity of a front end of the conveying nozzle inserted in the toner container in the insertion direction. The conveying nozzle receives toner from the toner storage member via the toner receiving opening while being inserted in the toner container, and conveys the toner to the main body of the toner replenishing device. In the toner container, a nozzle insertion member provided with a nozzle receiving opening for inserting the conveying nozzle is fixed to the inside of the opening on the other end of the toner storage member. The toner container also includes an open/close member that closes the nozzle receiving opening before

insertion of the conveying nozzle and opens the nozzle receiving opening with insertion of the conveying nozzle.

The toner container described in Patent Document 6 can maintain the closed state of the nozzle receiving opening until the conveying nozzle is inserted, so that it is possible to prevent occurrence of toner leakage or toner scattering before the toner container is attached to the toner replenishing device. When the toner container is attached to the toner replenishing device, toner stored in the toner storage member is received via the toner receiving opening formed in the vicinity of the front end of the inserted conveying nozzle in the insertion direction and is conveyed to the main body of the toner replenishing device through the conveying nozzle while the nozzle receiving opening is being closed by the conveying nozzle. Therefore, even when the toner container is attached to the toner replenishing device, it is possible to prevent toner leakage or toner scattering.

However, in the configuration described in Patent Document 6, when the toner container is attached to the toner replenishing device, the outer surface of the conveying nozzle inserted in the toner storage member comes in contact with toner in the toner storage member. Therefore, when the conveying nozzle is removed from the toner container, some of the toner in contact with the conveying nozzle may remain attached to the conveying nozzle and may pass through the nozzle receiving opening along with the conveying nozzle, so that the toner may be leaked from the nozzle receiving opening resulting in toner scattering.

In the above explanation, a problem that occurs with a toner container that contains toner as powder is explained.

79602-26

4

However, in any powder that contains powder other than toner, if the container is configured to convey and discharge the powder from the inside to the outside by inserting a conveying nozzle fixed to a powder conveying device, powder leaked along
5 with removal of the conveying nozzle may be scattered.

The present invention has been made in view of the above circumstances, and an object thereof is to provide a powder container that discharges powder from the inside to the outside by inserting a conveying nozzle and that can prevent
10 scattering of leaked powder when the conveying nozzle is removed, and to provide an image forming apparatus including the powder container.

79602-26

5

DISCLOSURE OF INVENTION

According to an embodiment, there is provided a powder container to be attached to a powder conveying device with a longitudinal direction of the powder container parallel to a horizontal direction, the powder conveying device including: a nozzle, including a powder receiving opening to receive powder from the powder container, to convey the powder; a cover to open and close the powder receiving opening; a flange disposed around the nozzle; and a biasing member to bias the cover to close the powder receiving opening, the powder container comprising: a conveyor, arranged inside the powder container, to convey the powder from a second end of the powder container to a first end along the longitudinal direction of the powder container; a container opening protruding from the first end of the powder container; and a nozzle receiving opening, at the container opening, into which the nozzle of the powder conveying device is to be inserted, wherein: an inner space of the container opening has a size to accommodate the flange, and when the powder container is attached to the powder conveying device, the inner space of the container opening includes therein the flange.

According to another embodiment, there is provided an image forming apparatus comprising: an image forming unit that forms an image on an image carrier by using image-forming powder; a powder conveyor that conveys the powder to the image forming unit; and the powder container as described herein, wherein the powder container is configured to be detachably attached to the powder conveying device.

79602-26

6

In the toner container disclosed in Patent Document 6, the position of the edge of the container opening in the longitudinal direction and the position of the edge of the nozzle insertion member on the side where the nozzle receiving opening is formed in the longitudinal direction are the same. With this positional relationship, nothing can prevent scattering of powder leaked from the nozzle receiving opening when the conveying nozzle is removed from the powder container. Therefore, toner scattering can easily occur. According to the invention, the nozzle receiving opening is arranged on the cylindrical inner bottom of the container opening. Therefore, the edge of the container opening protrudes relative to the edge of the nozzle insertion member where the nozzle receiving opening is formed, in the longitudinal direction. The protruding portion can prevent scattering powder leaked from the nozzle receiving opening when the conveying nozzle is

removed from the powder container. Therefore, it is possible to prevent toner scattering.

ADVANTAGEOUS EFFECTS OF INVENTION

- 5 According to the invention, it is possible to prevent scattering of leaked powder when a conveying nozzle is removed from a powder container.

BRIEF DESCRIPTION OF DRAWINGS

- 10 Fig. 1 is an explanatory cross-sectional view of a toner replenishing device before a toner container is attached and the toner container;

Fig. 2 is an overall configuration diagram of a copier according to an embodiment;

- 15 Fig. 3 is a schematic diagram of an image forming unit of the copier;

Fig. 4 is a schematic diagram of how the toner container is attached to the toner replenishing device of the copier;

- 20 Fig. 5 is a schematic perspective view of how the toner container is attached to a container holding section of the copier;

Fig. 6 is an explanatory perspective view of the toner container;

- 25 Fig. 7 is an explanatory perspective view of the toner replenishing device before the toner container is attached and the toner container;

- Fig. 8 is an explanatory perspective view of the toner replenishing device to which the toner container is
30 attached and the toner container;

Fig. 9 is an explanatory cross-sectional view of the toner replenishing device to which the toner container is

attached and the toner container;

Fig. 10 is an explanatory perspective view of the toner container when a container front end cover is detached;

5 Fig. 11 is an explanatory perspective view of the toner container when a nozzle receiver is detached from a container body;

Fig. 12 is an explanatory cross-sectional view of the toner container when the nozzle receiver is detached from
10 the container body;

Fig. 13 is an explanatory cross-sectional view of the toner container when the nozzle receiver is attached to the container body from the state illustrated in Fig. 12;

Fig. 14 is an explanatory perspective view of the
15 nozzle receiver viewed from a front end of the container;

Fig. 15 is an explanatory perspective view of the nozzle receiver viewed from a rear end of the container;

Fig. 16 is a top cross-sectional view of the nozzle receiver in the state illustrated in Fig. 13;

20 Fig. 17 is a transverse cross-sectional view of the nozzle receiver in the state illustrated in Fig. 13;

Fig. 18 is an exploded perspective view of the nozzle receiver;

Fig. 19 is an explanatory diagram illustrating a state
25 where the toner container falls with the rear end facing downward;

Fig. 20 is an explanatory diagram illustrating a state before the toner container including second shutter hooks is set in a device body;

30 Fig. 21 is an explanatory diagram illustrating a state where the toner container including the second shutter hooks is set in the body;

Fig. 22 is an explanatory cross-sectional view of a nozzle shutter;

Fig. 23 is an explanatory perspective view of the nozzle shutter viewed from a front end of the nozzle;

5 Fig. 24 is an explanatory perspective view of the nozzle shutter viewed from a based end of the nozzle;

Fig. 25 is an explanatory cross-sectional view of the vicinity of a conveying nozzle of the toner replenishing device;

10 Fig. 26 is an explanatory perspective cross-sectional view of the vicinity of a nozzle opening of the conveying nozzle;

Fig. 27 is an explanatory perspective view of the vicinity of the conveying nozzle when the nozzle shutter is detached, viewed from the front end of the nozzle;

15 Fig. 28 is an explanatory perspective view of the vicinity of the nozzle opening when the nozzle shutter is detached;

Fig. 29 is a timing chart for a structure that first rotates the toner container and subsequently rotates a conveying screw;

20 Fig. 30A is an explanatory front view of a drive transmitter that differentiates rotation timings of the toner container and the conveying screw by using the same driving source;

Fig. 30B is an explanatory lateral cross-sectional view of the drive transmitter;

Fig. 31A is a schematic explanatory diagram illustrating a state where the toner container is attached to the toner replenishing device such that an edge (brim) of a front end opening and an edge of the nozzle receiver are at the same position in the rotation axis direction;

30

Fig. 31B is a schematic explanatory diagram illustrating a state where the toner container is attached to the toner replenishing device such that the edge of the nozzle receiver is located on the rear end of the container
5 relative to the edge of the front end opening;

Fig. 32 is an explanatory perspective view of the toner container in the state of being stored;

Fig. 33 is an explanatory cross-sectional view of the vicinity of a front end of the toner container to which a
10 cap is attached;

Fig. 34 is an explanatory cross-sectional view of a first example of the toner container when the cap is provided with an adsorption material;

Fig. 35 is an explanatory cross-sectional view of a
15 second example of the toner container when the cap is provided with the adsorption material;

Fig. 36 is an explanatory cross-sectional view of a third example of the toner container when the cap is provided with the adsorption material;

20 Fig. 37 is an explanatory cross-sectional view of a first example of the toner container when the cap is provided with a toner leakage preventer;

Fig. 38 is an explanatory cross-sectional view of a second example of the toner container when the cap is
25 provided with the toner leakage preventer;

Fig. 39 is an explanatory cross-sectional view of a third example of the toner container when the cap is provided with the toner leakage preventer;

Fig. 40 is an explanatory cross-sectional view of a
30 fourth example of the toner container when the cap is provided with the toner leakage preventer;

Fig. 41 is an explanatory cross-sectional view of a

fifth example of the toner container when the cap is provided with the toner leakage preventer;

Fig. 42 is an explanatory perspective view of a container shutter supporter used in the nozzle receiver
5 that is fixed to the container body by screwing;

Fig. 43 is an explanatory diagram illustrating a front view of the container body in the rotation axis direction;

Fig. 44 is a cross-sectional view taken along E-E in Fig. 9 for explaining a configuration in which shutter side
10 supporting portions have a bridging function;

Fig. 45A is a schematic cross-sectional view taken along E-E in Fig. 9 for explaining a configuration in which the bridging function is not provided;

Fig. 45B is a schematic cross-sectional view taken
15 along E-E in Fig. 9 for explaining a configuration in which shutter side supporting portions 335a have the bridging function;

Fig. 46 is a graph showing a relationship between a toner remaining amount in the container and a replenishing
20 speed according to the embodiment and a comparative example;

Fig. 47A is an explanatory diagram of a configuration in which scooping ribs are provided as the scooping portion, in particular, an explanatory perspective view of a nozzle
25 receiver;

Fig. 47B is an explanatory cross-sectional view illustrating a state where the nozzle receiver illustrated in Fig. 47A is mounted on the container body;

Fig. 47C is a lateral cross-sectional view of the
30 entire toner container on which the nozzle receiver illustrated in Fig. 47A is mounted;

Fig. 47D is a perspective view of a container shutter

included in the toner container illustrated in Fig. 47C;

Fig. 48A is an explanatory perspective view illustrating a state where a nozzle receiver is dismounted from the container body of the toner container according to
5 a fourteenth embodiment;

Fig. 48B is an enlarged view of a nozzle receiver engaging protrusion;

Fig. 49 is an explanatory perspective view of the front end of the toner container and the container setting
10 section according to the fourteenth embodiment;

Fig. 50A is a cross-sectional view of the vicinity of the front end of the toner container according to the fourteenth embodiment;

Fig. 50B is an explanatory enlarged view of a region n
15 illustrated in Fig. 50A;

Fig. 51A is an explanatory perspective view of a nozzle receiver of the toner container according to a sixteenth embodiment;

Fig. 51B is an explanatory perspective view of the
20 container body of the toner container according to the sixteenth embodiment;

Fig. 52A is an explanatory perspective view of a nozzle receiver of the toner container according to a seventeenth embodiment;

Fig. 52B is an explanatory perspective view of the
25 container body of the toner container according to the seventeenth embodiment;

Fig. 53A is an explanatory enlarged perspective view of a front end opening of the toner container according to
30 an eighteenth embodiment;

Fig. 53B is an explanatory enlarged cross-sectional view of a nozzle receiver fixing portion of the toner

container according to the eighteenth embodiment;

Fig. 53C is an explanatory enlarged perspective view of the vicinity of a front end of the toner container according to the eighteenth embodiment;

5 Fig. 54A is an explanatory enlarged perspective view of a front end opening of the toner container according to a nineteenth embodiment;

Fig. 54B is an explanatory enlarged perspective view of a nozzle receiver fixing portion of the toner container
10 according to the nineteenth embodiment

Fig. 55 is an explanatory perspective view of a connector fixed to the toner replenishing device and the front end of the toner container;

Fig. 56 is an explanatory perspective view of the
15 front end of the toner container and the connector, when an ID tag (ID chip) holding structure is disassembled;

Fig. 57 is an explanatory perspective view of the front end of the toner container and the connector, when an ID tag (ID chip) is temporarily attached to an ID tag
20 holder;

Fig. 58A is a front view of the ID tag as one of three-view drawings;

Fig. 58B is a side view of the ID tag as one of the three-view drawings;

25 Fig. 58C is a back view of the ID tag as one of the three-view drawings;

Fig. 59 is a perspective view illustrating a relative positional relationship of the ID tag, the ID tag holder, and the connector;

30 Fig. 60 is a perspective view illustrating a state where the ID tag is engaged with the connector;

Figs. 61A and 61B are circuit diagrams of an

electrical circuit of the ID tag and an electrical circuit of the connector;

Fig. 62A is a front view of the ID tag held by the connector;

5 Fig. 62B is a front view of the ID tag rotated about a positioning ID tag hole;

Fig. 63 is a diagram illustrating the ID tag in contact with probes of a conduction inspection device;

10 Fig. 64A is an explanatory perspective view of the vicinity of the front end of the toner container when the position of the receiving opening in the rotation axis direction is the same as the position of the front end opening on the front end of the container;

15 Fig. 64B is an explanatory cross-sectional view of the vicinity of the front end of the toner container;

Fig. 65A is an explanatory perspective view of the nozzle shutter provided with a cylindrical seal;

Fig. 65B is an explanatory cross-sectional view of the nozzle shutter provided with the cylindrical seal; and

20 Fig. 66 is an explanatory diagram illustrating a relationship of a diameter of the outer surface of a container opening, an inner diameter of the nozzle receiving fixing portion, and diameters of parts including the container setting section of the toner replenishing
25 device.

BEST MODE (S) FOR CARRYING OUT THE INVENTION

<First Embodiment>

30 Exemplary embodiments of a copier (hereinafter, described as a copier 500) as an image forming apparatus according to the present invention will be explained below.

Fig. 2 is an overall configuration diagram of the

copier 500 common to first to twentieth embodiments. The copier 500 includes a copier body (hereinafter, described as a printer 100), a sheet feed table (hereinafter, described as a sheet feeder 200), and a scanner (hereinafter, described as a scanner 400) mounted on the printer 100.

Toner containers 32 (Y, M, C, K) serving as four powder containers corresponding to respective colors (yellow, magenta, cyan, black) are detachably (replaceably) attached to a container holding section 70 provided in the upper part of the printer 100. An intermediate transfer unit 85 is arranged below the container holding section 70.

The intermediate transfer unit 85 includes an intermediate transfer belt 48, four primary-transfer bias rollers 49 (Y, M, C, K), a secondary-transfer backup roller 82, a plurality of tension rollers, an intermediate-transfer cleaner (not illustrated), and the like. The intermediate transfer belt 48 is stretched and supported by a plurality of rollers and is endlessly moved in the arrow direction in Fig. 2 along with rotation of the secondary-transfer backup roller 82 that is one of the rollers.

In the printer 100, four image forming units 46 (Y, M, C, K) corresponding to the respective colors are arranged in a tandem manner so as to face the intermediate transfer belt 48. Four toner replenishing devices 60 (Y, M, C, K) are arranged below the four toner containers 32 (Y, M, C, K), respectively. The toner replenishing devices 60 (Y, M, C, K) supply (replenish) toner contained in the toner containers 32 (Y, M, C, K) to developing devices (powder using units) of the image forming units 46 (Y, M, C, K) corresponding to the respective colors.

As illustrated in Fig. 2, the printer 100 includes an

exposing device 47 serving as a latent image forming means below the four image forming units 46. The exposing device 47 exposes the surfaces of photoreceptors 41 (to be described later) to light based on image information of an original image read by the scanner 400 or based on image information input from an external apparatus, such as a personal computer, so that electrostatic latent images are formed on the surfaces of the photoreceptors 41. The exposing device 47 of the printer 100 employs a laser scanning system using a laser diode. However, exposing means having other configurations, for example, having an LED array, may be used.

Fig. 3 is a schematic diagram of an overall configuration of the image forming unit 46Y for yellow.

The image forming unit 46Y includes a drum-shaped photoreceptor 41Y as a latent image carrier. The image forming unit 46Y also includes a charging roller 44Y as a charging means, a developing device 50Y as a developing means, a photoreceptor cleaning device 42Y, and a neutralizing device (not illustrated), which are arranged around the photoreceptor 41Y. Image forming processes (a charging process, an exposing process, a developing process, a transfer process, and a cleaning process) are performed on the photoreceptor 41Y, so that a yellow image is formed on the photoreceptor 41Y.

The other three image forming units 46 (M, C, K) have almost the same configurations as the image forming unit 46Y for yellow except that colors of toner to be used are different, and images corresponding to the respective toner colors are formed on the image forming units 46 (M, C, K). Hereinafter, explanation of the other three image forming units 46 (M, C, K) will be omitted appropriately, and

explanation of only the image forming unit 46Y for yellow will be given.

The photoreceptor 41Y is rotated clockwise in Fig. 3 by a driving motor (not illustrated). The surface of the photoreceptor 41Y is uniformly charged at a position facing the charging roller 44Y (charging process). The surface of the photoreceptor 41Y then reaches an irradiation position of laser light L emitted by the exposing device 47, where an electrostatic latent image for yellow is formed through exposure scanning (exposing process). The surface of the photoreceptor 41Y then reaches a position facing the developing device 50Y, where the electrostatic latent image is developed and a yellow toner image is formed (developing process).

The four primary-transfer bias rollers 49 (Y, M, C, K) of the intermediate transfer unit 85 and the photoreceptors 41 (Y, M, C, K) sandwich the intermediate transfer belt 48, so that primary transfer nips are formed. A transfer bias with polarity opposite to the polarity of toner is applied to the primary-transfer bias rollers 49 (Y, M, C, K).

The surface of the photoreceptor 41Y, on which the toner image is formed through the developing process, reaches the primary transfer nip facing the primary-transfer bias roller 49Y across the intermediate transfer belt 48, and the toner image on the photoreceptor 41Y is transferred onto the intermediate transfer belt 48 at the primary transfer nip (primary transfer process). At this time, a slight amount of non-transferred toner remains on the photoreceptor 41Y. The surface of the photoreceptor 41Y, from which the toner image is transferred onto the intermediate transfer belt 48 at the primary transfer nip, reaches a position facing the photoreceptor cleaning device

42Y. At this position, the non-transferred toner remaining on the photoreceptor 41Y is mechanically collected by a cleaning blade 42a (cleaning process). The surface of the photoreceptor 41Y finally reaches a position facing the neutralizing device (not illustrated), where the residual potential on the photoreceptor 41Y is removed. In this way, a series of image forming processes performed on the photoreceptor 41Y is completed.

The above image forming processes are also performed on the other image forming units 46 (M, C, K) in the same manner as on the image forming unit 46Y for yellow. Specifically, the exposing device 47 arranged below the image forming units 46 (M, C, K) emits laser light L based on image information toward the photoreceptors 41 (M, C, K) of the image forming units 46 (M, C, K). More specifically, the exposing device 47 emits the laser light L from a light source and irradiates the photoreceptors 41 (M, C, K) with the laser light L via a plurality of optical elements while scanning the laser light L by a polygon mirror being rotated. Subsequently, toner images of the respective colors formed on the photoreceptors 41 (M, C, K) through the developing process are transferred onto the intermediate transfer belt 48.

At this time, the intermediate transfer belt 48 moves in the arrow direction in Fig. 2 and sequentially passes through the primary transfer nips of the primary-transfer bias rollers 49 (Y, M, C, K). Therefore, the toner images of the respective colors formed on the photoreceptors 41 (Y, M, C, K) are superimposed on the intermediate transfer belt 48 as primary transfer, so that a color toner image is formed on the intermediate transfer belt 48.

The intermediate transfer belt 48, on which the color

toner image is formed by superimposing the toner images of the respective colors, reaches a position facing a secondary transfer roller 89. At this position, the secondary-transfer backup roller 82 and the secondary transfer roller 89 sandwich the intermediate transfer belt 48, so that a secondary transfer nip is formed. The color toner image formed on the intermediate transfer belt 48 is transferred onto a recording medium P, such as a sheet of paper, conveyed to the position of the secondary transfer nip. At this time, non-transferred toner which has not been transferred onto the recording medium P remains on the intermediate transfer belt 48. The intermediate transfer belt 48 that has passed through the secondary transfer nip reaches the position of the intermediate-transfer cleaner (not illustrated), where the non-transferred toner on the surface is collected. In this way, a series of transfer processes performed on the intermediate transfer belt 48 is completed.

Movement of the recording medium P will be explained below.

The recording medium P is conveyed to the secondary transfer nip from a feed tray 26 of the sheet feeder 200 arranged below the printer 100 via a feed roller 27, a registration roller pair 28, and the like. Specifically, a plurality of recording media P is stacked in the feed tray 26. When the feed roller 27 is rotated counterclockwise in Fig. 2, the topmost recording medium P is fed to a nip between two rollers of the registration roller pair 28.

The recording medium P conveyed to the registration roller pair 28 temporarily stops at the position of the nip between the rollers of the registration roller pair 28, the rotation of which is being stopped. The registration

roller pair 28 is rotated to convey the recording medium P toward the secondary transfer nip in accordance with the timing at which the color toner image on the intermediate transfer belt 48 reaches the secondary transfer nip.

5 Accordingly, a desired color image is formed on the recording medium P.

The recording medium P on which the color toner image is transferred at the secondary transfer nip is conveyed to the position of a fixing device 86. In the fixing device
10 86, the color toner image transferred on the surface of the recording medium P is fixed to the recording medium P by heat and pressure applied by a fixing belt and a pressing roller. The recording medium P that has passed through the fixing device 86 is discharged to the outside of the
15 apparatus via a nip between rollers of a discharge roller pair 29. The recording medium P discharged to the outside of the apparatus by the discharge roller pair 29 is sequentially stacked, as an output image, on a stack section 30. In this way, a series of image forming
20 processes in the copier 500 is completed.

A configuration and operation of the developing device 50 in the image forming unit 46 will be explained in detail below. In the following, the image forming unit 46Y for yellow will be explained by way of example. However, the
25 same applies to the image forming units 46 (M, C, K) for the other colors.

As illustrated in Fig. 3, the developing device 50Y includes a developing roller 51Y, a doctor blade 52Y, two developer conveying screws 55Y, a toner density sensor 56Y,
30 and the like. The developing roller 51Y faces the photoreceptor 41Y. The doctor blade 52Y faces the developing roller 51Y. The two developer conveying screws

55Y are arranged inside two developer accommodating portions (53Y, 54Y). The developing roller 51Y includes a magnet roller fixed inside thereof and a sleeve that rotates around the magnet roller. Two-component developer G formed of carrier and toner is stored in the first developer accommodating portion 53Y and the second developer accommodating portion 54Y. The second developer accommodating portion 54Y communicates with a toner dropping passage 64Y via an opening formed in the upper part thereof. The toner density sensor 56Y detects toner density in the developer G stored in the second developer accommodating portion 54Y.

The developer G in the developing device 50 circulates between the first developer accommodating portion 53Y and the second developer accommodating portion 54Y while being stirred by the two developer conveying screws 55Y. The developer G in the first developer accommodating portion 53Y is supplied to and carried on the surface of the sleeve of the developing roller 51Y due to the magnetic field formed by the magnet roller in the developing roller 51Y while the developer G is being conveyed by one of the developer conveying screws 55Y. The sleeve of the developing roller 51Y rotates counterclockwise as indicated by an arrow in Fig. 3, and the developer G carried on the developing roller 51Y moves on the developing roller 51Y along with the rotation of the sleeve. At this time, the toner in the developer G electrostatically adheres to the carrier by being charged to the potential opposite to the polarity of the carrier due to triboelectric charging with the carrier in the developer G, and is carried on the developing roller 51Y together with the carrier that is attracted by the magnetic field formed on the developing

roller 51Y.

The developer G carried on the developing roller 51Y is conveyed in the arrow direction in Fig. 3 and reaches a doctor portion where the doctor blade 52Y and the
5 developing roller 51Y face each other. The developer G on the developing roller 51Y is adjusted to an appropriate amount when passing through the doctor portion, and then conveyed to a development area facing the photoreceptor 41Y. In the development area, the toner in the developer G
10 adheres to the latent image formed on the photoreceptor 41Y by a developing electric field formed between the developing roller 51Y and the photoreceptor 41Y. The developer G remaining on the surface of the developing roller 51Y that has passed through the development area
15 reaches the upper part of the first developer accommodating portion 53Y along with rotation of the sleeve, where the developer G is separated from the developing roller 51Y.

The toner density of the developer G in the developing device 50Y is adjusted to a predetermined range.
20 Specifically, toner contained in the toner container 32Y is supplied to the second developer accommodating portion 54Y via the toner replenishing device 60Y (to be described later) in accordance with the amount of toner consumed from the developer G in the developing device 50Y through the
25 development.

The toner supplied to the second developer accommodating portion 54Y circulates between the first developer accommodating portion 53Y and the second developer accommodating portion 54Y while being mixed and
30 stirred with the developer G by the two developer conveying screws 55Y.

The toner replenishing devices 60 (Y, M, C, K) will be

explained below.

Fig. 4 is a schematic diagram of how the toner container 32Y is attached to the toner replenishing device 60Y. Fig. 5 is a schematic perspective view of how the four toner containers 32 (Y, M, C, K) are attached to the container holding section 70.

Toner contained in the toner containers 32 (Y, M, C, K) attached to the container holding section 70 of the printer 100 is appropriately supplied to the developing devices 50 (Y, M, C, K) by the toner replenishing devices 60 (Y, M, C, K) for the respective colors, in accordance with the consumption of toner in the developing devices 50 (Y, M, C, K) for the respective colors. At this time, toner in the toner containers 32 (Y, M, C, K) is replenished by the toner replenishing devices 60 (Y, M, C, K) provided for the respective colors. The four toner replenishing devices 60 (Y, M, C, K) have almost the same configurations and the toner containers 32 (Y, M, C, K) have almost the same configurations, except that colors of toner used for the image forming processes are different. Therefore, explanation of only the toner replenishing device 60Y and the toner container 32Y for yellow will be given below, and explanation of the toner replenishing devices 60 (M, C, K) and the toner containers 32 (M, C, K) for the other three colors will be omitted appropriately.

The toner replenishing device 60 (Y, M, C, K) is formed of the container holding section 70, a conveying nozzle 611 (Y, M, C, K), a conveying screw 614 (Y, M, C, K), the toner dropping passage 64 (Y, M, C, K), and a container driving section 91 (Y, M, C, K).

When the toner container 32Y moves in the arrow Q direction in Fig. 4 and attached to the container holding

section 70 of the printer 100, the conveying nozzle 611Y of the toner replenishing device 60Y is inserted from the front end of the toner container 32Y along with the attachment operation. Consequently, the toner container 5 32Y and the conveying nozzle 611Y communicate with each other. A configuration for enabling the communication along with the attachment operation will be described in detail later.

As an embodiment of a toner container common to the 10 first to the twentieth embodiments, the toner container 32Y is an approximately cylindrical toner bottle, and mainly includes a container front end cover 34Y that is non-rotatably held by the container holding section 70 and includes a container body 33Y integrated with a container 15 gear 301Y. The container body 33Y is held so as to rotate relative to the container front end cover 34Y.

The container holding section 70 mainly includes a container cover receiving section 73, a container receiving section 72, and an insert hole section 71. The container 20 cover receiving section 73 is a section for holding the container front end cover 34Y of the toner container 32Y. The container receiving section 72 is a section for holding the container body 33Y of the toner container 32Y. The insert hole section 71 forms an insert hole used in the 25 attachment operation of the toner container 32Y. When a body cover (not illustrated) arranged on the front side of the copier 500 (the front side in the direction normal to the sheet of Fig. 2) is opened, the insert hole section 71 of the container holding section 70 is exposed.

30 Attachment/detachment operation of each of the toner containers 32 (Y, M, C, K) (attachment/detachment operation with the longitudinal direction of the toner containers 32

taken as an attachment/detachment direction) is performed from the front side of the copier 500 while each of the toner containers 32 (Y, M, C, K) is oriented with its longitudinal direction made parallel to the horizontal direction. A setting cover 608Y in Fig. 4 is a part of the container cover receiving section 73 of the container holding section 70.

The container receiving section 72 is formed such that its longitudinal length is approximately the same as the longitudinal length of the container body 33Y. The container cover receiving section 73 is arranged on a container front end of the container receiving section 72 in the longitudinal direction (attachment/detachment direction) and the insert hole section 71 is arranged on one end of the container receiving section 72 in the longitudinal direction. Therefore, along with the attachment operation of the toner container 32Y, the container front end cover 34Y first passes through the insert hole section 71, slides on the container receiving section 72 for a while, and is finally attached to the container cover receiving section 73.

When the container driving section 91Y including a driving motor, a driving gear, or the like inputs rotation drive to the container gear 301Y provided in the container body 33Y via a container driving gear 601Y while the container front end cover 34Y is attached to the container cover receiving section 73, the container body 33Y rotates in the arrow A direction in Fig. 4. With the rotation of the container body 33Y, a spiral rib 302Y formed in a spiral shape on the inner surface of the container body 33Y conveys toner in the container body 33Y from the left to the right in Fig. 4 along the longitudinal direction of the

container body. Consequently, the toner is supplied from the container front end cover 34Y side to the inside of the conveying nozzle 611Y.

The conveying screw 614Y is arranged in the conveying nozzle 611Y. When the container driving section 91Y inputs rotation drive to a conveying screw gear 605Y, the conveying screw 614Y rotates and the toner supplied in the conveying nozzle 611Y is conveyed. The downstream end of the conveying nozzle 611Y in the conveying direction is connected to the toner dropping passage 64Y, and the toner conveyed by the conveying screw 614Y falls along the toner dropping passage 64Y by gravity and is supplied to the developing device 50Y (the second developer accommodating portion 54Y).

The toner containers 32 (Y, M, C, K) are replaced with new ones at the end of their lifetimes (when the container becomes empty because almost all of contained toner is consumed). A gripper 303 is arranged on an end portion of the toner container 32 opposite the container front end cover 34 in the longitudinal direction. When the toner container 32 is to be replaced, an operator can grip the gripper 303 to pull out and detach the attached toner container 32.

A controller 90 calculates, in some cases, a consumption amount of toner based on image information used by the exposing device 47 described above and determines that it is necessary to supply toner to the developing device 50Y. The controller 90 detects, in some cases, a decrease in the toner density in the developing device 50Y based on a detection result of the toner density sensor 56Y. In these cases, the controller 90 rotates the container driving section 91Y to rotate the container body 33Y of the

toner container 32Y and the conveying screw 614Y for a predetermined time to thereby supply toner to the developing device 50Y. Because the toner is supplied by rotating the conveying screw 614Y arranged in the conveying nozzle 611Y, it is possible to accurately calculate the supply amount of toner from the toner container 32Y by detecting the rotation frequency of the conveying screw 614Y. If the supply amount of toner that has cumulatively been calculated since attachment of the toner container 32Y reaches the amount of toner that had been contained in the toner container 32Y at the time of the attachment, it is determined that the toner container 32Y is empty of toner and a notice for urging replacement of the toner container 32Y is displayed on a display (not illustrated) of the copier 500.

In some cases, even when the toner density sensor 56Y detects a decrease in the toner density and repeats replenishment and determination of whether the toner density is recovered, the toner density sensor 56Y cannot detect recovery of the toner density. In this case, it is determined that the toner container 32Y is empty of toner and a notice for urging replacement of the toner container 32Y is displayed on the display (not illustrated) of the copier 500.

The toner replenishing device 60Y common to the first to the twentieth embodiments controls the amount of toner supplied to the developing device 50Y in accordance with the rotation frequency of the conveying screw 614Y. Therefore, toner that passes through the conveying nozzle 611Y is directly conveyed to the developing device 50Y via the toner dropping passage 64Y without controlling the supply amount of toner to the developing device 50Y. Even

in the toner replenishing device 60Y configured to insert the conveying nozzle 611Y into the toner container 32Y as described in the present embodiment, it may be possible to provide a temporary toner storage, such as a toner hopper.

5 In this case, the amount of toner supplied to the developing device 50Y may be controlled by controlling the amount of toner conveyed from the temporary toner storage to the developing device 50Y.

Furthermore, while the toner replenishing device 60Y
10 according to the present embodiment uses the conveying screw 614Y for conveying the toner supplied in the conveying nozzle 611Y, the configuration for conveying the toner supplied in the conveying nozzle 611Y is not limited to the screw. It may be possible to apply a conveying
15 force by using other than the screw, for example, by using a powder pump for generating a negative pressure at the opening of the conveying nozzle 611Y as described in Patent Document 6.

In the configuration including the temporary toner
20 storage, a toner end sensor is provided for detecting that the amount of toner stored in the temporary toner storage becomes a predetermined amount or smaller. Toner is supplied to the temporary toner storage by rotating the container body 33Y and the conveying screw 614Y for a
25 predetermined time based on a toner end detection of the toner end sensor. When the toner end detection of the toner end sensor is not cancelled even after the above control is repeated, it is determined that the toner container 32Y is empty of toner and a notice for urging
30 replacement of the toner container 32Y is displayed on the display (not illustrated) of the copier 500. In this way, if whether the toner container 32Y becomes empty of toner

is detected based on the toner end detection by the toner end sensor, it is not necessary to cumulatively calculate the supply amount of toner since attachment of the toner container 32Y. However, if the temporary toner storage is not provided as in the toner replenishing device 60Y according to the present embodiment, it is possible to reduce the size of the toner replenishing device 60Y, enabling to reduce the overall size of the copier 500.

The toner containers 32 (Y, M, C, K) and the toner replenishing devices 60 (Y, M, C, K) common to the first to the twentieth embodiments will be explained in detail below. As described above, the toner containers 32 (Y, M, C, K) and the toner replenishing devices 60 (Y, M, C, K) have almost the same configurations except that colors of toner to be used are different. Therefore, in the following explanation, symbols Y, M, C, and K representing the colors of toner will be omitted.

Fig. 6 is an explanatory perspective view of the toner container 32 common to the first to the twentieth embodiments. Fig. 7 is an explanatory perspective view of the toner replenishing device 60 before the toner container 32 is attached and a front end of the toner container 32. Fig. 8 is an explanatory perspective view of the toner replenishing device 60 to which the toner container 32 is attached and the front end of the toner container 32.

Fig. 1 is an explanatory cross-sectional view of the toner replenishing device 60 before the toner container 32 is attached and the front end of the toner container 32. Fig. 9 is an explanatory cross-sectional view of the toner replenishing device 60 to which the toner container 32 is attached and the front end of the toner container 32.

The toner replenishing device 60 includes the

conveying nozzle 611 inside which the conveying screw 614 is arranged. The toner replenishing device 60 further includes a nozzle shutter 612. The nozzle shutter 612 closes a nozzle opening 610 formed on the conveying nozzle 611 at the time of detachment, which is before the toner container 32 is attached (in the states in Fig. 1 and Fig. 7), and opens the nozzle opening 610 at the time of attachment, which is when the toner container 32 is attached (in the states in Fig. 8 and Fig. 9). Meanwhile, a receiving opening 331, into which the conveying nozzle 611 is inserted at the time of attachment, is formed in the center of the end surface of the toner container 32, and a container shutter 332 that closes the receiving opening 331 at the time of detachment is provided.

The toner container 32 will be explained below.

As described above, the toner container 32 mainly includes the container body 33 and the container front end cover 34. Fig. 10 is an explanatory perspective view of the toner container 32 when the container front end cover 34 is detached. As illustrated in Fig. 10, the toner container 32 from which the container front end cover 34 is detached includes the container body 33 and a nozzle receiver 330 that forms the receiving opening 331.

Fig. 11 is an explanatory perspective view of the toner container 32 when the nozzle receiver 330 is detached from the container body 33. Fig. 12 is an explanatory cross-sectional view of the toner container 32 when the nozzle receiver 330 is detached from the container body 33. Fig. 13 is an explanatory cross-sectional view of the toner container 32 when the nozzle receiver 330 is attached to the container body 33 from the state illustrated in Fig. 12 (the container front end cover 34 is detached from the

31

toner container 32 similarly to Fig. 10).

The container body 33 is in the form of an approximate cylinder and rotates about a central axis of the cylinder as a rotation axis. Hereinafter, a direction parallel to the rotation axis is referred to as "a rotation axis direction" and one side of the toner container 32 where the receiving opening 331 is formed (the side where the container front end cover 34 is arranged) in the rotation axis direction may be referred to as "a container front end". The container front end is referred to as a first end too. Furthermore, the other side of the toner container 32 where the gripper 303 is arranged (the side opposite the container front end) may be referred to as "a container rear end". The container rear end is referred to as a second end too. The longitudinal direction of the toner container 32 described above is the rotation axis direction, and the rotation axis direction becomes a horizontal direction when the toner container 32 is attached to the toner replenishing device 60. The container rear end of the container body 33 relative to the container gear 301 has a greater outer diameter than that of the container front end, and the spiral rib 302 is formed on the inner surface of the container rear end. When the container body 33 rotates in the arrow A direction in Fig. 10, a conveying force for moving toner from one end (the container rear end) to the other end (the container front end) in the rotation axis direction is applied to the toner in the container body 33 due to the action of the spiral rib 302.

Scooping portions 304 are formed on the inner wall of the front end of the container body 33. The scooping portions 304 scoop up toner, which has been conveyed to the container front end by the spiral rib 302 along with the

rotation of the container body 33 in the arrow A direction in Fig. 10, along with rotation of the container body 33. Each of the scooping portions 304 is formed of a convex 304h and a scooping wall surface 304f. The convex 304h rises inside the container body 33 so as to form a ridge toward the rotation center of the container body 33 in a spiral form. The scooping wall surface 304f is an inner wall surface that is a part of the wall surface of a rising portion continued from the convex 304h (ridge) to the inner wall of the container body 33 and that is on the downstream side in the rotation direction of the container. When the scooping wall surface 304f is located in the lower part, the scooping wall surface 304f scoops up toner, which has been entered into the scooping portion 304 by the conveying force of the spiral rib 302, along with rotation of the conveying body 33. Therefore, the toner can be scooped up and located above the inserted conveying nozzle 611.

As illustrated in Fig. 1 and Fig. 10 for example, a scooping portion spiral rib 304a in a spiral shape is formed on the inner surface of the scooping portion 304 in order to convey toner inside the scooping portion 304, similarly to the spiral rib 302.

The container gear 301 is formed on the container front end relative to the scooping portion 304 of the container body 33. A gear exposing hole 34a is arranged on the container front end cover 34 so that a part of the container gear 301 (a far side in Fig. 6) can be exposed when the container front end cover 34 is attached to the container body 33. When the toner container 32 is attached to the toner replenishing device 60, the container gear 301 exposed from the gear exposing hole 34a is engaged with a container driving gear 601 of the toner replenishing device

33

60.

A cylindrical container opening 33a is formed on the container front end relative to the container gear 301 of the container body 33. A nozzle receiver fixing portion 5 337 of the nozzle receiver 330 is press fitted to the container opening 33a so that the nozzle receiver 330 can be fixed to the container body 33. A method for fixing the nozzle receiver 330 is not limited to press fitting. Other methods including fixing with adhesive agent or fixing with 10 screws may be applied.

The toner container 32 is configured such that the nozzle receiver 330 is fixed to the container opening 33a of the container body 33 after the container body 33 is filled with toner via the opening of a front end opening 15 305.

A cover hooked portion 306 is formed on the container opening 33a and is arranged beside the container gear 301 of the container body 33. The container front end cover 34 is attached to the toner container 32 (the container body 20 33) in the state illustrated in Fig. 10 from the container front end (from the bottom left side in Fig. 10). Consequently, the container body 33 penetrates through the container front end cover 34 in the rotation axis direction, and a cover hook 341 arranged in the front end part of the 25 container front end cover 34 is engaged with the cover hooked portion 306. The cover hooked portion 306 is formed so as to surround the outer surface of the container opening 33a, and when the cover hook 341 is engaged, the container body 33 and the container front end cover 34 are 30 attached so as to rotate relative to each other.

The container body 33 is molded by a biaxial stretch blow molding method (see Patent Documents 1 to 3). The

biaxial stretch blow molding method generally includes two-stage processes including a preform molding process and a stretch blow molding process. In the preform molding process, a test-tube shaped preform is molded with resin by injection molding. By the injection molding, the container opening 33a, the cover hooked portion 306, and the container gear 301 are formed at the opening of the test-tube shape. In the stretch blow molding process, the preform that is cooled after the preform molding process and detached from a mold is heated and softened, and then subjected to blow molding and stretching.

As for the container body 33, the container rear end relative to the container gear 301 is molded by the stretch blow molding process. Specifically, a portion where the scooping portion 304 and the spiral rib 302 are formed and the gripper 303 are molded by the stretch blow molding process.

In the container body 33, each of the parts, such as the container gear 301, the container opening 33a, and the cover hooked portion 306, on the container front end relative to the container gear 301 remains in the same form as in the preform generated by the injection molding; therefore, they can be molded with high accuracy. By contrast, the portion where the scooping portion 304 and the spiral rib 302 are formed and the gripper 303 are molded by stretching through the stretch blow molding process after the injection molding; therefore, the molding accuracy is lower than that of the preform molded parts.

The nozzle receiver 330 fixed to the container body 33 will be explained below.

Fig. 14 is an explanatory perspective view of the nozzle receiver 330 viewed from the container front end.

Fig. 15 is an explanatory perspective view of the nozzle receiver 330 viewed from the container rear end. Fig. 16 is a top cross-sectional view of the nozzle receiver 330 viewed from above in the state illustrated in Fig. 13. Fig. 17 is a transverse cross-sectional view of the nozzle receiver 330 viewed from side (from the back side of Fig. 13) in the state illustrated in Fig. 13. Fig. 18 is an exploded perspective view of the nozzle receiver 330.

The nozzle receiver 330 includes a container shutter supporter 340, the container shutter 332, a container seal 333, a container shutter spring 336, and the nozzle receiver fixing portion 337. The container shutter supporter 340 includes a shutter rear end supporting portion 335, shutter side supporting portions 335a, and the nozzle receiver fixing portion 337. The container shutter spring 336 is formed of a coil spring.

The container shutter 332 includes a front end cylindrical portion 332c, a sliding section 332d, a guiding rod 332e, and first shutter hooks 332a. The front end cylindrical portion 332c is a container front end portion which can fit a cylindrical opening (the receiving opening 331) of the container seal 333. The sliding section 332d is a cylindrical portion, which is formed on the container rear end side relative to the front end cylindrical portion 332c. The sliding section 332d has an outer diameter slightly greater than the front end cylindrical portion 332c, and slides on the inner surfaces of the shutter side supporting portions 335a as a pair. The guiding rod 332e is a rod portion, which stands from the inside of the front end cylindrical portion 332c toward the container rear end and which functions as a guide to prevent the container shutter spring 336 from being buckled by being inserted into the

36

coil of the container shutter spring 336. The first shutter hooks 332a are a pair of hooks, which are provided on the end opposite the base where the guiding rod 332e stands and which is configured to prevent the container shutter 332 from coming out of the container shutter supporter 340.

As illustrated in Fig. 16 and Fig. 17, a front end of the container shutter spring 336 butts against the inner wall of the front end cylindrical portion 332c, and a rear end of the container shutter spring 336 comes in contact with the wall of the shutter rear end supporting portion 335. At this time, the container shutter spring 336 is in a compressed state, so that the container shutter 332 receives a biasing force in a direction away from the shutter rear end supporting portion 335 (to the right or in the container front end direction in Fig. 16 and Fig. 17). However, the first shutter hooks 332a formed on the container rear end of the container shutter 332 is engaged with an outer wall of the shutter rear end supporting portion 335. Therefore, the container shutter 332 is prevented from moving farther in the direction away from the shutter rear end supporting portion 335 than in the state illustrated in Fig. 16 and Fig. 17. Due to the engaged state between the first shutter hooks 332a and the shutter rear end supporting portion 335 and the biasing force applied by the container shutter spring 336, it is possible to determine the positions of the front end cylindrical portion 332c and the container seal 333, which have a toner leakage preventing function, relative to the container shutter supporter 340 in the axial direction. Therefore, it is possible to determine the positions while the front end cylindrical portion 332c and the container

seal 333 are fitted, enabling to prevent toner leakage.

The nozzle receiver fixing portion 337 is in the form of a tube whose outer diameter and inner diameter are reduced in a stepped manner toward the container rear end.

5 The diameters are gradually reduced from the container front end to the container rear end. Two outer diameter portions (outer surfaces AA and BB from the container front end) are formed on the outer surface, and five inner diameter portions (inner surfaces CC, DD, EE, FF, and GG
10 from the container front end) are formed on the inner surface. The boundary between the outer surfaces AA and BB on the outer surface is connected by a tapered surface. Similarly, the boundary between the fourth inner diameter portion FF and the fifth inner diameter portion GG on the
15 inner surface is connected by a tapered surface. The inner diameter portion FF on the inner surface and the continued tapered surface correspond to a seal jam preventing space 337b to be described later, and the ridge lines of these surfaces correspond to sides of the cross-section of a
20 pentagon to be described later.

As illustrated in Fig. 16 to Fig. 18, a pair of the shutter side supporting portions 335a, which face each other and which have flake shapes obtained by cutting a cylinder in the axial direction, are provided so as to
25 protrude from the nozzle receiver fixing portion 337 toward the container rear end. The rear ends of the two shutter side supporting portions 335a are connected to the shutter rear end supporting portion 335 that has a cup shape with a hole open in the center of the bottom. In the two shutter
30 side supporting portions 335a, a cylindrical space S1 is formed, which is recognized due to inner cylindrical surfaces of the shutter side supporting portions 335a

facing each other and virtual cylindrical surfaces extending from the shutter side supporting portions 335a. The nozzle receiver fixing portion 337 includes the inner diameter portion GG, which is a fifth portion from the front end, as a cylindrical inner surface having an inner diameter that is the same as the diameter of the cylindrical space S1. The sliding section 332d of the container shutter 332 slides on the cylindrical space S1 and the cylindrical inner surface GG. The third inner surface EE of the nozzle receiver fixing portion 337 is a virtual cylindrical surface that passes through longitudinal apexes of nozzle shutter positioning ribs 337a that are equally spaced at 45°. The container seal 333 with a quadrangular cylindrical (cylindrical tube-shaped) cross section (the cross section in the cross-sectional view in Fig. 16 and Fig. 17) is arranged so as to correspond to the inner surface EE. The container seal 333 is fixed to a vertical surface connecting the third inner surface EE and the fourth inner surface FF, with an adhesive agent or double-stick tape. The exposed surface of the container seal 333 opposite the attachment surface (the right side in Fig. 16 and Fig. 17) serves as an inner bottom of the cylindrical opening of the cylindrical nozzle receiver fixing portion 337 (the container opening).

As illustrated in Fig. 16 and Fig. 17, the seal jam preventing space 337b (a catch preventing space) is formed so as to correspond to the inner surface FF of the nozzle receiver fixing portion 337 and the continued tapered surface. The seal jam preventing space 337b is an annular sealed space enclosed by three different parts.

Specifically, the seal jam preventing space 337b is an annular space enclosed by the inner surface (the fourth

inner surface FF and the continued tapered surface) of the nozzle receiver fixing portion 337, the vertical surface on the attachment side of the container seal 333, and the outer surface continuing from the front end cylindrical portion 332c to the sliding section 332d of the container shutter 332. A cross section of the annular space (the cross section illustrated in Fig. 16 and Fig. 17) is in the form of a pentagon. The angle between the inner surface of the nozzle receiver fixing portion 337 and the end surface of the container seal 333 and the angle between the outer surface of the container shutter 332 and the end surface of the container seal 333 are 90°.

Functions of the seal jam preventing space 337b will be described below. When the container shutter 332 moves to the container rear end while closing the receiving opening 331, the inner surface of the container seal 333 slides against the front end cylindrical portion 332c. Therefore, the inner surface of the container seal 333 is pulled by the container shutter 332 and elastically deformed so as to move toward the container rear end.

At this time, if the seal jam preventing space 337b is not provided and the vertical surface (the attachment surface of the container seal 333) continued from the third inner surface and the fifth inner surface GG are connected perpendicular to each other, the following situation may occur. Specifically, the elastically-deformed portion of the container seal 333 may be caught between the inner surface of the nozzle receiver fixing portion 337 sliding against the container shutter 332 and the outer surface of the container shutter 332, resulting in causing a jam. If the container seal 333 is jammed in the portion where the nozzle receiver fixing portion 337 and the container

shutter 332 slide against each other, that is, between the front end cylindrical portion 332c and the inner surface GG, the container shutter 332 is firmly fixed to the nozzle receiver fixing portion 337, so that it becomes impossible to open and close the receiving opening 331.

By contrast, the seal jam preventing space 337b is formed on the inner area of the nozzle receiver 330 of the present embodiment. The inner diameter of the seal jam preventing space 337b (the inner diameter of each of the inner surface EE and the continued tapered surface) is smaller than the outer diameter of the container seal 333. Therefore, the entire container seal 333 can hardly enter the seal jam preventing space 337b. Furthermore, a part (area) of the container seal 333 to be elastically deformed by being pulled by the container shutter 332 is limited, and the container seal 333 can be restored by its own elasticity before the container seal 333 is brought to and jammed at the inner surface GG. With this action, it is possible to prevent a situation where the receiving opening 331 cannot be opened and closed because of fixed state between the container shutter 332 and the nozzle receiver fixing portion 337.

As illustrated in Fig. 16 to Fig. 18, a plurality of the nozzle shutter positioning ribs 337a are formed so as to radially extend, on the inner surface of the nozzle receiver fixing portion 337 in contact with the outer circumference of the container seal 333. As illustrated in Fig. 16 and Fig. 17, when the container seal 333 is fixed to the nozzle receiver fixing portion 337, the vertical surface of the container seal 333 on the container front end slightly protrudes relative to the front ends of the nozzle shutter positioning ribs 337a in the rotation axis

direction. As illustrated in Fig. 9, when the toner container 32 is attached to the toner replenishing device 60, a nozzle shutter flange 612a of the nozzle shutter 612 of the toner replenishing device 60 presses down the protruding part of the container seal 333 by being biased by a nozzle shutter spring 613. The nozzle shutter flange 612a further moves and covers the front end surface of the container seal 333 from the receiving opening 331 side of the container seal 333 abutting the container front end of the nozzle shutter positioning ribs 337a, thereby sealing the container from the outside. Therefore, it is possible to ensure the sealing performance in the vicinity of the conveying nozzle 611 at the receiving opening 331 at the time of attachment, enabling to prevent toner leakage.

The back side of a nozzle shutter spring receiving surface 612f of the nozzle shutter flange 612a biased by the nozzle shutter spring 613 butts against the nozzle shutter positioning ribs 337a, so that the position of the nozzle shutter 612 relative to the toner container 32 in the rotation axis direction is determined.

As illustrated in Fig. 9 for example, when the toner container 32 is attached to the body of the toner replenishing device 60, the nozzle shutter 612 as a contact member and the nozzle shutter spring 613 as a biasing member are accommodated in the front end opening 305 that is a cylindrical inner space. To realize the above configuration, in the followings, explanation is given of a relationship of the diameter of the outer surface of the cylindrical container opening 33a, the inner diameter of the nozzle receiver fixing portion 337, and the diameters of parts including a container setting section 615 of the toner replenishing device 60.

Fig. 66 is an explanatory diagram illustrating a relationship of the diameter of the outer surface of the container opening 33a, the inner diameter of the nozzle receiver fixing portion 337, and the diameters of parts including the container setting section 615 of the toner replenishing device 60.

As will be described later, the container setting section 615 includes an inner surface 615a of the container setting section that is fitted to the outer surface of the cylindrical container opening 33a of the toner container 32 when the toner container 32 is set. The inner diameter of the inner surface 615a is denoted by $D1$. The diameter of the outer surface of the cylindrical container opening 33a of the toner container 32 is denoted by $d1$.

The nozzle shutter 612 provided on the conveying nozzle 611 includes the nozzle shutter flange 612a, and the outer diameter of the nozzle shutter flange 612a is denoted by $D2$. The inner diameter of the nozzle receiver fixing portion 337 on the outer side relative to the container seal 333 in the axial direction (the inner diameter of the second inner surface from the container front end) among the inner diameters of the nozzle receiver fixing portion 337 is denoted by $d2$, and the outer diameter of the container seal 333 is denoted by $d3$. The nozzle shutter positioning ribs 337a come in contact with the outer surface of the container seal 333 and are arranged between the outer surface of the container seal 333 and the second inner surface of the nozzle receiver fixing portion 337 from the front end. The outer diameter of the nozzle shutter 612 (the outer diameter of a nozzle shutter tube 612e to be described later) is denoted by $D3$, and the inner diameter of the container seal 333 is denoted by $d2$.

When the toner container 32 is attached, the conveying nozzle 611 enters the receiving opening 331 while the nozzle opening 610 is closed by the nozzle shutter 612. The nozzle shutter flange 612a comes in contact with the container seal 333 and subsequently presses the container seal 333 down. Thereafter, the nozzle shutter flange 612a butts against the front ends of the nozzle shutter positioning ribs 337a, so that the nozzle opening 610 is opened and the inside of the toner container 32 and the inside of the conveying nozzle 611 communicate with each other. At this time, the outer surface of the cylindrical container opening 33a of the toner container 32 and the inner surface 615a of the container setting section are fitted to each other, and the container body 33 is rotatably held at the fitted position.

To rotatably fit the outer surface of the cylindrical container opening 33a of the toner container 32 and the inner surface 615a of the container setting section, the diameter $d1$ of the outer surface of the cylindrical container opening 33a of the toner container 32 and the inner diameter $D1$ of the inner surface 615a of the container setting section are set such that " $d1 < D1$ ". Furthermore, $d1$ and $D1$ are set so that a fit tolerance becomes 0.01 mm to 0.1 mm. By maintaining the relationship of " $d1 < D1$ ", it is possible to rotate the container body 33 while holding it to the container setting section 615.

The conveying nozzle 611 and the nozzle shutter 612 are configured such that they enter the receiving opening 331 while the nozzle opening 610 of the conveying nozzle 611 is closed by the nozzle shutter 612. To realize the configuration, the outer diameter $D2$ of the nozzle shutter flange 612a and the inner diameter $d2$ of the nozzle

receiver fixing portion 337 on the outer side relative to the container seal 333 in the axial direction (the inner diameter of the second inner surface DD from the container front end) among the inner diameters of the nozzle receiver
5 fixing portion 337 are set such that " $D2 < d2$ ".

To cause the nozzle shutter flange 612a to come in contact with and press down the container seal 333 and subsequently butt against the front ends of the nozzle shutter positioning ribs 337a, the outer diameter D2 of the
10 nozzle shutter flange 612a is set such that " $D2 > d3$ ". Specifically, a relationship of " $d3 < D2 < d2$ " is set among the outer diameter D2 of the nozzle shutter flange 612a, the inner diameter d2 of the nozzle receiver fixing portion 337 on the outer side relative to the container seal 333 in
15 the axial direction among its inner diameters, and the outer diameter d3 of the container seal 333.

With the above setting, it becomes possible to accommodate the nozzle shutter 612 in the front end opening 305 of the toner container 32 (inside the nozzle receiver
20 fixing portion 337). While the container seal 333 and the nozzle shutter flange 612a slide against each other along with rotation of the container body 33, it is possible to prevent damage on the container seal 333 due to the sliding. This is because the nozzle shutter flange 612a is in
25 contact with the nozzle shutter positioning ribs 337a so as not to excessively press the container seal 333 down and it is possible to suppress a sliding load. Furthermore, because the nozzle shutter flange 612a moderately fits the container seal 333 while pressing the container seal 333
30 down, it is possible to reduce toner scattering that may occur at the time of attachment of the toner container 32.

Moreover, the outer diameter D3 of the nozzle shutter

612 and the inner diameter d_4 of the container seal 333 of the nozzle receiver 330 are set such that " $d_4 < D_3$ ". With this setting, the inner diameter of the container seal 333 is stretched along with insertion of the conveying nozzle 5 611, so that the container seal 333 can appropriately fit the nozzle shutter 612. Therefore, it is possible to prevent toner leakage from the toner container 32 to the outside while the conveying nozzle 611 is inserted.

To put all the above relationships together, each of 10 the parts of the toner container 32 is set such that a relationship of " $d_4 < D_3 < d_3 < D_2 < d_2 < d_1 < D_1$ " for the diameters can be obtained. With this setting, it is possible to realize both the sealing capability for preventing scattering or leakage of toner from the toner 15 container 32 and the housing capability for housing the nozzle shutter 612 and the nozzle shutter spring 613.

As will be described later, when the toner container 32 is attached, the nozzle opening 610 is opened after the nozzle shutter flange 612a butts against the nozzle shutter 20 positioning ribs 337a and the position of the nozzle shutter 612 relative to the toner container 32 is fixed. On the other hand, when the toner container 32 is detached, even after the conveying nozzle 611 starts to be removed from the toner container 32, the position of the nozzle 25 shutter 612 relative to the toner container 32 does not change because of the biasing force of the nozzle shutter spring 613 while the nozzle opening 610 is open.

When the toner container 32 is pulled out, the position of the toner container 32 relative to the 30 conveying nozzle 611 changes, so that the position of the nozzle shutter 612 relative to the conveying nozzle 611 also changes. Consequently, the nozzle shutter 612 starts

closing the nozzle opening 610. At this time, a distance between the toner container 32 and the container setting section 615 becomes longer along with the pull-out operation of the toner container 32. Therefore, the nozzle shutter spring 613 extends to the natural length due to its
5 own restoring force, so that the biasing force applied to the nozzle shutter 612 is reduced.

When the toner container 32 is further pulled out and the nozzle shutter 612 completely closes the nozzle opening
10 610, a part of the nozzle shutter 612 (in particular, "a first inner rib 612b" to be described later) butts against a part of the conveying nozzle 611. With this butt contact, the position of the nozzle shutter 612 relative to the conveying nozzle 611 is fixed, and the butt contact of the
15 nozzle shutter 612 with the nozzle shutter positioning ribs 337a is released.

Thereafter, the toner container 32 is further pulled out, so that the nozzle shutter 612 is removed from the toner container 32 together with the conveying nozzle 611.

20 When the nozzle shutter flange 612a is in butt-contact with the nozzle shutter positioning ribs 337a, a portion where the nozzle opening 610 is formed on the conveying nozzle 611 is fully inside the toner container 32 relative to an inlet of the receiving opening 331. Specifically,
25 the nozzle opening is located at the position opposite the scooping portion 304 where the nozzle opening 331 goes over the container gear 301 in the rotation axis direction. Because the nozzle opening 610 is opened while it is fully inside the toner container 32, it is possible to prevent
30 toner leakage from the nozzle opening 610 to the outside.

The shutter side supporting portions 335a and a space 335b between the side supporting portions, which is as an

opening arranged adjacent to the side supporting portion,
are formed such that the two shutter side supporting
portions 335a facing each other form a part of a
cylindrical shape and an another part of the cylindrical
5 shape is cut out at two portions of the space 335b between
the side supporting portions. With this shape, it is
possible to guide the container shutter 332 to move in the
rotation axis direction in the cylindrical space S1 formed
inside the cylindrical shape.

10 The nozzle receiver 330 fixed to the container body 33
rotates together with the container body 33 when the
container body 33 rotates. At this time, the shutter side
supporting portions 335a of the nozzle receiver 330 rotate
around the conveying nozzle 611 of the toner replenishing
15 device 60. Therefore, the shutter side supporting portions
335a being rotated pass a space just above the nozzle
opening 610 formed in the upper part of the conveying
nozzle 611. Consequently, even when toner is
instantaneously accumulated above the nozzle opening 610,
20 because the shutter side supporting portions 335a cross the
accumulated toner and alleviate the accumulation, it is
possible to prevent a situation in which the accumulated
toner is aggregated in the rest state and a toner conveying
failure occurs when the device is resumed. On the other
25 hand, when the shutter side supporting portions 335a are
located on the side of the conveying nozzle 611 and the
nozzle opening 610 and the space 335b between the side
supporting portions face each other, toner in the container
body 33 is supplied to the conveying nozzle 611 as
30 indicated by an arrow β in Fig. 9.

As illustrated in Fig. 16 and Fig. 17, a step which is
between the first outer surface AA and the second outer

surface BB is formed such that the outer diameter of the nozzle receiver fixing portion 337 on the container rear end is reduced in the middle of the outer surface of the nozzle receiver fixing portion 337 in the rotation axis direction. As illustrated in Fig. 13, the inner surface of the cylindrical container opening 33a of the container body 33 is shaped so as to follow the outer surface of the nozzle receiver fixing portion 337, and a step is formed so that the inner diameter of the cylindrical container opening 33a the container rear end is reduced. The step on the outer surface of the nozzle receiver fixing portion 337 butts against the step on the inner surface of the cylindrical container opening 33a in the whole area in the circumferential direction. Therefore, it is possible to prevent the axis of the nozzle receiver 330 from being inclined with respect to the container body 33 (a state in which the central axis of the cylindrical nozzle receiver fixing portion 337 is inclined with respect to the central axis of the cylindrical container opening 33a).

<Second Embodiment>

A toner container 32 according to a second embodiment will be explained below, in which the container shutter 332 is modified compared with the toner container 32 of the first embodiment.

The toner container 32 can be detached from the copier 500 in the state illustrated in Fig. 6. However, when the toner container 32 alone is transported or is set to the main body by a user, the toner container 32 may be dropped.

Fig. 19 is an explanatory diagram illustrating a state where the toner container 32 falls with the rear end facing downward. An arrow $\delta 1$ in Fig. 19 indicates the falling direction.

If the toner container 32 falls down and hit the floor as illustrated in Fig. 19, the inertia force of the container shutter 332 acts in the same direction as the falling direction as indicated by an arrow $\delta 2$ in Fig. 19.

5 The inertia force increases as the impact due to falling increases, and if the inertial force becomes greater than the pressing force of the container shutter spring 336, the container shutter 332 moves in the direction in which the inertia force acts (in the arrow $\delta 2$ direction in Fig. 19).

10 In this case, if the amount of movement of the container shutter 332 becomes greater than the thickness of the container seal 333, a gap is generated between the container shutter 332 and the container seal 333 for a moment and toner may be scattered. Furthermore, if the

15 container body 33 of the toner container 32 is a hollow resin product formed by blow molding, the impact due to the hit may be transformed into momentum and the inertia force may be increased.

To reduce the amount of movement of the container shutter 332 caused by the inertial force due to the falling,

20 it is effective to use the container shutter spring 336 with a greater pressing force. However, if the pressing force of the container shutter spring 336 is increased, an adverse effect as described below occurs.

25 Specifically, if the pressing force of the container shutter spring 336 is increased, a contact pressure between the container shutter 332 and the conveying nozzle 611 is increased while the toner container 32 is attached to the toner replenishing device 60. If the contact pressure

30 increases, driving torque for rotating the toner container 32 increases. Therefore, a driving motor 603 with greater output is needed and the cost of the driving motor 603

increases. Furthermore, with an increase in the contact pressure, abrasion of the contact surfaces of the container shutter 332 and the conveying nozzle 611 increases resulting in shortened lifetimes.

5 Moreover, if the pressing force of the container shutter spring 336 increases, a greater force is needed to set the toner container 32 in the toner replenishing device 60 resulting in reduced operability. Furthermore, the pressing force of the container shutter spring 336 acts in
10 the direction in which the toner container 32 is pushed out of the toner replenishing device 60. Therefore, if the pressing force of the container shutter spring 336 increases, there is a risk that the toner container 32 may pop out from the toner replenishing device 60 immediately
15 after an engaged state between structures (replenishing device engaging members 609 and container engaged portions 339) for engaging the toner container 32 with the toner replenishing device 60 is released.

Fig. 20 and Fig. 21 are explanatory diagrams
20 illustrating a configuration in which second shutter hooks 332b are provided at a position slightly closer to the container front end of the container shutter 332 relative to the guiding rod 332e of the first shutter hooks 332a. Fig. 20 is an explanatory cross-sectional view of the toner
25 replenishing device 60 before the toner container 32 is attached and the front end of the toner container 32. Fig. 21 is an explanatory cross-sectional view of the toner replenishing device 60 to which the toner container 32 is attached and the front end of the toner container 32.

30 In the configuration illustrated in Fig. 20 and Fig. 21, the container shutter 332 of the toner container 32 is pressed in the direction in which the receiving opening 331

is closed by the container shutter spring 336 (to the left in Fig. 20). The container shutter 332 includes a pair of the first shutter hooks 332a and a pair of the second shutter hooks 332b, as two pairs of hooks configured to prevent the container shutter 332 from coming off, on the container rear end relative to the guiding rod 332e.

The container rear end of the guiding rod 332e is bifurcated so as to form a pair of cantilevers 332f. The first shutter hooks 332a and the second shutter hooks 332b are arranged on the respective outer surfaces of the cantilevers. As illustrated in Fig. 20, the vertical surface of the shutter rear end supporting portion 335 is located between the first shutter hooks 332a and the second shutter hooks 332b when the container shutter 332 closes the receiving opening 331. A hole smaller than the projected area of the first shutter hooks 332a in the axial direction is formed on the vertical surface of the shutter rear end supporting portion 335. The guiding rod 332e is inserted in the container shutter spring 336 and the pair of the cantilevers 332f of the guiding rod 332e is bent toward the center of the axis of the guiding rod 332e so as to pass the first shutter hooks 332a through the hole in the vertical surface of the shutter rear end supporting portion 335. Accordingly, the guiding rod 332e is mounted on the container body 33 as illustrated in Fig. 20. The guiding rod 332e is molded with resin, such as polystyrene, so as to ensure the elasticity that allows the cantilevers 332f to bend.

Fig. 20 illustrates a state before the toner container 32 is set in the main body of the toner replenishing device 60 (not in use) when, for example, the toner container 32 is transported.

When the toner container 32 is set in the main body of the toner replenishing device 60 in the state illustrated in Fig. 20, the toner container 32 is pushed into the main body and the front end of the conveying nozzle 611 pushes the container shutter 332 toward the inside of the toner container 32. At this time, the first shutter hooks 332a at the end of the guiding rod 332e are pushed out of the container rear end of the shutter rear end supporting portion 335. Accordingly, the second shutter hooks 332b that are second hooks are engaged with the hole in the vertical surface of the shutter rear end supporting portion 335.

The hole in the vertical surface is smaller than the projected area of the second shutter hooks 332b, and therefore, the second shutter hooks 332b do not come off when it is in contact with the vertical surface. However, when the user increase the pushing force applied to the toner container 32, the pushing force acts on the contact section of the second shutter hooks 332b and the vertical surface. Due to the action of the pushing force, both of the second shutter hooks 332b and the pair of the cantilevers 332f provided on the outer surface are bent toward the center of the axis of the guiding rod 332e, so that the second shutter hooks 332b pass through the hole in the vertical surface. Therefore, as illustrated in Fig. 21, the second shutter hooks 332b are located inside the toner container 32 relative to the shutter rear end supporting portion 335.

Once the container shutter 332 is set in the toner container 32, the second shutter hooks 332b function to prevent the container shutter 332 from coming off.

As described above, when the toner container 32 alone

is transported or is set in the main body by a user, the toner container 32 may be dropped. In this case, as explained above with reference to Fig. 19, a force in a direction of opening the container shutter 332 may be applied to the container shutter 332 due to the inertia force of the container shutter 332. However, if the second shutter hooks 332b are provided as in the configuration illustrated in Fig. 20 and Fig. 21, it is possible to prevent toner scattering when the toner container 32 falls because of the reasons described below. Specifically, when the container shutter 332 is caused to move in the open direction, the pressing force of the container shutter spring 336 and a force needed to pass the second shutter hooks 332b through the hole (i.e., a force for bending the pair of the cantilevers 332f) prevent the container shutter 332 from moving in the open direction. Because the inertia force due to the impact at the time of falling does not increase unlike the pushing force applied by the user, the second shutter hooks 332b are engaged with the hole in the vertical surface of the shutter rear end supporting portion 335 and the container shutter 332 can be prevented from being opened. Therefore, it is possible to prevent toner scattering when the toner container 32 falls.

In the toner container 32 configured as illustrated in Fig. 20 and Fig. 21, it is possible to prevent the movement of the shutter when the toner container falls, without increasing the pressing force of the container shutter spring 336. Therefore, it is possible to prevent toner scattering at the time of falling without causing the adverse effect as described above. Furthermore, only the second shutter hooks 332b are added to the container shutter 332 compared with the configuration explained above

with reference to Fig. 1 and Fig. 9 for example, and additional parts are not needed. Therefore, it is possible to prevent toner scattering at the time of falling at low costs.

5 The configuration of the container front end cover 34 common to the first to the twentieth embodiments will be explained below with reference to Fig. 5 to Fig. 8.

 The container front end cover 34 of the toner
container 32 is caused to slide and move on the container
10 receiving section 72 illustrated in Fig. 5 at the time of
attachment to the toner replenishing device 60. In Fig. 5,
gutters continuing from the insert hole section 71 to the
container cover receiving section 73 are formed just below
the four toner containers 32, respectively, such that the
15 longitudinal side goes along the axial direction of the
container body 33. Sliding guides 361 as a pair are formed
on the both lower sides of the container front end cover 34
so as to allow the container front end cover 34 to slide
and move while the sliding guides 361 are engaged with the
20 gutter. More specifically, sliding rails as a pair are
protruding on both sides of each of the gutters of the
container receiving section 72. Sliding gutters 361a
parallel to the rotation axis of the container body 33 are
formed on the sliding guides 361 so as to sandwich the pair
25 of sliding rails from above and below. Furthermore, the
container front end cover 34 includes the container engaged
portions 339 that are engaged with the replenishing device
engaging members 609 provided on the setting cover 608 at
the time of attachment to the toner replenishing device 60.
30 The container front end cover 34 also includes an ID
tag (ID chip) 700 for recording data, such as usage of the
toner container 32. The container front end cover 34 also

includes a color-specific rib 34b that prevents the toner container 32 containing toner of a certain color from being attached to the setting cover 608 of a different color. As described above, because the sliding guides 361 are engaged with the sliding rails of the container receiving section 72 at the time of attachment, the posture of the container front end cover 34 on the toner replenishing device 60 is determined. Therefore, the positioning between the container engaged portions 339 and the replenishing device engaging members 609 and the positioning between the ID tag 700 and a connector 800 to be described later can be performed smoothly.

The toner replenishing device 60 common to the first to the twentieth embodiment will be explained below.

As illustrated in Fig. 7 and Fig. 8, the toner replenishing device 60 includes a nozzle holder 607 that fixes the conveying nozzle 611 to a frame 602 of the main body of the copier 500. The setting cover 608 is fixed to the nozzle holder 607. The toner dropping passage 64, which is arranged so as to communicate with the inside of the conveying nozzle 611 from the lower part of the conveying nozzle 611, is fixed to the nozzle holder 607.

The toner dropping passage 64 may include, as in the configuration illustrated in Fig. 20 and Fig. 21, an oscillating spring 640 inside thereof.

One end of the oscillating spring 640 is engaged with the rotation axis of the conveying screw 614, and moves in the vertical direction along with rotation of the conveying screw 614. The oscillating spring 640 scrapes off toner stagnated or attached on the vicinity of the inner surface of the toner dropping passage 64 serving as a tube member, along with the vertical movement. To improve the effect of

preventing clogging of the toner dropping passage 64, it is desirable to place the oscillating spring 640 configured to oscillate to a position closer to the inner surface of the toner dropping passage 64. In the configuration of the embodiment, because the toner dropping passage 64 is a cylindrical member, the oscillating spring 640 (a spring with a diameter slightly smaller than the diameter of the inner wall of the toner dropping passage 64) is used as an oscillating scraper. However, it is preferable to adjust the shape of the oscillating scraper in accordance with the cross-sectional shape of the toner dropping passage 64 such that when the shape of the x-section of the toner dropping passage 64 is other than a circle, the shape of the oscillating scraper is adjusted in accordance with the actual shape.

Furthermore, the container driving section 91 is fixed to the frame 602.

The container driving section 91 is fixed to the frame 602. The container driving section 91 includes the driving motor 603, the container driving gear 601, and a worm gear 603a for transmitting rotation drive of the driving motor 603 to the rotation axis of the container driving gear 601. A drive transmitting gear 604 is fixed to the rotation axis of the container driving gear 601 so as to be engaged with the conveying screw gear 605 fixed to the rotation axis of the conveying screw 614. With this configuration, it is possible to rotate the toner container 32 via the container driving gear 601 and the container gear 301. Furthermore, it is possible to rotate the conveying screw 614 via the drive transmitting gear 604 and the conveying screw gear 605 together with the rotation of the toner container 32.

It may be possible to provide a clutch in a drive

transmitting passage from the driving motor 603 to the container gear 301 or in a drive transmitting passage from the driving motor 603 to the conveying screw gear 605.

With the clutch, it becomes possible to rotate only one of
5 the toner container 32 and the conveying screw 614 along with the rotation of the driving motor 603.

The conveying nozzle 611 of the toner replenishing device 60 will be explained below.

Fig. 22 is an explanatory cross-sectional view of the
10 nozzle shutter 612. Fig. 23 is an explanatory perspective view of the nozzle shutter 612 viewed from a side where the toner container 32 is attached (a front end of the nozzle). Fig. 24 is an explanatory perspective view of the nozzle shutter 612 viewed from the toner replenishing device 60
15 side (a base end of the nozzle). Fig. 25 is an explanatory cross-sectional view of the vicinity of the conveying nozzle 611 of the toner replenishing device 60. Fig. 26 is an explanatory perspective cross-sectional view of the vicinity of the nozzle opening 610 of the conveying nozzle
20 611. Fig. 27 is an explanatory perspective view of the vicinity of the conveying nozzle 611 when the nozzle shutter 612 is detached, viewed from the front end of the nozzle. Fig. 28 is an explanatory perspective view of the vicinity of the nozzle opening 610 when the nozzle shutter
25 612 is detached. In Fig. 25, Fig. 26, and Fig. 28, the conveying screw 614 arranged inside the conveying nozzle 611 is omitted.

At the base end of the conveying nozzle 611, the container setting section 615 is formed, in which the
30 cylindrical container opening 33a is fitted when the toner container 32 is attached to the toner replenishing device 60. The container setting section 615 is in the form of a

cylinder and is fitted such that the inner surface 615a thereof and an outer surface of the cylindrical container opening 33a can slide against each other. With this fitting, the position of the toner container 32 relative to the toner replenishing device 60 in the planar direction perpendicular to the rotation axis of the toner container 32 is determined. When the toner container 32 rotates, the outer surface of the cylindrical container opening 33a functions as a rotary shaft section and the container setting section 615 functions as a shaft receiving section. The position where the outer surface of the cylindrical container opening 33a and the container setting section 615 slidably contact each other and the position of the toner container 32 relative to the toner replenishing device 60 is determined is indicated by α in Fig. 9.

As illustrated in Fig. 22 for example, the nozzle shutter 612 includes the nozzle shutter flange 612a and the nozzle shutter tube 612e. The first inner rib 612b is formed in a part of the upper inner surface of the nozzle shutter tube 612e near the front end of the nozzle. A second inner rib 612c and a third inner rib 612d are formed on the inner surface of the nozzle shutter tube 612e near the base end of the nozzle so as to surround the inner surface.

The length of the first inner rib 612b in the circumferential direction on the inner surface is set so that the first inner rib 612b can be fitted in the width of the nozzle opening 610 in the circumferential direction while the nozzle shutter 612 is attached to the conveying nozzle 611.

As illustrated in Fig. 1 and Fig. 25, the end of the nozzle shutter spring 613 on the base end of the nozzle

butts against an end surface 615b of the container setting section 615. Furthermore, the end of the nozzle shutter spring 613 on the front end of the nozzle butts against the nozzle shutter spring receiving surface 612f of the nozzle shutter flange 612a. At this time, the nozzle shutter spring 613 is in a compressed state and a biasing force is applied to the nozzle shutter 612 in a direction in which the nozzle shutter 612 comes out of the front end of the nozzle (to the left in Fig. 25). However, the first inner rib 612b butts against the edge of the nozzle opening 610 on the front end of the nozzle, that is, the upper inner surface of a front end 611a of the conveying nozzle 611. Therefore, the nozzle shutter 612 is prevented from moving in a direction in which it comes out of the conveying nozzle 611 in the state illustrated in Fig. 25 or Fig. 26. Due to the butt-contact of the first inner rib 612b and the biasing force of the nozzle shutter spring 613, the position of the nozzle shutter 612 relative to the conveying nozzle 611 in the rotation axis direction is determined.

A front end 612g of the first inner rib, which is an end of the first inner rib 612b in the circumferential direction, is shaped such that it can butt against a nozzle opening rim 611s, which is a rim of the nozzle opening 610 in the lateral direction. Specifically, the front end 612g of the first inner rib is shaped so as to butt against the nozzle opening rim 611s when the nozzle shutter 612 is caused to rotate in the arrow A direction in Fig. 26.

When the toner container 32 rotates, a force that causes rotation in the arrow A direction in Fig. 26 acts on the nozzle shutter 612, in which the outer surface of the nozzle shutter tube 612e comes in contact with the inner

60

surface of the container seal 333 fixed to the toner container 32. At this time, if the nozzle shutter 612 rotates relative to the conveying nozzle 611 and the first inner rib 612b is separated from the nozzle opening 610, the following may occur. Specifically, the nozzle shutter 612 may come out of the conveying nozzle 611 due to the biasing force based on the restoring action of the nozzle shutter spring 613 when the toner container 32 is detached from the toner replenishing device 60.

10 Besides, depending on the elasticity of the nozzle shutter 612, the first inner rib 612b detached from the nozzle opening 610 may firmly tighten the outer surface of the conveying nozzle 611 and the nozzle shutter 612 is precluded from moving relative to the conveying nozzle 611. 15 In each case, the nozzle opening 610 remains open when the toner container 32 is detached from the toner replenishing device 60, resulting in toner leakage.

By contrast, in the toner replenishing device 60 according to the present embodiment, when the nozzle shutter 612 is caused to rotate in the arrow A direction in Fig. 26, the front end 612g of the first inner rib butts against the nozzle opening rim 611s. Therefore, it is possible to prevent the nozzle shutter 612 from rotating relative to the conveying nozzle 611 in the state 25 illustrated in Fig. 26.

The inner diameters of the second inner rib 612c and the third inner rib 612d are set to be slightly smaller than the outer diameter of the cylindrical conveying nozzle 611. The second inner rib 612c and the third inner rib 30 612d, which are molded with resin, are elastically deformed so that the nozzle shutter 612 can be attached to the conveying nozzle 611. Because the two ribs (612c, 612d)

61

with the inner diameters slightly smaller than the outer diameter of the conveying nozzle 611 are elastically deformed and come into contact with the outer surface of the conveying nozzle 611, the sealing performance between the inner surface of the nozzle shutter 612 and the outer surface of the conveying nozzle 611 can be improved. Therefore, it is possible to prevent toner leakage from a gap between the nozzle shutter 612 and the conveying nozzle 611.

10 The toner replenishing device 60 according to the present embodiment uses a conical spring as the nozzle shutter spring 613. The conical spring allows at least a part of adjacent coils to overlap each other in the completely-compressed state, so that the length in the winding axis direction in the completely-compressed state can be shortened compared with a cylindrical spring with the same spring length. Therefore, it is possible to reduce a space of the nozzle shutter spring 613 in the winding axis direction in the completely-compressed state.

20 A process of attaching the toner container 32 to the toner replenishing device 60 will be explained below.

When the toner container 32 is moved toward the toner replenishing device 60 as indicated by an arrow Q in Fig. 7 or Fig. 1, the front end 611a of the conveying nozzle 611 comes in contact with the front end surface of the container shutter 332. When the toner container 32 is further moved toward the toner replenishing device 60, the conveying nozzle 611 presses the front end surface of the container shutter 332. Because of the pressing of the container shutter 332, the container shutter spring 336 is compressed. Accordingly, the container shutter 332 is pushed into the inside (to the container rear end) of the

toner container 32 along with the compression and the front end of the conveying nozzle 611 is inserted into the receiving opening 331. At this time, a part of the nozzle shutter tube 612e on the front end of the nozzle relative to the nozzle shutter flange 612a of the nozzle shutter 612 is also inserted into the receiving opening 331 together with the conveying nozzle 611.

When the toner container 32 is further moved toward the toner replenishing device 60, the surface opposite a nozzle shutter spring receiving surface of the nozzle shutter flange 612a comes in contact with the front end surface of the container seal 333. Subsequently, the surface comes in contact with the nozzle shutter positioning ribs 337a by slightly pressing the container seal 333. Consequently, the position of the nozzle shutter 612 relative to the toner container 32 in the rotation axis direction is fixed.

When the toner container 32 is further moved toward the toner replenishing device 60, the conveying nozzle 611 is further inserted to the inside of the toner container 32. At this time, the nozzle shutter 612 abutting the nozzle shutter positioning ribs 337a is pushed back toward the base end of the conveying nozzle 611. Therefore, the nozzle shutter spring 613 is compressed and the relative position of the nozzle shutter 612 and the conveying nozzle 611 is shifted toward the base end of the nozzle. Due to the shift of the relative position, the nozzle opening 610 covered by the nozzle shutter 612 is exposed inside the container body 33 and the inside of the container body 33 and the inside of the conveying nozzle 611 communicate with each other.

When the conveying nozzle 611 is inserted in the

receiving opening 331, a force in a direction in which the toner container 32 is pushed back relative to the toner replenishing device 60 (a direction opposite the arrow Q in Fig. 7) acts due to the biasing force of the compressed container shutter spring 336 or the nozzle shutter spring 613. However, when the toner container 32 is attached to the toner replenishing device 60, the toner container 32 is moved to a position at which the container engaged portions 339 are engaged with the replenishing device engaging members 609 in a direction toward the toner replenishing device 60 against the above-mentioned force. Therefore, the biasing force of the container shutter spring 336 and the nozzle shutter spring 613 and the engaged state between the container engaged portions 339 and the replenishing device engaging members 609 become active. Due to the action of the biasing force and the engaged state, the position of the toner container 32 relative to the toner replenishing device 60 in the rotation axis direction is determined in the state illustrated in Fig. 8 and Fig. 9.

As illustrated in Fig. 7, each of the container engaged portions 339 includes a guiding protrusion 339a, a guiding gutter 339b, a bump 339c, and a rectangular engaged hole 339d. Two sets of the container engaged portions 339 each including, as one set, the above parts are arranged on both sides of the container front end cover 34 in a symmetric manner with respect to a vertical line passing through the receiving opening 331. The guiding protrusions 339a are arranged on a front vertical surface of the container front end cover 34 so as to be on the horizontal line passing through the center of the receiving opening 331. The guiding protrusions 339a include inclined surfaces continued to the guiding gutters 339b. The

inclined surfaces come in contact with the replenishing device engaging members 609 and guide the replenishing device engaging members 609 toward the guiding gutters 339b at the time of attachment of the toner container 32. The
5 guiding gutters 339b are gutters that are sunken on the side surface of the container front end cover 34.

The widths of the guiding gutters 339b are set to be slightly wider than the replenishing device engaging members 609 and to be appropriate to prevent the
10 replenishing device engaging members 609 from coming out of the gutters.

The rear ends of the guiding gutters 339b do not directly continued to the engaged holes 339d but are ended. The heights of the guiding gutters 339b are the same as the
15 height of the side surface of the container front end cover 34. Specifically, outer surfaces with widths of about 1 mm are present between the guiding gutters 339b and the engaged holes 339d, which correspond to the bumps 339c. The replenishing device engaging members 609 go over the
20 bumps 339c and fall into the engaged holes 339d. As a result, the toner container 32 and the toner replenishing device 60 are engaged with each other.

The toner container 32 is configured such that the container shutter 332 is located in the center of a line
25 segment connecting the two container engaged portions 339 on a virtual plane perpendicular to the rotation axis. If the container shutter 332 is not located on the line segment connecting the two container engaged portions 339, the following may occur. Specifically, a distance from the
30 line segment to the container shutter 332 becomes a lever and moment of force that rotates the toner container 32 about the line segment is generated due to the biasing

force between the container shutter spring 336 and the nozzle shutter spring 613 at the position of the container shutter 332. Due to the action of the moment, the toner container 32 may be inclined with respect to the toner replenishing device 60. In this case, an attachment load on the toner container 32 increases, increasing a load on the nozzle receiver 330 that holds and guides the container shutter 332.

In particular, if the toner container 32 is new and adequately filled with toner, and when the toner container 32 is pushed from the rear end such that the protruding conveying nozzle 611 is inserted in the horizontal direction, moment of force acts to rotate the toner container 32 due to weight of the container 32 added with the weight of toner. Therefore, a load is applied to the nozzle receiver 330 in which the conveying nozzle 611 is inserted, and the nozzle receiver 330 may be damaged or broken in the worst case. By contrast, in the toner container 32 according to the present embodiment, because the container shutter 332 is located on the line segment connecting the two container engaged portions 339. Therefore, it is possible to prevent the toner container 32 from being inclined with respect to the toner replenishing device 60 due to the biasing force of the container shutter spring 336 and the nozzle shutter spring 613 that act at the position of the container shutter 332.

As illustrated in Fig. 31B, the circular end surface of the cylindrical container opening 33a of the toner container 32 does not come in contact with the end surface 615b of the container setting section 615 when the toner container 32 is attached to the toner replenishing device 60. The reason for this is as follows. It is assumed that

the circular end surface of the cylindrical container opening 33a comes in contact with the end surface 615b of the container setting section 615. In this configuration, the circular end surface of the cylindrical container opening 33a may butt against the end surface 615b of the container setting section 615 before the engaged holes 339d of the container engaged portions 339 are engaged with the replenishing device engaging members 609. If the end surfaces butt against each other as described above, it is impossible to move the toner container 32 farther toward the toner replenishing device 60, so that the positioning in the rotation axis becomes impossible. To prevent such a situation, when the toner container 32 is attached to the toner replenishing device 60, a small gap is generated between the circular end surface of the cylindrical container opening 33a and the end surface 615b of the container setting section 615.

When the position in the rotation axis direction is determined as described above, the outer surface of the cylindrical container opening 33a is rotatably fitted to the inner surface 615a of the container setting section 615. Therefore, as described above, the position of the toner container 32 relative to the toner replenishing device 60 in the planar direction perpendicular to the rotation axis is determined. Consequently, attachment of the toner container 32 to the toner replenishing device 60 is completed.

When the toner container 32 is completely attached, if the driving motor 603 is rotated, the container body 33 of the toner container 32 and the conveying screw 614 inside the conveying nozzle 611 rotate.

With the rotation of the container body 33, toner in

the container body 33 is conveyed to the container front end of the container body 33 by the spiral rib 302. The toner that reaches the scooping portion 304 by the conveyance is scooped up to be located above the nozzle opening 610 by the scooping portion 304 along with the rotation of the container body 33. The toner scooped up to be located above the nozzle opening 610 falls toward the nozzle opening 610, so that the toner is supplied to the conveying nozzle 611. The toner supplied to the conveying nozzle 611 is conveyed by the conveying screw 614 and is replenished in the developing device 50 via the toner dropping passage 64. The flow of the toner from the inside of the container body 33 to the toner dropping passage 64 at this time is indicated by an arrow β in Fig. 9.

15 <Third Embodiment>

A modification of rotation timings of the toner container 32 etc. according to a third embodiment will be explained.

In the configurations explained above in the first and the second embodiments, the toner container 32 and the conveying screw 614 are rotated simultaneously. However, regarding the rotation timings, it may be possible to rotate only the toner container 32 at the start of toner replenishment, and subsequently rotate the conveying screw 614 after a lapse of a predetermined time. Furthermore, it may be possible to stop the toner container 32 at the end of the toner replenishment, and subsequently stop the conveying screw 614 after a lapse of a predetermined time. A timing chart of the above rotation timings is illustrated in Fig. 29.

In the configuration with the rotation timings illustrated in Fig. 29, when the toner replenishment is

stopped, rotation of the toner container 32 is stopped before rotation of the conveying screw 614 inside the conveying nozzle 611 is stopped. With these rotation timings, conveyance by the conveying screw 614 is continued at the nozzle opening 610 while supply of new toner is stopped, and rotation of the conveying screw 614 is subsequently stopped after a predetermined time elapses. Therefore, toner T that remains in the vicinity of the nozzle opening 610 of the conveying nozzle 611 when the rotation of the toner container 32 is stopped can be conveyed toward the toner dropping passage 64 by the conveying screw 614. Consequently, it becomes possible to reduce the amount of the toner T remaining on the conveying nozzle 611 near the nozzle opening 610. When the toner container 32 is detached from the main body of the toner replenishing device, because the amount of toner on the conveying nozzle 611 has been reduced, the container seal 333 arranged on the nozzle receiver 330 can easily clean the conveying nozzle 611. Therefore, it is possible to prevent scattering and falling of toner due to attachment/detachment of the toner container 32 to/from the main body.

Furthermore, in the configuration with the above rotation timings, rotation of the toner container 32 is started before a start of rotation of the conveying screw 614 when the toner replenishment is started. Therefore, it is possible to start rotation of the conveying screw 614 after the vicinity of the nozzle opening 610 of the conveying nozzle 611 is filled with toner. Consequently, the amount of toner conveyed by one rotation of the conveying screw 614 can become stable from the start of rotation of the conveying screw 614. As a result, the

stability of the replenishing amount of toner can be improved.

In this way, it is possible to easily realize a configuration, in which the rotation timings of the toner container 32 and the conveying screw 614 are differentiated, by using independent drive sources that independently rotate the toner container 32 and the conveying screw 614.

<Fourth Embodiment>

A fourth embodiment, which is a modification that uses the same drive source for differentiating the rotation timings of the toner container 32 etc. of the third embodiment, will be explained below.

A configuration using the same drive source may be realized by using a clutch. With use of the same drive source, the configuration for differentiating the rotation timings can be realized at low costs.

An example of a drive transmitter for differentiating the rotation timings by using the same drive source is illustrated in Figs. 30A and 30B. Fig. 30A is a front view of the drive transmitter. Fig. 30B is an explanatory lateral cross-sectional view of the drive transmitter taken along H-H in Fig. 30A.

The drive transmitter illustrated in Figs. 30A and 30B includes the container driving gear 601 fixed to a toner container driving shaft 650 and an idler gear 653 that is arranged so as to rotate relative to the toner container driving shaft 650. A gear surface hole 653a is formed so as to follow the semiperimeter of the idler gear 653 along the rotation direction of the idler gear 653. A driving pin 652 is fixed to the container driving gear 601 so as to be engaged with the gear surface hole 653a. As illustrated in Fig. 30A, a delay generating spring 651 is provided, one

end of which is fixed to the idler gear 653 by a spring fixing pin 651a and the other one end of which is fixed to the driving pin 652.

On the front face of the idler gear 653, a spring
5 guiding circular plate 655 is provided, which is concentric with respect to the idler gear 653 and that is arranged on the inner side of the gear surface hole 653a such that the delay generating spring 651 extends along the outer surface of the spring guiding circular plate 655.

10 Furthermore, the conveying screw gear 605 is provided, which is fixed to the rotation axis of the conveying screw 614, which is gear-engaged with the idler gear 653, and which transmits rotation of the idler gear 653 to the conveying screw 614.

15 In the drive transmitter illustrated in Figs. 30A and 30B, when a driving motor (not illustrated) rotates the toner container driving shaft 650 in the arrow I direction in Fig. 30A, the container driving gear 601 rotates. Furthermore, the driving pin 652 integrated with the
20 container driving gear 601 rotates along the gear surface hole 653a arranged on the idler gear 653.

If the container driving gear 601 rotates by about 180° when the driving pin 652 is located at a position indicated by a solid line in Fig. 30A, the driving pin 652
25 butts against the gear surface hole 653a as indicated by a dashed line in Fig. 30A. When the container driving gear 601 in the butt-contact state further rotates, the idler gear 653 is rotated. Consequently, the conveying screw gear 605 rotates via the idler gear 653, and the conveying
30 screw 614 starts rotating.

In this way, a time taken to move the driving pin 652 along the gear surface hole 653a after the toner container

driving shaft 650 has started to rotate causes a time lag between a start of rotation of the toner container 32 and a start of rotation of the conveying screw 614.

At this time, the delay generating spring 651 is
5 extended by a length corresponding to the semiperimeter along the outer surface of the spring guiding circular plate 655.

On the other hand, when the driving motor stops the rotation of the toner container driving shaft 650, the
10 rotation of the driving pin 652 is stopped. At this time, a force of the delay generating spring 651, one end of which is fixed to the driving pin 652 and which has been extended from a natural length, acts so as to retract to the natural length, so that the idler gear 653 rotates such
15 that the spring fixing pin 651a approaches the driving pin 652. Accordingly, the idler gear 653 rotates by the amount corresponding to the gear surface hole 653a (the length approximately corresponding to the semiperimeter). Therefore, after the rotation of the toner container 32 is
20 stopped, the conveying screw 614 can be rotated by the amount corresponding to the rotation of the idler gear 653 caused by the delay generating spring 651.

In this case, it is possible to set a desired driving time lag by appropriately setting various parameters.
25 Examples of the parameters include the number of gear teeth of the idler gear 653 or the conveying screw gear 605, the movable range of the driving pin 652 (the range of opening of the gear surface hole 653a of the idler gear), a pitch of the conveying screw 614, and the width of the nozzle
30 opening 610.

Furthermore, after the rotation of the toner container 32 is stopped, it is desirable to stop the conveying screw

614 after the conveying screw 614 is rotated by at least the amount of conveyance corresponding to the longitudinal width of the nozzle opening 610 of the conveying nozzle 611. Consequently, it becomes possible to convey the toner T remaining near the nozzle opening 610 of the conveying nozzle 611 to the toner dropping passage 64 side relative to the position facing the nozzle opening 610. With this conveyance, it is possible to more reliably prevent scattering and falling of toner due to attachment/detachment of the toner container 32 to/from the main body.

Moreover, after the rotation of the toner container 32 is started, it is desirable to start rotation of the conveying screw 614 after the toner container 32 is rotated by at least the amount of conveyance by which the nozzle opening 610 of the conveying nozzle 611 is filled with the toner T. Consequently, the stability of the replenishing amount of toner can further be improved.

Explanation will be given of the engaged portion between the toner container 32 common to the first to the twentieth embodiments and the container setting section 615 and related configurations.

As described above, the position at which the cylindrical container opening 33a and the container setting section 615 slidably contact each other and the position at which the position of the toner container 32 relative to the toner replenishing device 60 is determined are indicated by α in Fig. 9. The position α in Fig. 9 does not necessarily function both as a sliding section and a positioning section, but may function as only one of the sliding section and the positioning section.

The toner container 32 according to the present

embodiment includes the nozzle receiver 330, which is arranged on the opening of the container body 33 and which includes the receiving opening 331 and the space 335b between the side supporting portions. The receiving opening 331 is a portion into which the conveying nozzle 611 having the nozzle opening 610 as a powder receiving opening is inserted. The space 335b between the side supporting portions are replenishing opening for supplying toner, as powder, from the container body 33 to the nozzle opening 610. The toner container 32 also includes the container shutter 332 that is supported by the nozzle receiver 330 and that functions as an open/close member for opening and closing the receiving opening 331 by sliding in the rotation axis direction along with insertion and removal of the conveying nozzle 611 to and from the nozzle receiver 330. With this configuration, the toner container 32 can maintain the closed state of the receiving opening 331 until the conveying nozzle 611 is inserted, and can prevent leakage or scattering of toner before the toner container 32 is attached to the toner replenishing device 60.

When the conveying nozzle 611 is inserted in the receiving opening 331 and the container shutter 332 being pushed by the conveying nozzle 611 slides to the container rear side, toner accumulated near the space 335b between the side supporting portions is pushed away. Therefore, a space for inserting the conveying nozzle 611 can be ensured near the space 335b between the side supporting portions in the area where the receiving opening 331 is formed. Consequently, it is possible to reliably supply toner from the space 335b between the side supporting portions to the receiving opening 331.

In this way, the toner container 32 can prevent toner contained in the container body 33 from being leaked or scattered before the toner container 32 is attached to the toner replenishing device 60, and can reliably discharge
5 toner to the outside of the container body 33 when the toner container 32 is attached to the toner replenishing device 60.

In the toner container 32, as illustrated in Fig. 1 and Fig. 7, the receiving opening 331 is formed on the
10 container rear end side relative to the container front end of the front end opening 305, that is, at a position on the rear side of the opening formed by the tube-shaped front end opening 305.

Figs. 64A and 64B are explanatory diagrams of the
15 toner container 32 according to a comparative example, in which the opening position of the receiving opening 331 in the rotation axis direction is the same as the container front end of the front end opening 305. Fig. 64A is an explanatory perspective view of the vicinity of the front
20 end of the toner container 32. Fig. 64B is an explanatory cross-sectional view of the front end of the toner container 32.

Similarly to the toner container 32 according to the embodiments described above with reference to Fig. 1 to Fig.
25 21, the toner container 32 illustrated in Figs. 64A and 64B can maintain the closed state of the receiving opening 331 until the conveying nozzle 611 is inserted and can prevent leakage or scattering of toner before the toner container 32 is attached to the toner replenishing device 60. When
30 the conveying nozzle 611 is inserted in the receiving opening 331 and the container shutter 332 being pushed by the conveying nozzle 611 slides to the container rear side,

toner accumulated near the space 335b between the side supporting portions is pushed away. Therefore, it is possible to reliably discharge toner to the outside of the container body 33 when the toner container 32 is attached to the toner replenishing device 60.

The toner container 32 illustrated in Figs. 64A and 64B is configured such that toner in the container body 33 is supplied to the nozzle opening 610 that is arranged in the portion of the conveying nozzle 611 inserted in the container body 33. In this configuration, a contact section, which is between the container seal 333 as a seal member of the container body 33 and the conveying nozzle 611 and in which toner leakage is likely to occur, is separated from the nozzle opening 610 through which the toner is supplied from the container body 33 to the conveying nozzle 611. Therefore, if the toner replenishing operation is performed while the toner container is completely attached to the toner replenishing device 60, even the toner container 32 of the comparative example illustrated in Figs. 64A and 64B can prevent toner leakage at the contact section between the container seal 333 and the conveying nozzle 611 separated from the nozzle opening 610.

However, when the conveying nozzle 611 is inserted in the container body 33, the outer surface of the conveying nozzle 611 is in contact with toner in the container body 33. A part of the contacted toner remains attached to the conveying nozzle 611 when the conveying nozzle 611 is removed from the toner container 32 (when removed from the toner replenishing device 60). Most of the toner attached to the conveying nozzle 611 is scraped off by the container seal 333 when the conveying nozzle 611 passes through the

contact section with the container seal 333. However, a small amount of toner may pass through the container seal 333 together with the conveying nozzle 611 resulting in toner leakage. The leaked toner may come around to the outer surface of the cylindrical container opening 33a of the toner container 32 or may adhere to the inner surface 615a of the container setting section 615, so that a setting failure may occur when the toner container 32 is re-attached for replacement etc. or an aggregation of the attached toner may be developed resulting in an image defect.

By contrast, in the toner container 32 according to the first to the twentieth embodiments, as illustrated in Fig. 1 for example, the front edge of the container body 33 protrudes in the rotation axis direction relative to the vertical surface of the nozzle receiver 330 where the receiving opening 331 is open. Specifically, in the toner container 32, the opening position of the receiving opening 331 is located on the rear end side relative to the container front end of the front end opening 305 that is the opening position of the container body 33.

In this way, because the opening position of the receiving opening 331 is located on the rear side relative to the opening position of the container body 33, it is possible to prevent toner from adhering to the outer surface of the cylindrical container opening 33a. This is because, even if toner is leaked when the conveying nozzle 611 is removed from the toner container 32, toner leaked and scattered from the receiving opening 331 is not likely to come around to the container front end of the cylindrical container opening 33a. Furthermore, toner leaked and dropped from the receiving opening 331 is hung

on the lower inner surface of the front end opening 305. Therefore, it is possible to prevent toner from adhering to the inner surface 615a of the container setting section 615. In this way, it is possible to retain the toner leaked from the receiving opening 331 within an area enclosed by the inner surface of the cylindrical container opening 33a. As a result, it is possible to prevent toner from being scattered to the outside of the toner container.

As illustrated in Fig. 1 and Fig. 9, according to the first to the twentieth embodiments, the container setting section 615, which functions both as a positioning section and a rotary shaft receiving section of the toner container 32, is separated with a space from the nozzle opening 610 at which toner leakage may occur, compared with a case that the toner container 32 according to the comparative example illustrated in Figs. 64A and 64B is attached. Furthermore, the container front end of the cylindrical container opening 33a, which functions both as a positioning section and a rotation axis of the toner container 32 on the toner container 32 side, protrudes from the nozzle opening 610 at which toner leakage may occur. In the space between the container setting section 615 and the receiving opening 331, the nozzle shutter flange 612a and the nozzle shutter spring 613 are arranged. Therefore, even during the attachment/detachment operation, it is possible to prevent toner from coming around and adhering to the inner end surface 615b of the container setting section 615 or to the container front end of the cylindrical container opening 33a.

The container shutter 332 that seals the receiving opening 331 being a toner discharge opening of the toner container 32 is arranged on the rear side relative to the

container front end of the front end opening 305 of the container body 33. With this arrangement, it is possible to ensure a certain distance from the container shutter 332 to the container front end of the front end opening 305.

- 5 Consequently, it is possible to prevent toner from arriving at the outer surface of the front end opening 305 via the opening position of the container body 33 from the receiving opening 331 that is located on the rear side relative to the opening position of the container body 33.
- 10 As a result, it is possible to prevent toner scattering.

As described above, the position of the toner container 32 relative to the toner replenishing device 60 in the direction perpendicular to the rotation axis is determined based on the fitting between the outer surface
15 of the front end opening 305 and the cylindrical inner surface 615a of the container setting section 615. Specifically, the outer surface of the cylindrical container opening 33a of the container body 33 being a powder storage serves as a positioning section with respect
20 to the toner replenishing device 60 being a powder conveying device. Therefore, if the outer surface of the cylindrical container opening 33a becomes dirty with toner, the fitted state to the inner surface of the container setting section 615 may be changed and the positioning
25 accuracy may be reduced. By contrast, the toner container 32 according to the present embodiment can prevent toner from arriving at the outer surface of the cylindrical container opening 33a, the positioning accuracy of the toner container 32 relative to the toner replenishing
30 device 60 can be stabilized.

Furthermore, at the contact section between the outer surface of the cylindrical container opening 33a and the

inner surface of the container setting section 615, they also slide against each other when the toner container 32 rotates. Specifically, the outer surface of the cylindrical container opening 33a of the container body 33 being the powder storage serves as a sliding section with respect to the toner replenishing device 60 being the powder conveying device. If toner enters the sliding section, a sliding load increases and the rotational torque of the toner container 32 may be increased. By contrast, the toner container 32 according to the present embodiment can prevent toner from arriving at the outer surface of the cylindrical container opening 33a and prevent toner from entering the contact section of the inner surface of the container setting section 615. Therefore, it is possible to prevent an increase in the sliding load and stabilize the sliding performance, enabling to prevent an increase in the rotational torque of the toner container 32. Furthermore, it is possible to prevent toner from entering the sliding section, so that it is possible to prevent the toner from being aggregated by being pressed in the sliding section.

Furthermore, as described above, when the toner container 32 is attached to the toner replenishing device 60, the container seal 333 is pressed down by the nozzle shutter flange 612a. Therefore, the nozzle shutter flange 612a is firmly pressed against the container seal 333, so that toner leakage can be prevented more reliably. By arranging the container shutter 332 on the inner side (the container rear end side) relative to the opening position in the longitudinal direction, a cylindrical space is formed between the front end of the toner container 32 and the front end surface of the container seal 333.

The toner container common to the first to the twentieth embodiments illustrated in Fig. 1 will be explained below with reference to schematic diagrams in Figs. 31A and 31B.

5 Figs. 31A and 31B are explanatory diagrams for comparing a case that the position of a front surface 330f of the container front end of the nozzle receiver 330 is the same as the position of an edge (brim) 305f of the container front end of the cylindrical container opening
10 33a in the rotation axis direction and a case that the front surface 330f is located on the container rear end side relative to the edge 305f. At the front surface 330f of the container front end of the nozzle receiver 330, the receiving opening 331 is open. Fig. 31A is an explanatory
15 diagram of the case that the position of the front surface 330f of the nozzle receiver 330 is the same as the position of the edge 305f of the cylindrical container opening 33a in the rotation axis direction. Fig. 31B is an explanatory diagram illustrating the case that the position of the
20 front surface 330f of the nozzle receiver 330 is located on the container rear end side relative to the position of the edge 305f of the cylindrical container opening 33a in the rotation axis direction.

In the toner replenishing device 60 illustrated in
25 Figs. 31A and 31B, before the conveying nozzle 611 is inserted into the nozzle receiving opening 331 of the nozzle receiver 330, the nozzle shutter 612 is biased by the nozzle shutter spring 613 in the nozzle insertion direction (to the right in Fig. 31B). Therefore, the
30 nozzle shutter 612 is located near the front end of the conveying nozzle 611 and closes the nozzle opening 610. At this time, one end of the nozzle shutter spring 613 butts

81

against the back side of the nozzle shutter flange 612a as a positioning portion of the nozzle shutter 612, and the other end of the nozzle shutter spring 613 butts against the end surface 615b of the toner replenishing device 60.

5 The toner container 32 being a powder container is slid in the arrow Q direction (the attachment direction) in Figs. 31A and 31B so as to be attached to the toner replenishing device 60 illustrated in Figs. 31A and 31B. Along with the attachment, the nozzle shutter 612 biased by
10 the nozzle shutter spring 613 toward a direction opposite the Q direction butts against the front surface 330f of the front end of the nozzle receiver 330 where the receiving opening 331 of the nozzle receiver 330 is open. Thereafter, when the toner container 32 further slides in the Q
15 direction, the nozzle shutter 612 moves in the Q direction relative to the conveying nozzle 611 being inserted in the toner container 32. Therefore, the nozzle shutter 612 moves to the base end of the conveying nozzle 611 and the conveying nozzle 611 is opened. Then, as illustrated in
20 Figs. 31A and 31B, the nozzle opening 610 is completely opened after the toner container 32 is attached to the toner replenishing device 60.

With the movement of the nozzle shutter 612 toward the base end of the conveying nozzle 611, the nozzle shutter
25 spring 613 is compressed. As illustrated in Figs. 31A and 31B, the length of the nozzle shutter spring 613 in the rotation axis direction becomes the shortest when the toner container 32 is attached to the toner replenishing device 60. Even in this state, however, the nozzle shutter spring
30 613 has a certain length in the rotation axis direction. Therefore, a housing space (with the length W in the rotation axis direction) is needed between the front

surface 330f of the nozzle receiver 330 and the end surface 615b of the toner replenishing device 60. The housing space is a space for housing the part of the container front end side of the nozzle shutter 612 relative to the nozzle shutter flange 612a and for housing the nozzle shutter spring 613.

Furthermore, the nozzle opening 610 needs to arrive at a position at which toner can be received. The optimal position of the nozzle opening 610 is determined based on the shape of the container body 33. Therefore, if the shape of the container body 33 is identical in the case of Figs. 31A and 31B, a distance from the edge 305f of the cylindrical container opening 33a of the container body 33 to the optimal position of the nozzle opening 610 in the rotation axis direction is constant.

In the above configuration, if the toner container 32 is configured as illustrated in Fig. 31A, the following problem may occur. In the configuration illustrated in Fig. 31A, the position of the edge 305f of the container front end of the cylindrical container opening 33a in the rotation axis direction and the position of the front surface 330f of the nozzle receiver 330 where the receiving opening 331 is open in the rotation axis direction are the same.

Therefore, a distance (L1) from the end surface 615b of the toner replenishing device 60 to the fitted portion 615s becomes longer than the length (W) of the housing space in the rotation axis direction. Therefore, the size of the toner replenishing device 60 increases.

If the shape of the container body 33 is identical, a distance from the edge 305f of the cylindrical container opening 33a to the optimal position of the nozzle opening

610 in the rotation axis direction is constant.

Furthermore, the position of the edge 305f of the cylindrical container opening 33a as a starting point for determining the position of the nozzle opening 610 in the rotation axis direction is separated from the end surface 615b of the toner replenishing device 60 by the length (W) of the housing space or longer in the rotation axis direction. Therefore, a distance (L2) from the end surface 615b of the toner replenishing device 60 to the front end of the conveying nozzle 611 increases, so that the size of the toner replenishing device 60 is increased.

Furthermore, the position of the edge 305f of the cylindrical container opening 33a, which is the front end of the toner container 32, is separated from the end surface 615b of the toner replenishing device 60 by the length W of the housing space in the rotation axis direction. Therefore, a distance (L3) from the end surface 615b of the toner replenishing device 60 to one end of the toner container 32 increases, so that the size of the toner replenishing device 60 that holds the toner container 32 is increased.

In the configuration illustrated in Fig. 31B, the front surface (330f in Figs. 31A and 31B) of the nozzle receiver 330 where the receiving opening 331 is open is located on the container rear end side relative to the container front end of the cylindrical container opening 33a. The front surface of the nozzle receiver 330 where the receiving opening 331 open is denoted by 330f in Figs. 31A and 31B, and correspond to the front surface of the container seal 333 or the front end of the nozzle shutter positioning ribs 337a. Therefore, when the toner container 32 is attached to the toner replenishing device 60, the

nozzle shutter flange 612a of the nozzle shutter 612 butts against the front surface 330f on the container rear end side relative to the container front end of the cylindrical container opening 33a in the rotation axis direction.

5 Consequently, at least a part of the housing space is located in the circular space formed between the opening position of the front end opening 305 (the container front end) and the front surface of the container seal 333. Therefore, the distances L1, L2, and L3 in Figs. 31A and
10 31B can be made shorter than those illustrated in Fig. 31A (by La in Fig. 31A).

If the size of the toner replenishing device 60 need not be reduced, the container body 33 can be made longer by La in the rotation axis direction. Therefore, the amount
15 of toner contained in the toner container 32 can be increased.

The nozzle shutter 612 closes the nozzle opening 610 of the conveying nozzle 611 when the toner container 32 is not attached to the toner replenishing device 60. When the
20 toner container 32 is attached to the toner replenishing device 60, the nozzle shutter 612 needs to be opened so as to receive toner.

In the toner replenishing device 60, the cylindrical space (the front end opening 305) is formed between the
25 container front end of the cylindrical container opening 33a and the end surfaces of the container shutter 332 and the container seal 333 on the container front side. The housing space is configured so that the whole or a part of the nozzle shutter 612 can be housed when the nozzle
30 shutter 612 is opened. In the housing space, the whole or a part of the nozzle shutter spring 613 for closing the nozzle shutter 612 is also housed. With this configuration,

it is possible to reduce the size of a space for arranging the nozzle shutter 612 and the nozzle shutter spring 613.

As illustrated in Fig. 9, according to the present embodiment, when the toner container 32 is attached to the toner replenishing device 60, the housing position of the nozzle shutter 612 on the front end of the nozzle relative to the nozzle shutter flange 612a is located inside the container seal 333. The base end of the nozzle relative to the nozzle shutter flange 612a is substantially housed in the cylindrical space formed between the opening position of the front end opening 305 (the container front end) and the front surface 330f of the container seal 333. Furthermore, the nozzle shutter spring 613 in the compressed state is substantially housed in the cylindrical space.

With this configuration, it is possible to reduce a distance from the opening position of the front end opening 305 being the endmost portion of the toner container 32 to a toner dropped area of the toner replenishing device 60 (the position where the toner dropping passage 64 is connected to the conveying nozzle 611). Therefore, the size of the main body can be reduced.

As explained above with reference to Fig. 22 to Fig. 28, the first inner rib 612b butts against a front rim of the nozzle opening 610, that is, the upper inner surface of the front end 611a of the conveying nozzle 611 while the nozzle shutter 612 is closed. Therefore, a function to prevent the nozzle shutter 612 from coming off can be realized. Furthermore, the front end 612g of the first inner rib 612b, which is the end of the first inner rib 612b in the circumferential direction, butts against the nozzle opening rim 611s that is a rim of the nozzle opening

610 in the lateral direction. Therefore, a function to prevent rotation of the nozzle shutter 612 can be realized. The function to prevent the rotation of the nozzle shutter 612 can be available in the same manner even when the toner container 32 is attached to the toner replenishing device 60.

Moreover, as described above, the inner diameters of the second inner rib 612c and the third inner rib 612d are slightly smaller than the outer diameter of the conveying nozzle 611. For example, when the outer diameter ϕ of the conveying nozzle 611 is 15 mm, it is preferable to set the inner diameters ϕ of the second inner rib 612c and the third inner rib 612d to about 14.8 mm to 14.9 mm. In this way, the second inner rib 612c and the third inner rib 612d in the form of cylinders with the inner diameters slightly smaller than the outer diameter of the conveying nozzle 611 are formed on the inner surface of the nozzle shutter 612. Therefore, it is possible to fill the gap between the inner surface of the nozzle shutter 612 and the outer surface of the conveying nozzle 611. Consequently, it becomes possible to realize the toner sealing function without a seal, so that the seal, such as sponge or rubber, is not needed. Because a seal separated from the nozzle shutter 612 is not needed, it is possible to prevent toner leakage at lower costs.

As a configuration for preventing toner leakage, it may be possible to provide an annular seal instead of the second inner rib 612c and the third inner rib 612d. However, because the gap between the inner surface of the nozzle shutter 612 and the outer surface of the conveying nozzle 611 is extremely small, the annular seal is not insertable. Therefore, if the annular seal is arranged, an

annular nozzle shutter seal 612h needs to be arranged in the manner illustrated in Figs. 65A and 65B. In this case, the outer diameter of a nozzle shutter seal receiver 612j is made smaller than the diameter of the nozzle shutter spring 613 so that the nozzle shutter spring 613 can butt against the nozzle shutter spring receiving surface 612f.

To mount the nozzle shutter 612 on the conveying nozzle 611, the nozzle shutter 612 is temporarily deformed. Therefore, the nozzle shutter 612 needs to be elastically deformable to a certain extent. This is because, if a hard and elastically less deformable material is used, the nozzle shutter 612 may be broken without being elastically deformed when it is mounted. The nozzle shutter 612 is made of a material with appropriate elasticity. For example, when the outer shape of the conveying nozzle 611 is a cylinder, the nozzle shutter 612 is formed in the cylindrical shape with the inner diameter slightly greater than the outer diameter of the conveying nozzle 611. Furthermore, the first inner rib 612b as a protrusion protruding inward is formed on the inner portion of the nozzle shutter 612. The first inner rib 612b is arranged so as to face the nozzle opening 610 of the conveying nozzle 611, so that it is possible to realize the function to prevent the nozzle shutter 612 from coming off and rotating. A portion of the conveying nozzle 611 to be engaged with the protrusion of the nozzle shutter 612 is not limited to the nozzle opening 610. As long as the protrusion can function to prevent coming off and rotation, any portion of the conveying nozzle 611 may be used.

According to experiments performed by the inventors of the present invention, it is preferable to select a resin material with a tensile elastic modulus of 500 MPa to 2000

MPa as the material of the nozzle shutter 612. When the nozzle shutter 612 is mounted on the conveying nozzle 611, the three ribs (612b to 612d) formed on the inner surface of the nozzle shutter 612 act as resistance while the
5 conveying nozzle 611 is inserted into the nozzle shutter 612. The resistance increases when the first inner rib 612b enters the nozzle opening 610 over the front end 611a of the nozzle.

At this time, if the nozzle shutter 612 is made of a
10 material with certain elasticity, the nozzle shutter 612 is deformed and can be mounted easily. Furthermore, a sliding load caused by tightening the second inner rib 612c and the third inner rib 612d by the conveying nozzle 611 is not increased, which is an advantage.

15 Incidentally, if the nozzle shutter 612 is extremely deformable, the function to prevent coming off and rotation of the first inner rib 612b is reduced.

As a material with certain elasticity applicable to the nozzle shutter 612, when polyethylene or polypropylene
20 was selected, the above-described advantage was obtained stably. Furthermore, it is preferable to set the thickness of the nozzle shutter tube 612e of the nozzle shutter 612 to 0.3 mm to 0.5 mm.

If the nozzle shutter 612 has the material property
25 and the shape as described above, it is possible to reduce costs of a shutter structure that opens and closes the nozzle opening 610.

In relation to the toner container 32 in the state of being stored, a cap 370 common to the first to the fourth
30 embodiments will be explained below.

Fig. 32 is an explanatory perspective view of the toner container 32 in the state of being stored, and the

cap 370 is attached to the toner container 32. The cap 370 is serving as a seal member that seals the opening of the front end opening 305 of the toner container 32 illustrated Fig. 6. Fig. 33 is an explanatory cross-sectional view of the vicinity of the front end of the toner container 32 to which the cap 370 is attached.

The toner container 32 illustrated in Fig. 32 includes an invention as described below. Specifically, the toner container 32 is a powder container, which contains toner as a powder developer. The cap 370 serving as a seal member that seals the receiving opening 331 serving as a developer discharge opening is attachable to the cylindrical container opening 33a of the toner container 32. As described above, the cylindrical container opening 33a is a part of the container body 33. As illustrated in Fig. 1, Fig. 6, and Fig. 7 for example, in the container body 33, the cylindrical container opening 33a is formed so as to penetrate through the container front end cover 34 that is needed to set the toner container 32 to the toner replenishing device 60. Therefore, it is possible to expose the cylindrical container opening 33a of the container body 33 from the container front end cover 34. Because the cylindrical container opening 33a being a part of the container body 33 containing toner can be sealed directly by the cap 370, the sealing effect can be improved and toner leakage can be prevented more reliably.

In the toner container 32 common to the first to the twentieth embodiments, a cap flange 371 is provided on the cap 370. When the cap 370 is attached to the toner container 32, the cap flange 371 hides the ID tag 700 arranged on the container front end cover 34 as illustrated in Fig. 32. Therefore, it is possible to prevent the ID

tag 700 from being contacted or subjected to impact from the outside when the toner container 32 is stored, enabling to protect the ID tag 700.

Furthermore, in the toner container 32 according to the first to the fourth embodiments, the outer diameter of the cap flange 371 of the cap 370 is made greater than the diameters of the container front end cover 34 and the container body 33. Therefore, it is possible to prevent the toner container 32 from being broken when it is dropped, enabling to protect the toner container 32.

Moreover, the cylindrical container opening 33a being a part of the container body 33 is directly sealed by the cap 370. Therefore, the sealing effect can be improved compared with the configuration that the container opening 33a is sealed via a member (for example, the container front end cover 34) separated from the container body 33. For the cylindrical container opening 33a is directly sealed, it is possible to tightly seal the container body 33. For the container body 33 can be sealed tightly, it is possible to prevent air or moisture from entering the container body 33. Consequently, it becomes possible to reduce packaging materials for packaging the toner container 32.

When the toner container 32 is used (when it is attached to the toner replenishing device 60), the cap 370 is detached. As a method for attaching the cap 370 to the toner container 32, any method, such as a screwing method or an engaging method, may be used as long as the cap 370 can be fixed. In this case, a fixing portion of the toner container 32, such as a male screw for the screwing method or an engaged portion in the engaging method, is formed on the outer surface of the cylindrical container opening 33a

exposed from the container front end cover 34. In the toner container 32 according to the embodiments, as illustrated in Fig. 33, a male screw 309 for screwing the cap is arranged on the outer surface of the cylindrical container opening 33a and the screwing method is employed as the method for fixing the seal member.

The configuration for sealing the opening formed by the cylindrical container opening 33a is not limited to the configuration in which the cap 370 is fixed by the screwing method. It may be possible to seal the opening by press fitting a film member on the front end of the cylindrical container opening 33a.

<Fifth Embodiment>

A fifth embodiment will be explained below, in which the cap 370 provided with an absorbent (an adsorption material).

The toner container 32 that uses an absorbent, such as a desiccant, when the toner container is stored will be explained below. The absorbent functions to adsorb not only moisture but also various substances (gas or the like). Therefore, the absorbent includes a desiccant. Examples of the absorbent include silica gel, aluminum oxide, and zeolite. However, any substance having adsorption capability may be used.

When the container body 33 is completely sealed by the cap 370, entry of air or moisture can be prevented. Therefore, the absorbent becomes not needed, and the packaging materials also become not needed. In this method, it is possible to reduce the packaging materials, such as a bag, a cushioning material, or an individual box, for packaging the toner container 32 and to reduce the size of a package. As a result, it is possible to reduce materials

to be used, enabling to reduce an environmental load.

However, the inventors of the present invention confirmed that the toner being powder had generated gas by itself and a cohesion as a small clot of toner had been generated although toner cohesion or solidification had not occur. Such a cohesion may become a cause of a dot, such as a white dot or a dot of arbitrary color, resulting in an abnormal image. Therefore, the cohesion needs to be prevented. If toner that does not generate gas by itself is used, it is possible to omit the absorbent for the sealing as illustrated in Fig. 33. However, because the toner container 32 contains the toner that generates gas by itself, it is preferable to provide an absorbent that adsorbs the gas.

Fig. 34 is an explanatory cross-sectional view of a first example of the toner container 32 when the cap 370 is provided with an absorbent 372. The toner container 32 illustrated in Fig. 34 includes an invention as described below. Specifically, the toner container 32 illustrated in Fig. 34 is configured such that the absorbent 372 is provided on the cap 370 in the toner container 32 illustrated in Fig. 33. In the toner container 32 illustrated in Fig. 34, the absorbent 372 can be detached together with the cap 370 when the cap 370 is detached to use the toner container. Therefore, the operability can be improved.

However, in the configuration illustrated in Fig. 34, the absorbent 372 is exposed to external air around the toner container 32. Therefore, a packaging material is needed.

<Sixth Embodiment>

A second example of the cap 370 provided with the

absorbent will be explained below as a sixth embodiment.

Fig. 35 is an explanatory cross-sectional view of the second example of the toner container 32 when the cap 370 is provided with the absorbent 372. The toner container 32 illustrated in Fig. 35 includes an invention as described below. Specifically, the toner container 32 illustrated in Fig. 35 contains toner as a powder developer inside thereof. The toner container 32 is a powder container in which the cap 370, as a seal member for sealing the receiving opening 331 as a developer discharge opening, can be attached to the cylindrical container opening 33a forming the front end opening in order to seal the inside of the container body 33. In the toner container 32 illustrated in Fig. 35, the absorbent 372 is provided inside the cap 370 that tightly seals the front end opening.

In the toner container 32 illustrated in Fig. 35, the absorbent 372 is provided on the cap 370. Therefore, similarly to the toner container 32 illustrated in Fig. 34, it is possible to detach the absorbent 372 together with the cap 370 when the cap 370 is detached to use the toner container, so that the operability can be improved.

Furthermore, because a space for containing toner (the internal space of the container body 33) is tightly sealed by the cap 370, it is possible to prevent air or moisture from entering the space where toner is stored. Moreover, because the absorbent 372 is provided inside the tightly-sealed space, it is possible to adsorb gas generated by the toner by itself. Therefore, the adsorption performance can be improved compared with the toner container 32 illustrated in Fig. 34. Furthermore, because the space for containing toner (the internal space of the container body 33) is tightly sealed and the absorbent 372 is provided

inside the tightly-sealed space, both of the toner and the absorbent 372 are not influenced by external air around the toner container 32. Therefore, a packaging material is not needed.

5 <Seventh Embodiment>

A third example of the cap 370 provided with an absorbent will be explained below as a seventh embodiment.

Fig. 36 is an explanatory cross-sectional view of the third example of the toner container 32 when the cap 370 is
10 provided with the absorbent 372. The toner container 32 illustrated in Fig. 36 includes an invention as described below. Specifically, the toner container 32 illustrated in Fig. 36 contains toner as a powder developer inside thereof. The toner container 32 is a powder container in which the
15 cap 370, as a seal member for sealing the receiving opening 331 as a developer discharge opening, can be attached to the cylindrical container opening 33a forming the front end opening in order to seal the inside of the container body 33. In the toner container 32 illustrated in Fig. 36, the
20 absorbent 372 is provided inside the cap 370 that tightly seals the front end opening. Furthermore, the toner container 32 illustrated in Fig. 36 is arranged so that at least a part of the absorbent 372 is housed in a recess (the front end opening 305) on the front end of the toner
25 container 32. The recess on the front end of the toner container 32 is a cylindrical space formed between the front side end of the front end opening 305 and the front side end of the container seal 333.

In the toner container 32 illustrated in Fig. 36, the
30 absorbent 372 is provided on the cap 370. Therefore, similarly to the toner container 32 illustrated in Fig. 34 and Fig. 35, it is possible to detach the absorbent 372

together with the cap 370 when the cap 370 is detached to use the toner container, so that the operability can be improved.

Furthermore, similarly to the toner container 32 illustrated in Fig. 35, because the space for containing toner (the internal space of the container body 33) is completely sealed by the cap 370, it is possible to prevent air or moisture from entering the space containing toner. Furthermore, because the absorbent 372 is provided inside the tightly-sealed space, it is possible to adsorb gas generated by the toner itself. Therefore, the adsorption performance can be improved compared with the toner container 32 illustrated in Fig. 34. Moreover, because the space for containing toner (the internal space of the container body 33) is tightly sealed and the absorbent 372 is provided in the tightly-sealed space, both of the toner and the absorbent 372 are not influenced by external air around the toner container 32. Therefore, a packaging material is not needed.

The toner container 32 illustrated in Fig. 36 is arranged such that at least a part of the absorbent 372 is housed in the recess on the front end of the toner container 32. Therefore, in addition to the same advantageous effects as the toner container 32 illustrated in Fig. 35, it is possible to reduce the length of the cap 370 in the rotation axis direction. As a result, it is possible to reduce the size of the toner container 32 in the state of being stored.

In the configuration in which the toner container 32 is sealed by the cap 370, it may be possible to improve the sealing performance between the cylindrical container opening 33a of the toner container 32 and the cap 370 by

using a packing material or the like.

In the configuration in which the absorbent 372 is provided on the cap 370, the absorbent 372 may be integrated with the cap 370 (fixed to the cap 370) or may
5 be separated from the cap 370 (not fixed to the cap 370). However, when the absorbent 372 is fixed and integrated with the cap 370, because it becomes possible to detach the absorbent 372 together with the cap 370, it is possible to prevent the absorbent 372 from remaining non-detached by
10 error and improve the operability.

A problem with a conventional toner container that cannot directly seal the space for containing toner (the container body) by a seal member will be explained below.

In recent years, toner used in image forming
15 apparatuses has more-improved low-temperature fixability and a smaller diameter, so that the heat resistance performance tends to become lower. Therefore, for example, if the toner is subjected to a high-temperature environment during transport, the toner is cohered, and in the worst
20 case, solidified. Consequently, the toner cannot be supplied from the toner container to an image forming apparatus. It is known that the toner cohesion and solidification are much more likely to occur at higher humidity if the temperature environment is the same. A
25 distribution route of a toner container to a user varies and it is impossible to manage the environment of all the routes. For example, when transport by land, by plane, and by sea are available, it is difficult to manage the temperature and humidity in all the routes.

30 As a measure to cope with the above situation, it may be possible to use a container that can control a transport environment. However, it is almost impossible to introduce

the container in all the transport routes, and there is a problem with an increase in costs. With regard to the above matters, because the toner container 32 according to the embodiment can directly seal the cap 370 by the cylindrical container opening 33a being a part of the container body 33 containing toner, the sealing effect can be improved and toner leakage can be prevented more reliably. Furthermore, because the sealing effect is improved, the toner container 32 is less likely to be influenced by an external environment when the toner container 32 is stored.

Moreover, because attachment of the toner container 32 to the toner replenishing device 60 becomes possible by detaching the cap 370 from the toner container 32, it is possible to provide a powder container with good usability.

Furthermore, because the cap 370 has a shape that can protect the ID tag 700 and the toner container 32, it is possible to reduce cushioning materials or individual boxes for packaging the toner container 32 and reduce the size of a package. Therefore, it is possible to reduce materials to be used and an environmental load.

<Eighth Embodiment>

As an eighth embodiment, a first example of the toner container 32 that includes the cap 370 provided with a toner leakage preventer will be explained below.

After the toner container 32 being the powder container is distributed to a user, the toner container 32 is usually handled by the user. Therefore, the toner container 32 may be roughly handled because it is impossible to specifically regulate the way to handle the toner container. Therefore, an adequate measure against oscillation or falling is needed in order to prevent toner

leakage even when the toner container 32 is roughly handled.

Regarding the toner leakage, leakage from the receiving opening 331 needs to be prevented. To prevent the leakage, it is necessary to prevent toner leakage that may occur when a gap is generated between the container seal 333 forming the receiving opening 331 and the container shutter 332 that closes the receiving opening 331.

Fig. 37 is an explanatory cross-sectional view of the first example of the toner container 32 when the cap is provided with a toner leakage preventer, according to the eighth embodiment. The toner container 32 illustrated in Fig. 37 includes an invention as described below. Specifically, the toner container 32 illustrated in Fig. 37 is a powder container, which includes the container body 33, the container seal 333, the container shutter 332, and the cap 370, and in which a cylindrical member 373 is attached to the cap 370. The container body 33 is a powder storage that contains therein toner as powder. The container seal 333 forms the receiving opening 331 serving as the nozzle receiving opening arranged on the opening on the front end of the container body 33. The container shutter 332 is an open/close member for the receiving opening 331. The cap 370 is a seal member for the front end opening, i.e., a powder discharge side, of the container body 33. The cylindrical member 373 is the toner leakage preventer.

In the toner container 32 illustrated in Fig. 37, the cylindrical member 373 is made of a material different from the material of the cap 370, and the cylindrical member 373 is fixed to the cap 370 by an adhesive agent or the like. Furthermore, as illustrated in Fig. 37, when the cap 370 is attached, a surface of the cylindrical member 373 on an opposite side of the side fixed to the cap 370 (the right

side in Fig. 37) is in contact with the container front end surface of the container shutter 332. The cylindrical member 373 has a circular shape with a diameter greater than the diameter of the container shutter 332 and smaller than the annular outer circumference of the container seal 333.

With this configuration, when the cap 370 is attached to the toner container 32, the surface of the cylindrical member 373 comes in contact with the container front side end surfaces of the container shutter 332 and the container seal 333 simultaneously. At this time, the surface of the cylindrical member 373 comes in contact so as to bridge a boundary between the container shutter 332 and the container seal 333. Therefore, it becomes possible to directly seal the receiving opening 331 and prevent toner leakage even when a gap is generated between the container seal 333 and the container shutter 332 due to impact caused by oscillation or falling. In this way, the toner container 32 illustrated in Fig. 37 can prevent toner leakage and become effective against oscillation or falling. Therefore, even when the toner container 32 is roughly handled during transport or the like, it is possible to prevent toner leakage.

Furthermore, as described above, in the toner container 32 illustrated in Fig. 37, the cylindrical member 373 is made of a material different from the material of the cap 370. Therefore, it is possible to form the cap 370 with a less expensive material, such as polystyrene resin, and form the cylindrical member 373 with a material having high flexibility, such as rubber or sponge. If the cylindrical member 373 is made with a material having high flexibility, when the cylindrical member 373 comes in

contact with the end surfaces on the front end of the container shutter 332 and the container seal 333, the sealing performance with respect to the contacted members can be improved. Therefore, the cylindrical member 373 can
5 become more effective to prevent toner leakage due to impact caused by oscillation or falling.

Furthermore, by forming the cap 370 with a less expensive material, such as polystyrene resin, different from the material of the cylindrical member 373, it becomes
10 possible to reduce costs while maintaining the toner leakage preventing function of the cylindrical member 373.

<Ninth Embodiment>

A second example of the toner container 32 that includes the cap 370 provided with the toner leakage
15 preventer will be explained below as a ninth embodiment.

Fig. 38 is an explanatory cross-sectional view of the second example of the toner container 32 when the cap is provided with the toner leakage preventer. The toner container 32 illustrated in Fig. 38 includes an invention
20 as described below. Specifically, the toner container 32 illustrated in Fig. 38 is a powder container, which includes the container body 33, the container seal 333, the container shutter 332, and the cap 370, and in which a cylindrical portion 374 is integrated with the cap 370.
25 The cylindrical portion 374 is the toner leakage preventer.

In the toner container 32 illustrated in Fig. 38, when the cap 370 is attached, the cylindrical portion 374 comes in contact with the container shutter 332. At this time, a surface of the cylindrical portion 374 protruding from the
30 cap 370 in the rotation axis direction (the right side in Fig. 38) is in contact with the container front end surface of the container shutter 332 (the left side in Fig. 38).

The surface of the cylindrical portion 374 has a circular shape with a diameter greater than the container shutter 332 and smaller than the annular outer circumference of the container seal 333.

5 With this configuration, when the cap 370 is attached to the toner container 32, the surface of the cylindrical portion 374 comes in contact with the container front side end surfaces of the container shutter 332 and the container seal 333 simultaneously. At this time, the surface of the
10 cylindrical portion 374 comes in contact so as to bridge a boundary between the container shutter 332 and the container seal 333. Therefore, it becomes possible to directly seal the receiving opening 331 and prevent toner leakage even when a gap is generated between the container
15 seal 333 and the container shutter 332 due to impact caused by oscillation or falling. In this way, the toner container 32 illustrated in Fig. 38 can prevent toner leakage and become effective against oscillation or falling. Therefore, even when the toner container 32 is roughly
20 handled during transport or the like, it is possible to prevent toner leakage. Furthermore, because the cylindrical portion 374 can be integrated as a part of the cap 370 (integrally molded), it is possible to reduce costs.

<Tenth Embodiment>

25 A third example of the toner container 32 that includes the cap 370 provided with the toner leakage preventer will be explained below as a tenth embodiment.

Fig. 39 is an explanatory cross-sectional view of the third example of the toner container 32 when the cap is
30 provided with the toner leakage preventer. The toner container 32 illustrated in Fig. 39 includes an invention as described below. Specifically, the toner container 32

illustrated in Fig. 39 is a powder container, which includes the container body 33, the container seal 333, the container shutter 332, and the cap 370, and in which the cylindrical portion 374 is integrated with the cap 370.

5 Furthermore, in the powder container, a front end elastic member 375 is formed on the end surface of the cylindrical portion 374 in contact with the receiving opening 331. The front end elastic member 375 is made of a material with high flexibility, such as rubber or sponge.

10 In the toner container 32 illustrated in Fig. 39, when the cap 370 is attached, the front end elastic member 375 on the cylindrical portion 374 comes in contact with the container front end surface of the container shutter 332 (the left side in Fig. 39). The cylindrical portion 374 is
15 integrated as a part of the cap 370 and the front end elastic member 375 is provided on a surface of the cylindrical portion 374 protruding from the cap 370 in the rotation axis direction (the right side in Fig. 39). The front end elastic member 375 has a circular shape with a
20 diameter greater than the container shutter 332 and smaller than the annular outer circumference of the container seal 333.

With this configuration, when the cap 370 is attached to the toner container 32, the circular surface of the
25 front end elastic member 375 comes in contact with the container front end surfaces of the container shutter 332 and the container seal 333 simultaneously. At this time, the circular surface of the front end elastic member 375 comes in contact so as to bridge a boundary between the
30 container shutter 332 and the container seal 333. Therefore, it becomes possible to directly seal the receiving opening 331 and prevent toner leakage even when a

gap is generated between the container seal 333 and the container shutter 332 due to impact caused by oscillation or falling. In this way, the toner container 32 illustrated in Fig. 39 can prevent toner leakage and becomes effective against oscillation or falling. Therefore, even when the toner container 32 is roughly handled during transport or the like, it is possible to prevent occurrence of toner leakage. In particular, in the configuration illustrated in Fig. 39, the front end elastic member 375 is provided on the cylindrical portion 374 of the cap 370. Therefore, when the front end elastic member 375 comes in contact with the container shutter 332 and the container seal 333, it is possible to improve the sealing performance with respect to these parts, compared with the toner container 32 illustrated in Fig. 38. Therefore, it is possible to further enhance the advantageous effect to prevent toner leakage due to impact caused by oscillation or falling.

<Eleventh Embodiment>

A fourth example of the toner container 32 that includes the cap 370 provided with the toner leakage preventer will be explained below as an eleventh embodiment.

Fig. 40 is an explanatory cross-sectional view of the fourth embodiment of the toner container 32 when the cap is provided with the toner leakage preventer. The toner container 32 illustrated in Fig. 40 includes an invention as described below. Specifically, the toner container 32 illustrated in Fig. 40 is a powder container, which includes the container body 33, the container seal 333, the container shutter 332, and the cap 370, and in which the cylindrical portion 374 is provided on the cap 370. Furthermore, the absorbent 372 is arranged inside the

cylindrical portion 374 so as to be open to the outside, that is, so as to be exposed to external air.

The toner container 32 illustrated in Fig. 40 is configured by adding the absorbent 372 to the toner container 32 illustrated in Fig. 38. Therefore, similarly to the toner container 32 illustrated in Fig. 38, the advantageous effect against to oscillation or falling can be obtained. Consequently, even when the toner container 32 is roughly handled during transport or the like, it is possible to prevent toner leakage. Furthermore, because the cylindrical portion 374 can be integrated as a part of the cap 370 (integrally molded), it is possible to reduce costs.

Moreover, because the toner container 32 illustrated in Fig. 40 is provided with the absorbent 372, it is possible to prevent air or moisture from entering the toner container 32. Furthermore, because the absorbent 372 is provided in the cylindrical portion 374 formed on the cap 370, it is possible to detach the absorbent 372 together with the cap 370 when the cap 370 is detached to use the toner container. Therefore, the operability can be improved.

However, in the configuration illustrated in Fig. 40, the absorbent 372 is exposed to external air around the toner container 32. Because the absorbent 372 is provided in order to adsorb moisture around the toner container 32, it is necessary to use a packaging material, such as a storage bag.

In a normal situation, providing the cap 370 is sufficient. However, if the cap 370 does not have the sealing capability (if it is used to reduce impact or the like), providing the cylindrical portion 374 and the

adsorption material 372 as illustrated in Fig. 40 is effective.

<Twelfth Embodiment>

A fifth example of the toner container 32 that
5 includes the cap 370 provided with the toner leakage preventer will be explained below as a twelfth embodiment.

Fig. 41 is an explanatory cross-sectional view of the fifth example of the toner container 32 when the cap is provided with the toner leakage preventer. The toner
10 container 32 illustrated in Fig. 41 includes an invention as described below. Specifically, the toner container 32 illustrated in Fig. 41 is a powder container, which includes the container body 33, the container seal 333, the container shutter 332, and the cap 370, and in which the
15 cylindrical portion 374 is provided on the cap 370. The cap 370 can be attached to the cylindrical container opening 33a forming the front end opening so as to seal the inside of the container body 33. Moreover, the absorbent 372 is arranged inside the cylindrical portion 374 so as to
20 adsorb adsorption object in the space sealed by the cap 370.

Furthermore, in the toner container 32 illustrated in Fig. 41, because the absorbent 372 adsorbs gas or the like generated by the toner itself, an adsorbing hole 374a as an opening is arranged on the side of the cylindrical portion
25 374. Accordingly, the space sealed by the cap 370 and the space where the adsorbing hole 374a is arranged can communicate with each other.

The toner container 32 illustrated in Fig. 41 is configured by closing the container front end surface of
30 the cylindrical portion 374 of the toner container 32 illustrated in Fig. 38 and providing the absorbent 372 on the end surface. Therefore, similarly to the toner

container 32 illustrated in Fig. 38, the advantageous effect against oscillation or falling can be obtained. Consequently, even when the toner container 32 is roughly handed during transport or the like, it is possible to prevent toner leakage.

Furthermore, because the toner container 32 illustrated in Fig. 41 includes the absorbent 372, it is possible to prevent air or moisture from entering the toner container 32. Moreover, because the absorbent 372 is arranged in the cylindrical portion 374 formed on the cap 370, it is possible to detach the absorbent 372 together with the cap 370 when the cap 370 is detached to use the toner container. Therefore, the operability can be improved.

In the toner container 32 illustrated in Fig. 41, because the space for containing toner (the internal space of the container body 33) is completely sealed by the cap 370, it is possible to prevent air or moisture from entering the space containing toner. Furthermore, because the space sealed by the cap 370 and the space where the adsorbing hole 374a is arranged communicate with each other, it is possible to adsorb gas generated by the toner itself. Therefore, it is possible to improve the adsorption performance compared with the configuration illustrated in Fig. 40. Moreover, because the space for containing toner (the internal space of the container body 33) is sealed and the absorbent 372 is arranged in the sealed space, both of the toner and the absorbent 372 are not influenced by external air around the toner container 32. Therefore, a packaging material is not needed.

In the toner container 32 illustrated in Fig. 40 and Fig. 41, it is explained that the absorbent 372 is provided

on the cylindrical portion 374 that is integrated with the cap 370. However, as the toner leakage preventer where the absorbent 372 is provided, as illustrated in Fig. 37, the cylindrical member 373 separated from the cap 370 may be used.

In the toner container 32 illustrated in Fig. 37 to Fig. 41, a screwing method is employed as the method for fixing the cap 370 serving as the seal member. However, as the method for attaching the cap 370 to the toner container 32, any method, such as a screwing method or an engaging method, may be used as long as the attachment can be ensured, similarly to the configuration explained above with reference to Fig. 33.

In the toner container 32 illustrated in Fig. 37 to Fig. 41 (the eighth to the twelfth embodiments), the cylindrical member 373, the cylindrical portion 374, or the front end elastic member 375 presses the container shutter 332 and the container seal 333. Therefore, the toner container 32 becomes effective against impact caused by oscillation or falling. Consequently, even when the toner container 32 is roughly handled during transport or the like, it is possible to prevent toner leakage.

Furthermore, because the cylindrical member 373, the cylindrical portion 374, or the front end elastic member 375 presses the container shutter 332 and the container seal 333, even when the toner container 32 oscillates or falls, movement of the container shutter 332 can be regulated. Moreover, because a compression-contact with the container seal 333 is maintained, a gap is not generated. Therefore, toner leakage can hardly occur.

The toner container 32 illustrated in Fig. 36 to Fig. 41 (the seventh to the twelfth embodiments) relates to an

invention for using a space between the end of the cylindrical container opening 33a and the receiving opening 331. This space is originally provided to realize an invention for housing the nozzle shutter 612 and the nozzle shutter spring 613 in a closely-contacted state when the toner container is attached to the toner replenishing device 60, for preventing toner scattering, and for reducing the size. Therefore, the exquisite feature of the invention described in connection with Fig. 36 to Fig. 41 is to use the same space in the engaged state between the toner container 32 and the cap 370 when the toner container 32 alone is stored.

<Thirteenth Embodiment>

Explanation will be given of screwing of the nozzle receiver 330 with respect to the container body 33.

The toner container 32 of the first to the twelfth embodiments explained above with reference to Fig. 11 etc. is configured such that toner is filled in the container body 33 via the opening of the cylindrical container opening 33a, and thereafter, the nozzle receiver 330 is press fitted to the cylindrical container opening 33a of the container body 33.

Therefore, if the nozzle receiver 330 is detached from the container body 33 by releasing the press fitting and the container body 33 is refilled with toner, all the members can be reused. Furthermore, by detaching the nozzle receiver 330 from the container body 33, it is possible to easily disassemble and sort out parts, which enables material recycling.

A configuration example for fixing the nozzle receiver 330 to the container body 33 by screwing will be explained below.

Fig. 42 is an explanatory perspective view of the container shutter supporter 340 used in the nozzle receiver 330 fixed to the container body 33 by screwing. In the container shutter supporter 340 illustrated in Fig. 42, male screws 337c are formed on the outer surface of the nozzle receiver fixing portion 337. A male screw groove (not illustrated) for screwing the male screws 337c is formed on the inner surface of the cylindrical container opening 33a of the container body 33 of the toner container 32 using the container shutter supporter 340 illustrated in Fig. 42.

In the nozzle receiver 330 using the container shutter supporter 340 illustrated in Fig. 42, screwing to the container body 33 is performed while the container seal 333 and the container shutter 332 are held by the container shutter supporter 340. The toner container 32 including the container shutter supporter 340 illustrated in Fig. 42 has the same configuration as the toner container 32 explained above with reference to Fig. 11 etc., except that the nozzle receiver 330 is fixed to the container body 33 by screwing.

In the toner container 32 explained above with reference to Fig. 11 etc., the opening of the cylindrical container opening 33a for filling toner is closed by the press-fitted nozzle receiver 330. Therefore, in some cases, it is difficult to detach the nozzle receiver 330 from the container body 33 after use and recycling may become difficult. The recycling here includes refilling, in which the toner container 32 is refilled with toner so as to be re-used, and material recycling, in which the toner container 32 is disassembled and materials are sorted out.

To cope with the above matter, in the toner container

110

32 using the container shutter supporter 340 illustrated in Fig. 42, the nozzle receiver 330 is rotated in the arrow A direction in Fig. 42 while the toner container 32 is being fixed. Alternatively, the toner container 32 is rotated in the direction opposite the arrow A direction in Fig. 42 while the nozzle receiver 330 is fixed. Due to the rotation, the screwing between the nozzle receiver 330 and the container body 33 is released and the nozzle receiver 330 can easily be detached from the container body 33 after use. Therefore, the nozzle receiver 330 that is closing the opening of the cylindrical container opening 33a being a toner filling opening can easily be detached from the container body. Therefore, with the toner container 32 using the container shutter supporter 340 illustrated in Fig. 42, it is possible to easily perform refilling such that the toner container 32 is refilled with toner so as to be reused after use.

Furthermore, the nozzle receiver 330 includes the container shutter supporter 340, the container shutter 332, the container seal 333, the container shutter spring 336, and the like. The container shutter supporter 340 and the container shutter 332 are made of resin material, such as ABS, PS, or POM. Moreover, the container seal 333 is made of sponge or the like, and the container shutter spring 336 is made of SW-C (hard steel wire), SWP-A (piano wire), SUS304 (stainless wire for spring), or the like. In this way, the nozzle receiver 330 is formed of different materials. Therefore, because the nozzle receiver 330 can easily be detached from the container body 33 made of PET (polyethylene terephthalate) or the like, it is possible to easily perform the material recycling, in which the toner container 32 is disassembled and materials are sorted out.

111

Furthermore, the present embodiment includes an invention as described below. Specifically, in the toner container 32 according to the embodiment, as illustrated in Fig. 6 for example, the spiral rib 302 is wound such that, on the right side of the container body 33 viewed from the container front end, the spiral rib 302 is inclined so that the upper end is located on the container front end relative to the lower end. Therefore, by rotating the container body 33 such that the right side of the container body 33 viewed from the container front end moves from top to bottom (rotates in the arrow A direction in Fig. 6), toner in the container body 33 can be conveyed to the container front end.

The nozzle receiver 330 rotates in the A direction in Fig. 6 together with the container body 33. However, because the container seal 333 slides against the conveying nozzle 611, a frictional force generated between the container seal 333 and the conveying nozzle 611 is acting in a direction of stopping the rotation. A case will be explained below that the winding direction of the male screws 337c differs from the direction illustrated in Fig. 42. In this case, the winding direction of the male screws 337c becomes the same as the direction of the spiral rib 302. That is, the male screws 337c on the right side of the nozzle receiver fixing portion 337 are inclined such that the upper end is on this side relative to the lower end viewed from the container front end (a right-hand screw direction). In this way, if the winding direction of the male screws 337c differs from the direction illustrated in Fig. 42, the rotation direction of the container body 33 (arrow A direction in Fig. 6) corresponds to the direction of releasing the screwing from the container body.

By contrast, in the toner container 32 using the container shutter supporter 340 illustrated in Fig. 42, the winding direction of the male screws 337c is opposite to the winding direction of the spiral rib 302. Specifically, in the toner container 32 according to the embodiment, as illustrated in Fig. 42, the male screws 337c are formed such that the nozzle receiver 330 becomes a left-hand screw. Therefore, it is possible to prevent a situation where the rotation of the container body 33 in the arrow A direction acts to release the screwing between the container body 33 and the nozzle receiver 330.

Inventions about a positional relationship between the scooping wall surface 304f and the shutter rear end supporting portion 335 in the container body 33 will be explained below.

First, a problem is explained below. When the container body 33 is adequately filled with toner just after the toner container 32 is attached to the toner replenishing device 60 for example, toner is continuously supplied to the nozzle opening 610 of the conveying nozzle 611 as if the toner overflows. Therefore, by rotating the shutter side supporting portions 335a so as to cross an area above the nozzle opening 610 to alleviate the overflow of the toner and by controlling the amount of rotation of the conveying screw 614 through intermittent operation, it is possible to replenish the developing device 50 with a desired amount of toner.

Incidentally, if the amount of toner in the container body 33 is reduced due to use over time, the rate of the amount of toner slipped from a gap between the end of the scooping portion 304 in the rotation center side and the conveying nozzle 611 to the amount of toner that flows from

the scooping portion 304 to the nozzle opening 610 increases. Therefore, the amount of toner replenished to the developing device 50 is reduced. If the amount of toner replenished to the developing device 50 is reduced, the toner density of the developer G in the developing device 50 becomes unstable. Finally, the image forming apparatus may alert the toner end and it becomes necessary to replace the toner container 32 although a large amount of toner still remains in the toner container. In this state, the toner remaining amount in the toner container 32 at the time of replacement becomes large, which is a problem.

Fig. 43 is an explanatory front view of the container body 33 fixed with the nozzle receiver 330, taken in a direction perpendicular to the rotation axis when the position in the rotation axis direction is located at the position of the scooping portion 304.

The present embodiment includes an invention as described below. Specifically, as illustrated in Fig. 43, in the toner container 32, the outer surfaces of the shutter side supporting portions 335a face the inner wall surface of the container body 33 on the upstream side of the scooping portion 304 in the rotation direction A of the container body 33a when the nozzle receiver 330 is fixed to the container body 33. More specifically, the outer surface of the shutter side supporting portion 335a faces the upstream side of the container inner wall surface that is divided by the convex 304h, which is a ridge of a rising portion rising inward in the container body 33, into the upstream and downstream sides. With this setting, the scooping wall surface 304f, which is an inner wall surface on the downstream side in the rotation direction A between

114

the inner wall surfaces divided by the convex 304h of the container body 33, can be located above the space 335b between the side supporting portions along with rotation of the container body 33. The nozzle opening 610 is always
5 open with face up. Therefore, when the scooping portion 304 is located in the upper side along with rotation of the toner container 32, toner scooped up by the scooping portion 304 can pass through the space 335b between the side supporting portions and be supplied to the nozzle
10 opening 610.

Furthermore, as illustrated in Fig. 43, a downstream facet 335c, which is a facet of the shutter side supporting portion 335a on the downstream side in the rotation direction, is arranged near the convex 304h that protrudes
15 toward the rotation center of the container body 33. Therefore, toner that has flown along the scooping wall surface 304f drops on the downstream facet 335c and bounces, and therefore is supplied to the nozzle opening 610. In other words, the downstream facet 335c has a bridging
20 function to pass toner received from the scooping wall surface 304f to the nozzle opening 610.

The bridging function of the shutter side supporting portions 335a common to the first to the twentieth embodiments will be explained below. Fig. 9 is a cross-
25 sectional view illustrating a relationship between the scooping portion 304 and the receiving opening 331 of the toner container 32 common to the first to the twentieth embodiments. Fig. 44 is an explanatory cross-sectional view of the container body 33 taken along E-E in Fig. 9, in particular, taken at the end surface of a shaft bearing of
30 the conveying screw 614 on the front end of the conveying nozzle 611 in Fig. 9. Figs. 45A and 45B are functional

115

schematic cross-sectional views taken along E-E.

Specifically, Fig. 45A is a functional schematic diagram of a comparative example for explaining a configuration in which the shutter side supporting portions 335a do not
5 function as a bridge. Fig. 45b is a functional schematic diagram of the configuration illustrated in Fig. 44, in which the shutter side supporting portions 335a function as a bridge.

First, a problem is explained below. As described in
10 Patent Document 6, when the amount of toner conveyed in the conveying nozzle is controllable, and if adequate toner is present near the opening of the conveying nozzle, it is possible to stably convey the toner. However, if the amount of toner in the toner container is reduced, in some
15 cases, the amount of toner conveyed may be reduced and the toner cannot be conveyed stably. This is because, while it is possible to move the toner to the vicinity of the opening by the spiral rib arranged inside the toner container, the toner slips off before it reaches the
20 opening arranged on the conveying nozzle, so that the amount of toner that enters the conveying nozzle is reduced. If the amount of toner conveyed is reduced and the toner cannot be conveyed stably, the toner density of the developer in the developing device becomes unstable.
25 Therefore, as well as explained above with reference to Fig 43, it becomes necessary to replace the toner container. In this state, a large amount of toner remains in the container body, so that the toner remaining amount in the toner container at the time of replacement becomes large.
30 In Fig. 9, the conveying nozzle (conveying tube) 611 is inserted in the nozzle receiver (nozzle insertion member) 330 in the container body 33. The nozzle opening

(powder receiving opening) 610 of the conveying nozzle 611 inserted in the nozzle receiver 330 is open so that toner can be conveyed to the toner replenishing device.

A part of the scooping portion 304 overlaps the nozzle opening 610 in the longitudinal direction of the toner container 32, and some other part of the scooping portion 304 is the inner wall surface of the container body 33 on the container rear end side relative to the nozzle opening 610. Specifically, the scooping portion 304 is formed of the convex 304h, which corresponds to a ridge of a rising portion that is the inner wall of the container body 33 rising toward the inside of the container body 33, and the scooping wall surface 304f, which is a wall surface on the downstream side in the rotation direction of the container between the inner wall surfaces divided by the ridge (see Fig. 44).

As illustrated in Fig. 44, the ridge of the convex 304h has a moderate mountain shape influenced by the blow molding applied to form the container body 33. In Fig. 9 etc., the convex 304h is illustrated by a curve for convenience in order to distinguish it from the scooping wall surface 304f. The scooping portion 304 is a region indicated by a grid in Fig. 9 and is formed of a pair of slopes that connect the convex 304h and the inner cylindrical surface of the container body 33 in a point symmetric manner with respect to the rotation axis of the container body 33. At the E-E-cross-section, the wall surface located upstream in the rotation direction of the container between the inner wall surfaces divided by the ridge extends in approximately the same direction as the cut direction of the E-E-cross-section. Therefore, the wall surface looks thick in Fig. 44, which is illustrated

with a pair of shaded areas on the cylindrical shape of the container body 33. The convex 304h is provided in the same portion that looks thick.

In Fig. 44, the conveying nozzle 611 in the tube shape has the nozzle opening 610 that opens the upper part of the conveying nozzle. The shutter side supporting portions 335a, as a pair, fixed to the container body 33 are provided between the conveying nozzle 611 and the convex 304h. The shutter side supporting portions 335a rotate together with the scooping wall surface 304f along with rotation of the container body 33. At the E-E-cross-section (at the end surface of the shaft bearing of the conveying screw 614 on the front end of the conveying nozzle 611), the convex 304h and the shutter side supporting portions 335a face each other. In this state, the scooping wall surface 304f, the downstream facets 335c of the shutter side supporting portions 335a, and the rim 611s of the nozzle opening 610 on the upstream side in the rotation direction are arranged in this order viewed from the downstream side in the rotation direction of the container.

Similarly to the scooping function explained above with reference to Fig. 43, even in the scooping portion 304 formed of the scooping wall surface 304f of the container body 33 in Fig. 44, the outer surfaces of the shutter side supporting portions 335a and the downstream facets 335c function as a toner bridging that passes toner from the scooping portion 304 to the nozzle opening 610 when the toner moves in the arrow T1 direction toward the nozzle opening 610 that is the opening of the conveying nozzle 611 being the conveying tube.

As illustrated in Fig. 44, the inner diameters of the

shutter side supporting portions 335a are greater than the outer diameter of the conveying nozzle 611. Therefore, it is possible to prevent the conveying nozzle 611 that has passed through a region in contact with the container seal 333 from coming into contact with the inner surfaces of the shutter side supporting portions 335a. As a result, a load is less likely to be applied when the conveying nozzle 611 is inserted into the container body. Because the container seal 333 with the inner diameter smaller than the outer diameter of the conveying nozzle 611 is formed on the nozzle receiver 330, it is possible to prevent toner in the container body 33 from being leaked to the outside of the container body 33 along the outer surface of the conveying nozzle 611. Therefore, it is possible to prevent toner from flowing out to areas other than the toner conveying passage connecting the container body 33 and the developing device 50 via the conveying nozzle 611.

The bridging function will be explained in detail below with reference to the schematic diagrams in Figs. 45A and 45B.

Fig. 45A illustrates a flow of toner inside the container body 33 when the shutter side supporting portions 335a are arranged so as not to provide the bridging function. Toner scooped up by the scooping portion 304 along the circumferential direction of the container body due to the rotation of the container body 33 in the arrow A direction in Fig. 45A flows in the direction toward the nozzle opening 610 by gravity (an arrow T1 in Fig. 45A). However, some of the toner flows out from the gap between the conveying nozzle 611 and the convex 304h (a convex protruding toward the rotation center from the scooping wall surface 304f) (an arrow T2 in Fig. 45A).

Specifically, Fig. 45A illustrates a state at the moment when the scooping wall surface 304f is not fully brought upward and the convex 304h is located near the position at 9 o'clock on the clock face. At this moment, the rim 611s on the upstream side, the convex 304h of the scooping wall surface 304f, and the downstream facets of the shutter side supporting portions 335a are arranged in this order when viewed from the downstream side in the rotation direction of the container body 33. In this state, the facets of the shutter side supporting portions 335a in the middle are always delayed relative to the convex 304h of the scooping wall surface 304f that attempts to pass toner, so that the toner bridging function is not obtained. Therefore, the replenishing speed may become unstable or the amount of toner remaining in the container body 33 at the time of replacement of the toner container 32 may be increased, which is a defect.

Fig. 45B illustrates a flow of toner inside the container body 33 including the shutter side supporting portions 335a that function as the bridge.

The same configuration as illustrated in Fig. 45A applies in that toner scooped up by the scooping portion 304 along the circumferential direction of the container body due to the rotation of the container body 33 in the arrow A direction in Fig. 45A flows toward the nozzle opening 610 by gravity (the arrow T1 in Fig. 45A). However, in the configuration illustrated in Fig. 45B, because the shutter side supporting portions 335a are arranged so as to fill the gap between the conveying nozzle 611 and the convex 304h (a convex protruding toward the rotation center from the scooping wall surface 304f). To realize this configuration, the downstream facets 335c of the shutter

120

side supporting portions 335a and the convex 304h of the scooping portion 304 are arranged in this order when viewed from the downstream side in the rotation direction of the container body 33.

5 With this arrangement, it is possible to prevent the toner flow indicated by the arrow T2 in Fig. 45A and allow the scooped-up toner to enter the nozzle opening 610 efficiently. Therefore, it is possible to stabilize the replenishing speed even when the amount of toner in the
10 container body 33 is reduced, and to reduce the amount of toner remaining in the container body 33 at the time of replacement of the toner container 32. Furthermore, because the amount of toner remaining in the container body 33 at the time of replacement can be reduced, a running
15 cost can be reduced to improve the economic efficiency and the amount of residual toner to be disposed can be reduced to reduce the influence on the environment.

To fill the gap between the conveying nozzle 611 and the convex 304h as described above, it is desirable that
20 the shutter side supporting portions 335a and the convex 304h are attached to each other. However, as long as it is possible to prevent a toner flow indicated by T2, a slight gap (about 0.3 mm to 1 mm) may be acceptable between the shutter side supporting portions 335a and the convex 304h
25 as illustrated at the convex 304h on the lower part in Fig. 45B. This is because the slight gap can be clogged with toner through the operation performed with a large amount of toner at the start of replenishment and the toner can function as a seal. Furthermore, because the convex 304h
30 is formed by blow molding in which dimensional accuracy is lower than the injection molding, it is difficult to completely attach the shutter side supporting portions 335a

and the convex 304h. In view of the productivity, it is preferable to form the structure with a slight gap.

Fig. 46 is a graph showing a relationship between a toner remaining amount in the container and a replenishing speed (toner supply amount per unit time) according to the embodiment (the configuration illustrated in Figs. 44 and 45B) and the comparative example (the configuration illustrated in Fig. 45A).

It can be found from Fig. 46 that the replenishing speed is stable even when the toner remaining amount in the container decreases in the embodiment, but the replenishing speed decreases when the toner remaining amount in the container decreases in the comparative example. In the comparative example in which a bridging member is not provided, toner passes through (slips away) the gap between the end of the scooping wall surface 304f on the rotation center side being a part of the container body 33 and the conveying nozzle 611. Therefore, the adequate amount of toner can hardly be conveyed to the nozzle opening 610 when the amount of remaining toner decreases, so that the supply amount to the nozzle opening 610 cannot be maintained and the replenishing speed decreases.

The toner container 32 in the examples illustrated in Fig. 9, Fig. 43, Fig. 44, and Fig. 45B includes an invention as described below. Specifically, the scooping wall surfaces 304f are provided at two positions in the container body, and the bridging members (the shutter side supporting portions 335a) are provided at two positions corresponding to the scooping wall surfaces 304f. It is effective to provide the same number of the scooping wall surfaces 304f as the bridging members such that if the scooping wall surfaces 304f of the container body 33 are

provided at three positions, the bridging members are also provided at three positions. Similarly, if the scooping wall surfaces of the container body 33 are provided at four positions or more, it is effective to provide the same
5 number of the bridging members as the scooping wall surfaces 304f.

It is of course possible that only limited ones of a plurality of the shutter side supporting portions 335a are configured as the bridging member corresponding to the
10 scooping wall surfaces 304f. For example, only one of the two shutter side supporting portions 335a is configured as the bridging member and only one scooping wall surface 304f is formed in the container body 33 in accordance with the bridging member.

15 A case will be described below that the container body 33 is formed as a cylindrical member made of resin (in the following, described as a container body 1033 to distinguish it from the container body of the other embodiments) and a scooping portion is provided on a part
20 of the conveyor inside the container body.

Fig. 47A is a perspective view illustrating a configuration in which scooping ribs 304g corresponding to the scooping wall surfaces 304f are integrated with the nozzle receiver 330 (hereinafter, described as a nozzle
25 receiver 1330). Fig. 47B is a cross-sectional view illustrating how the nozzle receiver 1330 illustrated in Fig. 47A is arranged in the container body 1033 in relation to the conveying nozzle 611. Fig. 47C is an explanatory lateral cross-sectional view of an entire toner container
30 1032 on which the nozzle receiver 1330 illustrated in Fig. 47A is mounted. Fig. 47D is a perspective view of a container shutter 1332 as a part of the toner container

123

1032.

The nozzle receiver 1330 illustrated in Figs. 47A to 47D include the scooping ribs 304g as described above, which is integrated with a conveying blade holder 1330b to which
5 conveying blades 1302 made of a flexible material, such as a resin film, are fixed.

The nozzle receiver 1330 illustrated in Figs. 47A to 47D includes a container seal 1333, a receiving opening 1331, the container shutter 1332, and a container shutter
10 spring 1336. The container seal 1333 is a seal having a contact surface that faces and comes in contact with the nozzle shutter flange 612a of the nozzle shutter 612 held by the conveying nozzle 611 when the toner container 1032 is attached to the main body of the copier 500. The
15 receiving opening 1331 is an opening in which the conveying nozzle 611 is inserted. The container shutter 1332 is a shutter that opens and closes the receiving opening 1331. The container shutter spring 1336 is a biasing member that biases the container shutter 1332 to a position at which
20 the container shutter 1332 closes the receiving opening 1331.

In the configuration illustrated in Figs. 47A to 47D, the nozzle receiver 1330 includes an outer surface 1330a of the nozzle receiver that is rotatably fitted to the inner
25 surface 615a of the container setting section of the main body of the copier 500. As illustrated in Fig. 47D, the container shutter 1332 includes a contact section 1332a to be in contact with the conveying nozzle 611 and includes shutter supporting portions 1332b. The shutter supporting
30 portions 1332b extend from the contact section 1332a in the longitudinal direction of the container body 1033, and include hooked portions 1332c that prevent the container

124

shutter 1332 from coming out of the nozzle receiver 1330 due to the biasing force applied by the container shutter spring 1336. The toner container 1032 is provided with a container gear 1301 that is separately structured from the container body 1033 and that is fixed to the nozzle receiver 1330 so as to transmit a driving force.

In this way, a flow structure including the scooping inner wall surfaces, the brides, and a space 1335b between the side supporting portions for flowing toner to the nozzle opening 610 can be integrated.

The toner container 1032 including the scooping ribs 304g will be described in detail below.

As illustrated in Fig. 47C, the toner container 1032 includes a container front end cover 1034, the container body 1033, a bottom cap 1035, and the nozzle receiver 1330. The container front end cover 1034 is provided on the front end of the toner container 1032 in an attachment direction with respect to the main body of the copier 500. The container body 1033 has an approximately cylindrical shape. The bottom cap 1035 is provided on the rear end of the toner container 1032 in the attachment direction. The nozzle receiver 1330 is rotatably held by the approximately cylindrical container body 1033.

A gear exposing hole (not illustrated), which is an opening similar to the gear exposing hole 34a, is arranged on the container front end cover 1034 so that the container gear 1301 fixed to the nozzle receiver 1330 can be exposed. The cylindrical container body 1033 holds the nozzle receiver 1330 so that the nozzle receiver 1330 can rotate. The container front end cover 1034 and the bottom cap 1035 are fixed to the container body 1033 (by a well-known method, such as thermal welding or adhesive agent). The

125

bottom cap 1035 includes a rear end shaft bearing 1035a, which supports one end of the conveying blade holder 1330b, and includes a gripper 1303, which a user can grip when the user attaches/detaches the toner container 1032 to/from the
5 main body of the copier 500.

A method for assembling the container front end cover 1034, the bottom cap 1035, and the nozzle receiver 1330 on the container body 1033 will be explained below.

The nozzle receiver 1330 is inserted from the rear end
10 of the container body 1033 and is positioned so as to be rotatably supported by a front end shaft bearing 1036 arranged on the front end of the container body 1033. Subsequently, positioning is performed such that one end of the conveying blade holder 1330b of the nozzle receiver
15 1330 is rotatably supported by the rear end shaft bearing 1035a, and the rear end shaft bearing 1035a is fixed to the container body 1033. Thereafter, the container gear 1301 is fixed to the nozzle receiver 1330 from the container front end side. After the container gear 1301 is fixed,
20 the container front end cover 1034 is fixed to the container body 1033 so as to cover the container gear 1301 from the container front end side.

The fixation between the container body 1033 and the container front end cover 1034, the fixation between the
25 container body 1033 and the bottom cap 1035, and the fixation between the nozzle receiver 1330 and the container gear 1301 can be performed appropriately by using a well-known method, such as thermal welding or adhesive agent.

A configuration for conveying toner from the toner
30 container 1032 to the nozzle opening 610 will be explained below.

The scooping ribs 304g protrude so as to come closer

to the inner surface of the container body 1033 such that the rib surfaces are continued from downstream facets 1335c, which are on the downstream side in the rotation direction, of shutter side supporting portions 1335a. The rib surfaces are bent once in the middle so as to resemble curved surfaces. However, the configuration is not limited to this example depending on the compatibility with toner. For example, simple planar ribs without bend may be used. Furthermore, because the scooping ribs 304g stand integrally with the space 1335b between the side supporting portions, it is possible to obtain the same bridging function and effect as those obtained by tightly attaching the shutter side supporting portions 335a and the convex 304h to each other. Namely, the conveying blades rotate along with rotation of the nozzle receiver 1330 when the toner container 1032 is attached to the main body of the image forming apparatus, so that toner contained in the toner container 1032 is conveyed from the rear end to the front end where the nozzle receiver 1330 is arranged. Subsequently, the scooping ribs 304g receive the toner conveyed by the conveying blades 1302, scoop up the toner from bottom to top along with the rotation, and flow the toner to the nozzle opening 610 by using the rib surfaces as slides.

A configuration for fixing the nozzle receiver 330 to the container body 33 in the toner container 32 will be explained below as fourteenth to nineteenth embodiments. In Figs. 48A, 49, 51B, and 52B, the container gear 301 are illustrated in a roller shape by omitting gear teeth.

<Fourteenth Embodiment>

Figs. 48A to 50B are explanatory diagrams of the toner container 32 according to the fourteenth embodiment. Figs.

48A and 48B are explanatory perspective views illustrating a state where the nozzle receiver 330 is detached from the container body 33 of the toner container 32. Fig. 49 is an explanatory perspective view of a front end of the toner container 32 and the container setting section 615 according to the fourteenth embodiment. Fig. 50A is a cross-sectional view of the vicinity of the front end of the toner container 32. Fig. 50B is an explanatory enlarged view of a region η illustrated in Fig. 50A. In Figs. 48A to 50B, the container front end cover 34 is omitted. In Figs. 48A to 49, the container shutter 332 is omitted. In Fig. 50, the nozzle shutter 612 is omitted.

The container body 33 of the toner container 32 according to the fourteenth embodiment is molded by a blow molding method as explained above in the other embodiments. However, the accuracy in the blow molding tends to be lower than that of injection molding used in general resin molding. Therefore, in some cases, the circularity of the cylindrical cross-section of the cylindrical container opening 33a being a part of the container body 33 formed by blow molding may be low.

As described above, the cylindrical container opening 33a (the outer surface of the container in the radial direction of the front end opening 305) is slidably fitted to the inner surface 615a of the container setting section 615. Therefore, the position of the toner container 32 relative to the toner replenishing device 60 in the planar direction perpendicular to the rotation axis is determined. At this time, if the circularity of the outer surface of the cylindrical container opening 33a that contributes to the positioning is low, the position of the toner container 32 relative to the toner replenishing device 60 may be

deviated when the toner container rotates.

Meanwhile, the nozzle receiver 330 is a general resin-molded product formed by injection molding. Therefore, the nozzle receiver 330 can be molded with higher accuracy than
5 the container body 33, and the nozzle receiver fixing portion 337 being a part of the nozzle receiver 330 can be molded in a cylindrical shape with good circularity.

In the fourteenth embodiment, the outer diameter of the nozzle receiver fixing portion 337 of the nozzle
10 receiver 330 is greater than the inner diameter of the cylindrical container opening 33a. With this configuration, the outer surface of the cylindrical container opening 33a is adjusted so as to follow the nozzle receiver fixing portion 337 when the nozzle receiver 330 is attached to the
15 container body 33, so that the circularity can be improved.

With the improvement of the circularity of the outer surface of the cylindrical container opening 33a, the positioning accuracy of the toner container 32 relative to the toner replenishing device 60 can be improved.

20 If the circularity of the outer surface of the cylindrical container opening 33a is low, it is necessary to set the inner surface 615a of the container setting section 615 to a greater size by taking a variation in the shape into account. However, if the inner surface 615a is
25 set to a greater size, the freedom of displacement of the outer surface of the cylindrical container opening 33a relative to the inner surface 615a of the container setting section 615 in the planar direction perpendicular to the rotation axis increases, resulting in large backlash. By
30 contrast, in the fourteenth embodiment, the circularity of the outer surface of the cylindrical container opening 33a can be improved and the inner surface 615a of the container

setting section 615 need not be set to a greater size, so that backlash can be reduced. With a reduction of the backlash, the positioning accuracy of the toner container 32 relative to the toner replenishing device 60 can be improved.

As illustrated in Figs. 48A, 50A, and 50B, nozzle receiver engaging protrusions 3301 are provided at two positions on the outer surface of the nozzle receiver fixing portion 337 of the nozzle receiver 330. The two nozzle receiver engaging protrusions 3301 are arranged at positions separated by 180° from each other in the circumferential direction of the outer surface, that is, at positions opposite to each other on the surface of the nozzle receiver fixing portion 337. The nozzle receiver engaging protrusions 3301 have rectangular shapes extending in the circumferential direction when viewed from the radial direction of the nozzle receiver fixing portion 337 that has a cylindrical shape. As illustrated in Fig. 48B, the nozzle receiver engaging protrusions 3301 have trapezoidal shapes when viewed from the axial direction of the nozzle receiver fixing portion 337. The amount of protrusion (height) is about 0.5 mm from the surface of the nozzle receiver fixing portion 337. The slopes of the trapezoids are located on the downstream side in the rotation direction of the container body 33. The surfaces opposite the slopes stand in the radial direction on the upstream side in the rotation direction of the container body 33.

Meanwhile, two engaged holes 3051 of the front end opening are provided on the cylindrical container opening 33a. The engaged holes 3051 of the front end opening are arranged at positions separated by 180° from each other in

130

the circumferential direction of the inner surface of the cylindrical container opening 33a, that is, at positions opposite to each other on the inner surface of the cylindrical container opening 33a, such that the inner surface and the outer surface can communicate with each other. The engaged holes 3051 of the front end opening are elliptical holes extending in the circumferential direction when viewed from the radial direction of the nozzle receiver fixing portion 337.

10 With this configuration, the two nozzle receiver engaging protrusions 3301 are engaged with the two engaged holes 3051 of the front end opening, respectively, when the nozzle receiver 330 is attached to the container body 33. Due to the engagement, it is possible to prevent the nozzle receiver 330 from coming out of the container body 33 and from rotating relative to the container body 33.

Such a rotation preventer as described above is effective to maintain the relative positional relationship of the scooping wall surfaces 304f, the convex 304h, and the shutter side supporting portions 335a being the bridging members, in order to enable the toner bridging function. The reasons why the nozzle receiver engaging protrusions 3301 are formed in the trapezoidal shapes in the axial direction will be described below.

25 The details will be explained below with reference to Fig. 48B. The nozzle receiver 330 can easily be detached from the container body 33 by rotating the nozzle receiver fixing portion 337 toward the slopes. This makes it possible to easily discharge or replenish toner from or to the container body 33. Incidentally, when the container body 33 is attached to the toner replenishing device for operation, because the radially-standing surfaces opposite

131

the slopes are located upstream in the rotation direction of the container body 33, the standing surfaces receive a rotational force transmitted by the container gear 301 via contact sections of the engaged holes 3051 of the front end opening. Specifically, the standing surfaces opposite the slopes of the nozzle receiver engaging protrusions 3301 rotate so as to be continuously engaged with the engaged holes 3051 of the front end opening. Therefore, the nozzle receiver 330 does not rotate relative to the container body 33 during replenishment, so that positional deviation can hardly occur. If the slopes of the trapezoids are located downstream in the rotation direction, the slopes receive the rotational force, which may result in positional deviation.

15 An annular receiver outer seal 3302 is provided at a step where the outer diameter of the nozzle receiver fixing portion 337 of the nozzle receiver 330 is reduced. The step is located opposite a step where the inner circumference of the cylindrical container opening 33a is reduced, so that the receiver outer seal 3302 is sandwiched between the two steps when the nozzle receiver 330 is attached to the container body 33. Therefore, it is possible to prevent toner contained in the container body 33 from being leaked via a gap between the outer surface of the nozzle receiver fixing portion 337 and the inner surface of the cylindrical container opening 33a.

Furthermore, the receiver outer seal 3302 is compressed by the two steps. Therefore, when the nozzle receiver 330 is attached to the container body 33, a restoring force of the compressed receiver outer seal 3302 is applied so that the nozzle receiver 330 pushes against the container body 33. The restoring force is received by

132

the contact (engagement) between the standing surfaces of the nozzle receiver engaging protrusions 3301 and the inner surfaces of the engaged holes 3051 of the front end opening.

As described above, in the fourteenth embodiment, the cylindrical container opening 33a is adjusted so as to follow the nozzle receiver fixing portion 337 resulting in the improved circularity.

The container body 33 including the cylindrical container opening 33a is made of PET (polyethylene terephthalate) and a thickness W1 of the cylindrical container opening 33a is set to 1.1 mm. The nozzle receiver 330 including the nozzle receiver fixing portion 337 is made of PS (polystyrene) and a thickness W2 of the nozzle receiver fixing portion 337 is set to 2 mm. In this case, when a fit tolerance (a difference between the outer diameter of the nozzle receiver fixing portion 337 and the inner diameter of the cylindrical container opening 33a) was set to 0.01 mm to 0.1 mm, preferable results were obtained in terms of the positioning accuracy of the toner container 32 relative to the toner replenishing device 60 and in terms of toner leakage preventing performance.

In general, components are fixed by press fitting. By contrast, in the structure according to the fourteenth embodiment, a tolerance between components can be increased. Therefore, the productivity can be ensured. Furthermore, a restoring force of the receiver outer seal 3302 is received by the engagement of the nozzle receiver engaging protrusions 3301 so that the fit tolerance of an extremely small value including the smallest value of 0.01 mm can be allowed. Moreover, the nozzle receiver engaging protrusions 3301 function as rotation preventers. Furthermore, at the fitted portion, the shape of the

133

cylindrical container opening 33a is adjusted. Thus, the function to fix the positions of the components in the axial direction and the function to adjust the shape of the cylindrical container opening 33a are separated. In the
5 fourteenth embodiment, the nozzle receiver 330 is fixed to the container body 33 by using the nozzle receiver engaging protrusions 3301. If the container body 33 and the nozzle receiver 330 are fixed by only the engagement of the nozzle receiver engaging protrusions 3301, the position of the
10 nozzle receiver 330 relative to the container body 33 may be deviated in the planar direction perpendicular to the rotation axis of the toner container 32. By contrast, in the fourteenth embodiment, because the cylindrical container opening 33a is press fitted by being adjusted in
15 shape, it is possible to prevent positional deviation of the nozzle receiver 330 relative to the container body 33 in the planar direction perpendicular to the rotation axis of the toner container 32.

In this way, in the fourteenth embodiment, both of the
20 engagement of the nozzle receiver engaging protrusions 3301 and press fitting are used to fix the container body 33 and the nozzle receiver 330. By the engagement of the nozzle receiver engaging protrusions 3301, the compressed amount of the receiver outer seal 3302 formed of a rubber packing
25 or the like is determined. This contributes to the positioning of the toner container 32 in the rotation axis direction. Incidentally, if the shape of the cylindrical container opening 33a is more adjusted by press fitting so as to follow the shape of the nozzle receiver fixing
30 portion 337, the outer surface of the nozzle receiver fixing portion 337 and the inner surface of the cylindrical container opening 33a are more tightly attached. This

press fitting contributes to the positioning of the toner container 32 in the planar direction perpendicular to the rotation axis.

<Fifteenth Embodiment>

5 A fifteenth embodiment is the same as the fourteenth embodiment in that the configuration illustrated in Figs. 48A to 50B is basically applicable, but is different from the fourteenth embodiment in that the outer diameter of the nozzle receiver fixing portion 337 of the nozzle receiver
10 330 is smaller than the inner diameter of the cylindrical container opening 33a.

The cylindrical container opening 33a and the nozzle receiver fixing portion 337 are made of hard material because their dimensional accuracy needs to be ensured for
15 engagement with the toner replenishing device 60. Examples of the material for the nozzle receiver 330 having the nozzle receiver fixing portion 337 include PS (polystyrene). Examples of the material for the container body 33 having the cylindrical container opening 33a include PET
20 (polyethylene terephthalate). When the cylindrical container opening 33a and the nozzle receiver fixing portion 337 are fixed to each other by press fitting, the outer surface of the nozzle receiver fixing portion 337 is tightly sealed by the inner surface of the cylindrical
25 container opening 33a. To improve the sealing performance between the inner surface of the cylindrical container opening 33a and the outer surface of the nozzle receiver fixing portion 337, it may be possible to increase the outer diameter of the nozzle receiver fixing portion 337
30 relative to the inner diameter of the cylindrical container opening 33a. However, if the outer diameter of the nozzle receiver fixing portion 337 is increased, although it is

135

possible to adjust the shape of the cylindrical container opening 33a as in the toner container 32 of the fourteenth embodiment, a greater fitting force is needed at the time of attachment. If the fitting force increases, the
5 cylindrical container opening 33a and the nozzle receiver fixing portion 337 may be deformed or broken. Therefore, it becomes necessary to reduce the dimensional tolerance at the fitted portion between the cylindrical container opening 33a and the nozzle receiver fixing portion 337 and
10 to strictly manage the process.

On the other hand, if the outer diameter of the nozzle receiver fixing portion 337 is reduced relative to the inner diameter of the cylindrical container opening 33a, a defect as described below may occur. Specifically, even
15 when the engaged portion is set as a detachment preventer and the position in the rotation axis direction is determined, the nozzle receiver fixing portion 337 of the nozzle receiver 330 moves up and down in the cylindrical container opening 33a within the tolerance between
20 components. Therefore, it becomes difficult to seal the gap between the cylindrical container opening 33a and the nozzle receiver fixing portion 337.

Therefore, in the fifteenth embodiment, the annular receiver outer seal 3302 as a sealing member made of
25 elastic material is used to seal the gap between the inner surface of the cylindrical container opening 33a and the outer surface of the nozzle receiver fixing portion 337. Specifically, the receiver outer seal 3302 is sandwiched between the cylindrical container opening 33a and the
30 nozzle receiver fixing portion 337 such that the receiver outer seal 3302 is compressed and elastically deformed to seal the gap. Because the receiver outer seal 3302 is

elastically deformed, a restoring force acts in a direction in which the nozzle receiver fixing portion 337 comes out of the cylindrical container opening 33a. However, in the fifteenth embodiment, the engaged portions between the nozzle receiver engaging protrusions 3301 and the engaged holes 3051 of the front end opening prevent the nozzle receiver fixing portion 337 from moving in the direction of coming out of the cylindrical container opening 33a. Therefore, the position of the nozzle receiver 330 relative to the container body 33 in the rotation axis direction can be determined.

Furthermore, because the elastically-deformed receiver outer seal 3302 seals the gap between the inner surface of the cylindrical container opening 33a and the outer surface of the nozzle receiver fixing portion 337, a restoring force due to the deformation acts on the whole areas of the inner surface and the outer surface in the circumferential direction. Due to the action of the restoring force, the position of the nozzle receiver fixing portion 337 in the planar direction perpendicular to the rotation axis inside the cylindrical container opening 33a is determined. Therefore, the position of the nozzle receiver 330 relative to the container body 33 in the planar direction perpendicular to the rotation axis can be determined. The positioning is effective to maintain the relative positional relationship of the scooping wall surfaces 304f, the convex 304h, and the shutter side supporting portions 335a being the bridging members in order to enable the toner bridging function.

In the fifteenth embodiment, the sealed state is obtained not directly by the inner surface of the cylindrical container opening 33a and the outer surface of

137

the nozzle receiver fixing portion 337. Therefore, a dimensional tolerance between components can be increased. By increasing the dimensional tolerance, the productivity can be improved. Furthermore, even when the nozzle receiver fixing portion 337 of the nozzle receiver 330 moves up and down inside the cylindrical container opening 33a, because the sealed state is ensured by the elastically-deformed receiver outer seal 3302, it is possible to prevent toner leakage.

10 In the fifteenth embodiment, the receiver outer seal 3302 being the sealing member is compressed by the inner surface being the seal receiving surface of the cylindrical container opening 33a and the outer surface being the seal receiving surface of the nozzle receiver fixing portion 337, 15 so that the sealed state is obtained. Furthermore, the nozzle receiver engaging protrusions 3301 being the engaging portions on the outer surface of the nozzle receiver fixing portion 337 are engaged with the engaged holes 3051 of the front end opening being the engaged 20 portions of the cylindrical container opening 33a, so that the engaged state is obtained. A repulsive force (restoring force) applied by the compressed receiver outer seal 3302 is received by the engagement to prevent the nozzle receiver from coming out of the container body. Due 25 to the repulsive force from the receiver outer seal 3302 and the detachment preventer realized by the engagement, the position of the toner container 32 in the axial direction can be determined. Therefore, it is possible to prevent the nozzle receiver 330 from coming out of the 30 container body 33 due to the impact of an external force.

Furthermore, because the restoring force of the receiver outer seal 3302 acts on the engaged holes 3051 of

the front end opening of the cylindrical container opening 33a due to the engagement with the nozzle receiver engaging protrusions 3301, the engaged holes 3051 of the front end opening need to have certain strength. Therefore, it is
5 desirable to use the strength of a thick portion of the cylindrical container opening 33a for the engaged holes 3051 of the front end opening. In the fifteenth embodiment, as illustrated in Figs. 50A and 50B, the male screw 309 for screwing the cap is provided on the container front end (in
10 the upper part in Figs. 50A and 50B) relative to the engaged holes 3051 of the front end opening, and the male screw 309 for screwing the cap is thicker than other portions. By using the strength of such a thick portion, it becomes possible to prevent the cylindrical container
15 opening 33a from being broken due to the restoring force of the receiver outer seal 3302.

In the fifteenth embodiment, a configuration is explained in which the receiver outer seal 3302 being the sealing member is provided on the outer surface of the
20 nozzle receiver fixing portion 337 of the nozzle receiver 330. However, the sealing member may be provided on the inner surface of the cylindrical container opening 33a of the container body 33.

<Sixteenth Embodiment>

25 A first modification of the configuration, in which the position of the nozzle receiver 330 relative to the container body 33 is determined by using the elastic deformation of the sealing member that seals the gap between the container body 33 and the nozzle receiver 330
30 in the same manner as the fifteenth embodiment, will be explained below as a sixteenth embodiment.

Figs. 51A and 51B are explanatory diagrams of the

toner container 32 according to the sixteenth embodiment. Specifically, Fig. 51A is an explanatory perspective view of the nozzle receiver 330 and Fig. 51B is an explanatory perspective view of the container body 33.

5 The toner container 32 according to the sixteenth embodiment illustrated in Figs. 51A and 51B include an invention as described below. Specifically, an insertion position regulator that regulates an insertion position in the rotation direction when the nozzle receiver 330 is
10 inserted in the container body 33 is provided on the container rear end of each of the nozzle receiver engaging protrusions 3301 as the engaging portions and the engaged holes 3051 of the front end opening as the engaged portions.

 The shapes applied in the sixteenth embodiment
15 illustrated in Figs. 51A and 51B will be explained below. The nozzle receiver engaging protrusion 3301 has a pentagonal shape when viewed in the radial direction of the nozzle receiver 330. The amount of protrusion (height) is about 0.5 mm from the surface of the nozzle receiver fixing
20 portion 337. A crowing part 3301a of the engaging protrusion is formed on the container rear end as the insertion position regulator of the nozzle receiver engaging protrusions 3301. The engaged hole 3051 of the front end opening is a through hole in which an elliptical
25 hole extending in the circumferential direction of the cylindrical container opening 33a and the pentagonal hole described above overlap each other. As an insertion position preventer of the engaged holes 3051 of the front end opening, a crowing part 3051a of the engaged hole
30 (crowing part of the pentagonal hole) is formed on the container rear end.

 The engaged hole 3051 of the front end opening, which

is the engaged portion, is located inside (the side where toner is stored) relative to the front end of the tubular front end opening 305 (the end of the opening). Therefore, when the nozzle receiver fixing portion 337 is inserted in the cylindrical container opening 33a along with attachment of the nozzle receiver 330 to the container body 33, the nozzle receiver engaging protrusion 3301 is hidden by the cylindrical container opening 33a and comes out of sight. Therefore, attachment is difficult at a predetermined position where the nozzle receiver engaging protrusion 3301 is engaged with the engaged hole 3051 of the front end opening.

To cope with this, if a front end shape as an insertion position regulator is provided as in the sixteenth embodiment, it becomes possible to guide the nozzle receiver engaging protrusions 3301 to a predetermined insertion position even when the insertion position in the rotation direction varies in a small range. With the elliptical hole extending in the circumferential direction, it is possible to easily see the nozzle receiver engaging protrusion 3301 at a deviated position.

Furthermore, the advantageous effect as described below may be obtained by providing the insertion position regulator. Specifically, when the rotation drive is input and the container body 33 rotates, one of the insertion position regulators of the engaging portion and the engaged portion is engaged with the other one, so that the nozzle receiver 330 and the container body 33 can be rotated integrally. Therefore, it is possible to prevent the nozzle receiver 330 from rotating and being deviated relative to the container body 33 along with rotation of the toner container 32.

<Seventeenth Embodiment>

A second modification of the configuration, in which the position of the nozzle receiver 330 relative to the container body 33 is determined by using the elastic deformation of the sealing member that seals the gap between the container body 33 and the nozzle receiver 330 in the same manner as the fifteenth embodiment, will be explained below as a seventeenth embodiment.

Figs. 52A and 52B are explanatory diagrams of the toner container 32 according to the seventeenth embodiment. Specifically, Fig. 52A is an explanatory perspective view of the nozzle receiver 330 and Fig. 52B is an explanatory perspective view of the container body 33.

The toner container 32 according to the seventeenth embodiment illustrated in Figs. 52A and 52B include an invention as described below. Specifically, a pair of positioning sections for determining the insertion position in the rotation direction when the nozzle receiver 330 is inserted in the container body 33 and that overlaps at least one of the engaging portion and the engaged portion.

In the seventeenth embodiment illustrated in Figs. 52A and 52B, the nozzle receiver engaging protrusion 3301, which is a protrusion extending in the circumferential direction, is provided as an engaging portion of the nozzle receiver fixing portion 337. A receiver positioning concave 3303, which overlaps the nozzle receiver engaging protrusion 3301 at the center in the circumferential direction and which extends in the rotation axis direction of the container body 33, is provided as one of the pair of the positioning sections for regulating the insertion position of the engaging portion to the engaged portion. The engaged hole 3051 of the front end opening, which is an

elliptical hole extending in the circumferential direction of the front end opening 305, is provided as the engaged portion of the cylindrical container opening 33a. A positioning rib 3052 of the front end opening, which
5 overlaps the engaged hole 3051 of the front end opening at the center in the circumferential direction and which extends in the rotation axis direction of the container body 33, is provided as the other one of the pair of positioning sections for regulating the insertion position
10 of the engaging portion to the engaged portion.

When the nozzle receiver fixing portion 337 is inserted in the cylindrical container opening 33a along with attachment of the nozzle receiver 330 of the container body 33, the cylindrical container opening 33a expands in
15 the vicinity of the nozzle receiver engaging protrusions 3301 protruding from the outer surface of the nozzle receiver fixing portion 337. Therefore, if the positioning sections, such as a rib and a concave, are provided at a position near the engaging portion or the engaged portion
20 so as not to overlap the engaging portion or the engaged portion, the cylindrical container opening 33a needs to be expanded at both of the engaging portions and the positioning sections, resulting in increased fitting load.

By contrast, according to the seventeenth embodiment,
25 the positioning ribs 3303 and 3052 formed of a rib and a concave as a pair are provided at the positions overlapping both of the engaging protrusion 3301 and the engaged hole 3051 in the rotation axis direction. By forming the positioning sections as described above, the positioning
30 rib 3052 of the front end opening and the receiver positioning concave 3303 are engaged with each other on the engaging portion (the nozzle receiver engaging protrusion

3301) that tightly adheres to the inner surface of the cylindrical container opening 33a at the time of attachment. Therefore, the portion that expands in the cylindrical container opening 33a can be minimized to the engaging portion, the engaged position in the rotation direction can be determined, and the nozzle receiver 330 can be prevented from rotating relative to the container body 33 with rotation of the toner container 32.

<Eighteenth Embodiment>

10 A third modification of the configuration, in which the position of the nozzle receiver 330 relative to the container body 33 is determined by using the elastic deformation of the sealing member that seals the gap between the container body 33 and the nozzle receiver 330 in the same manner as the fifteenth embodiment, will be explained below as an eighteenth embodiment.

Figs. 53A to 53C are explanatory diagram of the toner container 32 according to the eighteenth embodiment. Specifically, Fig. 53A is an enlarged perspective view of the nozzle receiver fixing portion 337, Fig. 53B is an enlarged perspective view of the nozzle receiver fixing portion 337, and Fig. 53C is an enlarged cross-sectional view of the vicinity of the front end of the toner container 32.

25 In the eighteenth embodiment, the receiver outer seal 3302 as a sealing member is provided on the outer surface of the nozzle receiver fixing portion 337. However, the sealing member may be provided on the inner surface of the cylindrical container opening 33a of the container body 33.

30 Similarly to the fifteenth embodiment, the toner container 32 according to the eighteenth embodiment is configured such that an engaging portion is provided on the

nozzle receiver 330 and an engaged portion to be engaged with the engaging portion is provided on the cylindrical container opening 33a. To more reliably prevent the nozzle receiver 330 from coming out of the toner container, it may be possible to increase the size of the engaging portion so that the engaged area with respect to the engaged hole can be increased. However, if the engaging portion provided on the nozzle receiver 330 is increased in size, insertion load becomes too large and the cylindrical container opening 33a may be deformed or broken. By contrast, according to the eighteenth embodiment, an engaging protrusion 3053 of the front end opening is provided on the container body 33 in addition to the nozzle receiver engaging protrusion 3301 of the nozzle receiver 330 and a receiver engaged hole 3304 is provided on the nozzle receiver 330 in addition to the engaged hole 3051 of the front end opening of the cylindrical container opening 33a. Therefore, even when the amount of engagement at each portion is small, the overall amount of engagement can be increased.

<Nineteenth Embodiment>

A fourth modification of the configuration, in which the position of the nozzle receiver 330 relative to the container body 33 is determined by using the elastic deformation of the sealing member that seals the gap between the container body 33 and the nozzle receiver 330 in the same manner as the fifteenth embodiment, will be explained below as a nineteenth embodiment.

Figs. 54A and 54B are explanatory diagrams of the toner container 32 according to the nineteenth embodiment. Specifically, Fig. 54A is an enlarged perspective view of the cylindrical container opening 33a and Fig. 54B is an

145

enlarged perspective view of the nozzle receiver fixing portion 337.

The toner container 32 according to the nineteenth embodiment illustrated in Fig. 54 includes an invention as described below. Specifically, the positioning section for determining the insertion position in the rotation direction when the nozzle receiver 330 is inserted in the container body 33 is provided so as to overlap at least one of the engaging portion and the engaged portion in the toner container 32 according to the eighteenth embodiment.

When the nozzle receiver fixing portion 337 is inserted in the cylindrical container opening 33a along with attachment of the nozzle receiver 330 to the container body 33, the cylindrical container opening 33a expands in the vicinity of the nozzle receiver engaging protrusions 3301 protruding on the outer surface of the nozzle receiver fixing portion 337. Therefore, if the positioning sections, such as a rib and a concave, are provided at the position near the engaging portion or the engaged portion so as not to overlap the engaging portion or the engaged portion, the cylindrical container opening 33a needs to be expanded at both of the engaging portion and the positioning section, resulting in increased fitting load.

By contrast, according to the nineteenth embodiment, the positioning ribs 3303 and 3052 formed of a rib and a concave as a pair are provided at the positions overlapping the engaging protrusion 3053 and the receiver engaged hole 3304 in the rotation axis direction. By forming the positioning sections as described above, the positioning rib 3052 of the front end opening and the receiver positioning concave 3303 are engaged with each other on the engaging portion (the nozzle receiver engaging protrusion

3301) that tightly adheres to the inner surface of the cylindrical container opening 33a at the time of attachment. Therefore, the portion that expands in the cylindrical container opening 33a can be minimized to the engaging portion, the engaged position in the rotation direction can be determined, and the nozzle receiver 330 can be prevented from rotating relative to the container body 33 with rotation of the toner container 32.

The toner container 32 according to the fourteenth to the nineteenth embodiments all includes an invention as described below. Specifically, the toner container 32 includes the container body 33 as a powder storage that contains therein toner as powder to be supplied to the toner replenishing device 60 as a powder conveying device. The container body 33 conveys toner contained therein from the container rear end to the container front end where the opening is formed, in the rotation direction by being rotated. The toner container 32 also includes the nozzle receiver 330 serving as a nozzle insertion member that has the receiving opening 331 serving as a nozzle receiving member in which the conveying nozzle 611 as a conveying tube fixed to the toner replenishing device 60 is inserted and that is attached in the opening of the container body 33. In the toner container 32 configured as above, the nozzle receiver 330 includes the nozzle receiver engaging protrusion 3301 that is an engaging portion to be engaged with the engaged hole 3051 of the front end opening that is an engaged portion provided in the cylindrical container opening 33a having the opening. Furthermore, the toner container 32 includes the receiver outer seal 3302 serving as a sealing member that is disposed between the nozzle receiver 330 and the container body 33 when the nozzle

receiver engaging protrusion 3301 is engaged with the engaged hole 3051 of the front end opening and that seals the gap between the nozzle receiver 330 and the container body 33.

5 <Twentieth Embodiment>

A toner container 32 according to a twentieth embodiment will be explained below. A feature of the toner container 32 according to the twentieth embodiment lies in a portion where the nozzle receiver 330 is press-fitted to
10 the container body 33.

Fig. 13 has been referred to in the embodiments explained above, but it can also be referred to for explaining the press-fitted portion of the receiving opening 331 to the container body 33; therefore, it is
15 referred to in explanation below. One of a region $\gamma 1$ and a region $\gamma 2$ in Fig. 13 becomes the press-fitted portion. The region $\gamma 1$ is the inner surface of the container body 33 where the container gear 301 is provided. The region $\gamma 2$ is the inner surface of the container body 33 where the cover
20 hooked portion 306 is provided.

The toner container 32 illustrated in Fig. 13 includes an invention as described below. Specifically, the toner container 32 is a powder container, which contains toner as a powder developer and which includes the container shutter
25 332 and the nozzle receiver 330. The container shutter 332 serves as a receiving opening open/close member that opens and closes the receiving opening 331 serving as a powder discharge opening through which the toner discharged from the container body 33 passes. The nozzle receiver 330
30 serves as an open/close member holder for holding the container shutter 332. The cylindrical container opening 33a is formed on the front end of the toner container 32,

and the outer surface of the cylindrical container opening 33a is slidably fitted to the cylindrical inner surface 615a (shaft bearing) of the container setting section 615. The nozzle receiver 330 is fixed to the inner surface of the container body 33 by press fitting, and the position of the press-fixed portion in the rotation axis direction is located on the container rear end relative to the position at which the outer surface of the cylindrical container opening 33a and the cylindrical inner surface of the container setting section 615 slide against each other.

As illustrated in Fig. 13 for example, the position of the front end of the nozzle receiver 330 and the position of the front end of the cylindrical container opening 33a in the rotation axis direction are the same. Therefore, the nozzle receiver 330 may be press-fitted to the inner surface of the vicinity of the front end of the cylindrical container opening 33a. However, the vicinity of the front end of the cylindrical container opening 33a is fitted to the cylindrical inner surface 615a of the container setting section 615. Therefore, if the press-fitted portion of the cylindrical container opening 33a expands and the outer diameter of the cylindrical container opening 33a increases due to the press-fitting of the nozzle receiver 330, the cylindrical container opening 33a cannot be press-fitted to the container setting section 615, resulting in a failure in the attachment between the toner container 32 and the toner replenishing device 60. Even if the toner container can be attached, the rotational torque of the toner container 32 may increase.

To prevent the above situation, it may be possible to estimate the amount of expansion of the cylindrical container opening 33a due to the press-fitting and set the

outer diameter of the cylindrical container opening 33a at the time of formation of the toner container 32 based on the estimation. However, if the outer diameter of the cylindrical container opening 33a is set by taking the amount of expansion due to the press-fitting into account, the following defect may occur. Specifically, it becomes necessary to set a large tolerance. If the amount of expansion is small within a tolerance range, a difference between the outer diameter of the cylindrical container opening 33a and the inner diameter of the cylindrical inner surface 615a of the container setting section 615 increases resulting in inadequate positioning.

As a configuration for preventing the above situation, in the toner container 32 according to the twentieth embodiment, the outer diameter of the vicinity of the front end of the nozzle receiver fixing portion 337 of the nozzle receiver 330 is set to a slightly smaller size so that the nozzle receiver fixing portion 337 can be loose-fitted, rather than press-fitted, to the inner surface of the front end opening 305. Furthermore, as the press-fitted portion, the outer diameter of the nozzle receiver fixing portion 337 at a position irrelevant of attachment of the container setting section 615 and the container body 33 (a position where the attachment is not influenced) on the container rear end rather than the container front end is set to a size enough to enable adequate press fitting with respect to the inner diameter of the container. The irrelevant position may be a position corresponding to a thick portion of the container gear 301 (the region $\gamma 1$ in Fig. 13) or may be a position at which the inner diameter of the cylindrical container opening 33a is reduced so as to form a step and the thickness of the cylindrical container

150

opening 33a is increased (the region $\gamma 2$ in Fig. 13). At the position where the inner diameter is reduced so as to form a step (the region $\gamma 2$ in Fig. 13), the cover hooked portion 306 formed of an annular rib is also provided on the outer surface.

By forming a portion that has a large outer diameter and that serves as a press-fitted portion on the container rear end relative to the front end of the nozzle receiver fixing portion 337 of the nozzle receiver 330, it becomes possible to prevent an increase in the outer diameter of the cylindrical container opening 33a in the press-fitted portion of the container setting section 615. Therefore, it is possible to prevent a failure in the attachment between the toner container 32 and the toner replenishing device 60 or prevent an increase in the rotational torque of the toner container 32 due to an increase in the outer diameter of the cylindrical container opening 33a.

Furthermore, because the cylindrical container opening 33a remains in the same form as in the preform generated by injection molding, the cylindrical container opening 33a can be molded with high accuracy. The portion at this position does not expand due to the press-fitting of the nozzle receiver 330 and can be used as the positioning section and the sliding section. Therefore, it is possible to maintain the good accuracy of injection molding, enabling to realize positioning with higher accuracy and sliding with good performance.

The toner container 32 formed by press fitting in the region $\gamma 1$ includes an invention as described below. Specifically, the press-fitted portion of the nozzle receiver fixing portion 337 of the nozzle receiver 330 made of resin is located so as to correspond to the position of

the inner surface of the container body 33 where the container gear 301 is provided. The strength of the portion where the container gear 301 is provided is greater than the other portions of the container body 33 because a gear structure is formed to make one round around the outer circumference in the direction perpendicular to the rotation axis. Therefore, the portion is less likely to be deformed due to the press-fitting. Furthermore, because the nozzle receiver fixing portion 337 can be firmly tightened, the nozzle receiver 330 is less likely to come off even over time. Therefore, the portion is preferable as the press-fitted portion.

Furthermore, the toner container 32 formed by press fitting in the region $\gamma 2$ includes an invention as described below. Specifically, the press-fitted portion of the nozzle receiver fixing portion 337 of the nozzle receiver 330 is located so as to correspond to the position of the inner surface of the container body 33 where the cover hooked portion 306 is provided. The strength of the portion where the cover hooked portion 306 is arranged is greater than the other portions of the container body 33 because a rib structure is formed on the entire circumference in the direction perpendicular to the rotation axis. Therefore, the portion is less likely to be deformed due to the press-fitting. Furthermore, because the nozzle receiver fixing portion 337 can be firmly tightened, the nozzle receiver 330 is less likely to come off even over time. Therefore, the portion is preferable as the press-fitted portion.

A holding structure for the ID tag 700 included in the toner container 32 common to the first to the twentieth embodiments will be explained below.

152

Fig. 55 is an explanatory perspective view of the connector 800 fixed to the toner replenishing device 60 and the front end of the toner container 32. As illustrated in Fig. 55, the toner container 32 includes the container body 33 and the container front end cover 34 that is attached to the container body 33 so as to expose the cylindrical container opening 33a provided with the receiving opening 331 serving as a toner discharge opening formed on the container body 33. The toner container 32 also includes the ID tag 700 serving as an information storage device attached to the front end of the container front end cover 34 and a holding structure 345 for holding the ID tag 700.

The ID tag 700 according to the embodiments is based on a contact communication system. Therefore, the connector 800 is arranged on the main body of the toner replenishing device 60 so as to face the front end surface of the container front end cover 34.

Fig. 56 is an explanatory perspective view of the front end of the toner container 32 and the connector 800, when the holding structure 345 is disassembled. As illustrated in Fig. 56, an ID tag hole 701 for positioning is formed on the ID tag 700. When the toner container 32 is attached to the toner replenishing device 60, a positioning pin 801 of the connector 800 is inserted into the ID tag hole 701.

The holding structure 345 includes a holding portion 343 provided with holding bases 358 for holding the ID tag 700, and includes an ID tag holder 344 that serves as a holder for holding the ID tag 700 such that the ID tag 700 can move in the X-Z direction in Fig. 56 and that serves as a cover member detachably attached to the holding portion 343. The ID tag 700 and the holding structure 345 are

arranged in the obliquely upper right space of the container front end cover 34 when the toner container 32 is viewed from the container front end along the rotation axis. The holding structure 345 is arranged on the container front end cover by utilizing the obliquely upper right space that becomes a dead space when the toner container 32 is arranged in tandem with the toner containers 32 of the other colors. This makes it possible to provide a compact-size toner replenishing device that allows the cylindrical toner containers 32 to be arranged adjacent to one another. In the obliquely upper left space of the container front end cover 34, the container gear 301 and the container driving gear 601 of the main body are arranged. To prevent interference between adjacent toner replenishing systems, the toner containers are arranged so as to prevent interference among the ID tag 700, the holding structure 345, terminals 804 of the main body, and the container driving gear 601 of the main body of the toner replenishing device 60.

Fig. 57 is an explanatory perspective view of the front end of the toner container 32 and the connector 800, in which the ID tag 700 is temporarily attached to the ID tag holder 344. As illustrated in Fig. 57, the holding portion 343 includes the holding bases 358 including four rectangular pillars. The holding bases 358 are formed on an ID tag attaching surface 357 on the front end of the container front end cover 34, and hold the back board surface of the ID tag 700 where wiring is not arranged. The ID tag holder 344 includes a frame 352 and holder protrusions 353. The frame 352 is formed so as to surround the outer sides of the holding bases 358 to prevent the ID tag 700 from coming off when the frame is engaged with the

154

holding portion 343. The holder protrusions 353 protrude from the inner wall surface of the frame 352 so as to cover a region where no terminal is arranged on the surface of the ID tag 700. The frame 352 of the ID tag holder 344 has the outer shape large enough to house a rectangular ID tag 700, and holds the ID tag 700 so that the ID tag 700 can move to a certain extent in the X-Z direction when the ID tag 700 is in the frame 352.

The holding structure 345 will be explained in detail below.

The frame 352 of the ID tag holder 344 is formed so as to be longer than the lengths of the holding bases 358 in the Y-axis direction in Fig. 57 (the height from the ID tag attaching surface 357). Therefore, when the ID tag 700 is attached to the holding bases 358, the ID tag 700 is not fixed to the container front end cover 34. Furthermore, the ID tag 700 is attached so as to maintain a clearance with respect to the frame 352 that surrounds the outer side of the ID tag 700 in the X-Z direction. Moreover, the ID tag 700 is attached so as to maintain a small clearance with respect to the holder protrusions 353 of the ID tag holder 344. Therefore, the ID tag 700 is not detached from the container front end cover 34 although the ID tag 700 is not fixed to the container front end cover 34. The ID tag 700 is held such that the ID tag 700 moves and rattles in the ID tag holder 344 when the toner container 32 is lightly shaken.

When the ID tag 700 is attached, as illustrated in Fig. 57, the ID tag 700 is engaged with an inner wall protrusion 351 of the ID tag holder 344 (see Fig. 56) and thereafter attached to the holding bases 358 of the holding portion 343 in the temporary-attached state. At this time, the

155

outer portions of the holding bases 358 function as a guide for the ID tag holder 344. After the ID tag 700 is mounted on the holding bases 358, the attached ID tag 700 is separated from the inner wall protrusion 351 and placed on the front end surfaces of the holding bases 358.

Mounting of the ID tag holder 344 will be explained in detail below.

In the toner container 32 according to the embodiments, the ID tag holder 344 is fixed to the container front end cover 34 not by processing, such as thermal caulking, or fastening using a fastener but by engaging using hooks.

As illustrated in Fig. 56, the ID tag holder 344 includes a holder upper hook 355, a holder lower hook 354, and a holder right side hook 356 on a holder upper part 350, a holder lower part 348, and a holder right side part 349, respectively.

Around the ID tag attaching surface 357 on the container front end cover 34, three attached parts are formed at positions opposite the three hooks, i.e., the holder upper hook 355, the holder lower hook 354, and the holder right side hook 356. Specifically, an upper attached part 359a is formed at the position opposite the holder upper hook 355 around the ID tag attaching surface 357. A lower attached part 359b is formed at the position opposite the holder lower hook 354 around the ID tag attaching surface 357. A side attached part 360 is formed at the position opposite the holder right side hook 356.

When the ID tag holder 344 is set on the container front end cover 34, the three hooks (355, 354, 356) on the ID tag holder 344 are engaged with and fixed to the three attached parts (359a, 359b, 360) on the container front end cover 34. Two of the three attached parts, in particular,

156

the upper attached part 359a and the lower attached part 359b, are in the form of holes, and the remaining one, in particular, the side attached part 360, is in the form of a hook.

5 The upper attached part 359a and the lower attached part 359b in the form of holes are set by using slopes on the front ends of the two hooks (the holder upper hook 355 and the holder lower hook 354) and by using the elasticity of the two hooks. The side attached part 360 in the form
10 of a hook is set by using a slope on the front end of the holder right side hook 356 and by using an inclined surface 360a of the side attached part 360.

With this configuration, as illustrated in Fig. 57, the ID tag 700 is temporarily set inside the frame 352 of
15 the ID tag holder 344 and the ID tag holder 344 is moved along the holding bases 358 on the container front end cover 34. Accordingly, the hooks (355, 354, 356) formed on the ID tag holder 344 can be engaged with the attached parts (359a, 359b, 360) formed on the container front end
20 cover 34, so that the ID tag holder 344 can be fixed to the container front end cover 34 by the engagement between the hooks and the attachment parts.

In the example described above with reference to Fig. 55 to Fig. 57, the engaged portions between the hooks (355, 354, 356) and the attached parts (359a, 359b, 360) are
25 provided on an upper side, a lower side, and a right side of the ID tag holder 344. However, the positions of the engaged portions on the ID tag holder 344 are not limited to a combination of the upper side, the lower side, and the
30 right side. The engaged portions may be provided on only the upper side and the lower side, on only the left side and the right side, or on all of the upper side, the lower

side, the left side, and the right side of the ID tag holder 344. The positions and the number of the engaged portions are not limited by the embodiments.

As described above, in the embodiments, an engaging method using hooks is explained. However, in some cases, it may be possible to fix the ID tag holder 344 to the container front end cover 34 by processing, such as thermal caulking, or fastening using a fastener. For other examples, the ID tag holder 344 may need to be mounted more firmly or a tool for rewriting (rewrite) the ID tag without detaching it from the container front end cover 34 may be available.

With reference to Fig. 58A to Fig. 63, the ID tag 700 serving as an information storage device included in the toner container 32 according to the embodiments will be explained.

In the explanation below, "an approximately rectangular metal plate" includes both a rectangular plate and an approximately rectangular plate. Therefore, "the approximately rectangular metal plate" includes plates obtained by chamfering all or some of the corners of a rectangular metal plate, plates formed in an R shape, and the like.

Figs. 58A to 58C are three-view drawings of the ID tag 700. Fig. 58A is a front view of the ID tag 700 viewed from the connector 800 side. Fig. 58B is a side view of the ID tag 700 viewed in a direction perpendicular to the attaching direction (in the obliquely upper right direction in Fig. 55). Fig. 58C is a back view of the ID tag 700 viewed from the container front end cover 34 side.

Fig. 59 is a perspective view of the ID tag 700, the ID tag holder 344, and the connector 800, in particular,

illustrates a relative positional relationship of the three members (700, 344, 800). In Fig. 59, the holder upper hook 355 and the holder lower hook 354 illustrated in Fig. 56 and Fig. 57 are omitted.

5 Fig. 60 is a perspective view illustrating a state where the ID tag 700 is engaged with the connector 800. Figs. 61A and 61B are circuit diagrams of an electrical circuit of the ID tag 700 and an electrical circuit of the connector 800.

10 Fig. 62A is a front view of the ID tag 700 held by the connector 800. Fig. 62B is a front view of the ID tag 700 rotated about the ID tag hole 701 that is used for positioning. Fig. 63 is a diagram illustrating the ID tag 700 in contact with probes 901 of a conduction inspection
15 device 900 in a test process during manufacturing in a factory.

 In the ID tag 700 according to the embodiments, only one ID tag hole 701 is formed on a substrate 702, and the ID tag hole 701 is arranged between two of a plurality of
20 metallic pads 710 (710a, 710b, 710c) formed of rectangular metal plates.

 As illustrated in Fig. 55, in the toner container 32 according to the embodiments, the rectangular ID tag 700 is arranged such that the long side is inclined rather than
25 being parallel to the vertical direction. Therefore, the vertical direction of the ID tag 700 being arranged on the toner container 32 does not match the longitudinal direction of the ID tag 700. However, in the following, for convenience of explanation, the direction parallel to
30 the long side of the ID tag 700 (the Z'-axis direction in Fig. 58A) is referred to as a tag vertical direction and the direction parallel to the short side of the ID tag 700

(the X'-axis direction in Fig. 58A) is described as a tag horizontal direction. The same applies to the connector 800 that is inclined with respect to the toner replenishing device 60.

5 As illustrated in Figs. 58A to 58C, in the ID tag 700 serving as an information storage device according to the embodiments, the ID tag hole 701 is formed at a position vertically above the gravity center of the substrate 702 in the tag vertical direction. An earth terminal 703 for
10 grounding (earth), which is formed of a metal terminal, is installed on the inner surface of the ID tag hole 701 and around the ID tag hole 701. As illustrated in Figs. 58A to 58C, the earth terminal 703 on the front surface of the substrate 702 of the embodiments is formed so that two
15 earth terminal projections 705 extend in the tag horizontal direction relative to the circular-ring portion.

One rectangular metallic pad 710 (the first metallic pad 710a) is arranged above the ID tag hole 701 in the tag vertical direction. Furthermore, two metallic pads 710
20 (the second metallic pad 710b and the third metallic pad 710c) are arranged below the ID tag hole 701 in the tag vertical direction.

Moreover, as illustrated in Fig. 58C, a protector 720 that is made of a resin material, such as a hemispherical epoxy, and that covers and protects an information storage
25 section (not illustrated) is formed on the back surface of the substrate 702. In the ID tag 700, the ID tag hole 701 is arranged above the protector 720, which is the largest and heaviest component provided on the back surface because
30 it houses an information storage section, such as an IC (integrated circuit), in the tag vertical direction. Therefore, as described above, it is possible to realize

160

the positional relationship, in which the ID tag hole 701 is located vertically above the gravity center of the ID tag 700 in the tag vertical direction. The arrangement of the ID tag hole 701 depends on the shape of the substrate 702 or on the configuration or arrangement of the back surface, such as the protector 720.

Specifically, as illustrated in Fig. 62A, the ID tag 700 according to the embodiments is formed such that the center position of the ID tag hole 701 is located at a distance Z_a above the gravity center of the ID tag 700 in the tag vertical direction.

As illustrated in Fig. 59, the connector 800 includes a connector body 805 that is a hollow box made of resin, and the positioning pin 801 (positioning protrusion) that is a hollow cylinder with a tapered tip that is arranged on the connector body 805 so as to stand in the horizontal direction. An earth terminal 802 of the main body is arranged on the positioning pin 801. The earth terminal 802 of the main body is a plate-shape (or linear-shape) metallic member, a part of which is housed in the hollow section of the positioning pin 801 integrated with the connector body 805. A curved part of the earth terminal 802 is exposed from a slit-shaped opening formed on a part of the periphery of the hollow cylinder so as to protrude from the cylindrical outer surface of the positioning pin 801. One of the terminals 804 of the main body is installed vertically above the positioning pin 801 (the earth terminal 802 of the main body) in the tag vertical direction, and two of the terminals 804 of the main body are installed vertically below the positioning pin 801 in the tag vertical direction. The terminals 804 of the main body are plate-shape (or linear-shape) metallic members.

161

A pair of ribs are provided on the right and left sides of the positioning pin 801 in the tag horizontal direction in the lower part of the connector body 805 such that inner tapered surfaces of the ribs face each other.

5 Furthermore, swing preventers 803 serving as a pair of regulators are provided so as to face the lower both sides of the ID tag 700 below the center of the ID tag hole 701 in the tag vertical direction.

When the ID tag holder 344 is fixed to the container
10 front end cover 34 of the toner container 32 and the toner container 32 is attached to the toner replenishing device 60, the ID tag holder 344 is located between the connector 800 and the ID tag 700. In this state, the ID tag holder 344 holds the ID tag 700 so that the ID tag 700 can move
15 (so that certain backlash can be allowed).

As illustrated in Fig. 59, in the ID tag holder 344, the holder protrusions 353 are provided on the holder lower part 348, a holder left side part 342, and the holder right side part 349, respectively. The three holder protrusions
20 353 provided on the holder lower part 348, the holder left side part 342, and the holder right side part 349 can prevent the ID tag 700 from coming out of the ID tag holder 344 toward the connector 800.

A holder hole 347 is formed on the end of the ID tag
25 holder 344 on the connector 800 side (a wall surface including the holder protrusions 353). The holder hole 347 is shaped such that a large part of the end of the ID tag holder 344 on the connector 800 side including areas facing the four terminals of the connector 800 (the three
30 terminals 804 of the main body and one earth terminal 802 of the main body) is opened. Furthermore, the holder hole 347 of the ID tag holder 344 is shaped such that even an

162

area corresponding to the swing preventers 803 arranged on the connector 800 is opened. When the toner container 32 is attached, the positioning pin 801 passes through the opening position of the holder hole 347 and the swing preventers 803 subsequently pass through the opening position of the holder hole 347 and enter the inside of the ID tag holder 344.

The holding bases 358 facing the back surface of the ID tag 700 (on the protector 720 side) are one part of the container front end cover 34. The four pillars of the holding bases 358 extend from the holding portion 343 to the connector 800 side. The holding bases 358 press the vicinity of the four corners of the rectangular substrate 702 so as to prevent interference with the protector 720 fixed to the ID tag 700, and to prevent interference with the swing preventers 803 which are inserted when the connector 800 is connected.

Meanwhile, when the positioning pin 801 is inserted in the ID tag hole 701 of the ID tag 700, the ID tag 700 is pressed to the container rear end by the earth terminal 802 or the terminals 804 of the positioning pin 801. At this time, the four holding bases 358 support the back surface of the substrate 702, so that the contact state between the terminals can be maintained.

Fig. 60 is a schematic perspective view illustrating a state in which positioning of the connector 800 of the toner replenishing device 60 and the ID tag 700 is completed when the toner container 32 is attached to the toner replenishing device 60 (the main body of the copier 500). Specifically, Fig 60 illustrates a state in which the terminals on the main body side (the terminals 804 of the main body and the earth terminal 802 of the main body)

and the terminals on the ID tag 700 side (the metallic pad 710 and the earth terminal 703) are connected to one another. In Fig. 60, for simplicity of understanding, the ID tag holder 344 and the three metallic pads 710 between the connector 800 and the ID tag 700 are omitted.

In the toner container 32 according to the embodiment, the cylindrical container opening 33a protrudes relative to the container front end cover 34. When the non-attached toner container 32 is moved in the arrow Q direction in Fig. 60 so as to be attached to the toner replenishing device 60, the outer surfaces of the cylindrical container opening 33a and the container setting section 615 are engaged with each other. Consequently, the position of the toner container 32 relative to the toner replenishing device 60 in the rotation axis direction is determined. Thereafter, when the toner container 32 is further moved in the arrow Q direction in Fig. 60, a connection between the ID tag 700 and the connector 800 is started.

After the position of the toner container 32 in the direction perpendicular to the rotation axis direction is determined and the position of the container front end cover 34 in the direction perpendicular to the rotation axis direction is determined, the position of the ID tag 700 in the direction perpendicular to the rotation axis direction is determined. Specifically, after the position of the cylindrical container opening 33a in the direction perpendicular to the rotation axis direction is determined, the ID tag hole 701 of the ID tag 700 is engaged with the positioning pin 801 so as to be picked up by a tapered tip of the positioning pin 801 of the connector 800. With this engagement, the positions of the ID tag 700 in the tag vertical direction and the tag horizontal direction are

164

determined simultaneously. Specifically, the position of the ID tag 700 in the direction perpendicular to the rotation axis direction is determined.

Furthermore, as illustrated in Fig. 62A, the swing preventers 803 of the connector 800 enter the lower edge portions that are horizontal both sides of the substrate 702 in the tag horizontal direction and that are located below the center of the ID tag hole 701 in the tag vertical direction. At this time, even when the posture of the ID tag 700 is misaligned as illustrated in Fig. 62B, when one of the tapered surfaces at the ends of the rib-shaped swing preventers 803 comes in contact with one of the edges, a portion below the ID tag hole 701 rotates in a direction opposite the contacted tapered surface. Then, the rotation stops at a position at which the ID tag 700 comes in contact with the two tapered surfaces equally, and the postural misalignment in the rotation direction (rotation in the double-head arrow in Fig. 62B) can be corrected (corrected to the state illustrated in Fig. 62A). As a result, the positioning of the ID tag 700 is completed.

At this time, a part of the earth terminal 703 of the ID tag 700 (a section corresponding to the inner surface of the ID tag hole 701) comes in contact with the earth terminal 802 of the positioning pin 801 illustrated in Fig. 60, so that the ID tag 700 is earthed (conduction). After the earth is connected, as illustrated in Fig. 61A, the three metallic pads 710 (710a, 710b, 710c) of the ID tag 700 are connected to the three terminals 804 of the connector 800, respectively. Consequently, information can be transmitted between the ID tag 700 and the controller on the toner replenishing device 60 including the connector 800 (the controller 90 of the copier 500).

In this way, according to the embodiment, a positioning structure can be realized with higher accuracy and at lower costs based on various ideas as described below (1) to (5).

5 (1) Only one ID tag hole 701 is provided. Therefore, costs for processing the substrate 702 can be reduced.

(2) The earth terminal 802 of the main body is integrally installed on the side circumferential surface of the positioning pin 801. Therefore, a distance between the
10 positioning pin 801 and the earth terminal 802 of the main body can become substantially zero, and the positioning accuracy of the earth terminal 703 with respect to the earth terminal 802 of the main body can be improved.

(3) In the completely attached state as illustrated in Fig.
15 60, the positional relationship between the ID tag hole 701 and the curved sections of the terminals 804 of the main body is adjusted so that the center of the ID tag hole 701 coincides with a line connecting vertexes of the curved sections (contact sections) of the three terminals 804 on
20 the connector 800. Therefore, it is possible to reduce a distance from the ID tag hole 701 serving as a positioning section to the contact sections of the terminals (the terminals 804 of the main body and the metallic pads 710) in the tag horizontal direction to nearly 0 mm. As a
25 result, the positional accuracy can be improved when the three metallic pads 710 (710a, 710b, 710c) come into contact with the three terminals 804 of the main body.

(4) A plurality of the metallic pads 710 (710a, 710b, 710c) are arranged in a line, and the ID tag hole 701 is arranged
30 at either of two spaces formed between two of the three pads. Therefore, it is possible to reduce a distance from the center of the ID tag hole 701 to the farthest metallic

166

pad 710c (corresponding to the arm length of a pendulum) compared with an arrangement in which a positioning hole (or a notch) is arranged on the upper side or the lower side outside a row of the metallic pads 710 (710a, 710b, 710c) in the tag vertical direction. Specifically, when the positioning hole (or a notch) is arranged outside the row of the three metallic pads 710 (710a, 710b, 710c), the longest arm length becomes the distance corresponding to the three metallic pads 710 from the center (or the center of the notch). However, in the ID tag 700 according to the embodiment, the longest arm length can be reduced to a distance corresponding to the two metallic pads 710. By reducing the arm length of the pendulum, even when the parallelism of the farthest metallic pad 710c with respect to the terminals 804 of the main body is deviated due to, for example, mass production, it is possible to minimize the deviation.

(5) When the toner container 32 is stored alone in some space, a foreign substance may enter the ID tag holder 344 and be stuck between the ID tag 700 and the holder protrusions 353 or the holding bases 358, so that a positional deviation may be left. To cope with this problem, according to the embodiment, the positional relationship is effectively determined such that the ID tag hole 701 of the ID tag 700 is located above the gravity center in the tag vertical direction. Therefore, when the swing preventers 803 formed of a pair of ribs are inserted below the ID tag hole 701 that is the rotation center in the tag vertical direction, the ID tag 700 can be rotated. Specifically, the ID tag 700 comes in contact with the tapered surfaces of the swing preventers 803 (ribs) and is rotated so as to come in contact with the two tapered

surfaces equally. Therefore, it is possible to regulate the positional deviation and correct the posture. As a result, even when only one ID tag hole 701 is provided, the positional accuracy of a plurality of the metallic pads 710 (710a, 710b, 710c) relative to a plurality of the terminals 804 of the main body can be improved simultaneously.

As described above (1) to (5), each of the five ideas can provide each functions and advantageous effects. Even if an inexpensive configuration in which the area size of the metallic pad 710 becomes minimal is applied, it is possible to extremely improve the positional accuracy of a plurality of the terminals (703, 710) on the ID tag 700 including the earth terminal 703 and a plurality of the terminals (802, 804) of the main body.

Other ideas and advantageous effects according to the embodiment will be explained below.

Each of the three metallic pads 710 (710a, 710b, 710c) will be described in detail below. The metallic pad 710a, which is at the highest level, receives a clock signal for controlling communication. The first metallic pad 710a employs a serial communication method that is low-speed but low-cost because of sequential data transfer and employs an I2C (Inter-Integrated Circuit) as a serial bus. The first metallic pad 710a forms a signal line to which a serial clock (SCL) is input when the serial line is connected to the connector 800 of the toner replenishing device 60. The first metallic pad 710a corresponds to a terminal to which a clock signal is input. However, because the clock signal flows in one-way, the first metallic pad 710a is highly likely to cause breakdown of the ID tag 700 if a short circuit occurs between itself and Vcc (a power supply, the third metallic pad 710) to be described later, compared with

168

the other terminals. Therefore, to prevent breakdown of the ID tag 700, the first metallic pad 710a is located more distant from the Vcc. This is because the possibility of breakdown is lowered even if a short circuit occurs between
5 the first metallic pad 710a and GND (the earth terminal 703).

The second metallic pad 710b also employs a serial communication method, employing an I2C as a serial bus, and forms a signal line to which serial data (SDA) is
10 input/output when the signal line is connected to the connector 800 of the toner replenishing device 60. The second metallic pad 710b has bidirectional input/output mechanism, and therefore, the possibility that the ID tag 700 breaks down due to a short circuit is lower than the
15 first metallic pad 710a that employs a one-way input mechanism.

The third metallic pad 710c is a power input portion (Vcc) to which a voltage of 5V or 3.3V is input when it is connected to the connector 800 of the toner replenishing
20 device 60. To reduce a risk of breakdown of the entire device due to a short circuit between the power supply and the GND, the serial data input terminal (the second metallic pad 710b) is arranged between the GND (the earth terminal 703) and the serial clock input terminal (the
25 first metallic pad 710a). As illustrated in Figs. 58A to 58C, the third metallic pad 710c serving as the Vcc overlaps the protector 720 on the back side of the ID chip via the substrate 702, and is located close to an IC driving circuit (not illustrated) in the protector 720.
30 Therefore, a short and thick line can be obtained as a power-supply line, which enables stable power-supply operations (i.e., reduction of malfunction due to noise).

Ideas regarding earth will be described below. In the attachment operation of the toner container 32, the earth terminal 703 of the ID tag 700 comes in contact with the earth terminal 802 of the positioning pin 801 (the connector 800). Thereafter, the three metallic pads 710 (710a, 710b, 710c) of the ID tag 700 start coming into contact with the three terminals 804 of the connector 800. In other words, in the detachment operation of the toner container 32, the contact between the three metallic pads 710 (710a, 710b, 710c) of the ID tag 700 and the three terminals 804 of the connector 800 is released. Thereafter, the contact between the earth terminal 703 of the ID tag 700 and the earth terminal 802 of the positioning pin 801 (the connector 800) is released (separated).

Specifically, as illustrated in Fig. 61A, in the connector 800, the contact start position of the earth terminal 802 of the main body is located closer to the ID tag 700 compared with the three terminals 804 of the terminal.

With this configuration, in the attachment operation of the toner container 32, the ID tag 700 is always earthed when the connection between the metallic pads 710 and the terminals 804 of the main body is started. In the detachment operation of the toner container 32, the ID tag 700 is always earthed when the release of the connection between the metallic pads 710 and the terminals 804 of the main body is started (contact is released). Therefore, it is possible to prevent the electrical circuit on the ID tag 700 from electrically floating because of being not earthed. As a result, the ID tag 700 is less likely to be electrically damaged.

Specifically, when the electrical circuit on the ID

170

tag 700 is not earthed and becomes an electrically floating condition, the electrical circuit comes in the state of being earthed with extremely large impedance. Therefore, even if only slight static electricity generated by a
5 contact or separation between the three metallic pads 710 and the three terminals 804 of the main body flows into the electrical circuit, a high voltage equal to multiplication of the electric current and the impedance is generated. The high voltage causes insulation breakdown inside the IC
10 of the ID tag 700, so that the IC is broken.

Such a defect easily occurs when, as illustrated in Fig. 61B, the contact start positions of the three terminals 804 and the earth terminal 802 in the connector 800 are formed at the same positions with respect to the ID
15 tag 700.

By contrast, according to the embodiment, the curved section of the earth terminal 802 of the main body exposed from the slit-shaped opening of the positioning pin 801 is arranged so as to be closer to the ID tag 700 relative to
20 the curved sections being the most protruding portions of the terminals 804 of the main body protruding toward the ID tag 700. Therefore, the earth is firstly connected at the time of contact and the earth is lastly disconnected at the time of separation, so that the impedance becomes always
25 zero in theory. As a result, even if static electricity flows in the electrical circuit, it is possible to prevent occurrence of insulation breakdown inside the IC.

Furthermore, the ID tag 700 according to the embodiment includes the two earth terminal projections 705
30 arranged on a part of the outer circumference of the earth terminal 703 as explained above with reference to Figs. 58A to 58C.

171

By arranging the earth terminal projections 705 on the front surface of the substrate 702 of the ID tag 700 as described above, it is possible to easily perform the operation of contacting a conduction inspection probe in the conduction inspection process (a process of inspecting whether or not the ID tag 700 is defective) at the time of manufacturing in a factory. Specifically, as illustrated in Fig. 63, leading ends of a plurality of the probes 901 of the conduction inspection device 900 is pressed downward against the metallic pads 710 or the earth terminal 703 of the ID tag 700 on an inspection table. At this time, because the earth terminal projections 705 of the earth terminal 703 has an area that can sufficiently come in contact with the leading ends of the probes 901, it is possible to prevent a conduction inspection failure caused by a contact failure of the probes 901. Furthermore, the conduction inspection is performed by pressing the leading ends of the probes 901 downward against the earth terminal 703 (the earth terminal projections 705). Therefore, it is possible to improve the durability of the probes 901 that are repetitively used for inspection compared with a case that the probes 901 are inserted into the ID tag hole 701 in the conduction inspection. Furthermore, it is possible to prevent abrasion of the ID tag hole 701 of the ID tag 700 due to the conduction inspection.

In a surplus space broadening in a wedge form between the annular earth terminal 703 and the rectangular metallic pads 710, the components are arranged as follows. Specifically, the earth terminal projections 705 have the boundary (the boundary line) in the tag horizontal direction. The boundary comes in contact with the annular outer circumference of the annular earth terminal 703. the

earth terminal projections 705 are arranged so as to be parallel to the longitudinal direction of the metallic pads 710 (710a, 710b, 710c). Therefore, the earth terminal projections 705 do not protrude in the tag vertical direction and can be prevented from protruding to the right and left sliding areas of the substrate 702 that slides against the holder protrusions 353 (protrusion in the tag horizontal direction). As a result, it is possible not to increase the size of the substrate 702 and it is possible to obtain as many substrates 702 having the standard size as possible from a standard material having a rated size at the time of manufacturing. Therefore, it is possible to reduce an increase in the initial cost of the ID tag 700.

Furthermore, the three terminals 804 of the connector 800 are plate-shape (or linear-shape) metallic members. The three terminals 804 are fixedly supported by the connector body 805 such that one end of each of the terminals serves as a fixed end and the other end (the front end) of each of the terminals serves as a free end. A curved section that curves toward the ID tag 700 (the toner container 32) is formed on the front end of each of the three terminals 804. Specifically, the terminals 804 are bent like a knee (or a boomerang) toward the ID tag 700. The curved sections of the terminals 804 serve as contact sections with the metallic pads 710.

Along with the attachment operation of the toner container 32 to the toner supply device 60, the curved sections of the terminals 804 come into contact with approximate centers of the metallic pads 710 in the longitudinal direction (the tag horizontal direction). When the attachment operation of the toner container 32 is further continued, the ID tag 700 comes closer to the

173

connector 800, and the terminals 804 are displaced while being pressed and elastically deformed by the metallic pads 710 (such that a bent knee is straightened) such that the curved sections of the terminals 804 come closer to the free end side. Specifically, along with the attachment operation of the toner container 32, the curved sections of the terminals 804 slide from the center to the free end side in the longitudinal direction (the tag horizontal direction) while gradually increasing the contact pressure applied to the metallic pads 710.

With this configuration, it is possible to more reliably prevent a contact failure between the terminals 804 of the main body and the metallic pads 710. Specifically, in some cases, the position of the container front end cover 34 (the metallic pads 710) relative to the connector 800 (the terminals 804 of the main body) in the longitudinal direction (the tag horizontal direction) may be deviated because of a variation in the dimensional accuracy of related components or a variation in the assembly accuracy (dimensional variation). However, because of the above configuration, even when the longitudinal position of the container front end cover 34 relative to the connector 800 is deviated, it is possible to more reliably prevent a contact failure between the terminals 804 of the main body and the metallic pads 710.

As described above, in the toner container 32 according to the embodiments, the contact-type ID tag 700 (the information storage device) is held by the holding structure 345 of the ID tag holder 344. Specifically, the ID tag 700 is held by the holding structure 345 of the ID tag holder 344 so that the ID tag 700 can move on a virtual plane approximately perpendicular to the moving direction

(the arrow Q direction) along which the metallic pads 710 (terminals of the container) come closer (or come in contact with) the terminals 804 of the main body. Therefore, even in the situations described below, a
5 contact failure caused by a positioning failure between the metallic pads 710 of the ID tag 700 and the terminals 804 of the connector 800 of the toner replenishing device 60 can hardly occur. Specifically, even when the contact-type ID tag 700 is mounted on the toner container 32 detachably
10 attached to the toner replenishing device 60 (the main body of the copier 500), the contact failure can hardly occur.

Furthermore, according to the embodiments, even when the contact-type ID tag 700 is mounted on the toner container 32 detachably attached to the toner replenishing
15 device 60, the ID tag 700 can hardly be damaged electrically. This is because the earth terminal 703 to be engaged with the earth terminal 802 on the positioning pin 801 of the connector 800 is formed on the ID tag hole 701 on the substrate 702 of the ID tag 700.

20 If toner fluidity is high, toner scattering due to attachment/detachment of the toner replenishing container easily occurs. This problem is dealt with in the embodiments.

As indicators indicating the toner fluidity,
25 accelerated cohesion (%) and aerated bulk density (g/cm^3) are known. Toner to be contained in the toner container 32 according to the embodiment may be as follows: toner with a volume-average particle diameter of about $5.5 \mu\text{m}$, the accelerated cohesion of about 13 %, and the aerated bulk
30 density of $0.36 \text{ g}/\text{cm}^3$ added with silica of 3.3 (part by weight) and titanium of 0.6 (part by weight). Such toner can be fixed by heat at 120°C and has excellent low-

temperature fixability.

Alternatively, it is possible to use toner with a volume-average particle diameter of about 4.5 μm , the accelerated cohesion of about 18 %, and the aerated bulk density of 0.38 g/cm^3 added with silica of 2.3 (part by weight) and titanium of 0.7 (part by weight). It is of course possible to use other toner instead of those illustrated above by example.

Toner can be manufactured by using a known polymerization method or grinding method.

As a method for measuring a particle diameter distribution of a toner particle, a Coulter Counter method may be applied. As a measuring device based on this method, a Coulter Counter TA-II or a Coulter Multisizer II (each manufactured by Beckman Coulter, Inc.) may be applied.

The accelerated cohesion of toner was measured by Powder Tester (manufactured by Hosokawa Micron Corporation) in the test environment with temperature of 24°C and humidity of 72%. Other conditions are listed in Table 1.

[Table 1]

item	unit	value under standard condition	value under condition of the embodiment
upper screen	μm	75	75
middle screen	μm	45	45
lower screen	μm	20	20
vibration width	mm	1	1.5
amount of sample powder	g	2.00 $\pm$ 0.01	2.00 $\pm$ 0.01
vibration duration	sec	10	30

After the measurement, the toner cohesion is obtained according to Equation below.

Weight % of powder remaining in upper screen $\times 1$ (a)

5 Weight % of powder remaining in middle screen $\times 0.6$ (b)

Weight % of powder remaining in lower screen $\times 0.2$ (c)

Cohesion (%) = (a) + (b) + (c)

The measurement results are shown in Table 2 (unit: %)

[Table 2]

type of toner	measurement value under standard condition	first measurement value under condition of embodiment	second measurement value under condition of embodiment
A	11.4	11.2	11.6
B	12.9	12.6	13.2
C	18.4	17.2	19.6
D	56	54.2	57.8
E	64.9	63.8	66

10

According to the results shown in Table 2, the fluidities of toner D and E were determined as low.

The aerated bulk density is a value calculated by loosely filling a container with toner, leveling the toner,
15 and dividing the inner weight by the volume of the container.

If the toner fluidity is high, toner scattering is likely to occur. However, in the toner container and the toner replenishing device according to the present
20 invention, toner is replenished to the toner replenishing device inside the toner container. Therefore, while this configuration is of course useful for toner with relatively

low fluidity, the configuration is more useful for toner with higher fluidity because it can prevent toner scattering.

The above embodiments are explained by way of example only. The present invention can achieve various effects specific to each embodiment as described below.

(Embodiment A)

A powder container, such as the toner container 32, removably attachable to an image forming apparatus, such as the copier 500, the powder container includes a container body, such as the container body 33, including a container opening, such as the container opening 33a, in a first end and containing image forming powder, such as toner; a conveyor, such as the spiral rib 302, arranged inside the container body, to convey the powder from a second end of the container body to the first end along a longitudinal direction of the container body; a nozzle receiver, such as the nozzle receiver 330, arranged in the container opening and including a nozzle receiving opening, such as the receiving opening 331, to receive a powder conveying nozzle, such as the conveying nozzle 611, of the image forming apparatus, the nozzle receiver to guide the powder conveying nozzle to the inside of the container body; and a scooping portion, such as the scooping portion 304, scooping up the powder received from the conveyor with the rotation of the scooping portion, to move the powder to a powder receiving opening, such as the nozzle opening 610, of the powder conveying nozzle. The nozzle receiving opening is arranged on the inner bottom of the container opening, such as the front end opening 305.

Therefore, as described in the above embodiments, because the nozzle receiving opening is arranged on the

cylindrical inner bottom of the container opening, a part of the edge of the container opening on the container front end side protrudes relative to the edge of the nozzle insertion member where the nozzle receiving opening is formed. The protrusion prevents scattering of toner leaked from the nozzle receiving opening when the conveying nozzle is removed from the powder container. Furthermore, the contact member and the biasing member are housed in the inner space of the cylindrical container opening when the powder container is attached to the powder conveying device. Therefore, it is possible to prevent increase in the longitudinal size of the powder conveying device when the powder container is attached.

(Embodiment B)

In the powder container according to the embodiment A, an outer surface of the container opening of the container body is a positioning section with respect to the image forming apparatus.

Therefore, as explained in the above embodiments, it is possible to prevent powder, such as toner, to arrive at the outer surface of the container opening, enabling to improve the positioning accuracy of the powder container relative to the powder conveying device.

(Embodiment C)

In the powder container according to the embodiment A, a rotation axis of the container body is corresponding to the longitudinal direction, and a cylindrical outer surface of the container opening of the container body includes a rotary shaft section to be inserted in a rotary shaft receiving section of the image forming apparatus.

Therefore, as explained in the above embodiments, when the powder is entered into a gap between the rotary shaft

receiving section and the rotary shaft section forming a sliding section, a sliding load at the time of rotation may increase and rotational torque of the container body may increase. However, the present embodiment enables to prevent the powder from arriving at the outer surface of the container opening. Therefore, it is possible to prevent the powder from being entered into the sliding section and prevent an increase in the sliding load. As a result, it is possible to stabilize the sliding performance and prevent an increase in the rotational torque of the container body.

(Embodiment D)

In the powder container according to the embodiment C, the outer surface of the container opening of the container body are a positioning section with respect to the image forming apparatus.

Therefore, as explained in the above embodiments, it is possible to stabilize the positioning accuracy of the powder container relative to the powder conveying device.

(Embodiment E)

In the powder container according to the embodiment C or D, the nozzle receiver includes a fixing portion, which has a screw, such as the male screws 337c, on the outer circumference thereof, to fix the nozzle receiver to the container opening, wherein a screwing direction of the screw is the same as a rotation direction of the powder container.

Therefore, as explained in the above thirteenth embodiment, it is possible to prevent a situation in which the rotation of the container body causes to release the screwing of the nozzle insertion member from the container body.

180

(Embodiment F)

In the powder container according to the embodiment C or D, the nozzle receiver includes a fixing portion, such as the nozzle receiver fixing portion 337, to fix the
5 nozzle receiver to the container opening, an outer diameter of the fixing portion is greater than an inner diameter of the container opening, a protrusion, such as the nozzle receiver engaging protrusions 3301, is formed on one of an outer surface of the fixing portion and an inner surface of
10 the container opening while an engaged hole, such as the engaged holes 3051 of the front end opening, to be engaged with the protrusion is formed on the other one of the outer surface of the fixing portion and the inner surface of the container opening, and the fixing portion is press fitted
15 to the container opening at a position at which the protrusion and the engaged hole are engaged.

Therefore, as explained in the fourteenth embodiment, the engagement between the protrusion and the engaged hole can prevent the nozzle insertion member from coming out of
20 the container body and from rotating relative to the container body. Furthermore, because the outer diameter of the fixing portion is greater than the inner diameter of the container opening, the container opening can be adjusted so as to follow the fixing portion when the nozzle
25 insertion member is attached to the container body, resulting in improved circularity of the container opening. With the improvement in the circularity of the container opening, it is possible to improve the positioning accuracy of the powder container, such as the toner container 32,
30 relative to the powder conveying device, such as the toner replenishing device 60.

(Embodiment G)

In the powder container according to the embodiment C or D, the nozzle receiver includes a fixing portion, such as the nozzle receiver fixing portion 337, to fix the nozzle receiver to the container opening, an outer diameter of the fixing portion is smaller than an inner diameter of the container opening, a protrusion, such as the nozzle receiver engaging protrusions 3301, is formed on one of an outer surface of the fixing portion and an inner surface of the container opening while an engaged hole, such as the engaged holes 3051 of the front end opening, to be engaged with the protrusion is formed on the other one of the outer surface of the fixing portion and the inner surface of the container opening, a seal, such as the receiver outer seal 3302, is disposed in a gap between the fixing portion and the container body, and the nozzle receiver is fitted to the container opening so that the seal is sandwiched and compressed between the fixing portion and the container body at a position at which the protrusion and the engaged hole are engaged.

Therefore, as explained in the fifteenth embodiment, the engagement between the protrusion and the engaged hole can prevent the nozzle insertion member from coming out of the container body and from rotating relative to the container body. Furthermore, the repulsive force applied by the seal and the detachment preventer realized by the engagement make it possible to determine the position of the powder container, such as the toner container 32, in the rotation axis direction and prevent the nozzle insertion member from coming out of the container body due to the impact of an external force. Moreover, because the seal is compressed for sealing, it is possible to prevent leakage of powder, such as toner.

(Embodiment H)

In the powder container according to the embodiment C or D, the nozzle receiver includes a fixing portion, such as the nozzle receiver fixing portion 337, to fix the
5 nozzle receiver to the container opening, the fixing portion includes a first portion and a second portion, a first outer diameter of the first portion is smaller than an inner diameter of the container opening, corresponding to the rotary shaft section, a second outer diameter of the
10 second portion is greater than the inner diameter of the container opening, and the fixing portion is press fitted to the container opening.

Therefore, as explained in the twentieth embodiment, a section that serves as the rotary shaft section of the
15 container opening does not expand due to the press-fitting of the fixing portion, so that the section can be used as the positioning section or the sliding section. As a result, it is possible to maintain the good accuracy in the molding of the container opening, enabling to realize
20 positioning with higher accuracy and sliding with good performance.

(Embodiment I)

In the powder container according to the embodiment H, a press-fitted portion of the fixing portion is located so
25 as to correspond to a position of a container gear transmitting a rotational force to the container body.

Therefore, as explained in the twentieth embodiment, the strength of the portion is greater than the other portions of the container body, so that the portion is less
30 likely to be deformed due to the press-fitting.

Furthermore, because the container body firmly tightens the fixing portion, the nozzle insertion member, such as the

nozzle receiver 330, is less likely to come off even over time.

(Embodiment J)

In the powder container according to the embodiment H,
5 a press-fitted portion of the fixing portion is located so as to correspond to a position at which the container opening is thicker than the rotary shaft section.

Therefore, as explained in the twentieth embodiment, the strength of the portion is greater than the other
10 portions, so that the portion is less likely to be deformed due to the press-fitting. Furthermore, because the container body firmly tightens the fixing portion, the nozzle insertion member, such as the nozzle receiver 330, is less likely to come off even over time.

15 (Embodiment K)

In the powder container according to any one of the embodiments A to J, the nozzle receiving opening is a through hole of an annular seal, and an enclosed space is formed around the conveying nozzle and between the annular
20 seal and the nozzle receiver.

Therefore, as explained in the above embodiments, it is possible to prevent the annular seal from being jammed between the nozzle insertion member and the open/close member, such as the container shutter 332. Consequently,
25 it is possible to prevent a situation in which the nozzle receiving opening cannot be opened and closed because of the jammed annular seal.

(Embodiment L)

A powder container, such as the toner container 32,
30 removably attachable to an image forming apparatus, such as the copier 500, the powder container includes a container body, such as the container body 33, including a container

opening, such as the container opening 33a, in a first end, and containing image forming powder, such as toner; a conveyor, such as the spiral rib 302, arranged inside the container body, to convey the powder from a second end of the container body to the first end along a longitudinal direction of the container body; a nozzle receiver, such as the nozzle receiver 330, arranged in the container opening and including a nozzle receiving opening, such as the receiving opening 331, to receive a powder conveying nozzle, such as the conveying nozzle 611, of the image forming apparatus, the nozzle receiver to guide the powder conveying nozzle to the inside of the container body; and a scooping portion, such as the scooping portion 304, receiving the powder from the conveyor and rotating to scoop up the received powder from bottom to top in the container body so as to move the powder to a powder receiving opening, such as the nozzle opening 610, of the powder conveying nozzle. The nozzle receiver includes a shutter, such as the container shutter 332, to open and close the nozzle receiving opening; a supporting portion, such as the shutter side supporting portions 335a, to support the shutter so as to move; an opening, such as the space 335b between the side supporting portions, arranged adjacent to the supporting portion, to communicate with the powder receiving opening of the conveying nozzle inserted in the nozzle receiver. The supporting portion and the opening arranged adjacent to the supporting portion are configured to alternately cross the powder receiving.

Therefore, as explained in the above embodiments, even when the powder is instantaneously accumulated above the powder receiving port, because the supporting portion cross the accumulated powder and alleviate the accumulation, it

is possible to prevent a situation in which the accumulated toner is cohered in the rest state and a toner conveying failure occurs when the device is resumed.

(Embodiment M)

5 In the powder container according to the embodiment L, one of an inner rim of the opening, such as the space 335b between the side supporting portions, arranged adjacent to the supporting portion, such as the shutter side supporting portions 335a, and a combination of the inner rim and an
10 outer surface of the supporting portion serves as a powder bridging that allows the powder to move from the scooping portion to the powder receiving opening.

Therefore, as explained in the above embodiments, it is possible to prevent the powder from passing through a
15 gap between the conveying nozzle, such as the conveying nozzle 611, and an inner wall, such as the convex 304h, of the container body, such as the container body 33, that forms the scooping portion. Therefore, the scooped-up powder can be entered into the powder receiving opening
20 efficiently. Consequently, it is possible to stabilize the replenishing speed even when the amount of powder in the container body is reduced. It is also possible to reduce the amount of toner remaining in the container body at the time of replacement of the powder container, such as the
25 toner container 32. Furthermore, because the amount of powder remaining in the container body at the time of replacement, a running cost can be reduced to improve the economic efficiency and the amount of residual toner to be disposed can be reduced to reduce the influence on the
30 environment.

(Embodiment N)

In the powder container according to the embodiment M,

186

the scooping portion and the powder bridging rotate in the same rotation direction and are arranged close to each other such that the inner rim of the opening arranged adjacent to the supporting portion and a convex, such as the convex 304h, that rises toward the inside of the container body in the scooping portion are located in this order from downstream to upstream in the rotation direction.

Therefore, as explained in the above embodiments, it is possible to prevent the powder from passing through a gap between the conveying nozzle, such as the conveying nozzle 611, and an inner wall, such as the convex 304h, of the container body, such as the container body 33, that forms the scooping portion.

(Embodiment O)

In the powder container according to the embodiment L, the container body is held by the powder conveying device so as to rotate relative to the powder conveying nozzle about a longitudinal direction of the container body as a rotation axis when the powder is conveyed, the nozzle receiver is fixed to the container body, and the scooping portion includes a convex, such as the convex 304h, that is an inner wall surface of the container body rising inward in the container body and includes an inner wall that rises from the convex to an inner wall surface of the container body.

Therefore, as explained in the above embodiments, it is possible to scoop up the powder by the rotation of the container body.

(Embodiment P)

In the powder container according to the embodiment L or M, wherein the container body is held by the powder conveying device so as to rotate relative to the powder

conveying nozzle about a longitudinal direction of the container body as a rotation axis when the powder is conveyed, the nozzle receiver is fixed to the container body, the scooping portion includes a convex, such as the convex 304h, that is an inner wall surface of the container body rising inward in the container body and includes an inner wall that rises from the convex to an inner wall surface of the container body, and the convex and the powder bridging are arranged in a contacted state or with a small gap interposed therebetween.

Therefore, as explained in the above embodiments, it is possible to scoop up the powder by the rotation of the container body. Furthermore, it is possible to prevent the powder from passing through a gap between the conveying nozzle, such as the conveying nozzle 611, and an inner wall, such as the convex 304h, of the container body, such as the container body 33, that forms the scooping portion.

(Embodiment Q)

In the powder container according to the embodiment L, the container body is held by the powder conveying device so as to rotate relative to the conveying nozzle about a longitudinal direction of the container body as a rotation axis when the powder is conveyed, the nozzle receiver is fixed to the container body, and the scooping portion includes a rib, such as the scooping ribs 304g, protruding from the nozzle receiver to a vicinity of the inner wall of the container body.

Therefore, as explained in the modifications, it is possible to cause the rib to receive the powder conveyed by the conveyor, such as the spiral rib 302, scoop up the powder from bottom to top along with rotation, and cause the powder to slide on the rib surface and be entered into

the powder receiving opening, such as the nozzle opening 610.

(Embodiment R)

A powder container, such as the toner container 32, 5 removably attachable to an image forming apparatus, such as the copier 500, the powder container includes a container body, such as the container body 33, including a container opening, such as the container opening 33a, in a first end and containing image forming powder, such as toner; a 10 conveyor, such as the spiral rib 302, arranged inside the container body, to convey the powder from a second end of the container body to the first end along a longitudinal direction of the container body; a nozzle receiver, such as the nozzle receiver 330, arranged in the container opening 15 and including a nozzle receiving opening, such as the receiving opening 331, to receive a powder conveying nozzle, such as the conveying nozzle 611, of the image forming apparatus, the nozzle receiver to guide the powder conveying nozzle to the inside of the container body; and a 20 scooping portion, such as the scooping portion 304, protruding to the inside of the container body and including a ridge, such as the convex 304h. The nozzle receiver includes a shutter, such as the container shutter 332, to open and close the nozzle receiving opening; a 25 supporting portion, such as the shutter side supporting portions 335a, to support the shutter so as to move; an opening, such as the space 335b between the side supporting portions, arranged adjacent to the supporting portion, to communicate with the powder receiving opening of the 30 conveying nozzle inserted in the nozzle receiver. The ridge of the scooping portion faces to the supporting portion of the nozzle receiver.

79602-26

189

Therefore, as explained in the above embodiments, it is possible to scoop up the powder by the rotation of the container body. Furthermore, it is possible to prevent the powder from passing through a gap between the conveying nozzle, such as the conveying nozzle 611, and an inner wall, such as the convex 304h, of the container body, such as the container body 33, that forms the scooping portion.

(Embodiment S)

An image forming apparatus, such as the copier 500, includes an image forming unit, such as the printer 100, that forms an image on an image carrier, such as the photoreceptor 41, by using image forming powder, such as toner; a powder conveyor, such as the toner replenishing device 60, that conveys the powder to the image forming unit; and the powder container, such as the toner container 32, according to any one of embodiments A to R. The powder container is configured to be detachably attached to the image forming apparatus.

(Embodiment A1)

A powder container, removably attachable to an image forming apparatus, the powder container comprising:

a container body, including a container opening in a first end and containing image forming powder;

a conveyor, arranged inside the container body, to convey the powder from a second end of the container body to the first end along a longitudinal direction of the container body;

79602-26

189a

a nozzle receiver, arranged in the container opening and including a nozzle receiving opening to receive a powder conveying nozzle of the image forming apparatus, to guide the powder conveying nozzle to the inside of the container body;

5 and

a scooping portion, scooping up the powder received from the conveyor with the rotation of the scooping portion, to move the powder to a powder receiving opening of the powder conveying nozzle, wherein

10 the nozzle receiving opening is arranged on the inner bottom of the container opening.

(Embodiment A2)

The powder container according to Embodiment A1, wherein an outer surface of the container opening of the
15 container body is a positioning section with respect to the image forming apparatus.

(Embodiment A3)

The powder container according to Embodiment 1, wherein

20 a rotation axis of the container body is corresponding to the longitudinal direction, and

a cylindrical outer surface of the container opening of the container body includes a rotary shaft section to be inserted in a rotary shaft receiving section of the image
25 forming apparatus.

79602-26

189b

(Embodiment A4)

The powder container according to Embodiment A3,
wherein the outer surface of the container opening of the
container body are a positioning section with respect to the
5 image forming apparatus.

(Embodiment A5)

The powder container according to Embodiment A3,
wherein the nozzle receiver includes a fixing portion, which
has a screw on the outer circumference thereof, to fix the
10 nozzle receiver to the container opening, wherein

a screwing direction of the screw is the same as a
rotation direction of the powder container.

(Embodiment A6)

The powder container according to Embodiment A3,
15 wherein

the nozzle receiver includes a fixing portion to fix
the nozzle receiver to the container opening, and

an outer diameter of the fixing portion is greater
than an inner diameter of the container opening,

20 a protrusion is formed on one of an outer surface of
the fixing portion and an inner surface of the container
opening while an engaged hole to be engaged with the protrusion
is formed on the other one of the outer surface of the fixing
portion and the inner surface of the container opening, and

79602-26

189c

the fixing portion is press fitted to the container opening at a position at which the protrusion and the engaged hole are engaged.

(Embodiment A7)

5 The powder container according to Embodiment A3,
wherein

the nozzle receiver includes a fixing portion to fix the nozzle receiver to the container opening,

10 an outer diameter of the fixing portion is smaller
than an inner diameter of the container opening,

15 a protrusion is formed on one of an outer surface of the fixing portion and an inner surface of the container opening while an engaged hole to be engaged with the protrusion is formed on the other one of the outer surface of the fixing portion and the inner surface of the container opening,

a seal is disposed in a gap between the fixing portion and the container body, and

20 the nozzle receiver is fitted to the container opening so that the seal is sandwiched and compressed between the fixing portion and the container body at a position at which the protrusion and the engaged hole are engaged.

(Embodiment A8)

The powder container according to Embodiment A3,
wherein

79602-26

189d

the nozzle receiver includes a fixing portion to fix the nozzle receiver to the container opening,

the fixing portion includes a first portion and a second portion,

5 a first outer diameter of the first portion is smaller than an inner diameter of the container opening, corresponding to the rotary shaft section,

a second outer diameter of the second portion is greater than the inner diameter of the container opening, and

10 the fixing portion is press fitted to the container opening.

(Embodiment A9)

The powder container according to Embodiment A8, wherein

15 a press-fitted portion of the fixing portion is located so as to correspond to a position of a container gear transmitting a rotational force to the container body.

(Embodiment A10)

20 The powder container according to Embodiment A8, wherein

a press-fitted portion of the fixing portion is located so as to correspond to a position at which the container opening is thicker than the rotary shaft section.

79602-26

189e

(Embodiment A11)

The powder container according to Embodiment A1,
wherein

the nozzle receiving opening is a through hole of an
5 annular seal, and

an enclosed space is formed around the conveying
nozzle and between the annular seal and the nozzle receiver.

Therefore, as explained in the above embodiments, it
is possible to prevent toner scattering, prevent a reduction in
10 the positioning accuracy of the powder container due to the
scattered toner, and prevent an increase in the rotational
torque of the powder container. Consequently, it is possible to
stably convey the powder to the conveying destination. The
stable conveyance of the image forming powder can result in the
15 stable amount of powder conveyed to the image forming unit.
Therefore, the image density can be stabilized, resulting in
good image formation.

EXPLANATIONS OF LETTERS OR NUMERALS

26 feed tray

190

- 27 feed roller
- 28 registration roller pair
- 29 discharge roller pair
- 30 stack section
- 5 32 toner container (powder container)
- 33 container body (powder storage)
- 33a container opening
- 34 container front end cover
- 34a gear exposing hole
- 10 41 photoreceptor
- 42a cleaning blade
- 42 photoreceptor cleaning device
- 44 charging roller
- 46Y image forming unit for yellow
- 15 46 image forming unit
- 47 exposing device
- 48 intermediate transfer belt
- 49 primary-transfer bias roller
- 50 developing device
- 20 51 developing roller
- 52 doctor blade
- 53 first developing particle accommodating portion
- 54 second developing particle accommodating portion
- 55 developer conveying screw
- 25 56 toner density sensor
- 60 toner replenishing device
- 64 toner dropping passage (powder conveying device)
- 70 container holding section
- 71 insert hole portion
- 30 72 container receiving section
- 73 container cover receiving section
- 82 secondary-transfer backup roller

191

- 85 intermediate transfer unit
- 86 fixing device
- 89 secondary transfer roller
- 90 controller
- 5 91 container driving section
- 100 printer
- 200 sheet feeder
- 301 container gear
- 302 spiral rib
- 10 303 gripper
- 304 scooping portion
- 304a scooping portion spiral rib
- 304f scooping wall surface
- 304g scooping rib
- 15 304h convex
- 305 front end opening (opening)
- 305f edge (brim)
- 306 cover hooked portion
- 309 male screw
- 20 330 nozzle receiver
- 330f edge
- 331 receiving opening (nozzle insertion member)
- 332 container shutter
- 332a first shutter hook
- 25 332b second shutter hook
- 332c front end cylindrical portion
- 332d sliding section
- 332e guiding rod
- 332f cantilever
- 30 333 container seal
- 335 shutter rear end supporting portion
- 335a shutter side supporting portion

- 335b space between the side supporting portions
- 336 container shutter spring
- 337 nozzle receiver
- 337a nozzle shutter positioning rib
- 5 337b seal jam preventing space
- 337c male screw
- 339 container engaged portion
- 339a guiding protrusion
- 339b guiding gutter
- 10 339c bump
- 339d engaged hole
- 340 container shutter supporter
- 341 cover hook
- 342 holder left side part
- 15 343 holding portion
- 344 ID tag holder
- 345 holding structure
- 347 holder hole
- 348 holder lower part
- 20 349 holder right side part
- 350 holder upper part
- 351 inner wall protrusion
- 352 frame
- 353 holder protrusion
- 25 354 holder lower hook
- 355 holder upper hook
- 356 holder right side hook
- 357 ID tag attaching surface
- 358 holding base
- 30 359a upper attached part
- 359b lower attached part
- 360 side attached part

193

- 360a inclined surface
- 361 sliding guide
- 361a sliding gutter
- 370 cap
- 5 371 cap flange
- 372 adsorption material
- 373 cylindrical member
- 374 cylindrical portion
- 374a adsorbing hole
- 10 375 front end elastic member
- 400 scanner
- 500 copier (image forming apparatus)
- 601 container driving gear
- 602 frame
- 15 603 driving motor
- 604 drive transmitting gear
- 605 conveying screw gear
- 607 nozzle holder
- 608 setting cover
- 20 609 replenishing device engaging member
- 610 nozzle opening
- 611 conveying nozzle
- 611a front end of the nozzle
- 611s nozzle opening rim
- 25 612 nozzle shutter
- 612a nozzle shutter flange
- 612b first inner rib
- 612c second inner rib
- 612d third inner rib
- 30 612e nozzle shutter tube
- 612f nozzle shutter spring receiving surface
- 612g front end of the first inner rib

- 613 nozzle shutter spring (biasing member)
- 614 conveying screw
- 615 container setting section
- 615a inner surface of the container setting section
- 5 615b end surface of the container setting section
- 640 oscillating spring
- 650 toner container driving shaft
- 651 delay generating spring
- 651a spring fixing pin
- 10 652 driving pin
- 653 idler gear
- 653a gear surface hole
- 655 spring guiding circular plate
- 700 ID tag (ID chip, information storage device)
- 15 701 ID tag hole (hole, notch)
- 702 substrate
- 703 earth terminal
- 705 earth terminal projection
- 710 metallic pad (terminal of the container)
- 20 710a first metallic pad
- 710b second metallic pad
- 710c third metallic pad
- 720 protector
- 800 connector
- 25 801 positioning pin (protrusion)
- 802 earth terminal of the main body
- 803 swing preventer
- 804 terminal of the main body
- 805 connector body
- 30 3051 engaged hole of the front end opening
- 3051a crowing part of the engaged hole
- 3052 positioning rib of the front end opening

195

3053 engaging protrusion

3301 nozzle receiver engaging protrusion

3301a crowing part of the engaging protrusion

3302 receiver outer seal

5 3303 receiver positioning concave

3304 receiver engaged hole

G developer

L laser light

P recording medium

79602-26

196

CLAIMS:

1. A powder container to be attached to a powder conveying device with a longitudinal direction of the powder container parallel to a horizontal direction, the powder
5 conveying device including:
- a nozzle, including a powder receiving opening to receive powder from the powder container, to convey the powder;
- a cover to open and close the powder receiving opening;
- 10 a flange disposed around the nozzle; and
- a biasing member to bias the cover to close the powder receiving opening,
- the powder container comprising:
- a conveyor, arranged inside the powder container, to
15 convey the powder from a second end of the powder container to a first end along the longitudinal direction of the powder container;
- a container opening protruding from the first end of the powder container; and
- 20 a nozzle receiving opening, at the container opening, into which the nozzle of the powder conveying device is to be inserted,
- wherein:

79602-26

197

an inner space of the container opening has a size to accommodate the flange, and

when the powder container is attached to the powder conveying device, the inner space of the container opening
5 includes therein the flange.

2. The powder container according to claim 1, wherein an outer surface of the container opening is a positioning section with respect to the powder conveying device.

3. The powder container according to claim 1, further
10 comprising:

a container body that is held by the powder conveying device so as to rotate relative to the nozzle about a longitudinal direction of the container body as a rotation axis when the powder is conveyed, wherein

15 a cylindrical outer surface of the container opening of the container body includes a rotary shaft section to be inserted in a rotary shaft receiving section of the powder conveying device.

4. The powder container according to claim 3, wherein
20 the cylindrical outer surface of the container opening of the container body is a positioning section with respect to the powder conveying device.

5. The powder container according to claim 3, further comprising:

79602-26

198

a nozzle receiver, arranged in the container opening, to guide the nozzle to the inside of the powder container by communicating with the nozzle receiving opening, wherein

the nozzle receiver includes a fixing portion, which
5 has a screw on the outer circumference thereof, to attach the nozzle receiver to the container opening, wherein

a screwing direction of the screw is the same as a rotation direction of the container body in the powder conveying device.

10 6. The powder container according to claim 1, further comprising:

a nozzle receiver, arranged in the container opening, to guide the nozzle to the inside of the powder container by communicating with the nozzle receiving opening, wherein

15 the nozzle receiver includes a fixing portion to attach the nozzle receiver to the container opening, and

an outer diameter of the fixing portion is greater than an inner diameter of the container opening,

a protrusion is provided on one of an outer surface
20 of the fixing portion and an inner surface of the container opening while an engaged hole to be engaged with the protrusion is formed on the other one of the outer surface of the fixing portion and the inner surface of the container opening, and

79602-26

199

the fixing portion is press fitted to the container opening at a position at which the protrusion and the engaged hole are engaged.

7. The powder container according to claim 3, further
5 comprising:

a nozzle receiver, arranged in the container opening, to guide the nozzle to the inside of the powder container by communicating with the nozzle receiving opening, wherein

the nozzle receiver includes a fixing portion to
10 attach the nozzle receiver to the container opening,

an outer diameter of the fixing portion is smaller than an inner diameter of the container opening,

a protrusion is provided on one of an outer surface of the fixing portion and an inner surface of the container
15 opening while an engaged hole to be engaged with the protrusion is formed on the other one of the outer surface of the fixing portion and the inner surface of the container opening,

a seal is disposed in a gap between the fixing portion and the container body, and

20 the nozzle receiver is fitted to the container opening so that the seal is sandwiched and compressed between the fixing portion and the container body at a position at which the protrusion and the engaged hole are engaged.

8. The powder container according to claim 3, further
25 comprising:

79602-26

200

a nozzle receiver, arranged in the container opening, to guide the nozzle to the inside of the powder container by communicating with the nozzle receiving opening, wherein

the nozzle receiver includes a fixing portion to
5 attach the nozzle receiver to the container opening,

the fixing portion includes a first portion and a second portion,

a first outer diameter of the first portion is smaller than an inner diameter of the container opening,
10 corresponding to the rotary shaft section,

a second outer diameter of the second portion is greater than the inner diameter of the container opening, and

the fixing portion is press fitted to the container opening.

15 9. The powder container according to claim 8, wherein

a press-fitted portion of the fixing portion is located so as to correspond to a position of a container gear transmitting a rotational force to the container body.

10. The powder container according to claim 8, wherein

20 a press-fitted portion of the fixing portion is located so as to correspond to a position at which the container opening is thicker than the rotary shaft section.

11. The powder container according to claim 1, wherein

79602-26

201

the nozzle receiving opening is a through hole of an annular seal, and

an enclosed space is formed around the nozzle and between the annular seal and the nozzle receiver upon insertion
5 of the nozzle.

12. The powder container according to claim 1, wherein the powder container contains therein toner.

13. An image forming apparatus comprising:

an image forming unit that forms an image on an image
10 carrier by using image-forming powder;

a powder conveyor that conveys the powder to the image forming unit; and

the powder container according to claim 1, wherein

the powder container is configured to be detachably
15 attached to the powder conveying device.

FIG.1

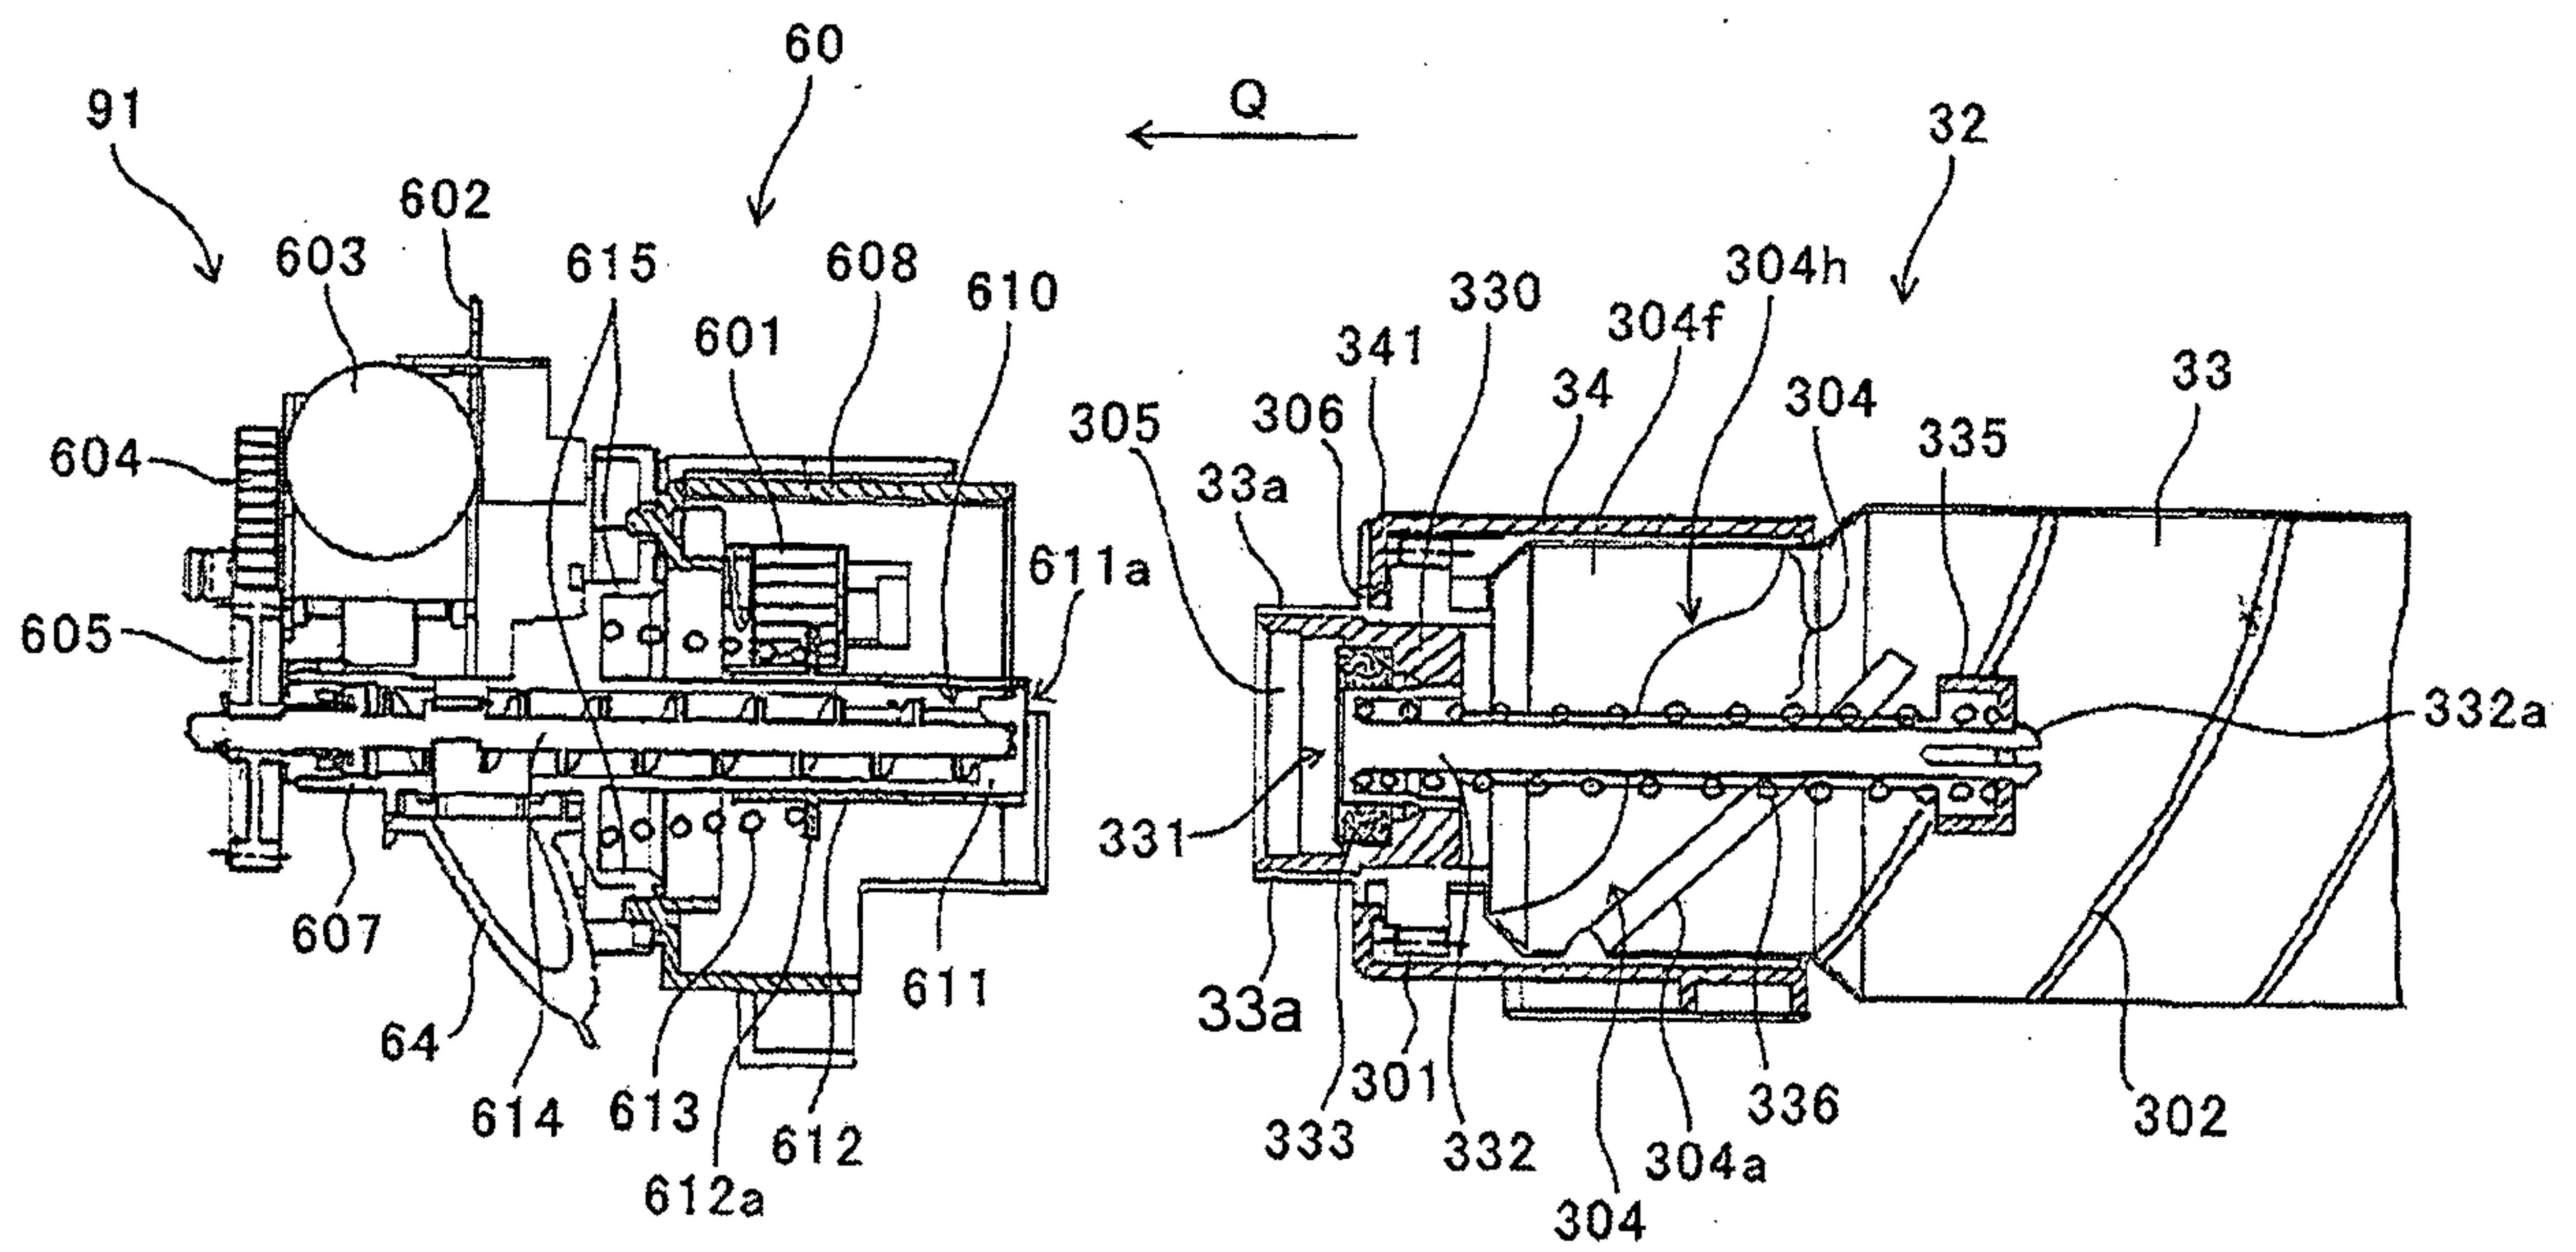


FIG.2

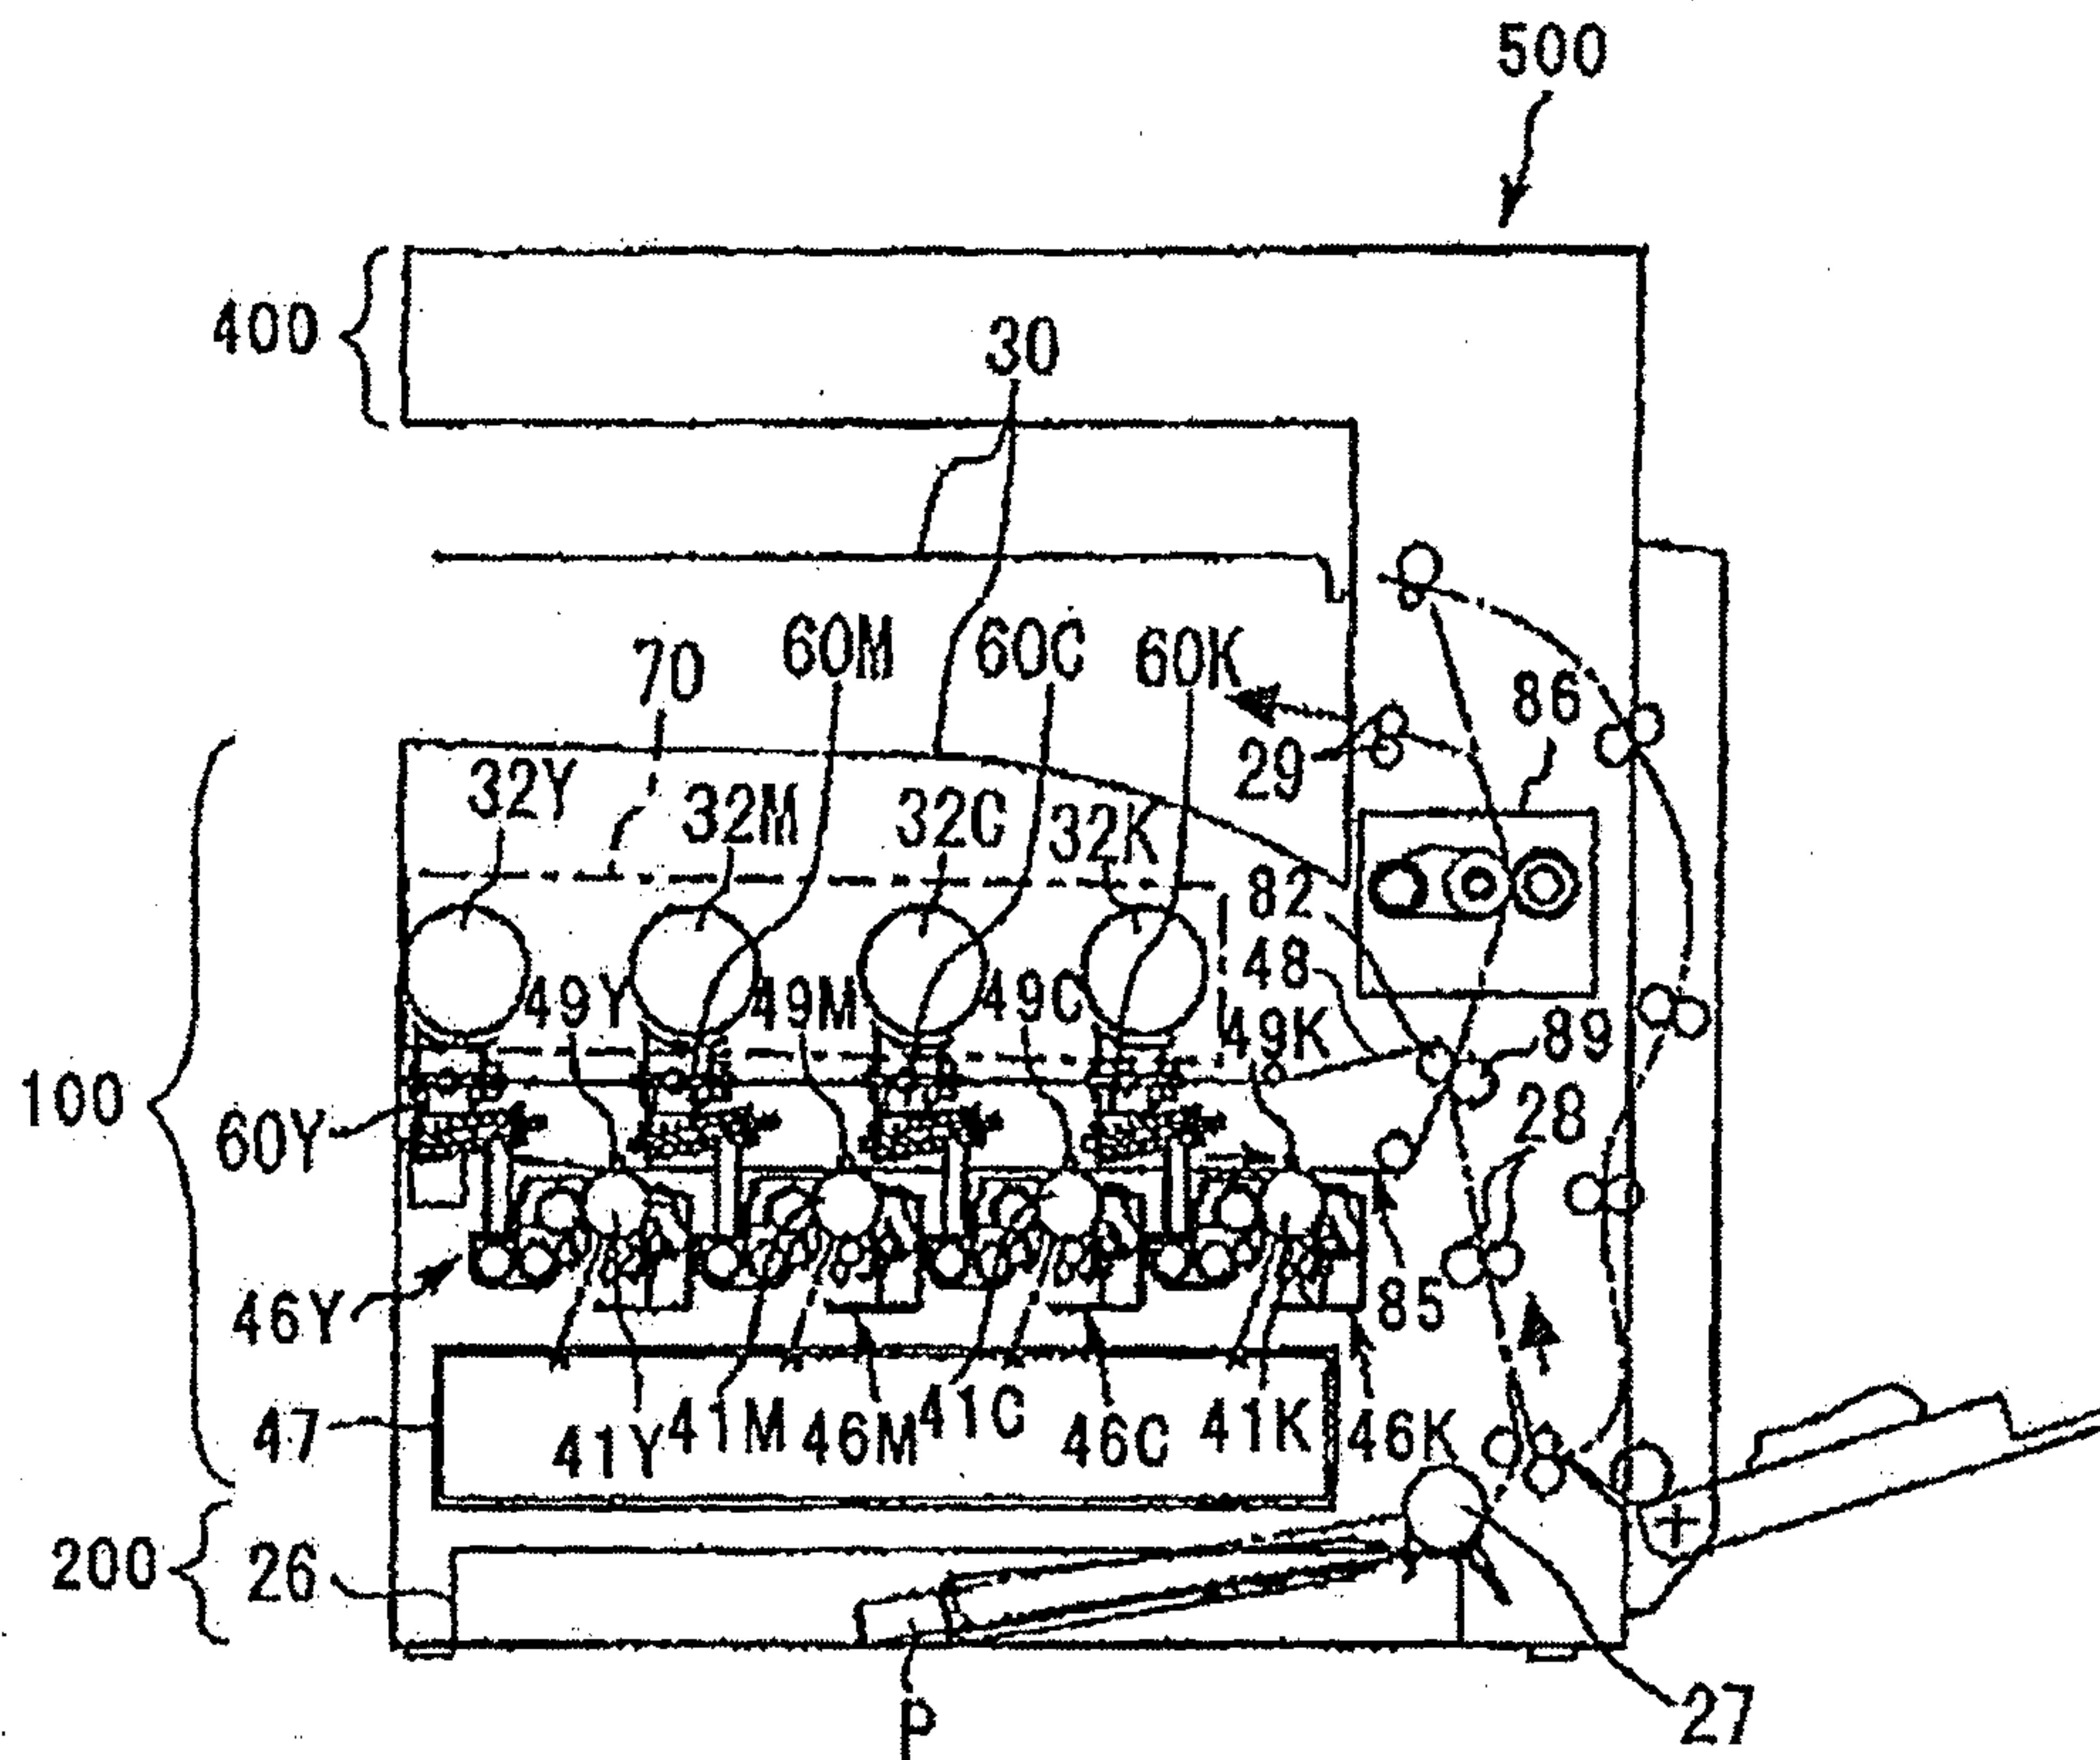


FIG.3

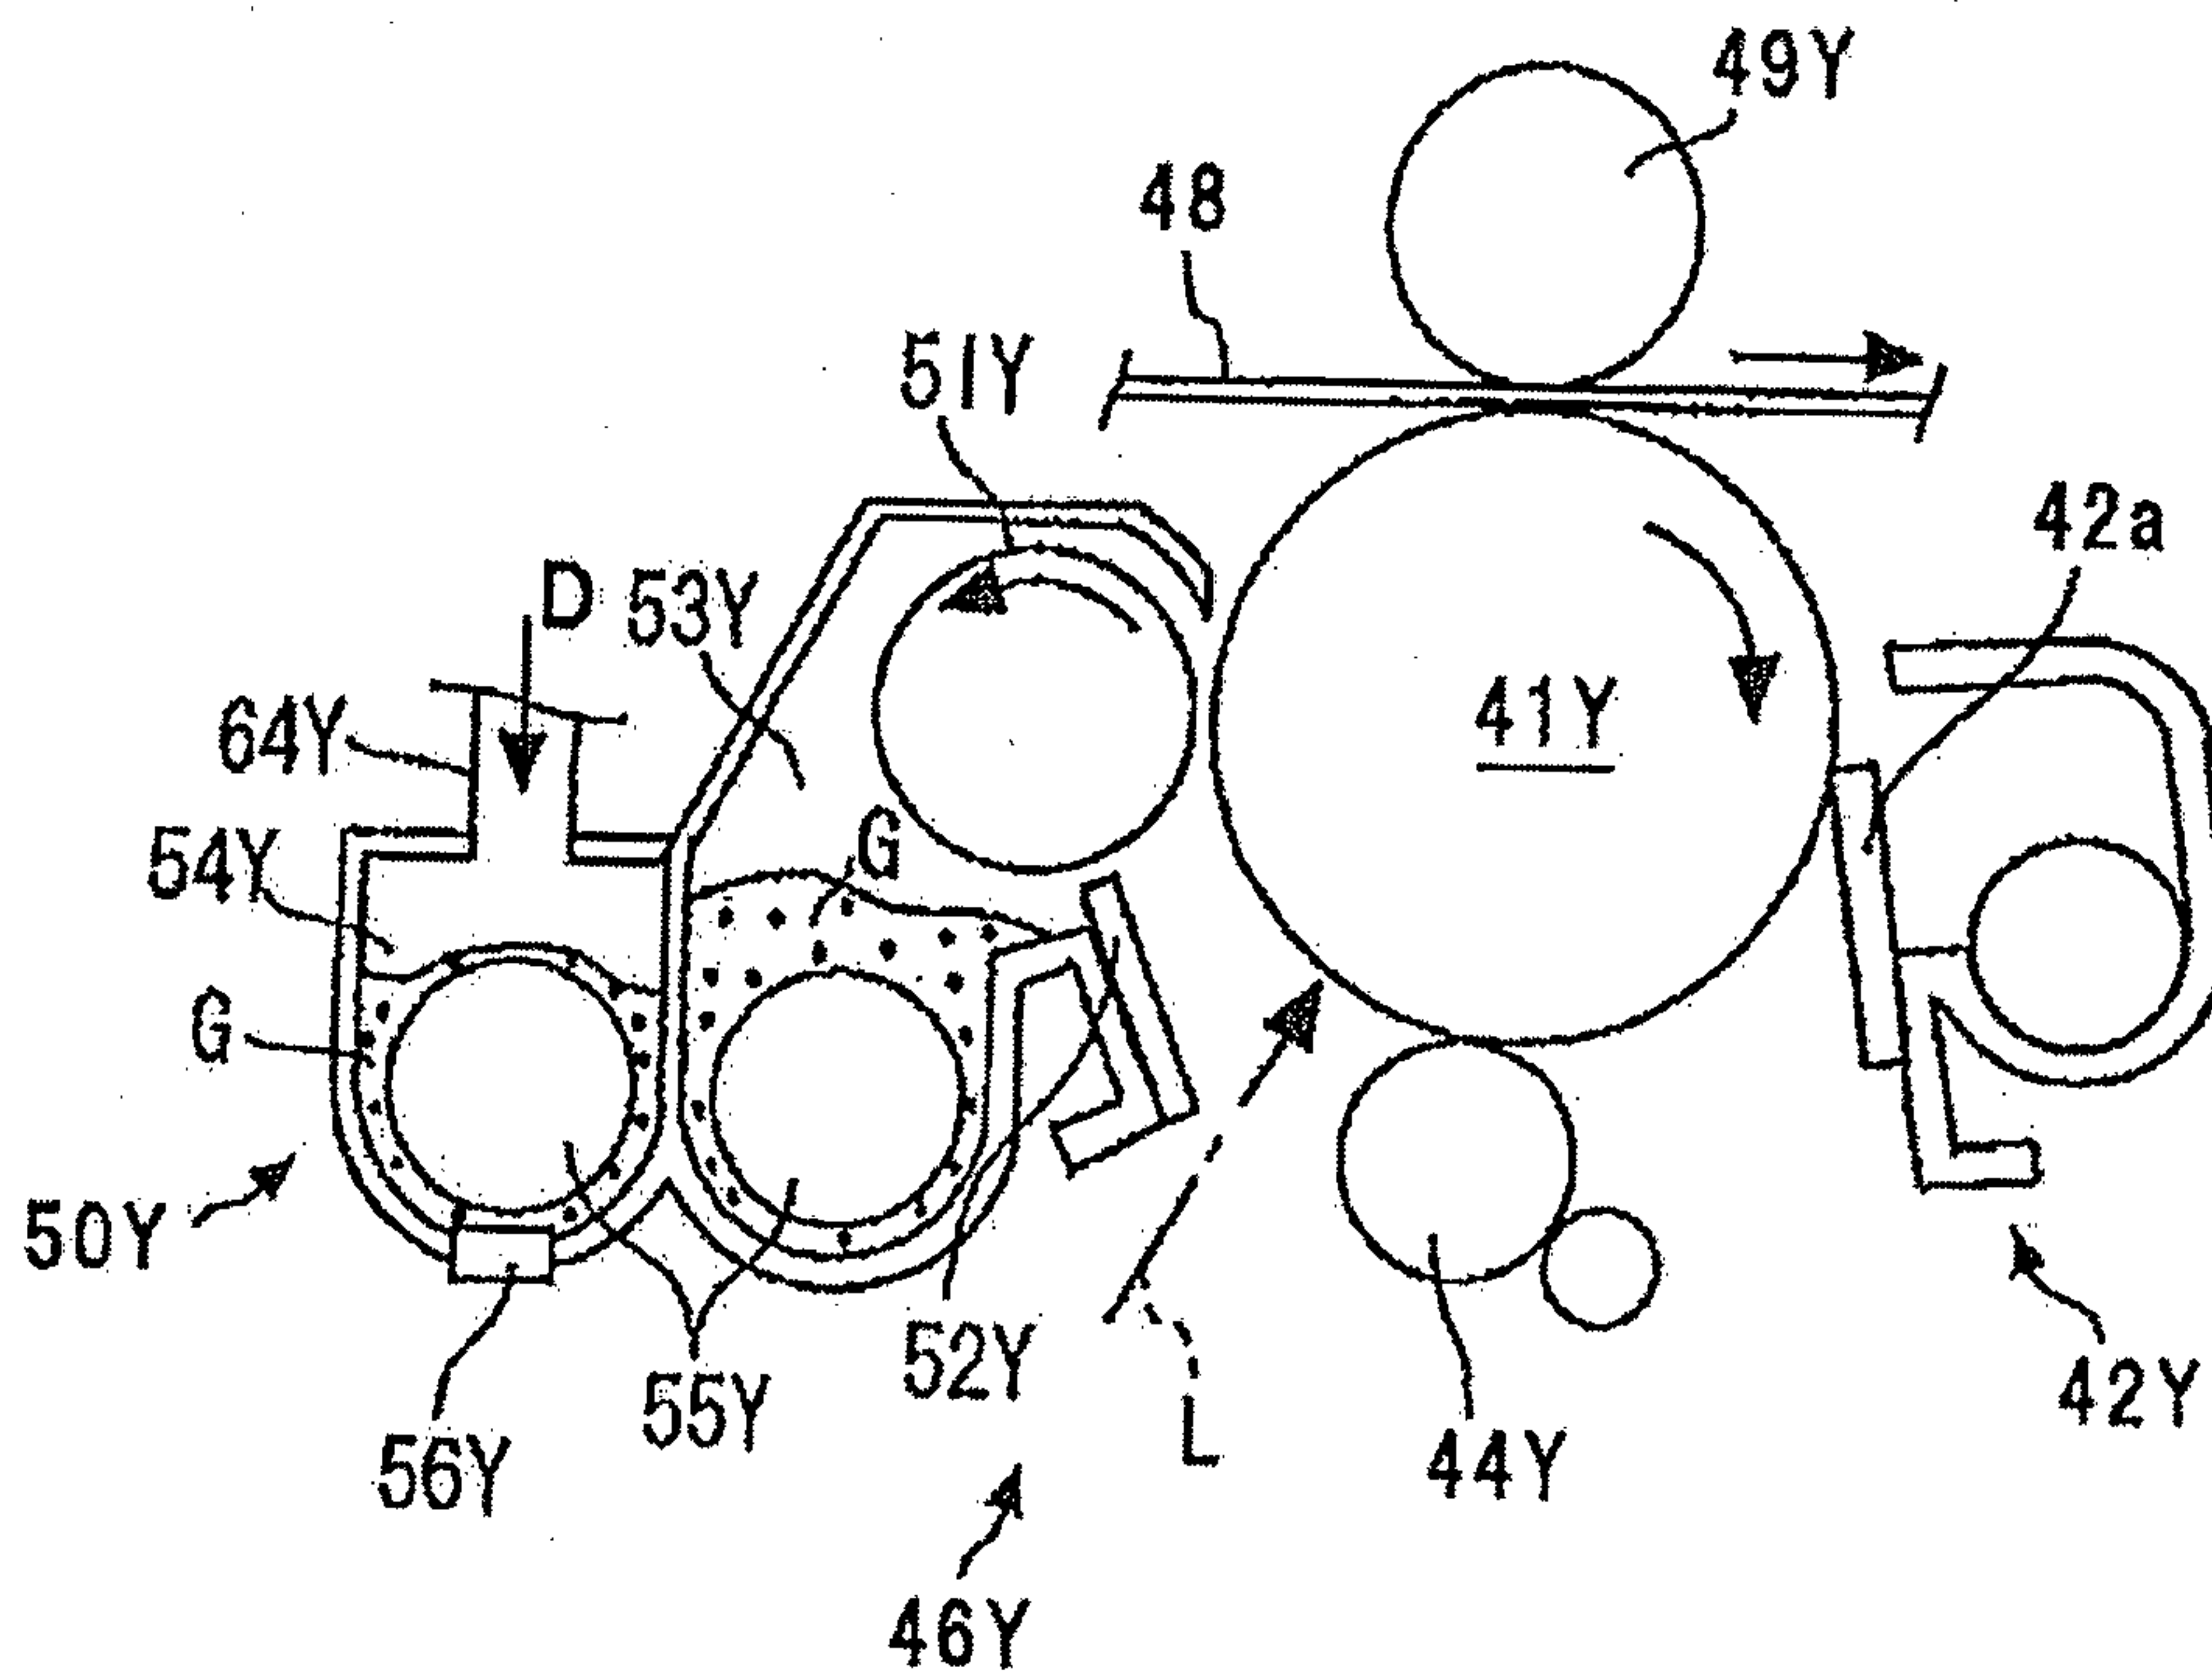


FIG.4


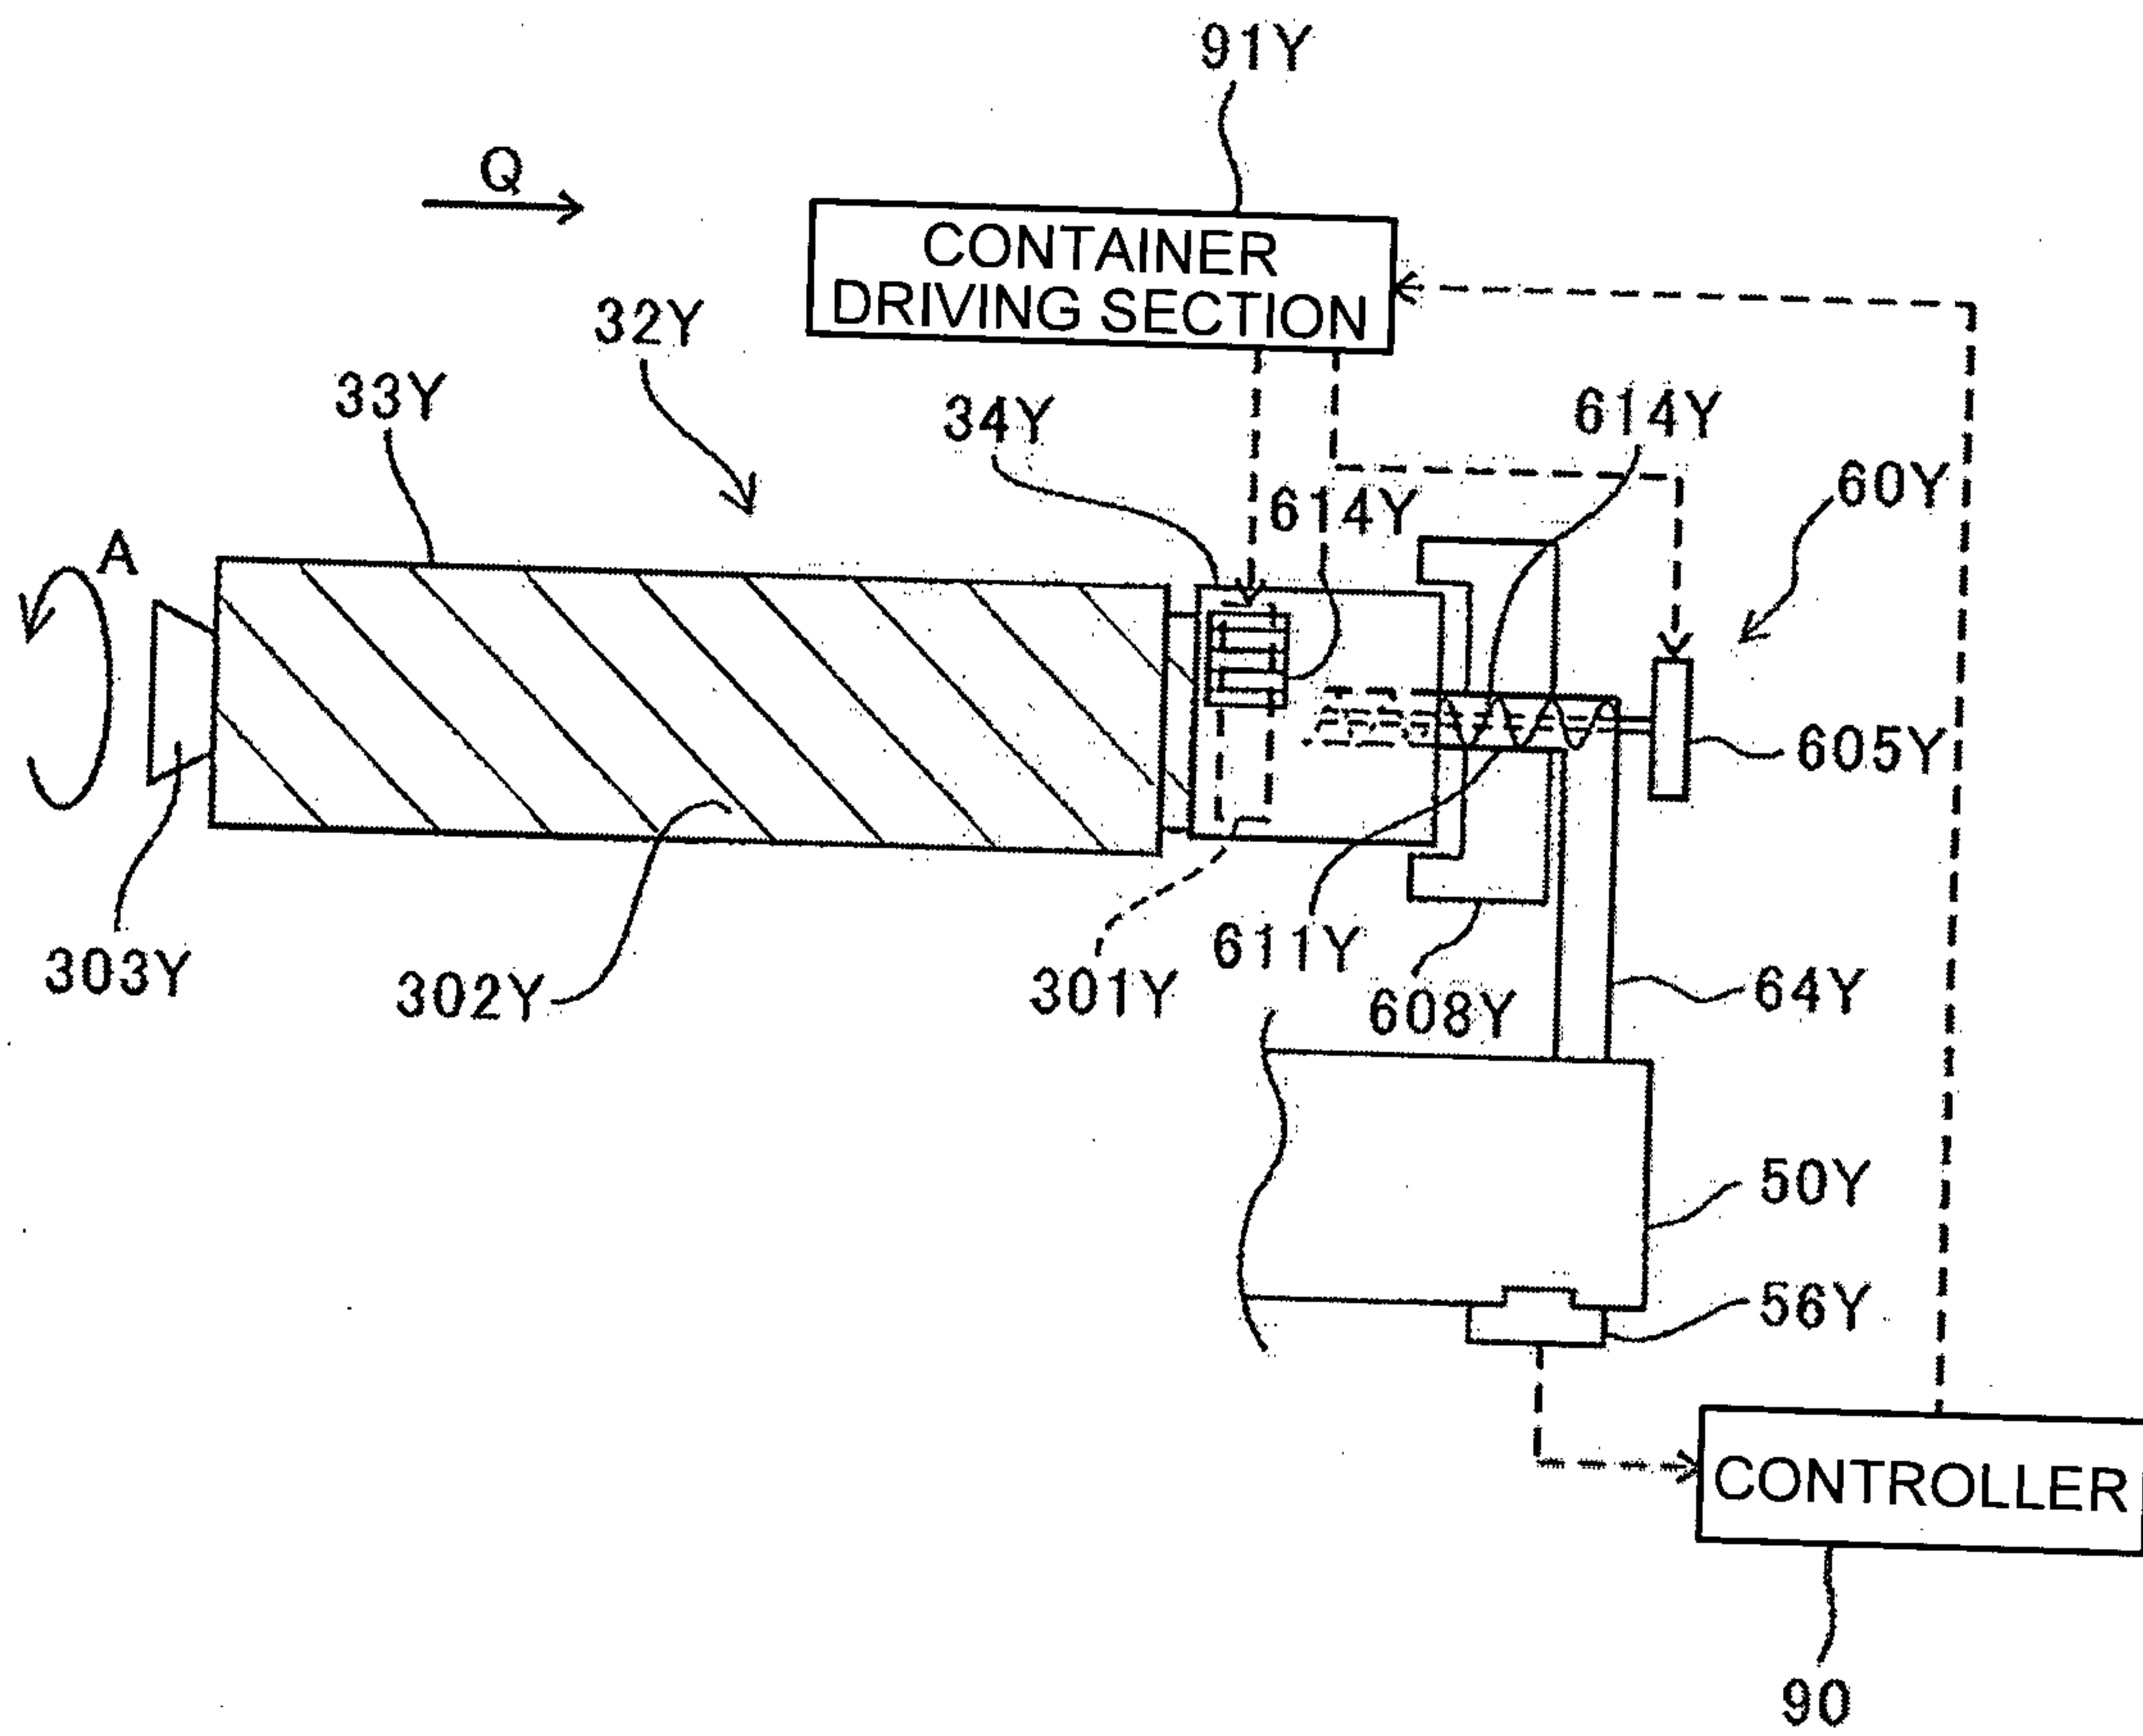


FIG.5

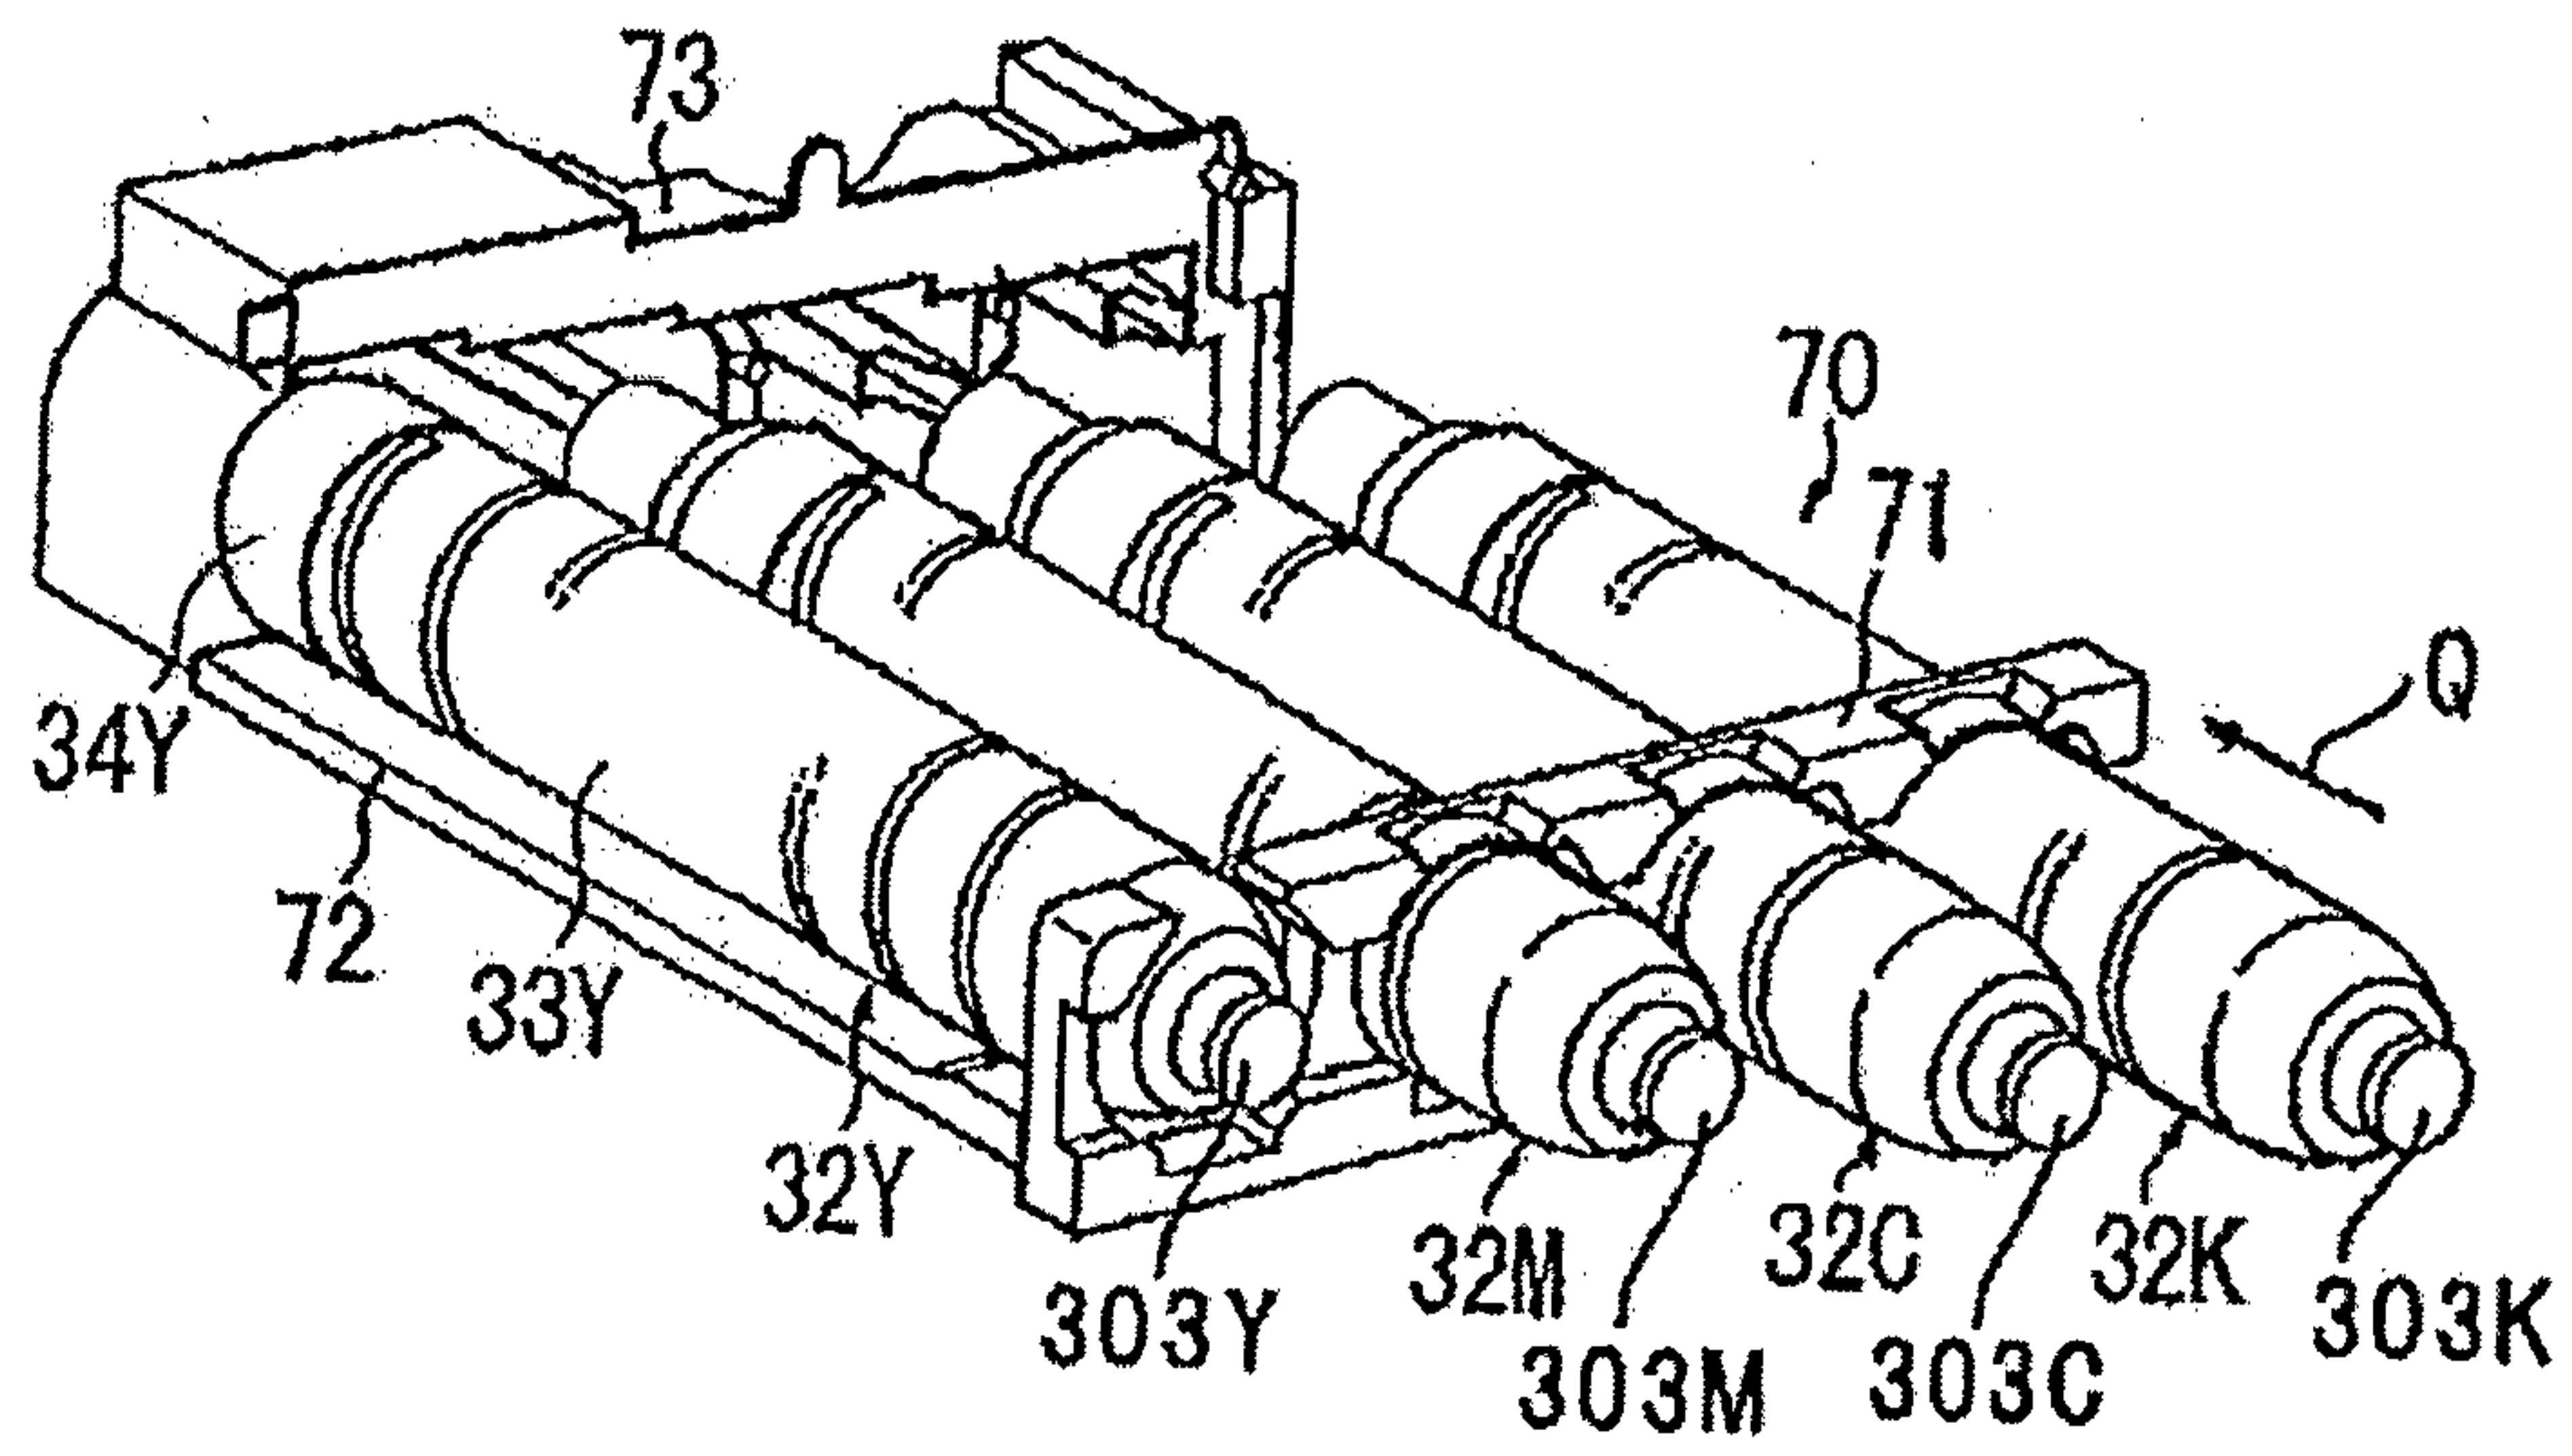

6/66

FIG.6



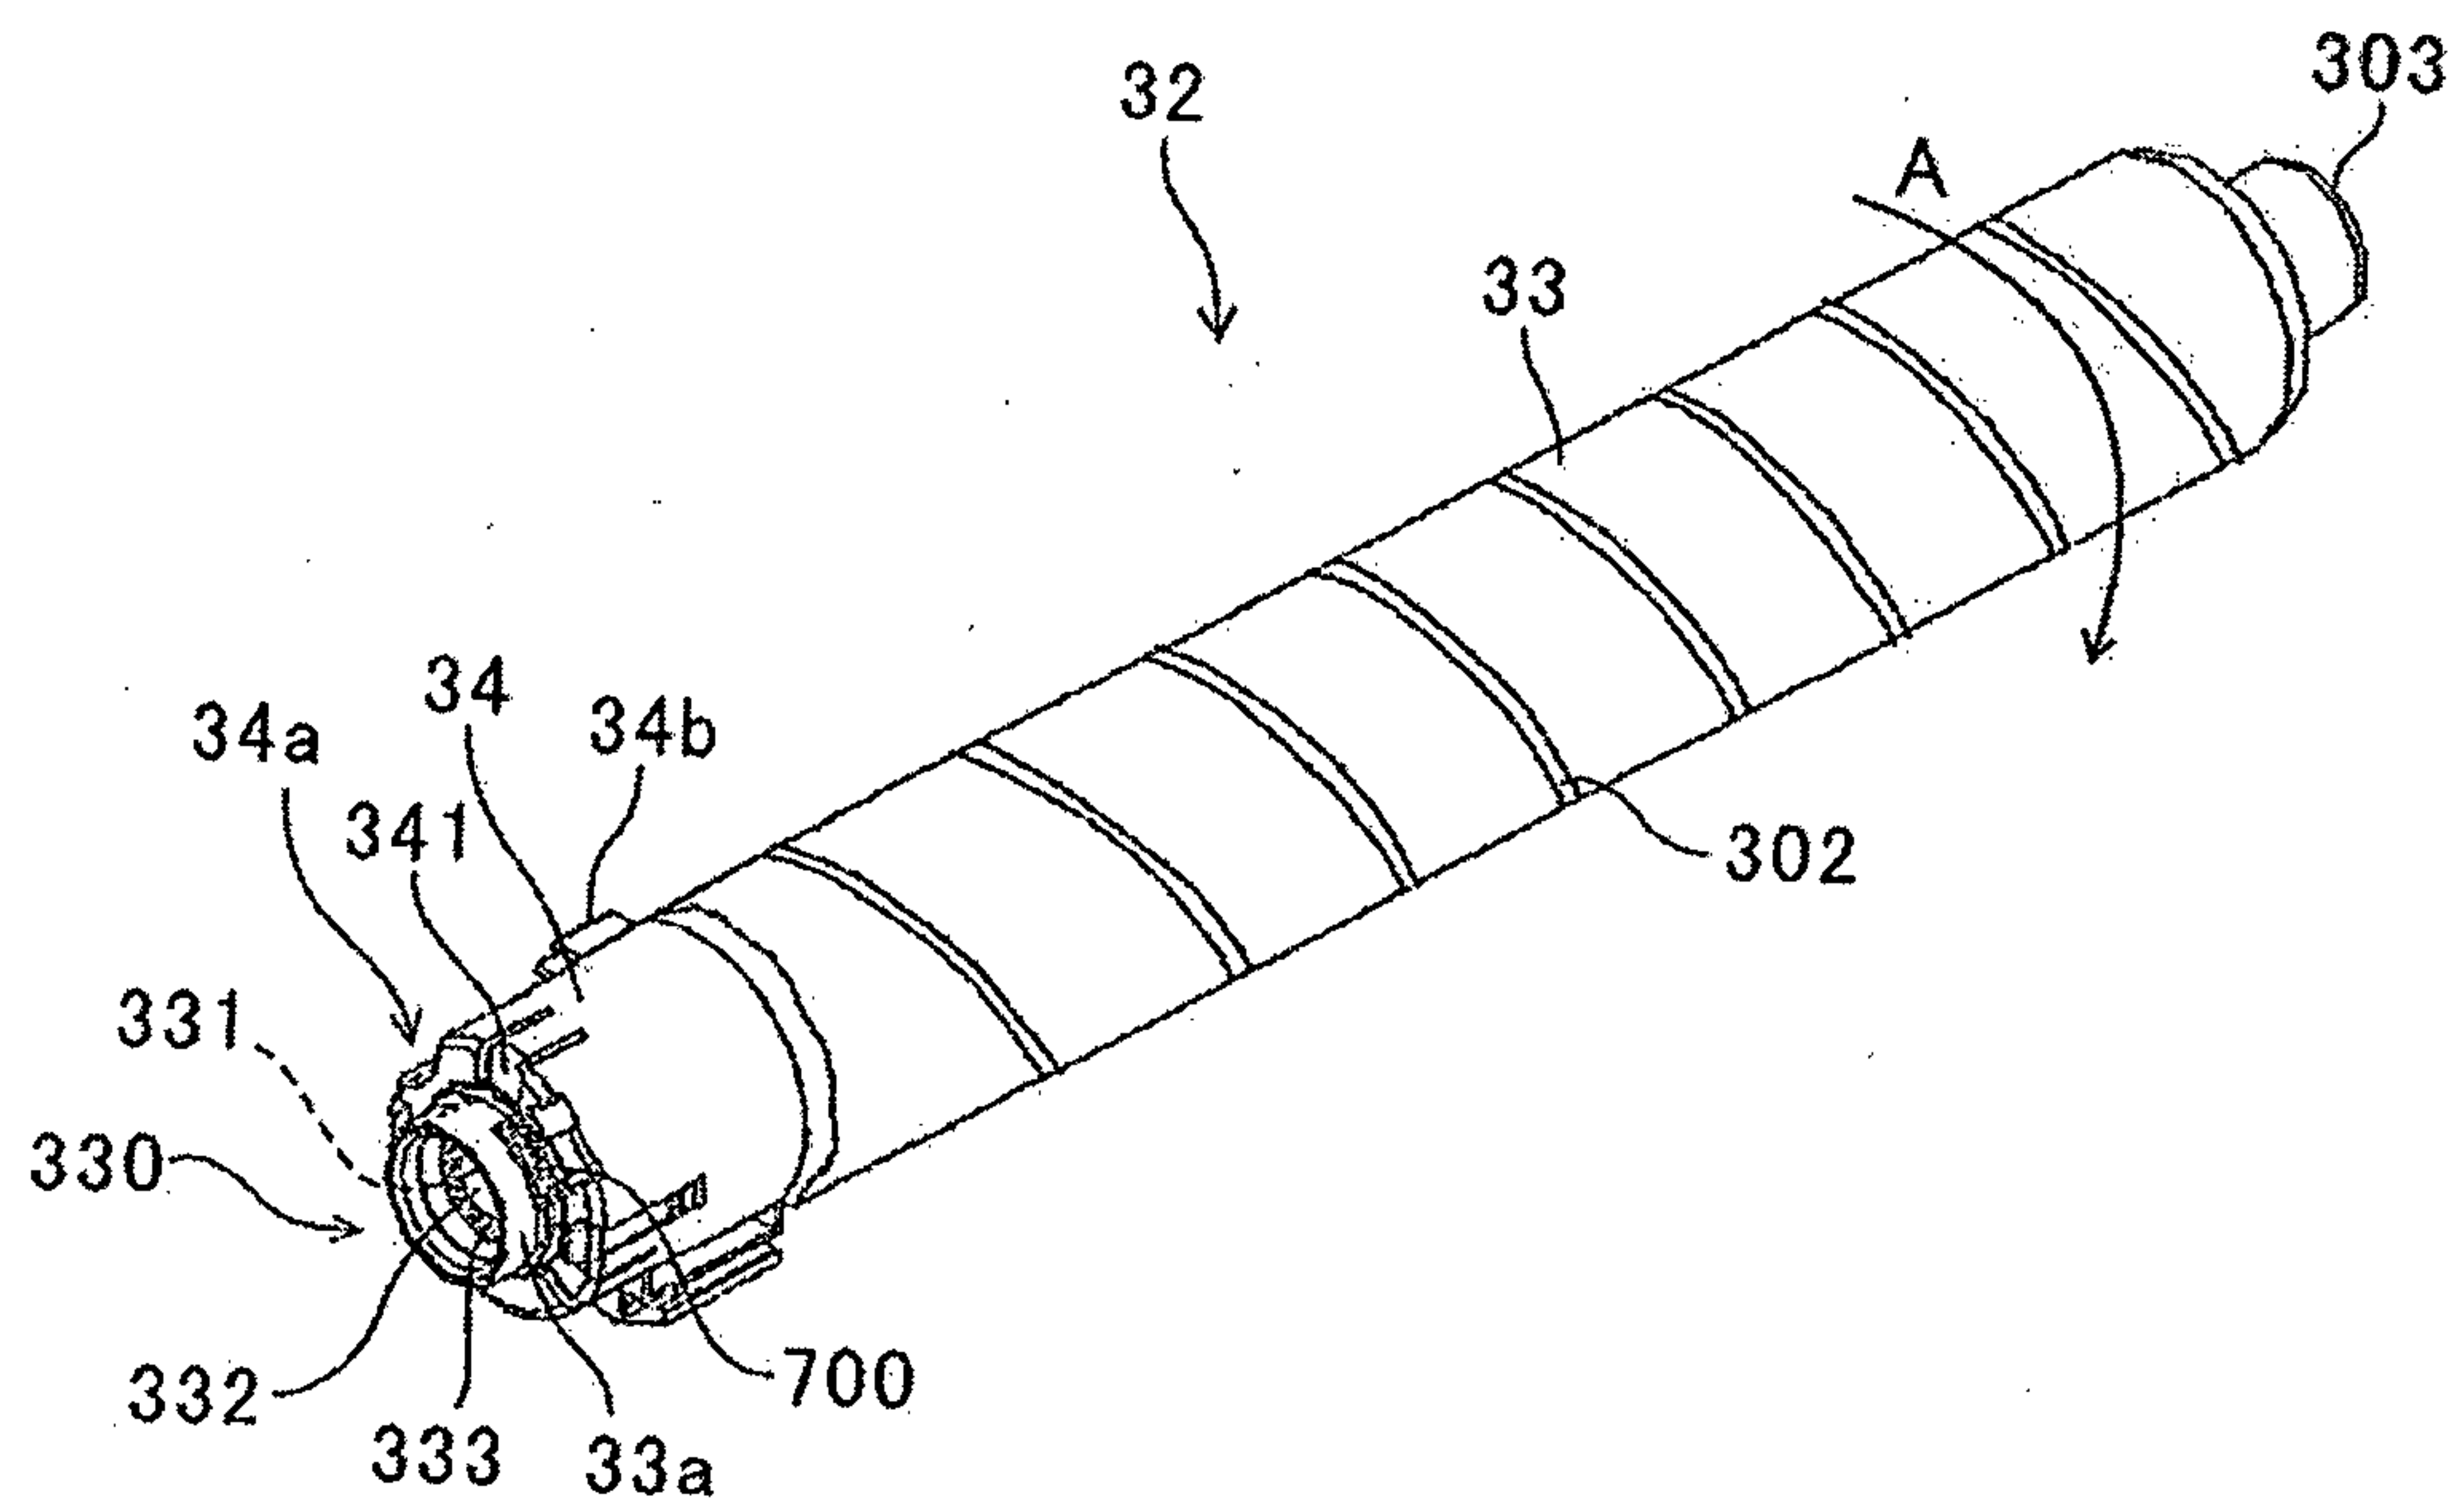


FIG.7

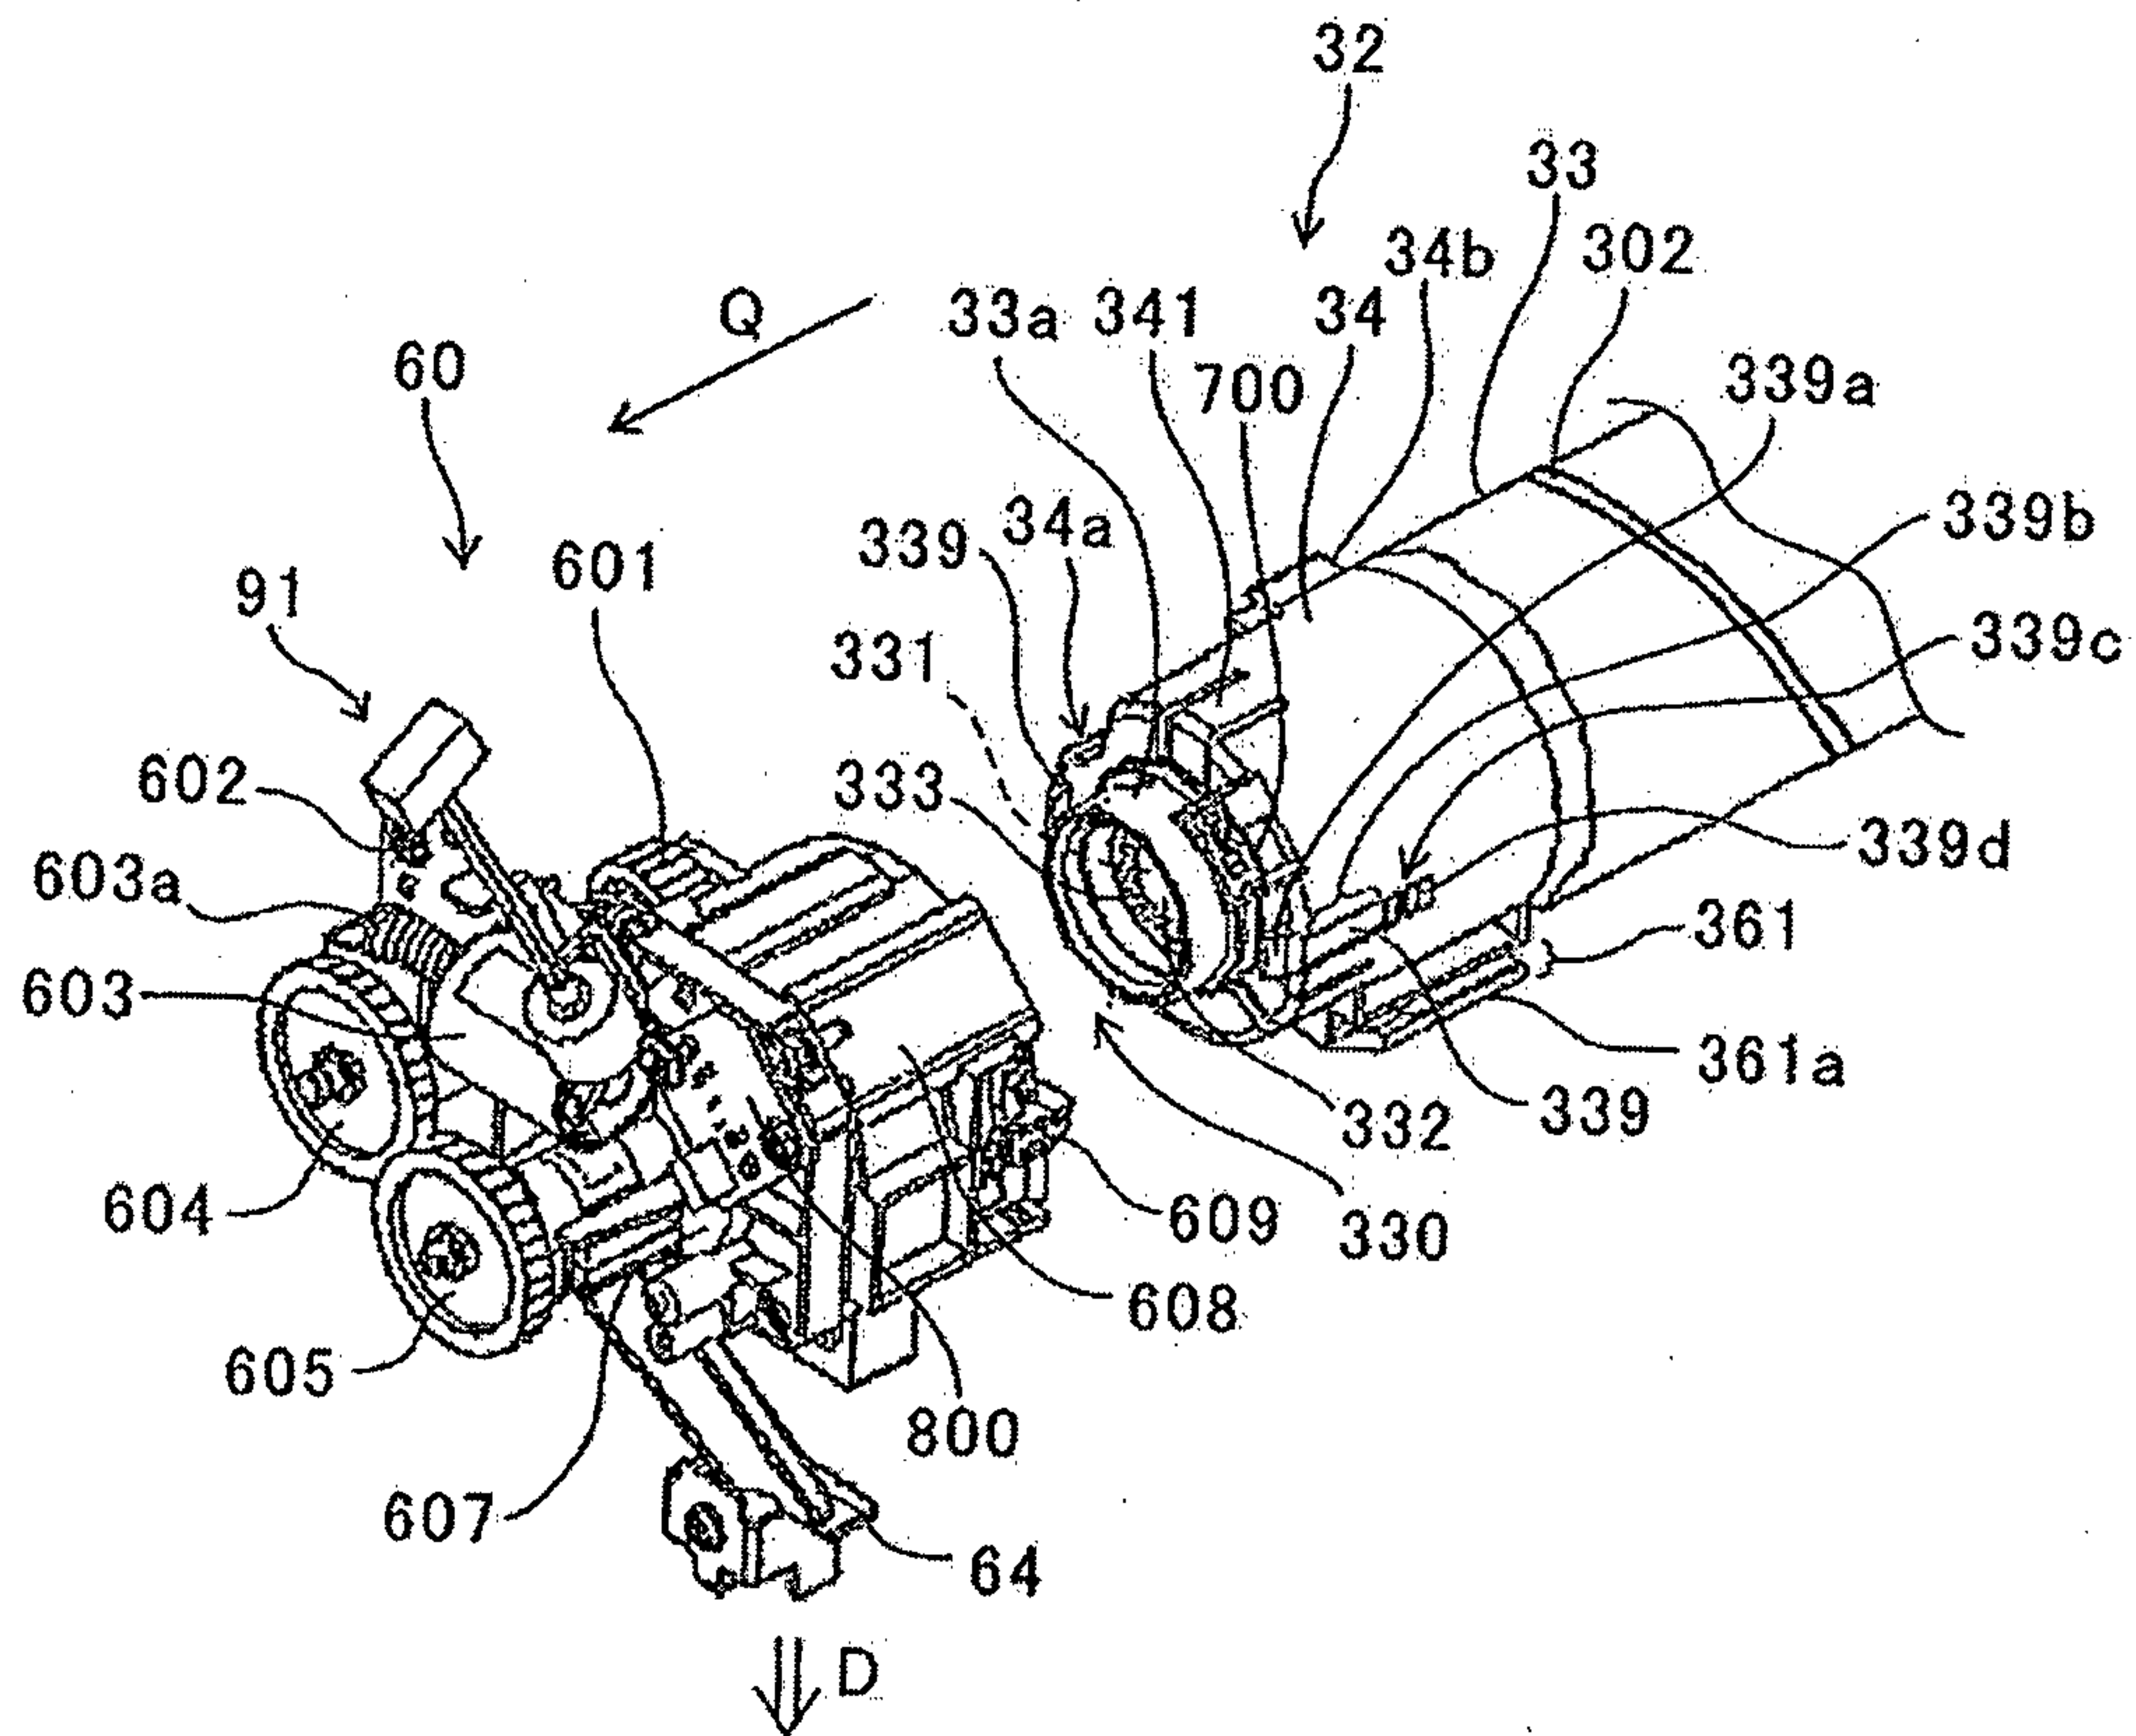


8/66

FIG.8

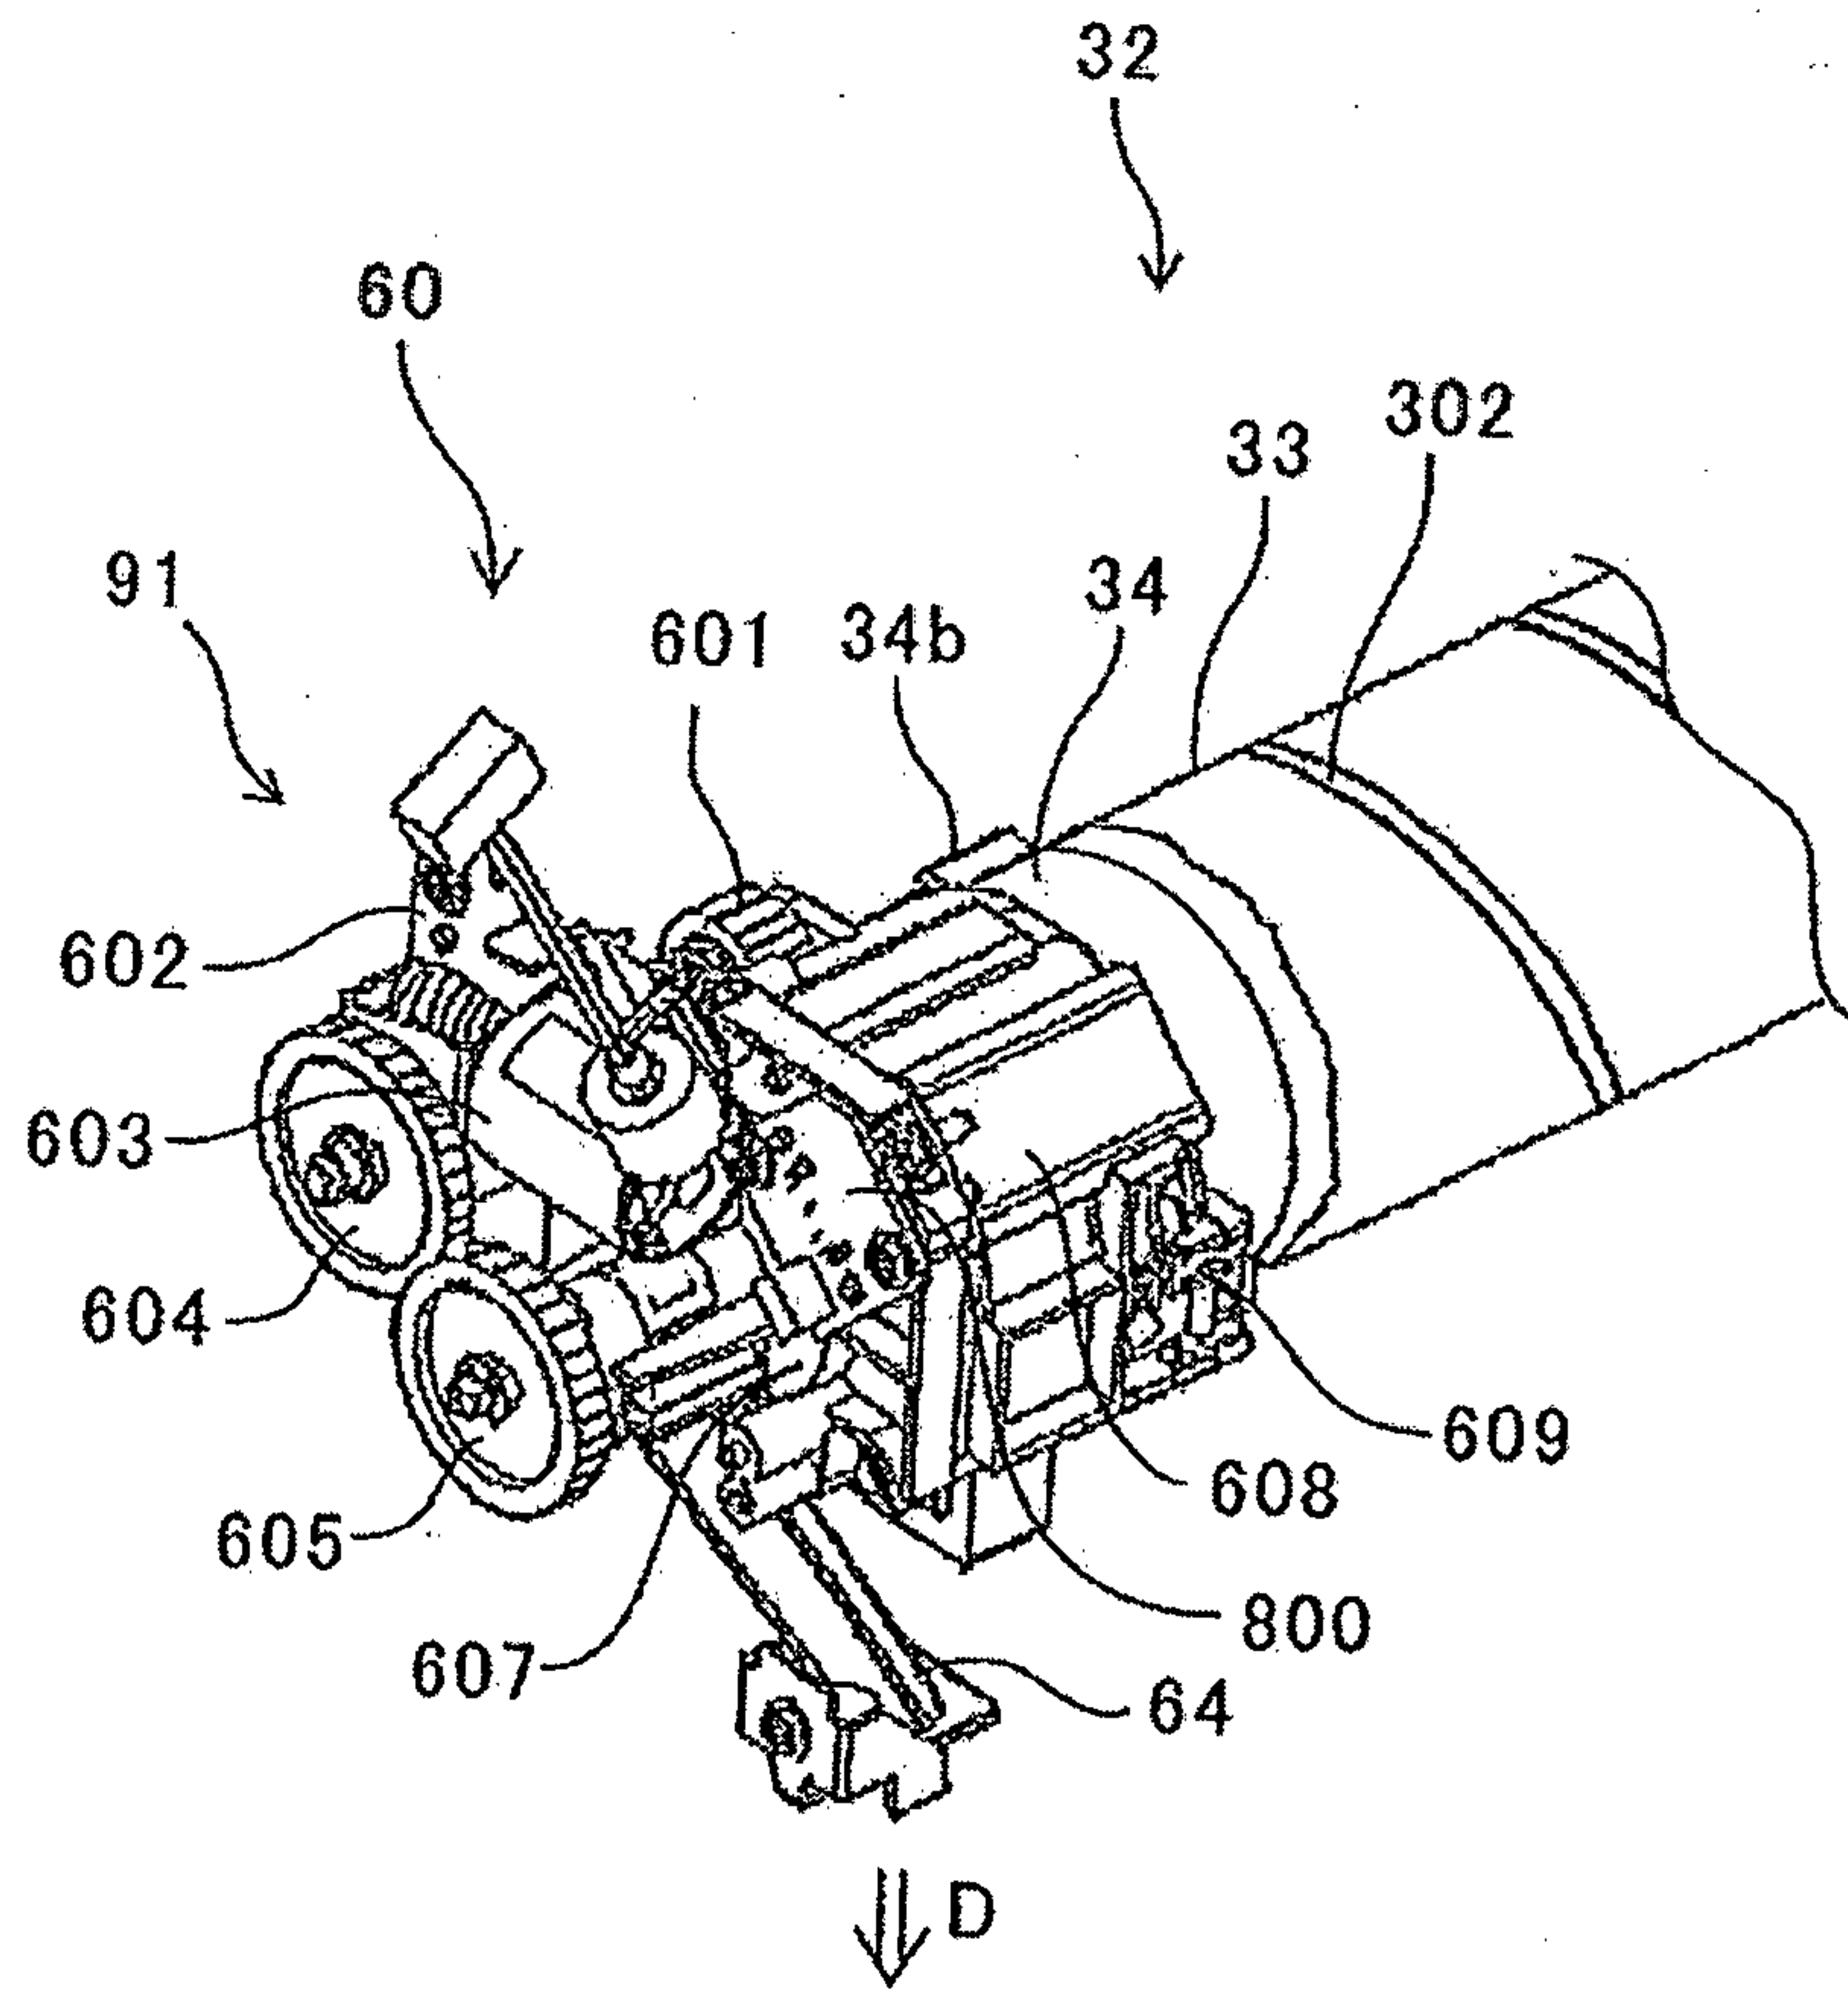


9/66

FIG.9

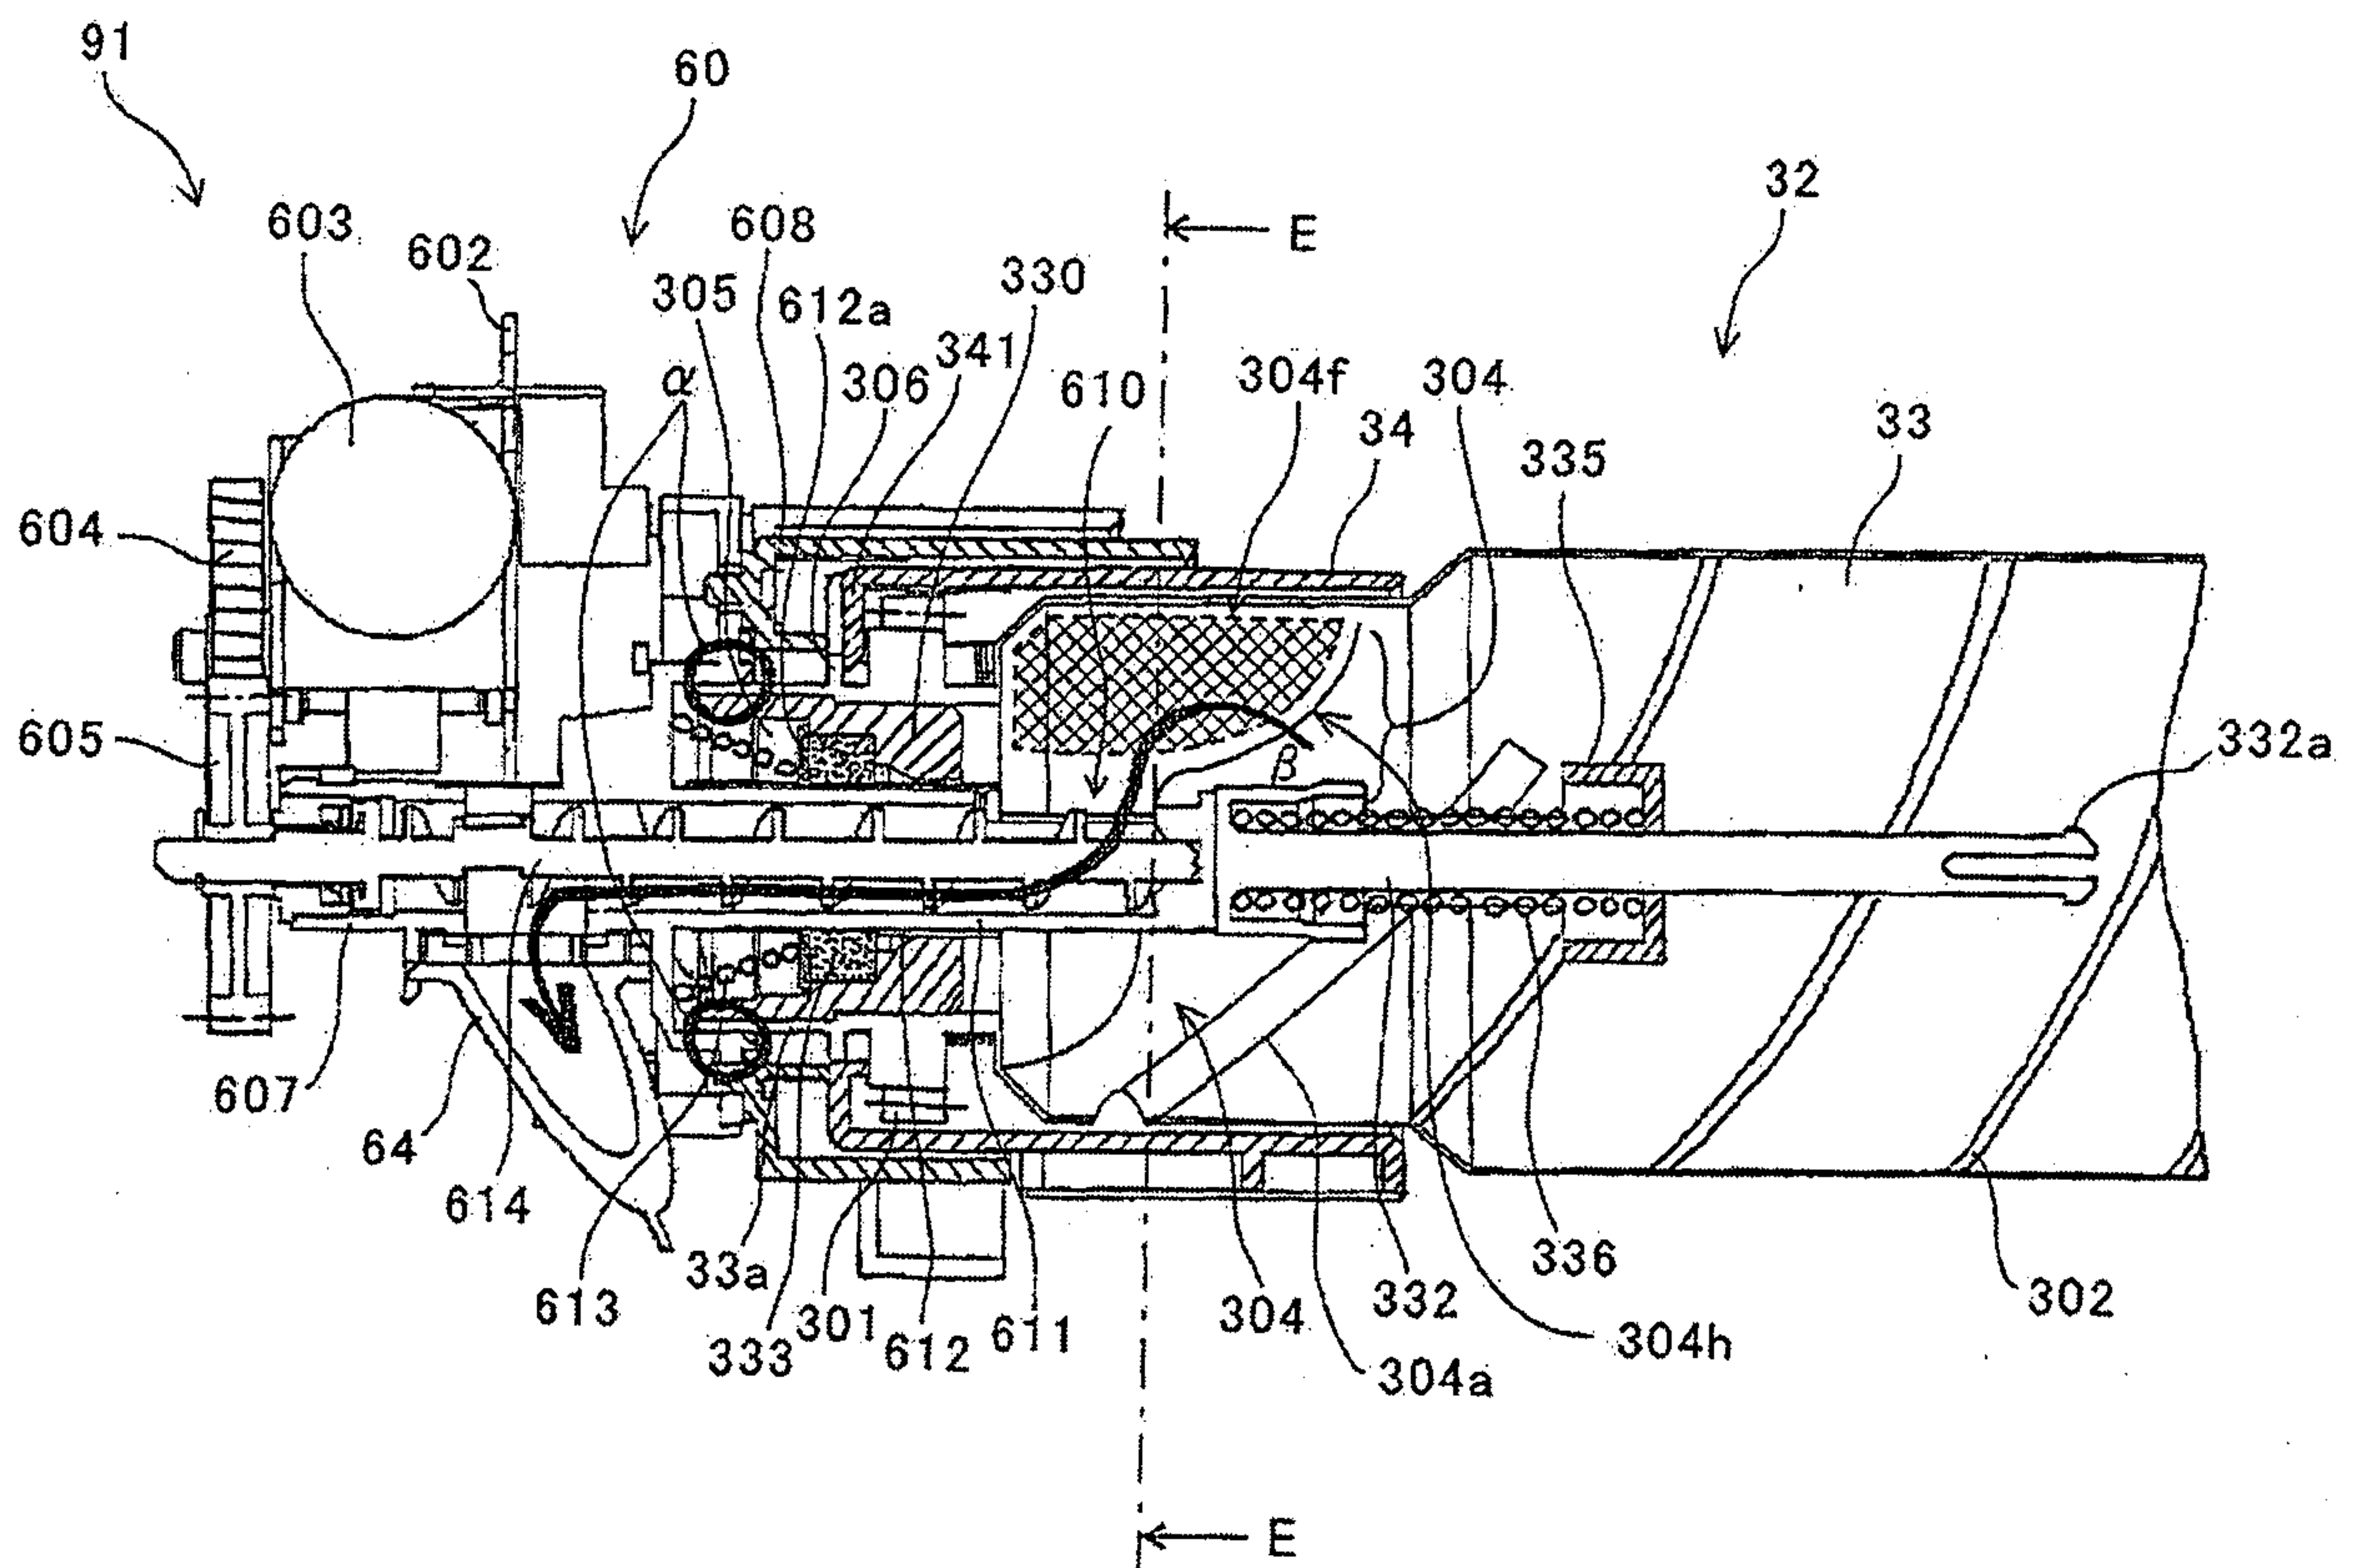


10/66

FIG.10

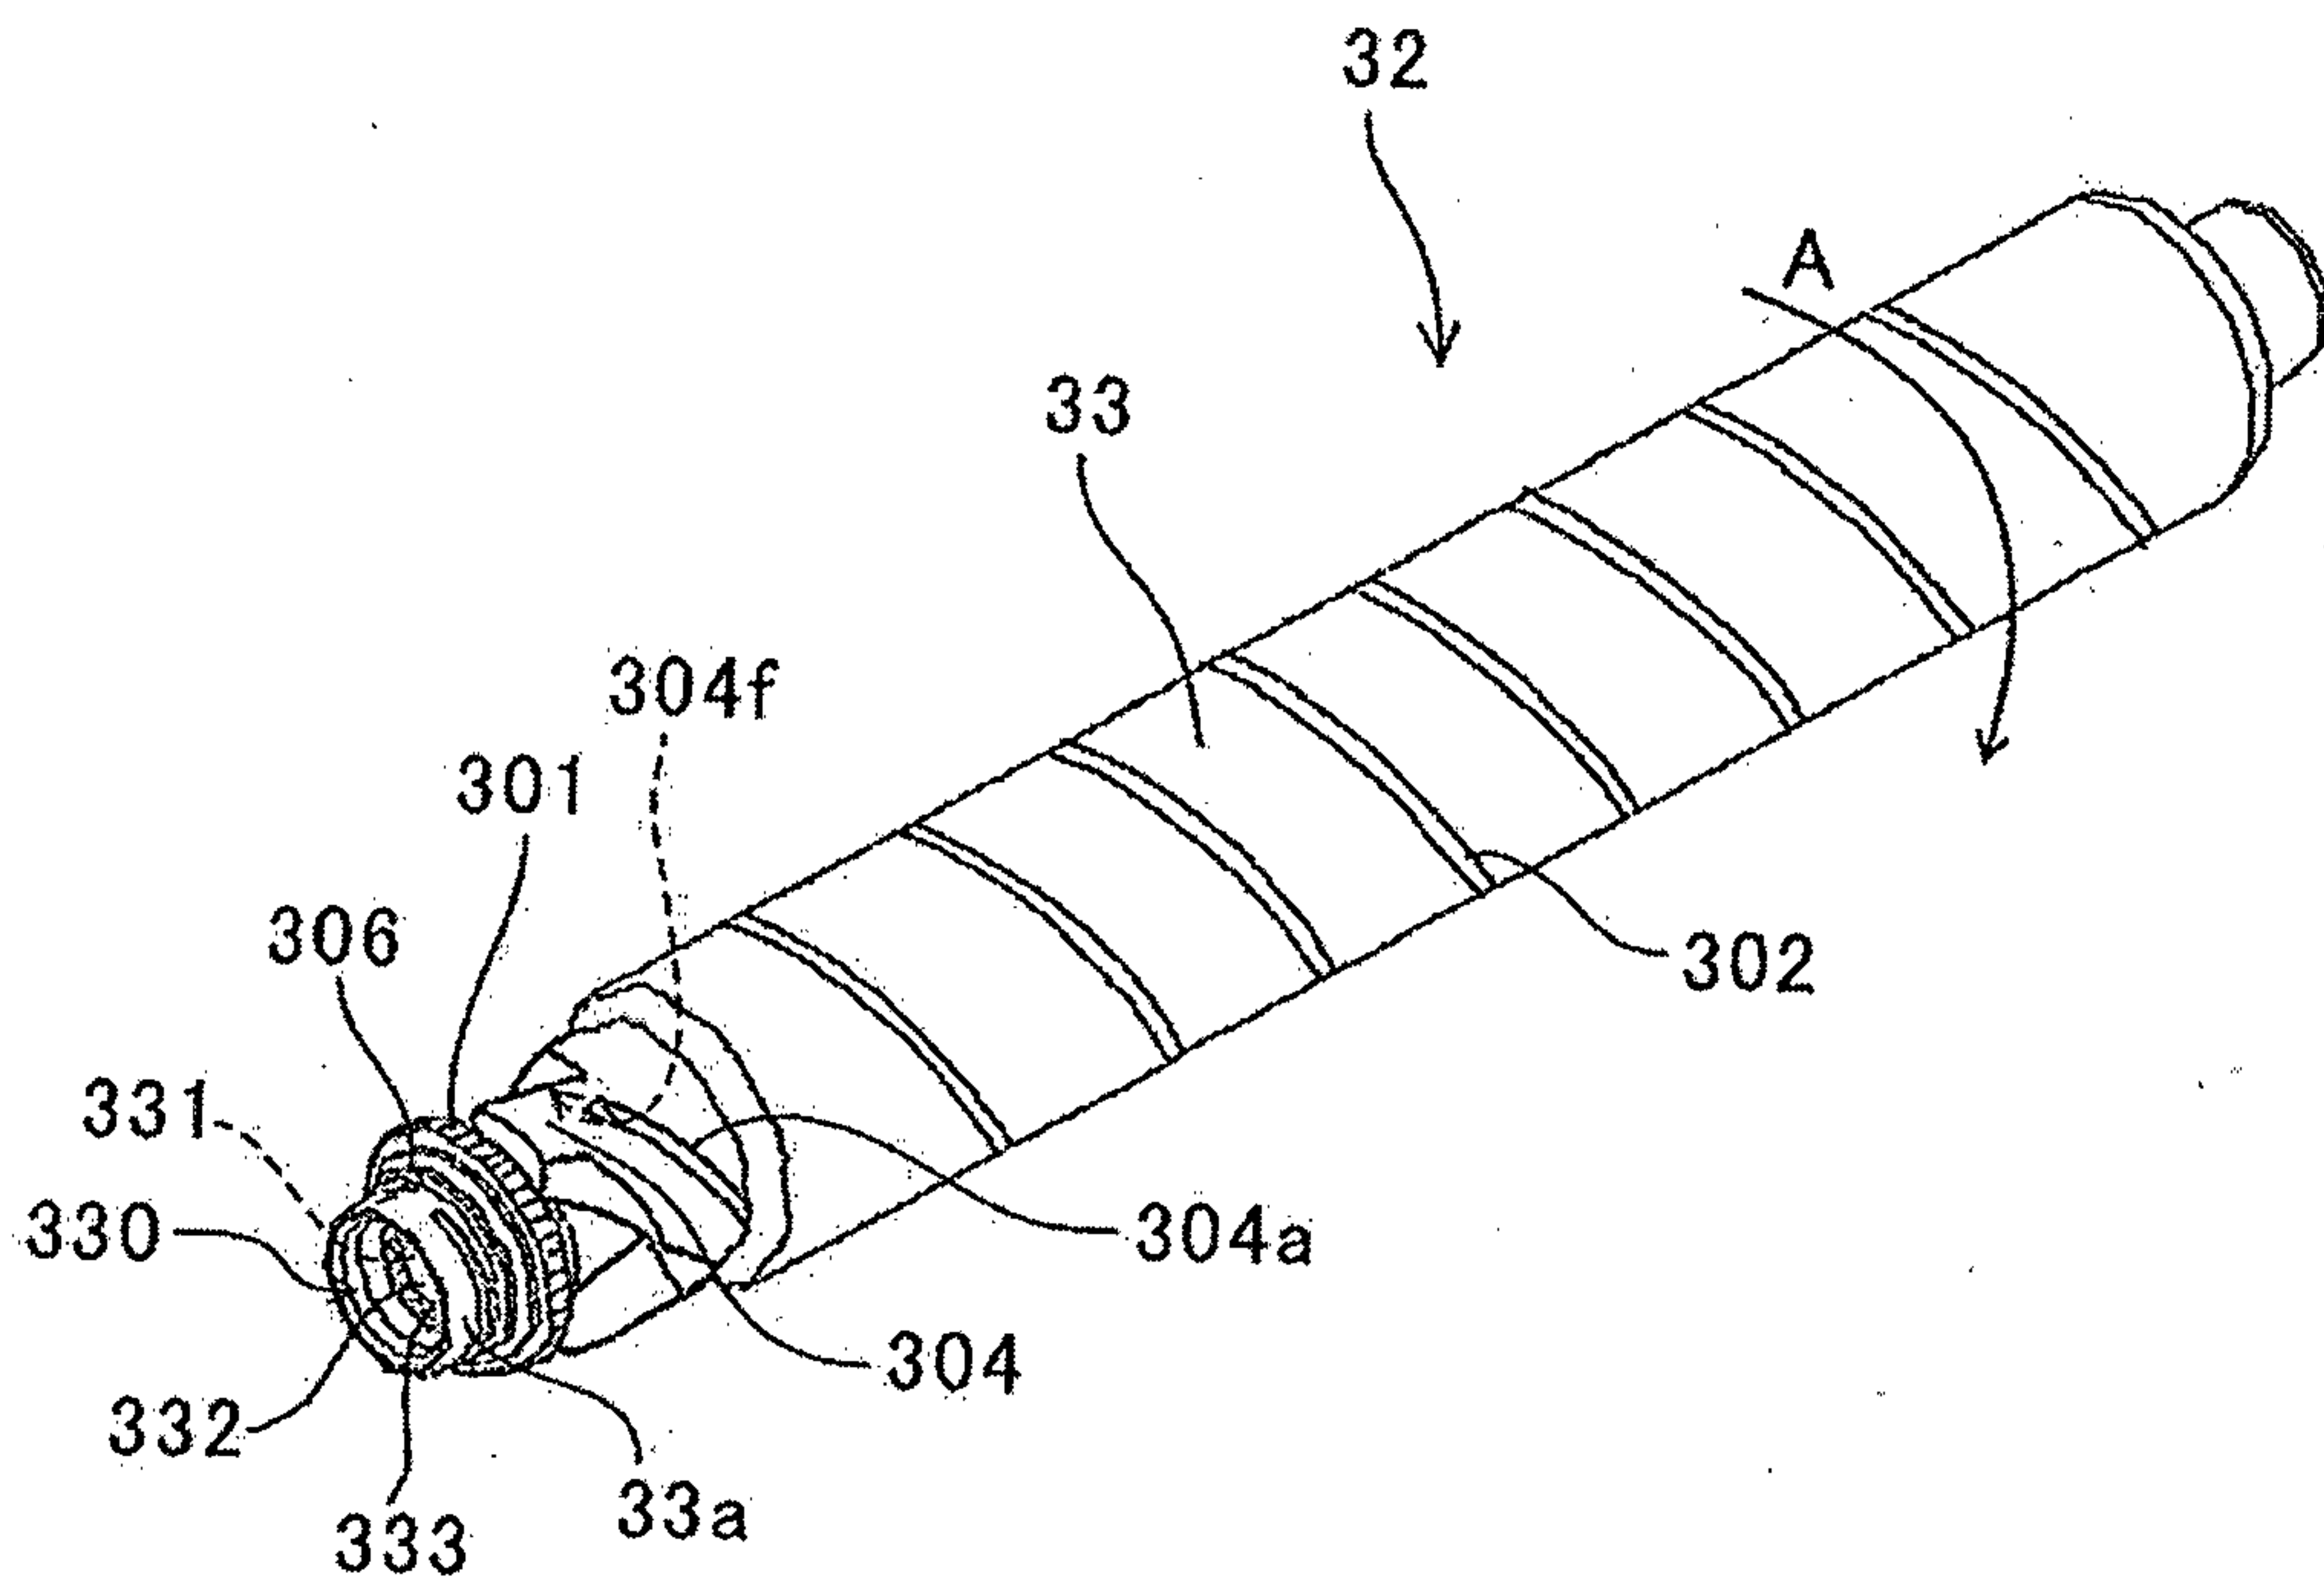

11/66

FIG.11

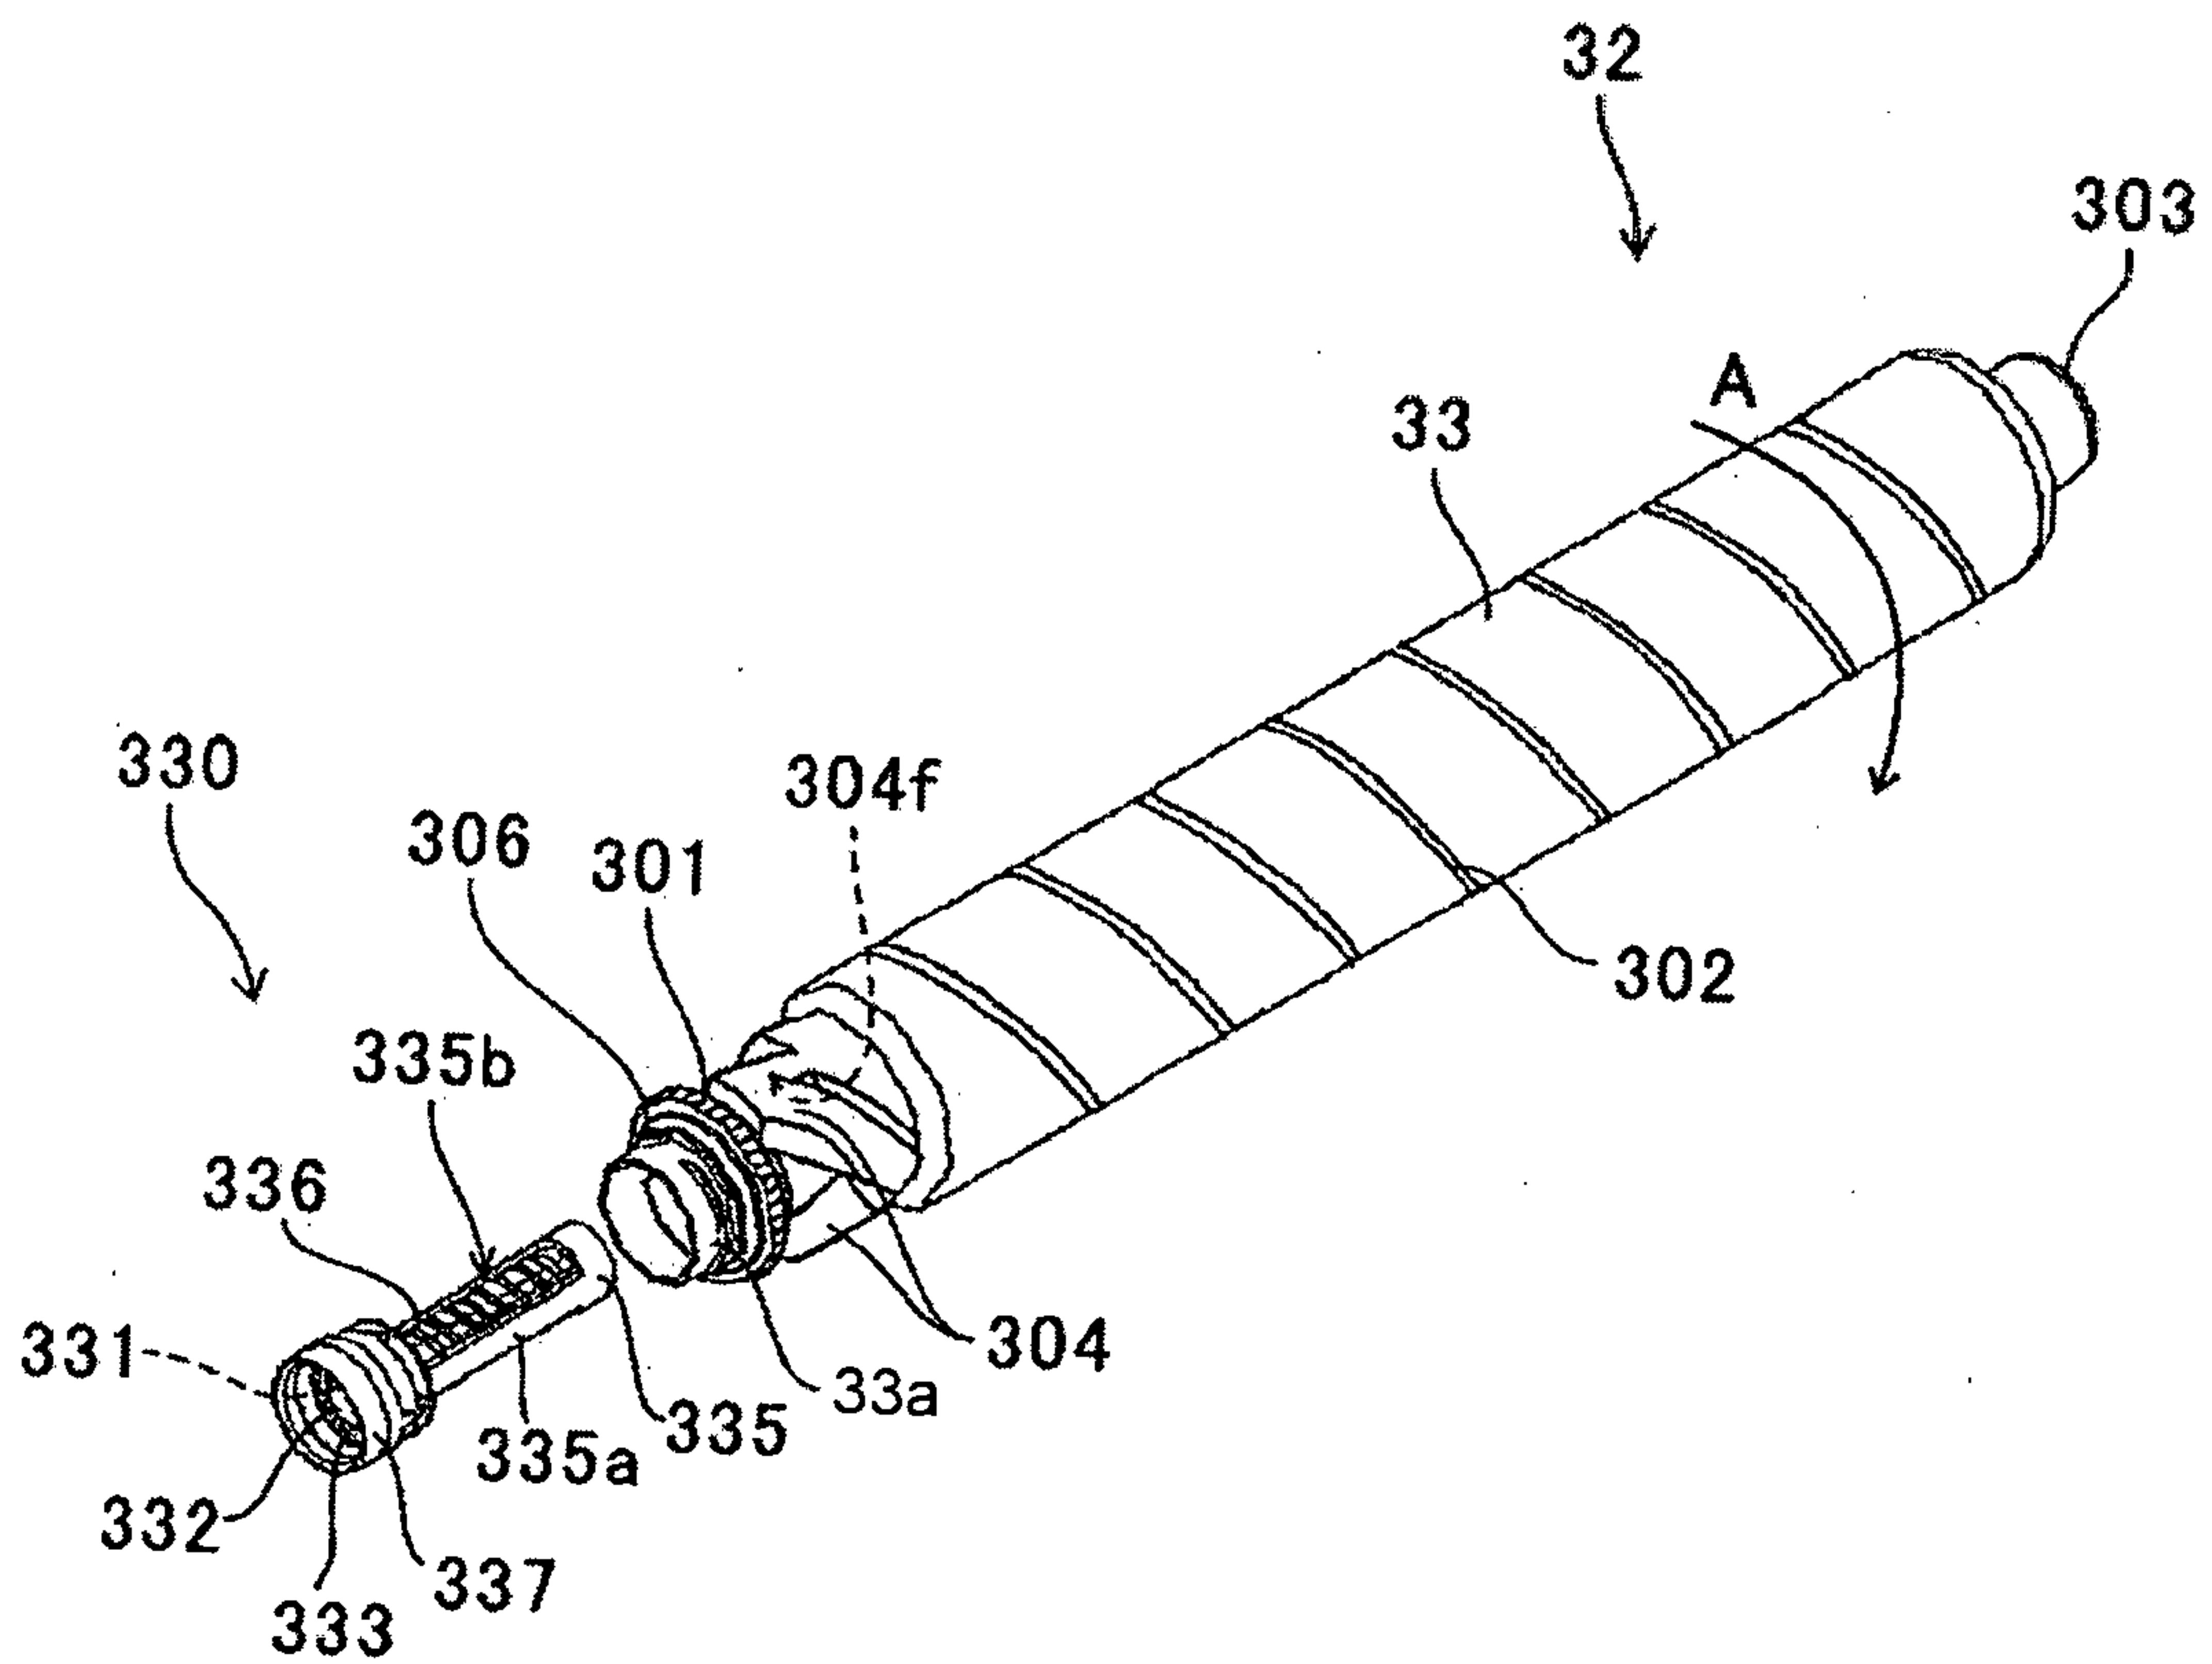

12/66

FIG.12



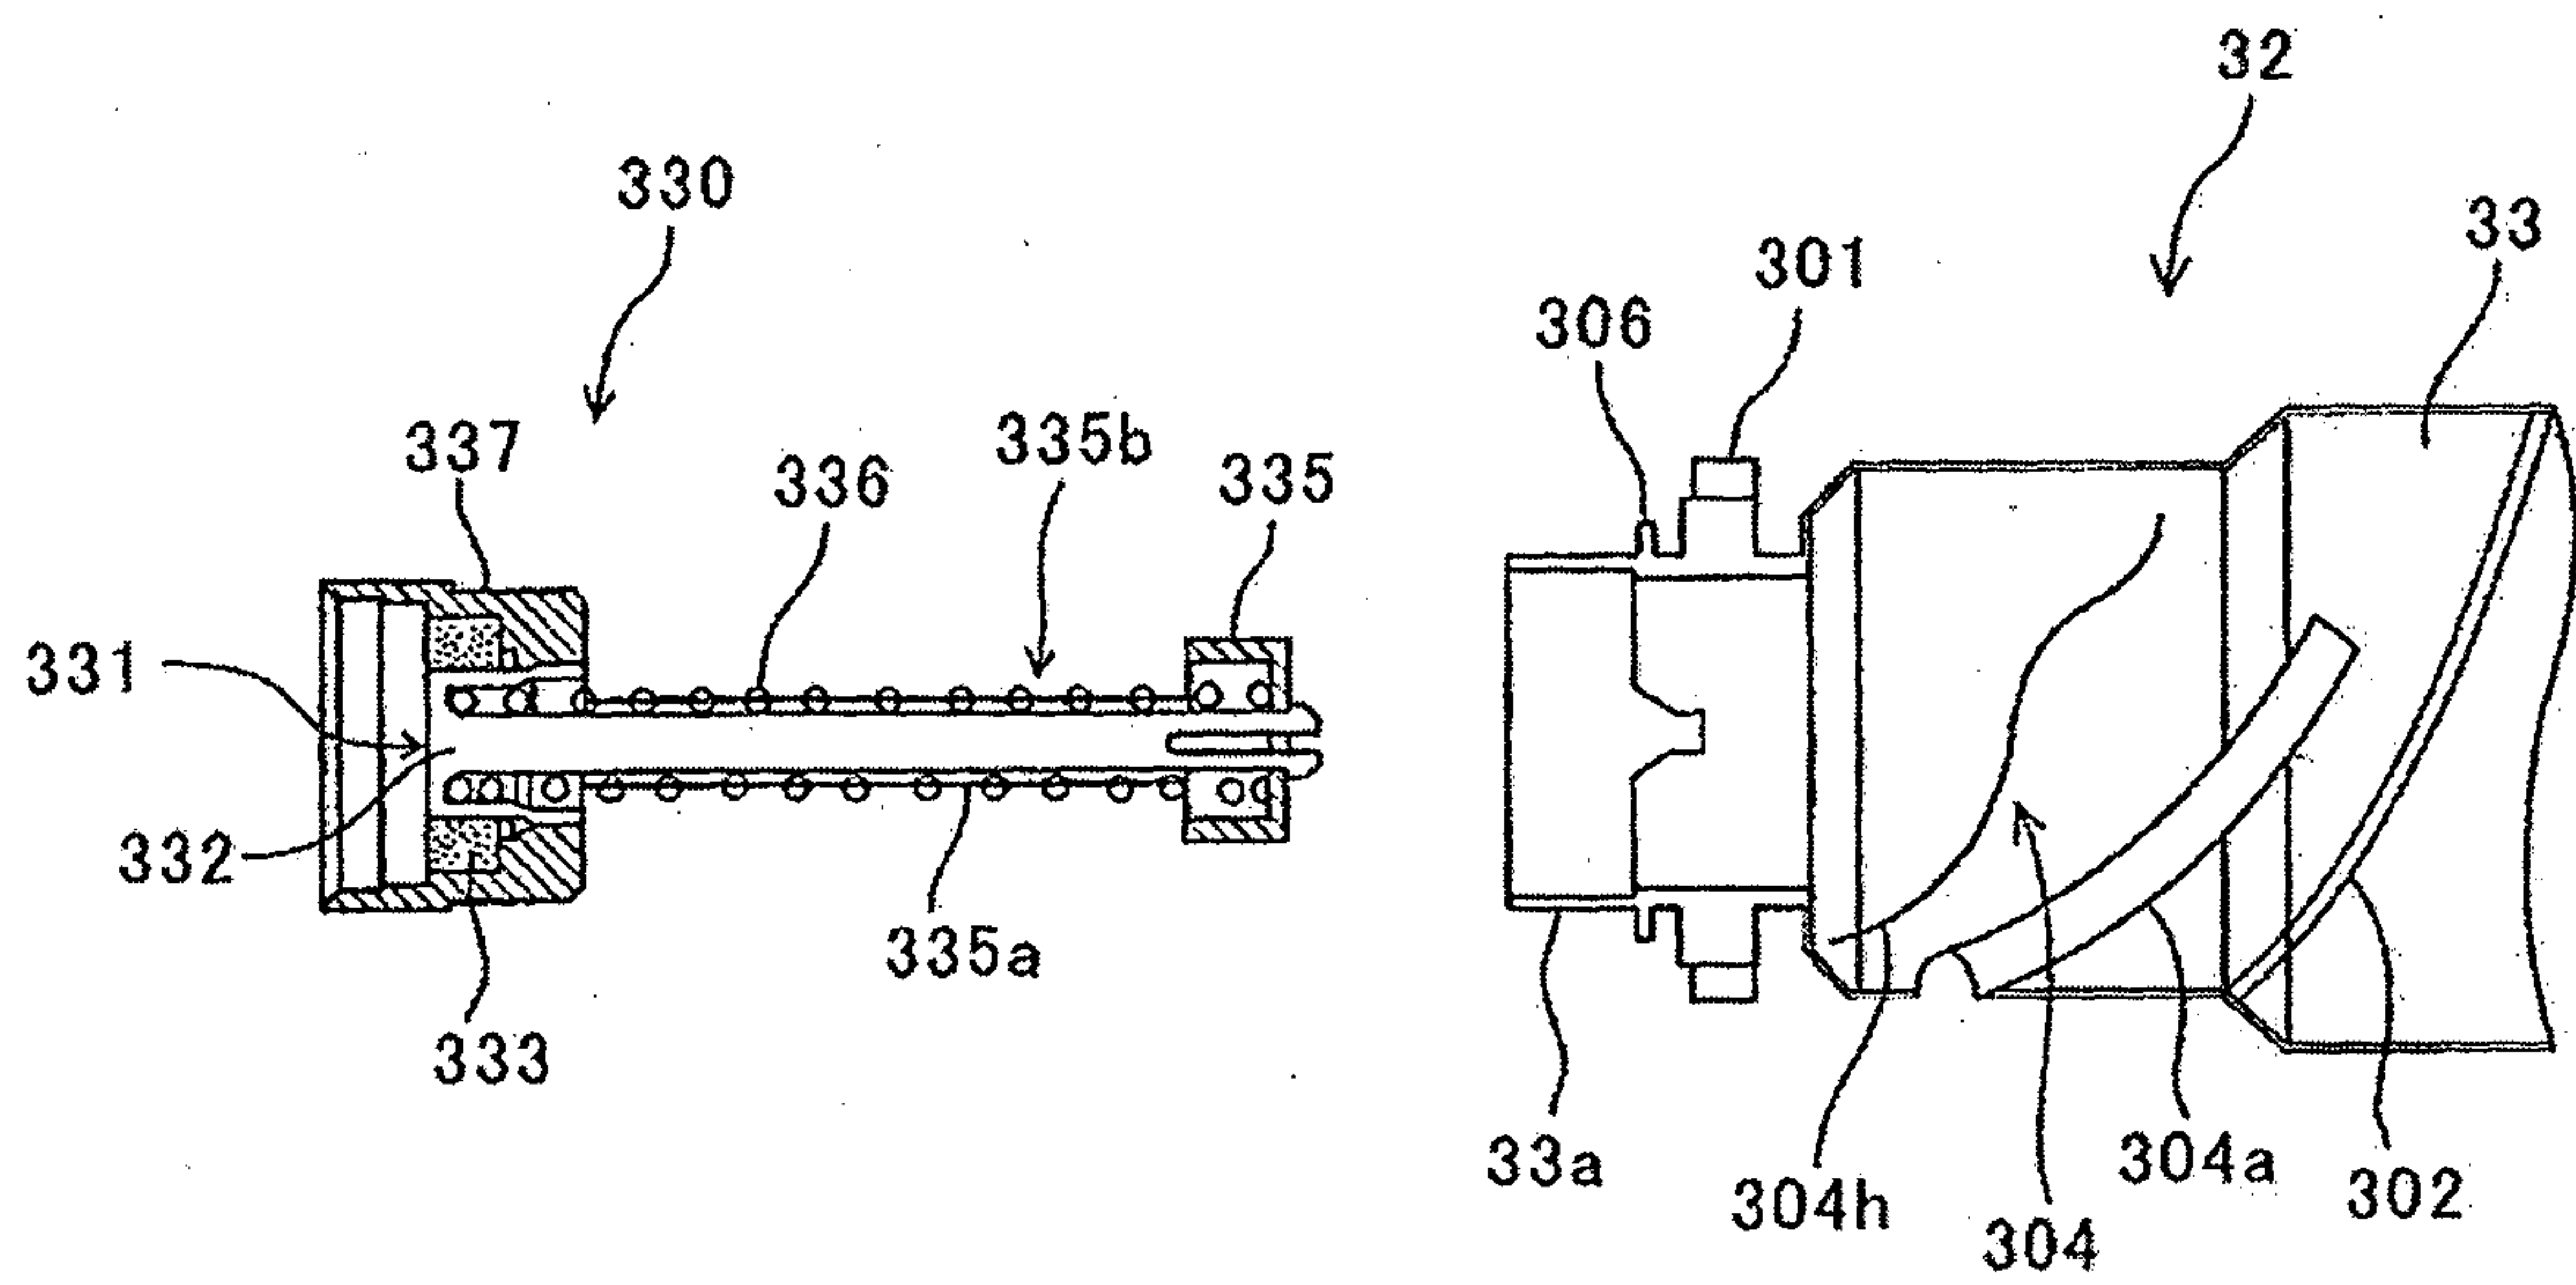


FIG.13

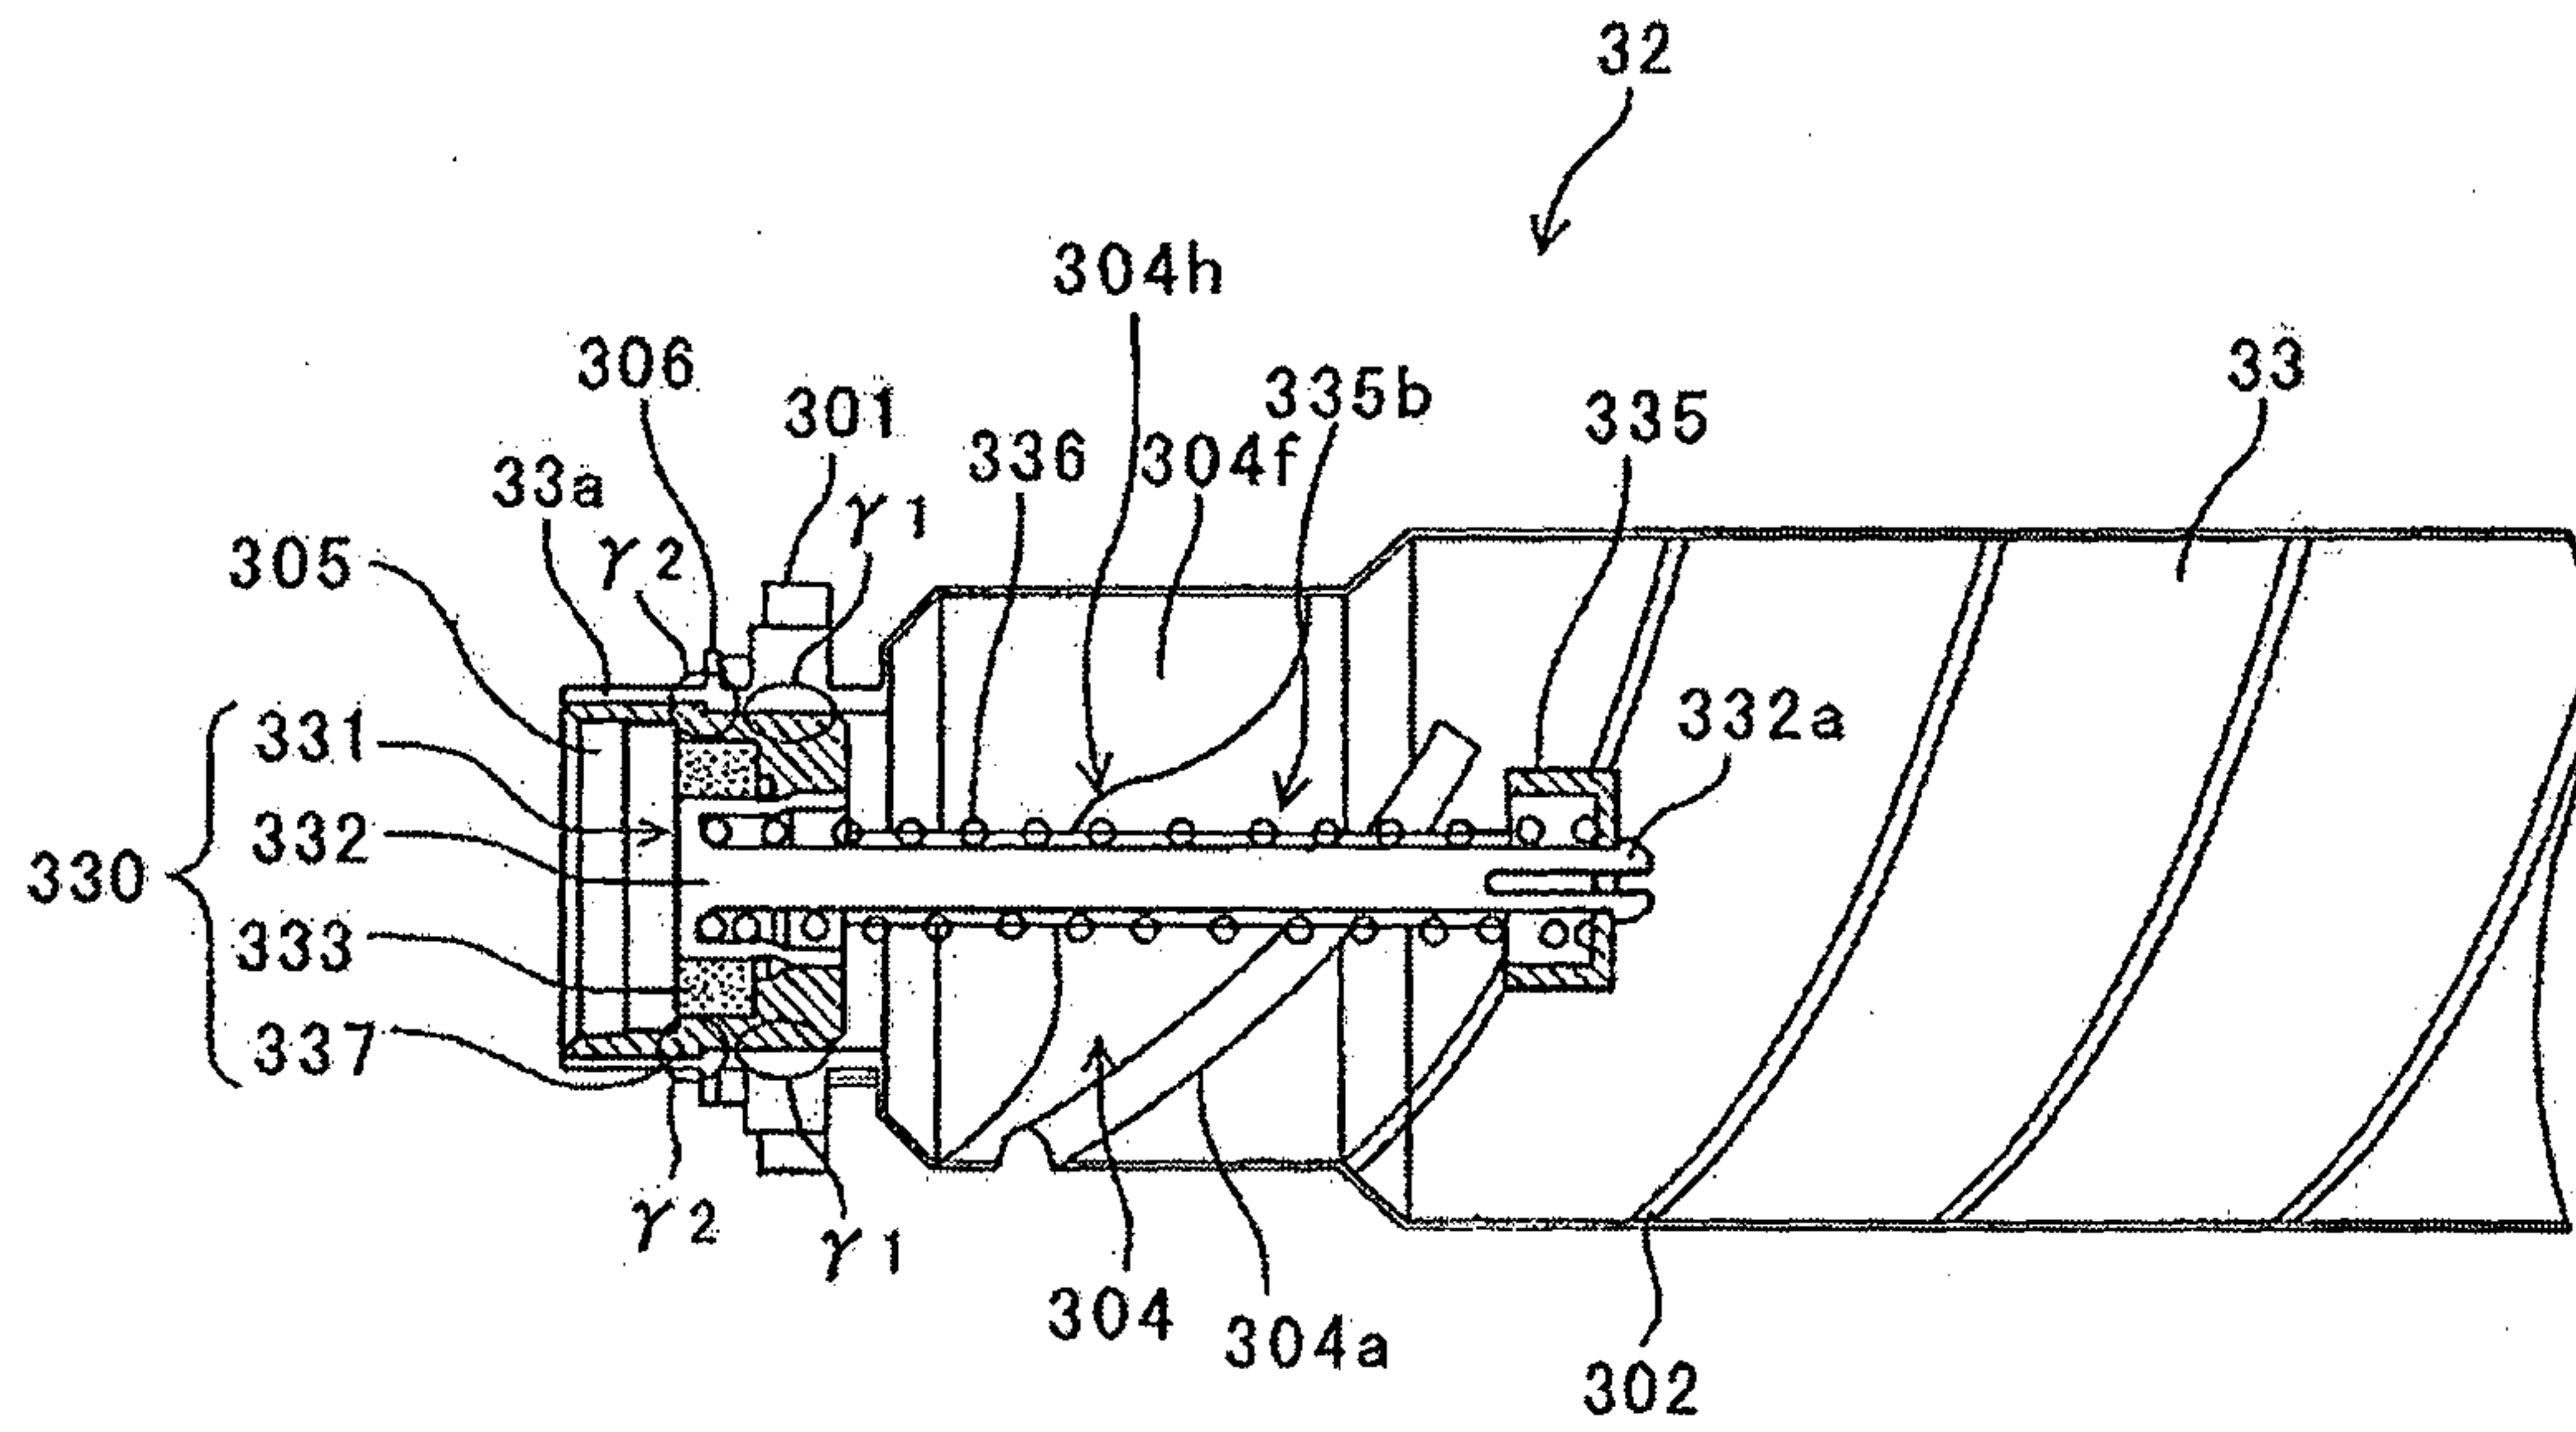

14/66

FIG.14

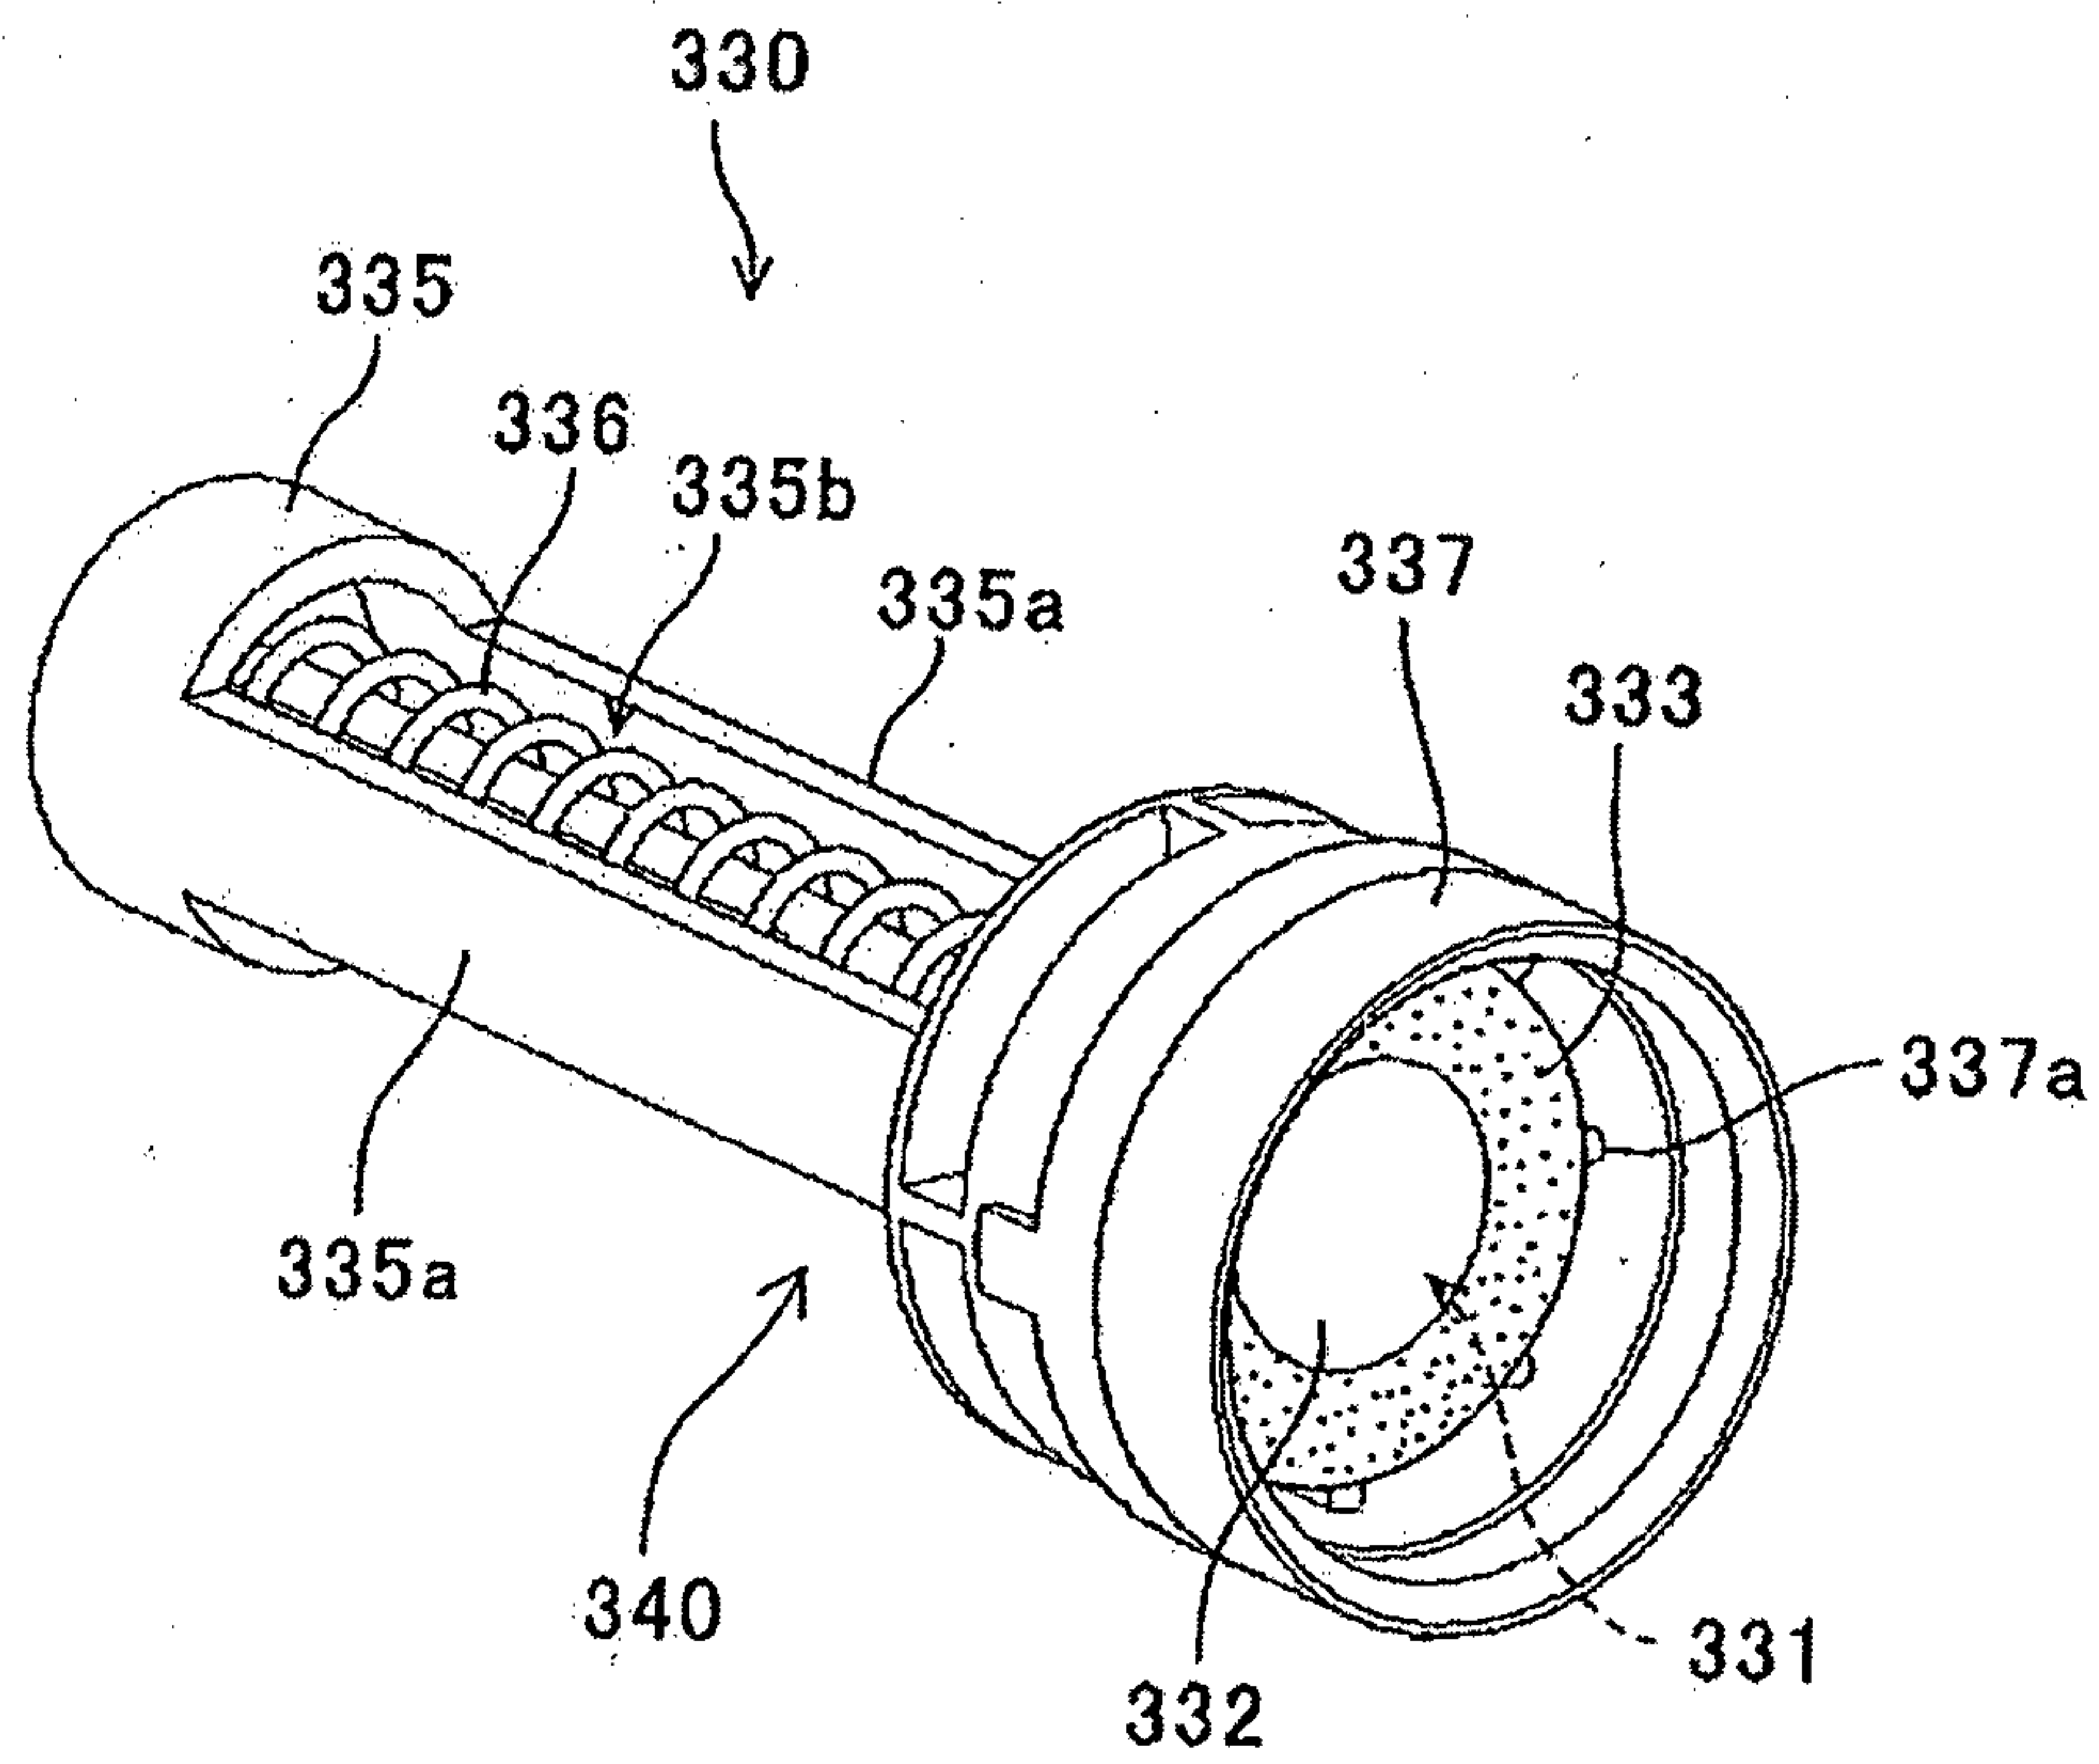

15/66

FIG. 15


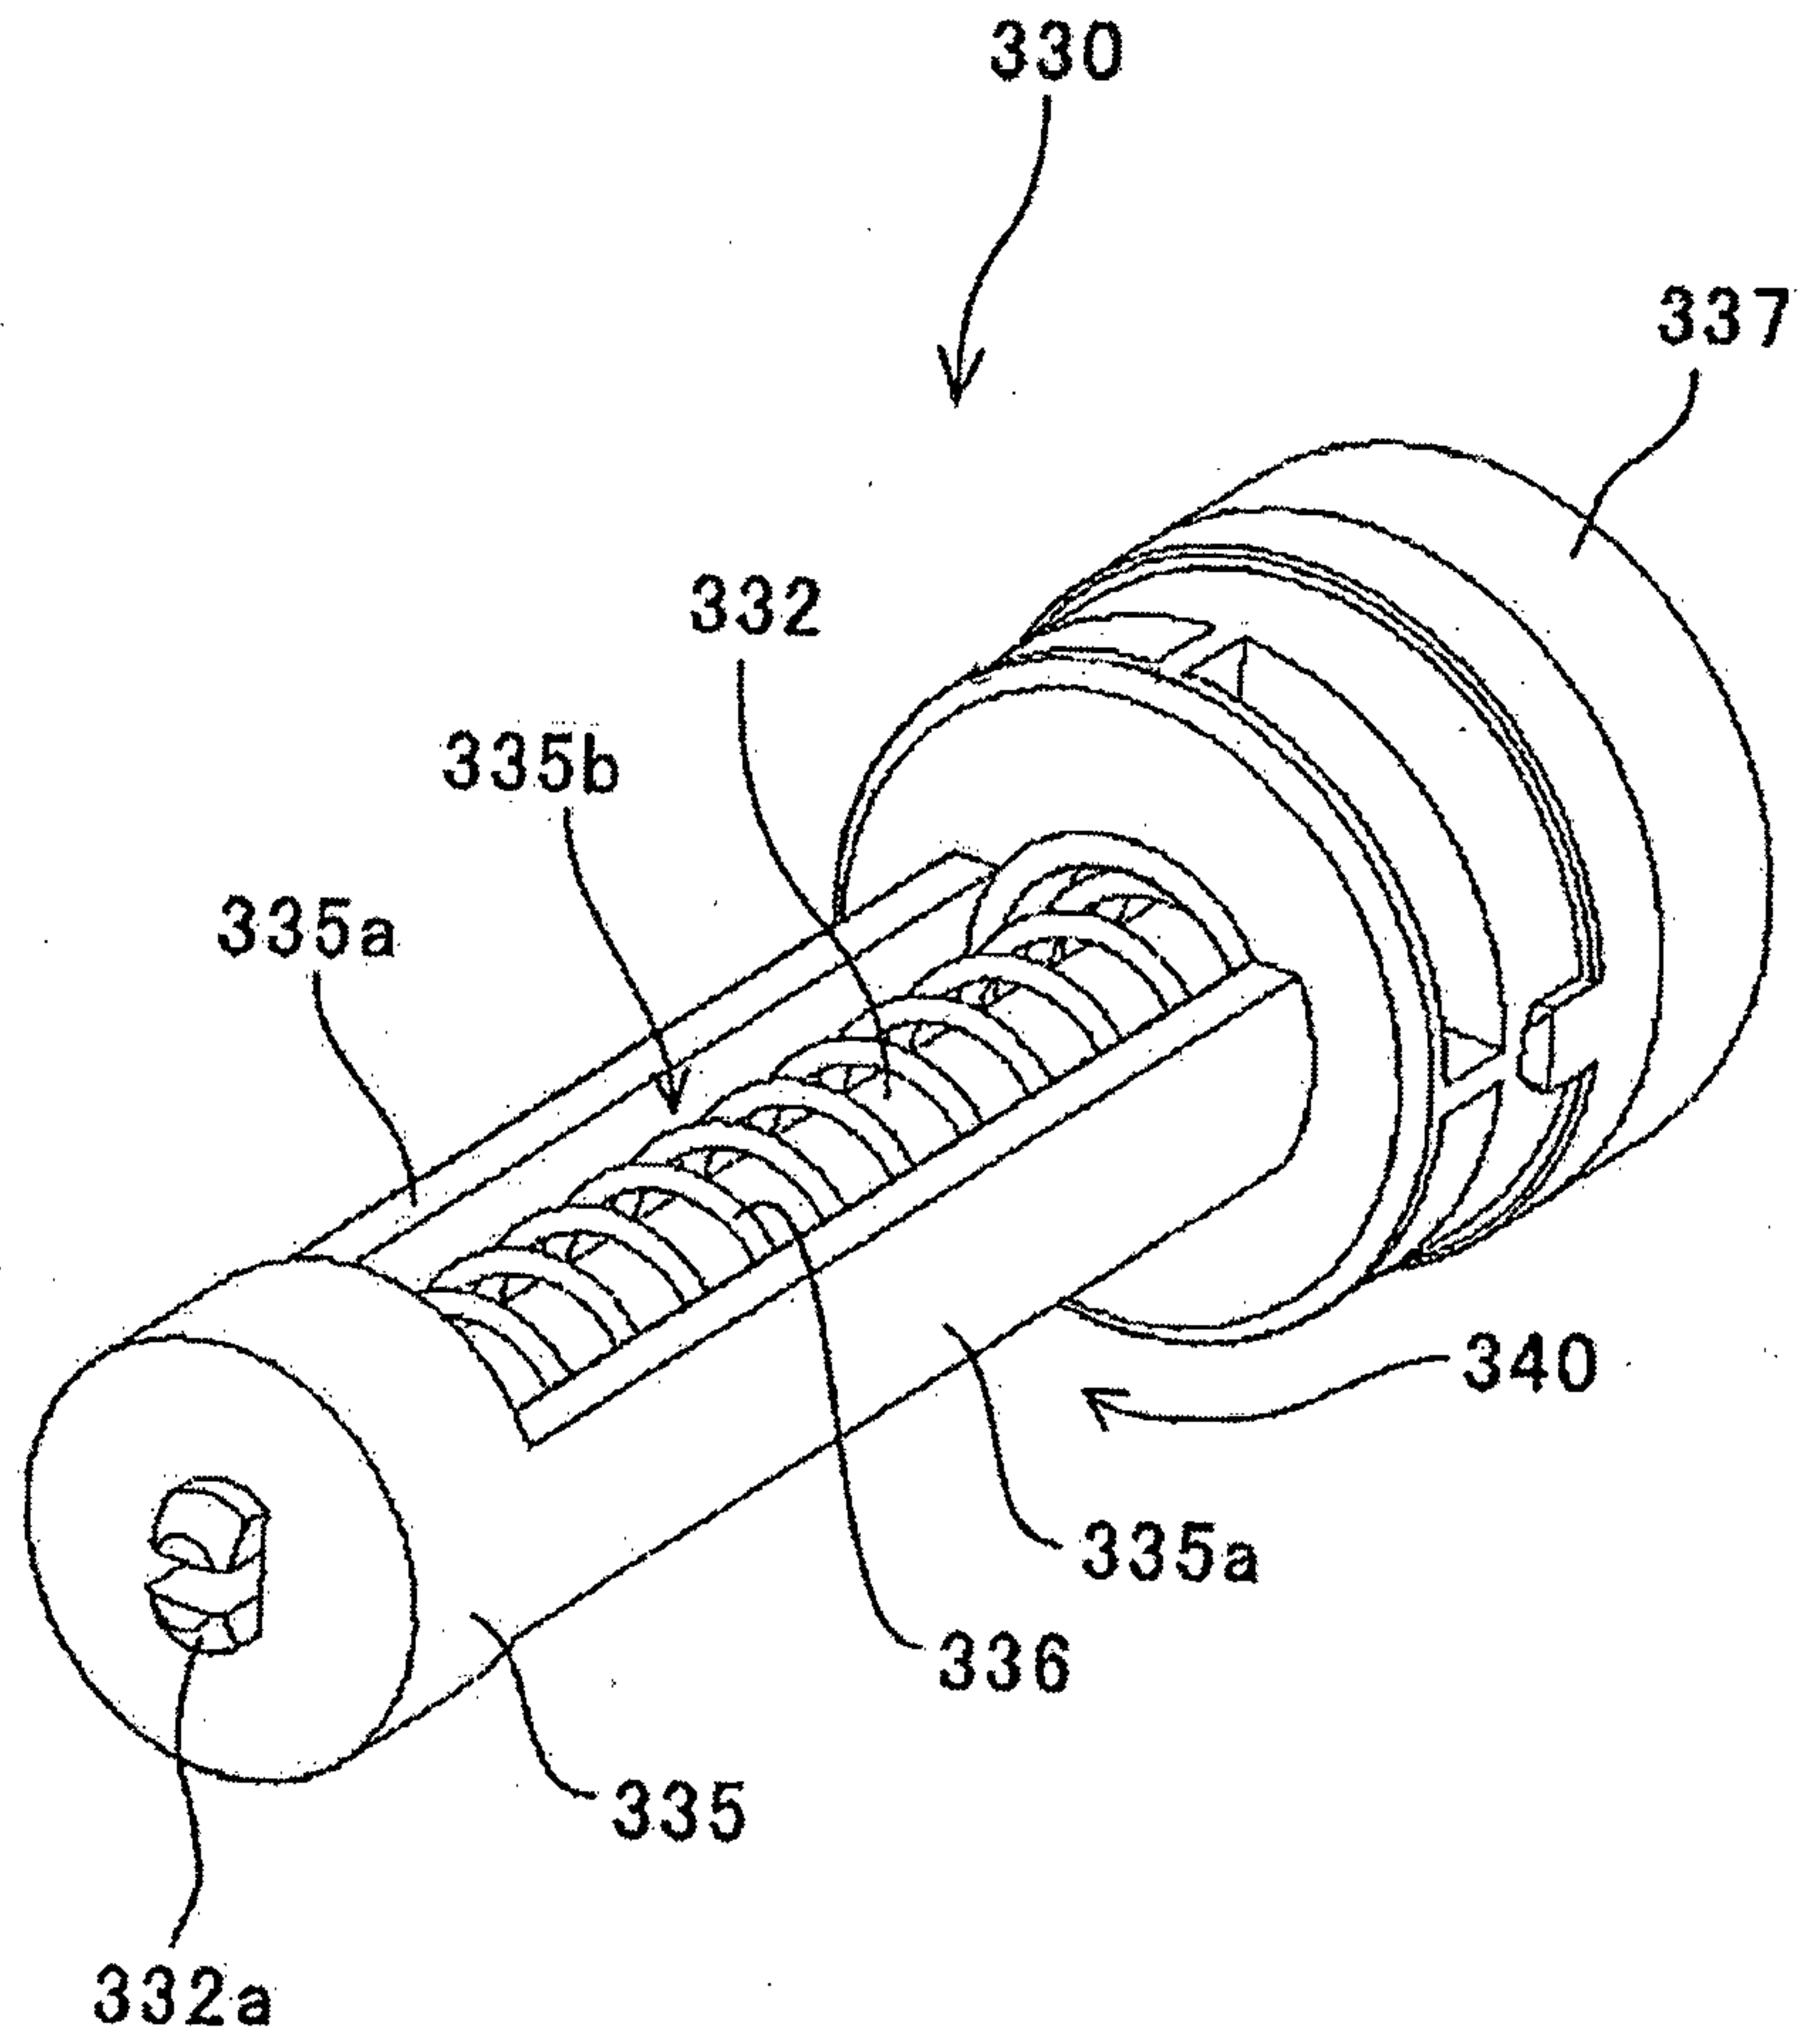


FIG. 16

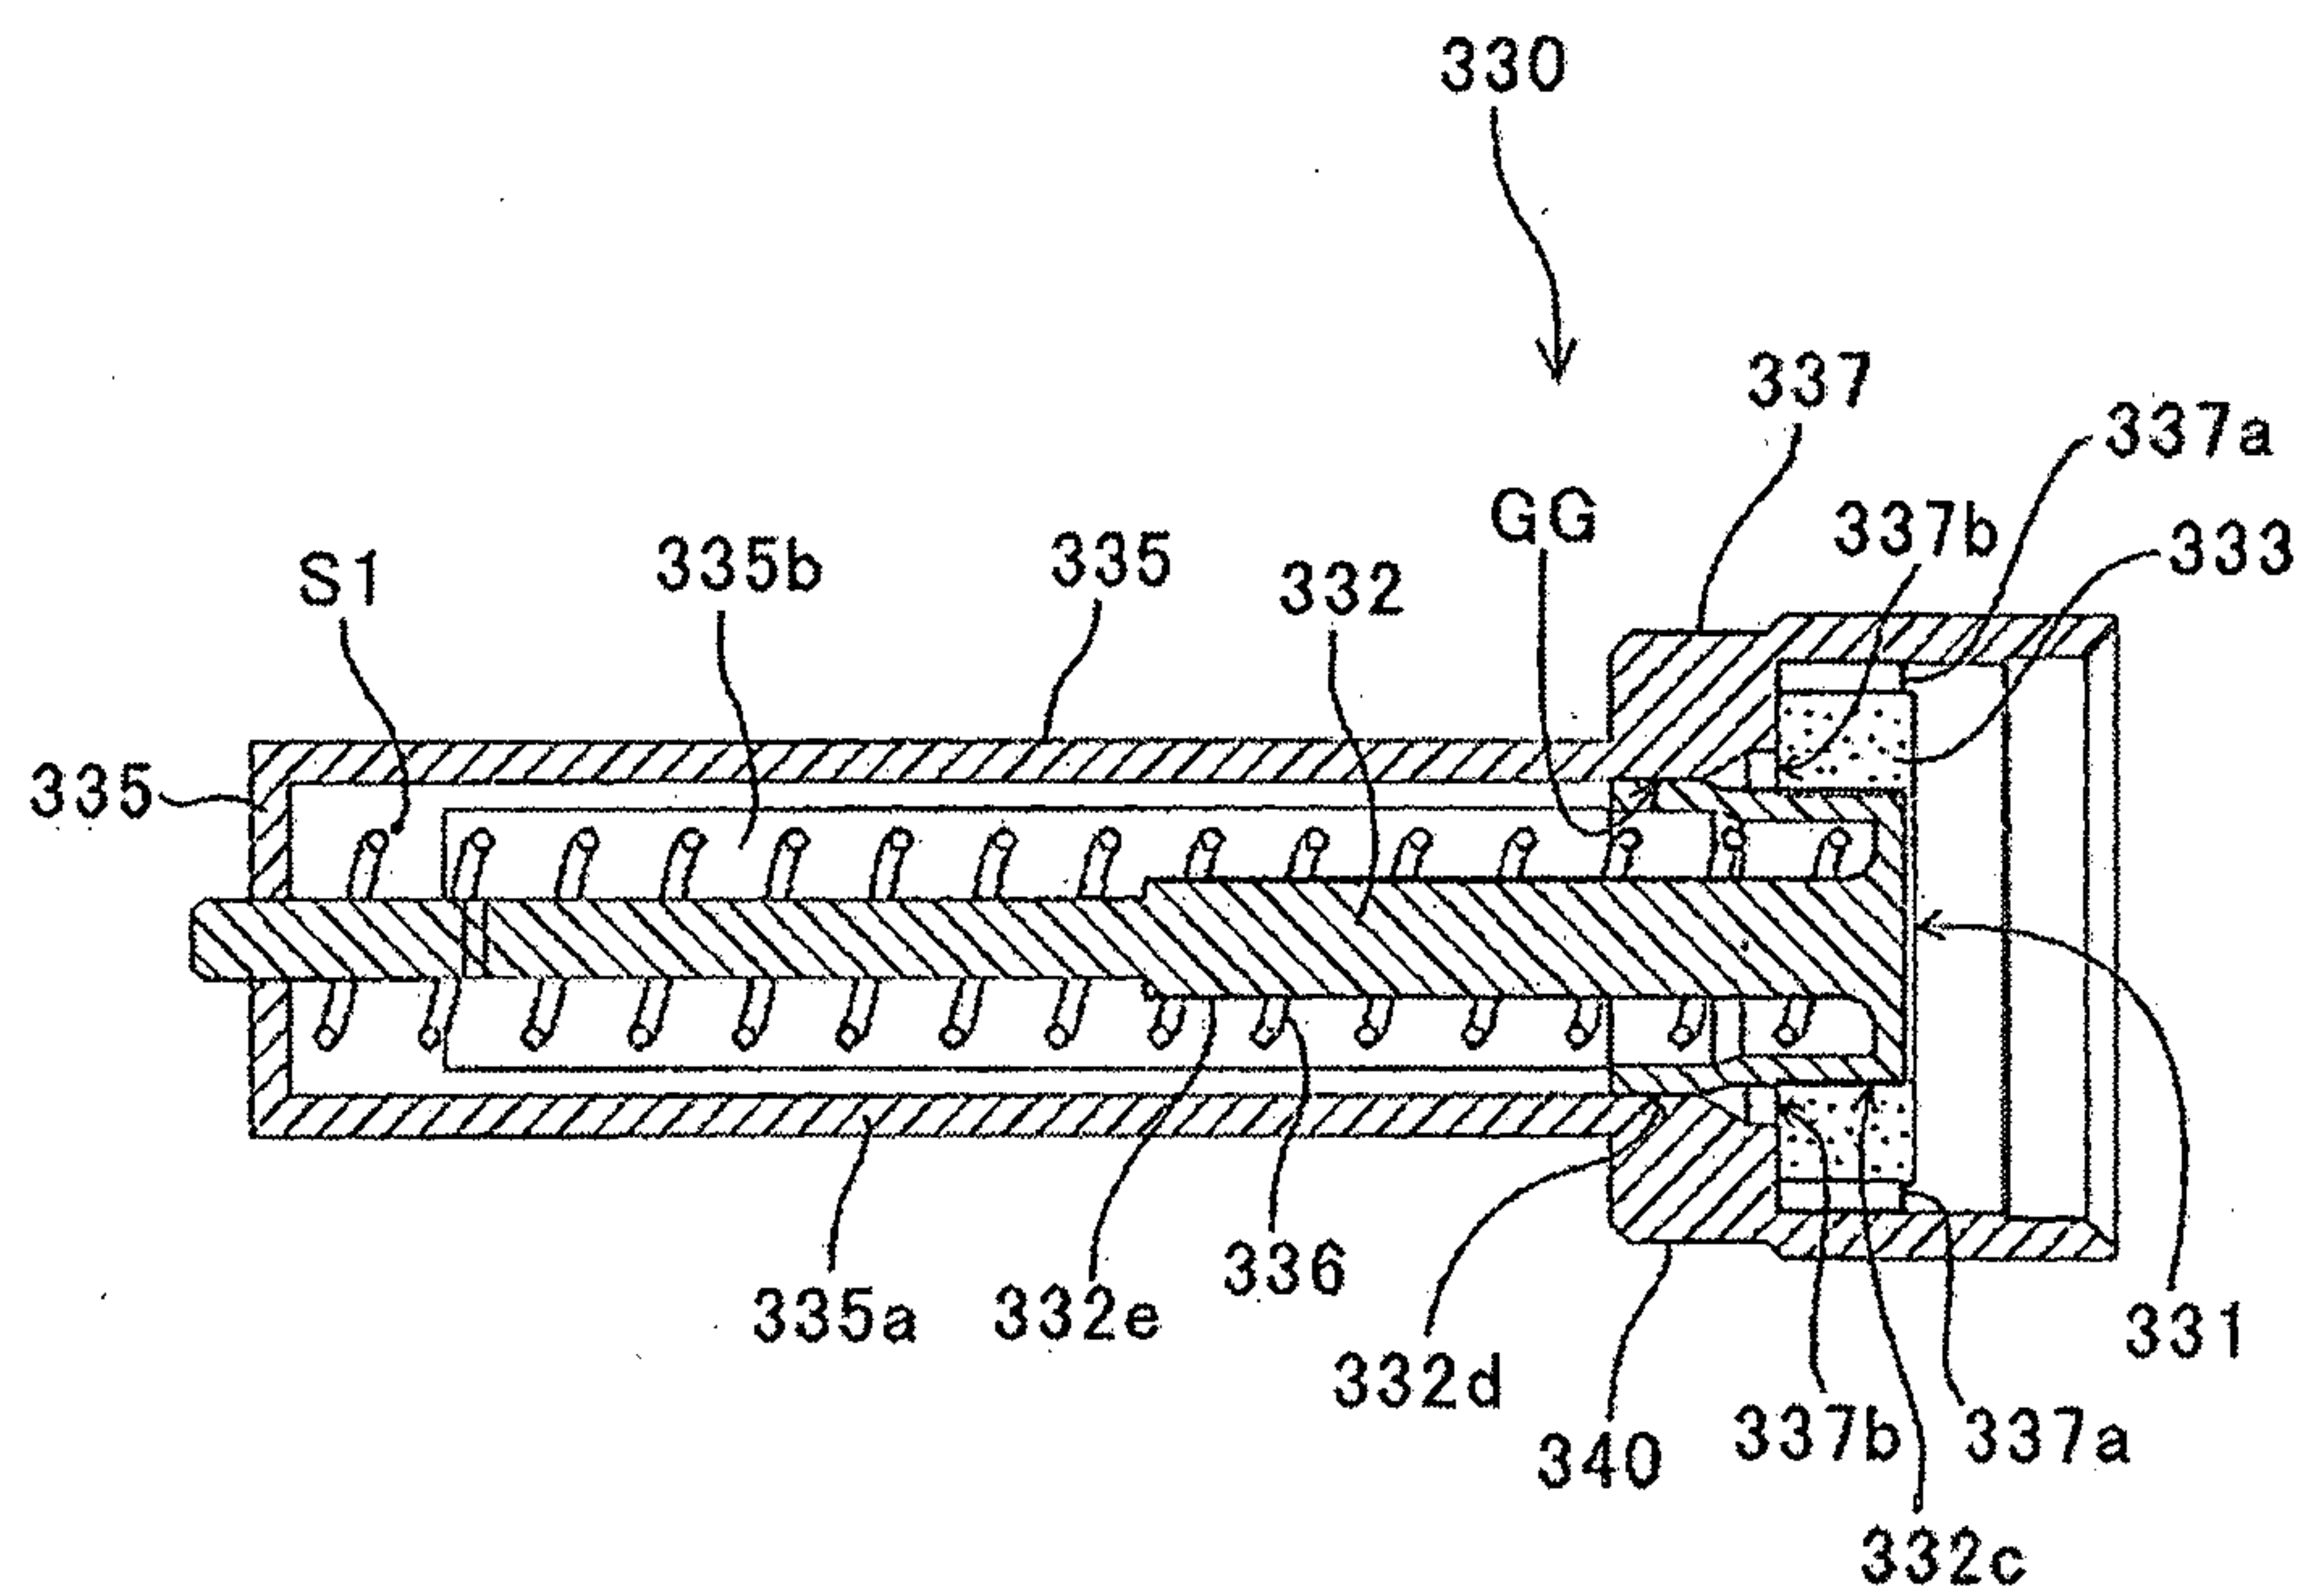

17/66

FIG.17


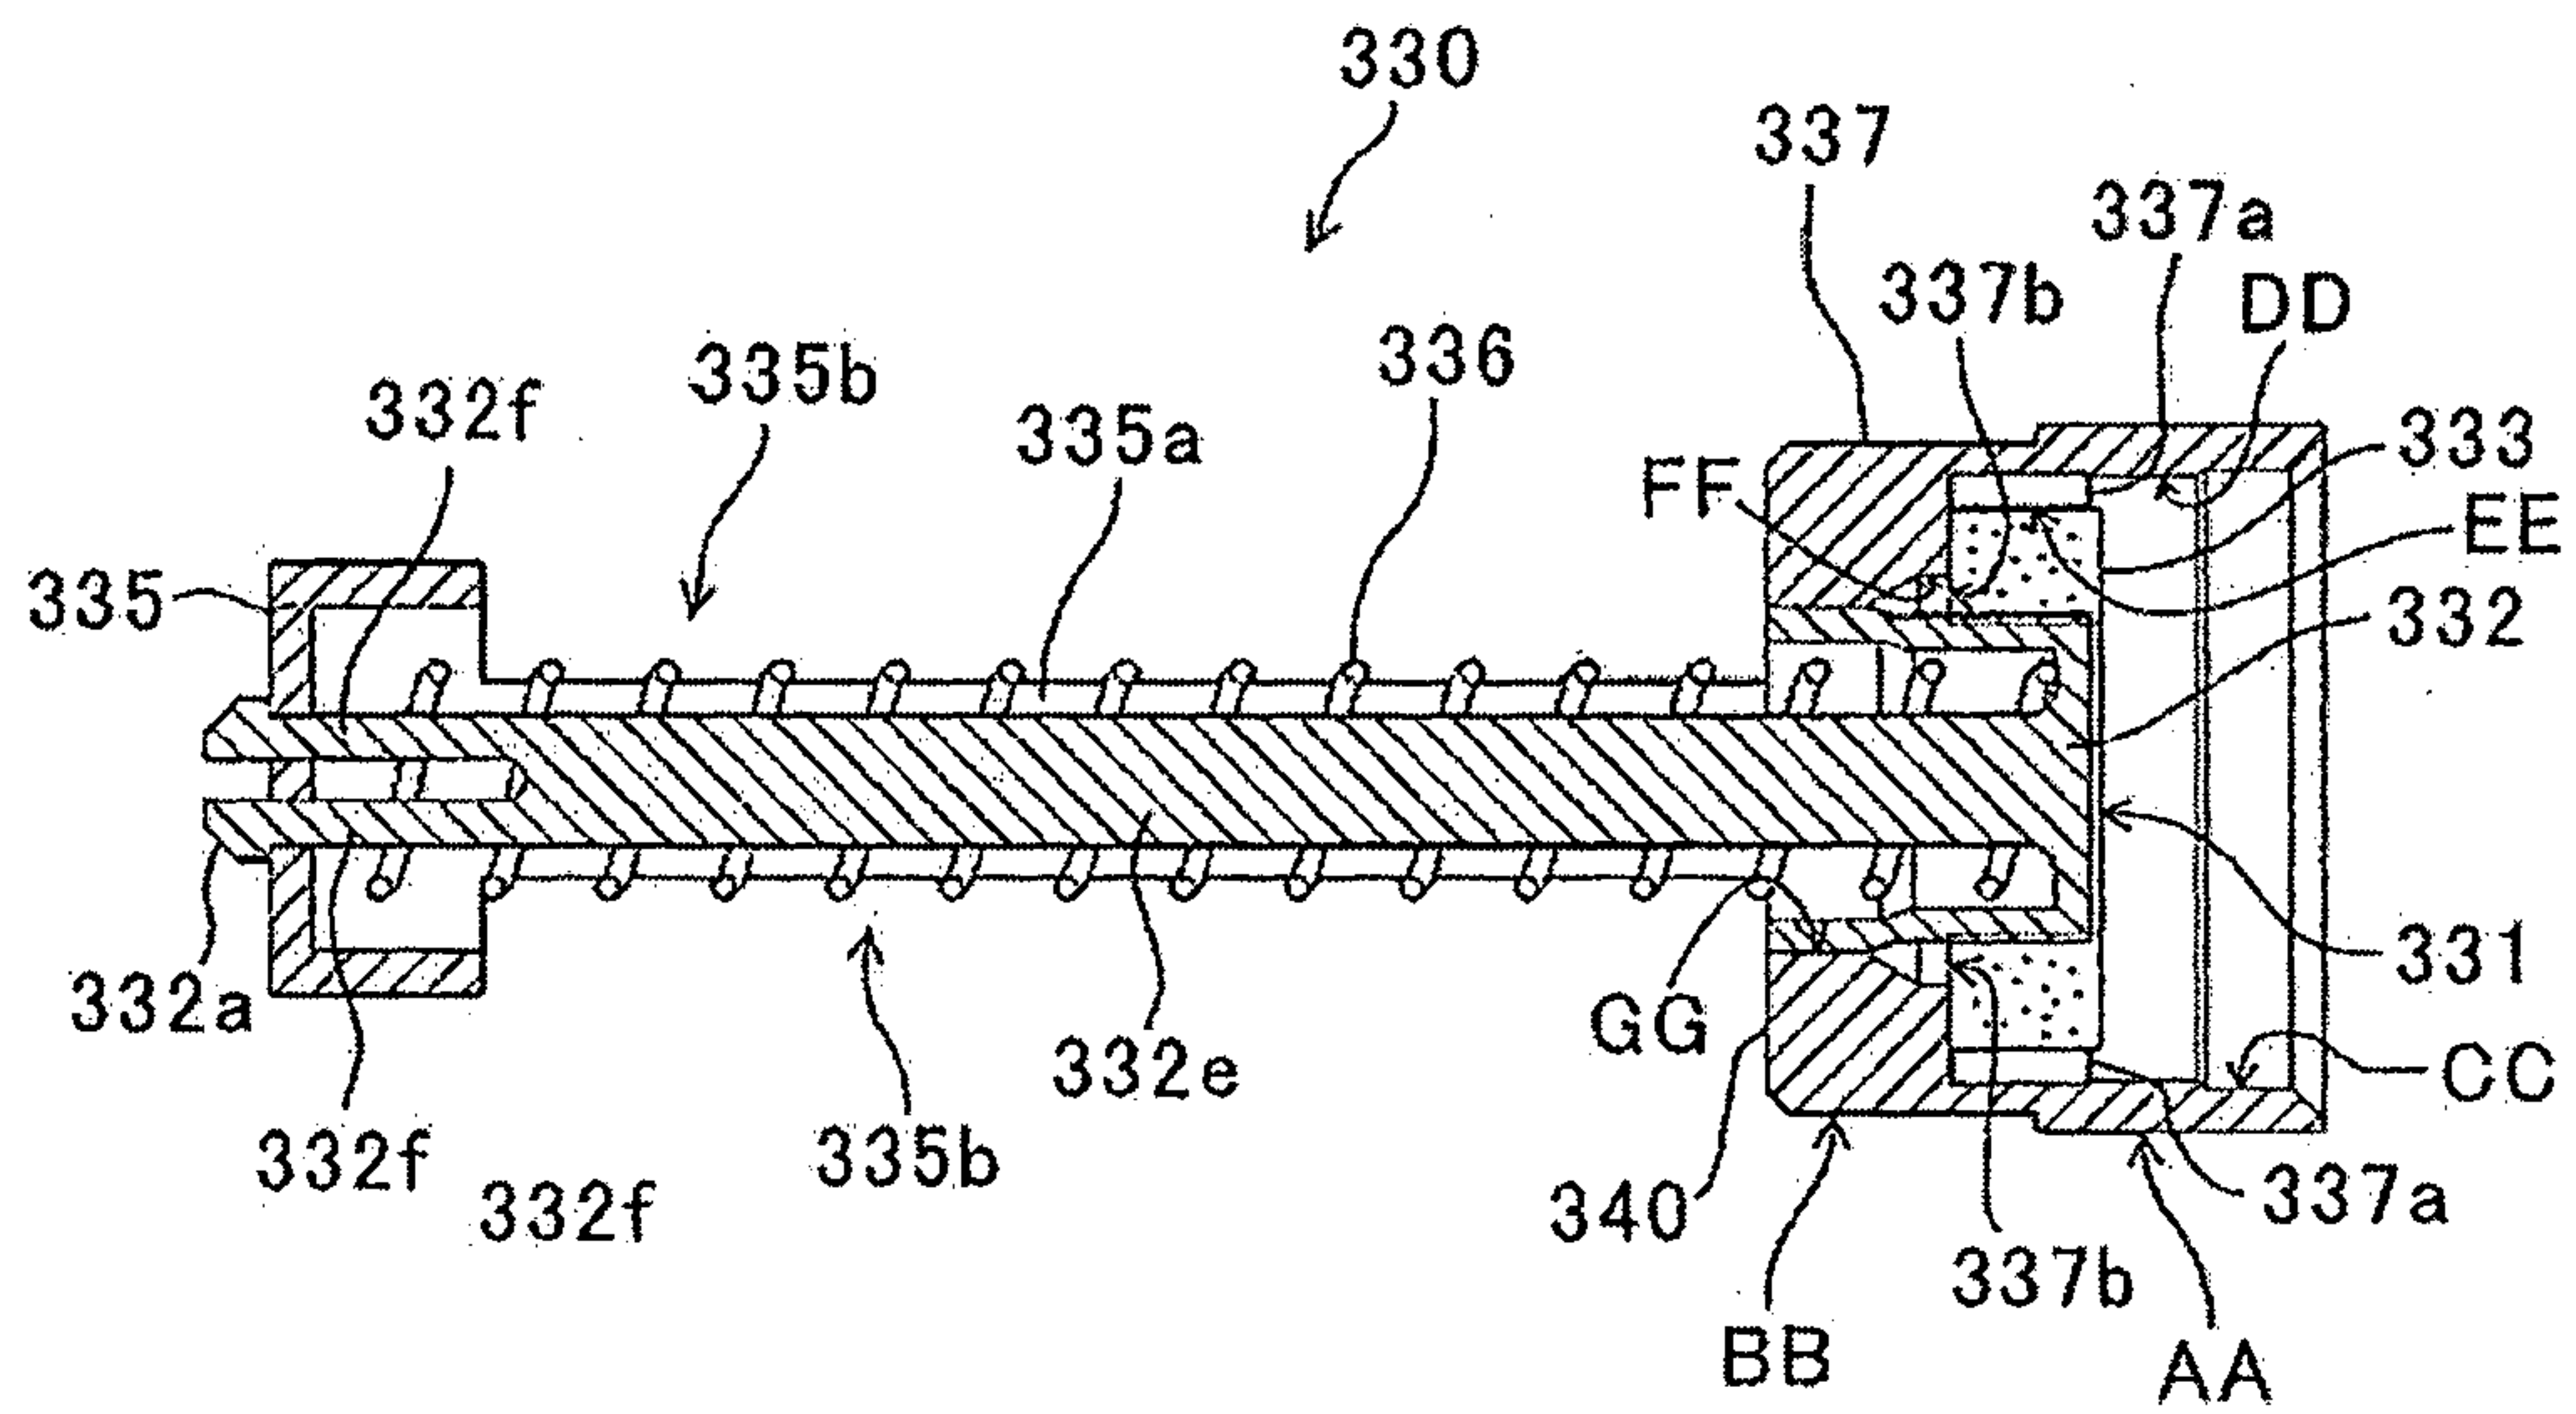


FIG.18

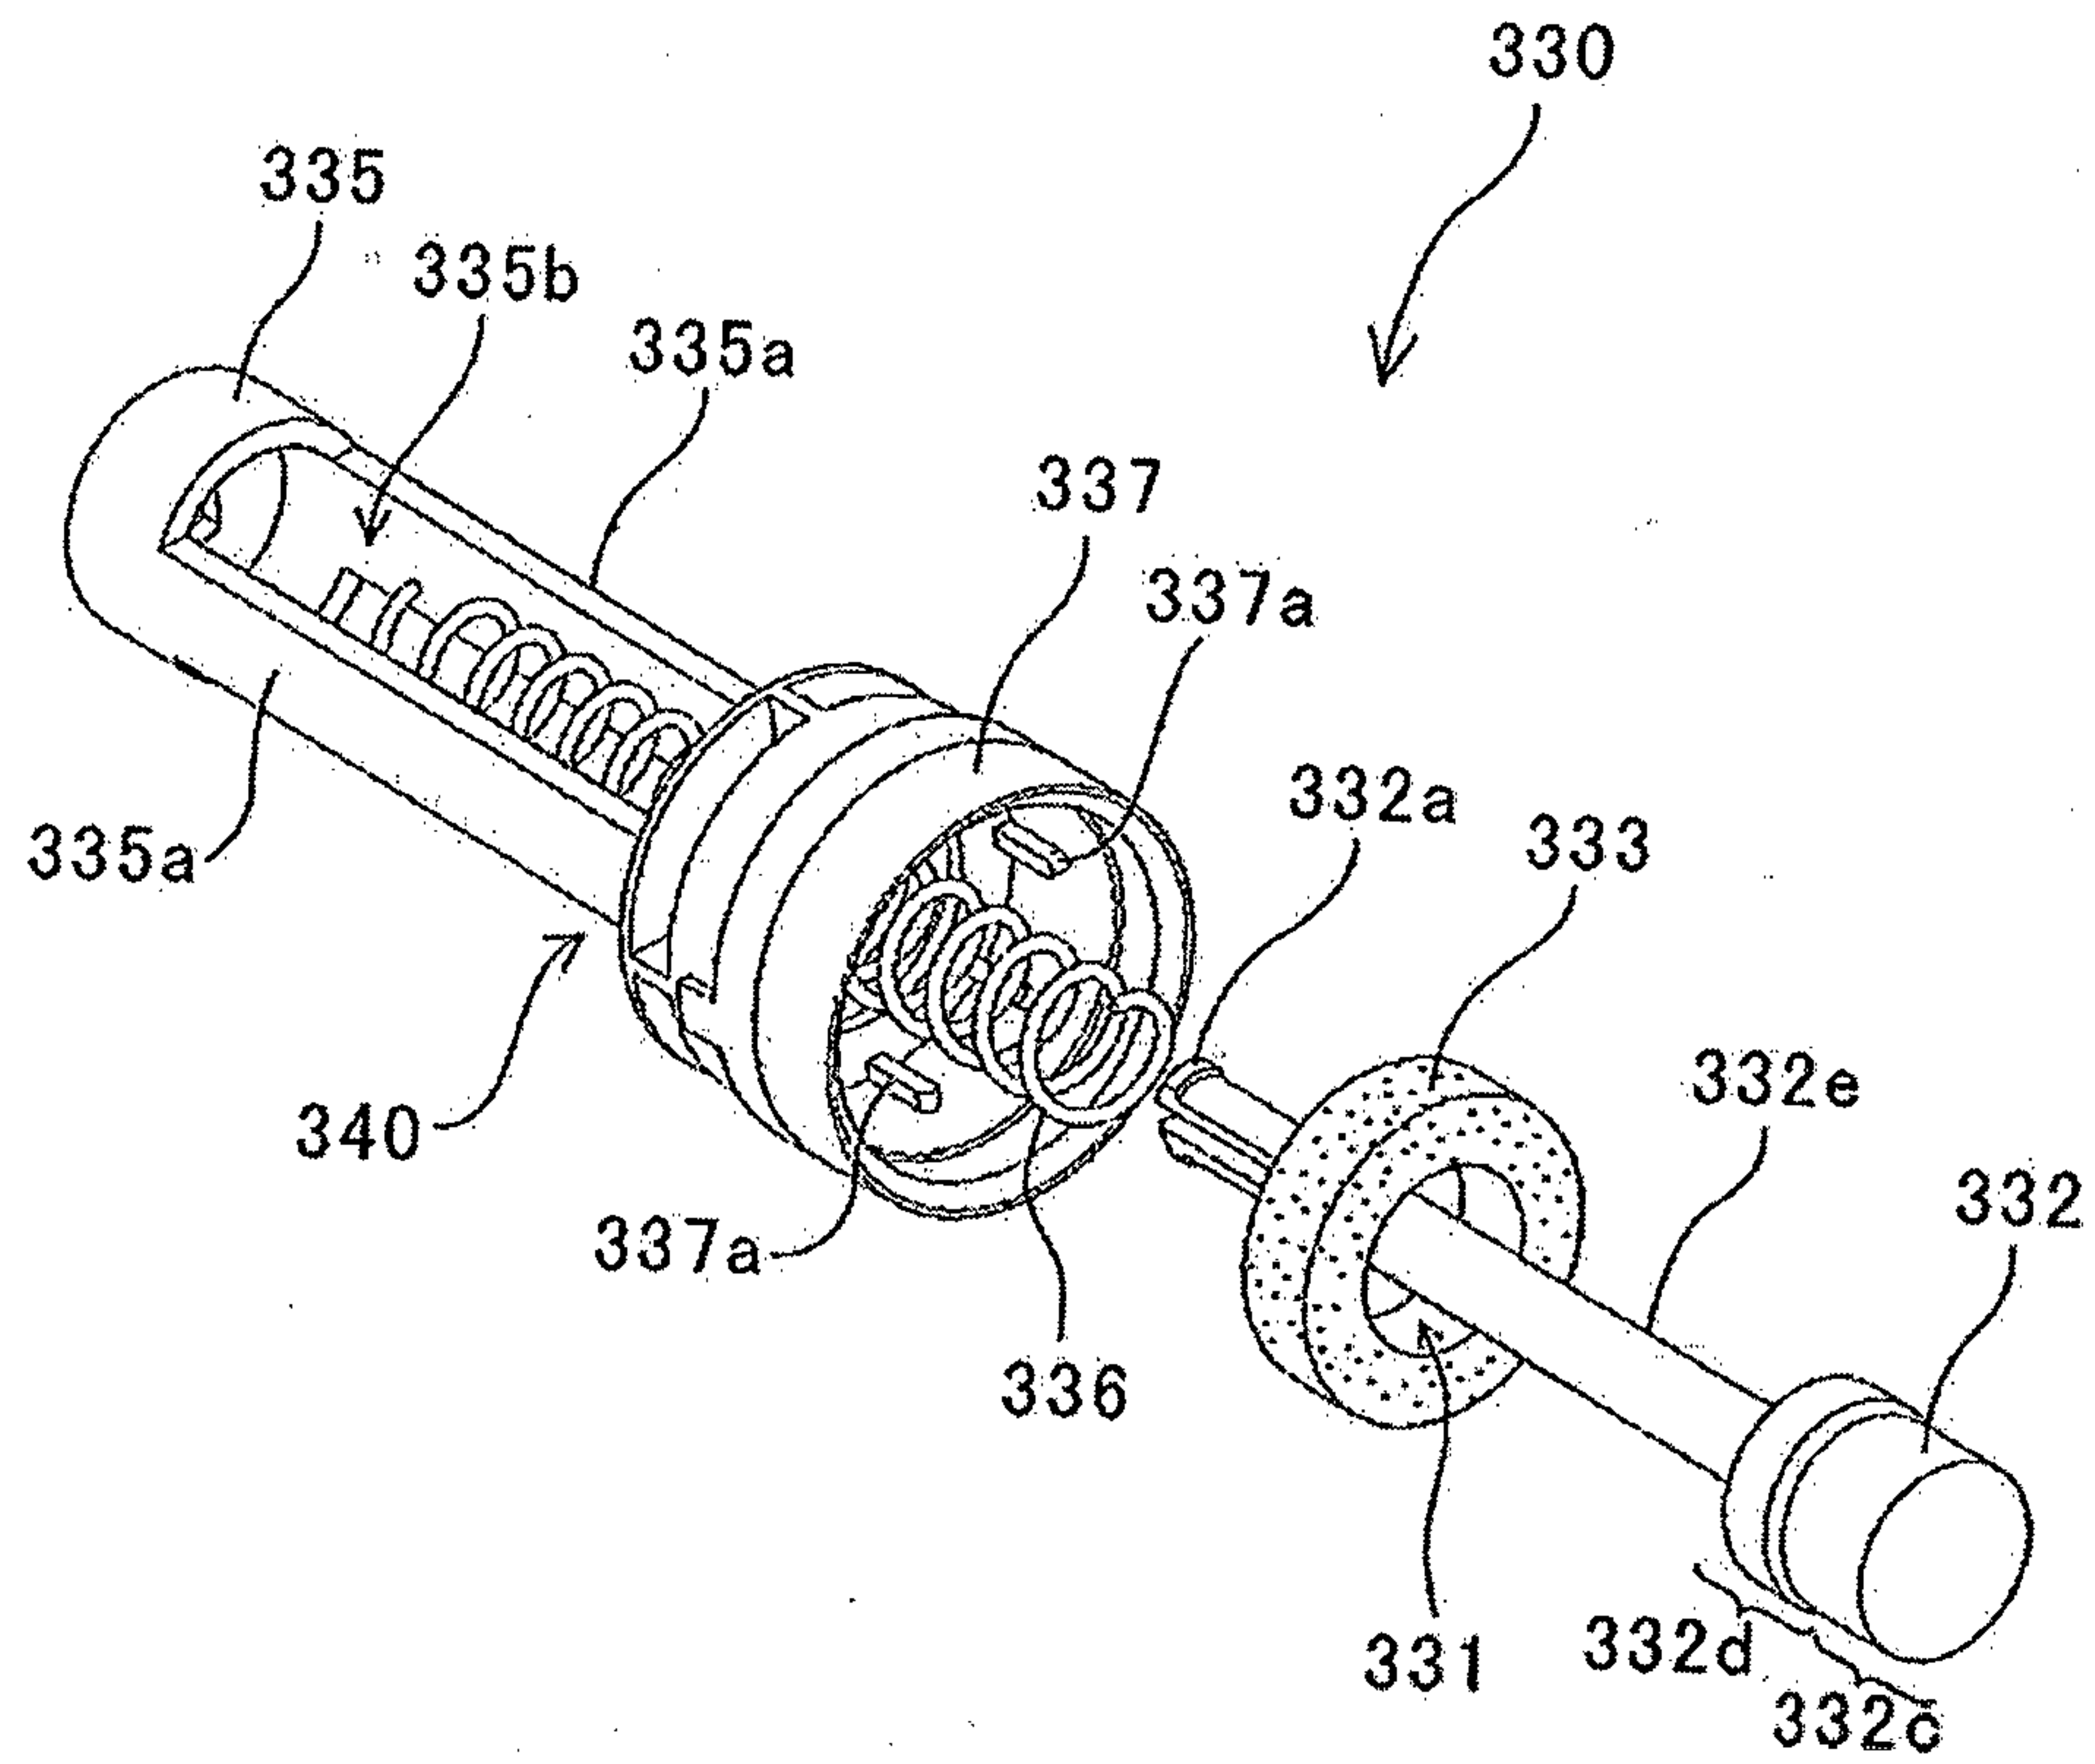

19/66

FIG.19


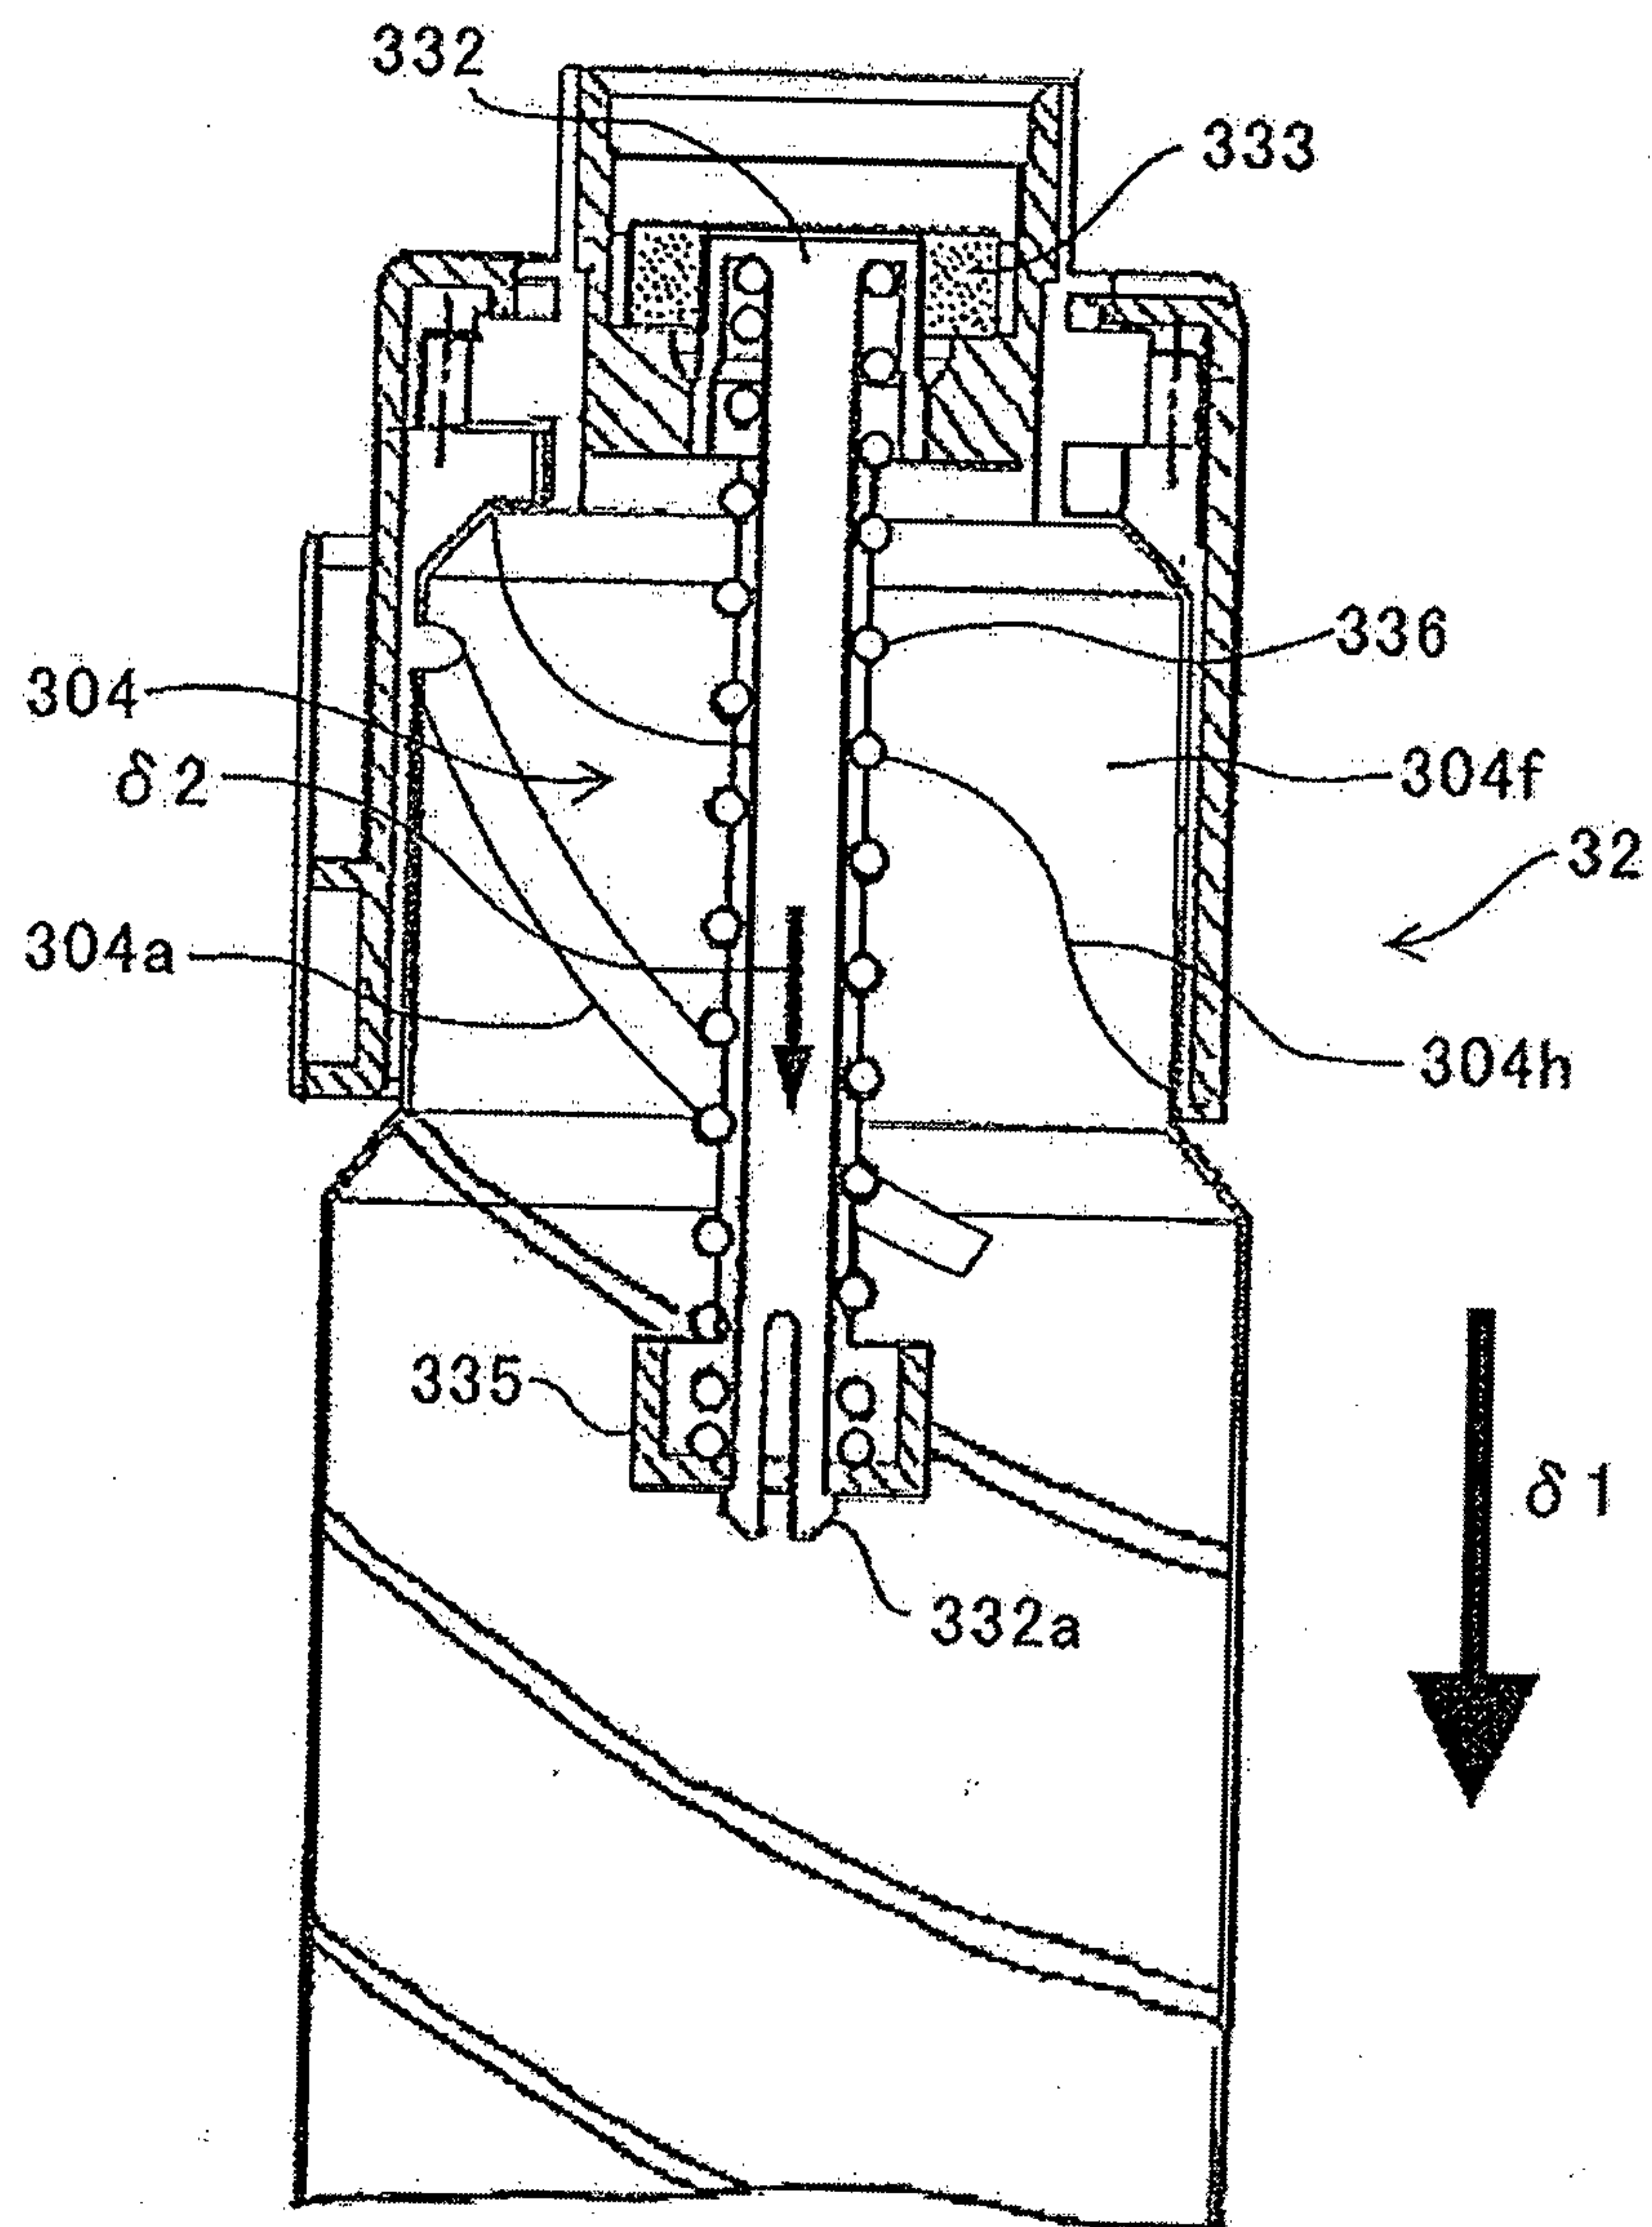


FIG.20

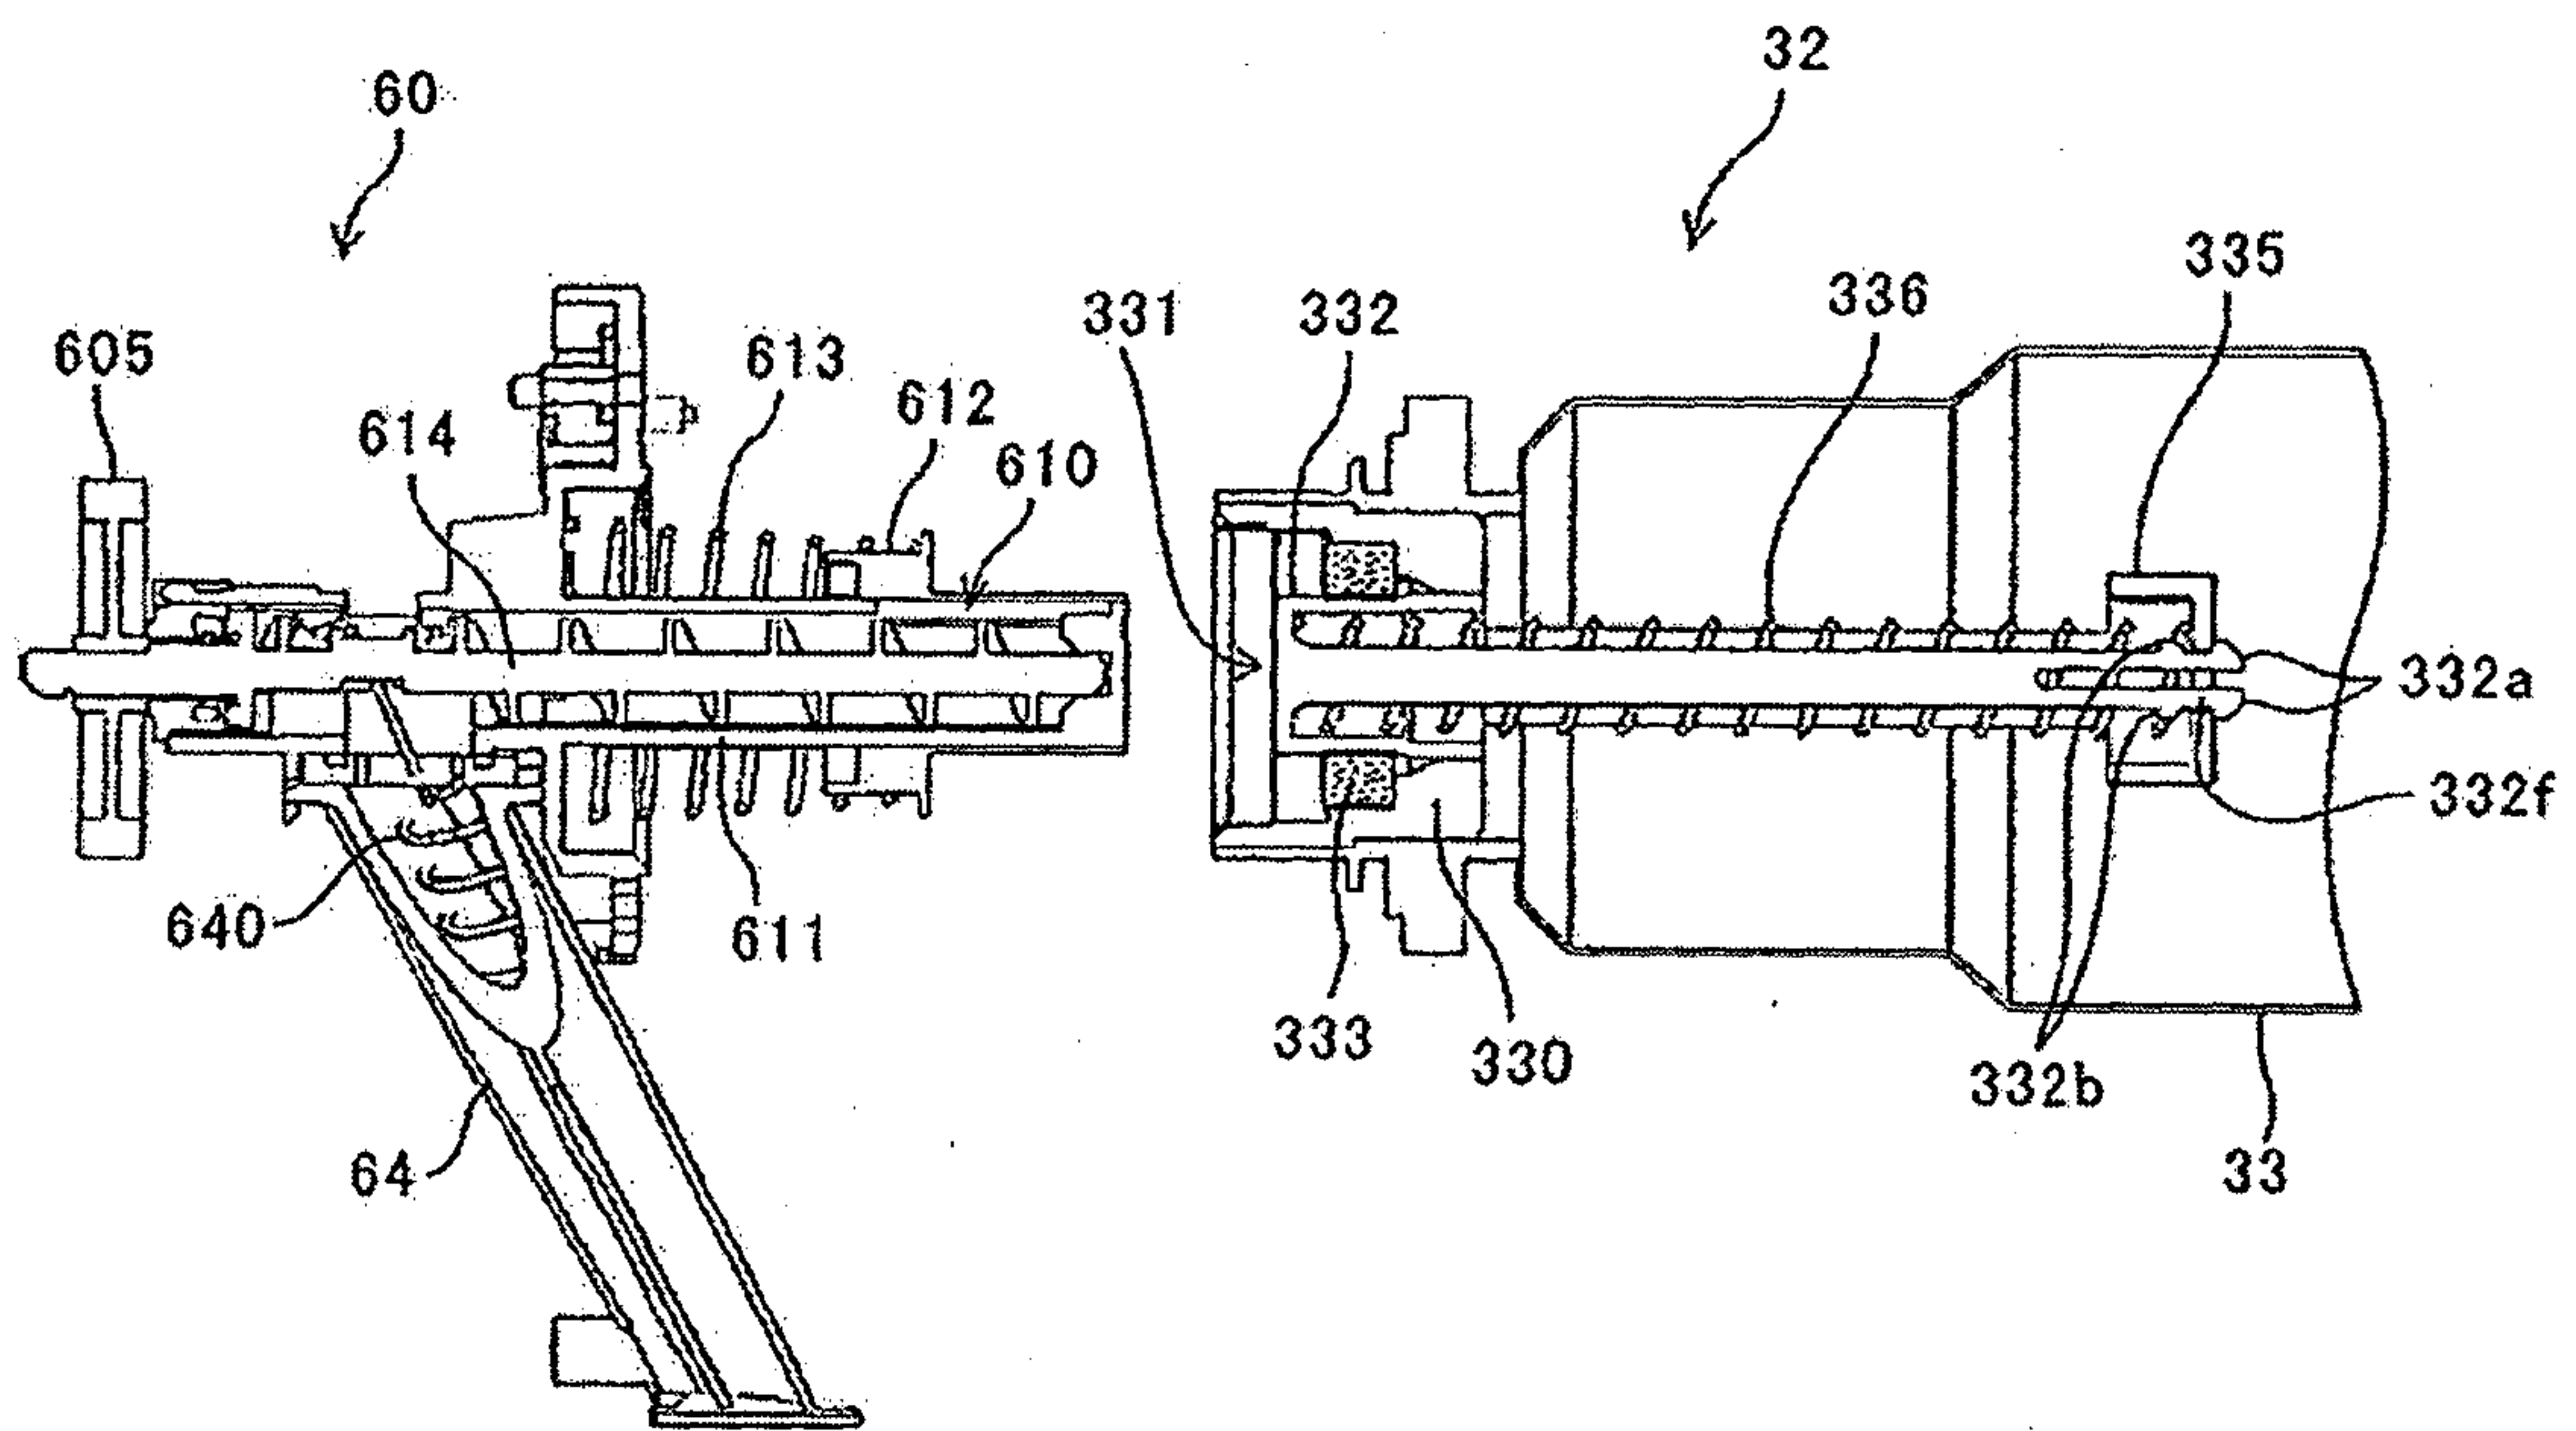

21/66

FIG.21



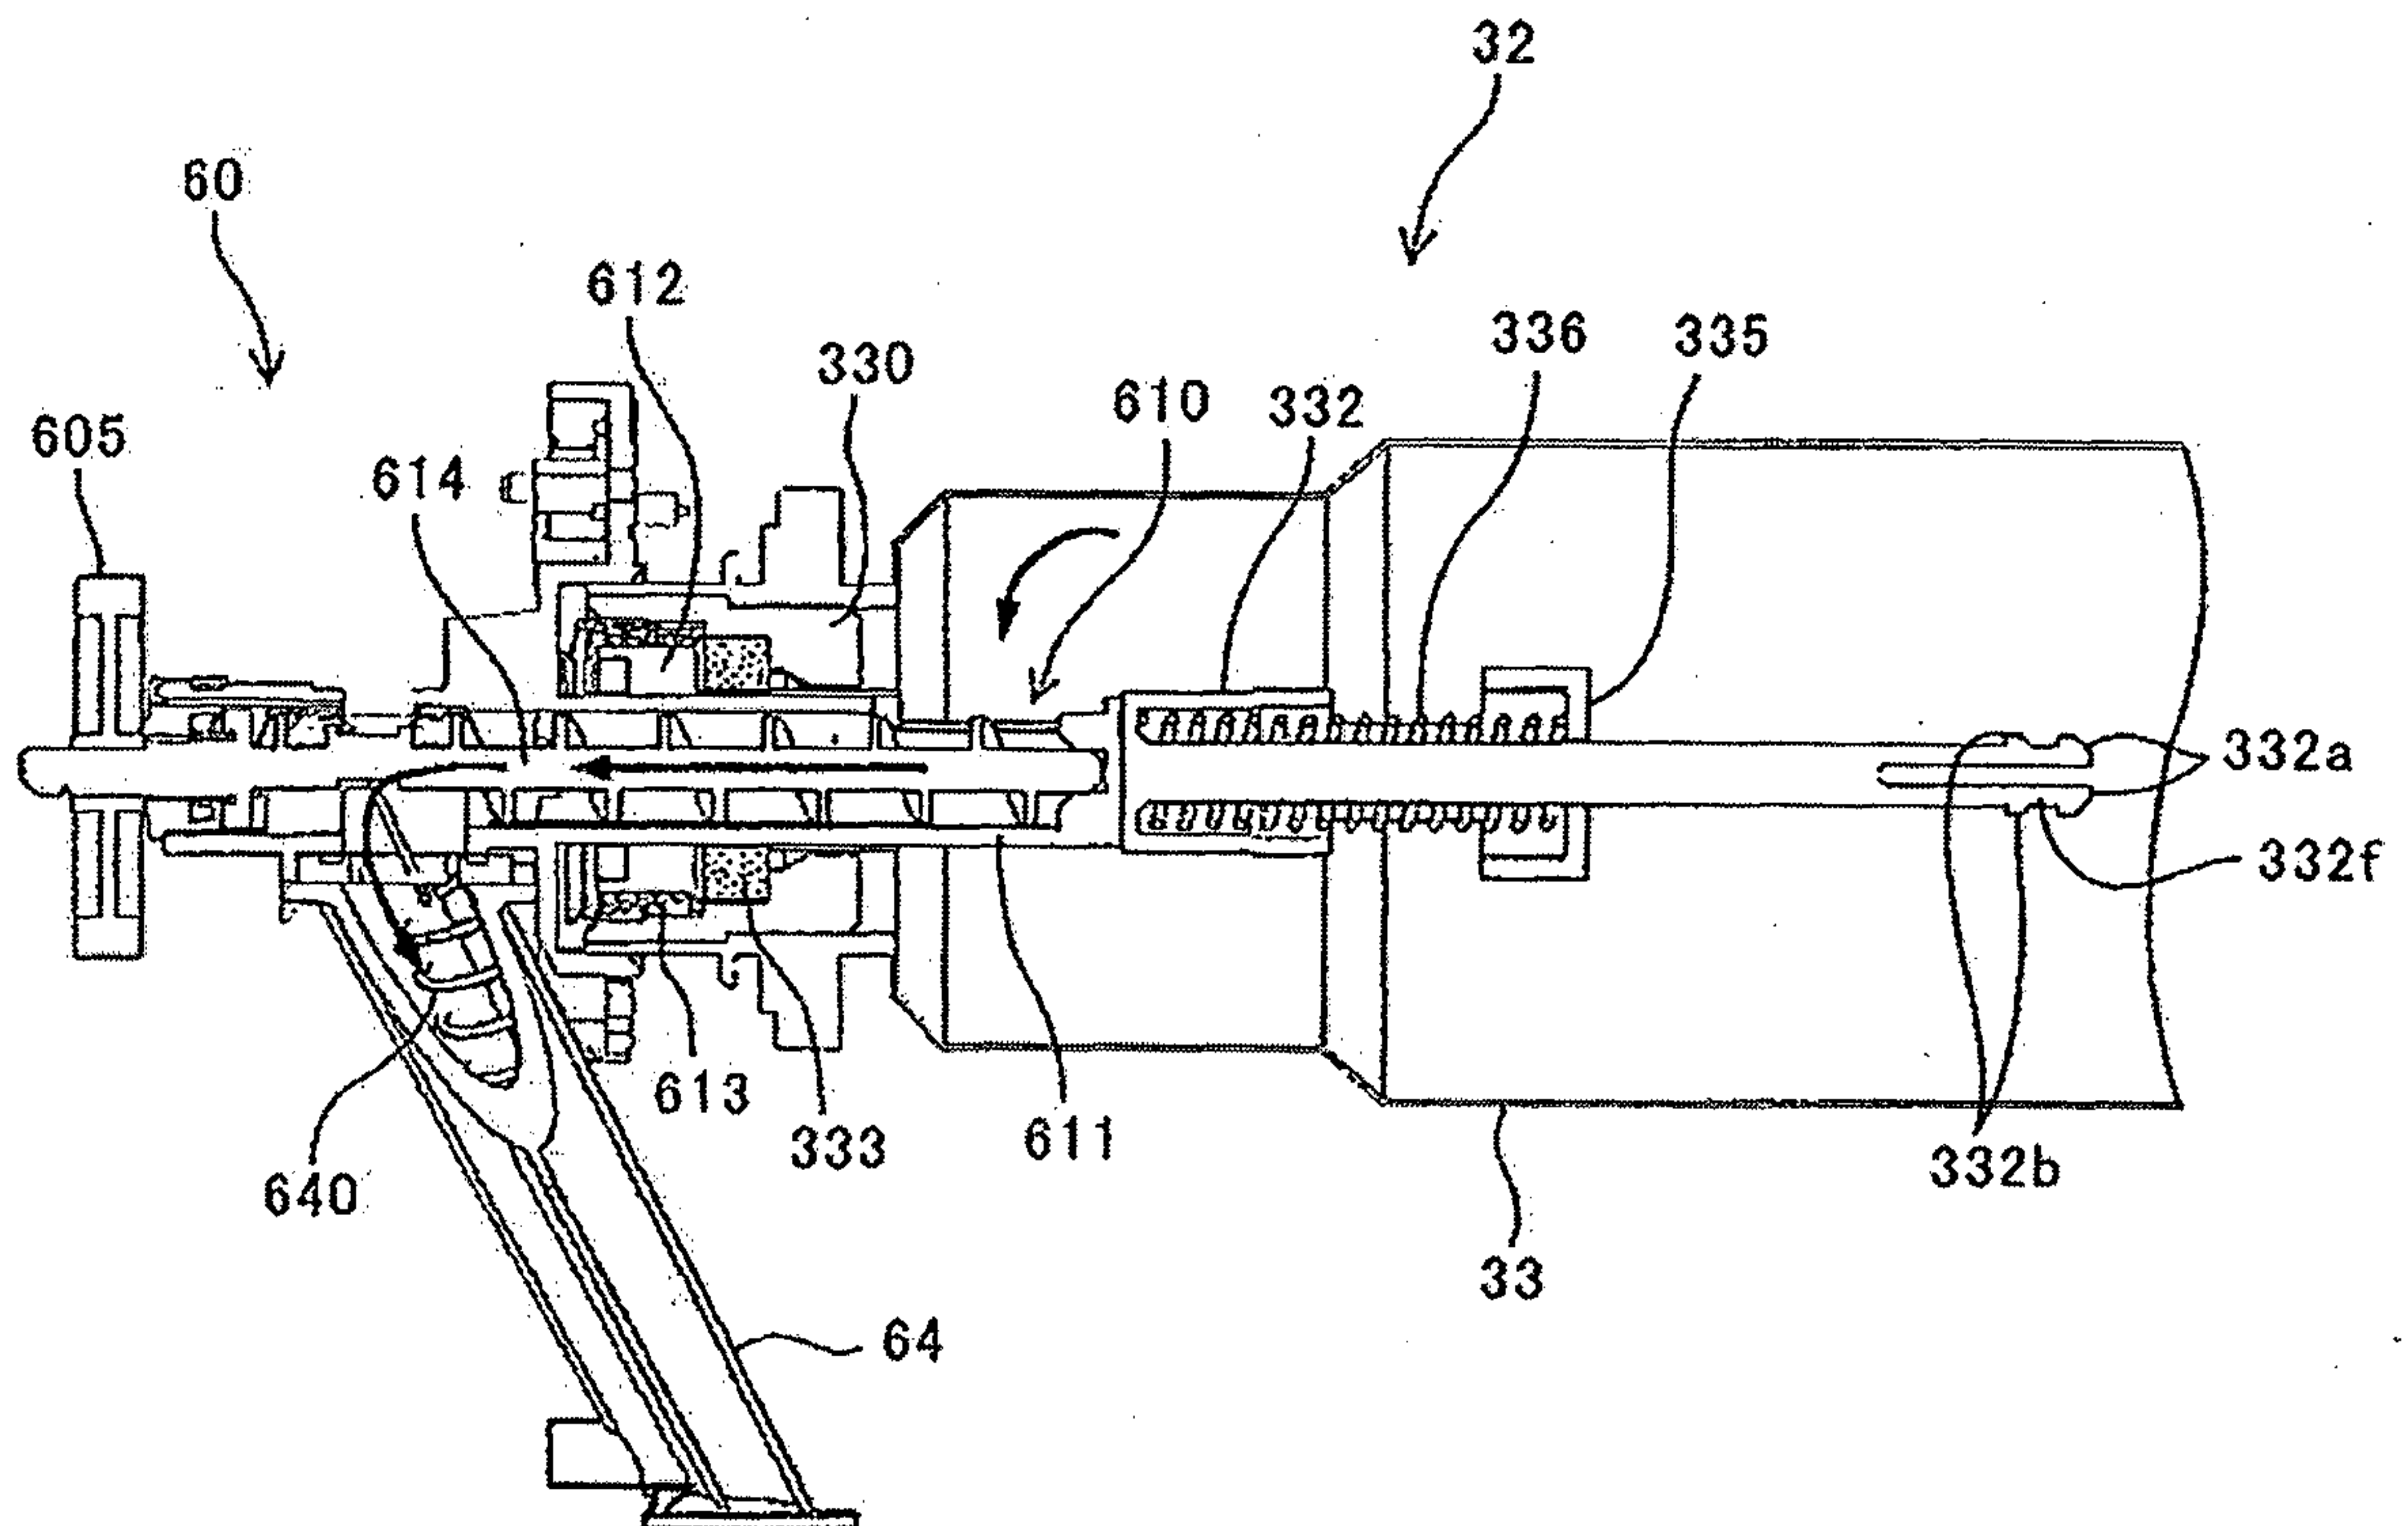


FIG.22

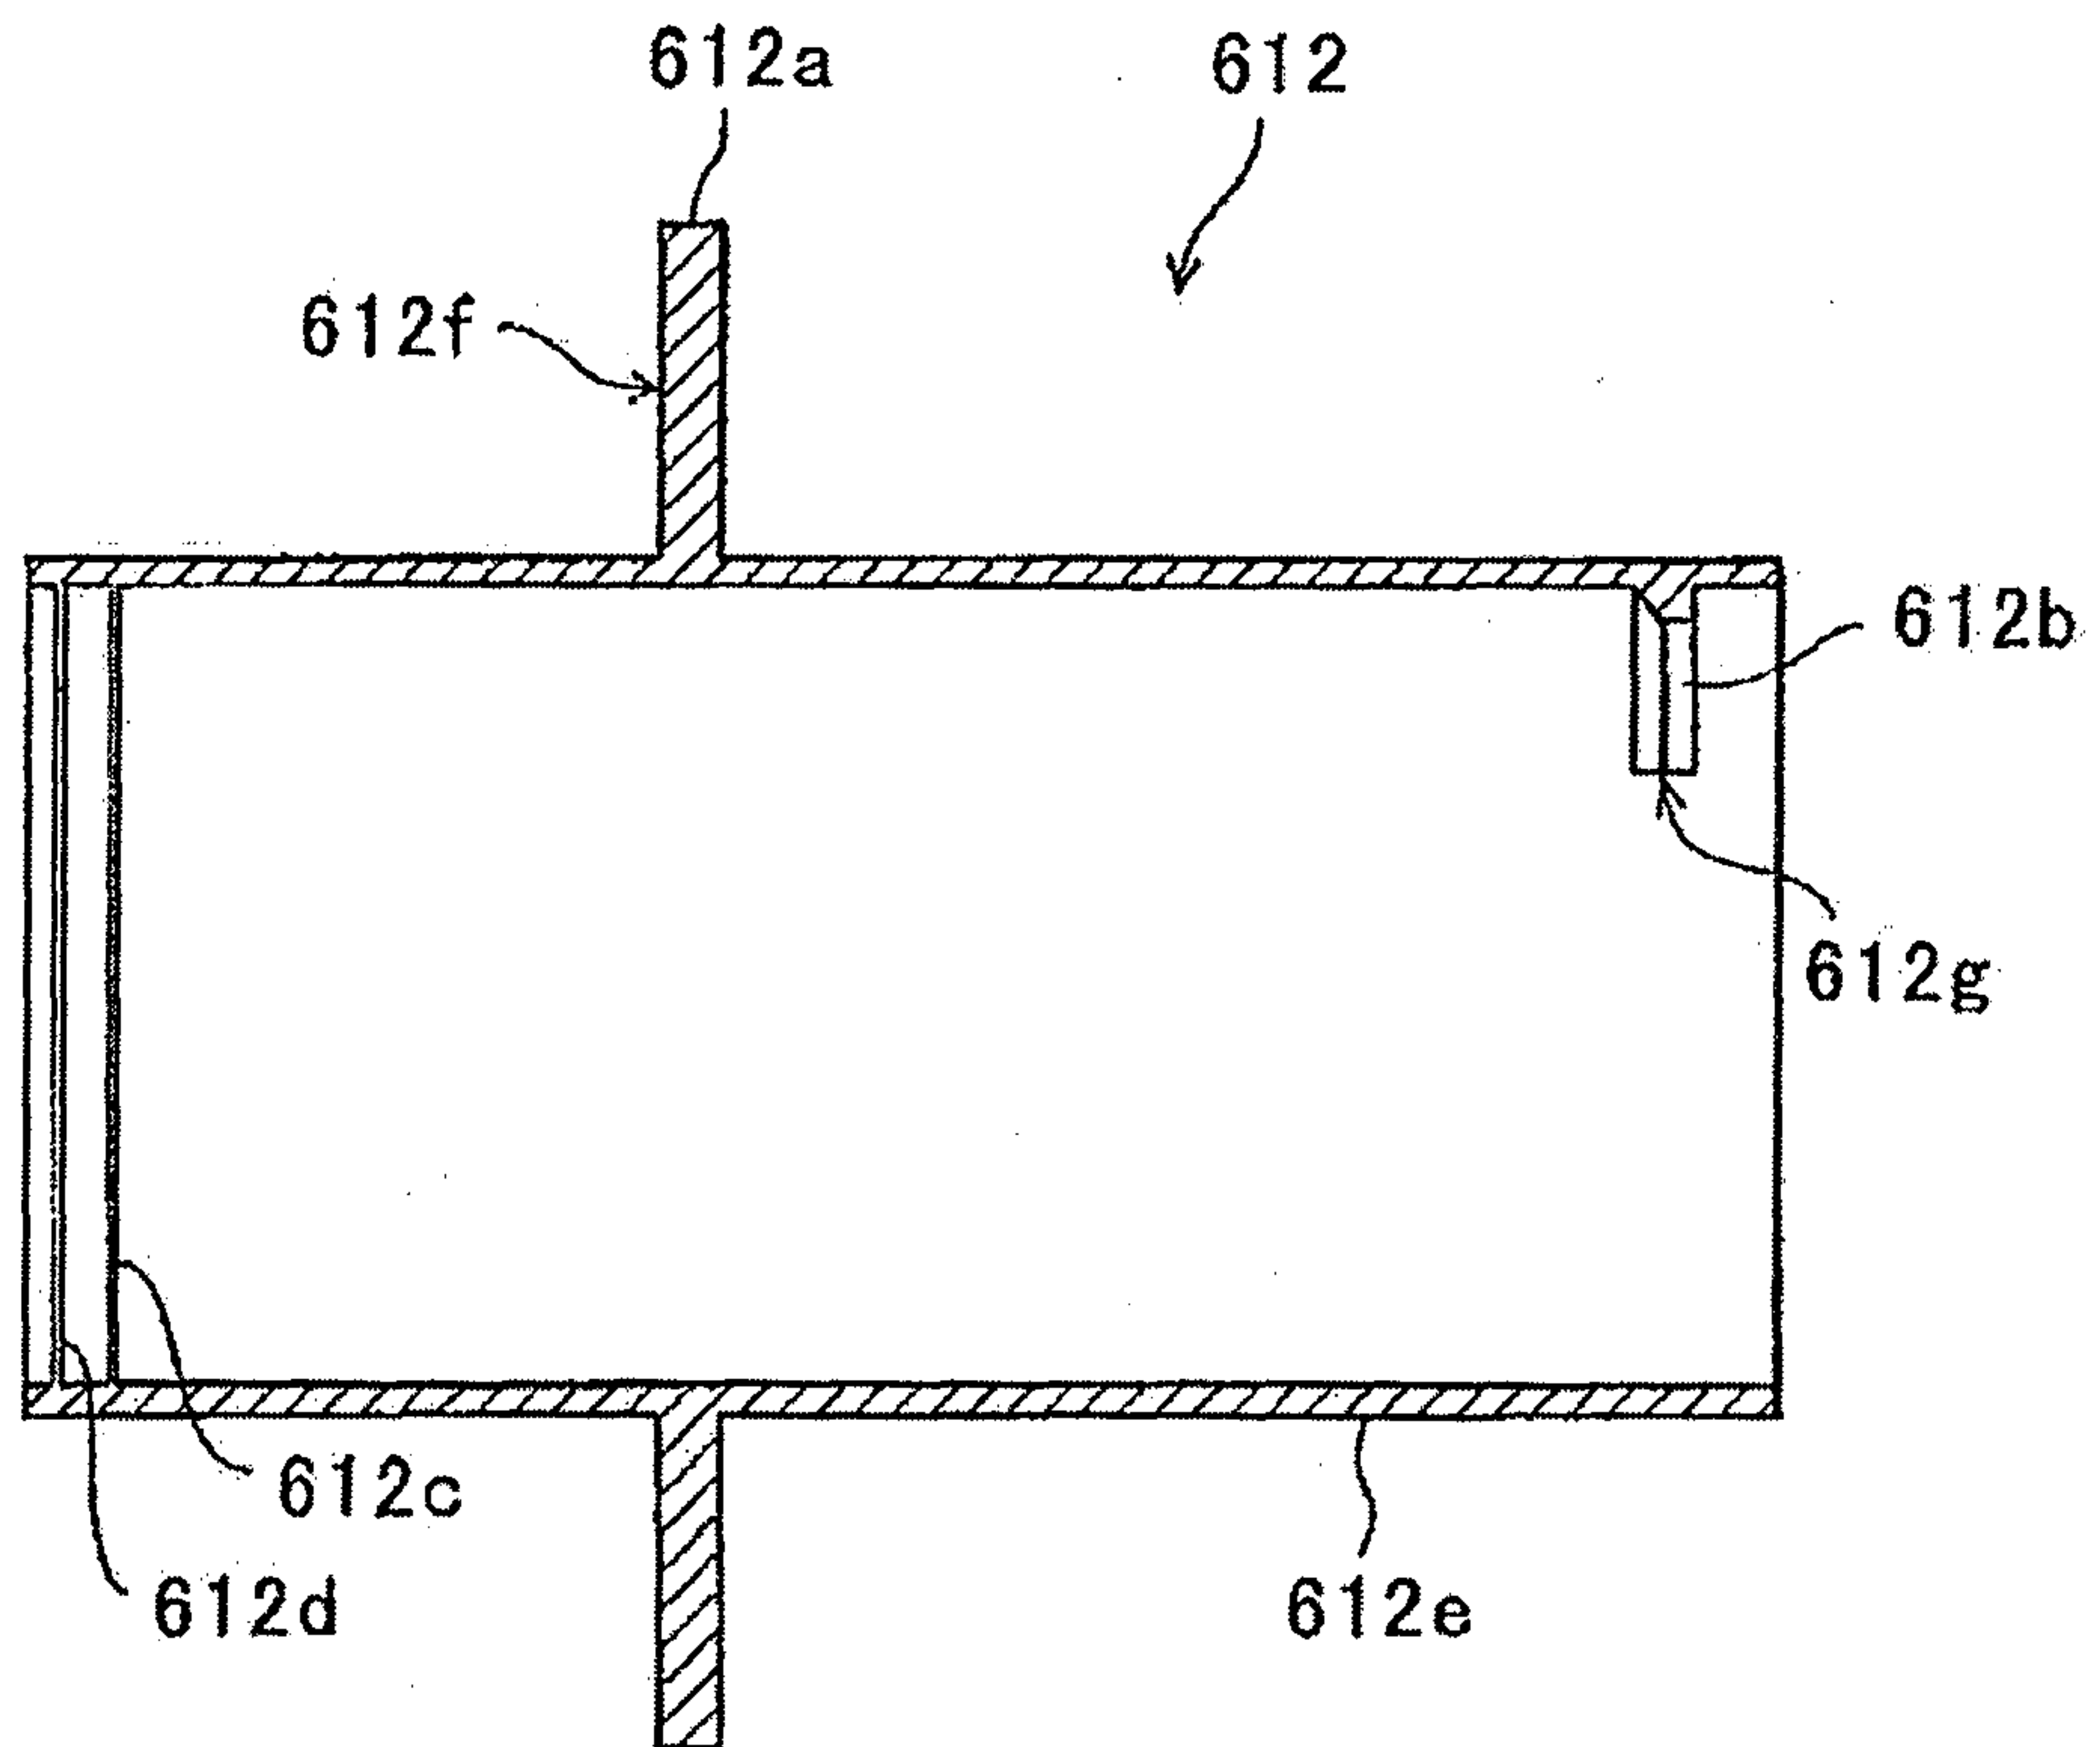


23/66

FIG.23

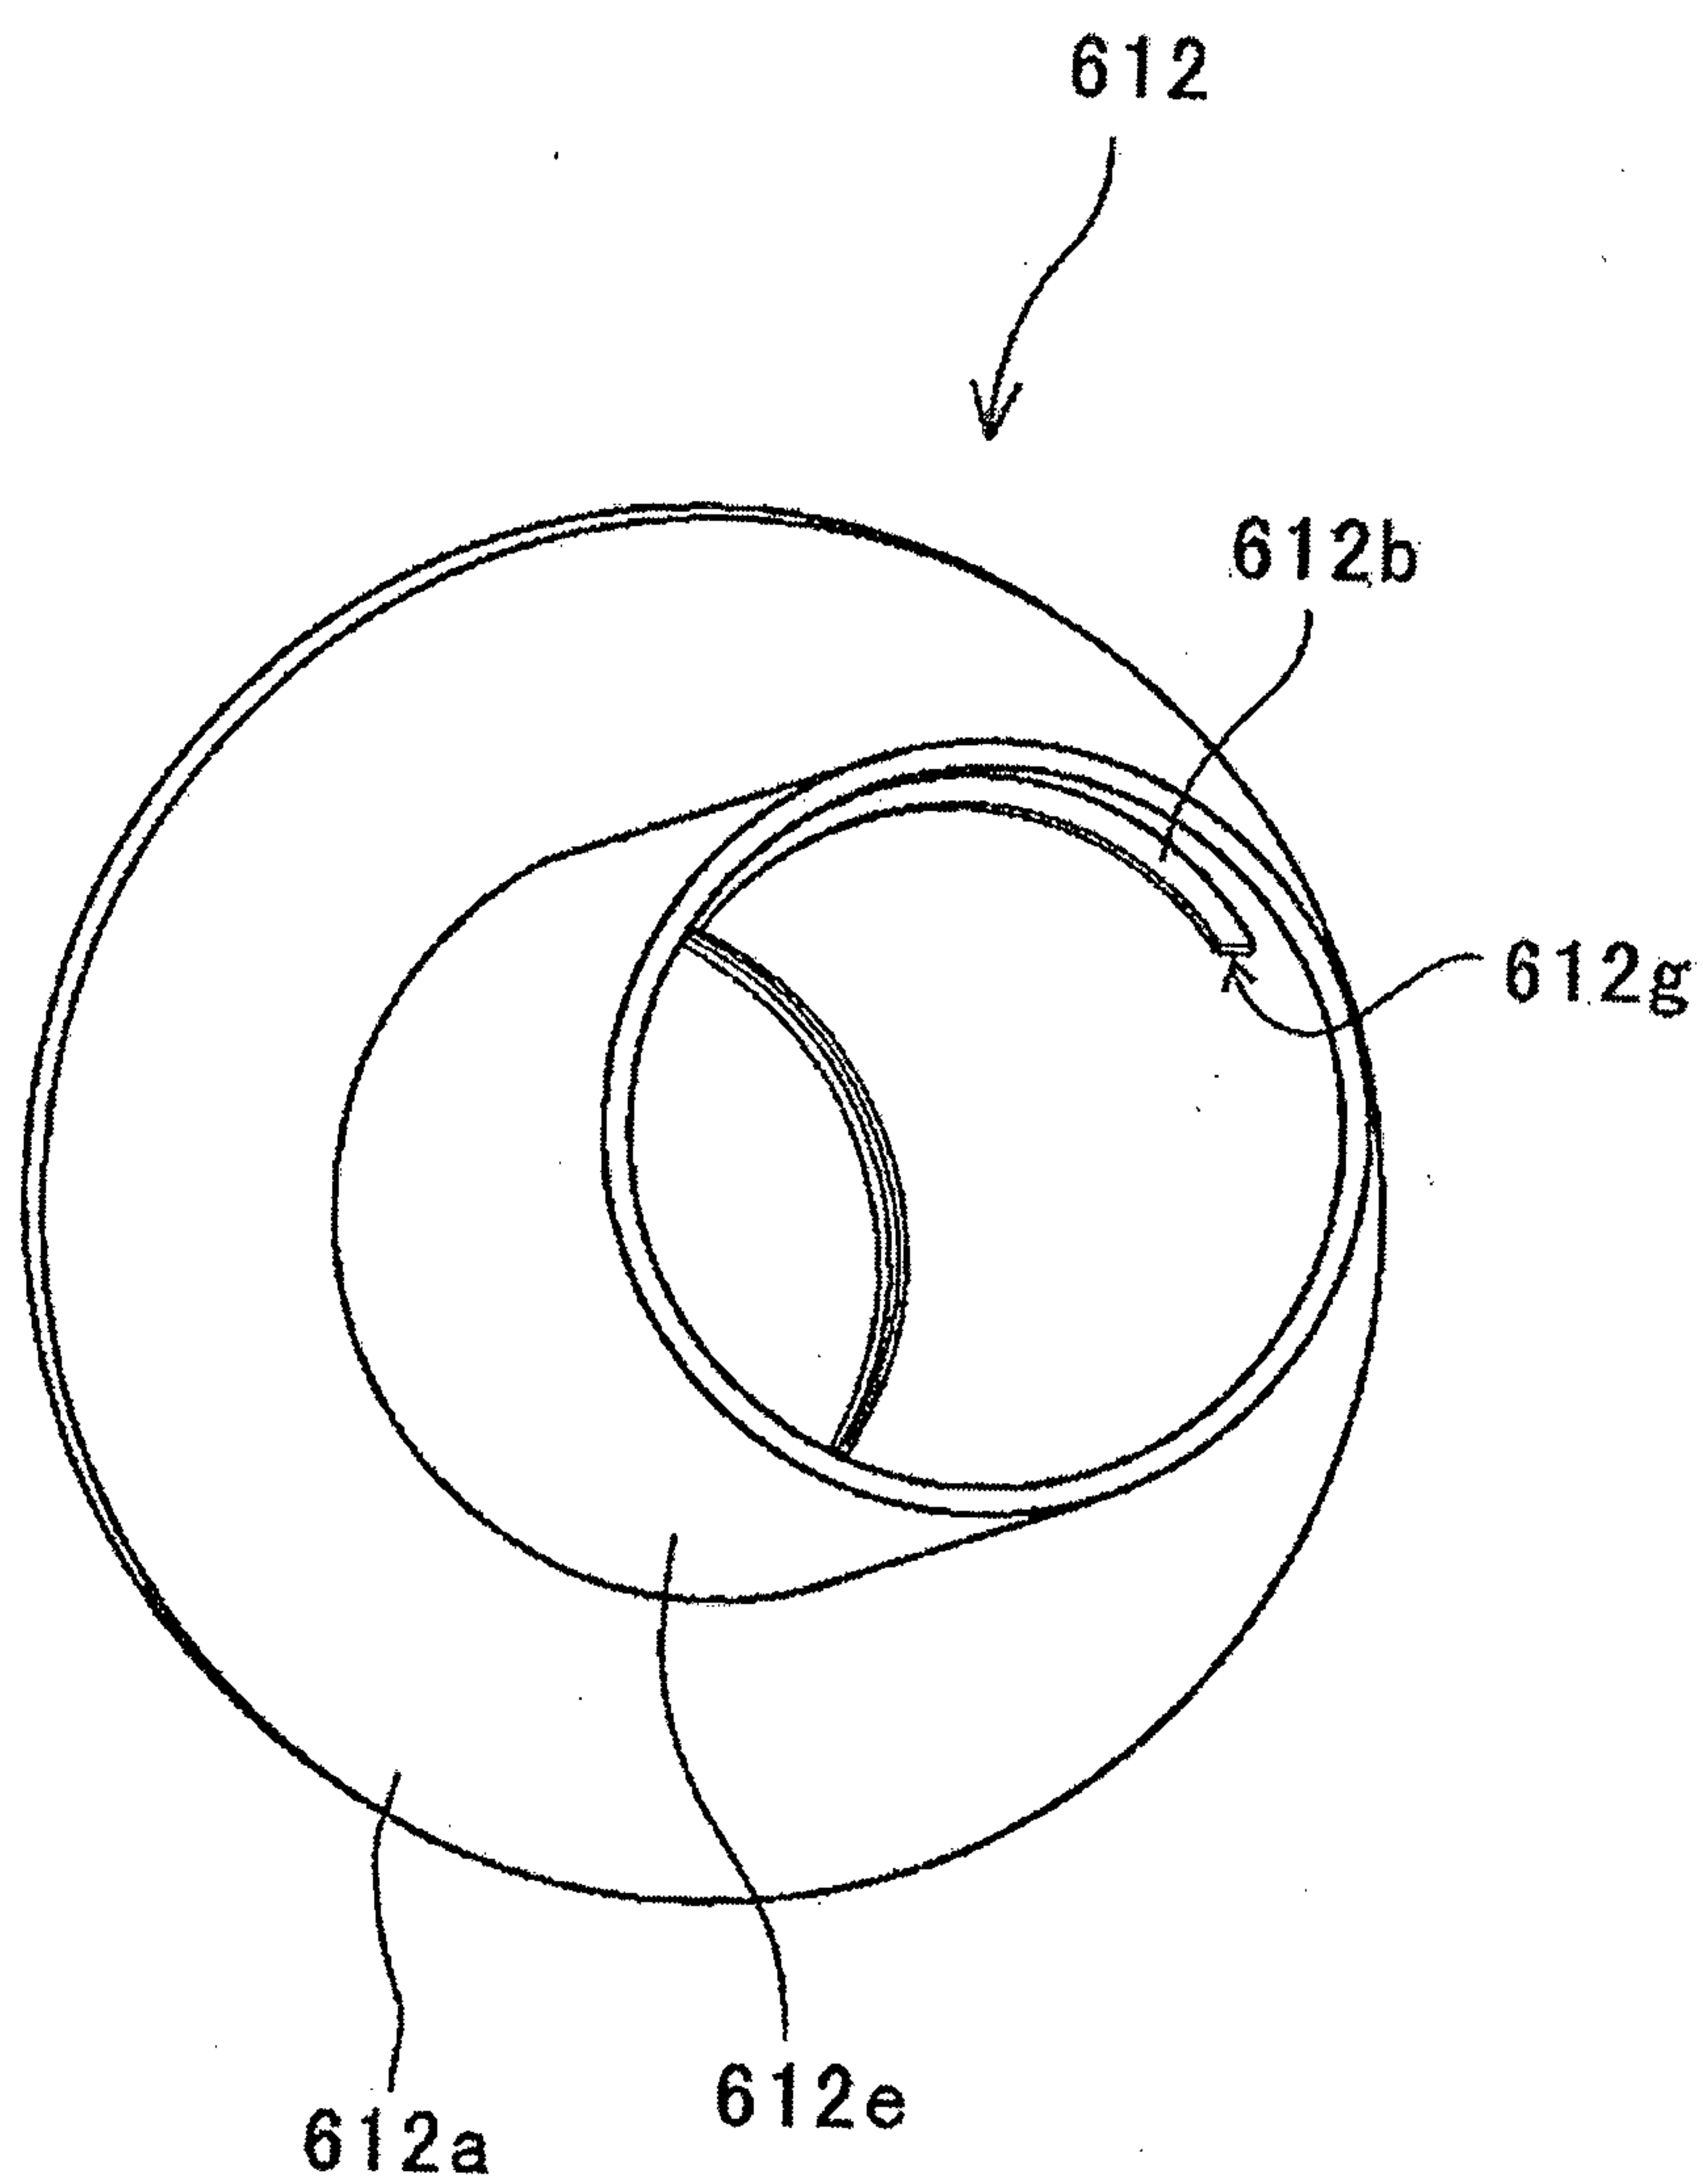

24/66

FIG.24

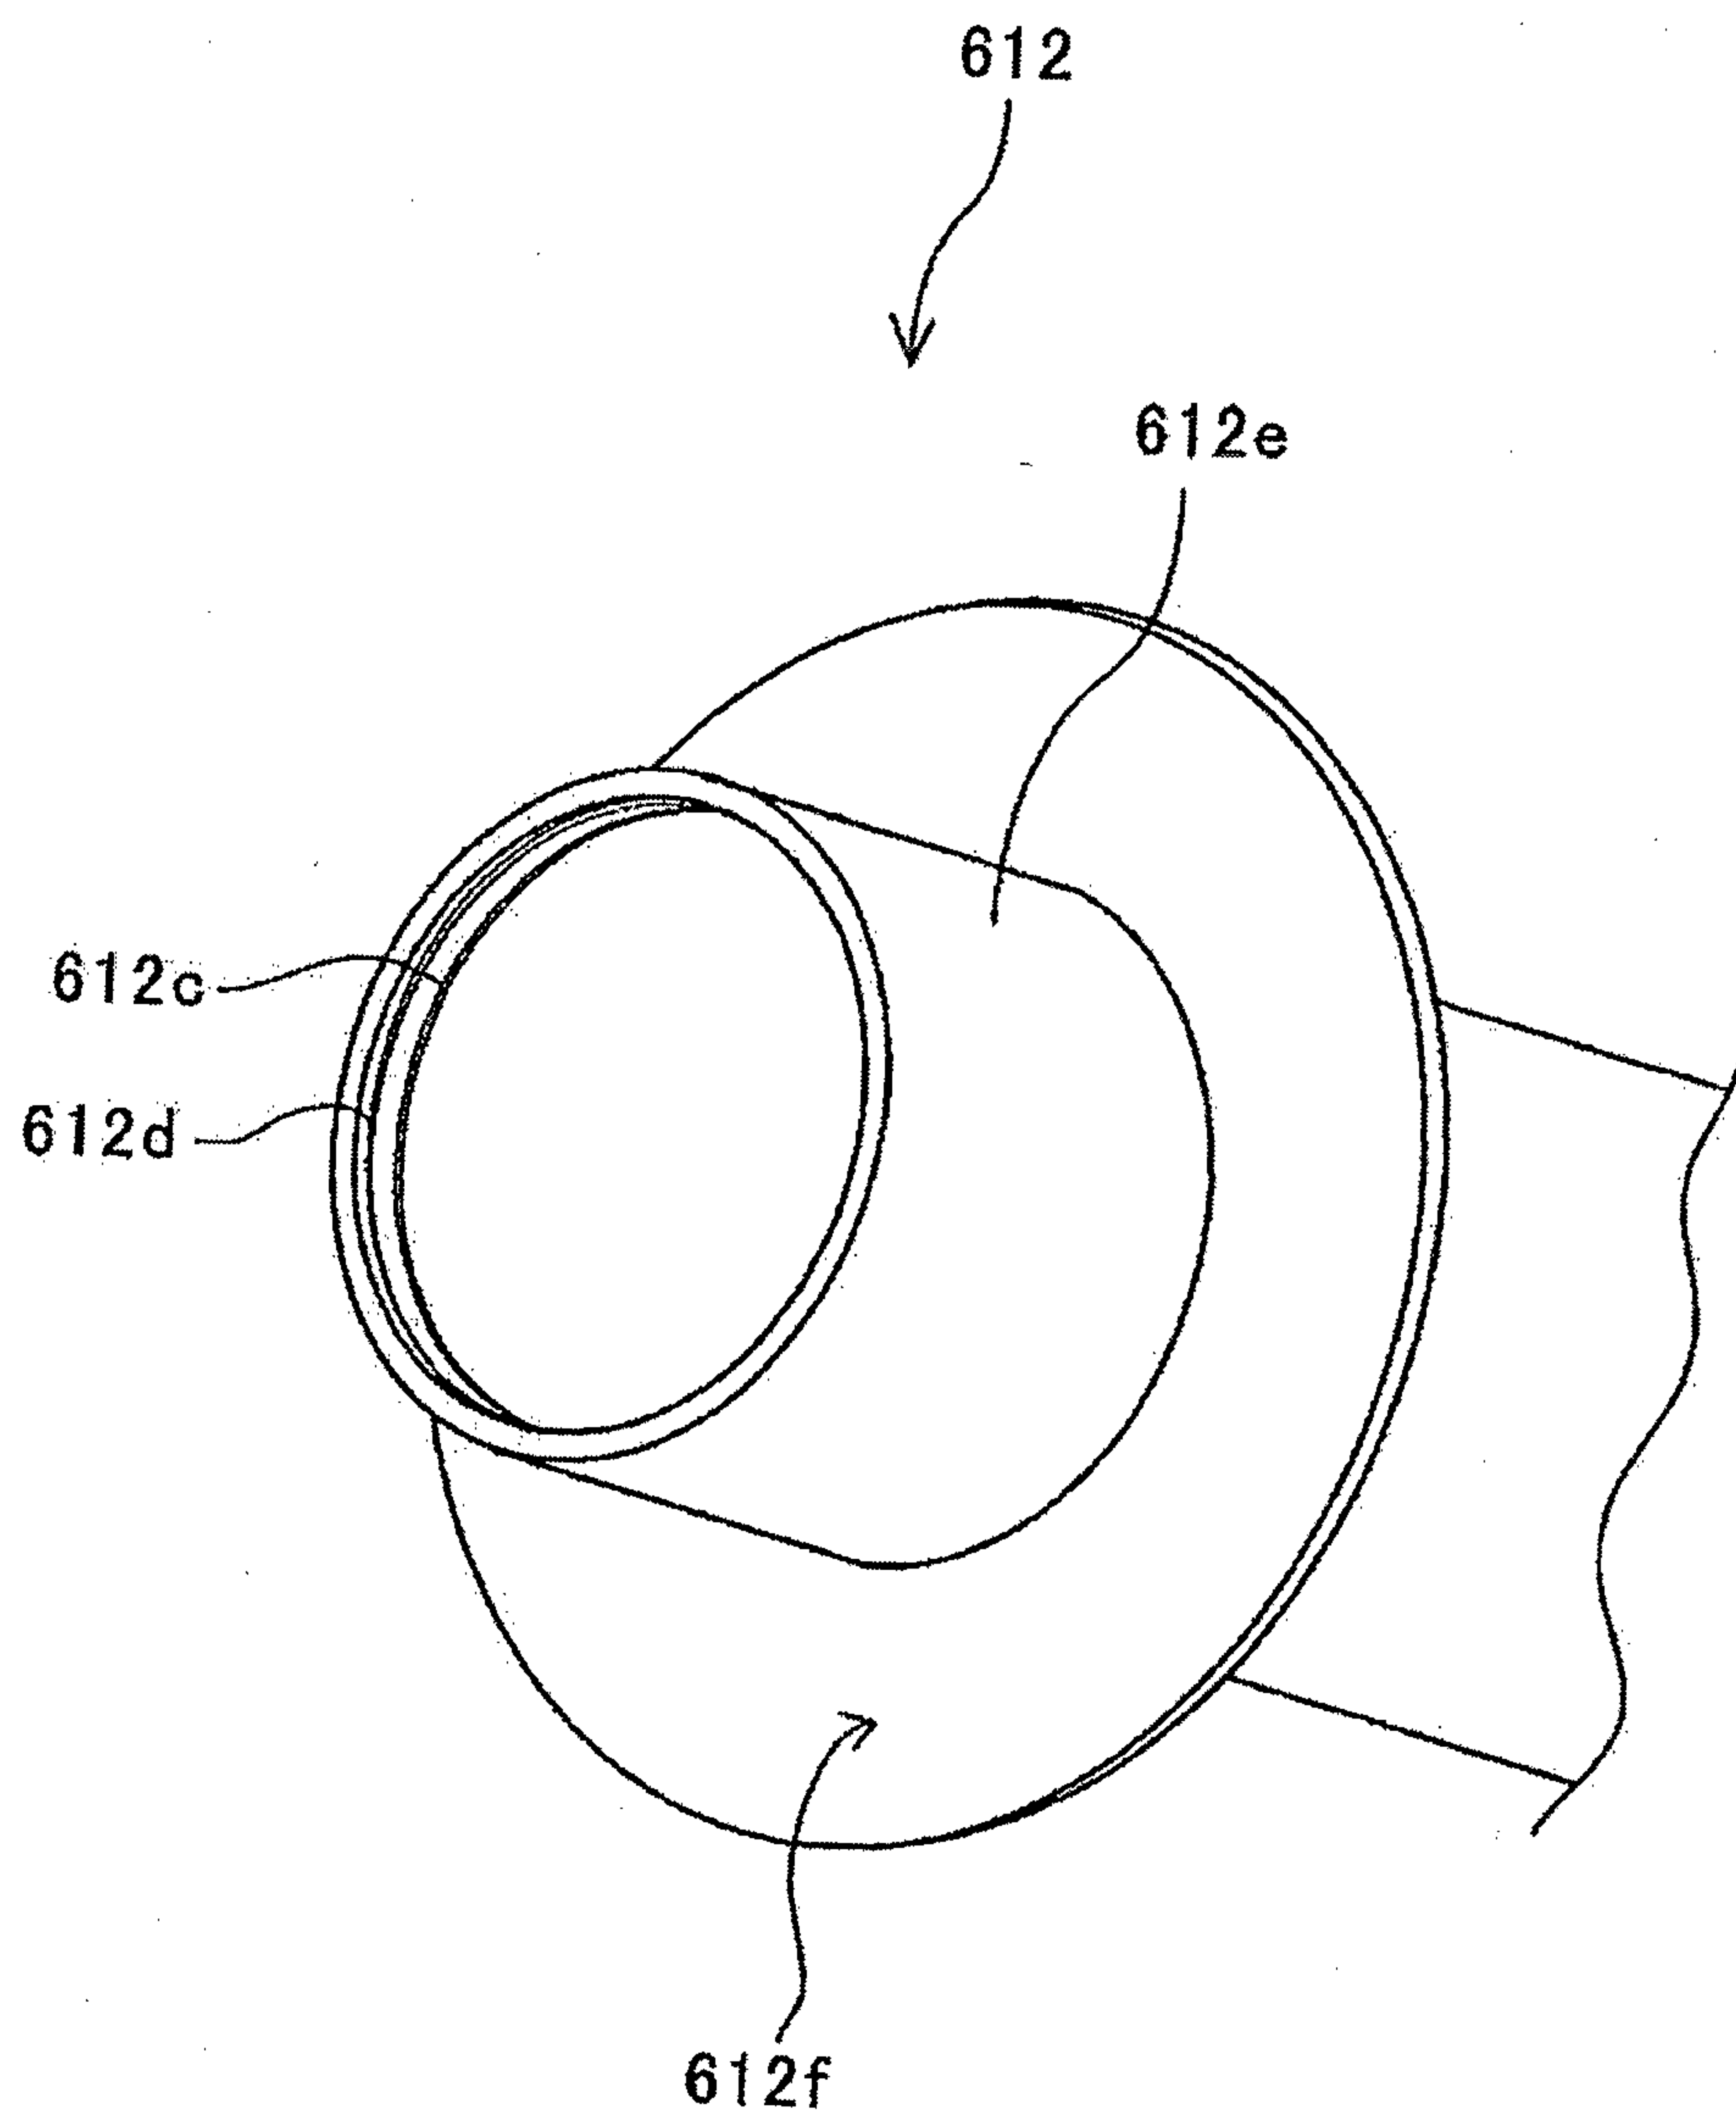

25/66

FIG.25



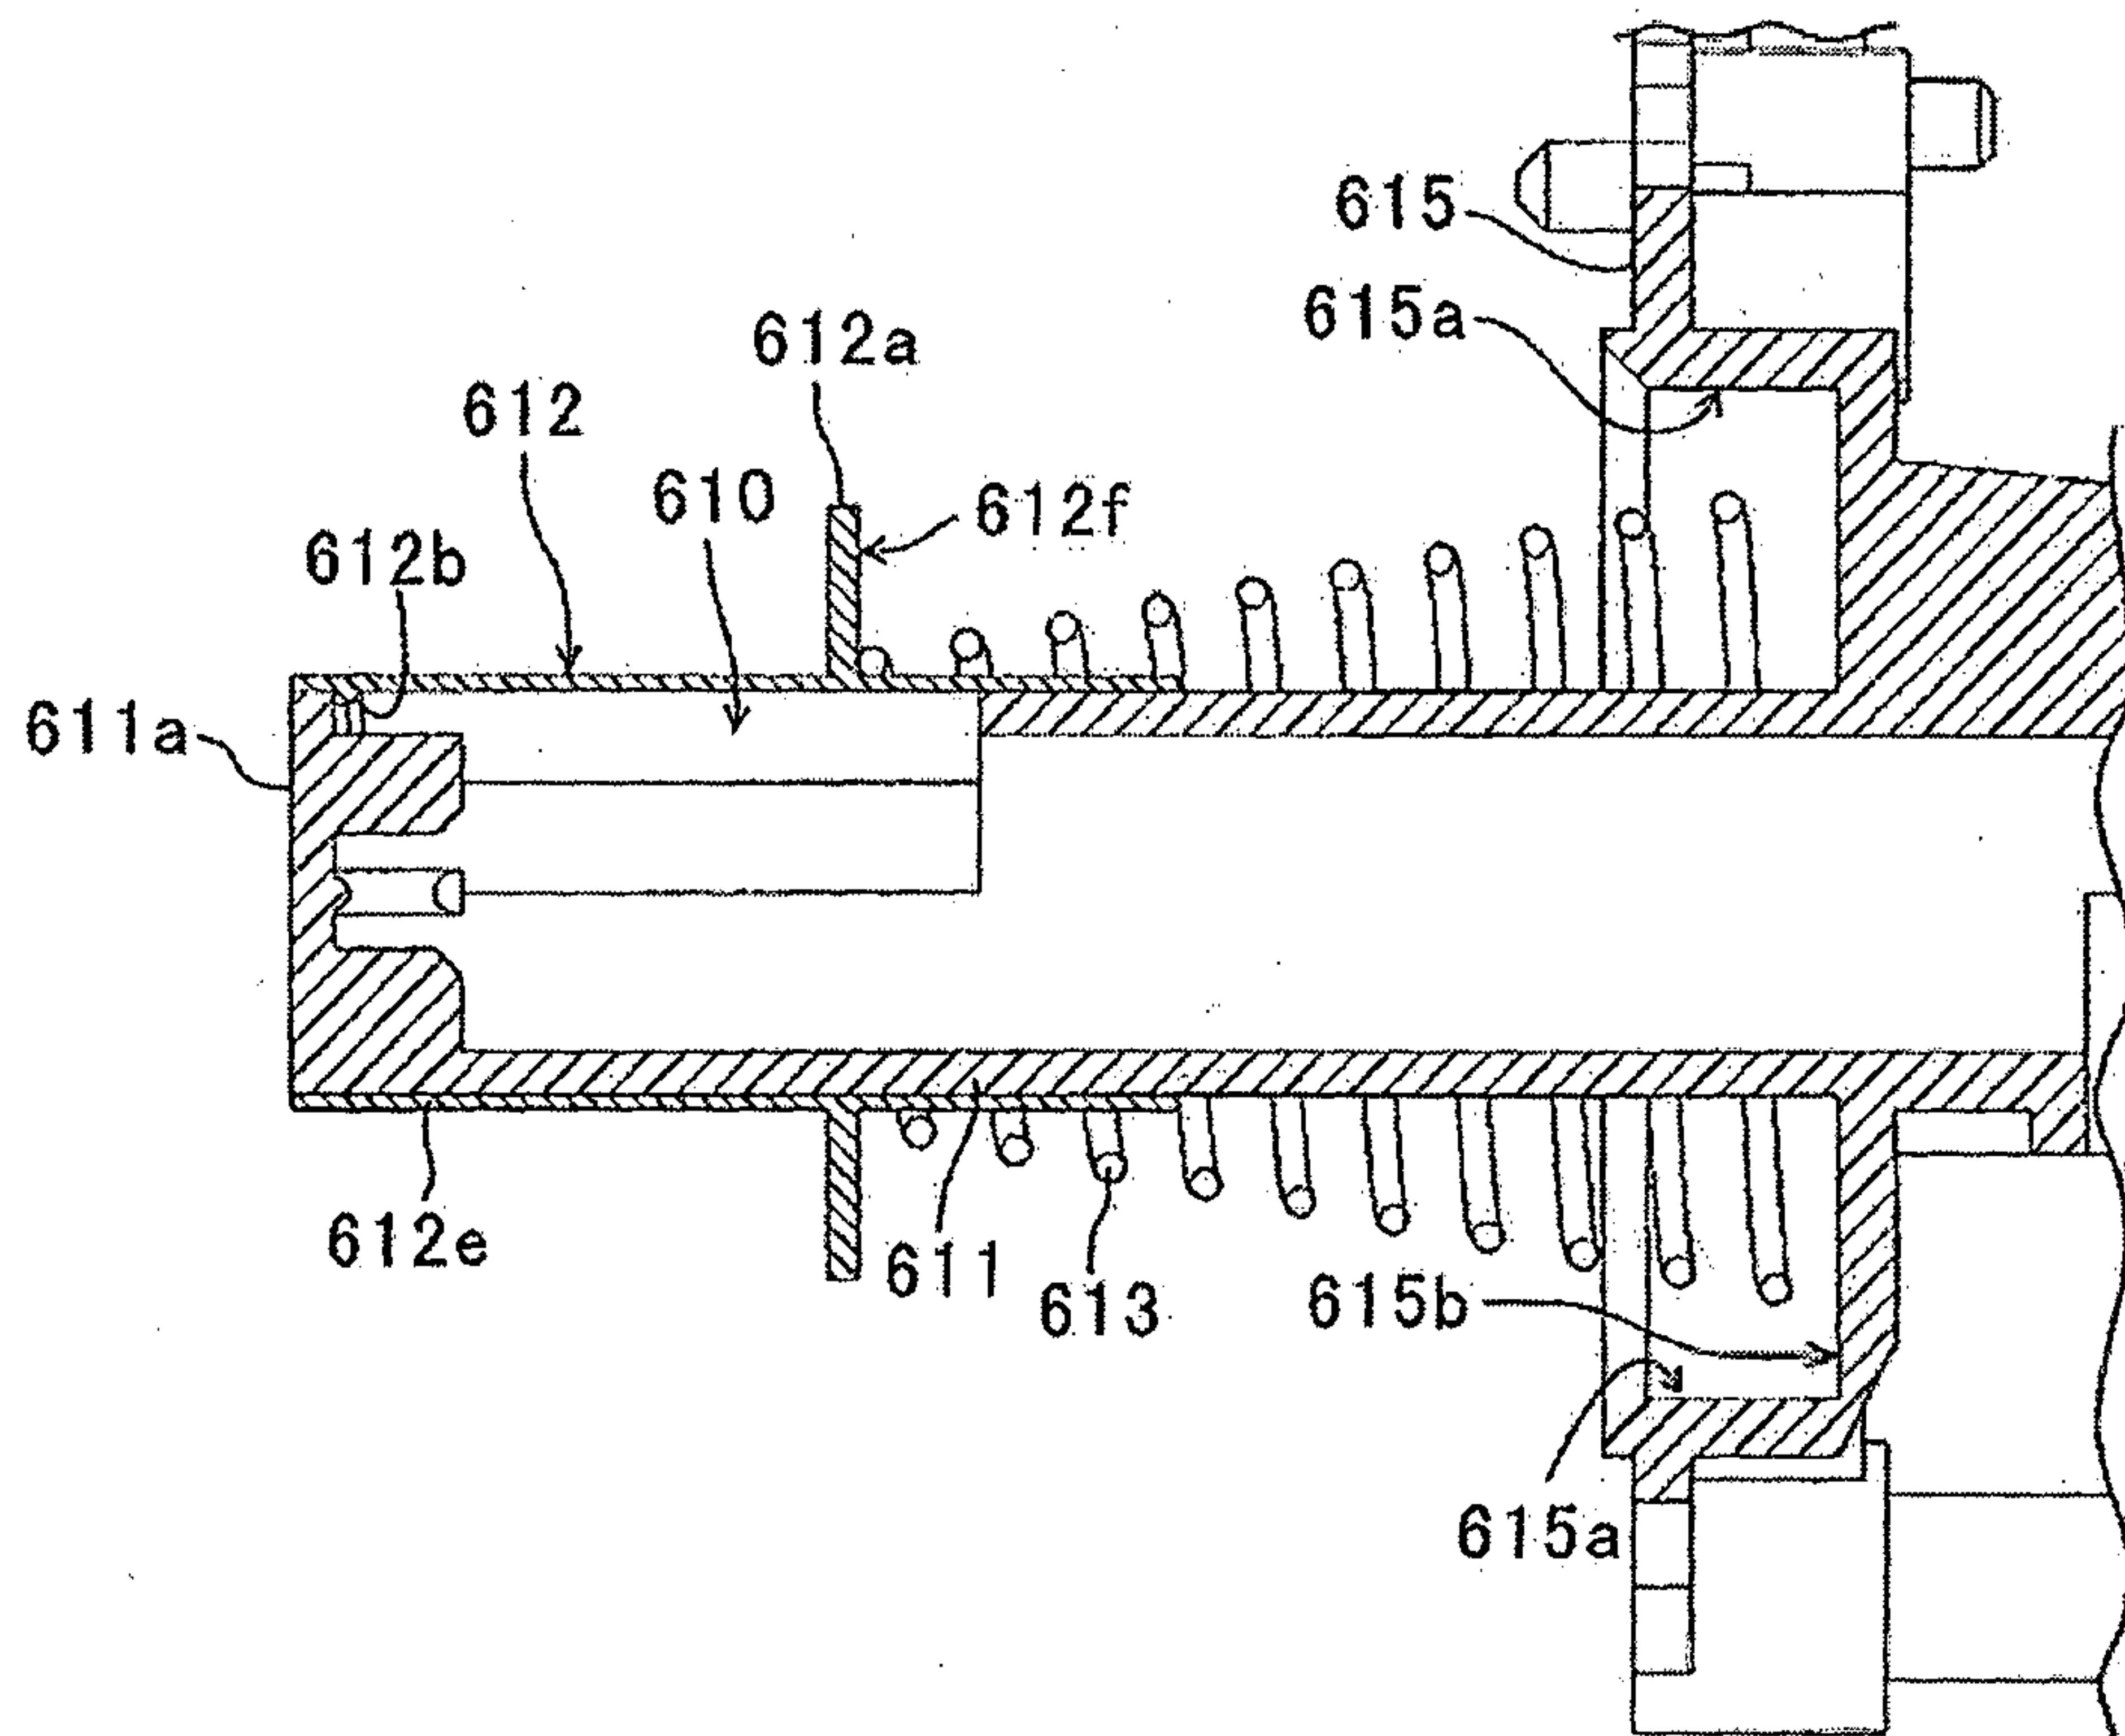


FIG.26

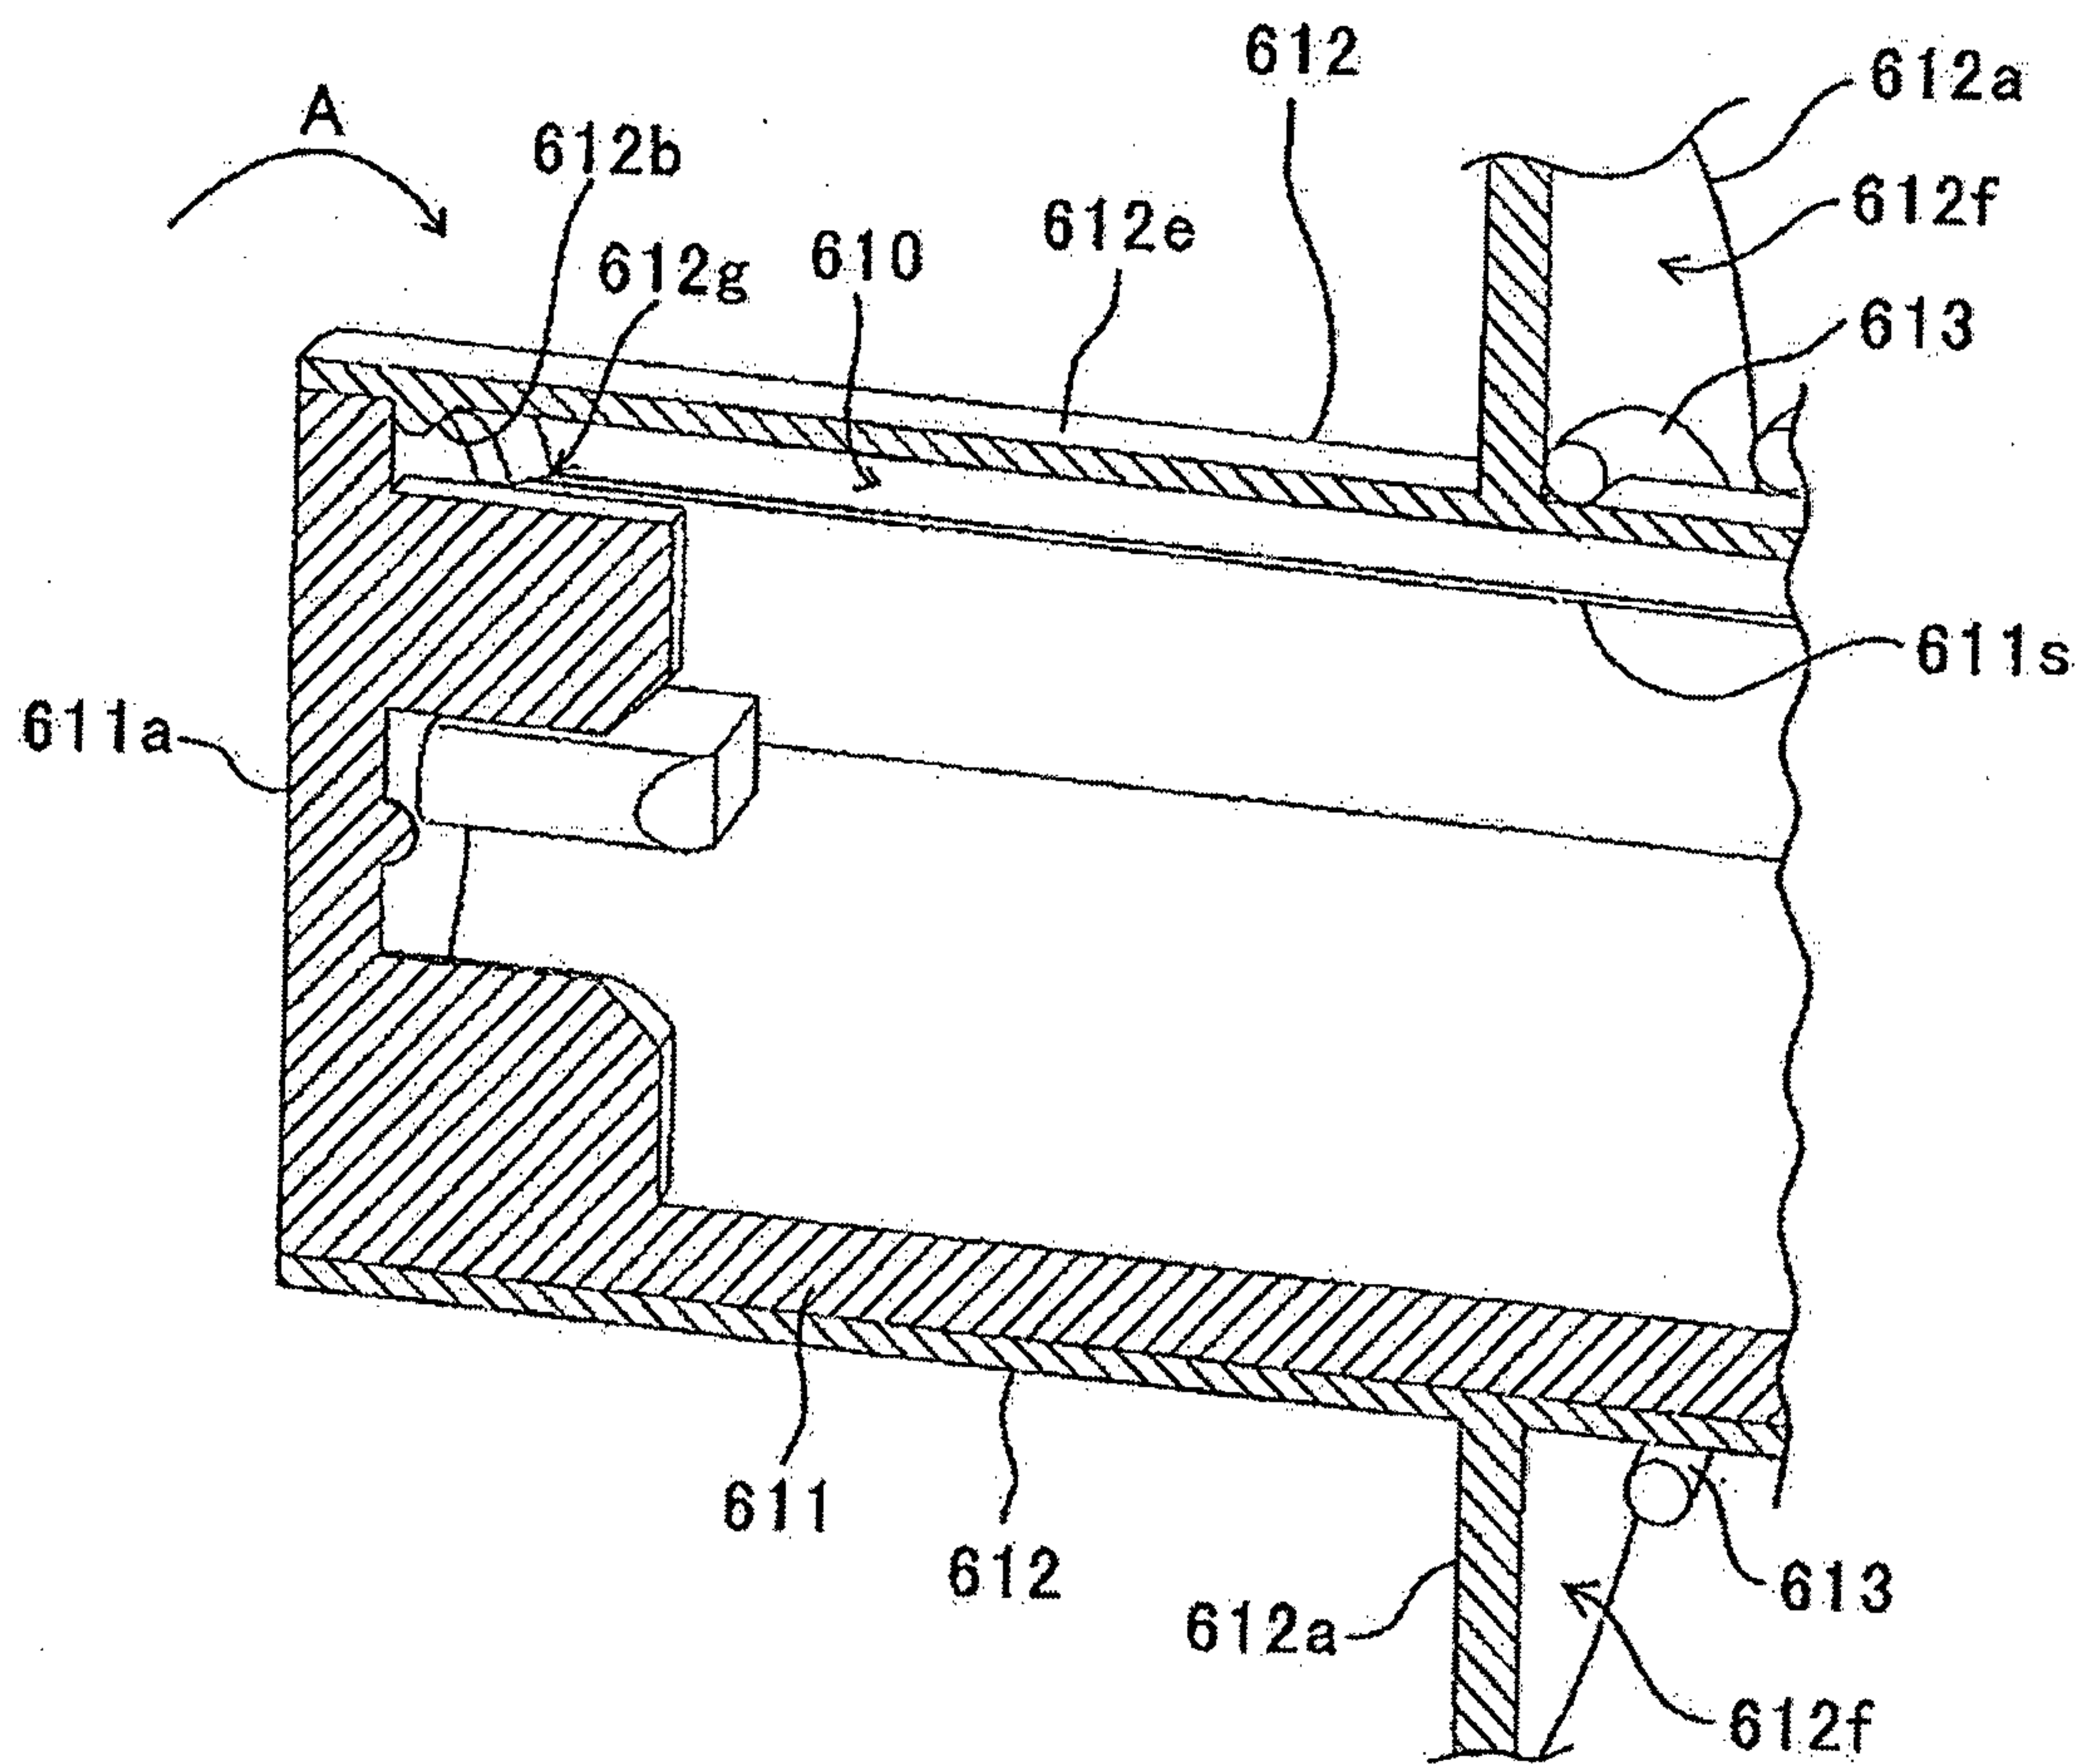


27/66

FIG.27

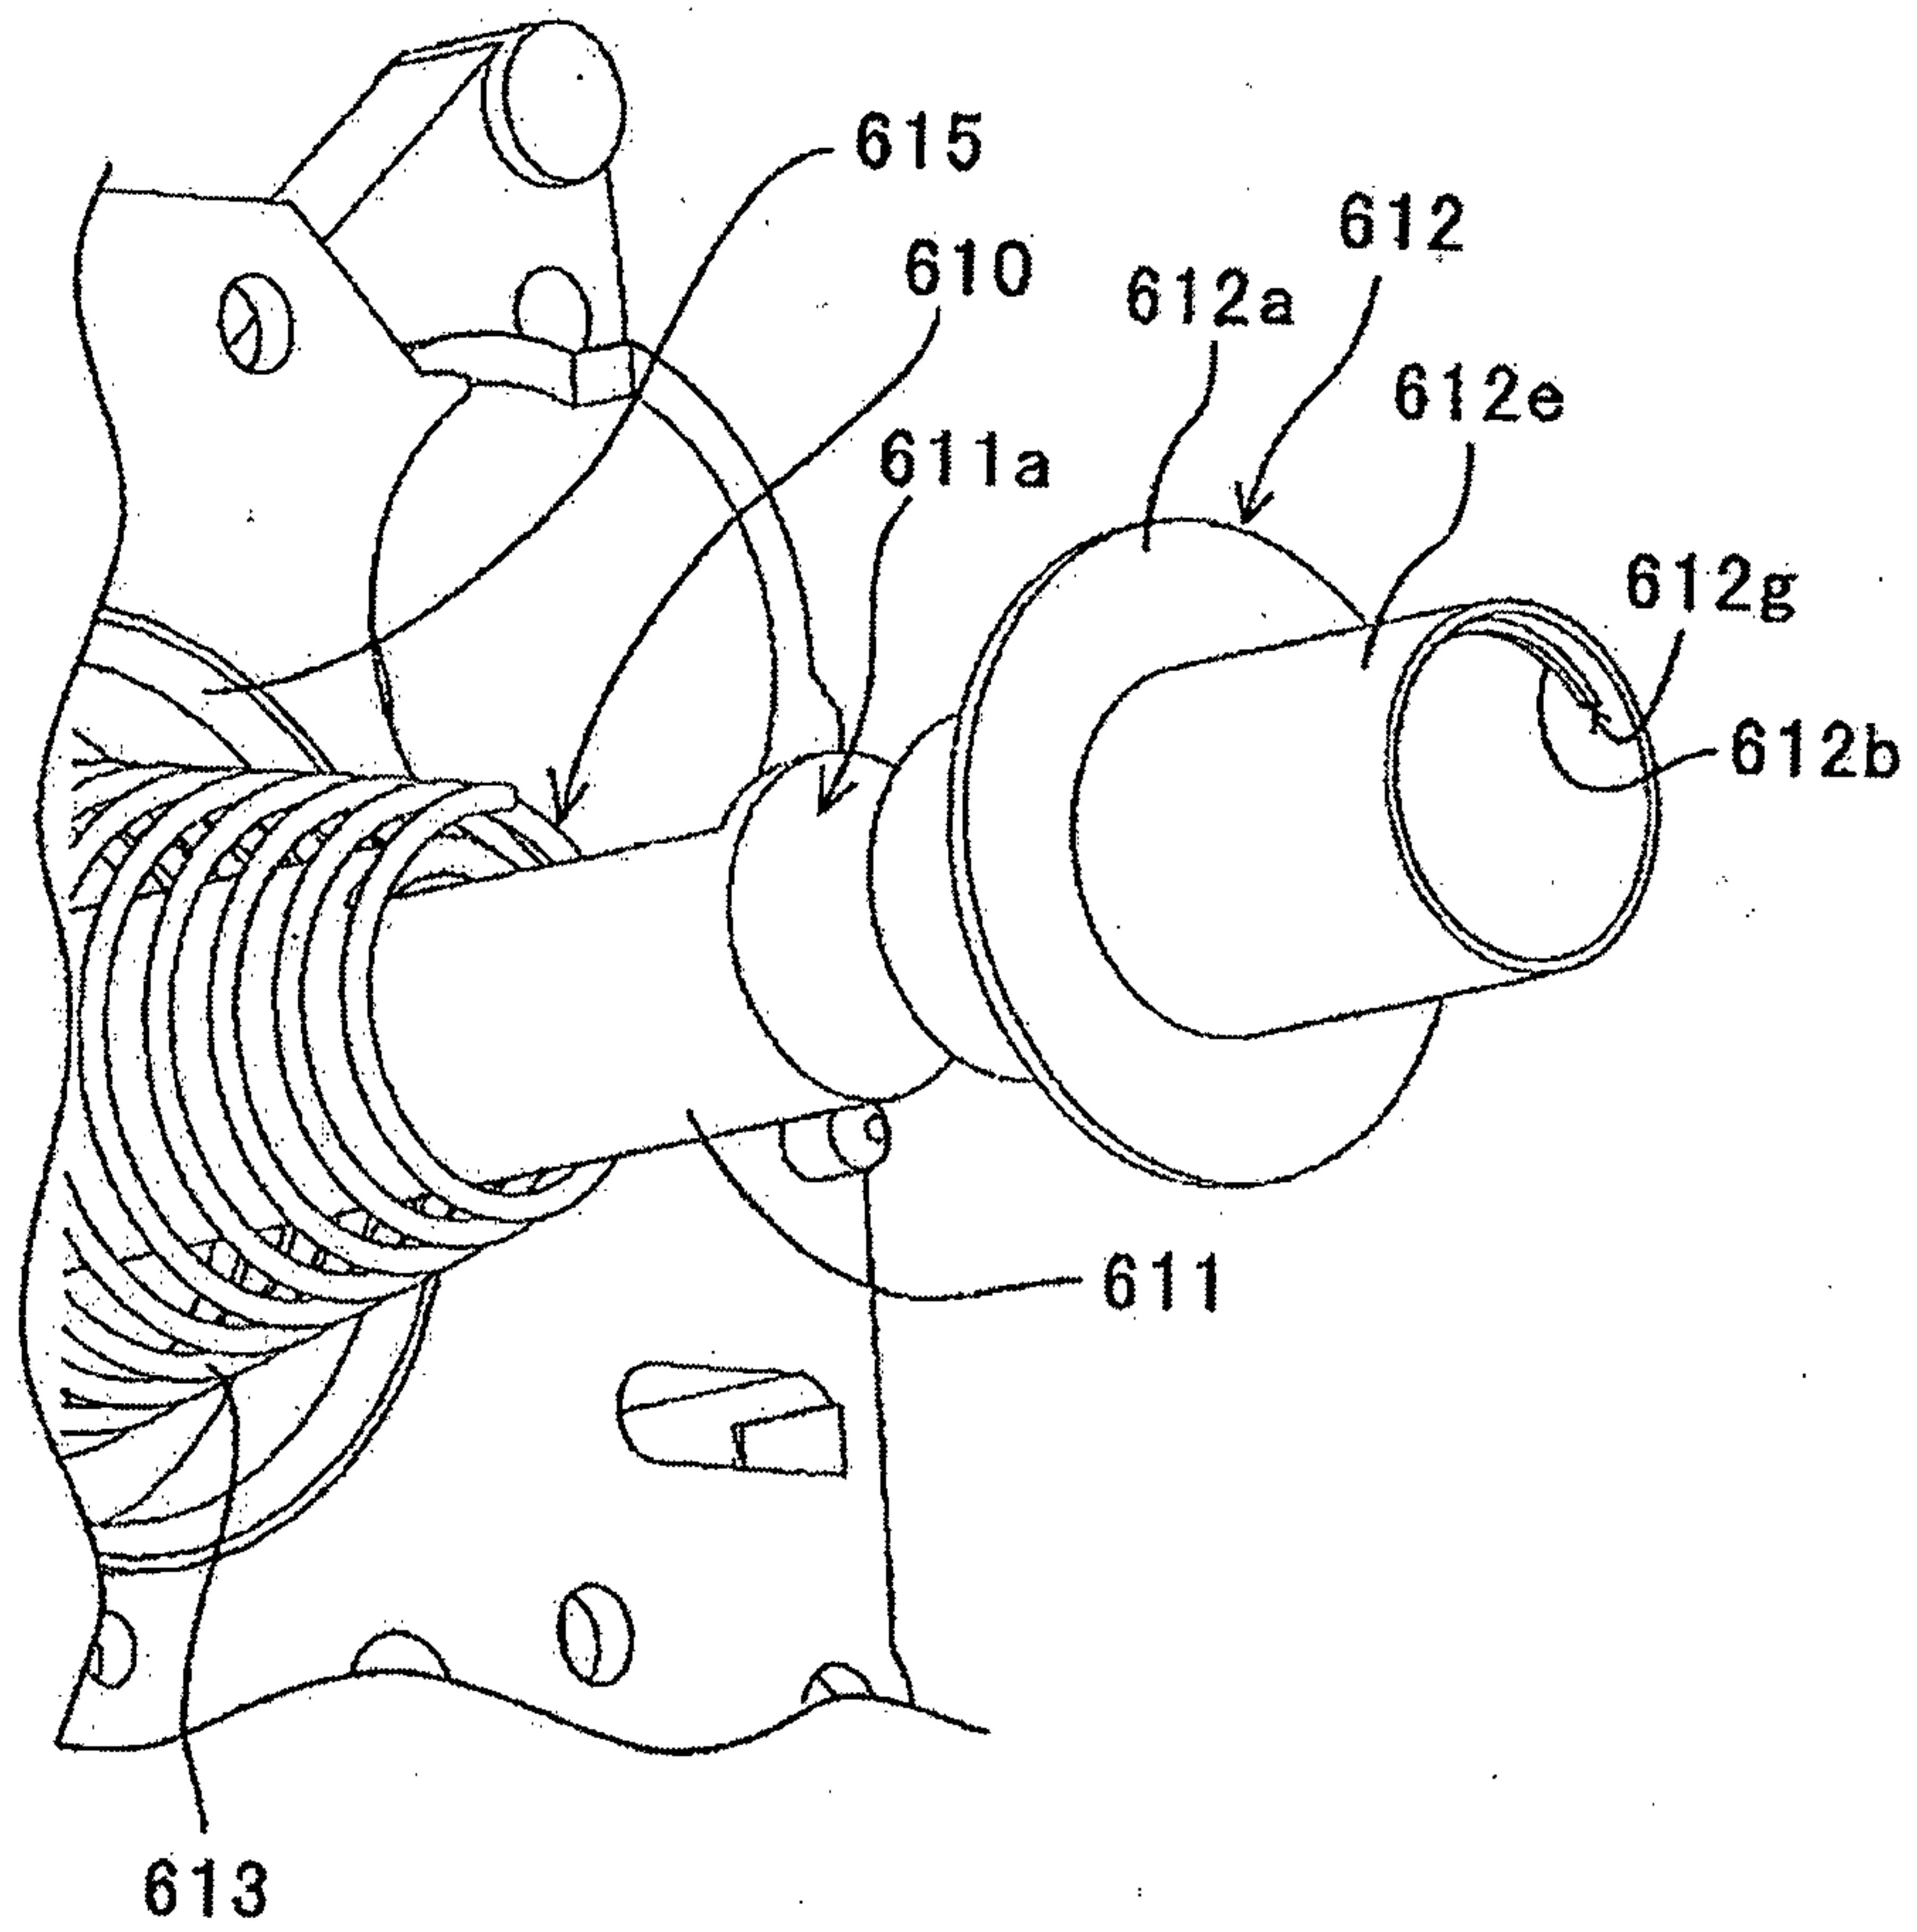


28/66

FIG.28

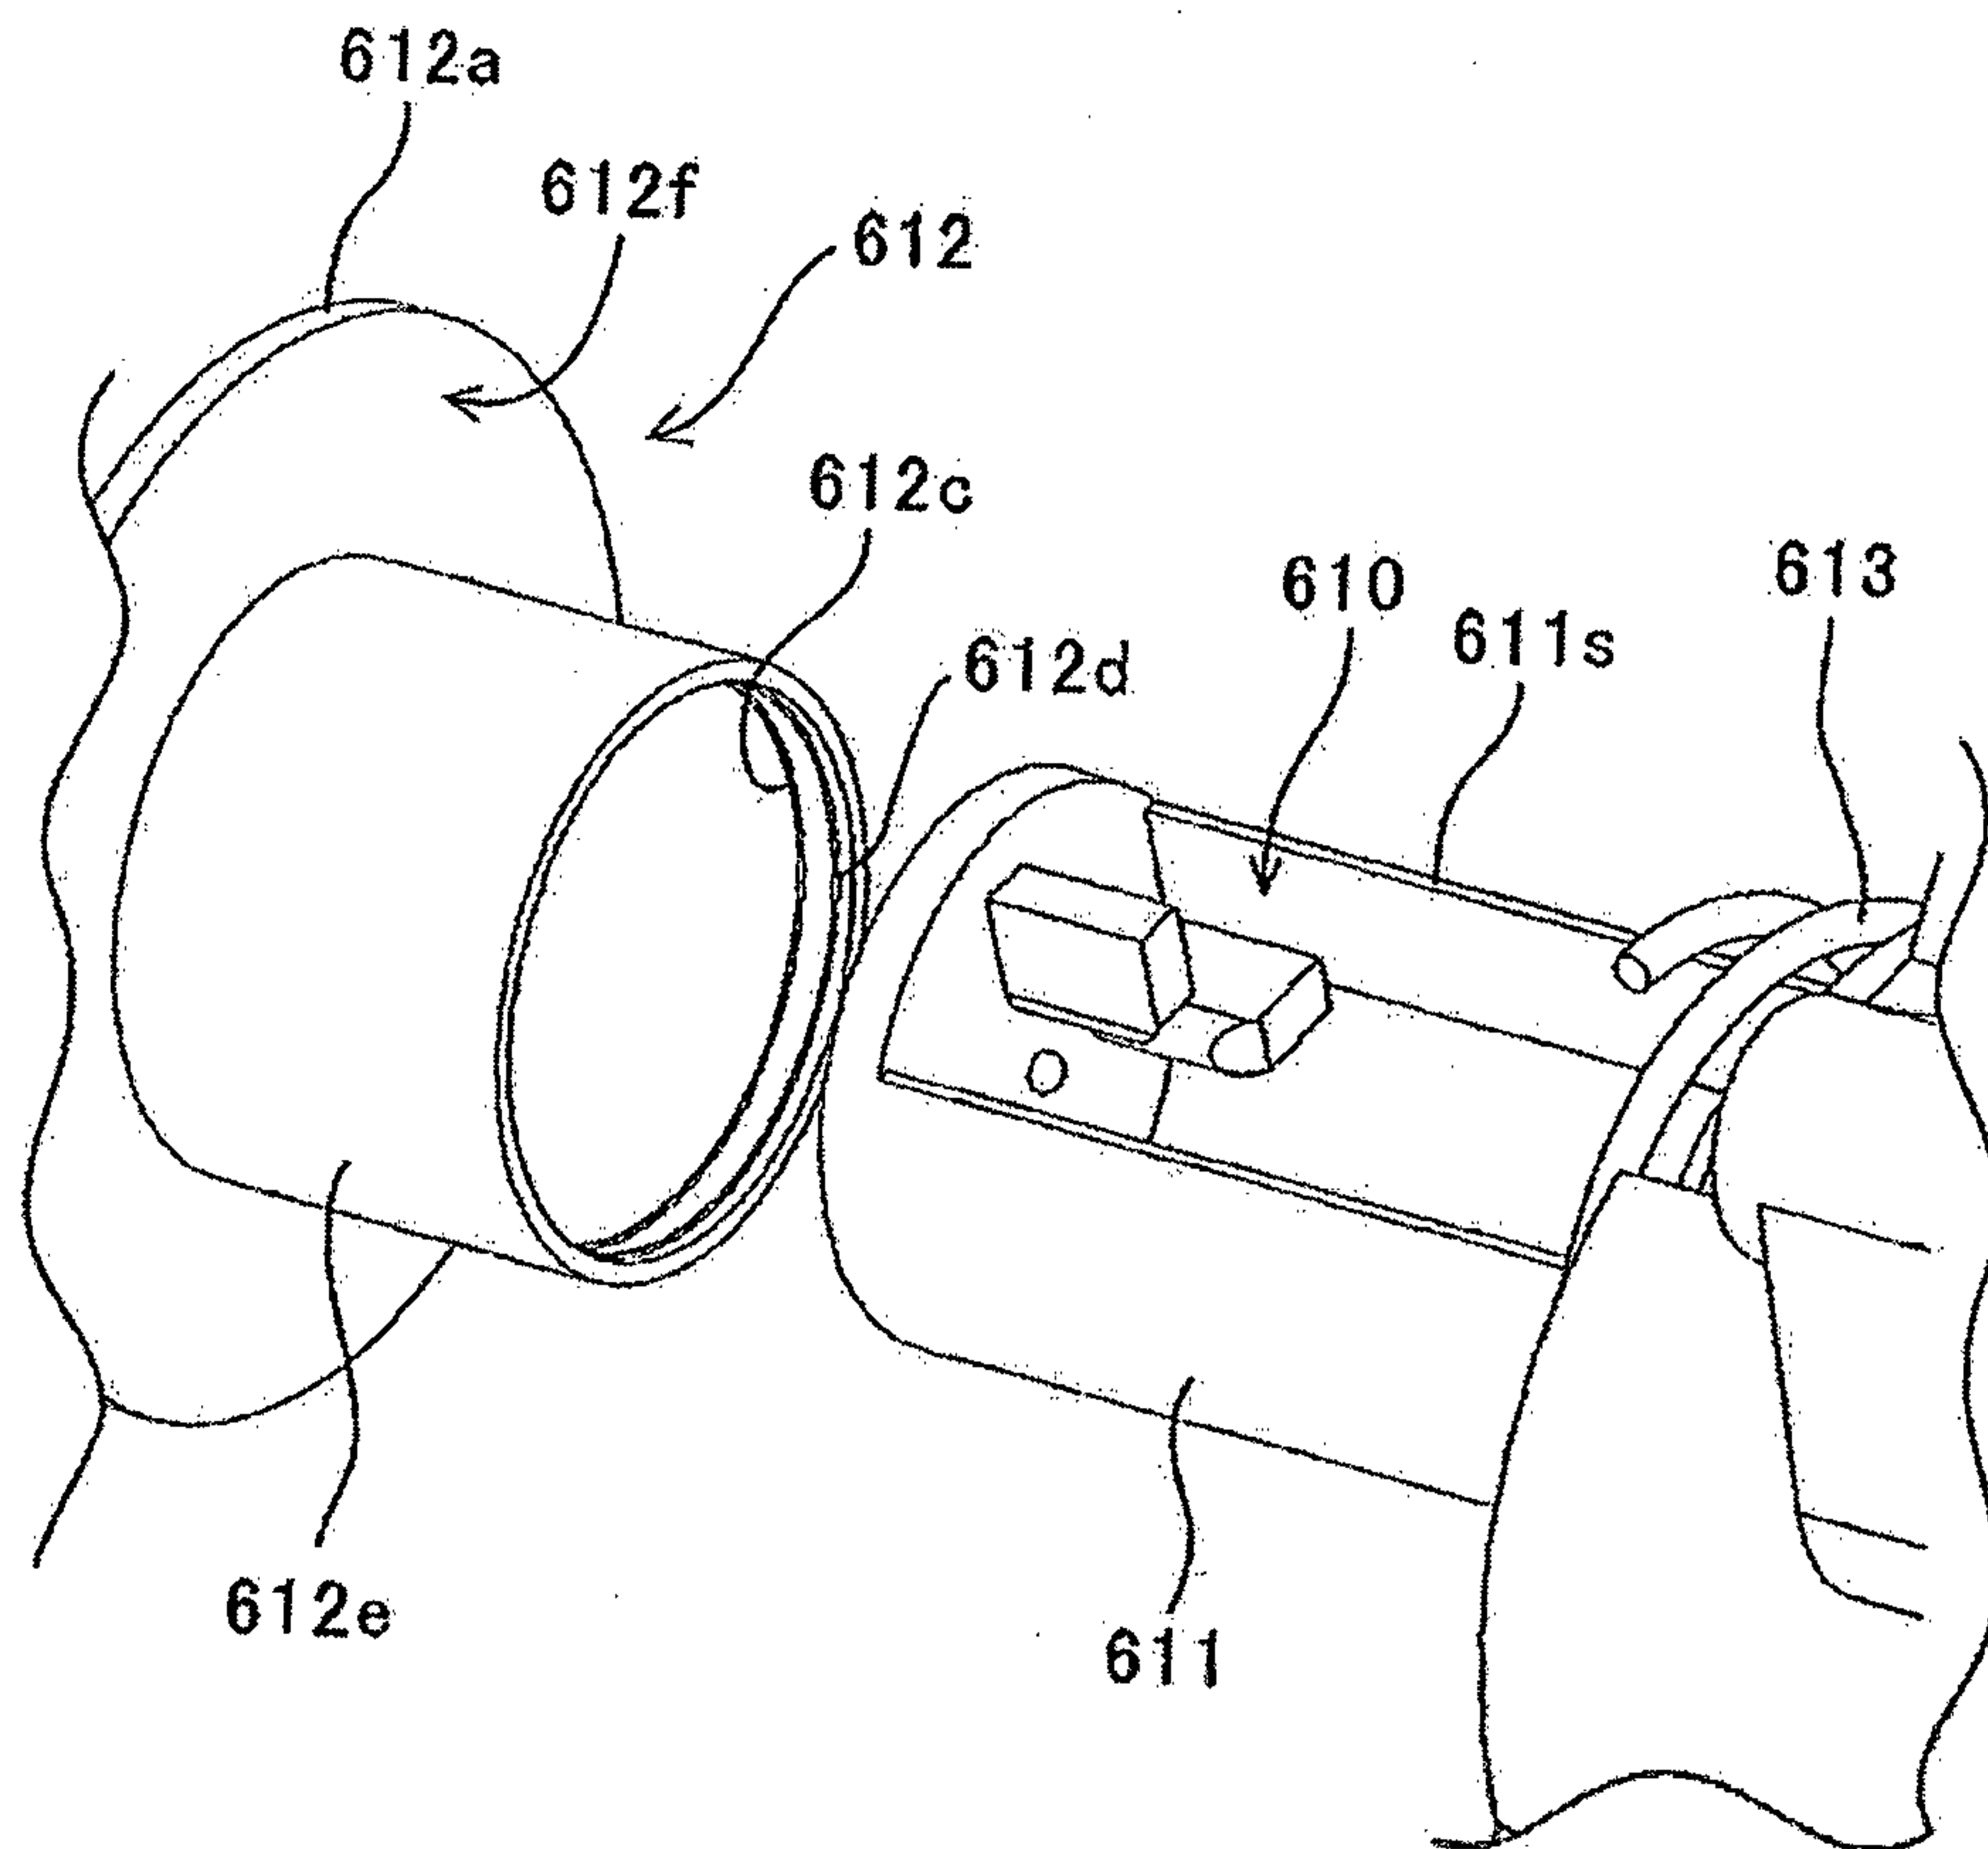

29/66

FIG.29

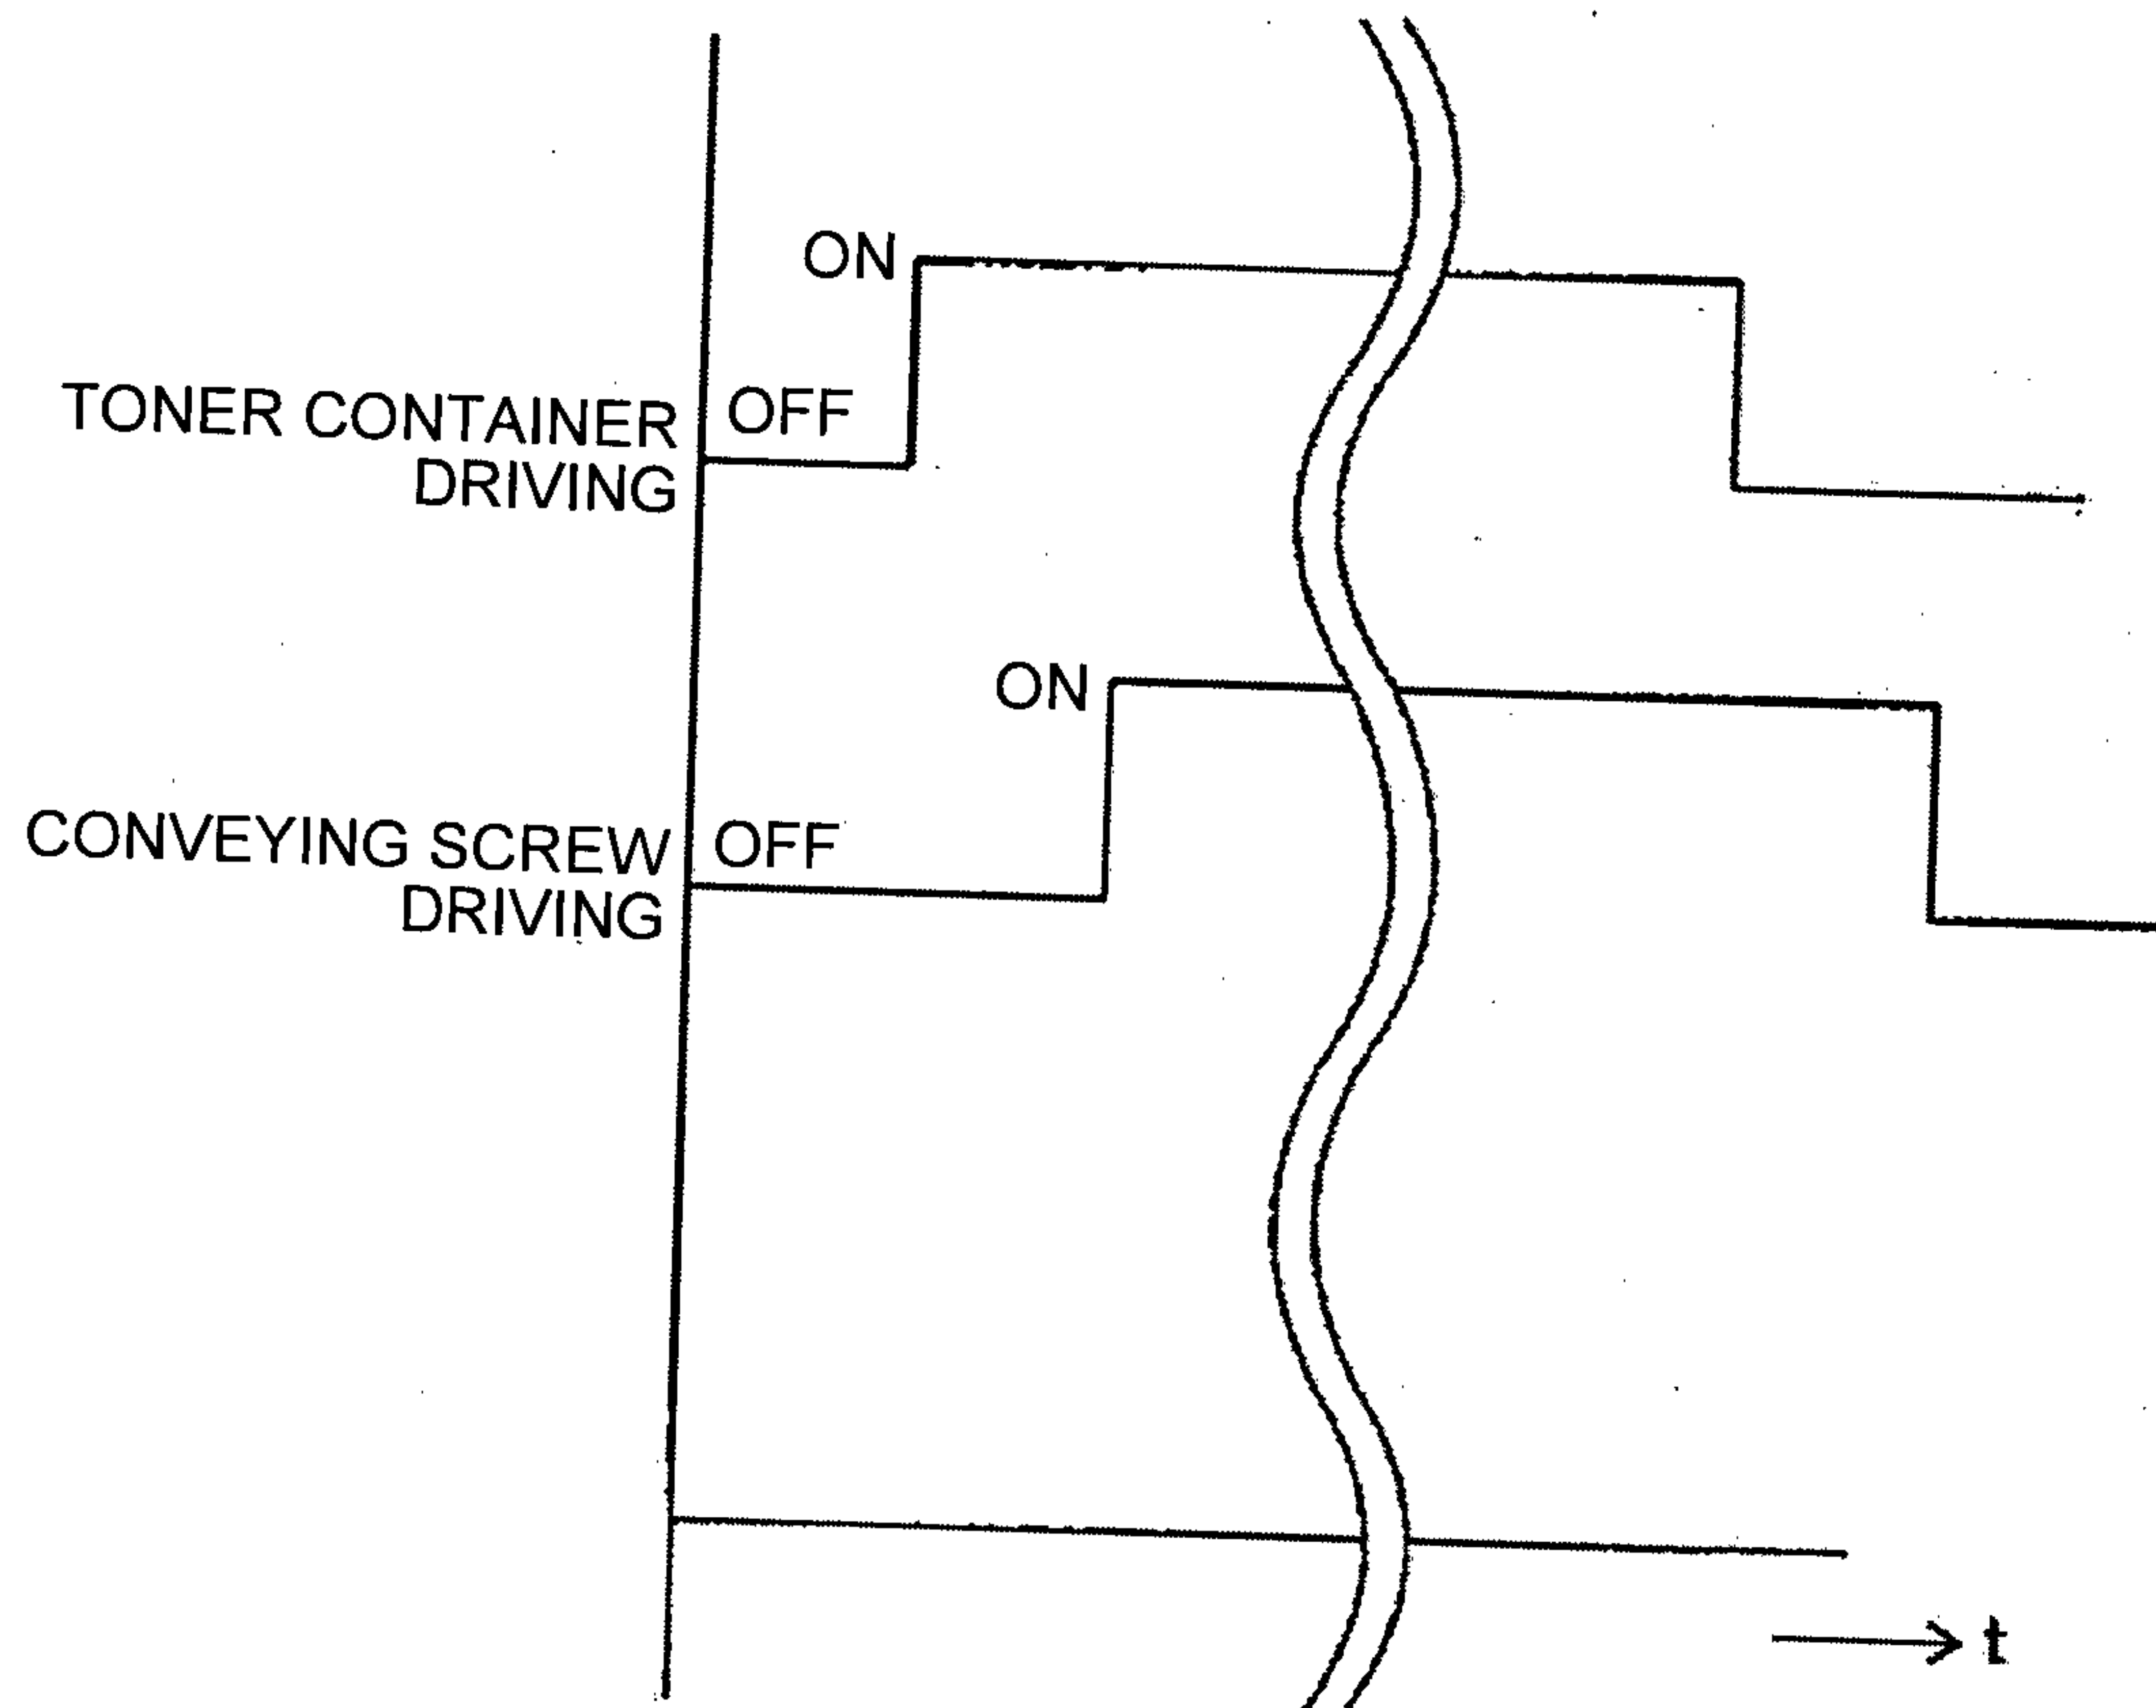

30/66

FIG.30A



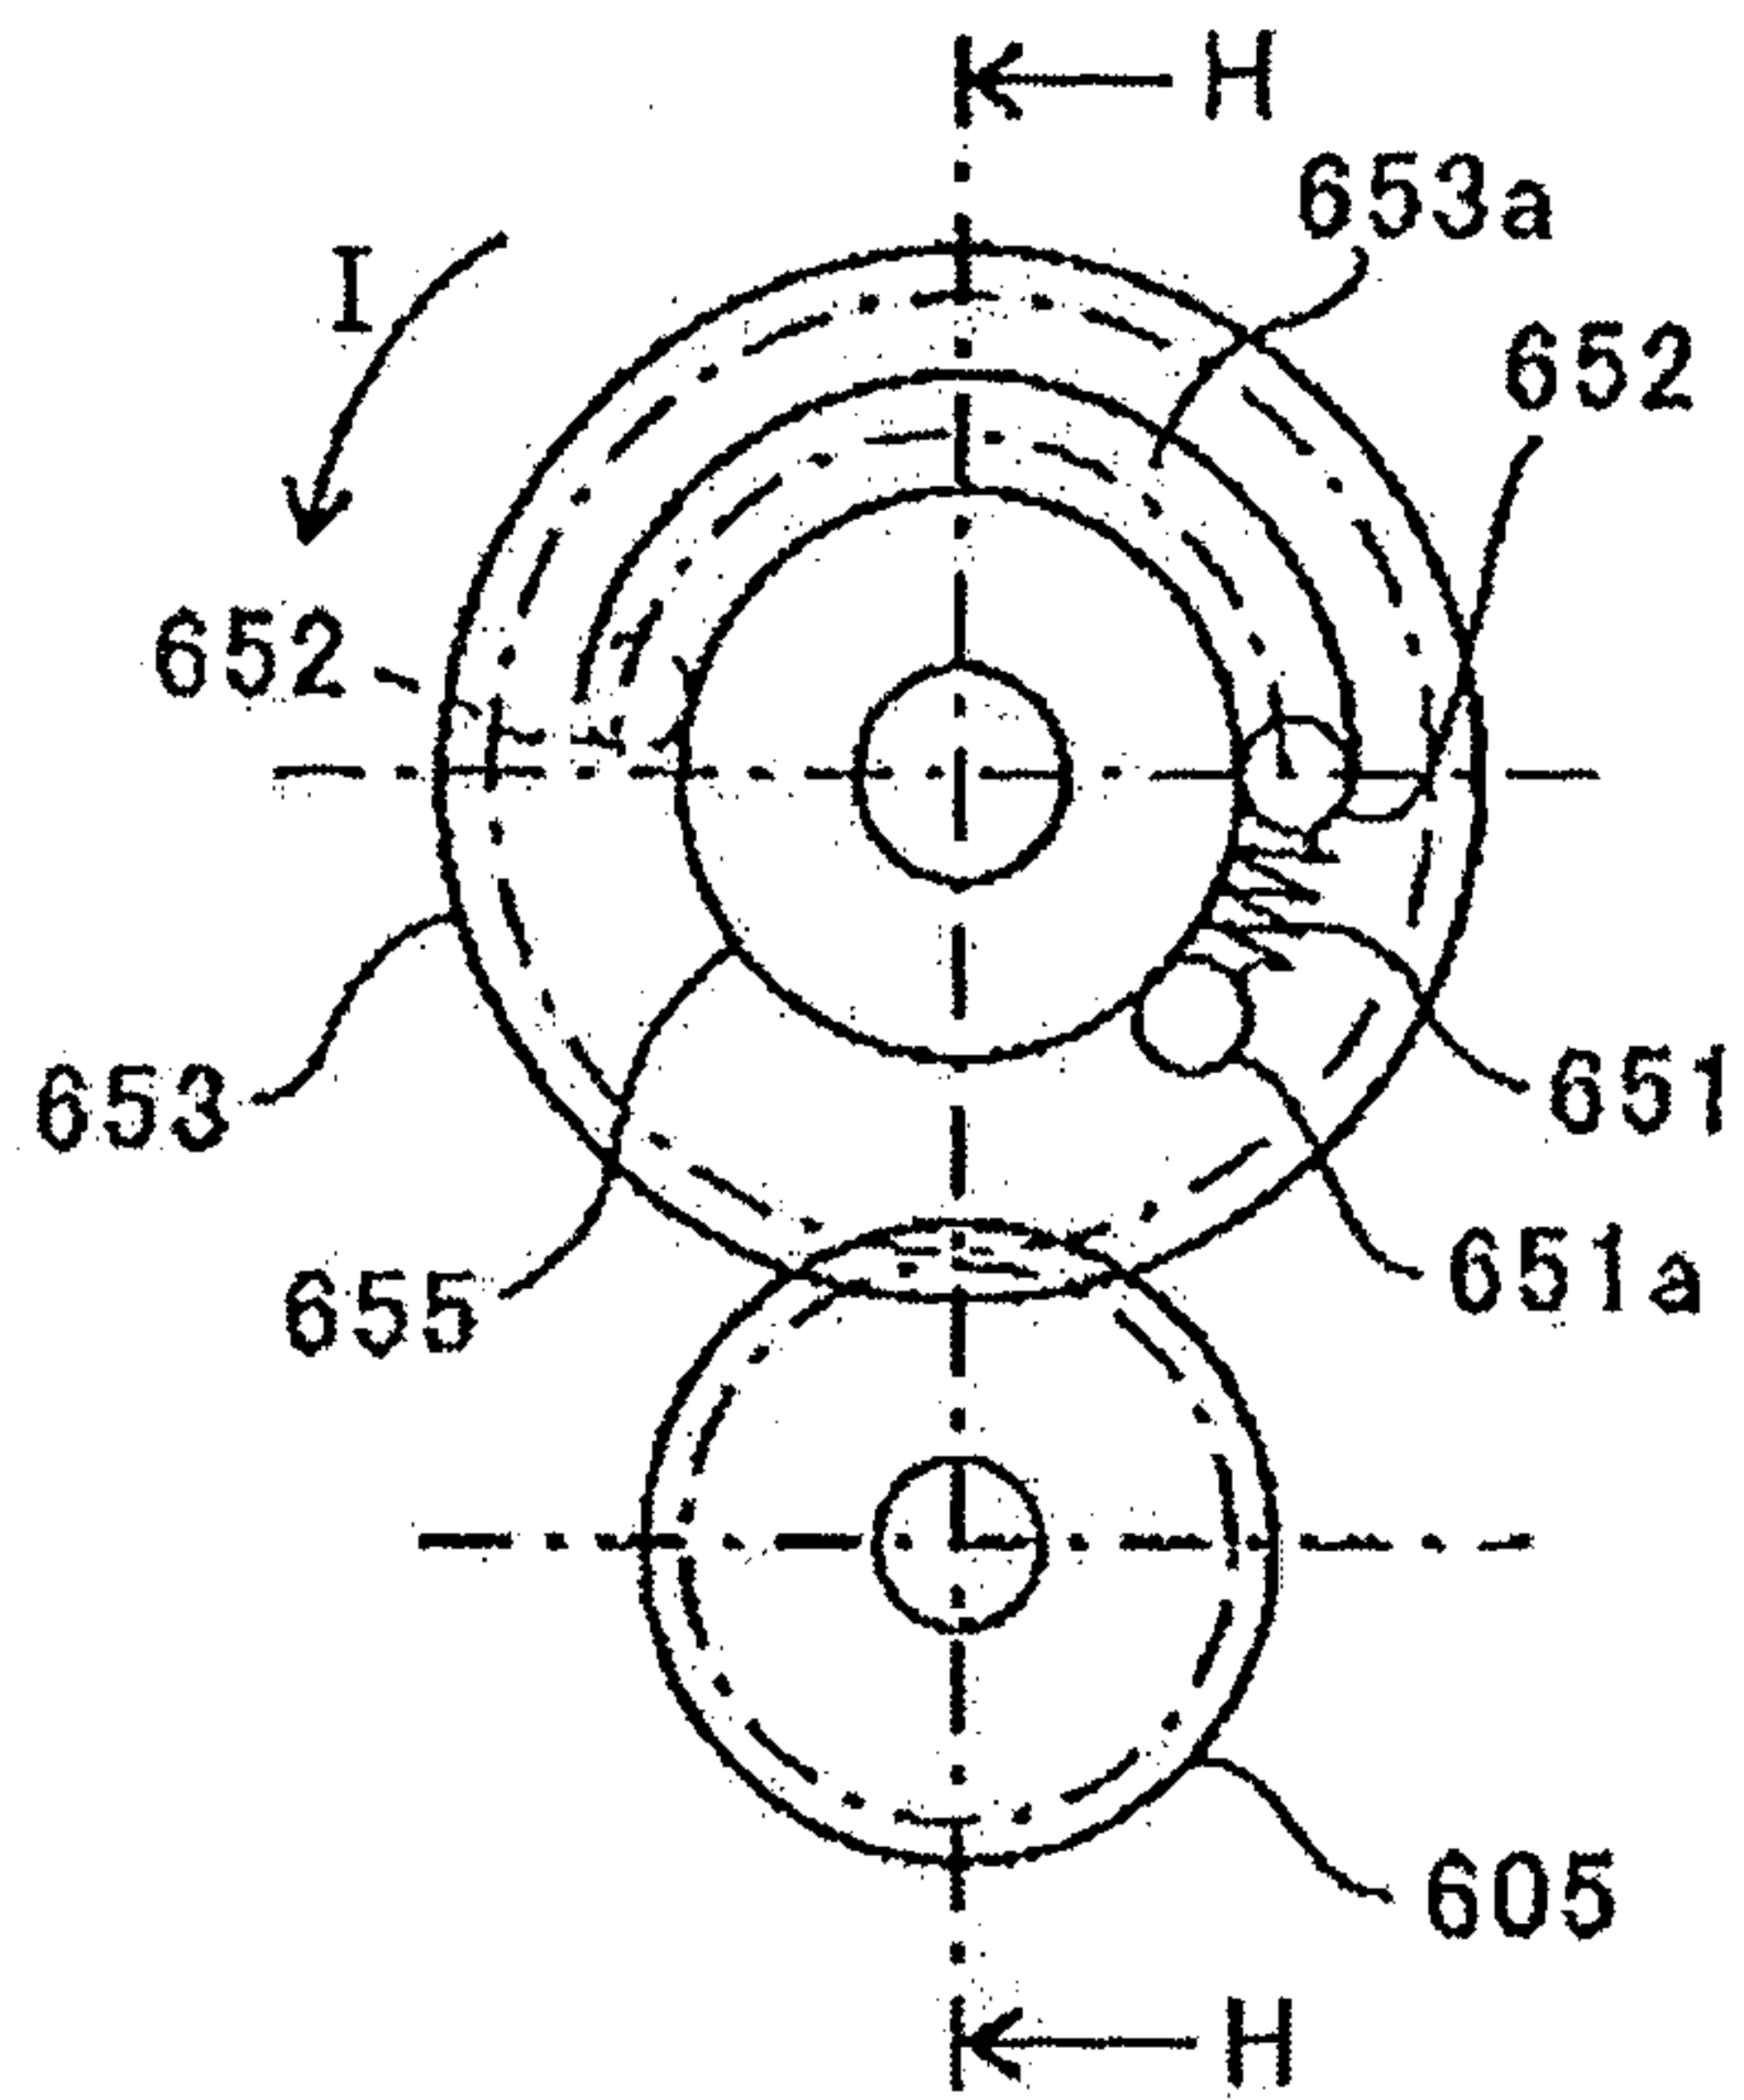


FIG.30B

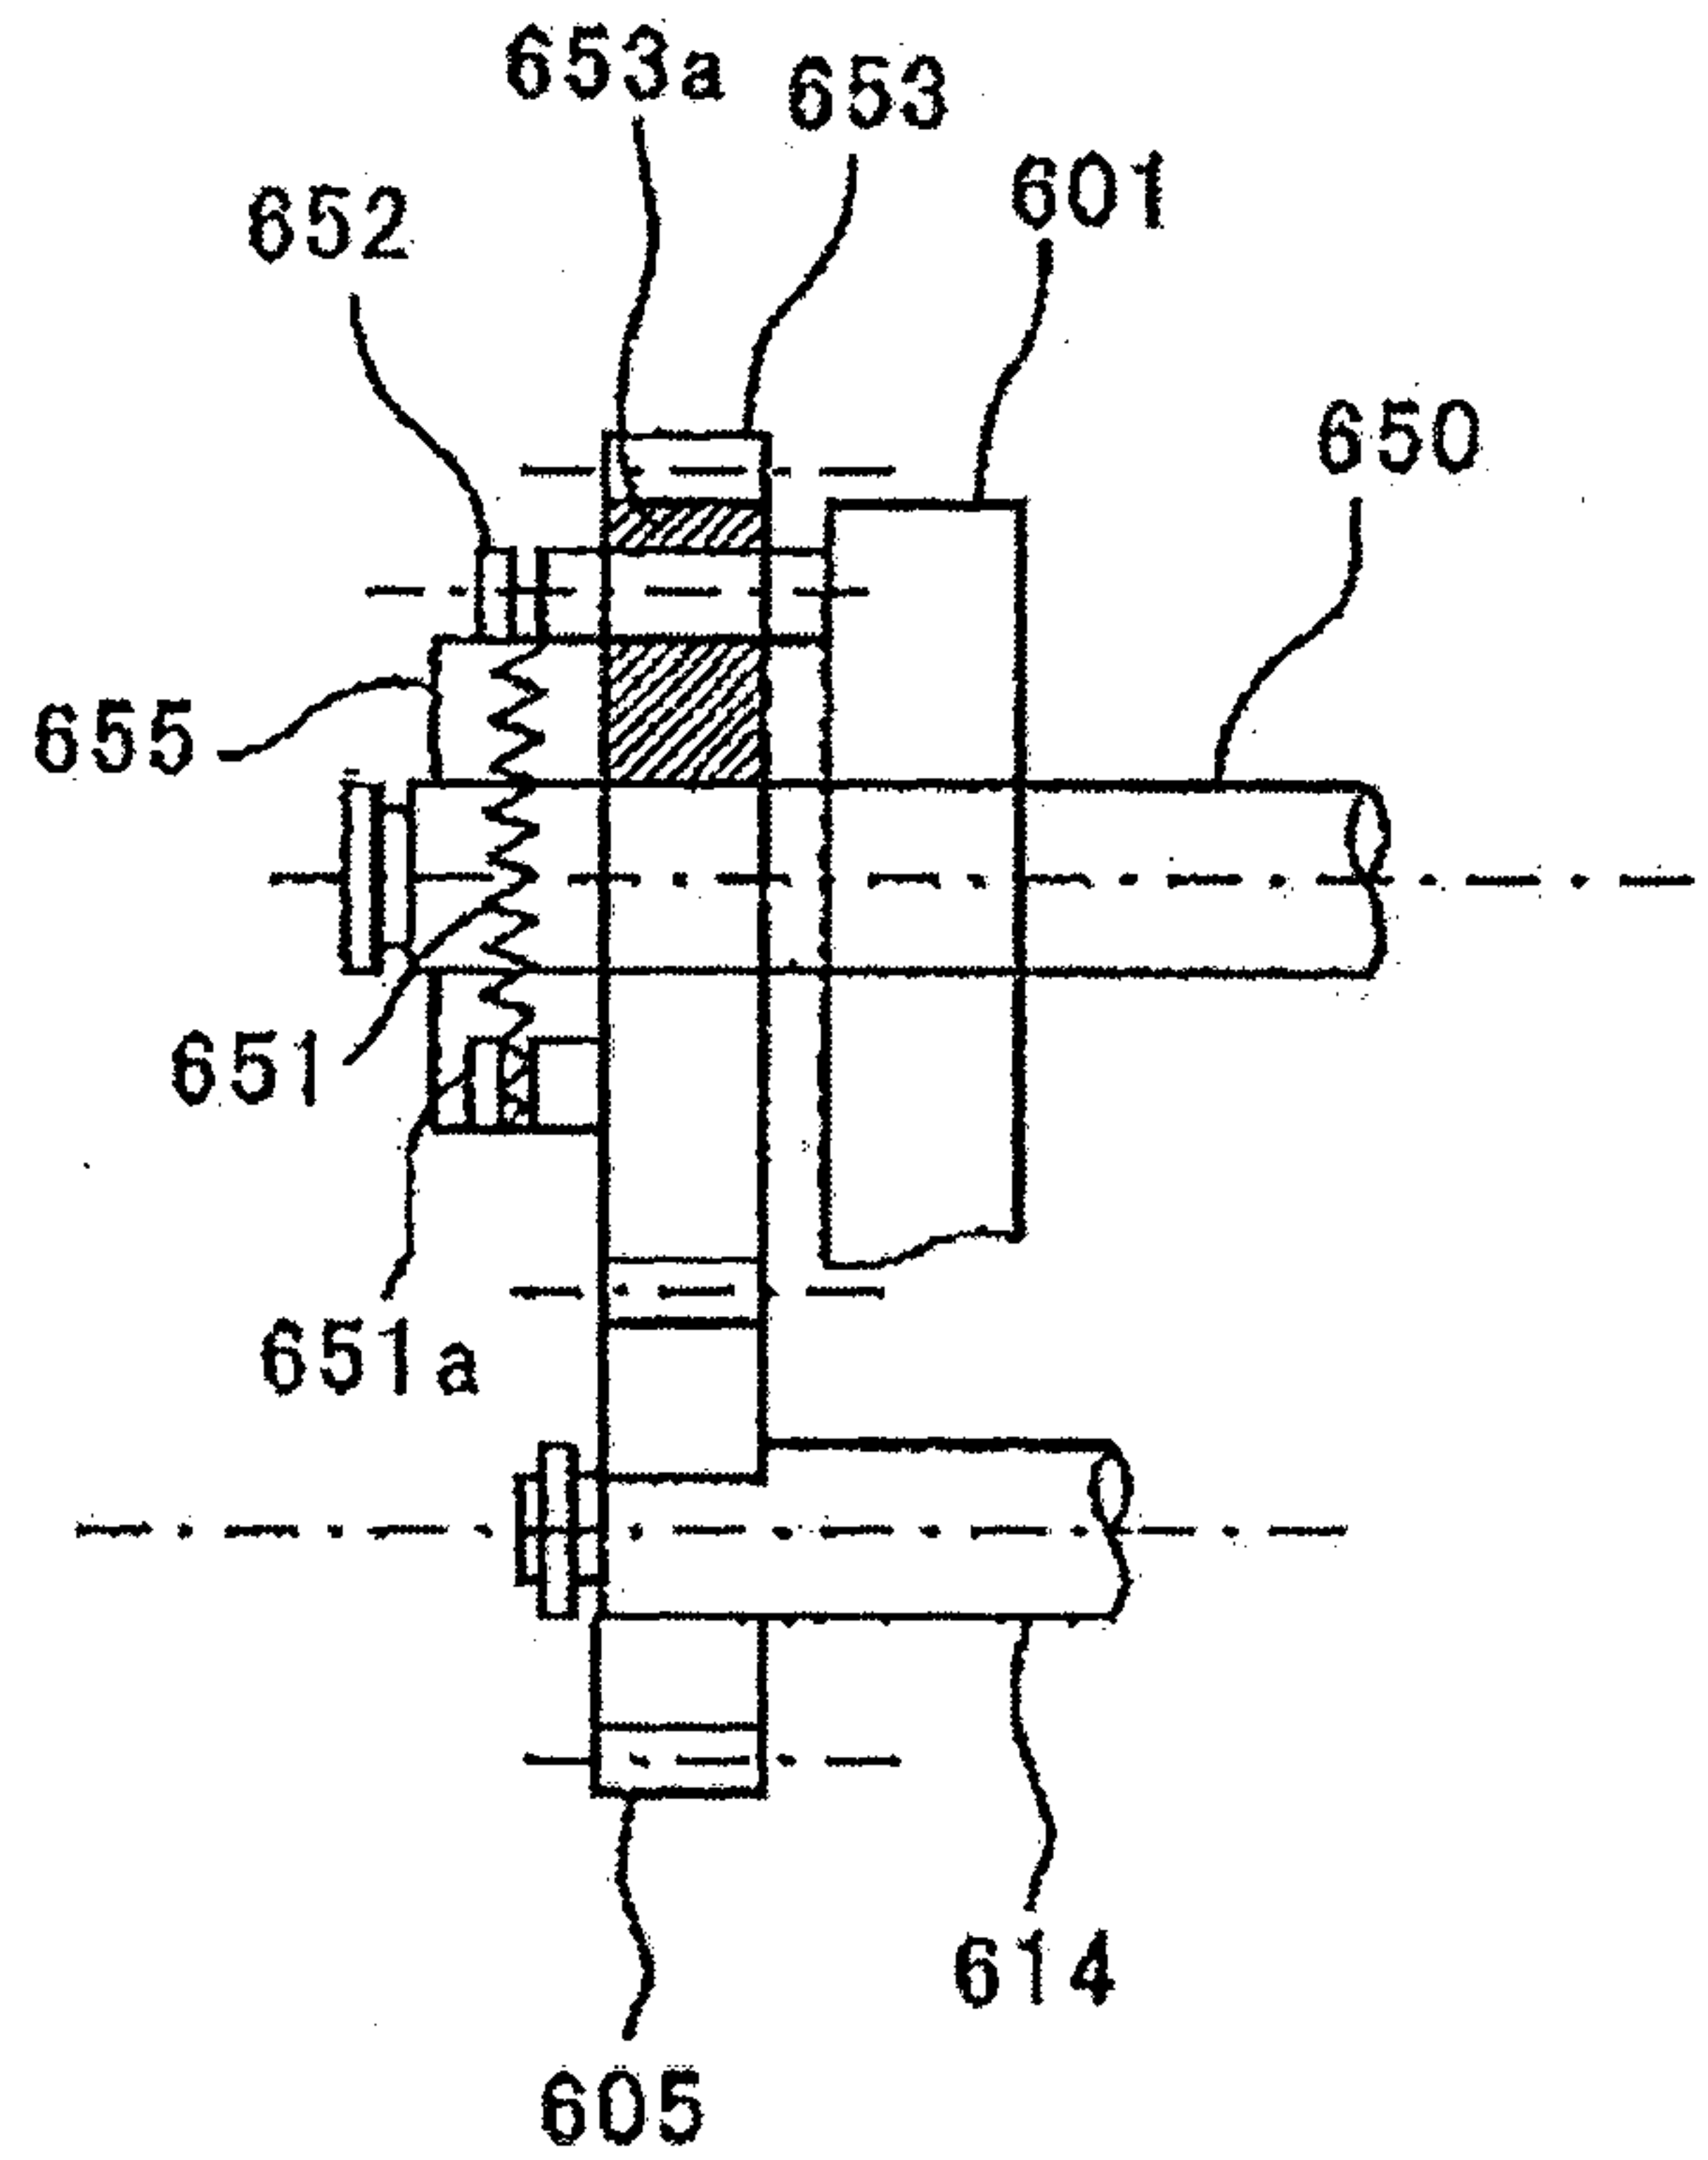


31/66

FIG.31

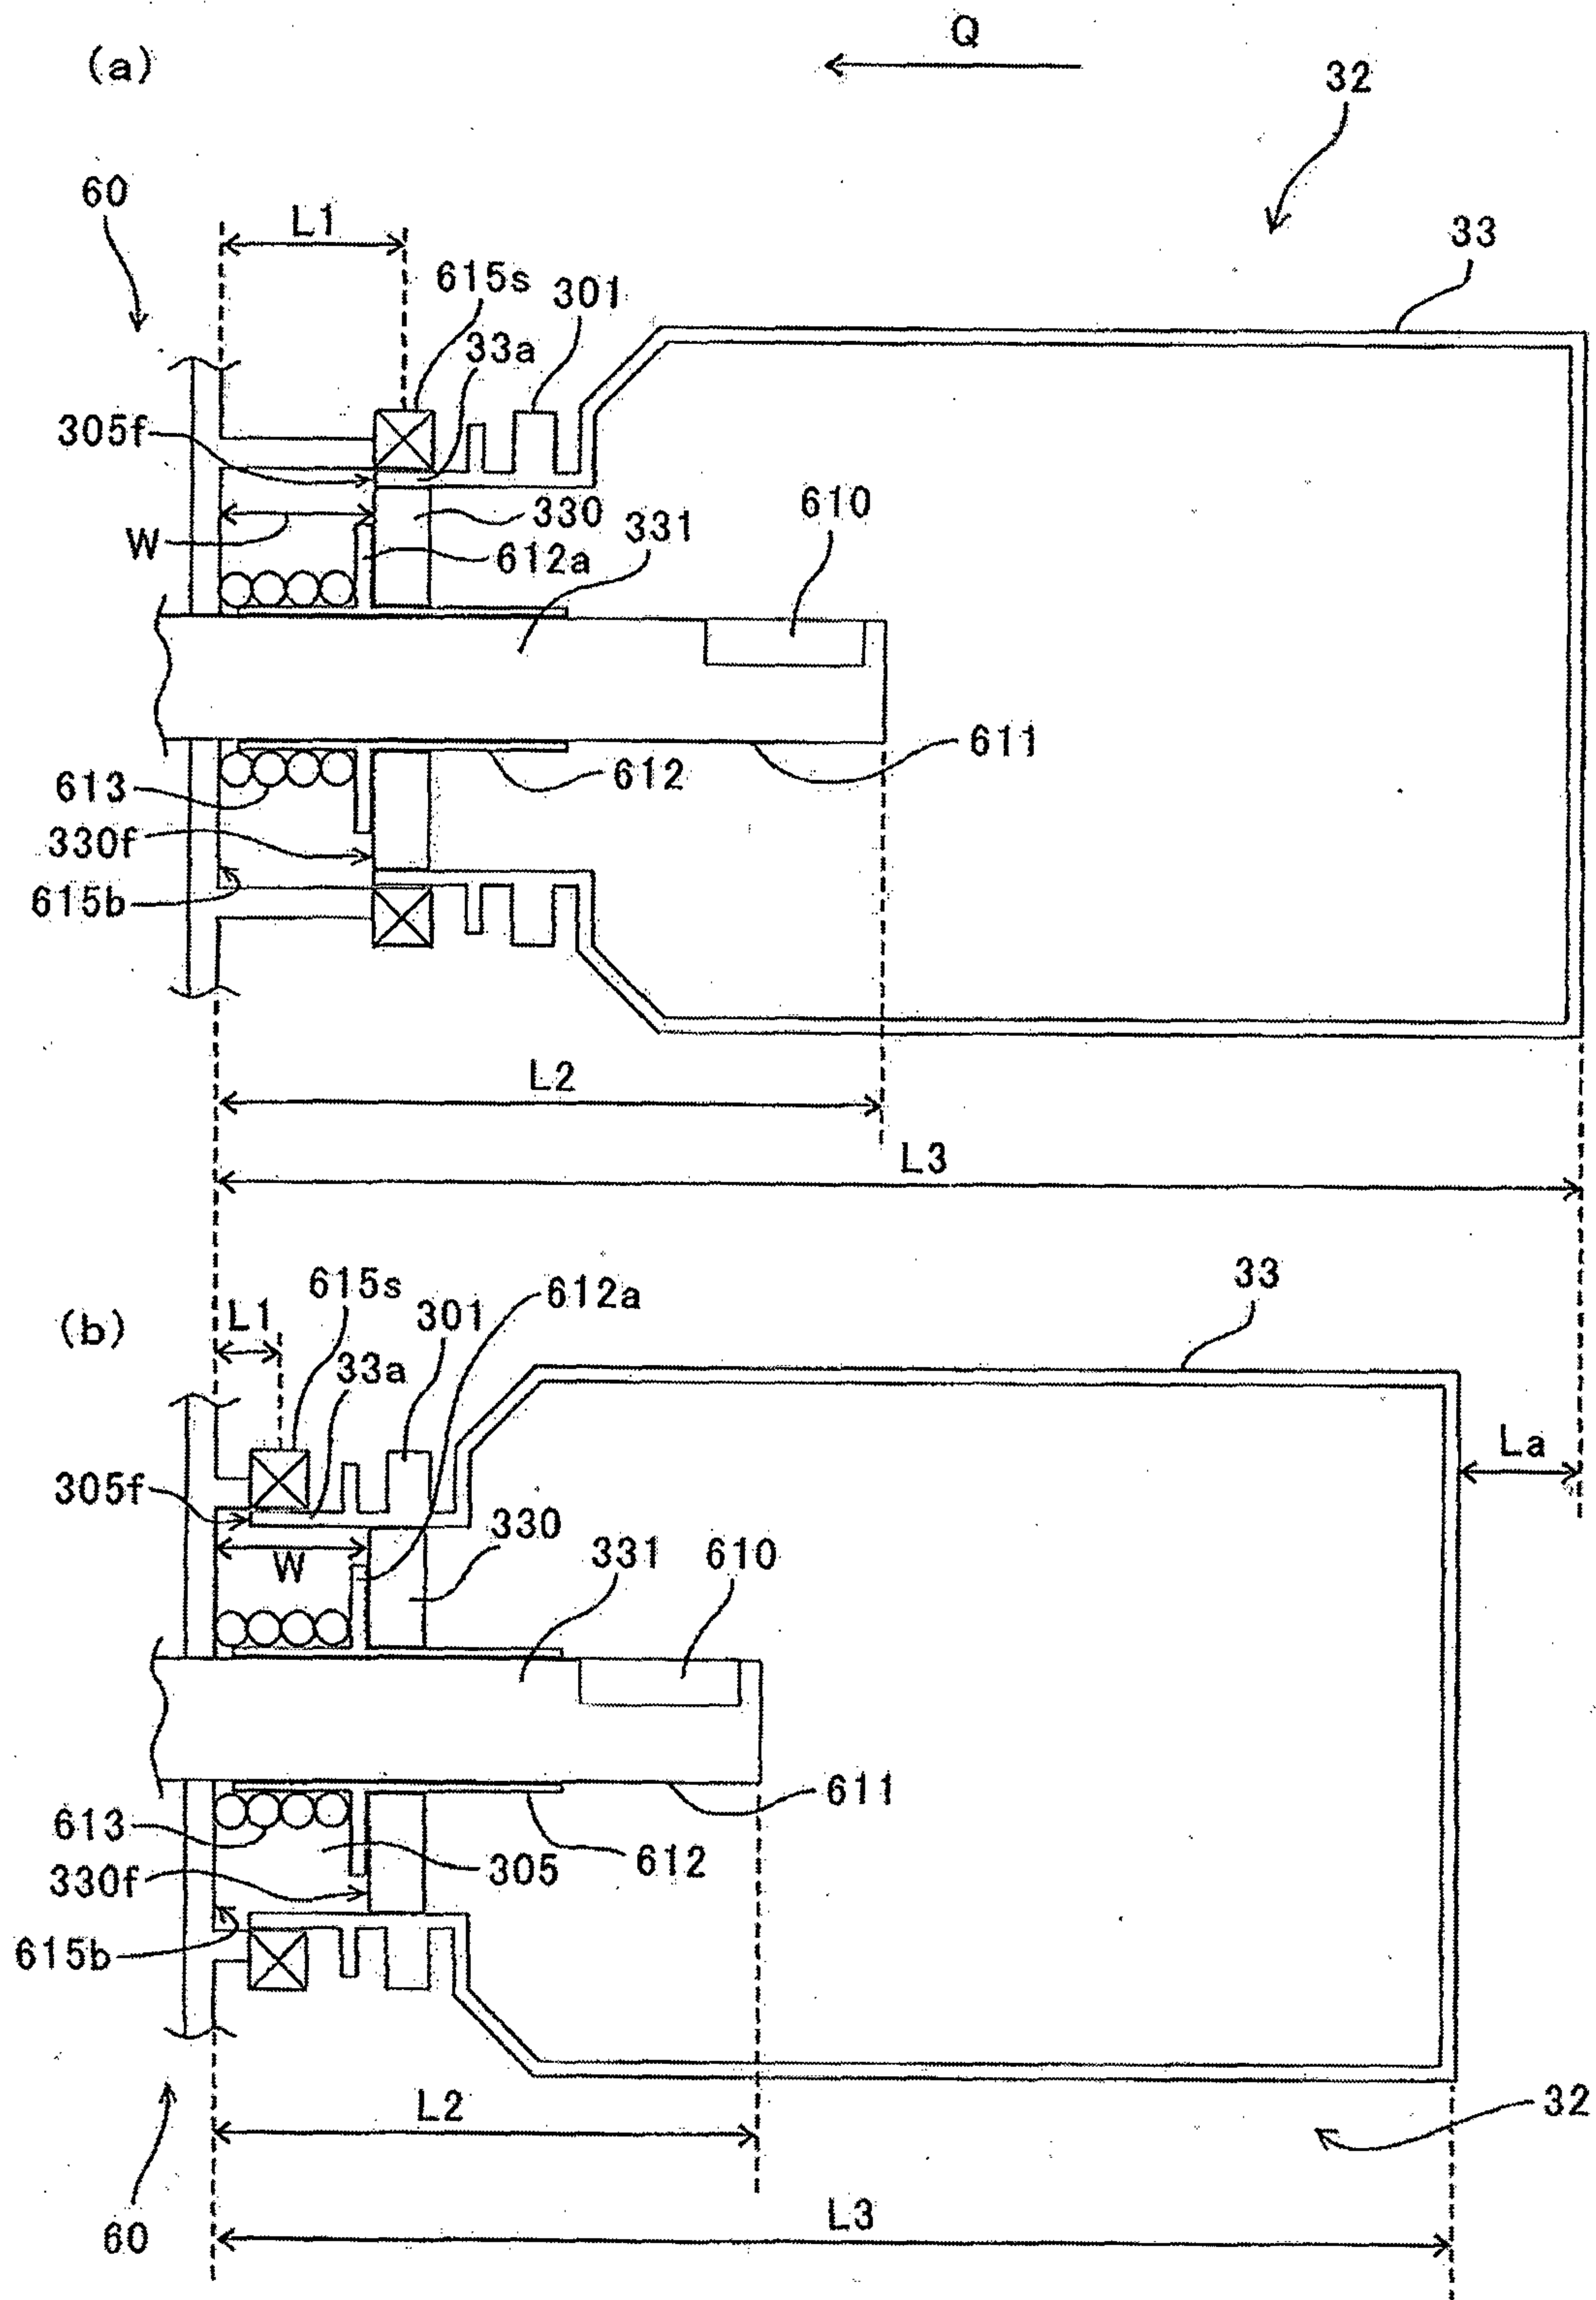


32/66

FIG.32

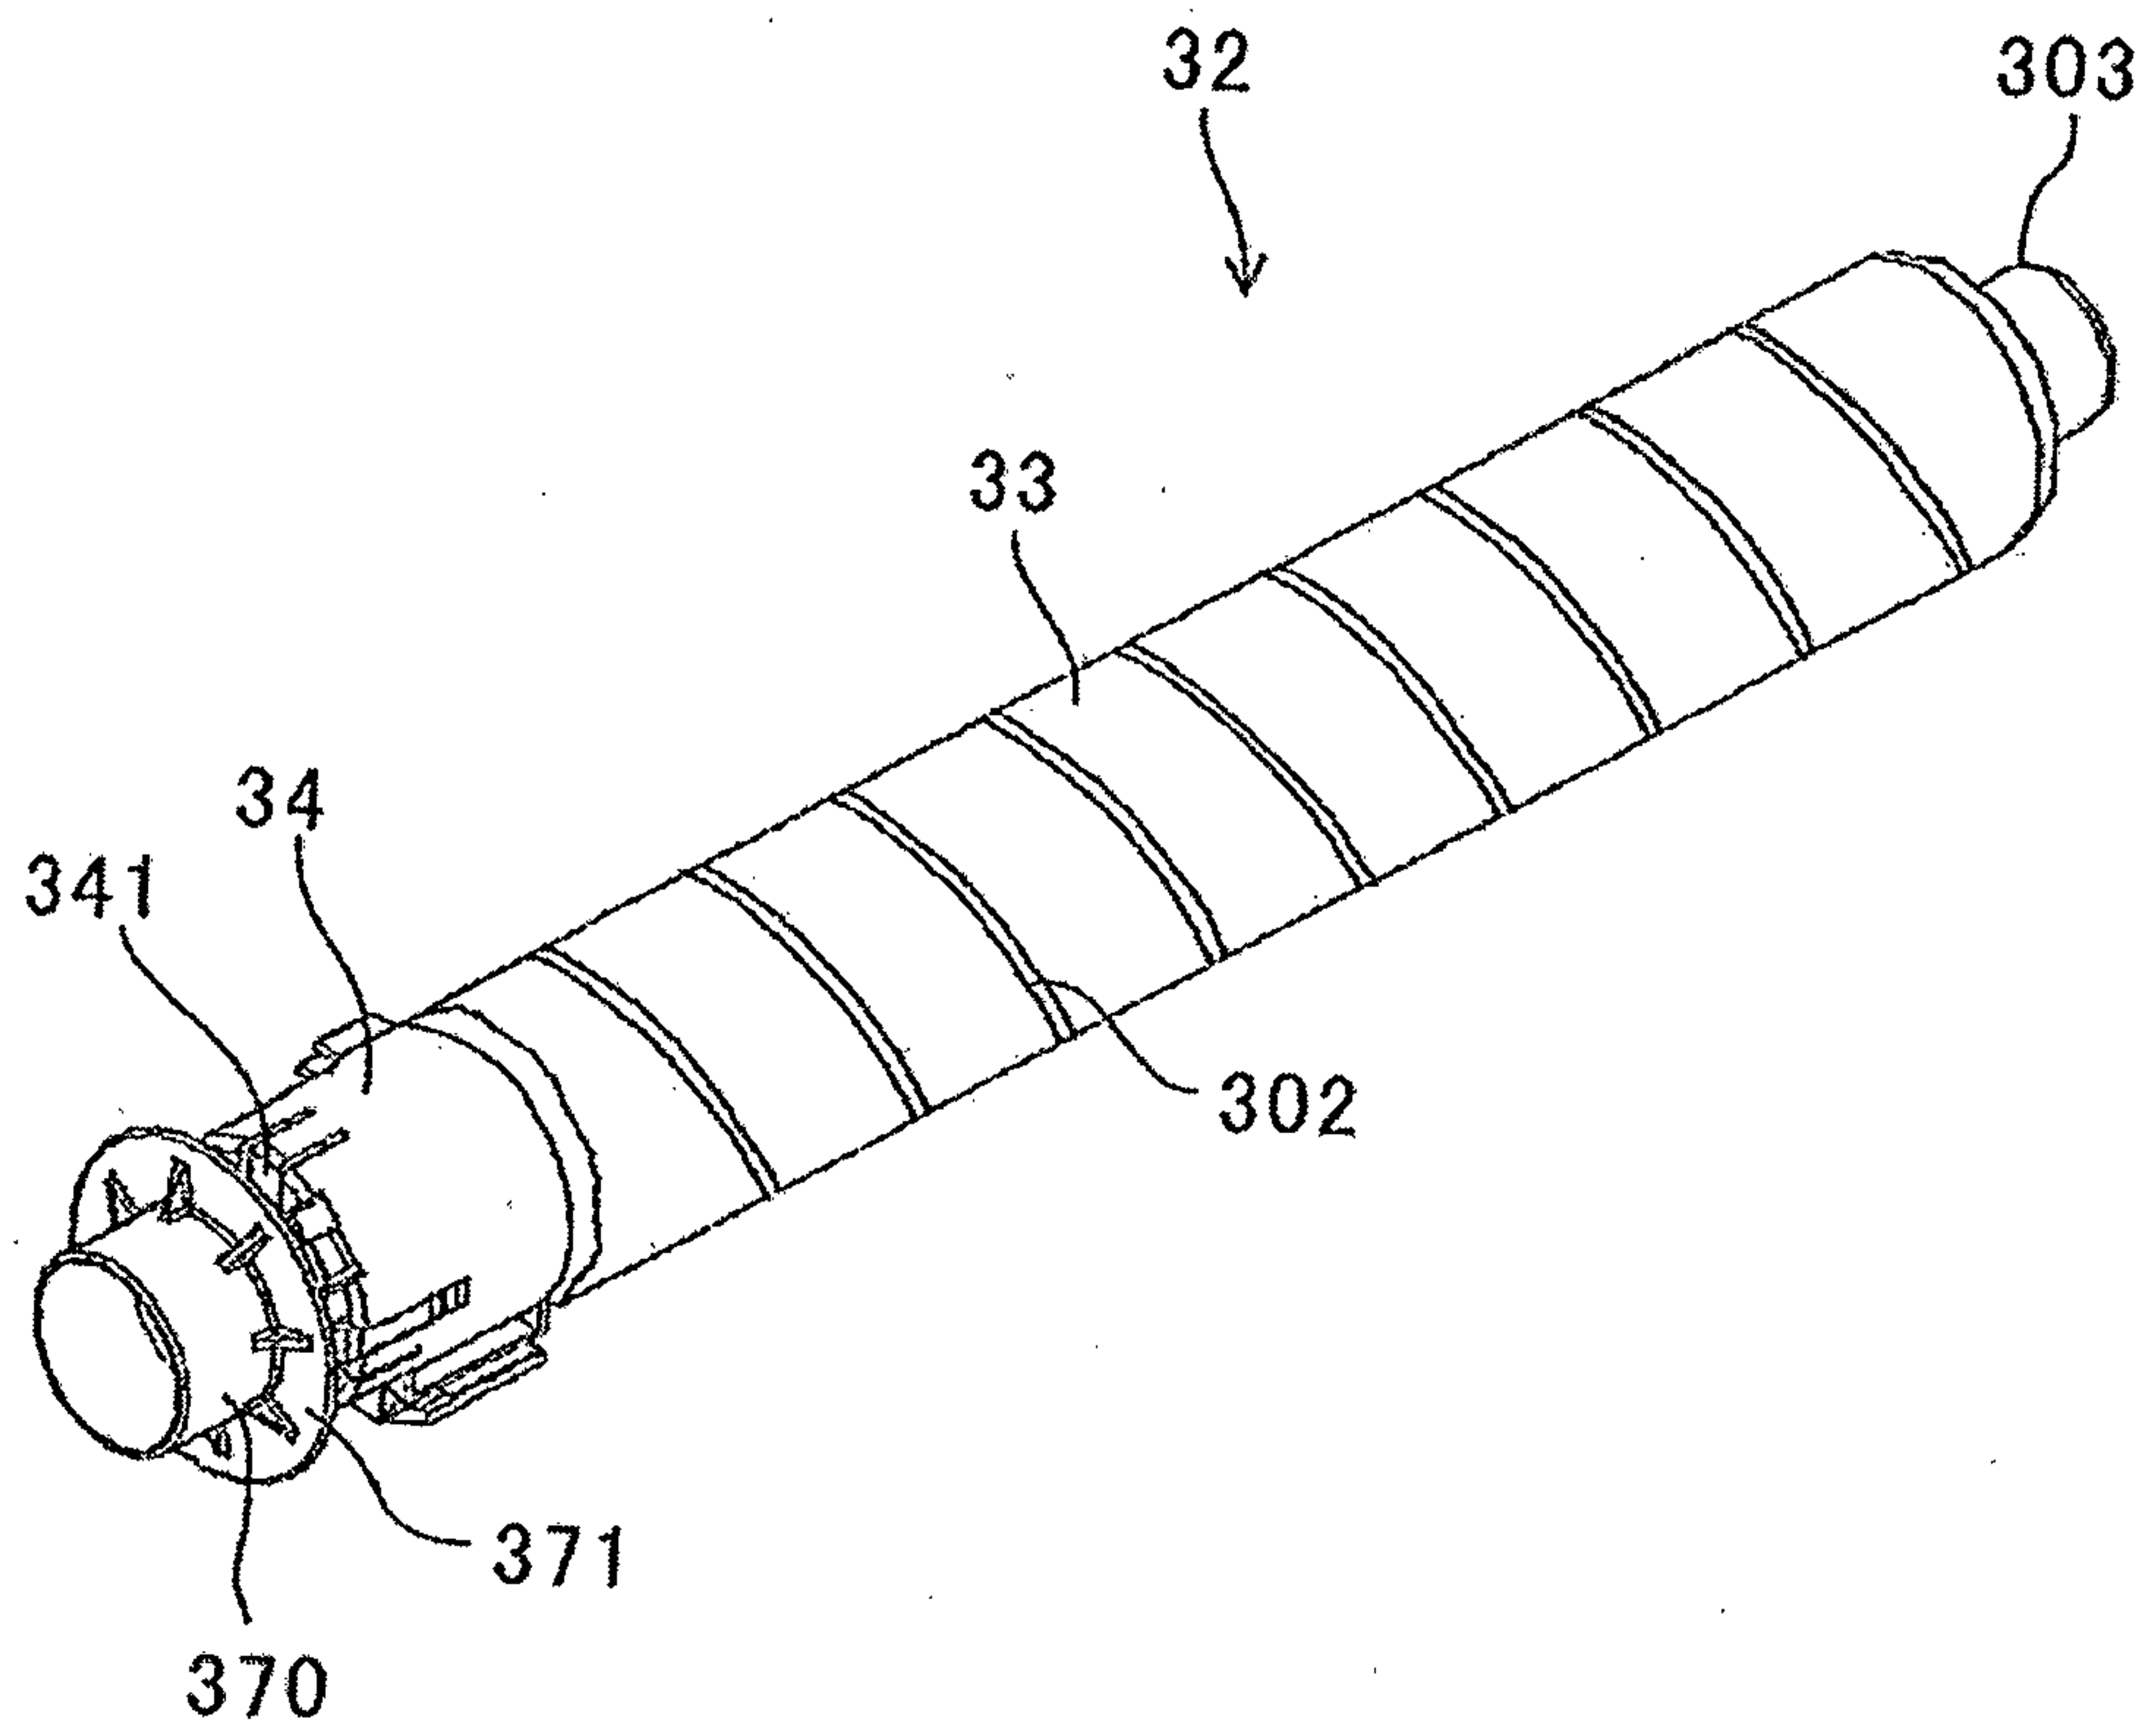


33/66

FIG.33

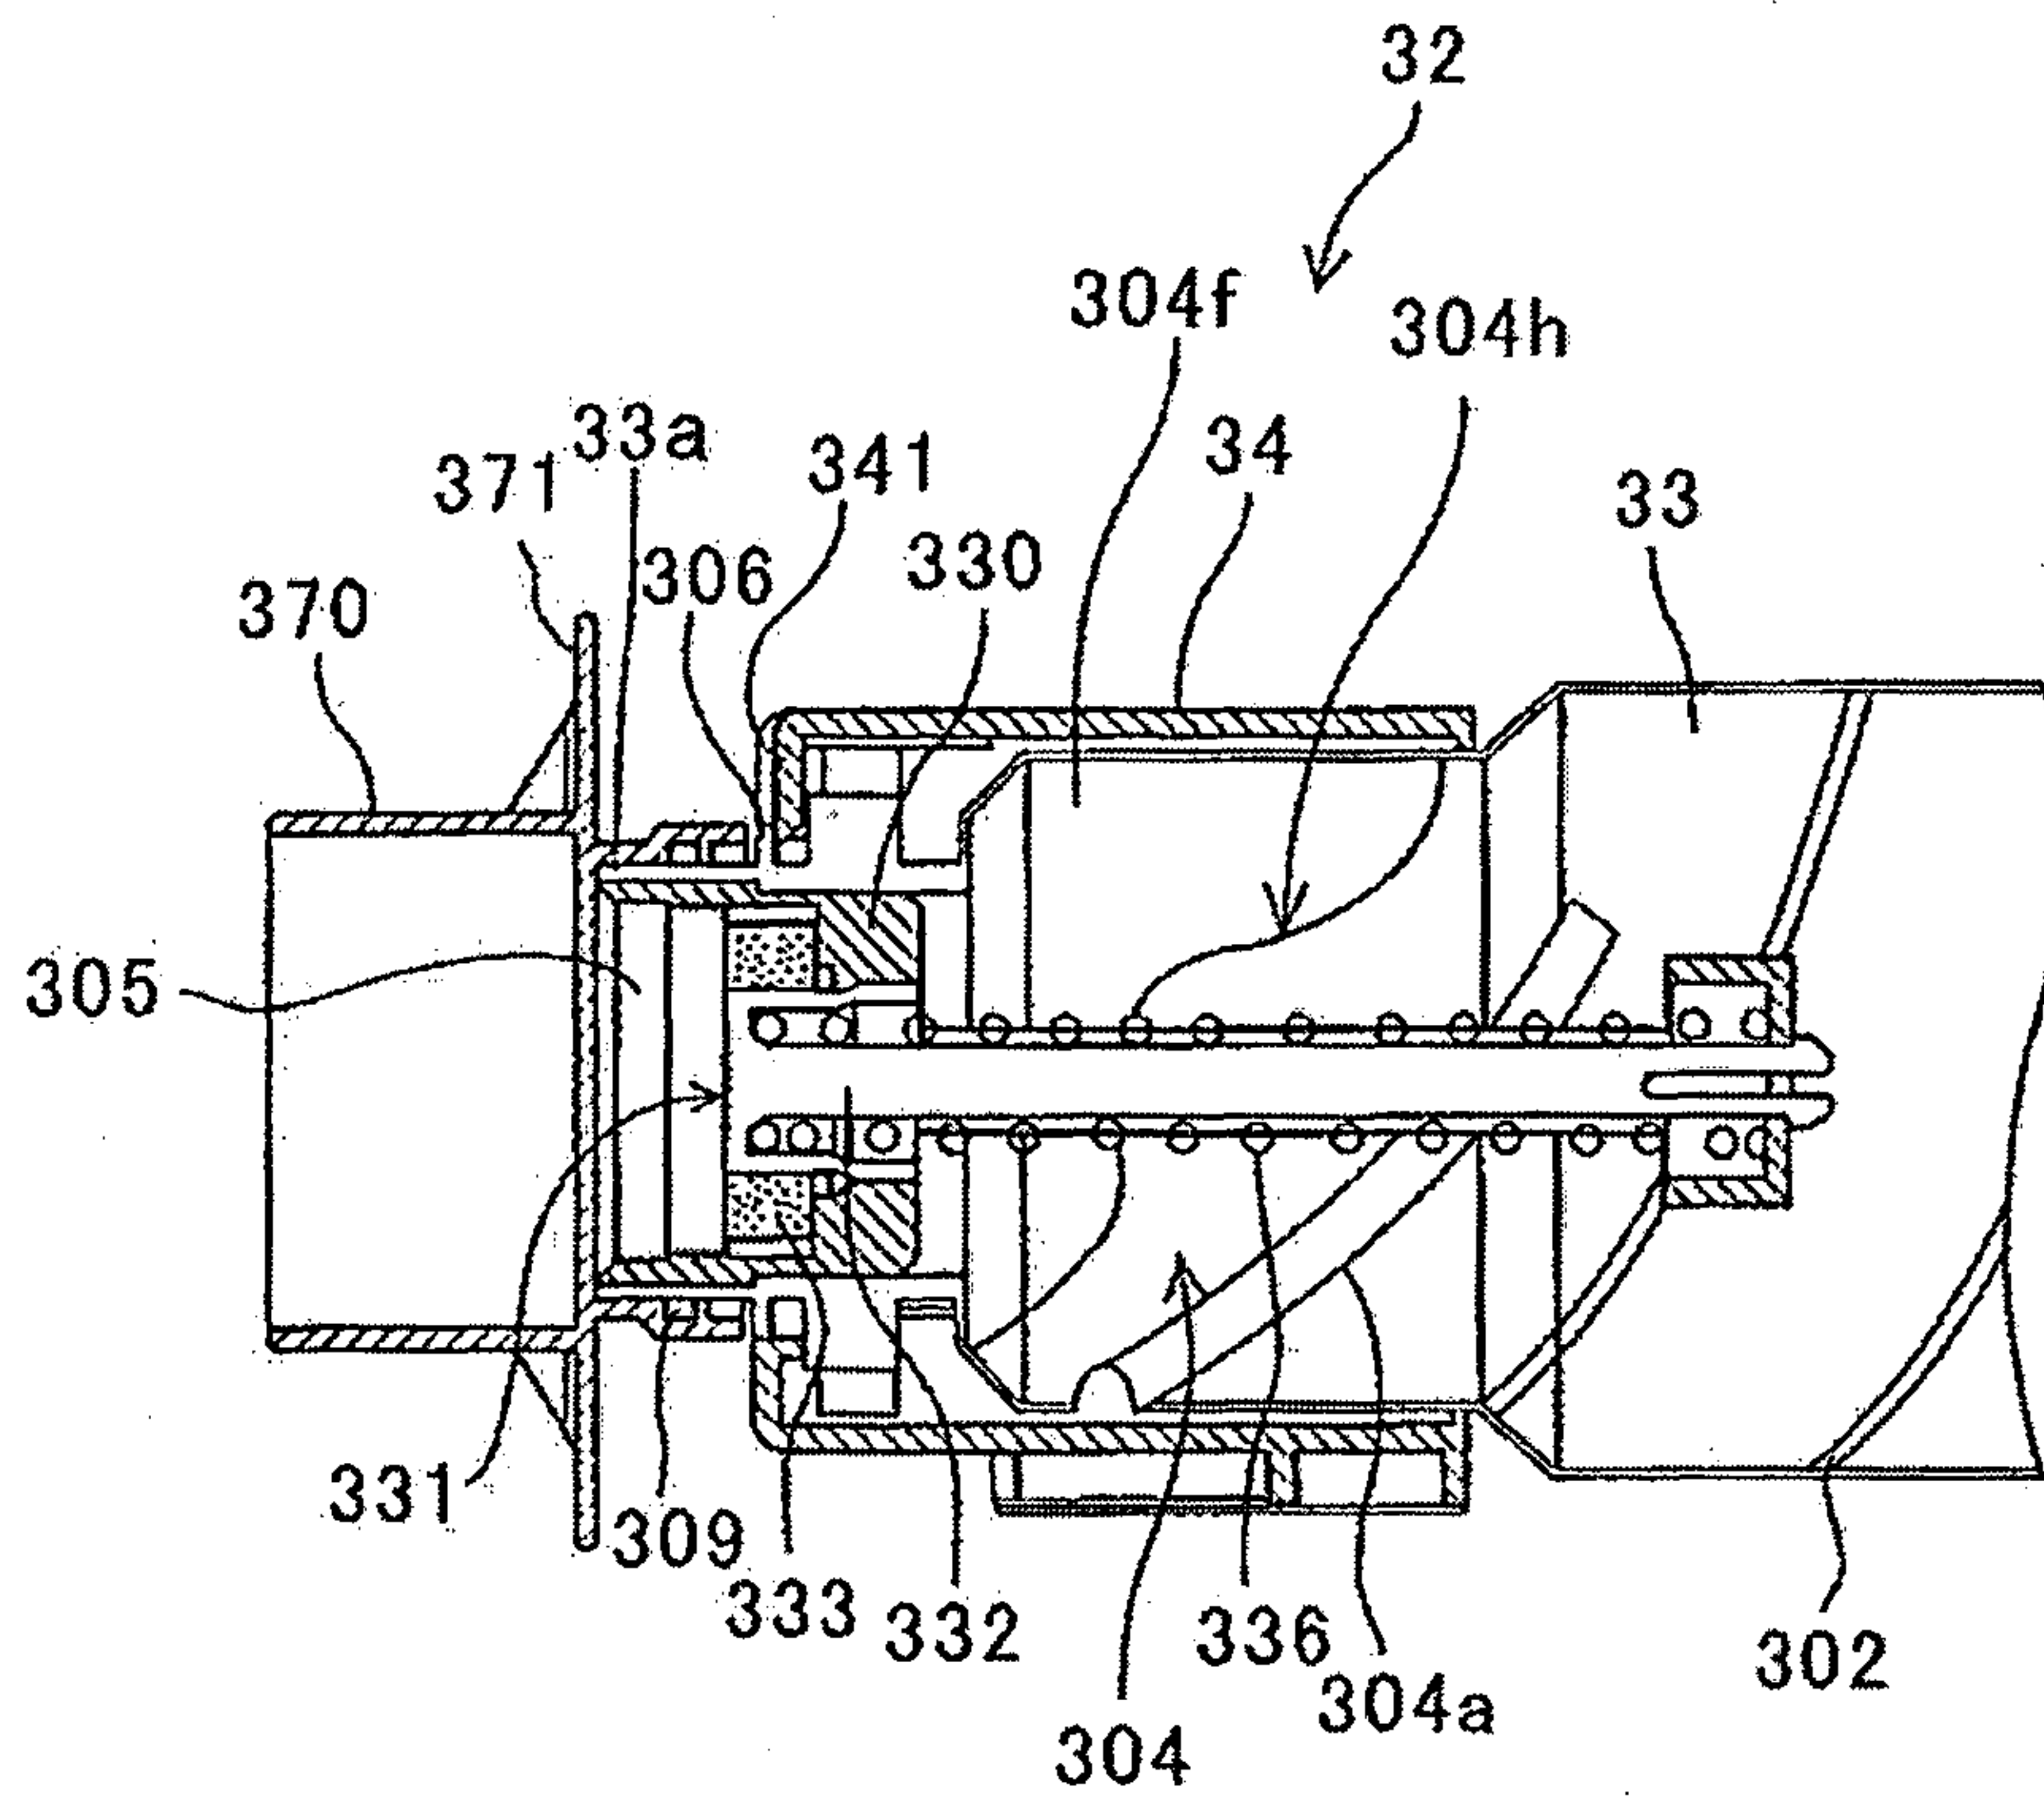


34/66

FIG.34

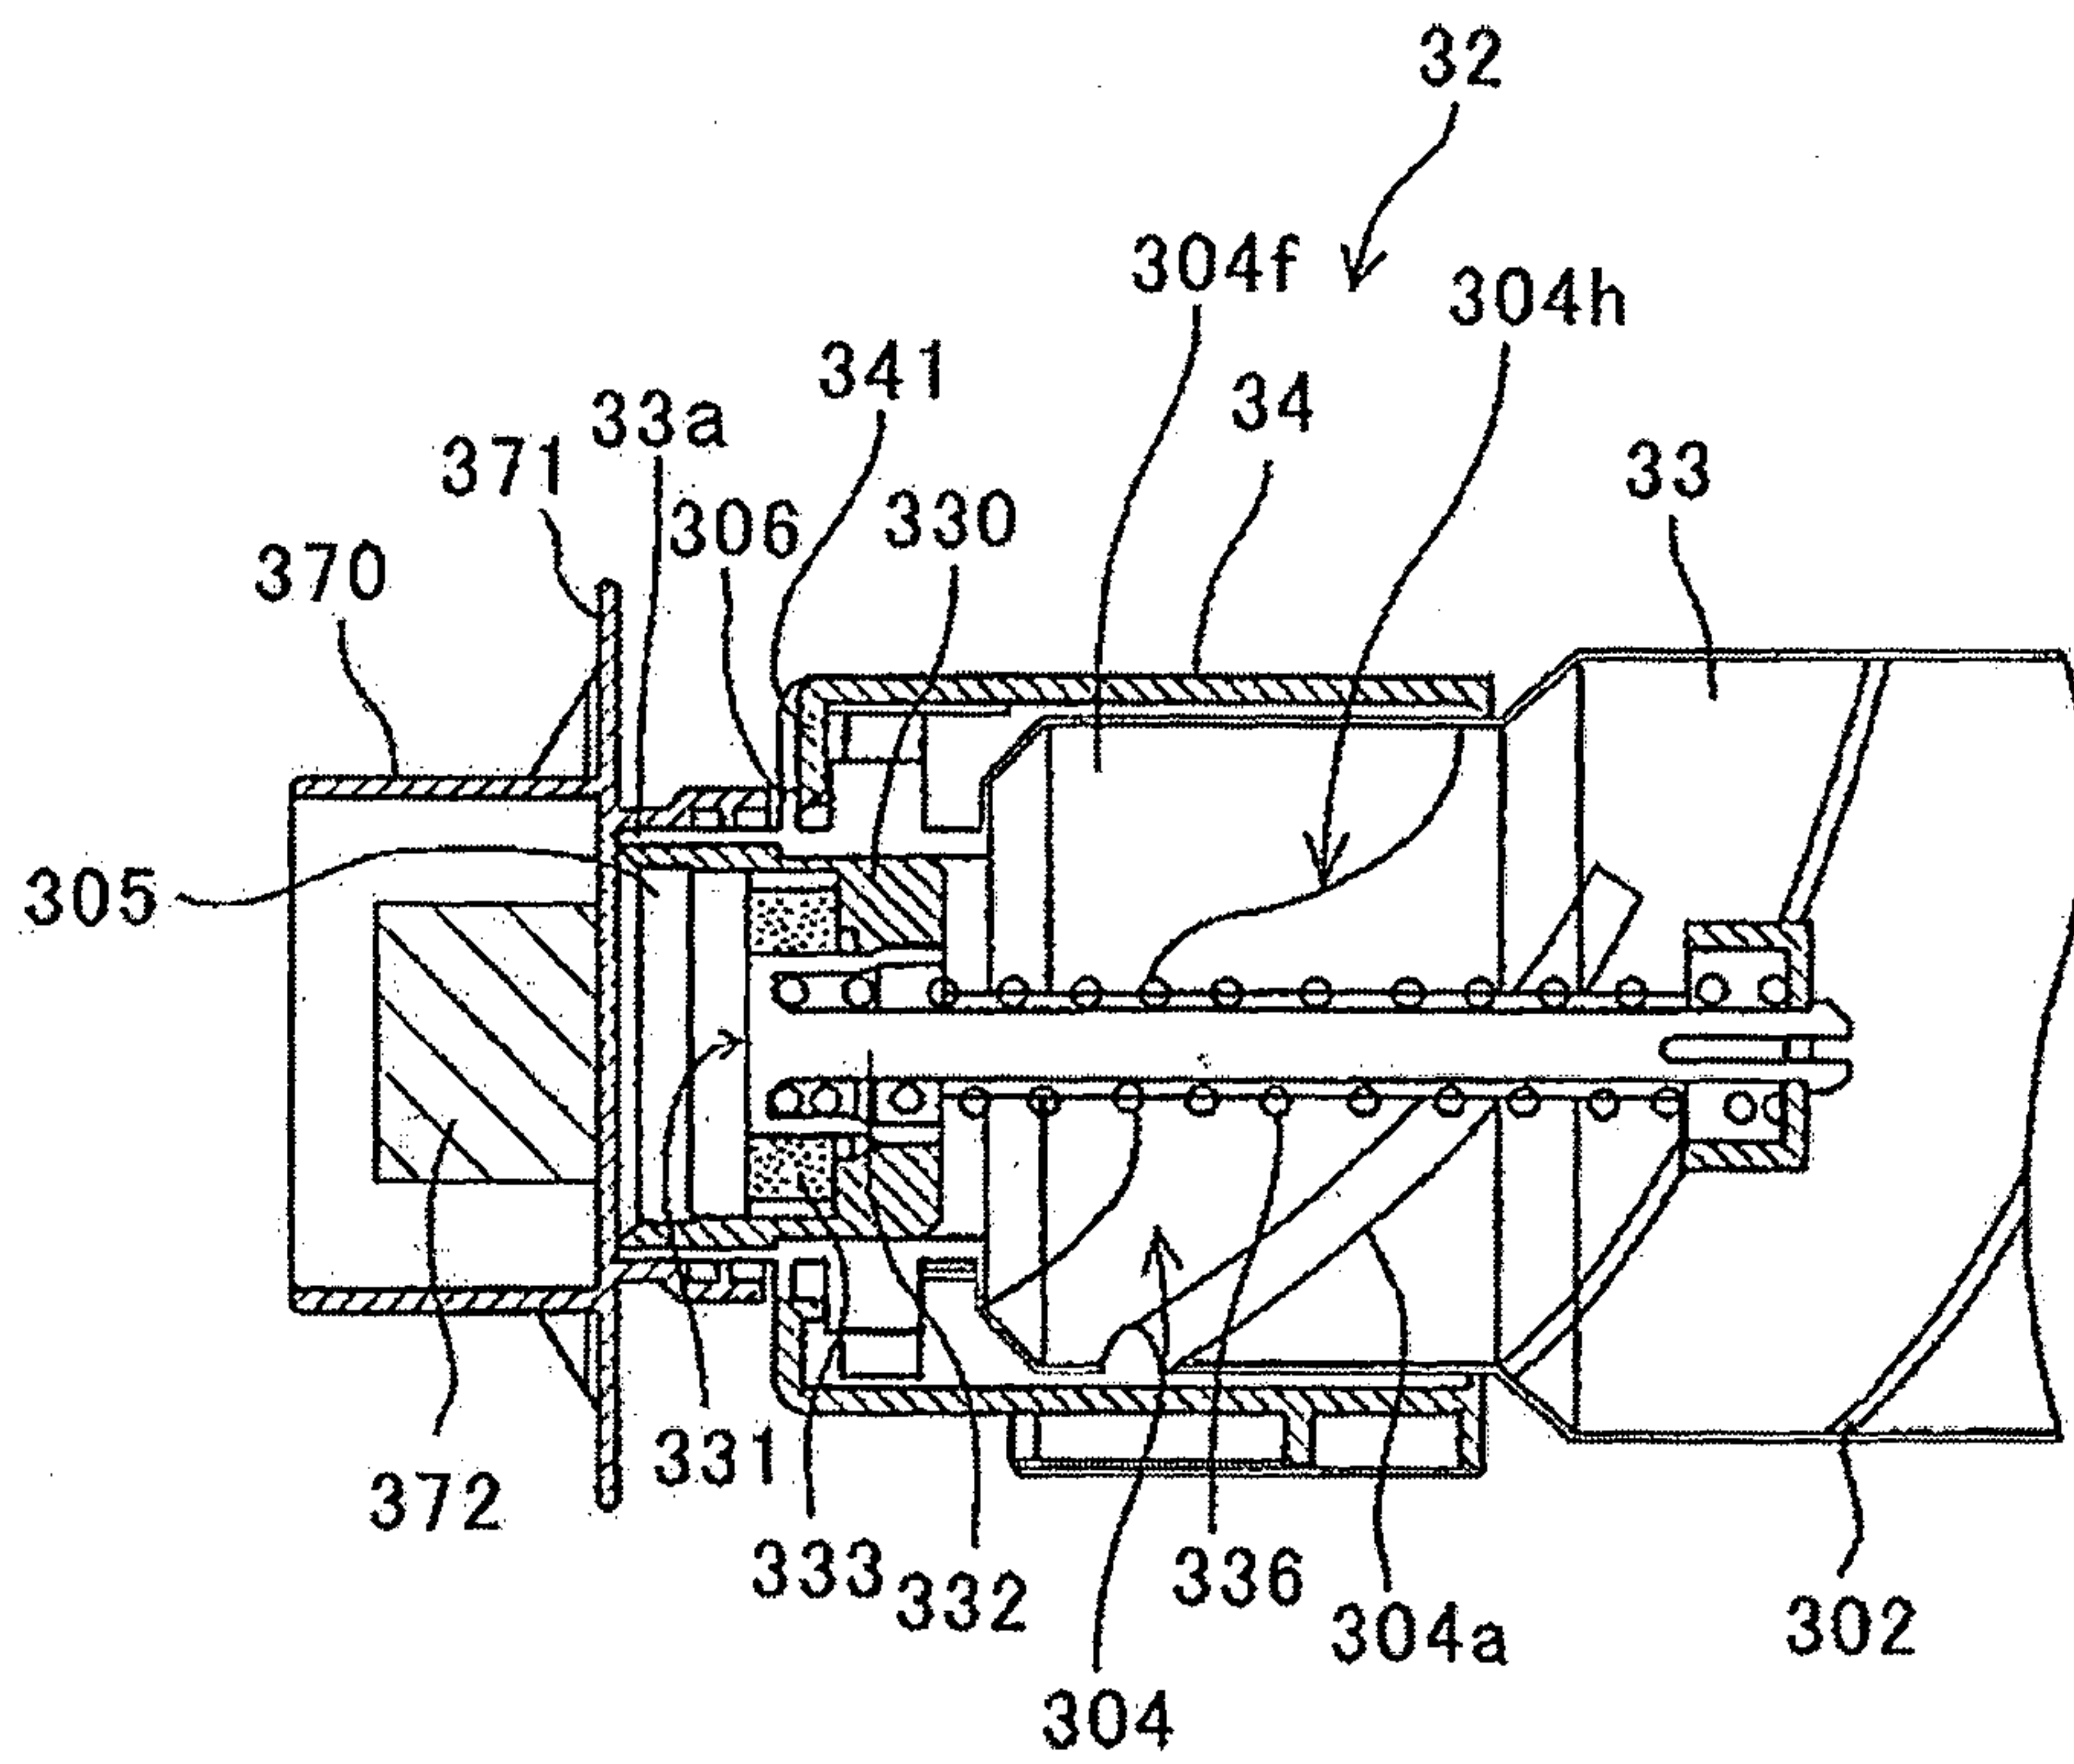


35/66

FIG.35

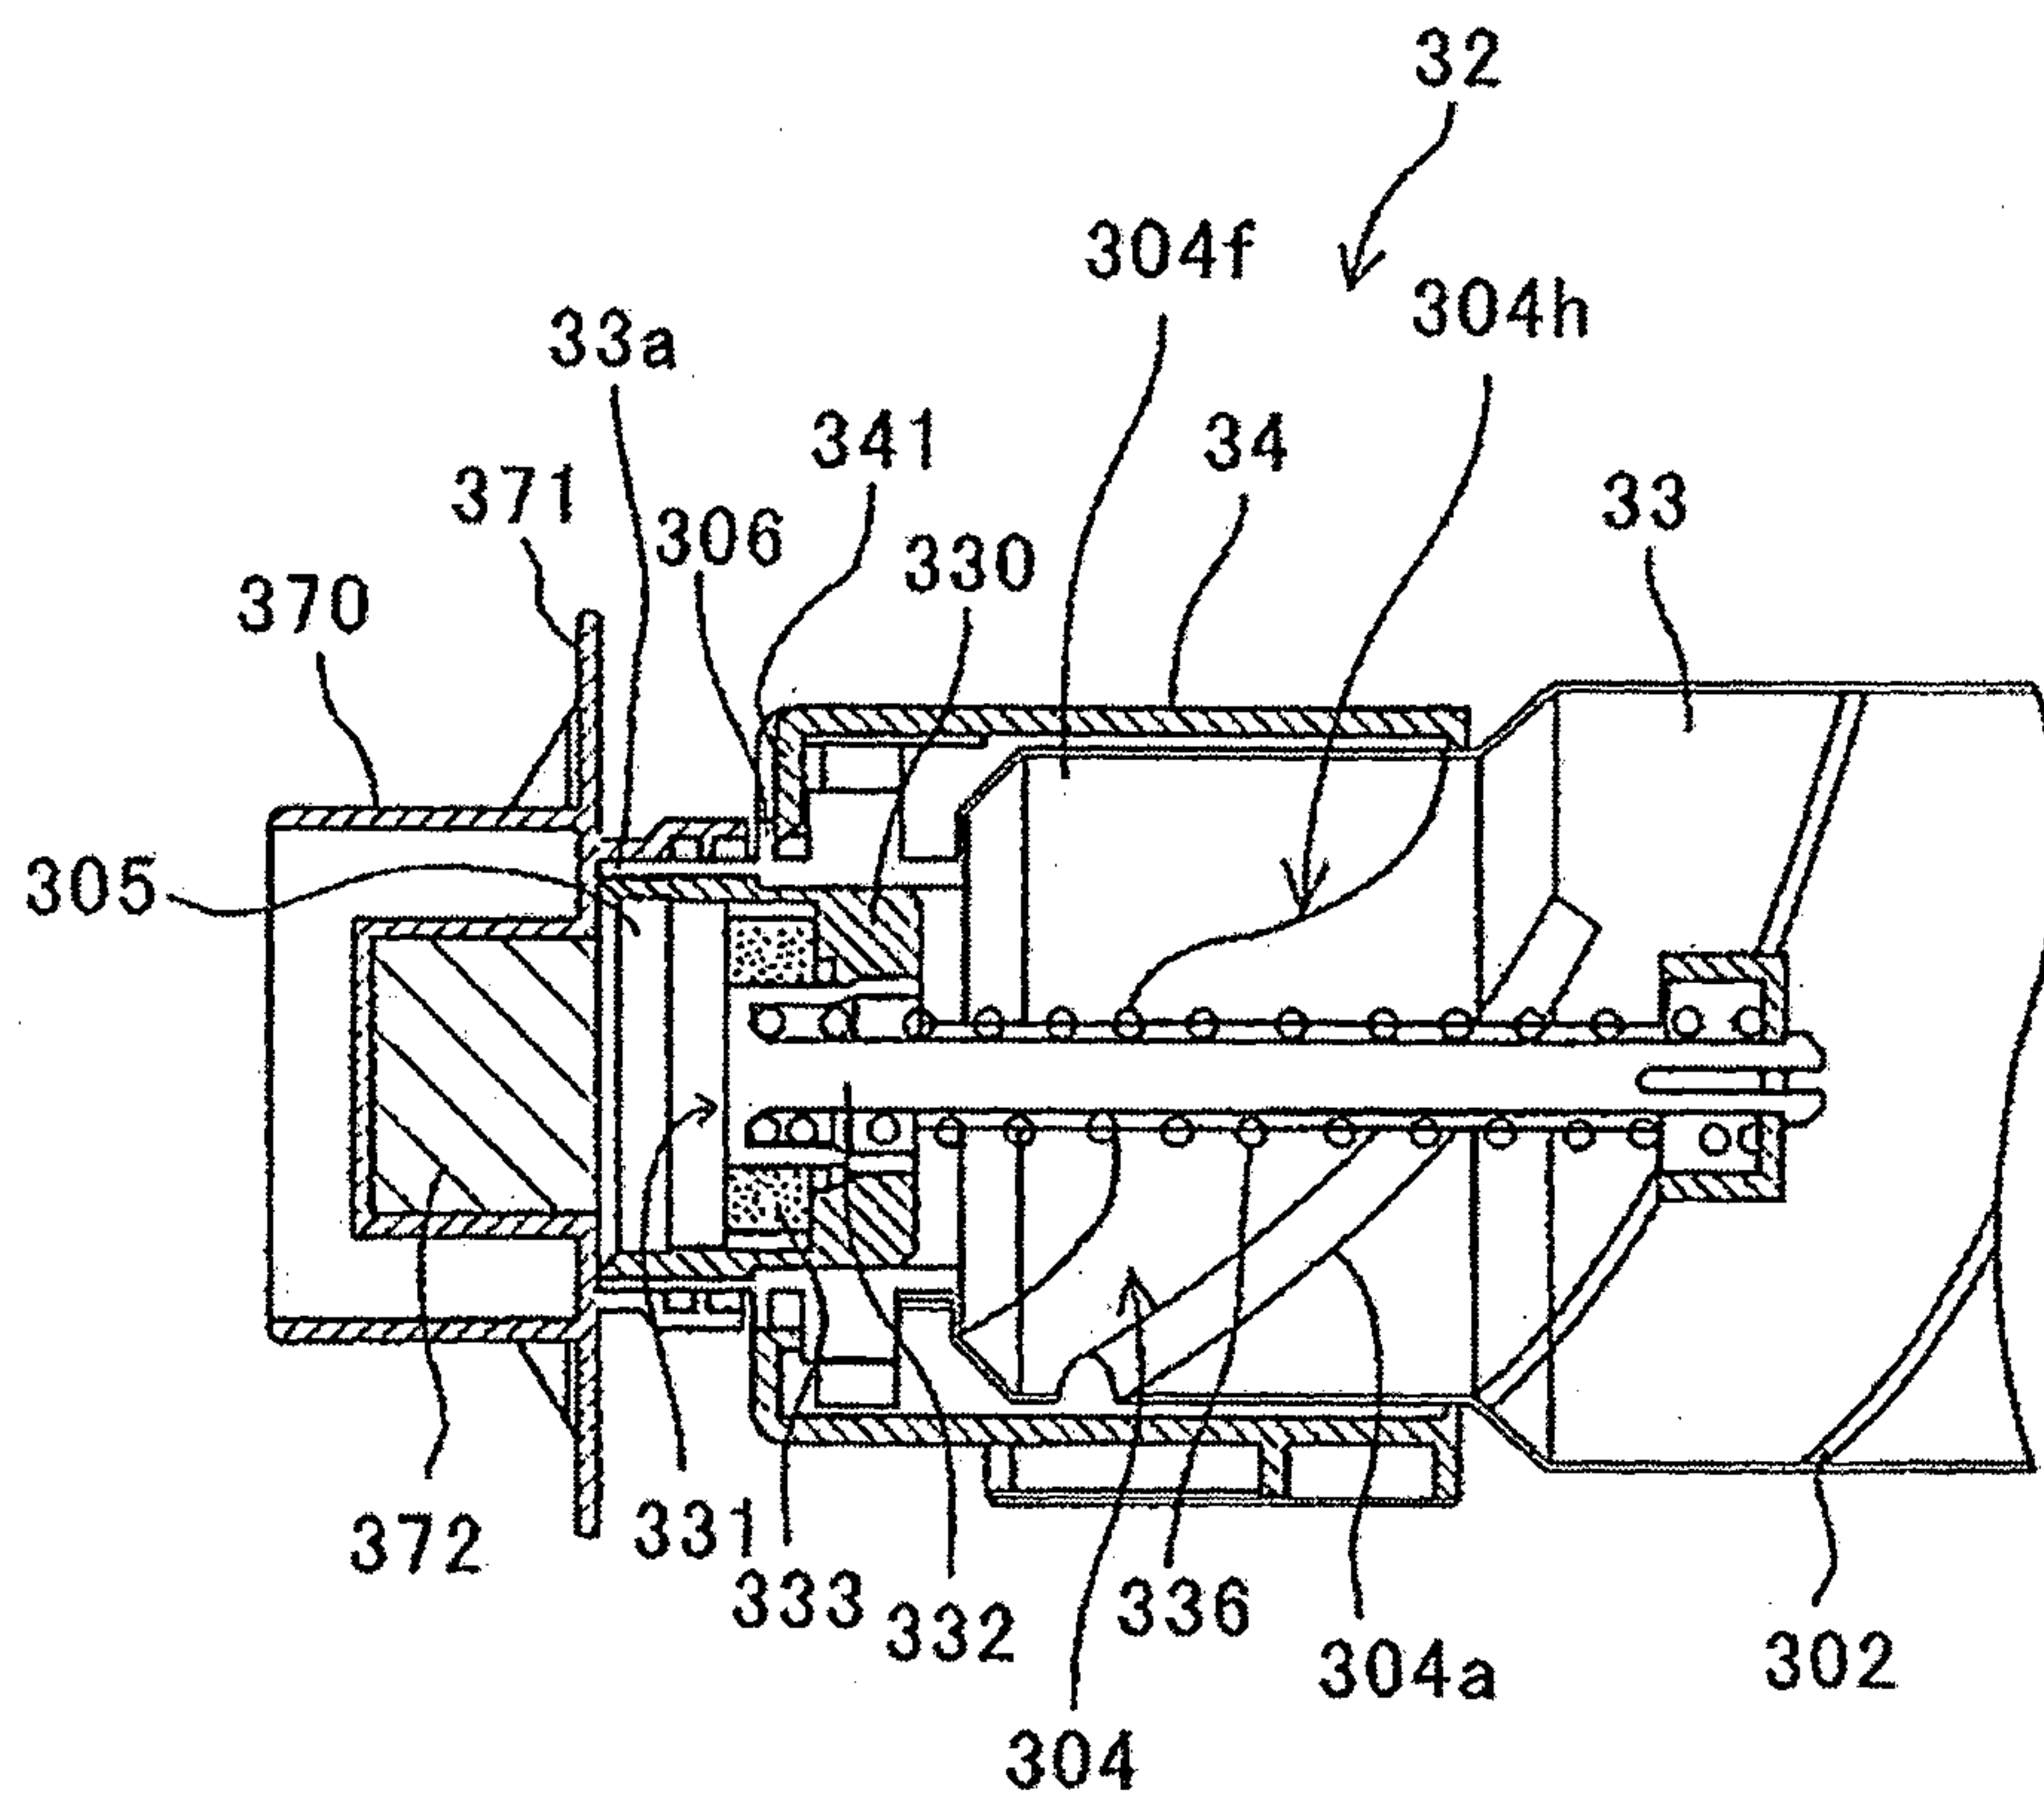


36/66

FIG.36

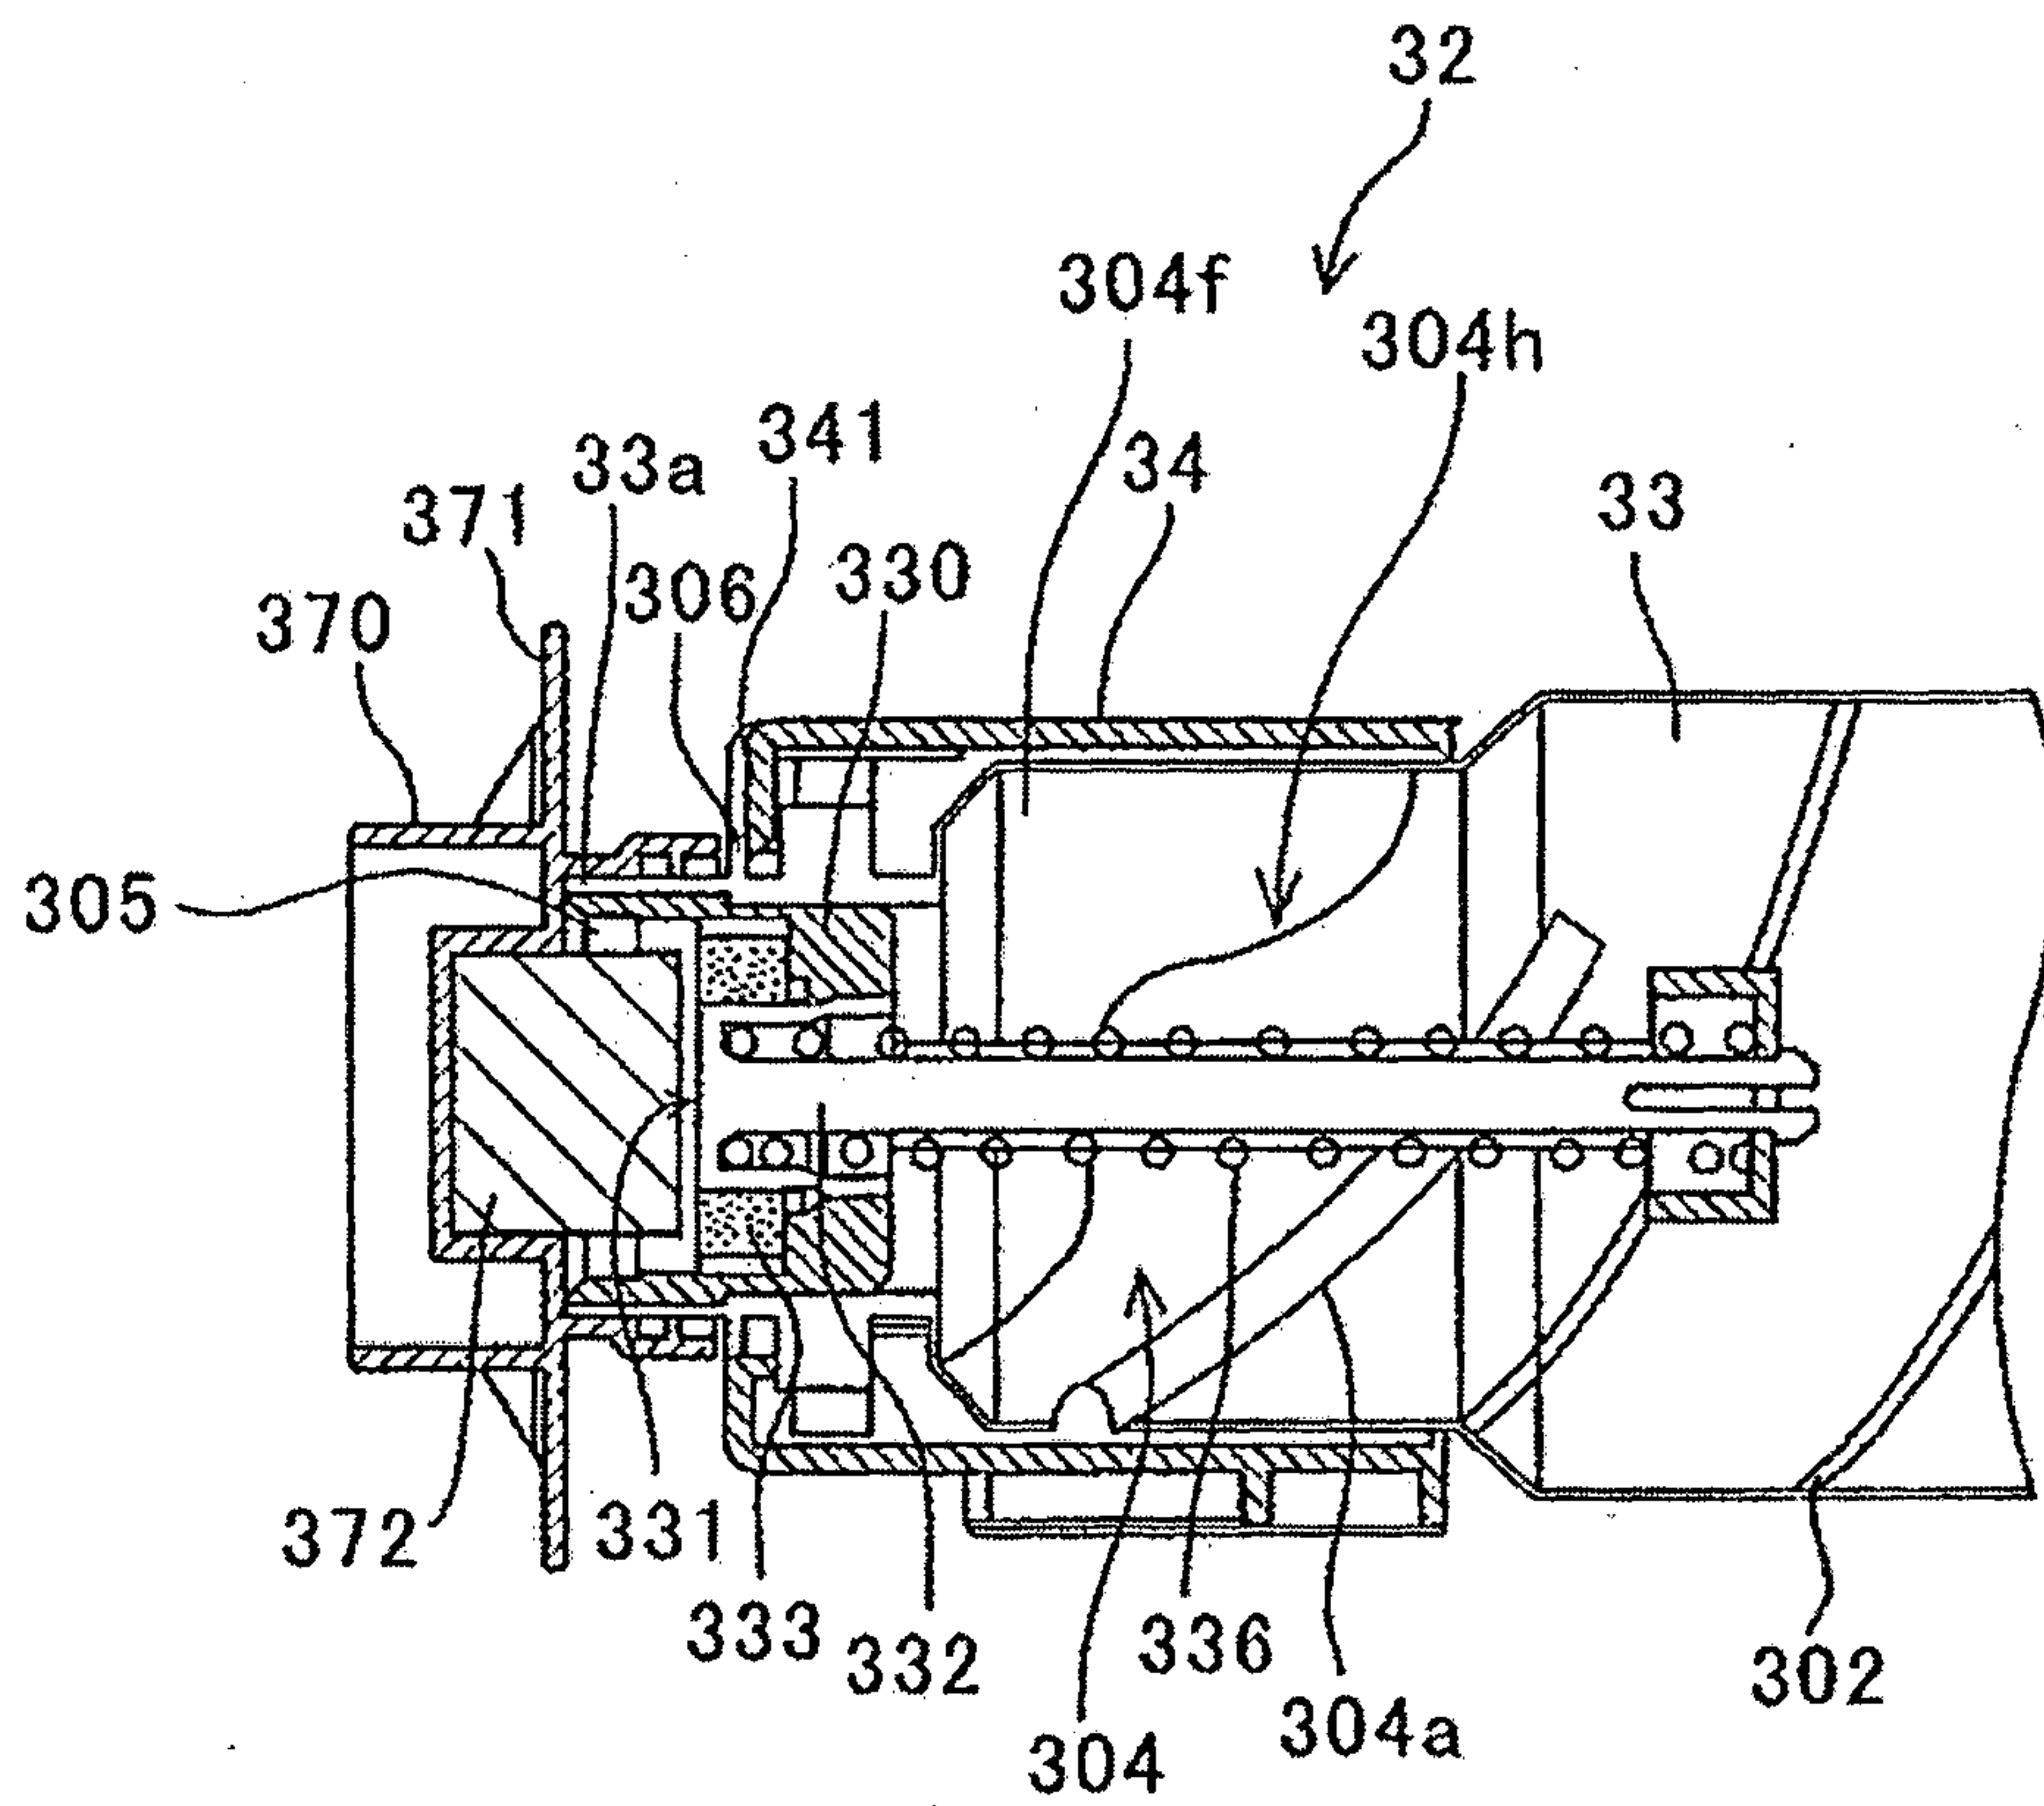


37/66

FIG.37

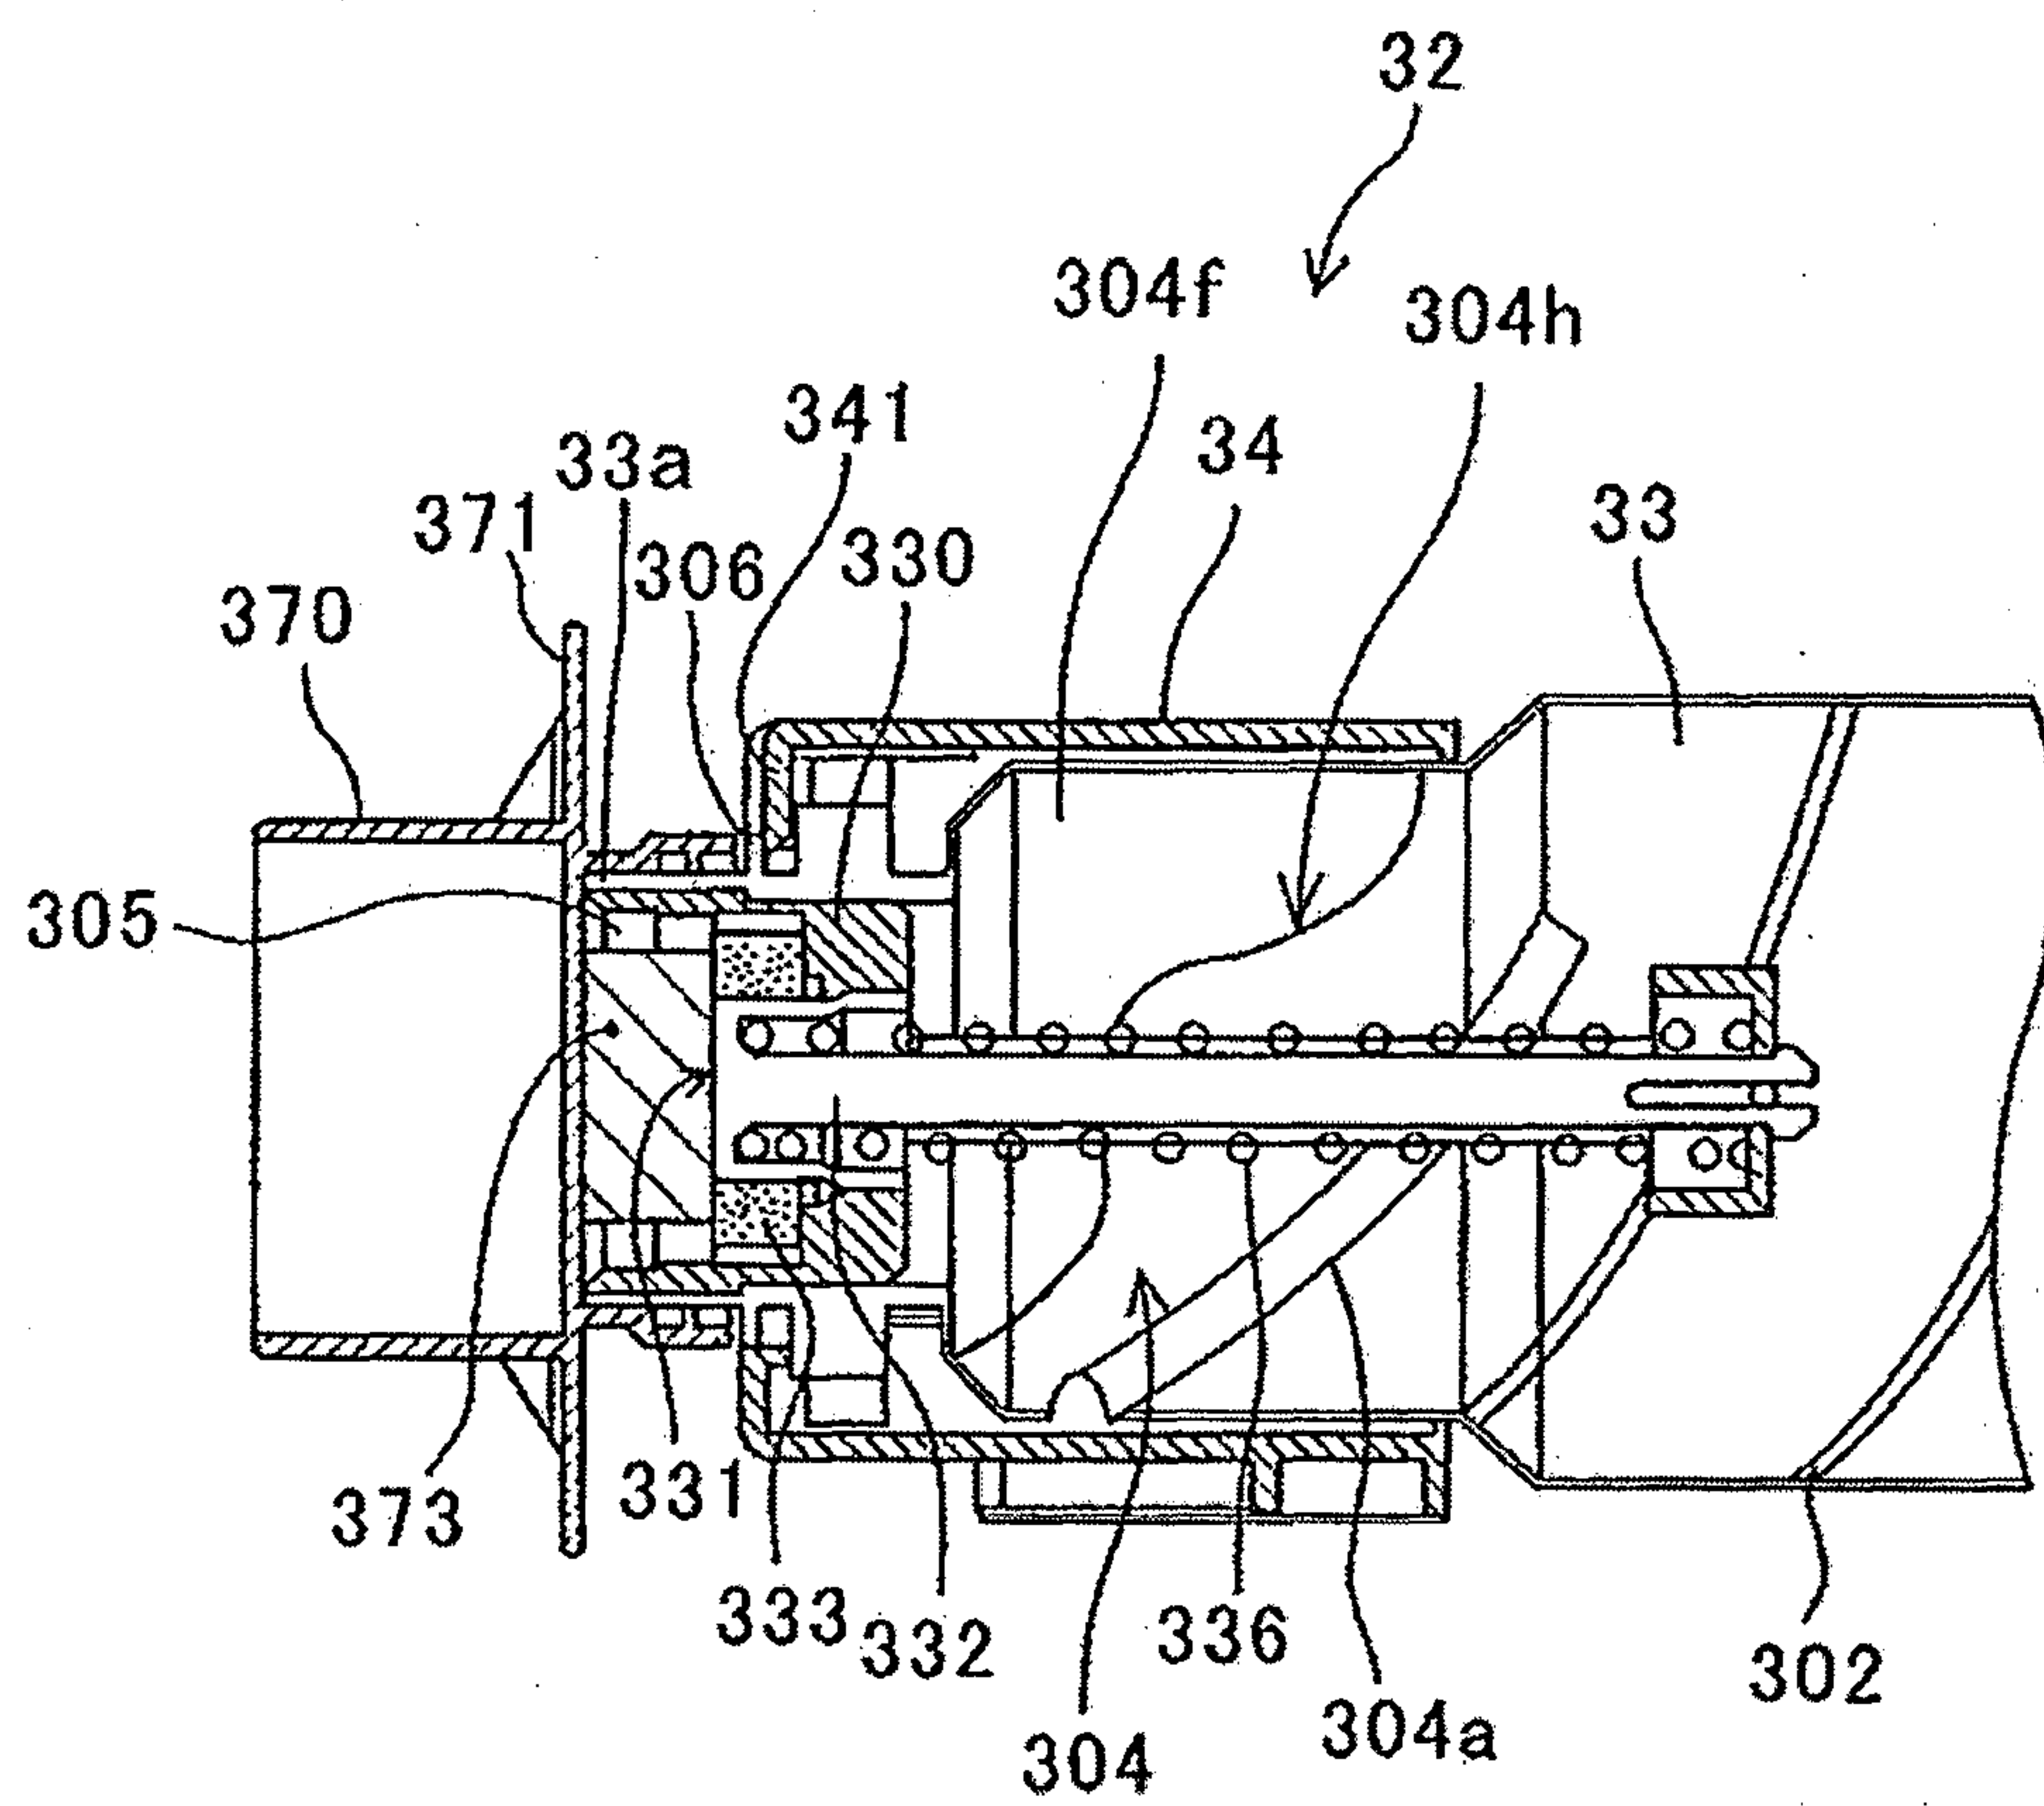


38/66

FIG.38

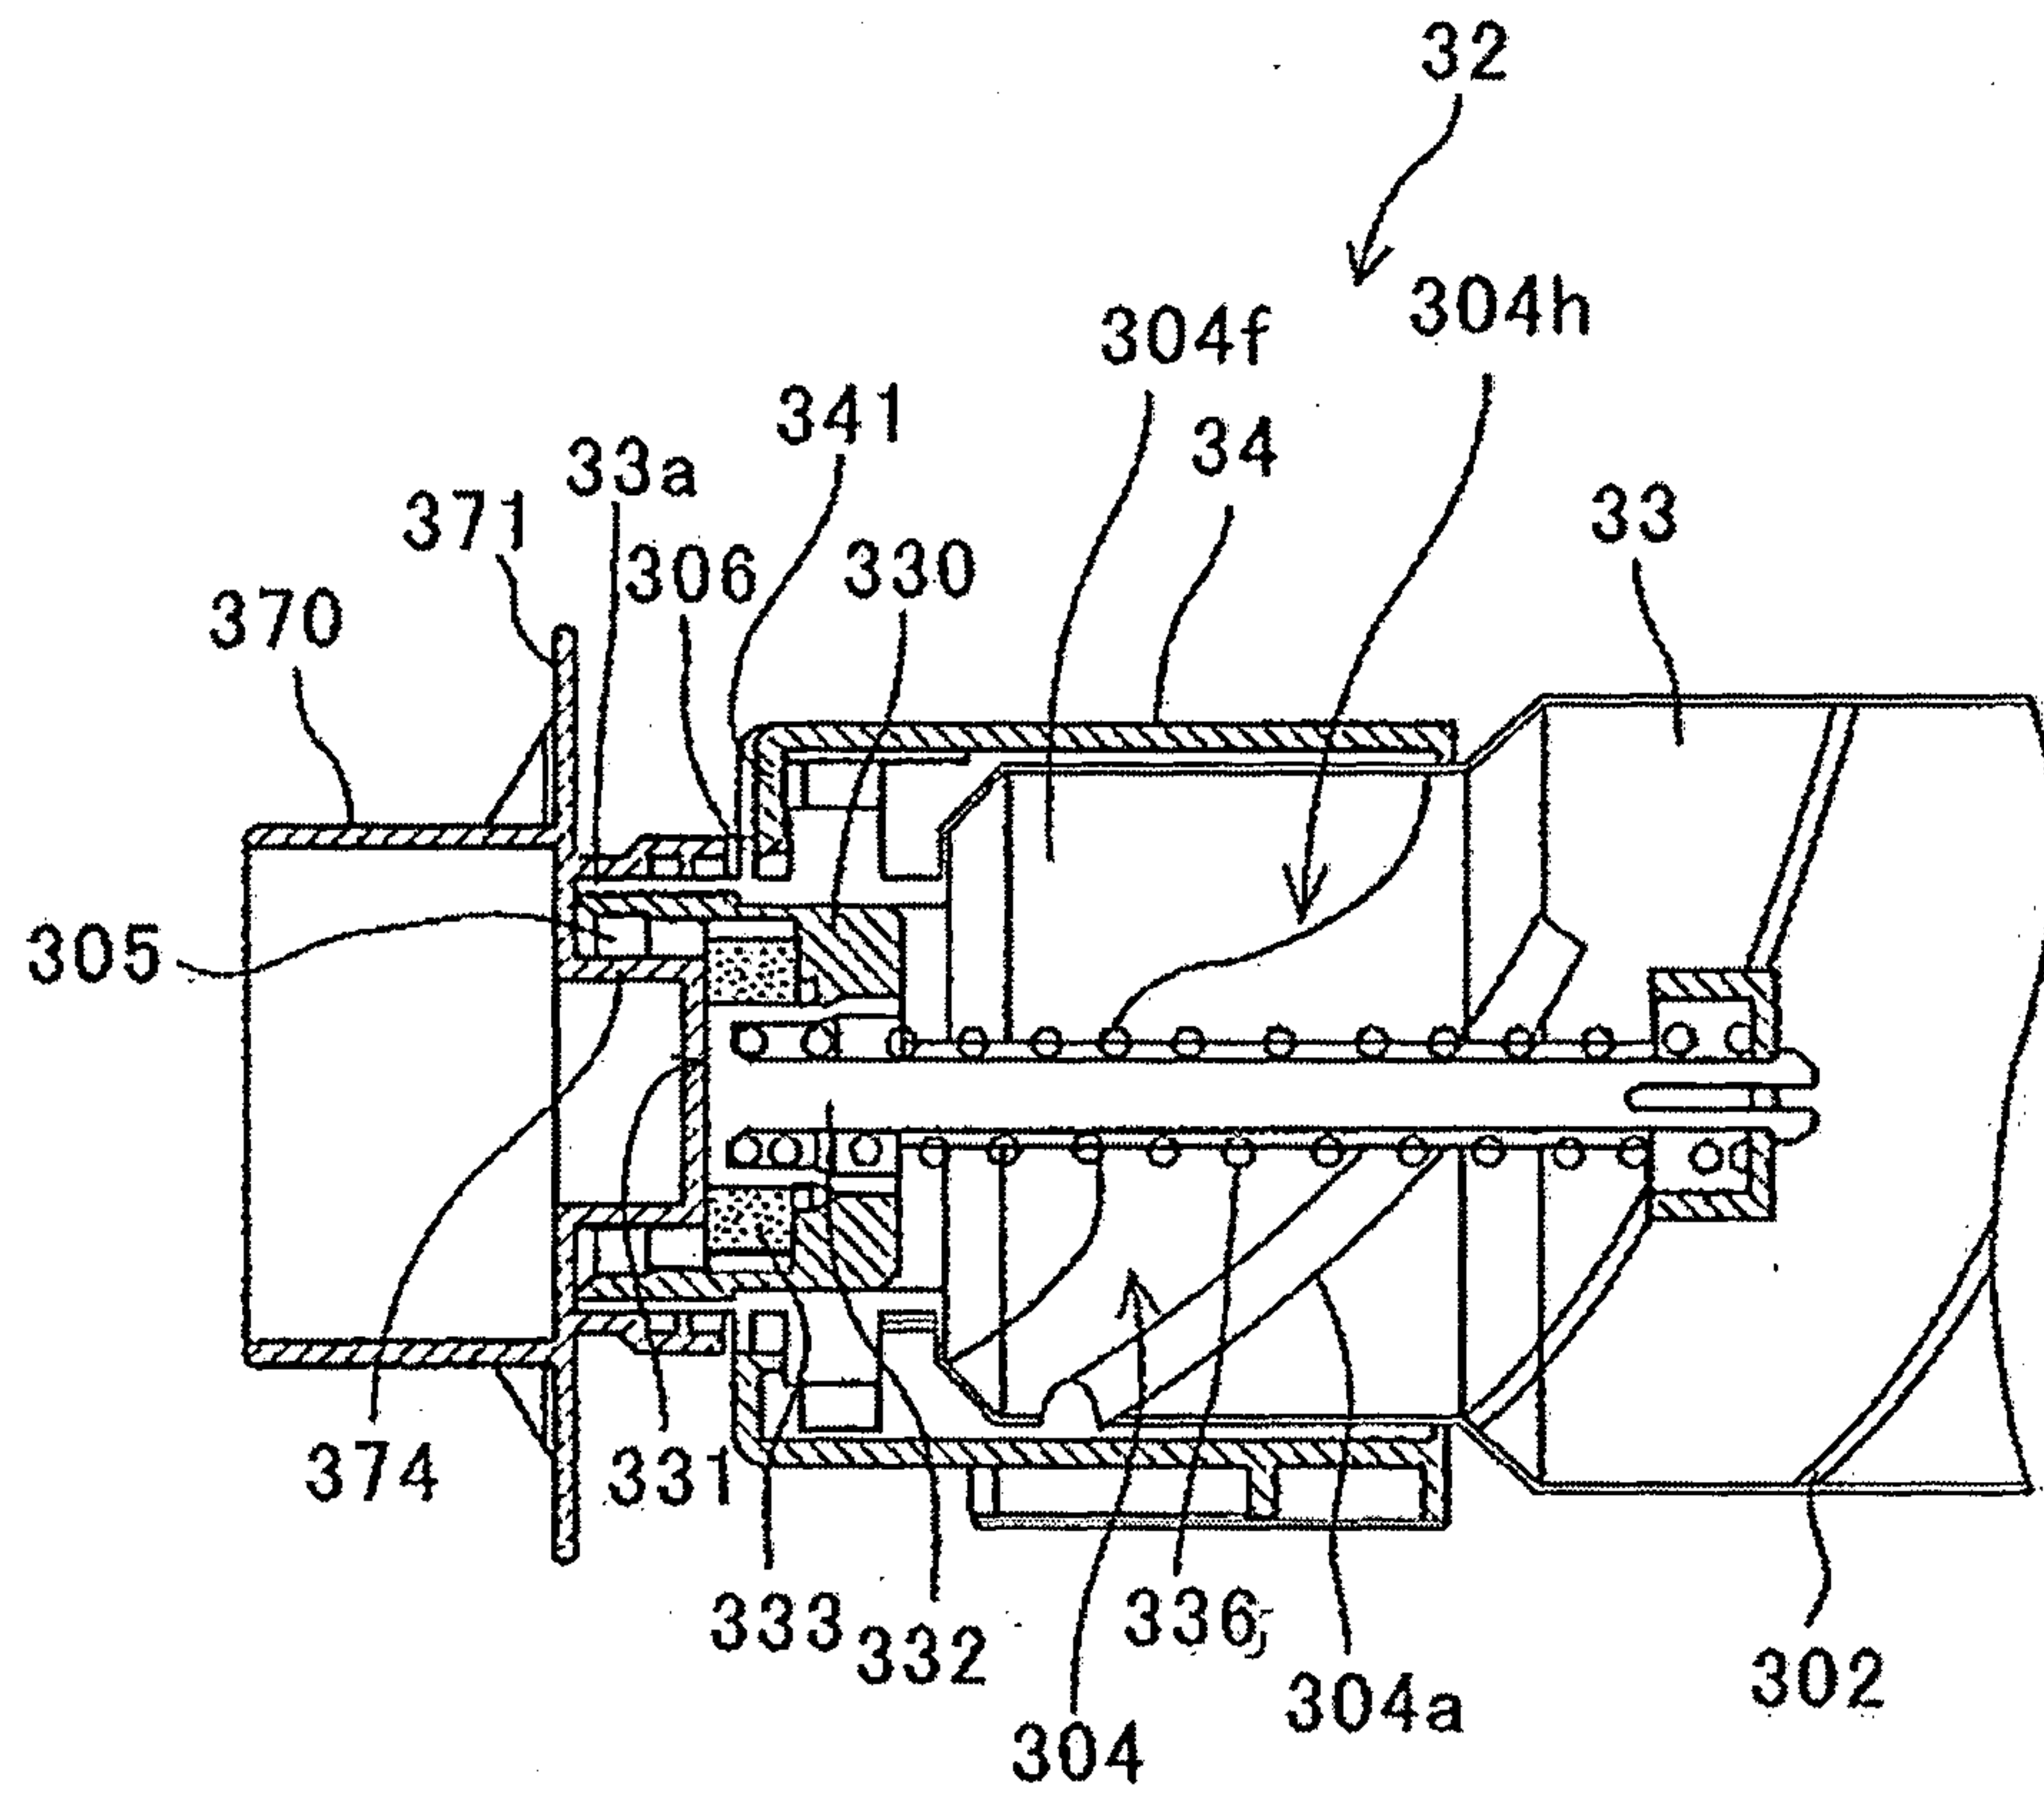


39/66

FIG. 39

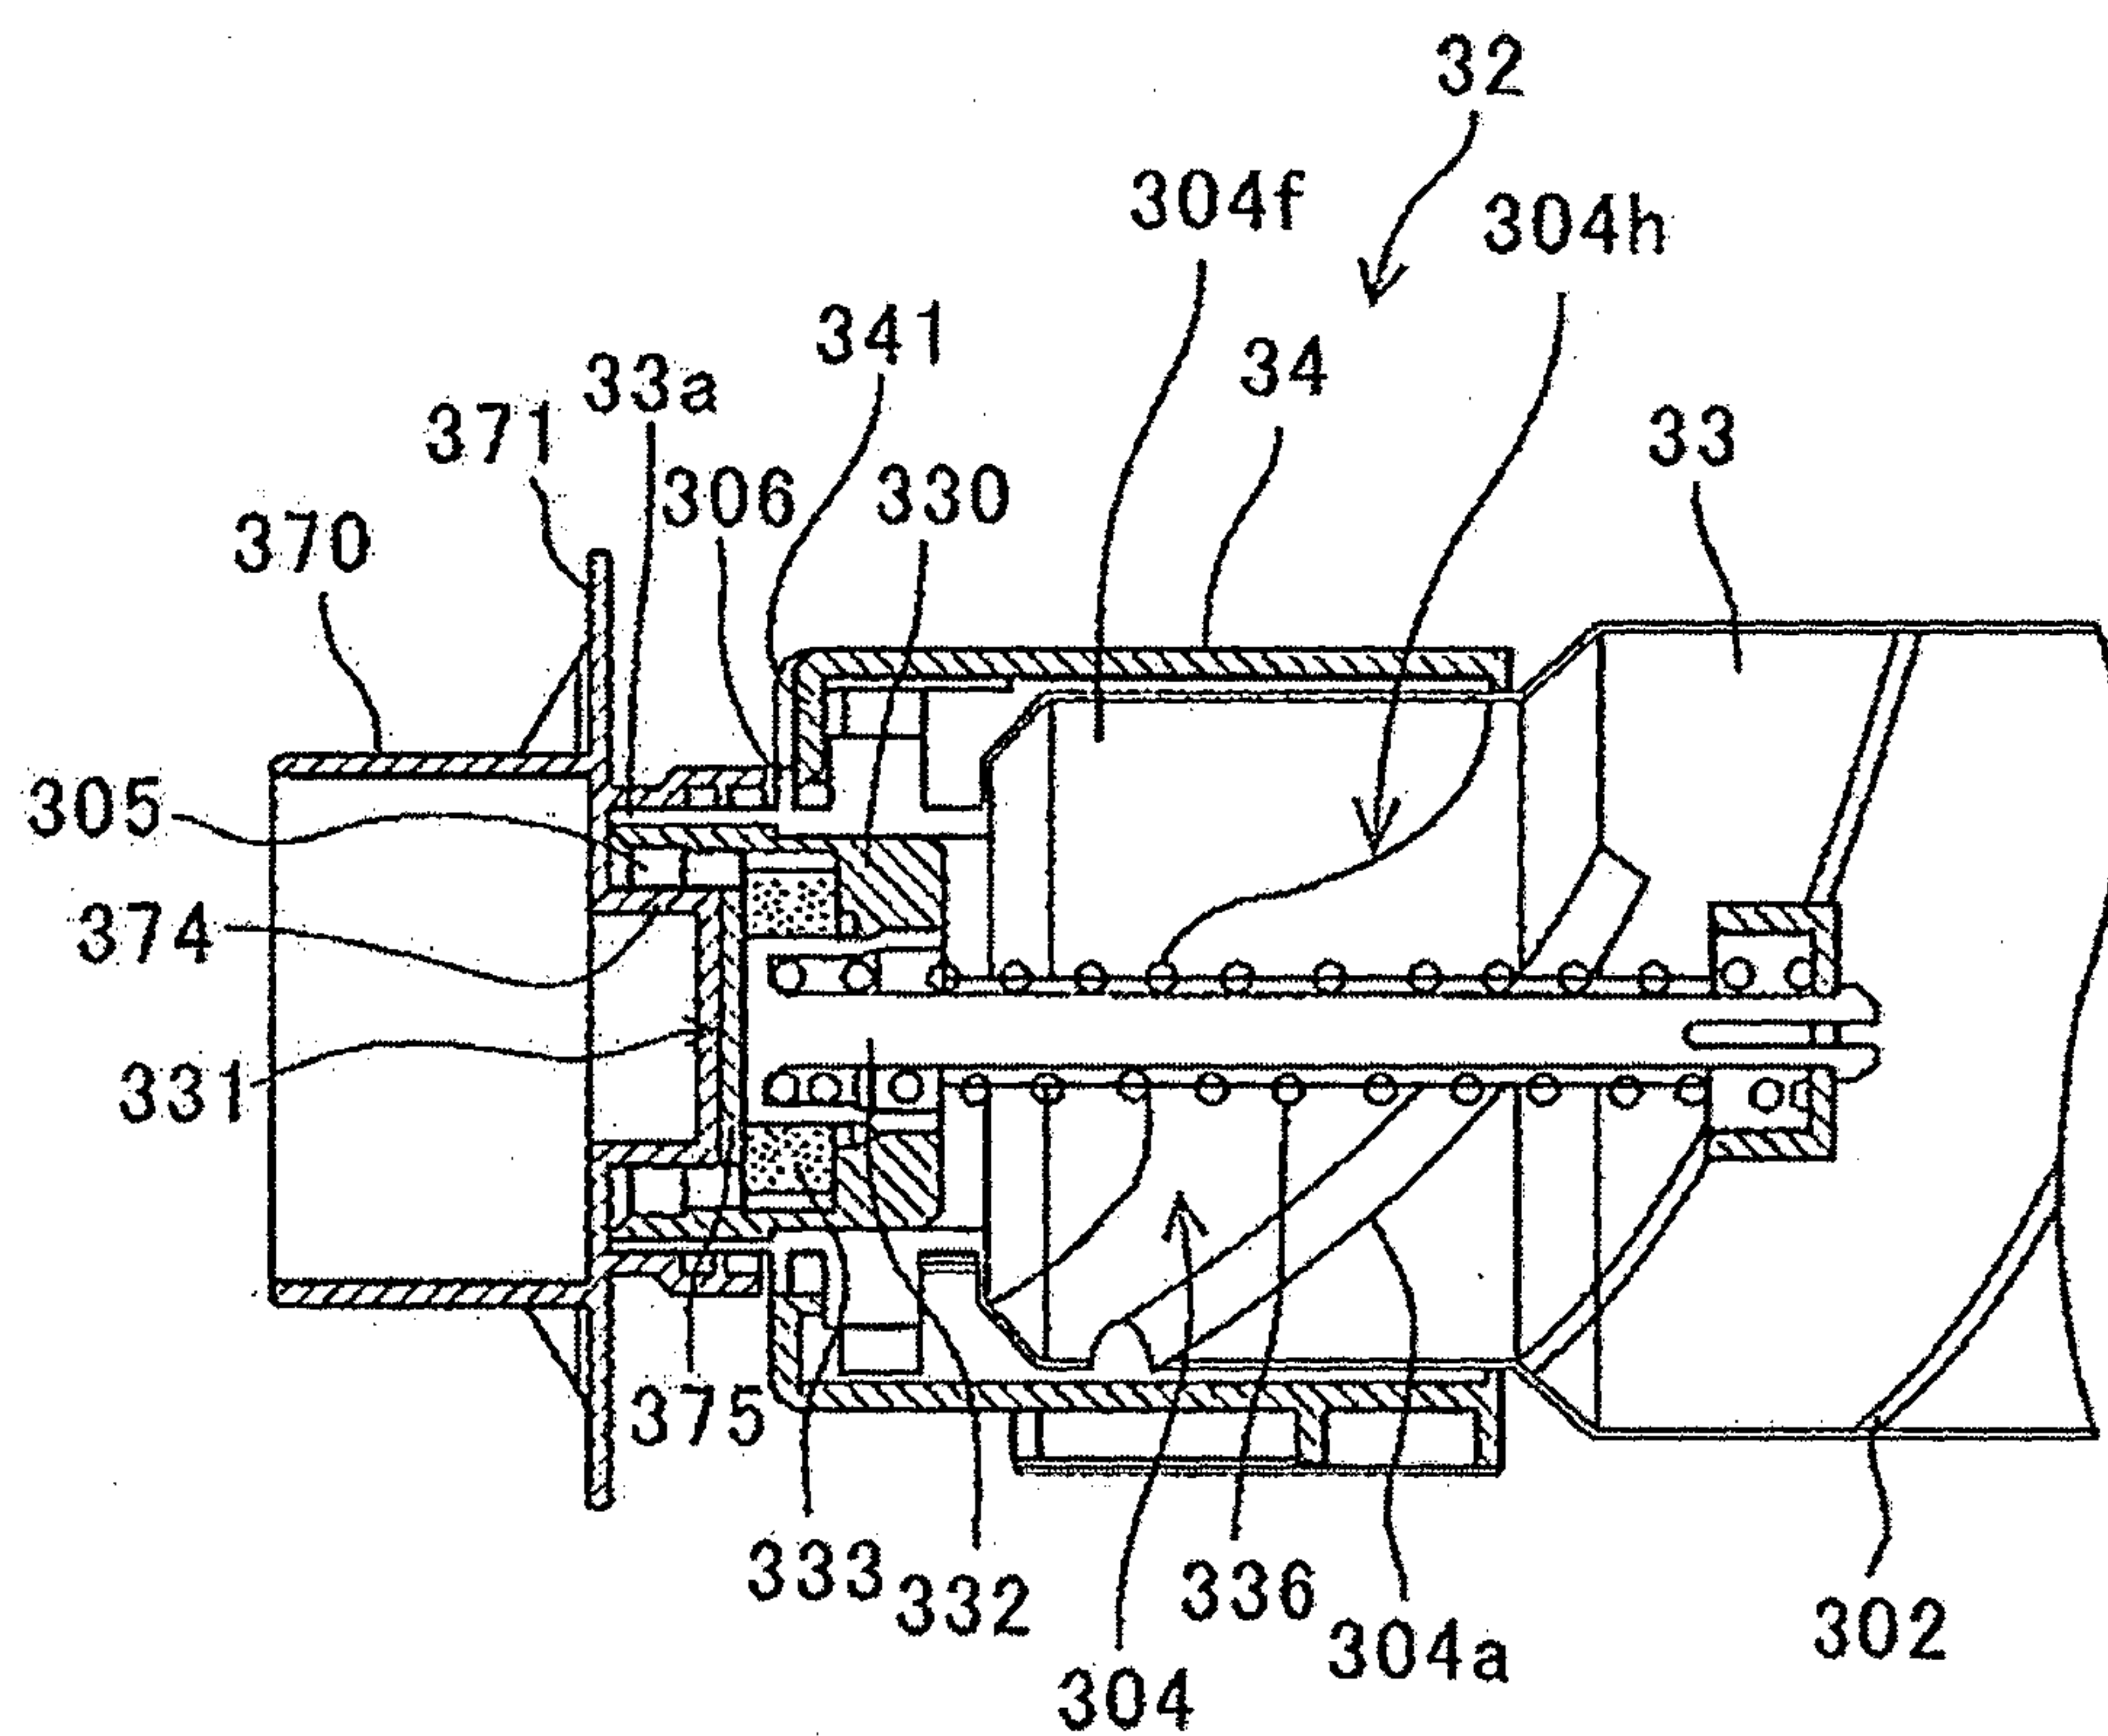


40/66

FIG.40

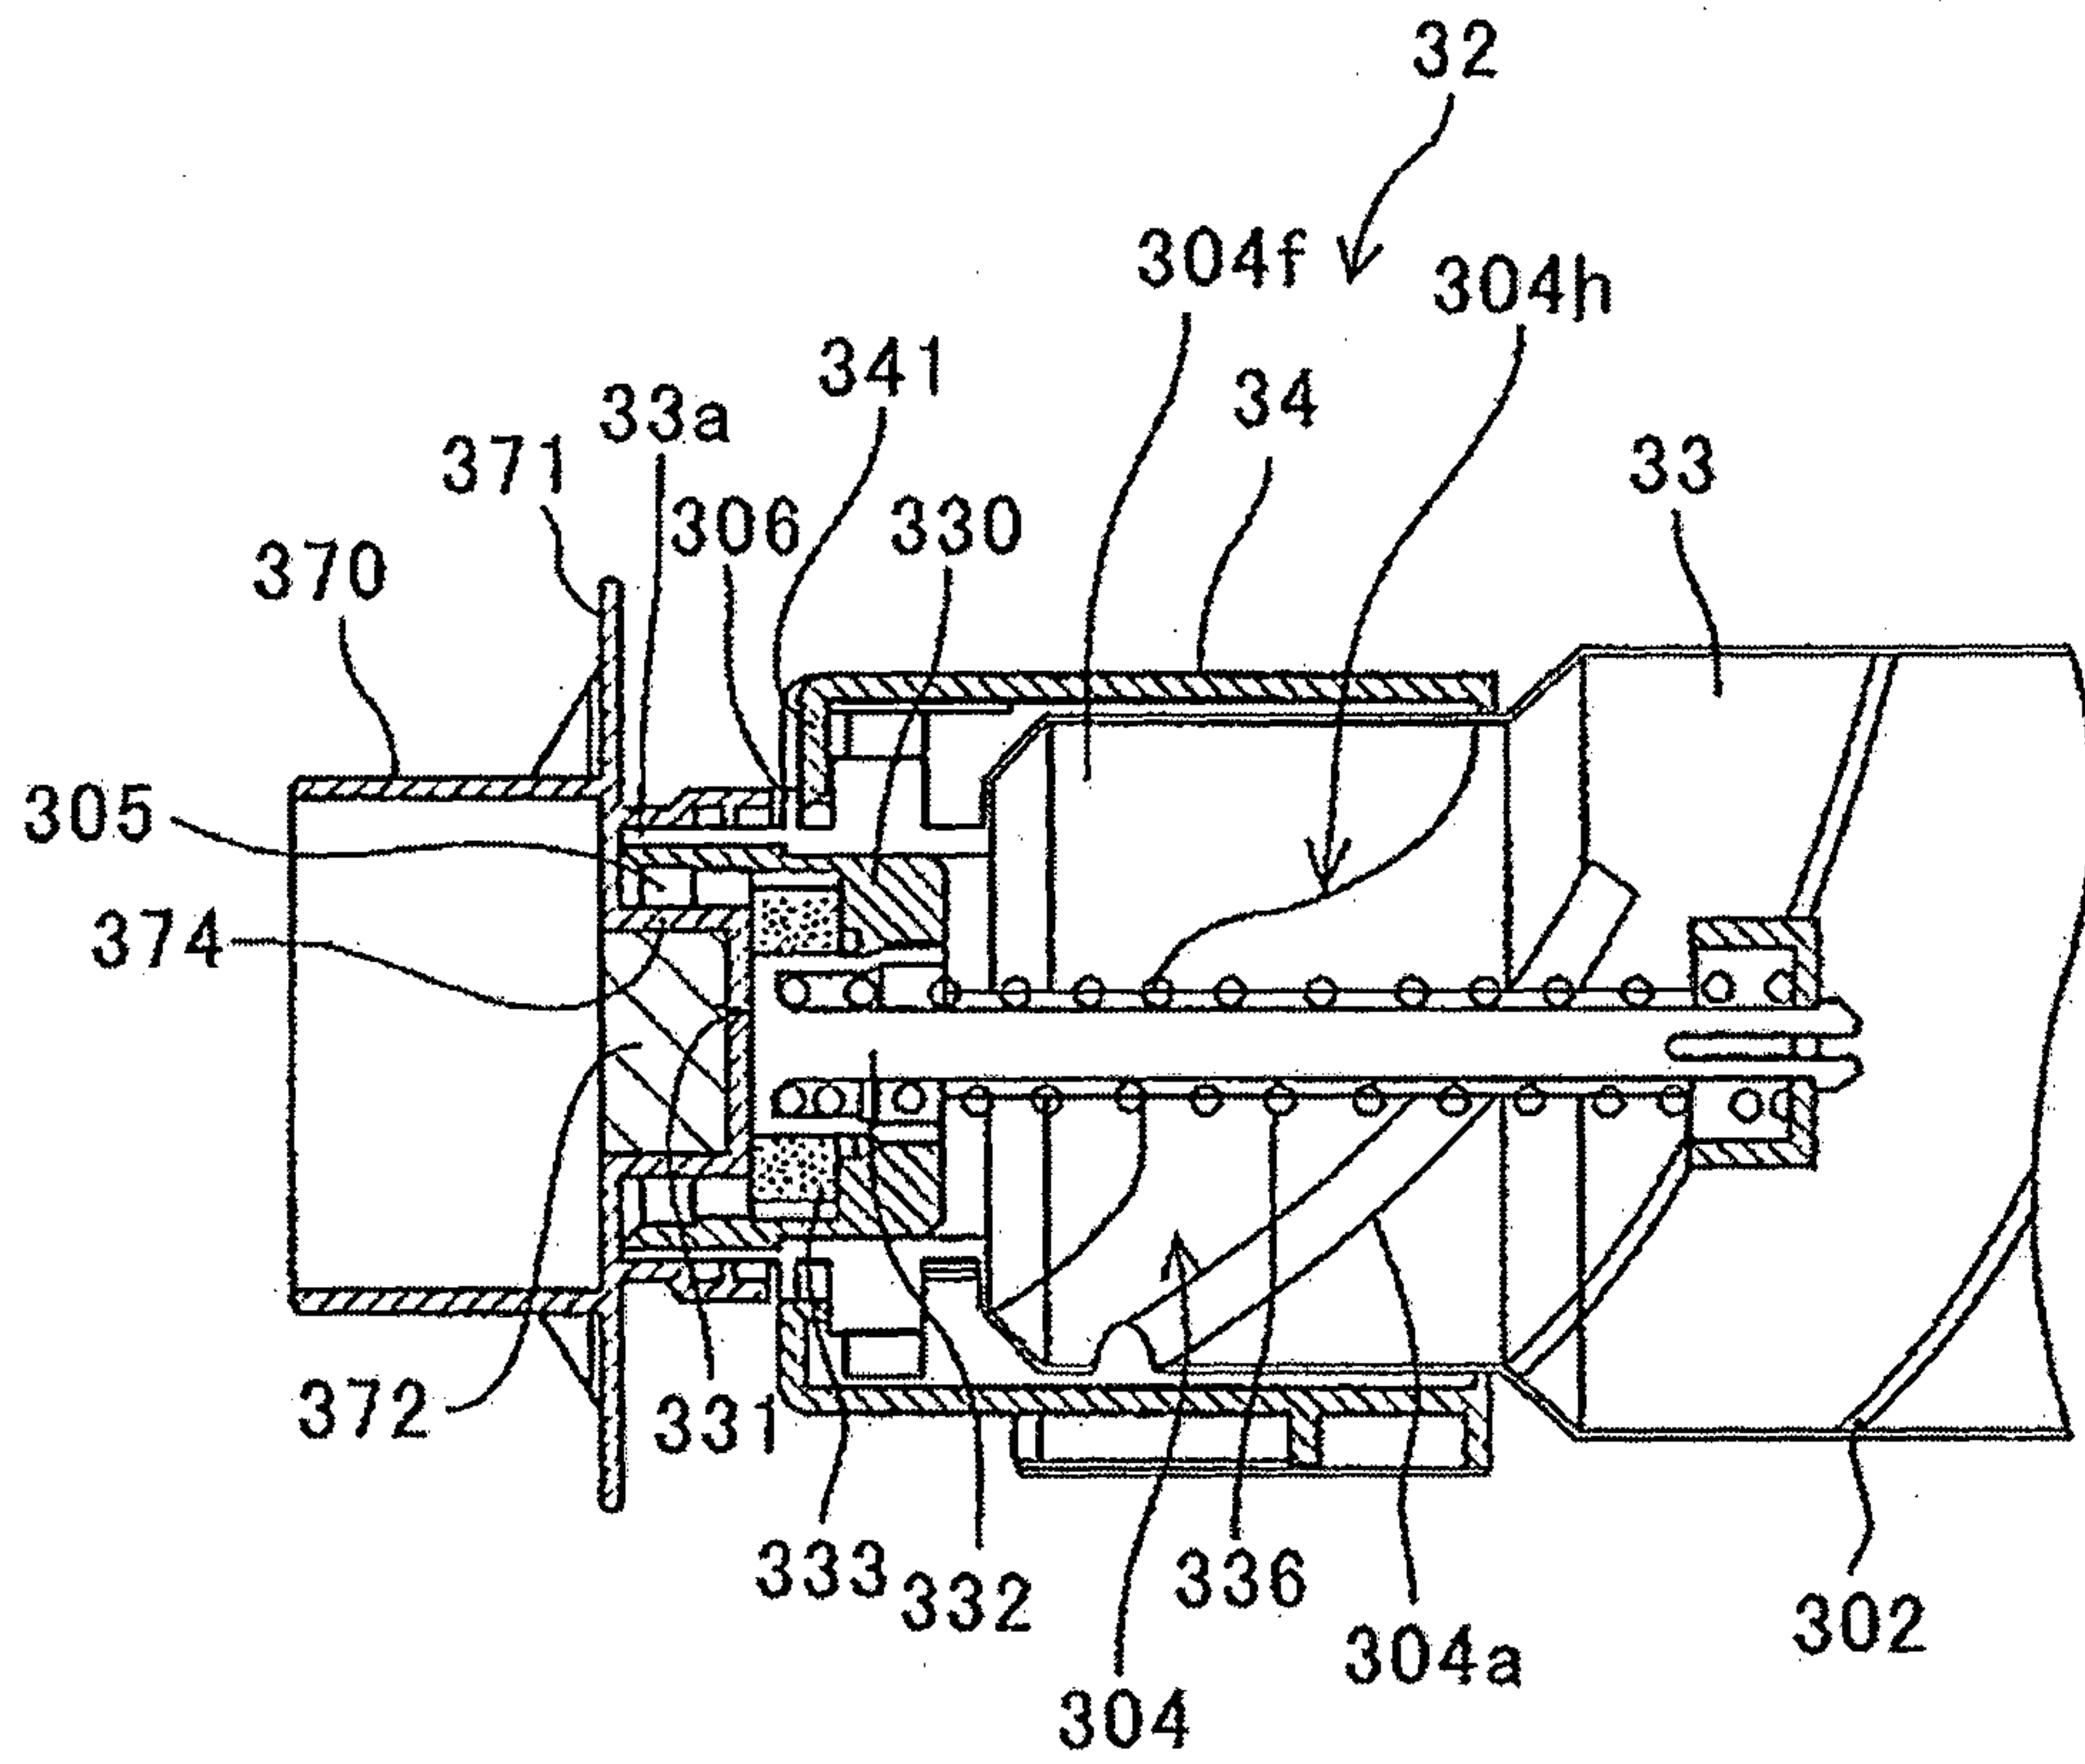


41/66

FIG.41

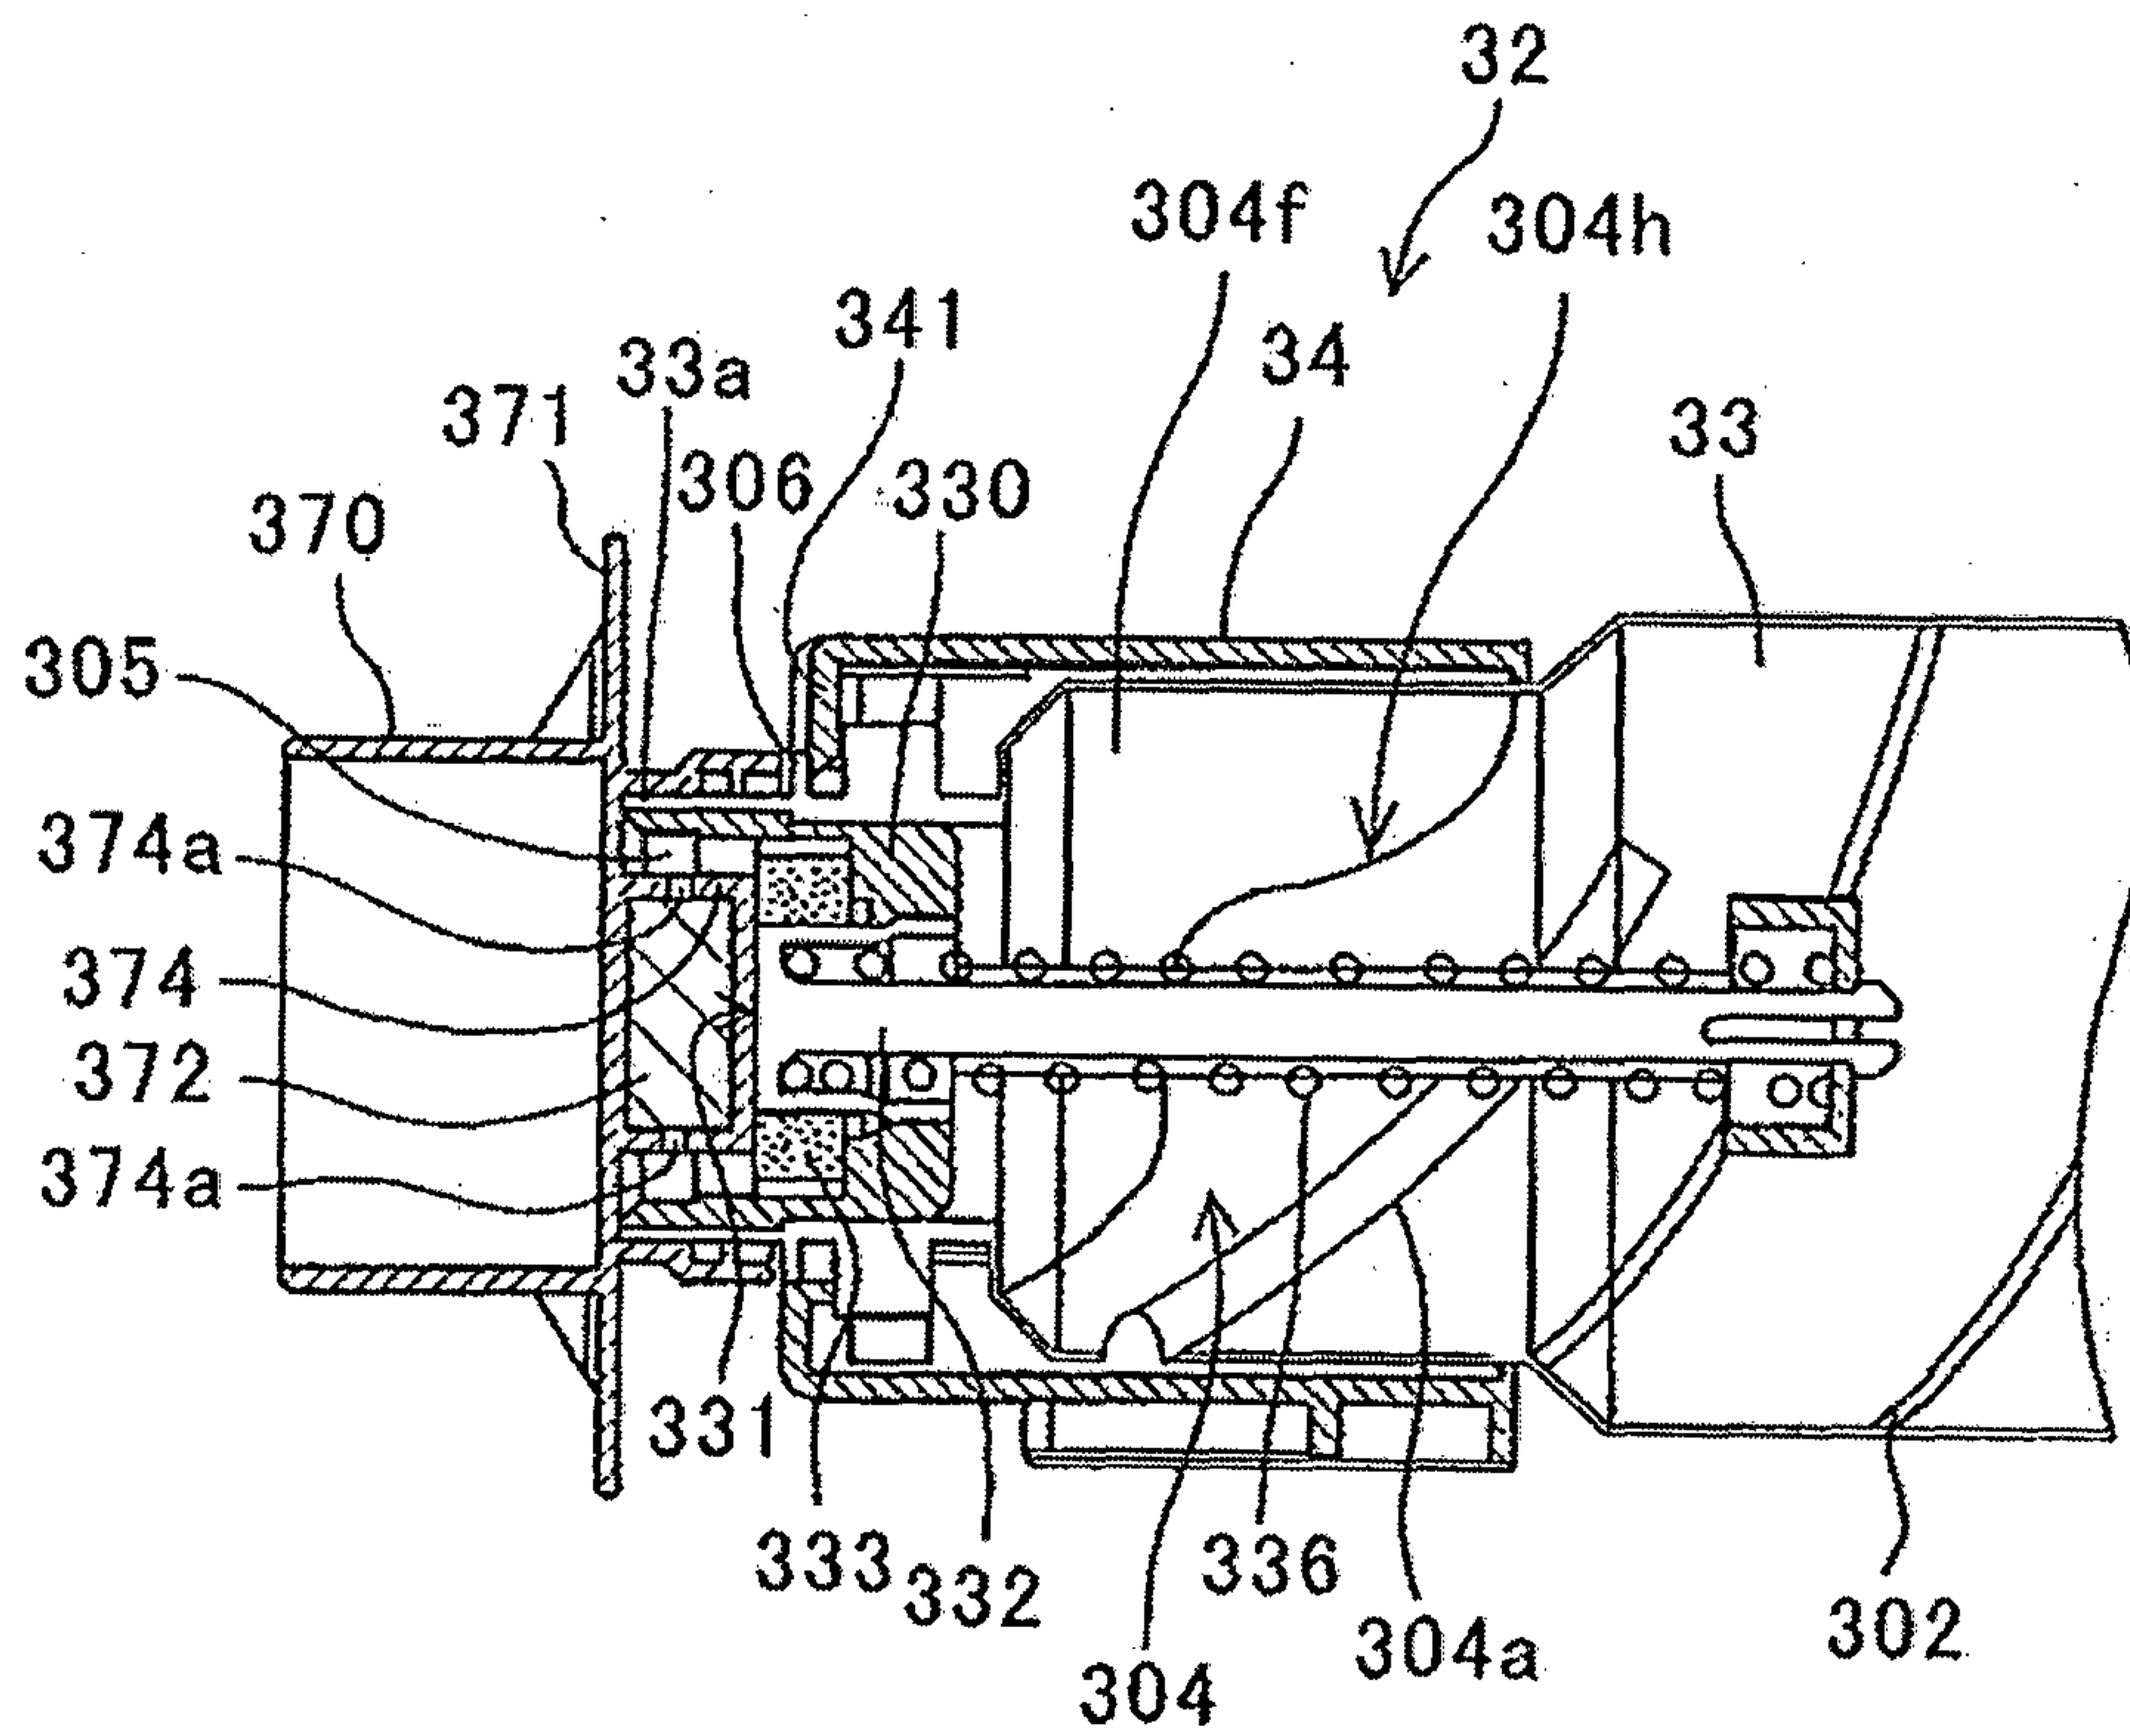


42/66

FIG.42

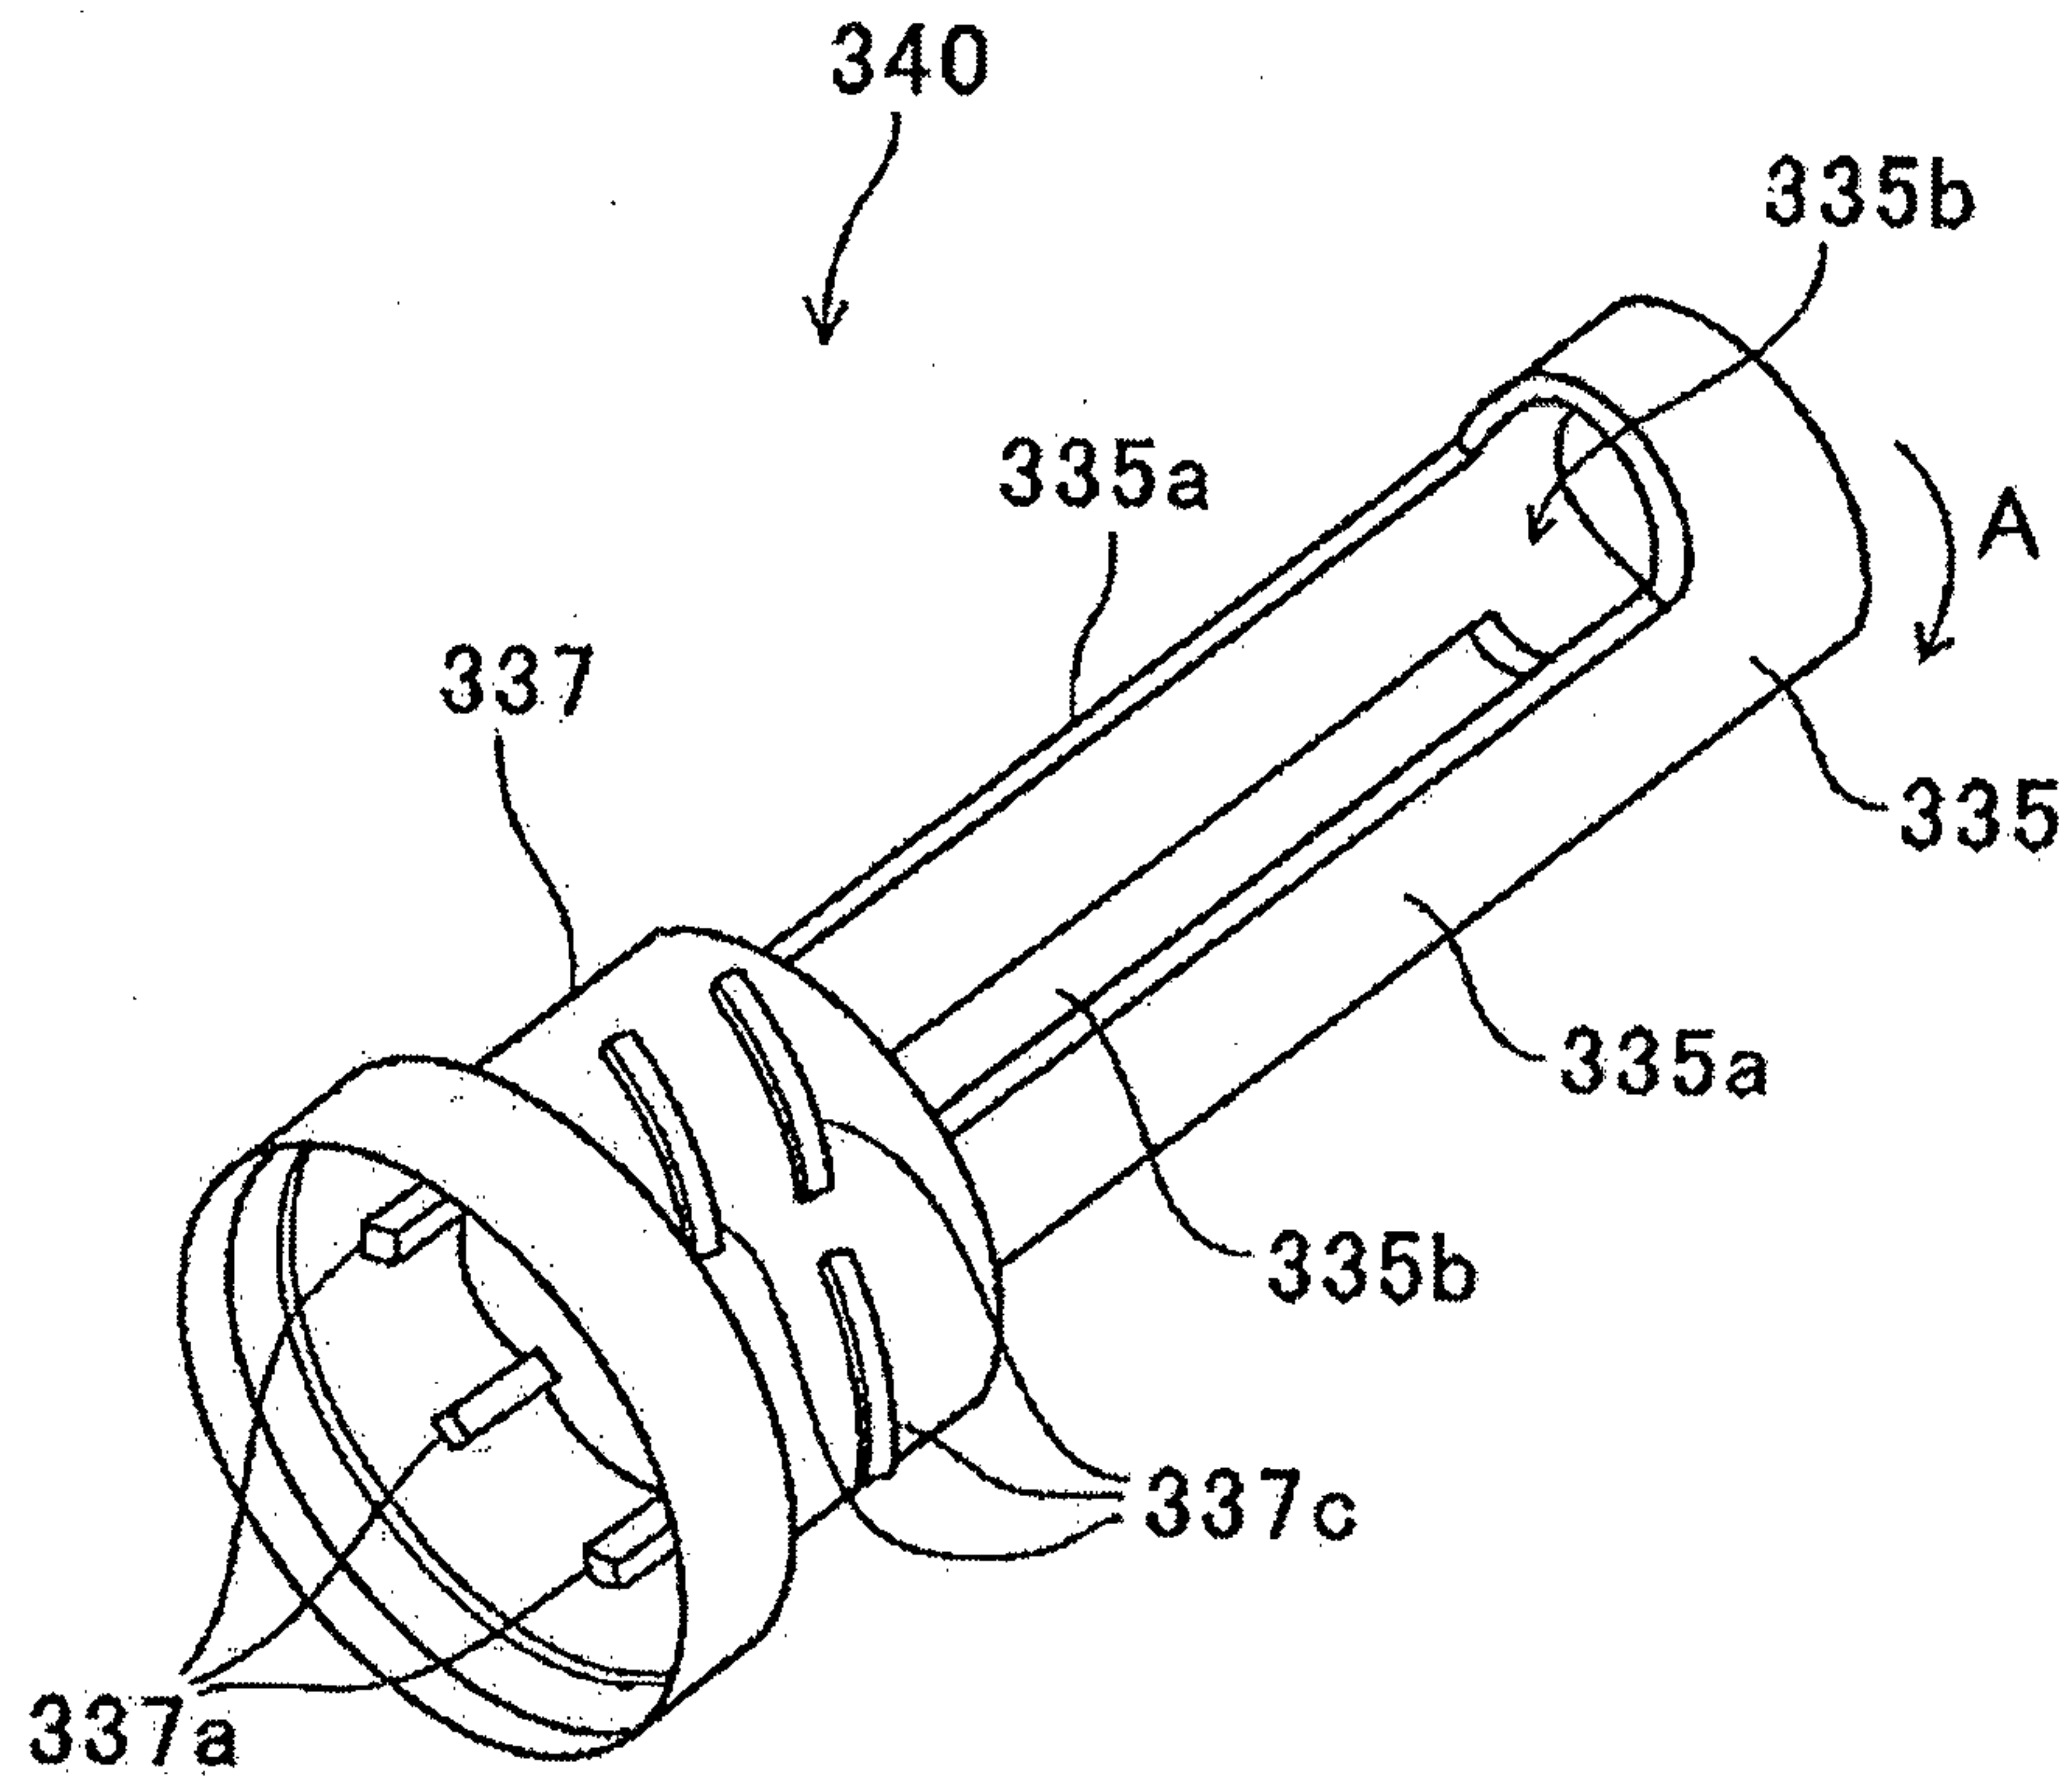


43/66

FIG.43

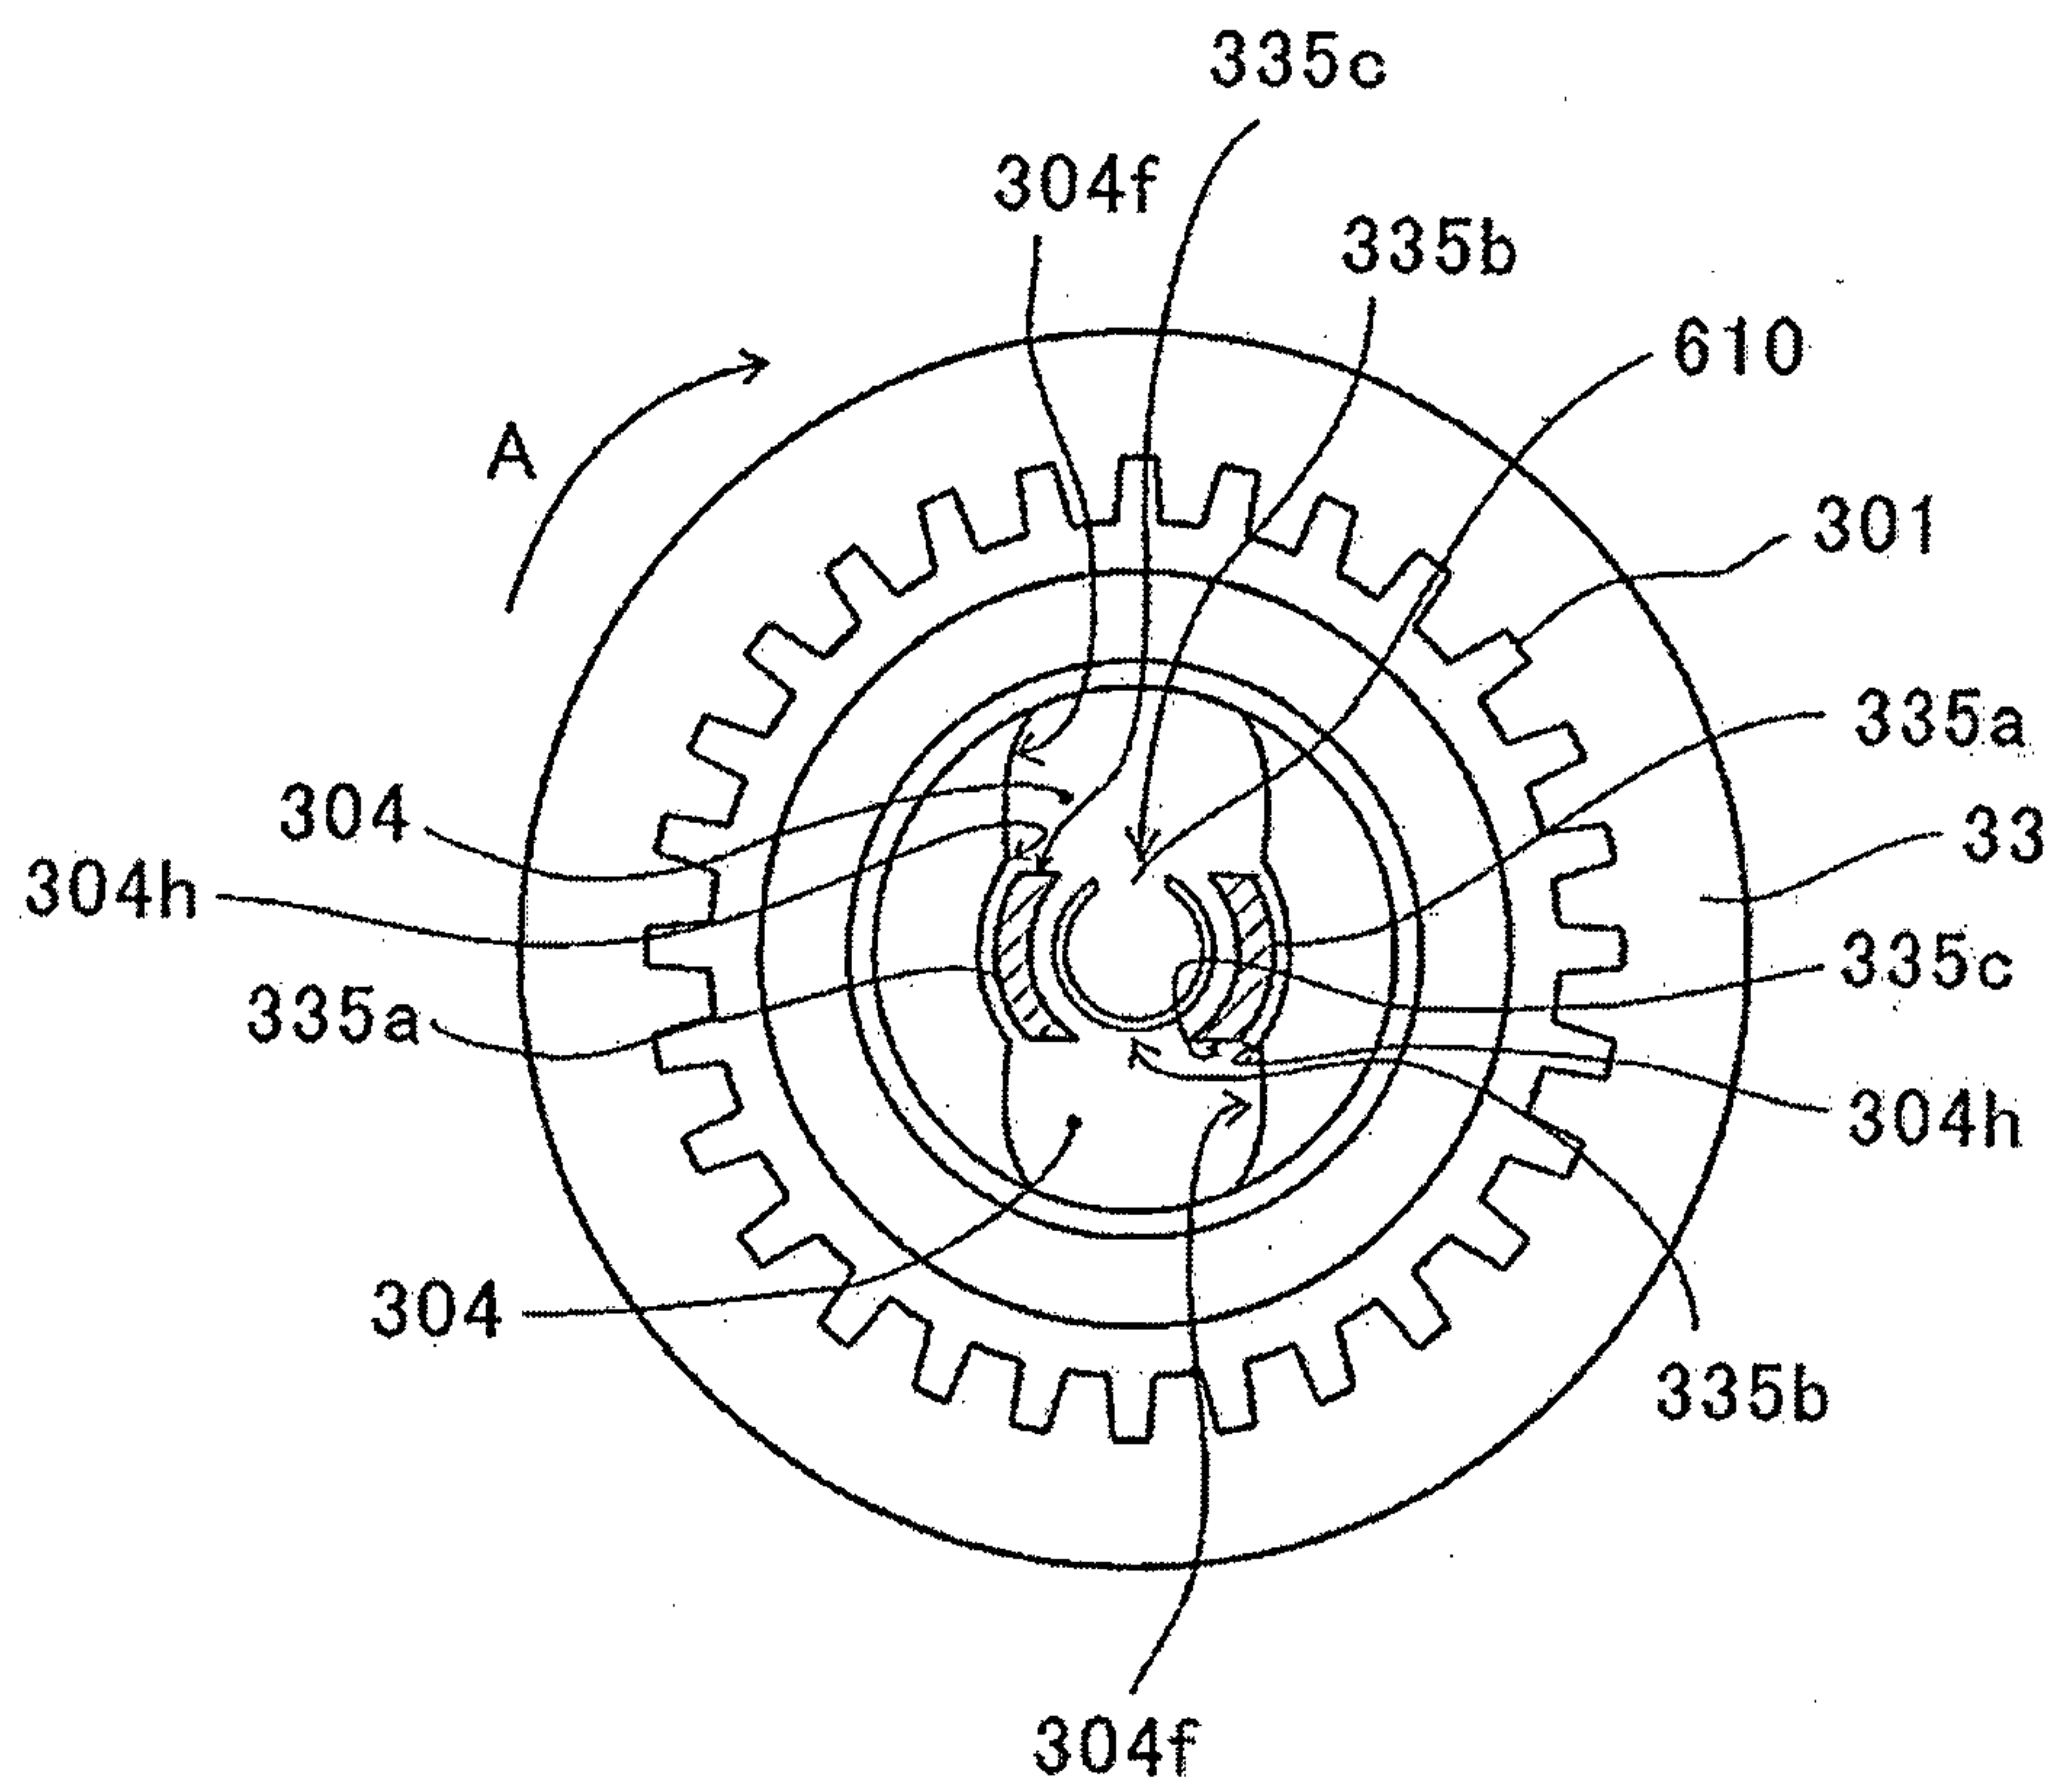


44/66

FIG.44

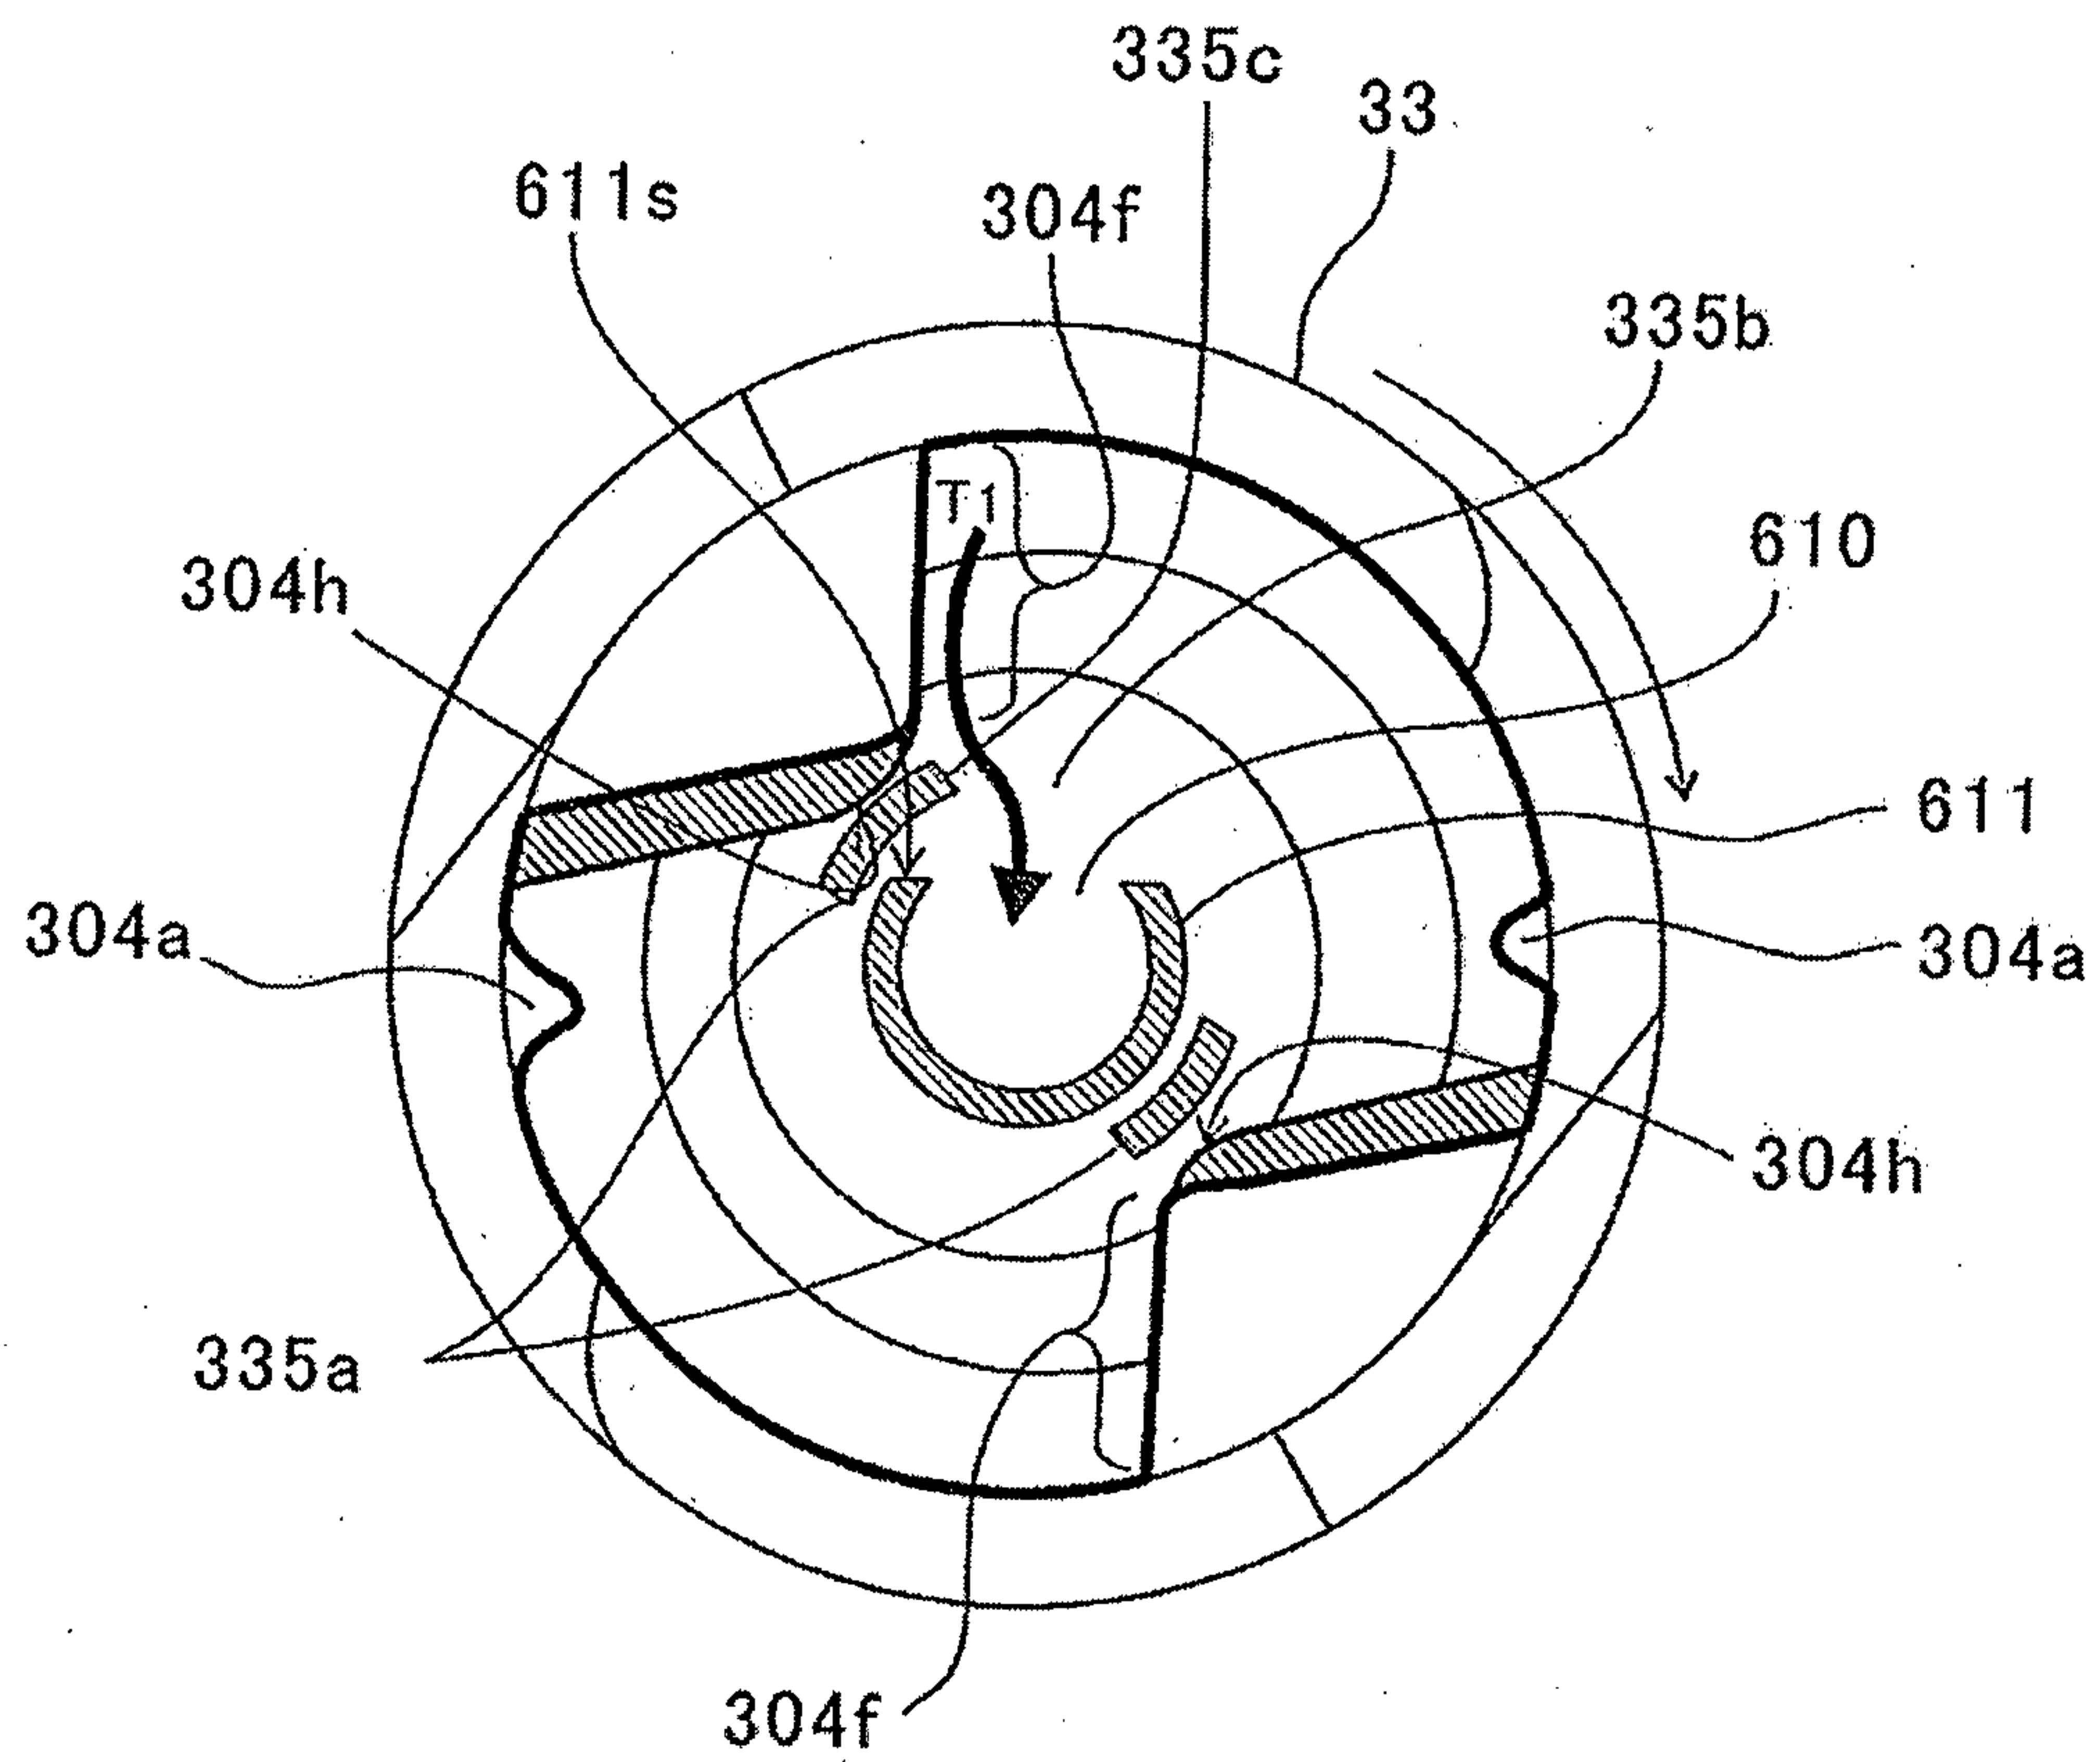

46/66

FIG.46

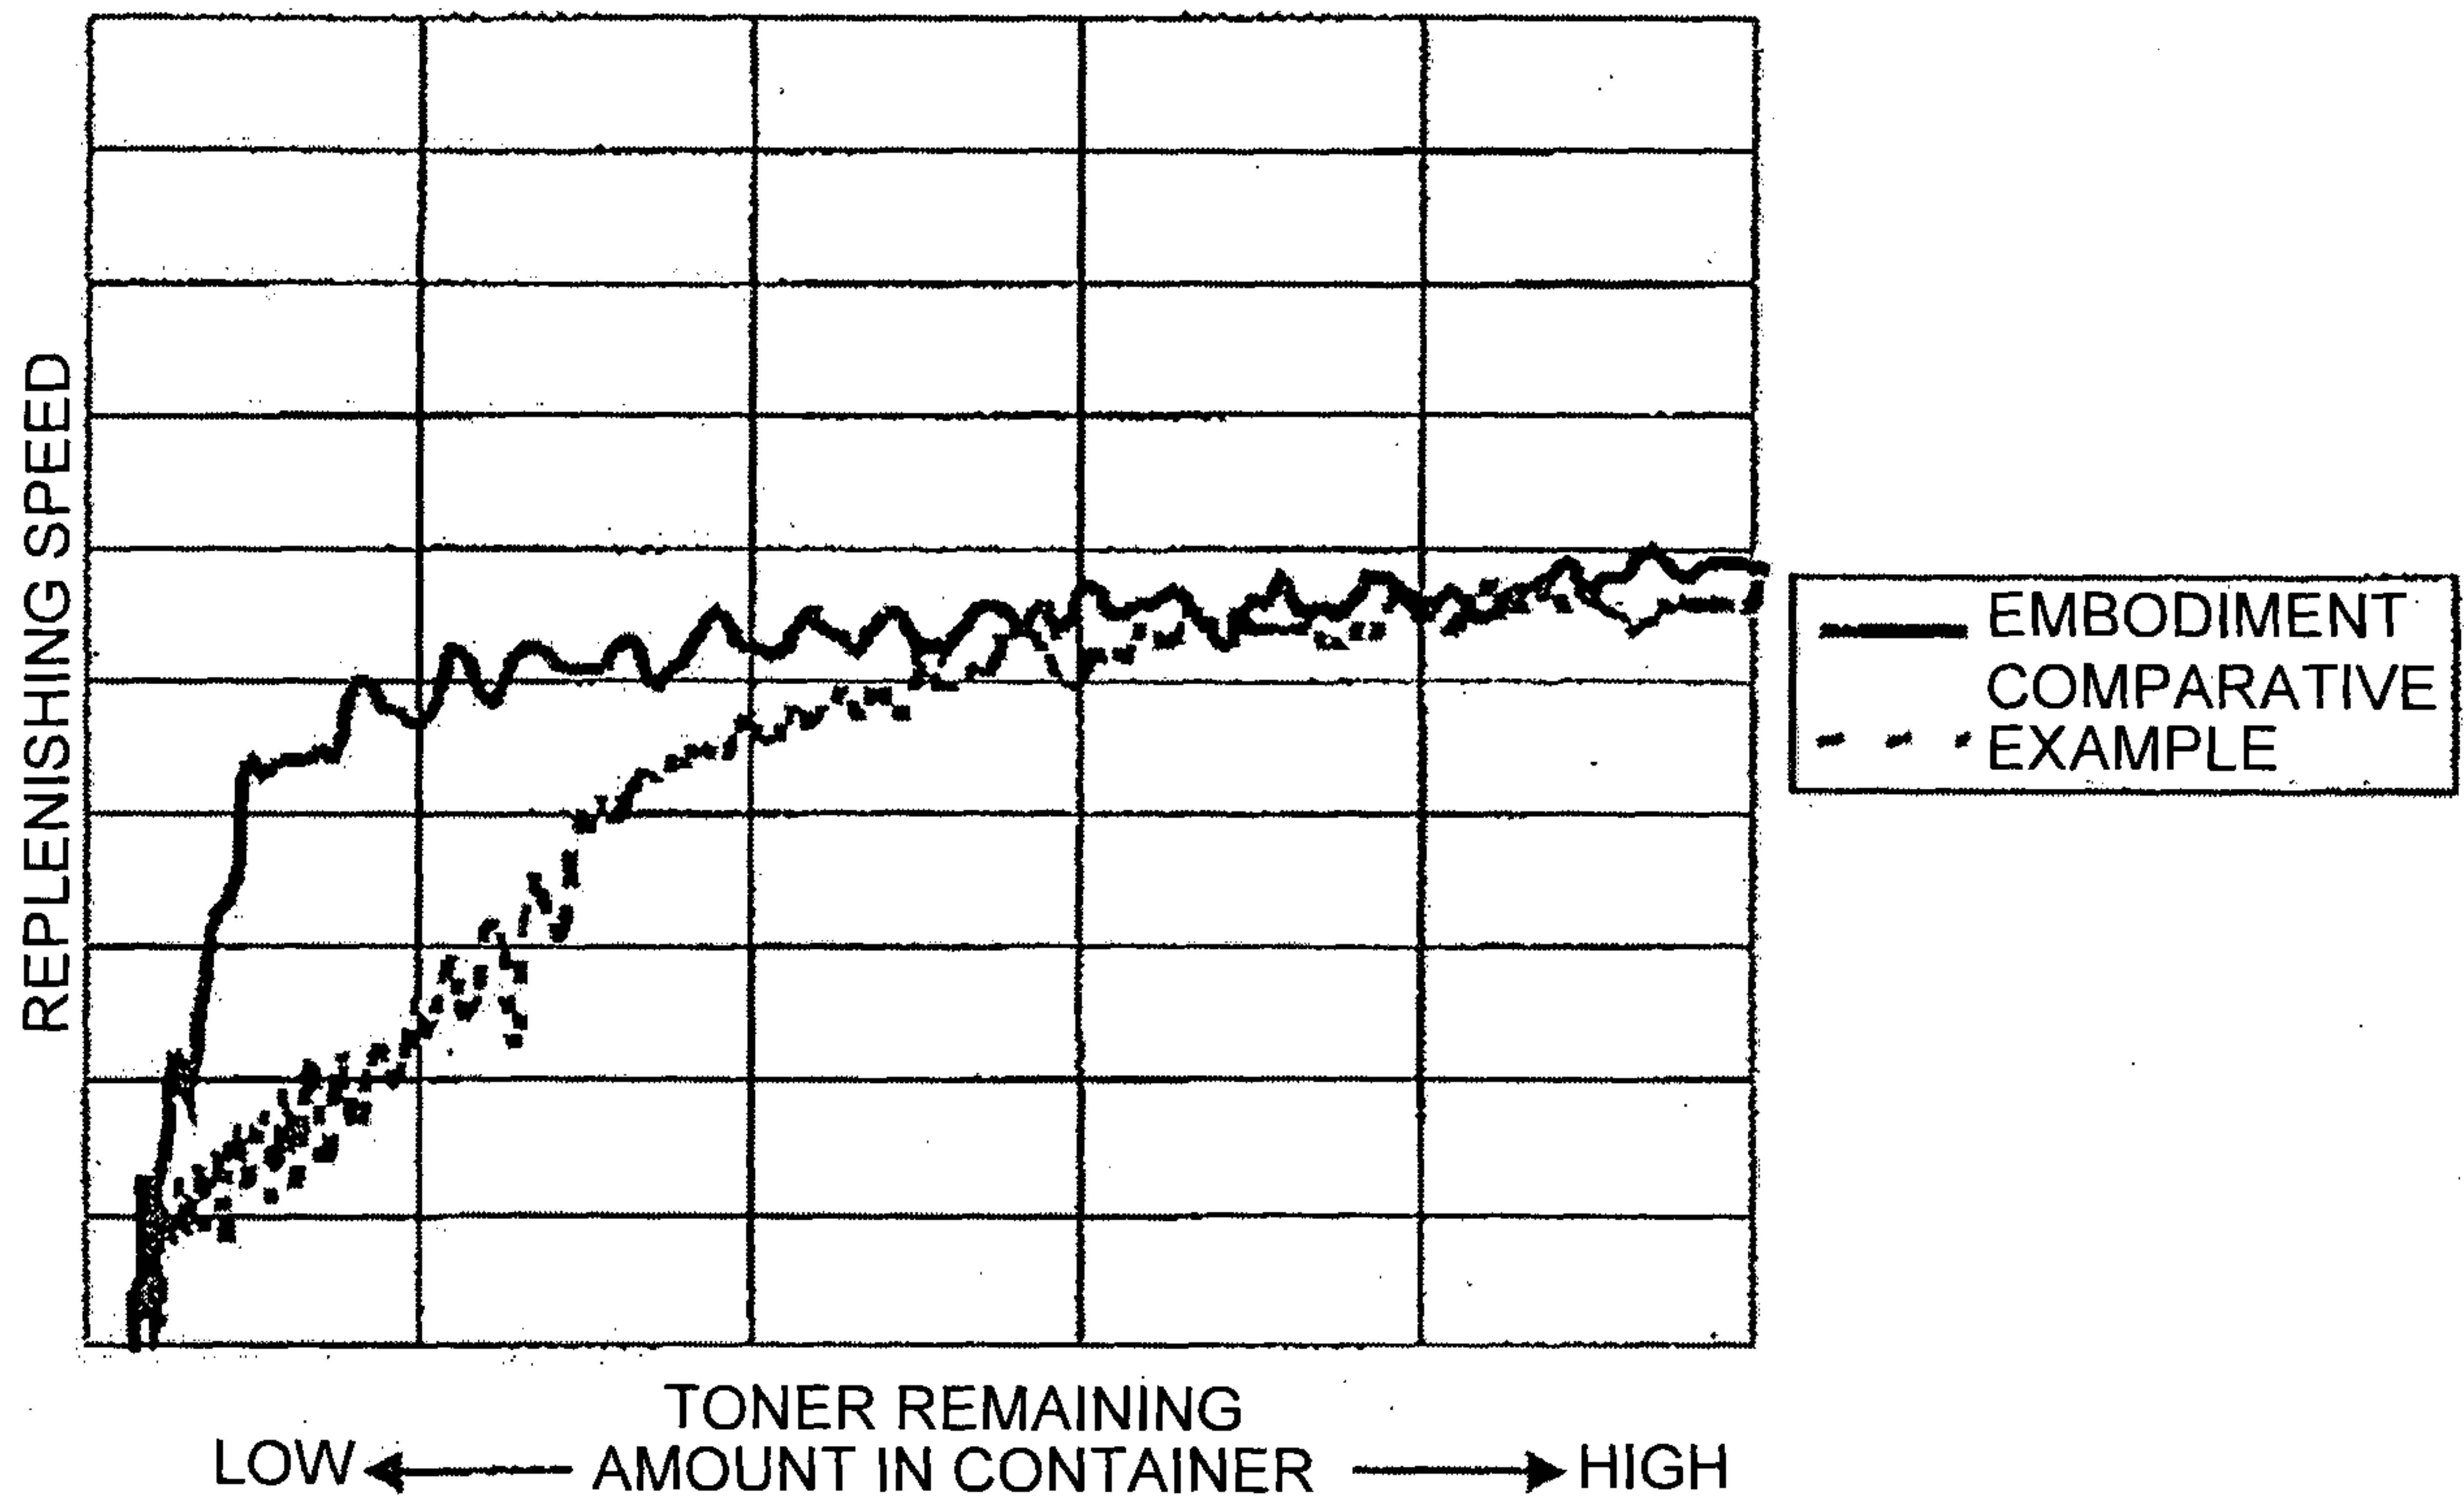

47/66

FIG.47A

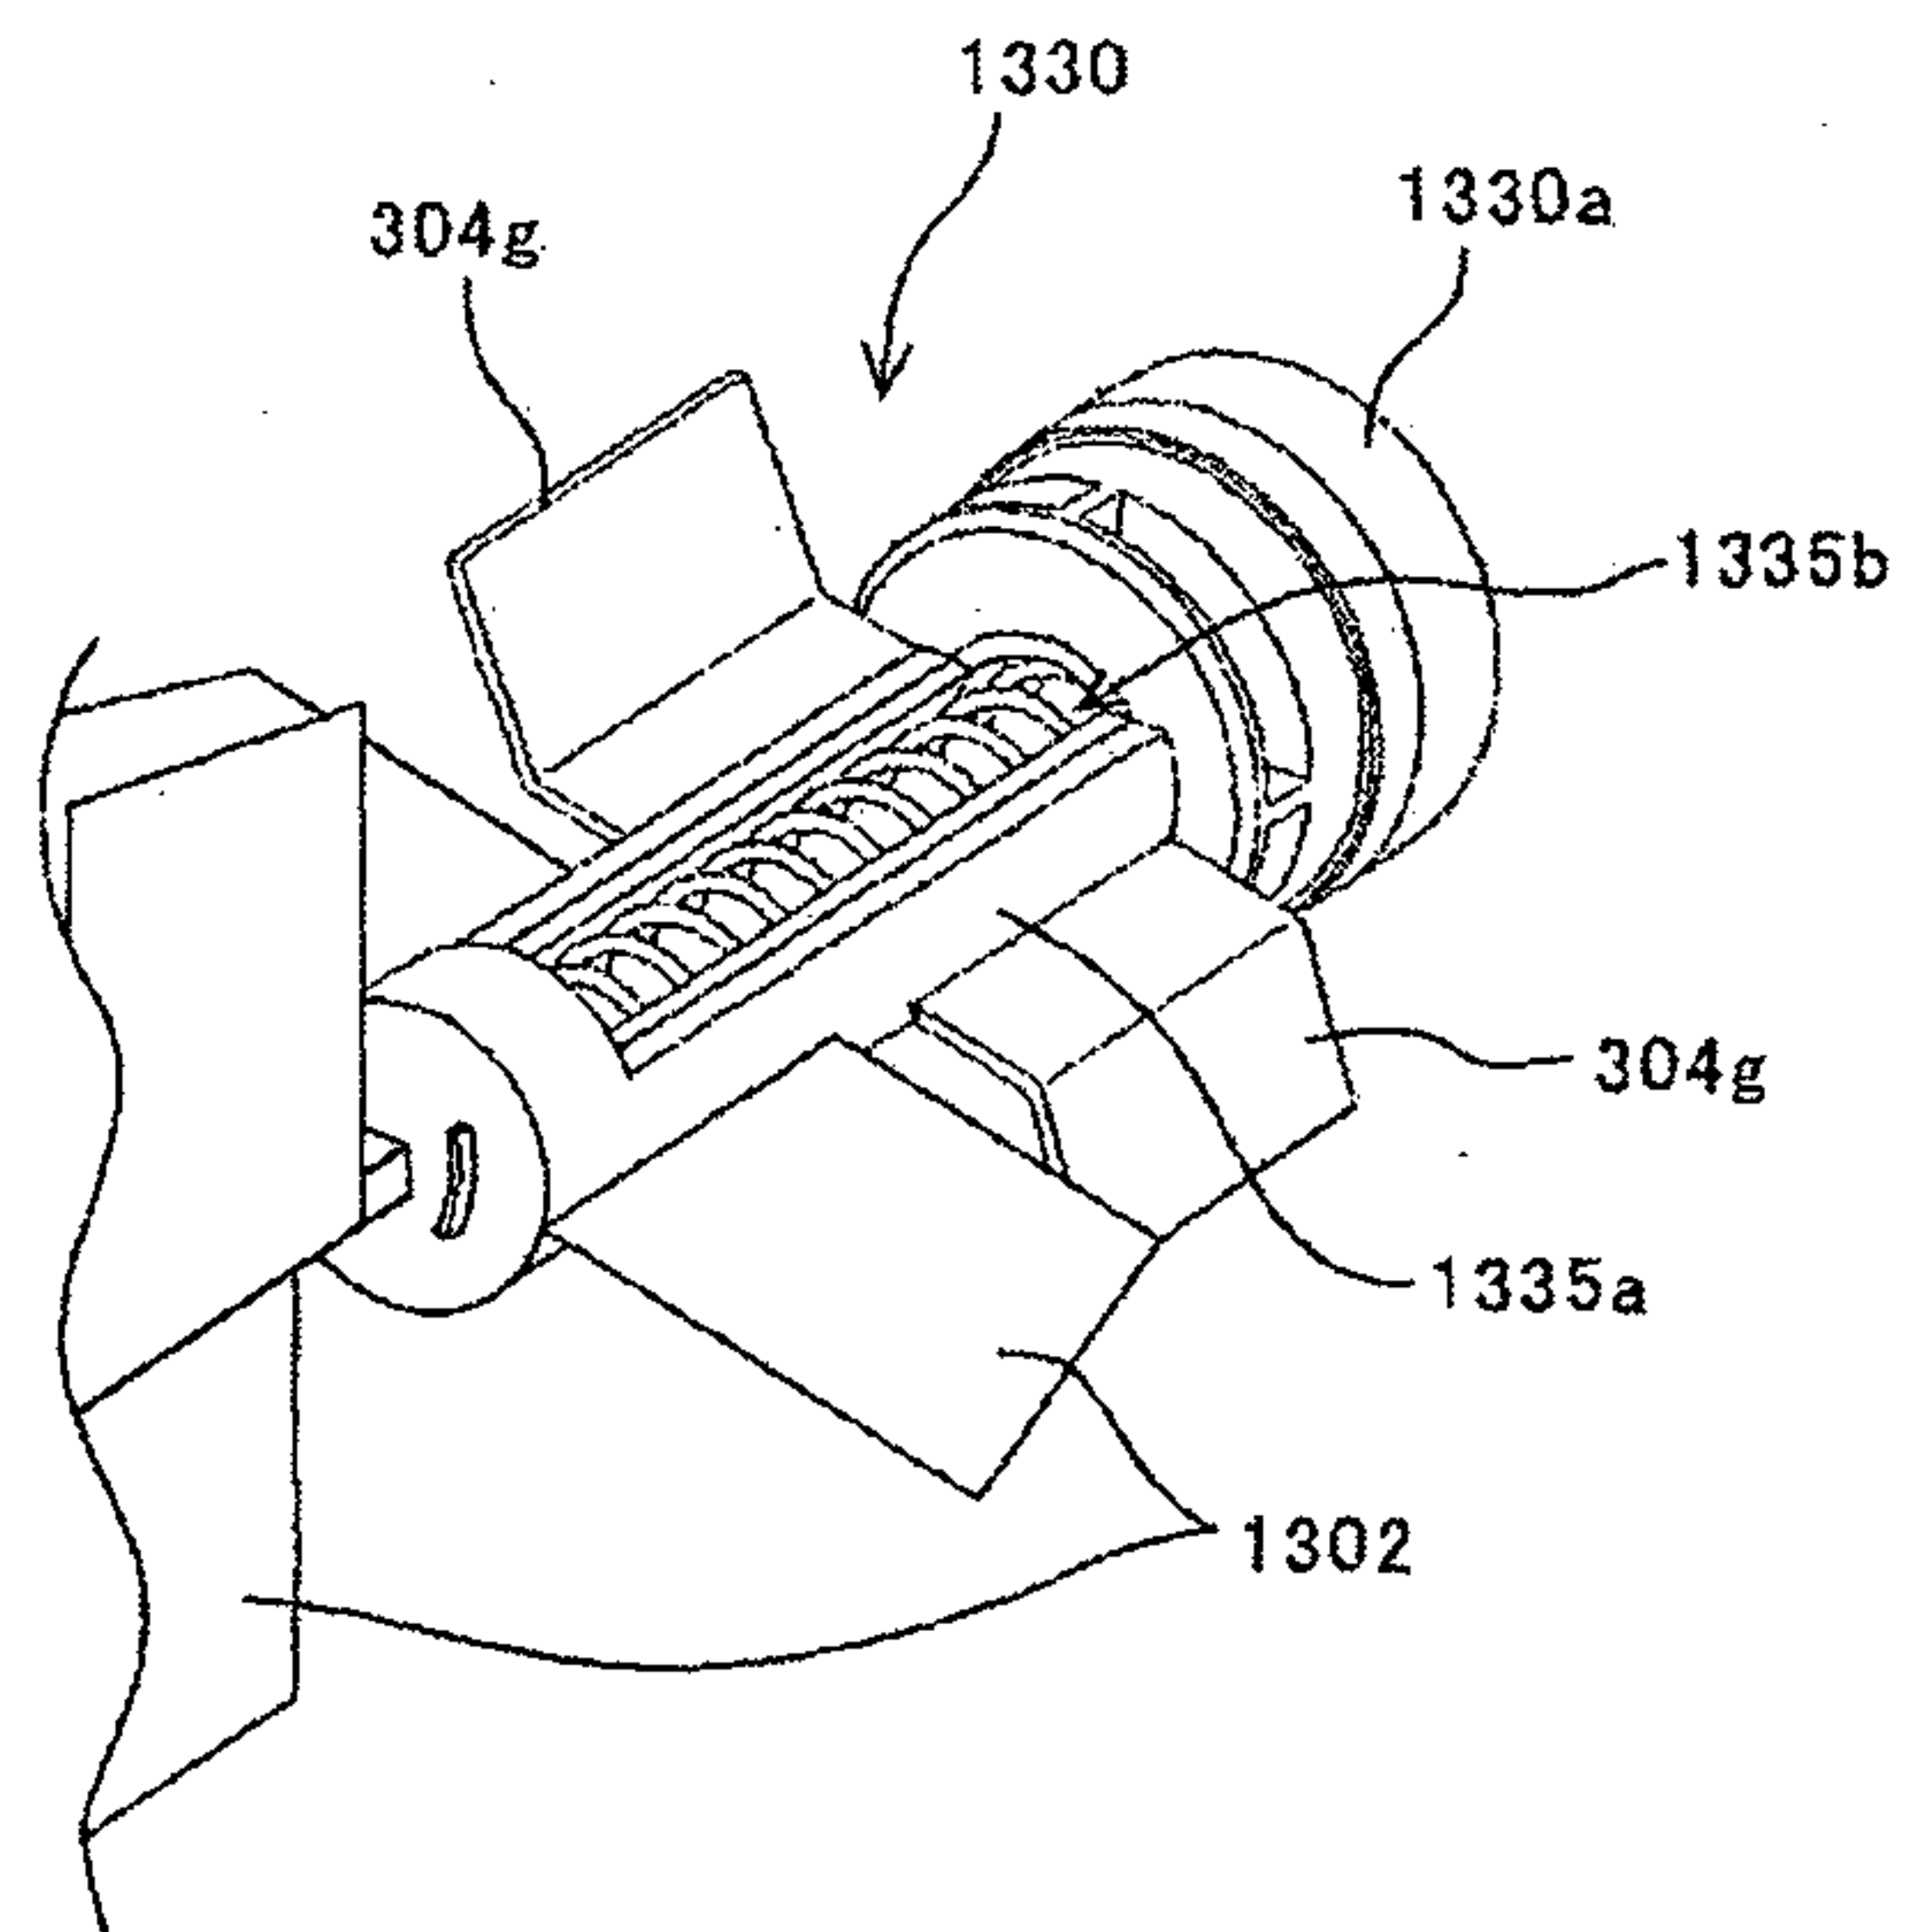


FIG.47B

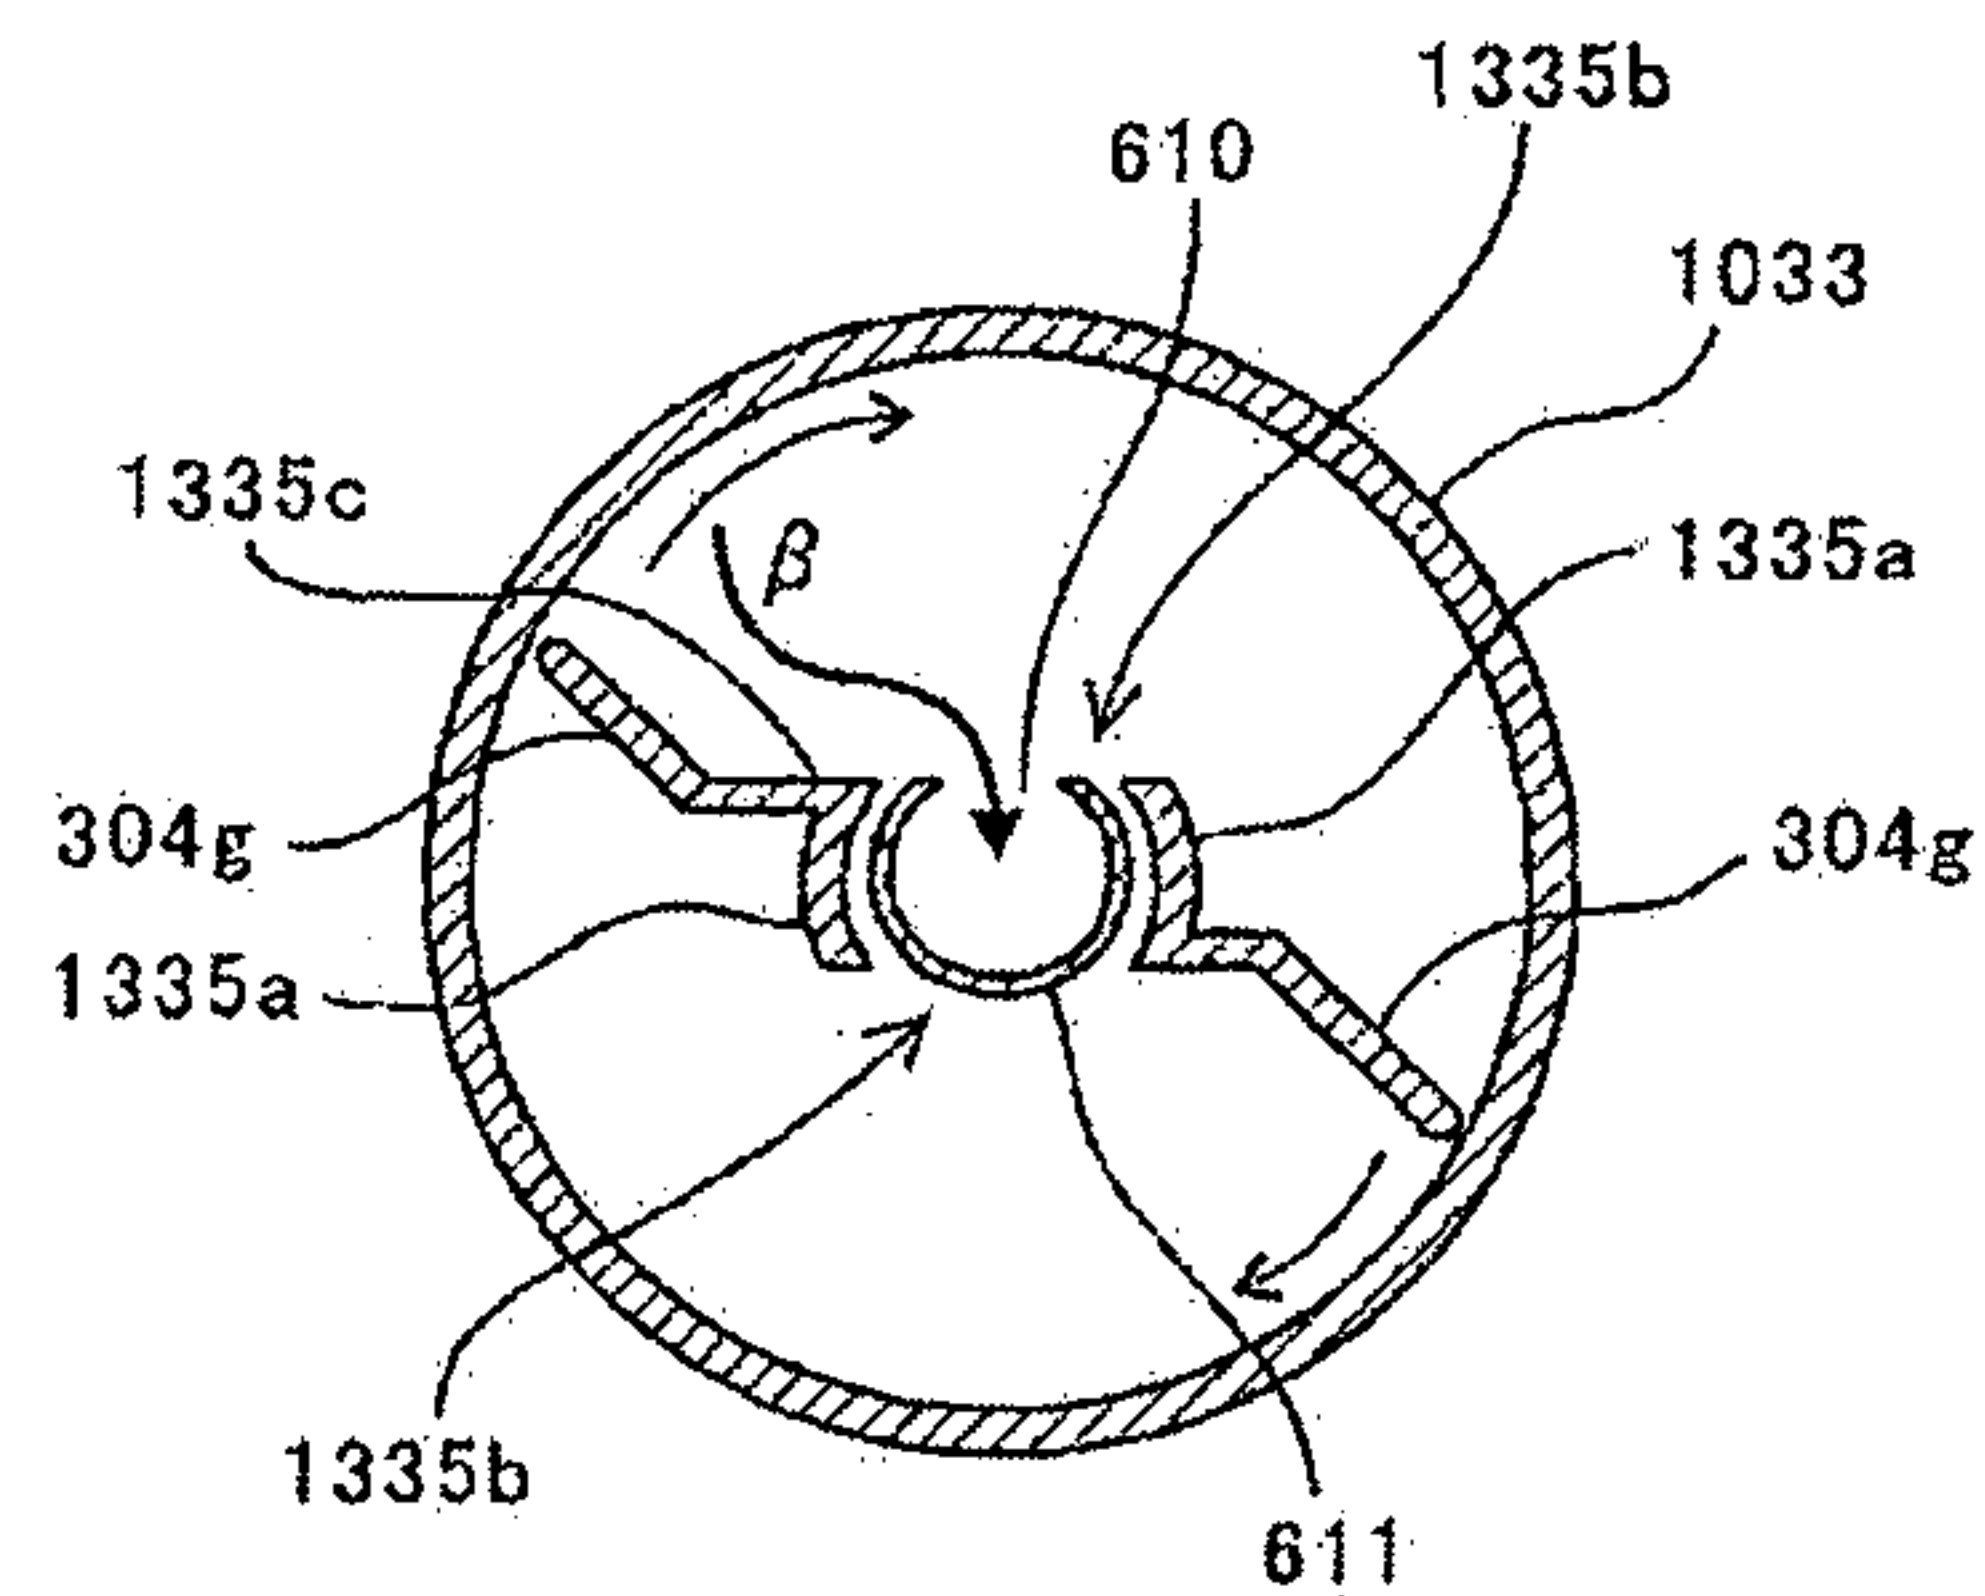


FIG.47C


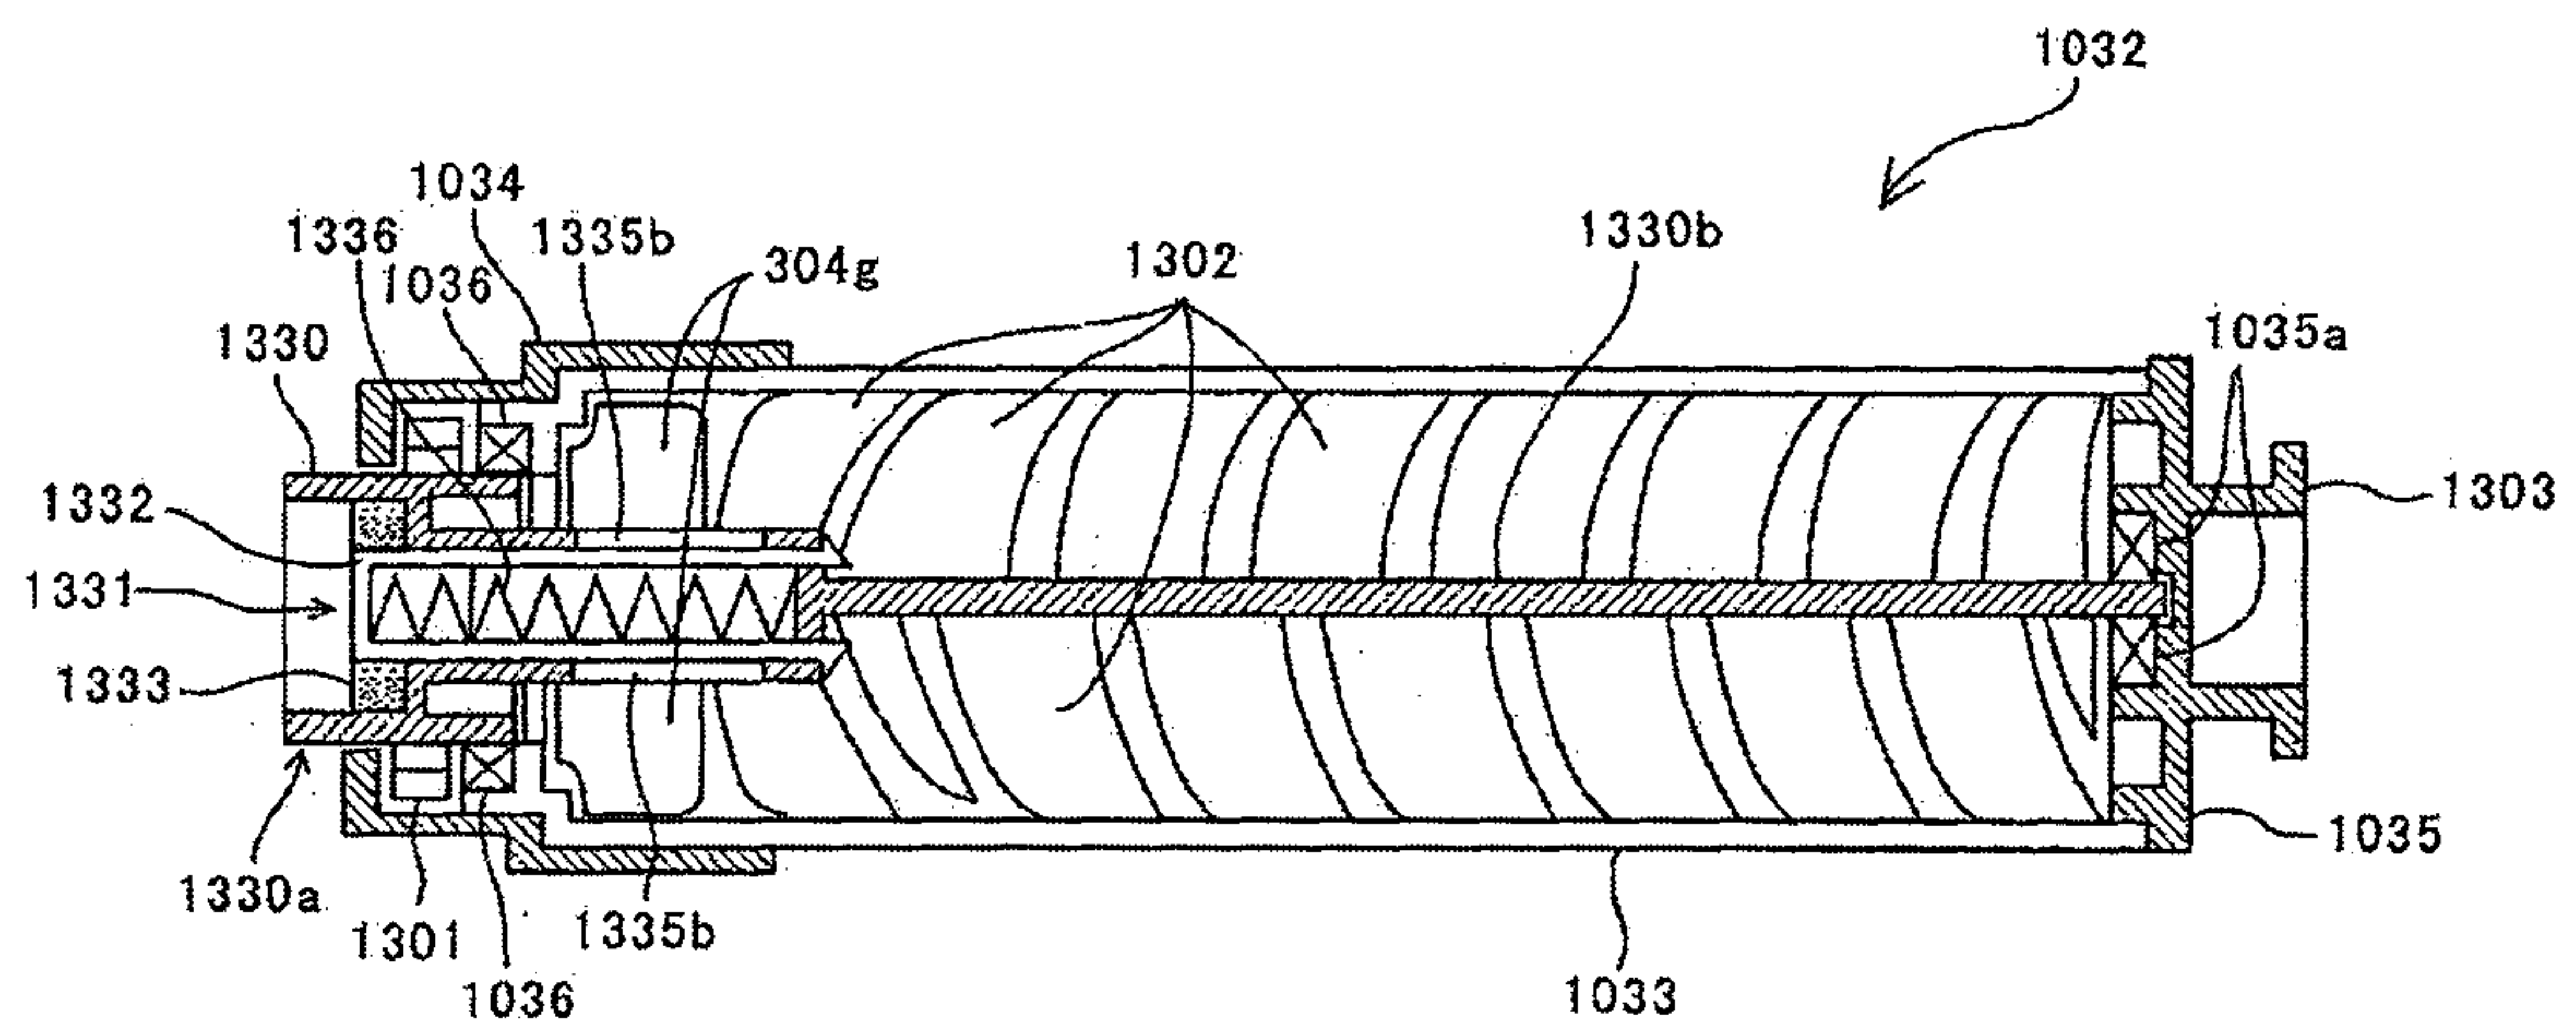


FIG.47D

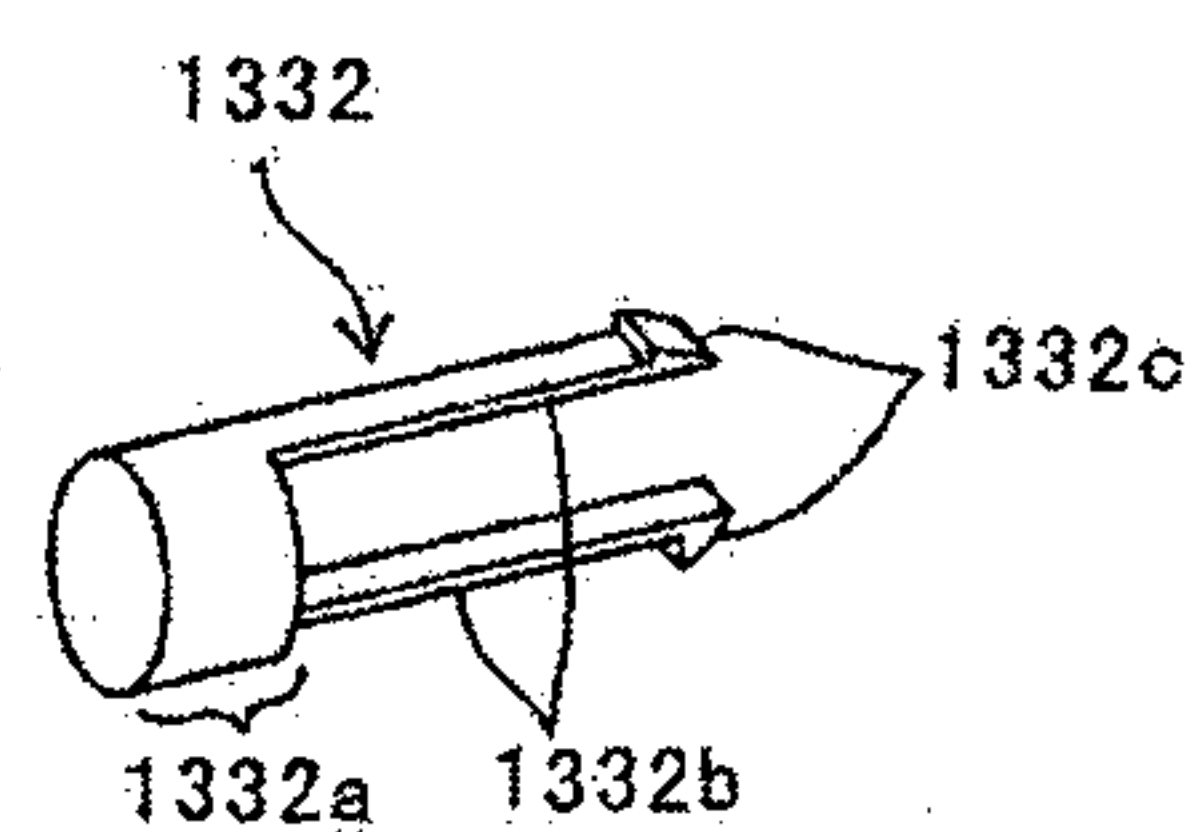

48/66

FIG.48A



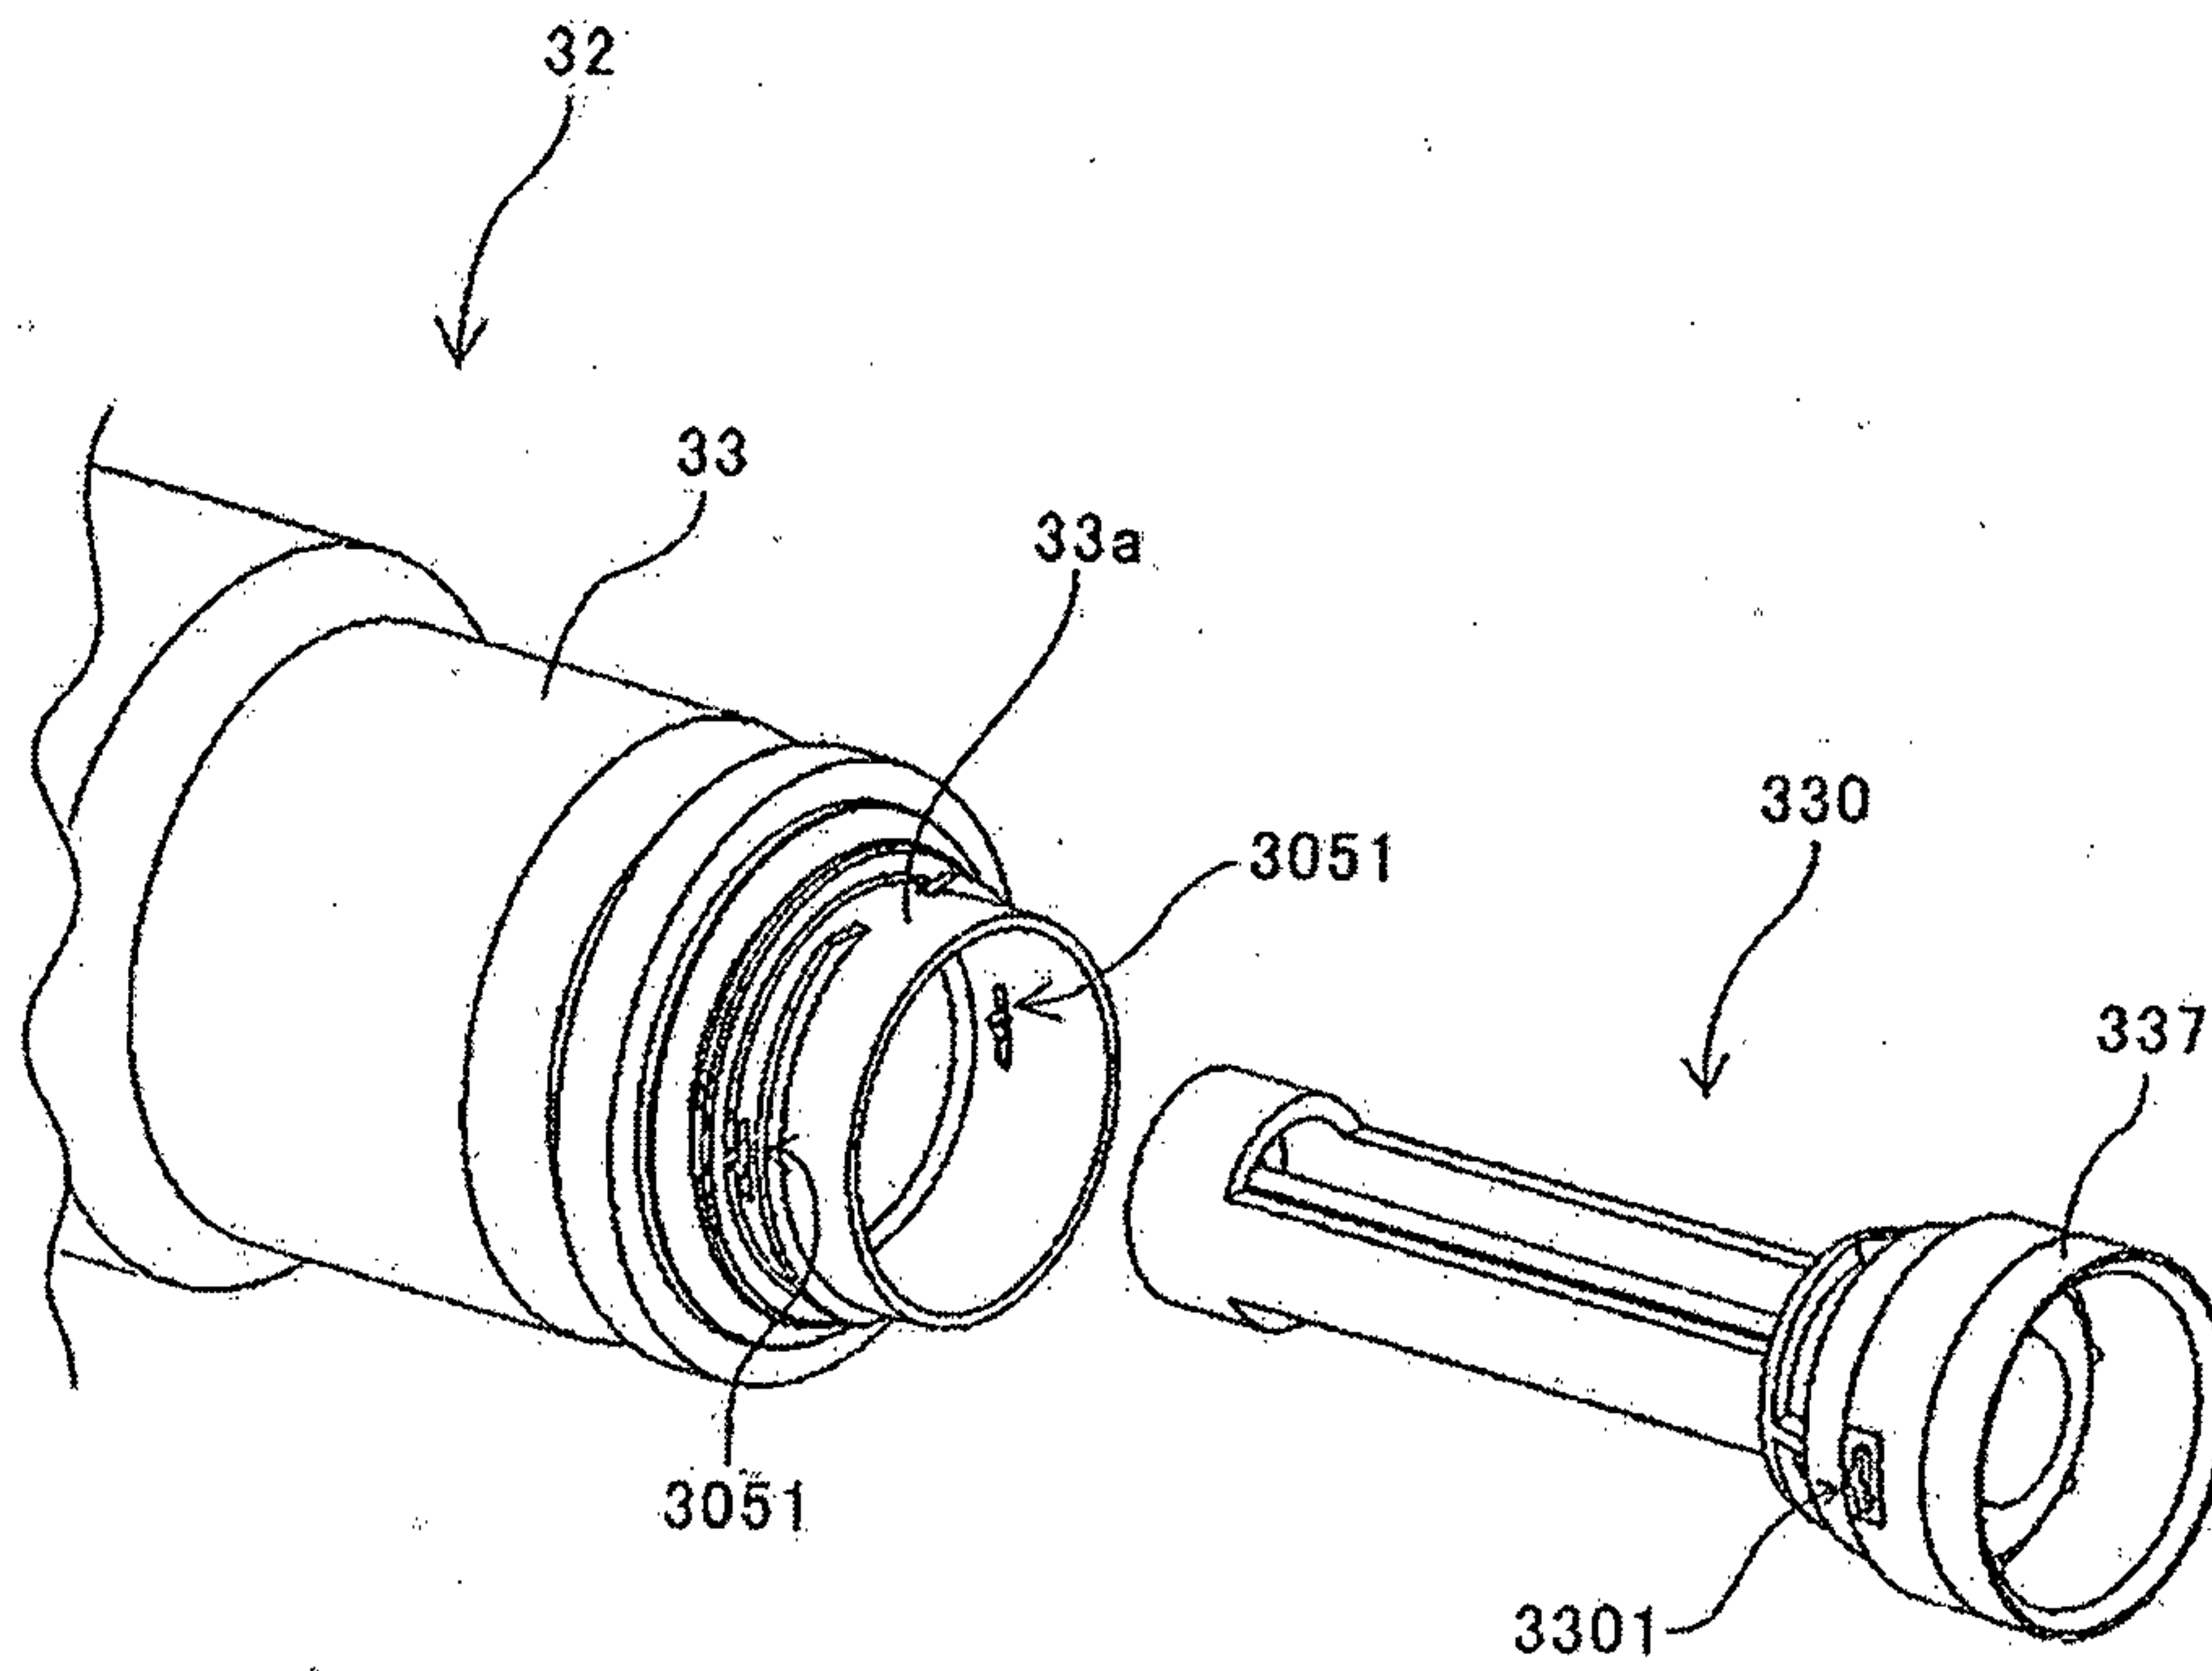


FIG.48B

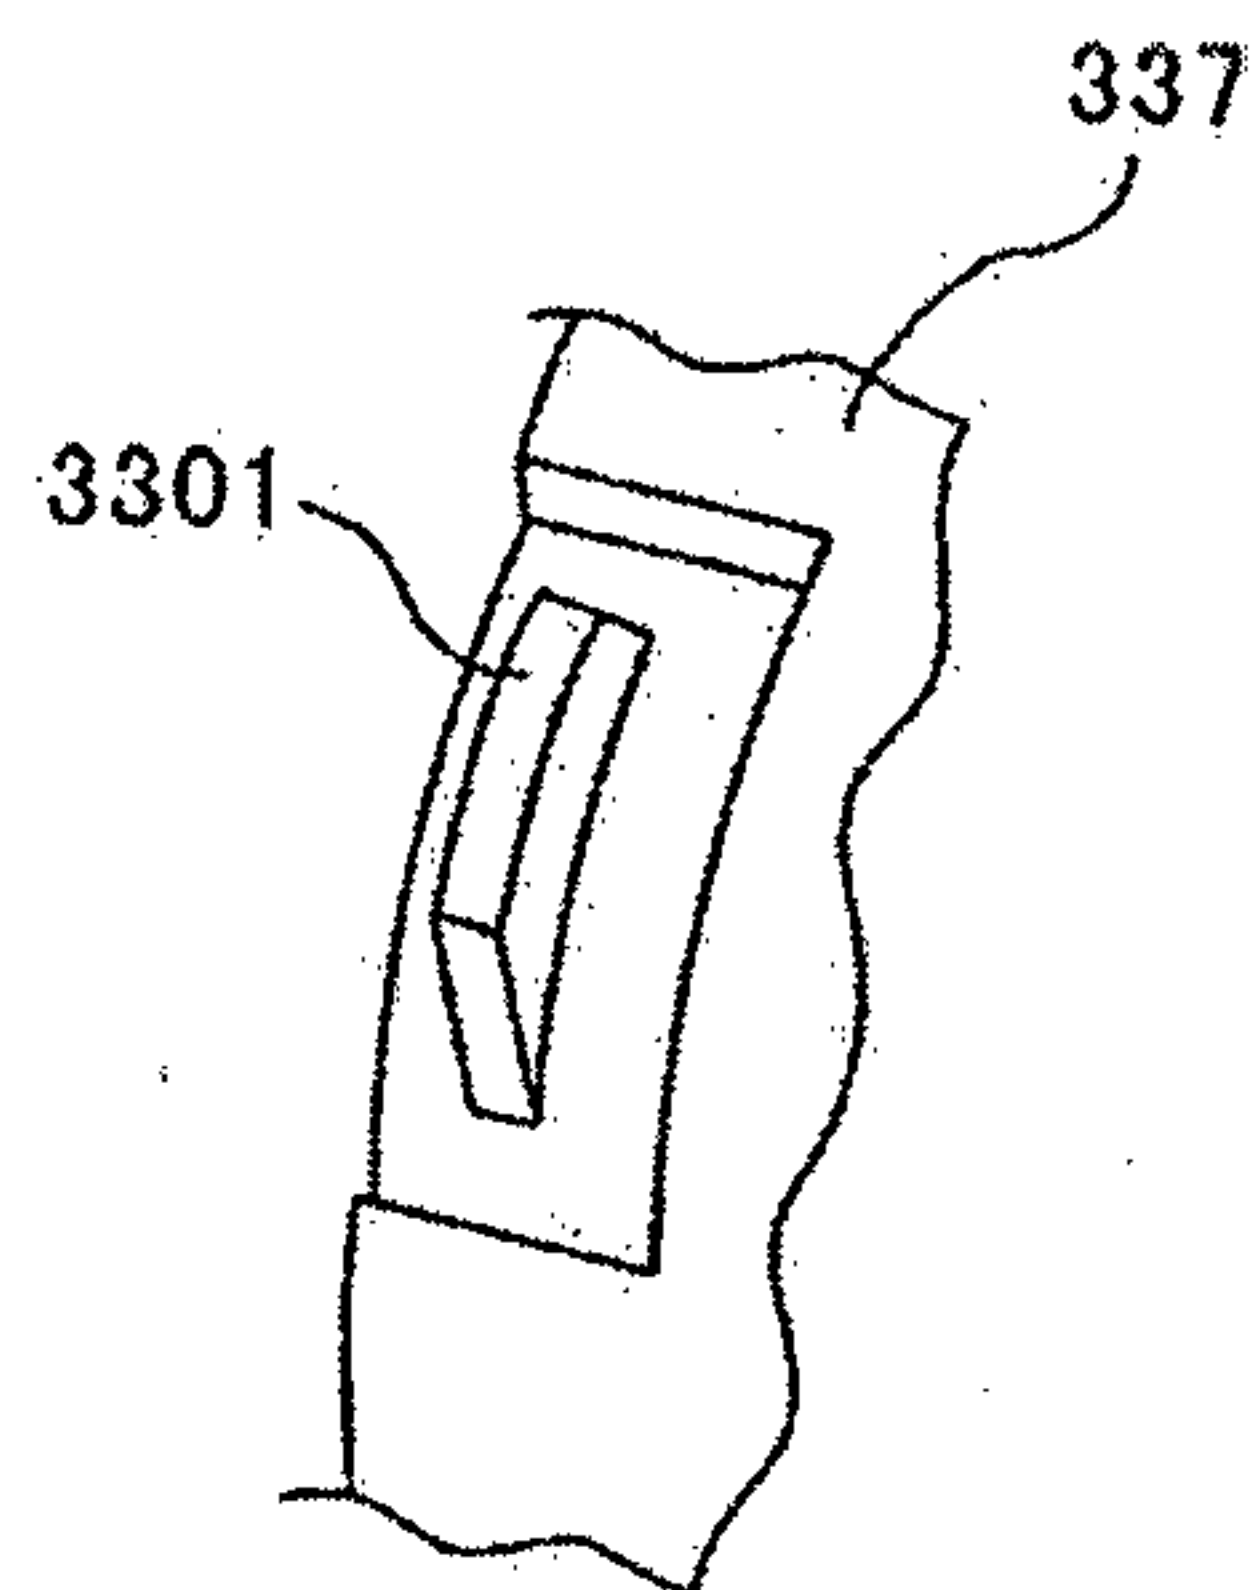

49/66

FIG.49

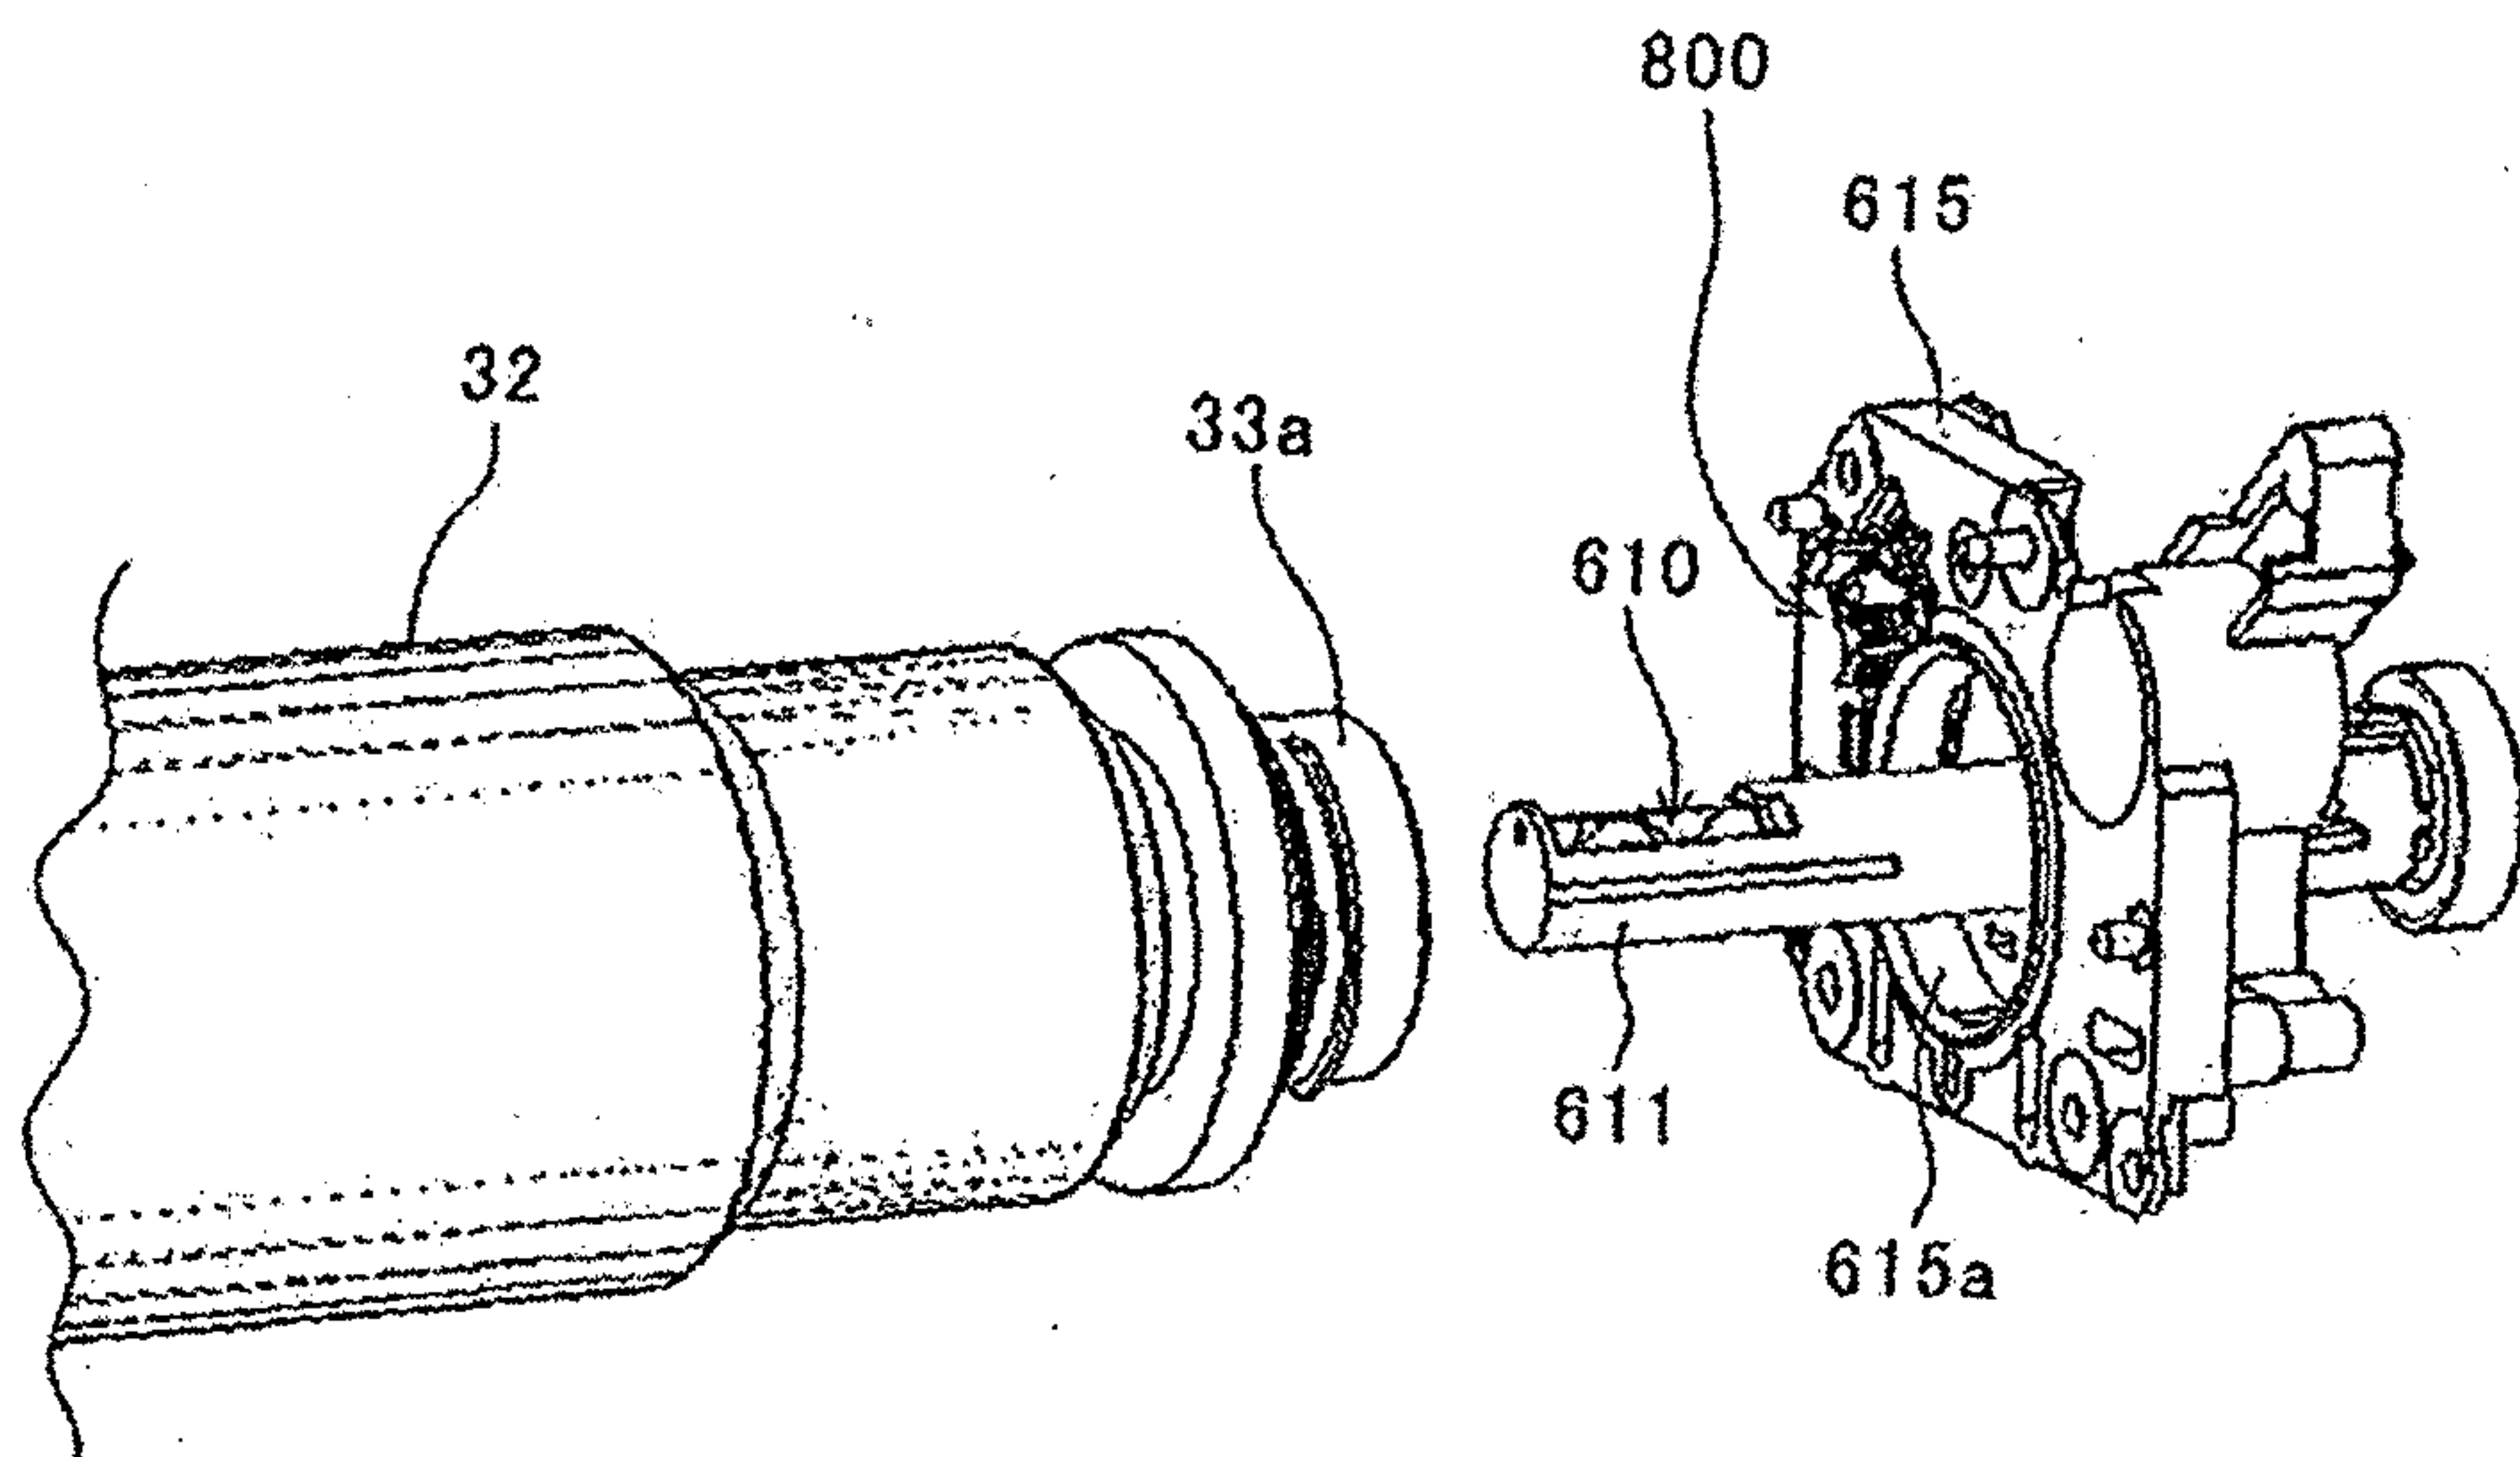

50/66

FIG.50A


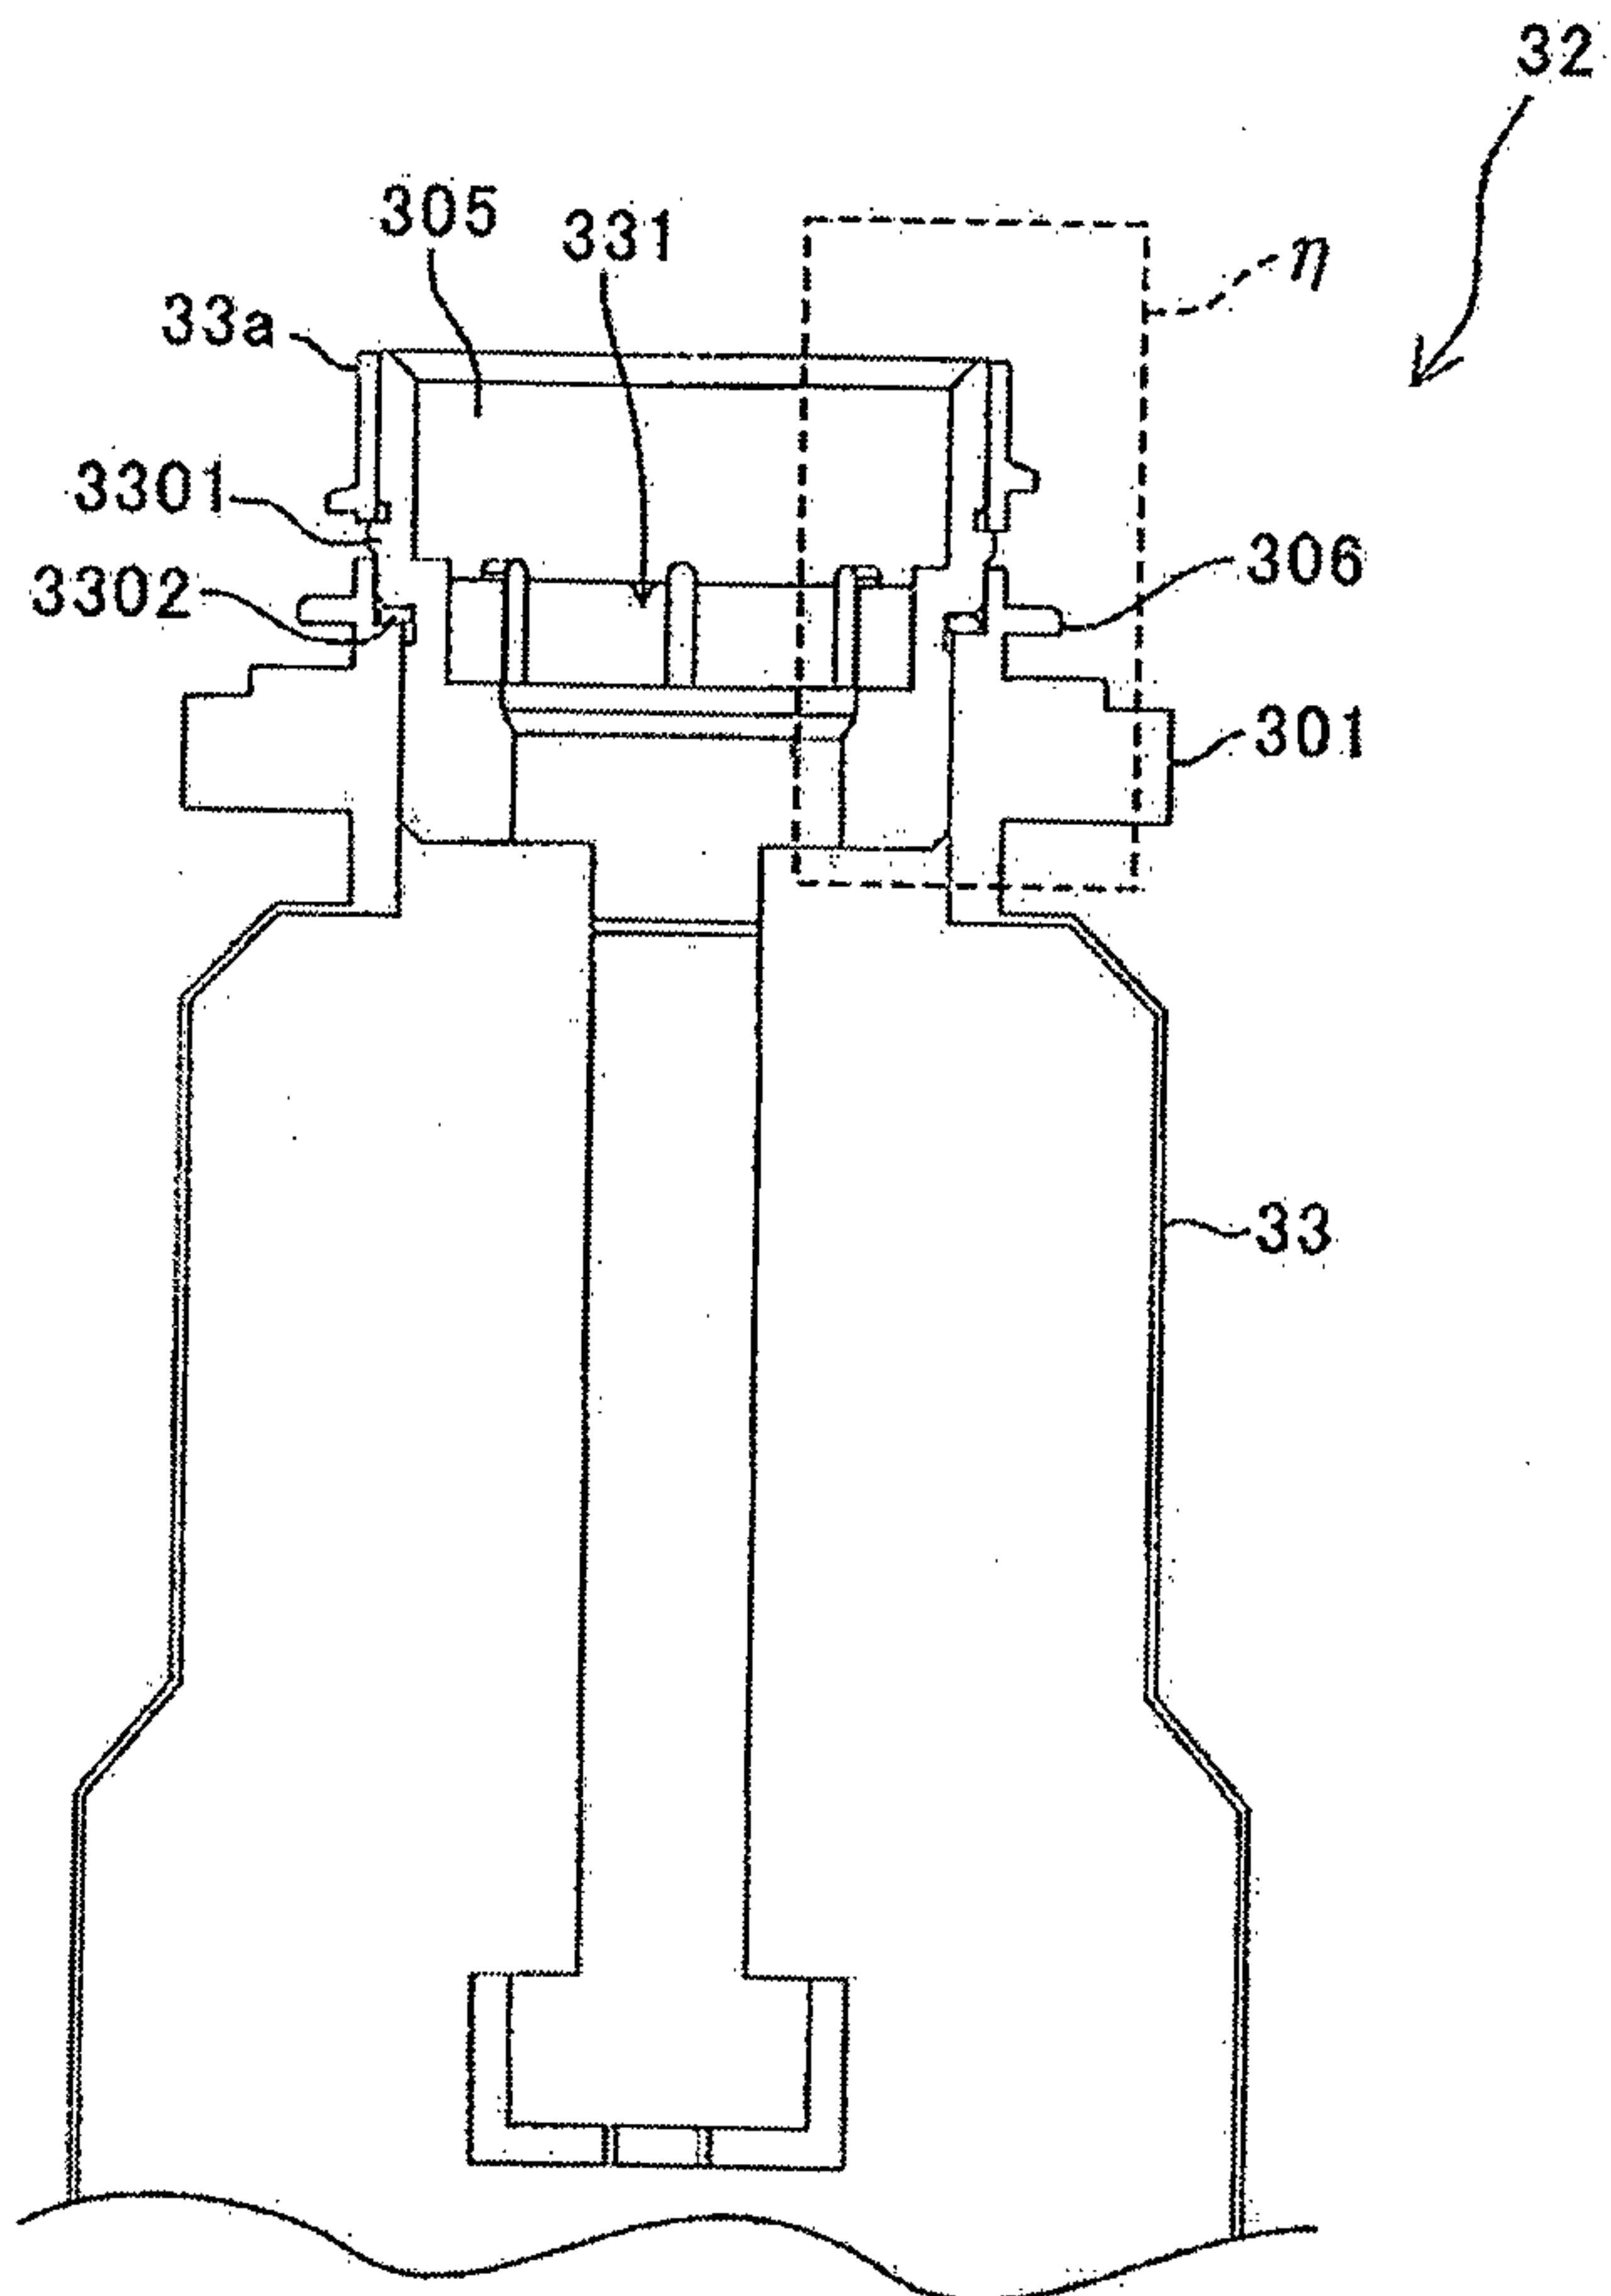


FIG.50B

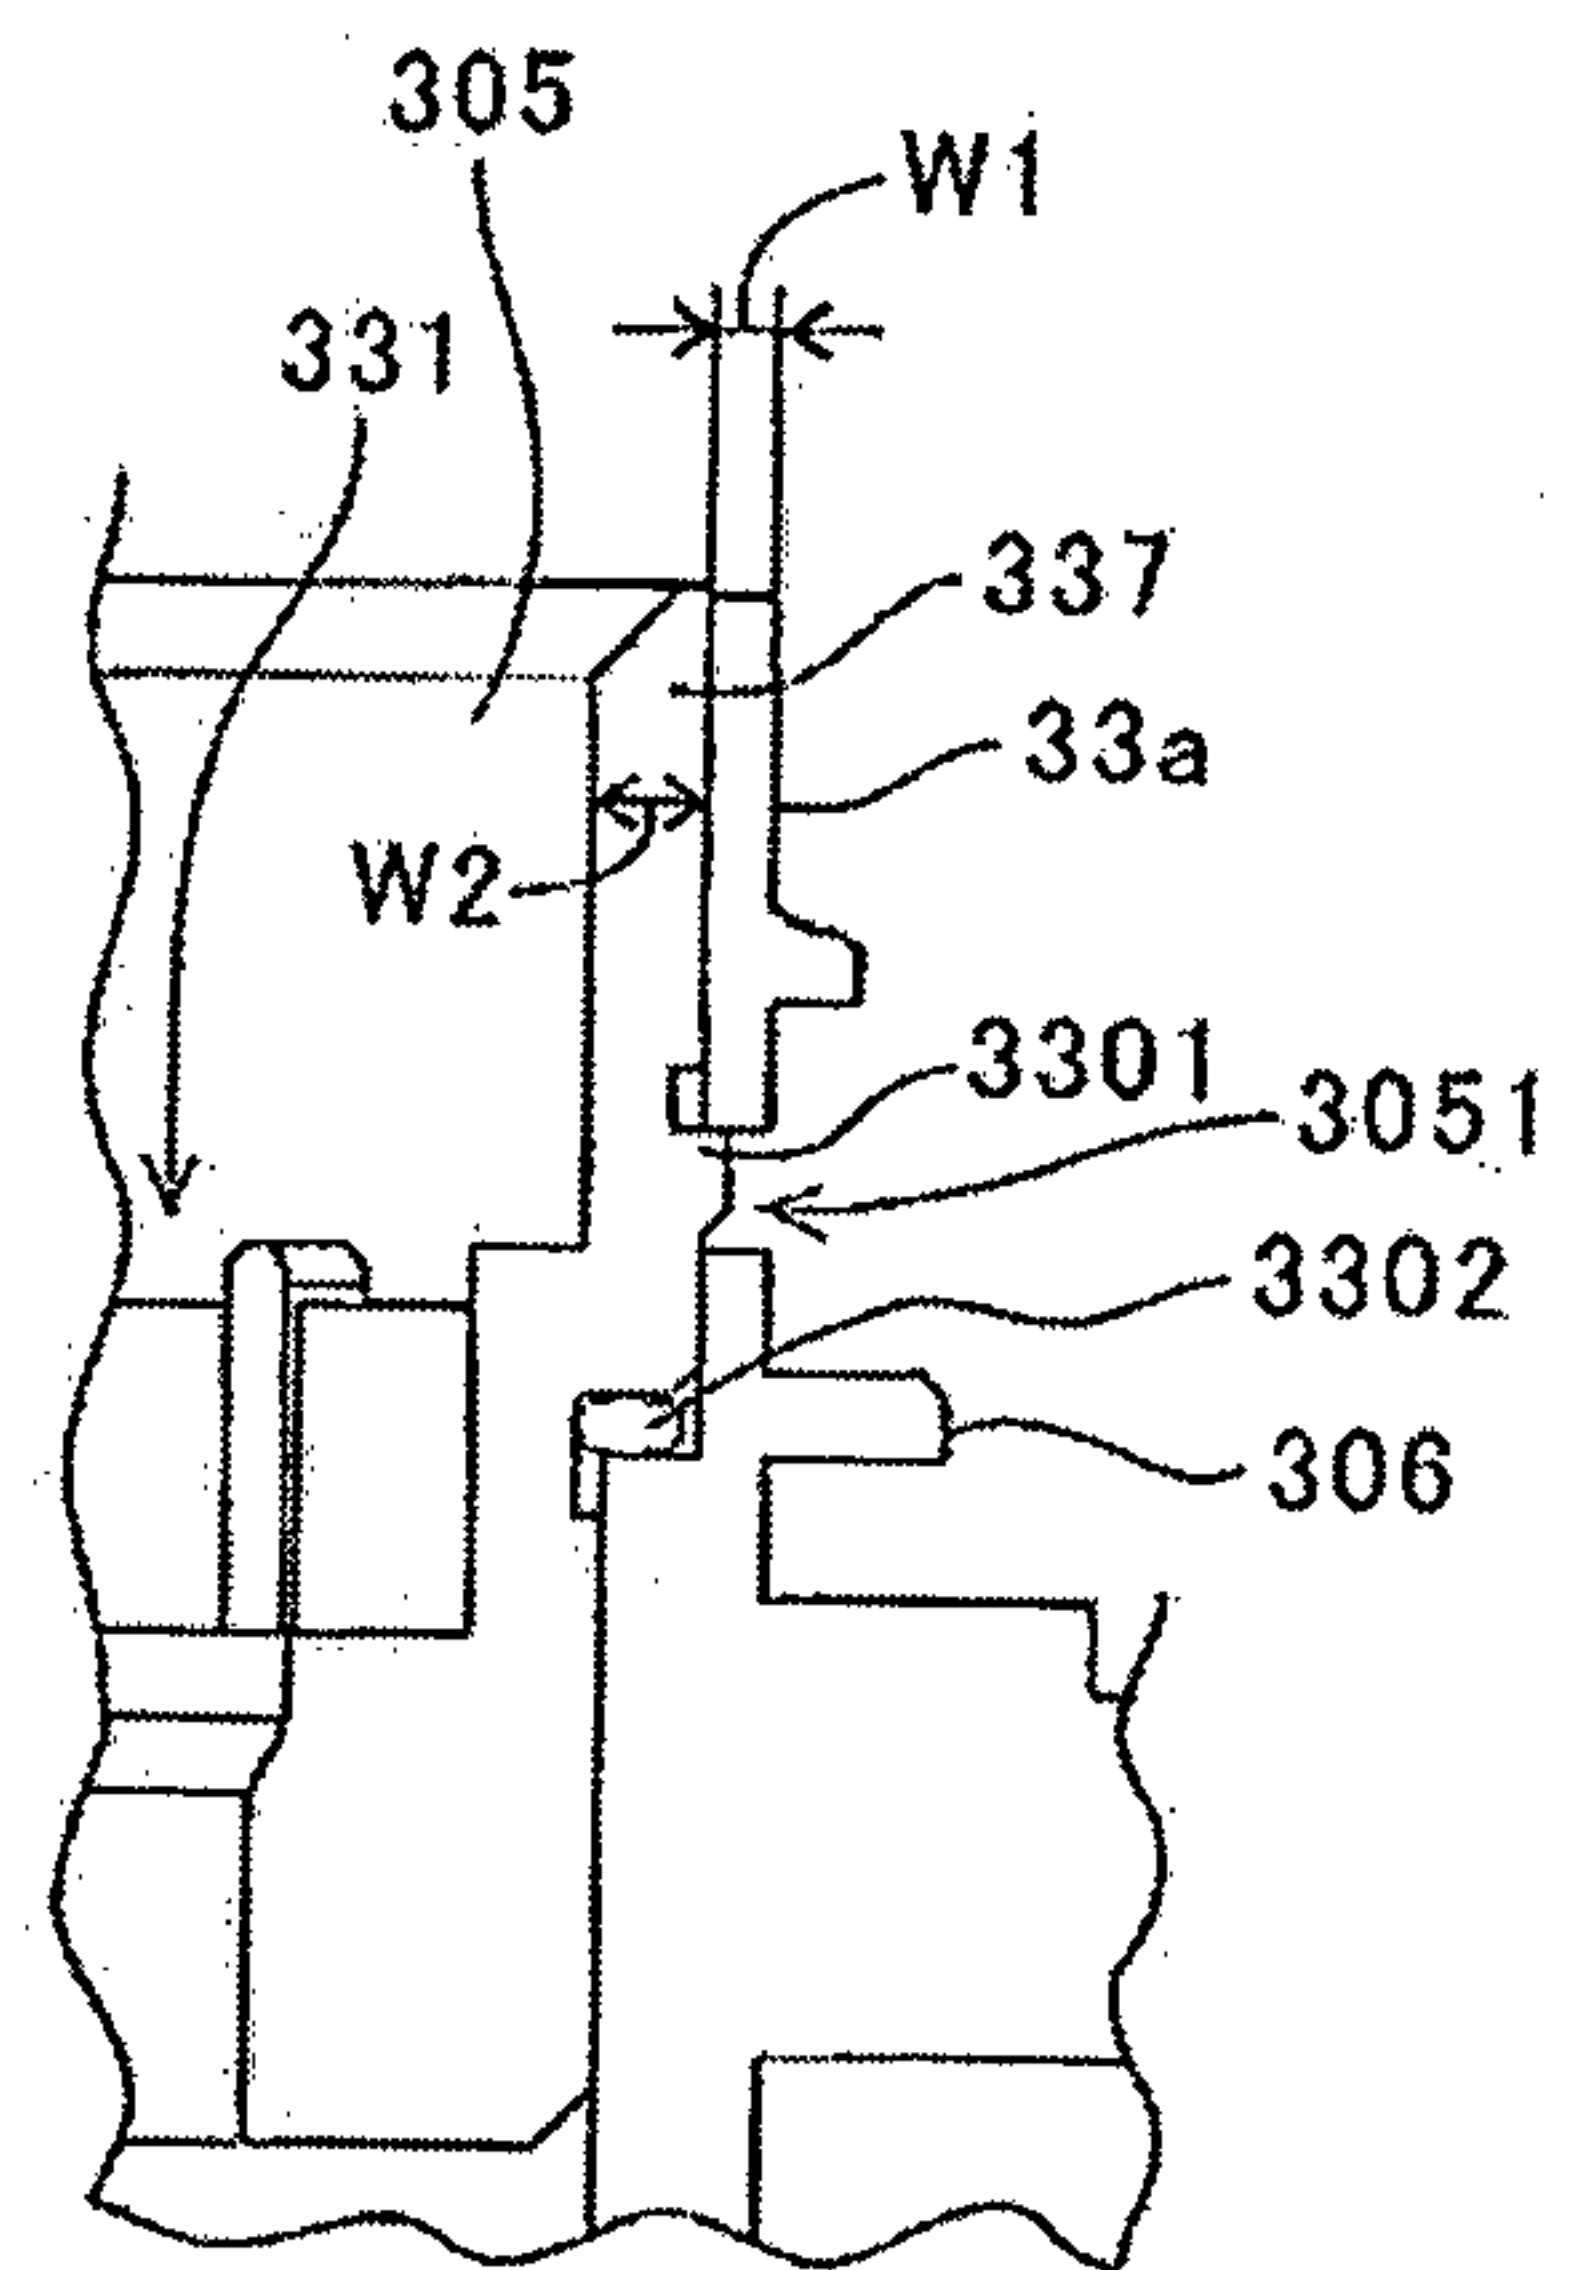

51/66

FIG.51A

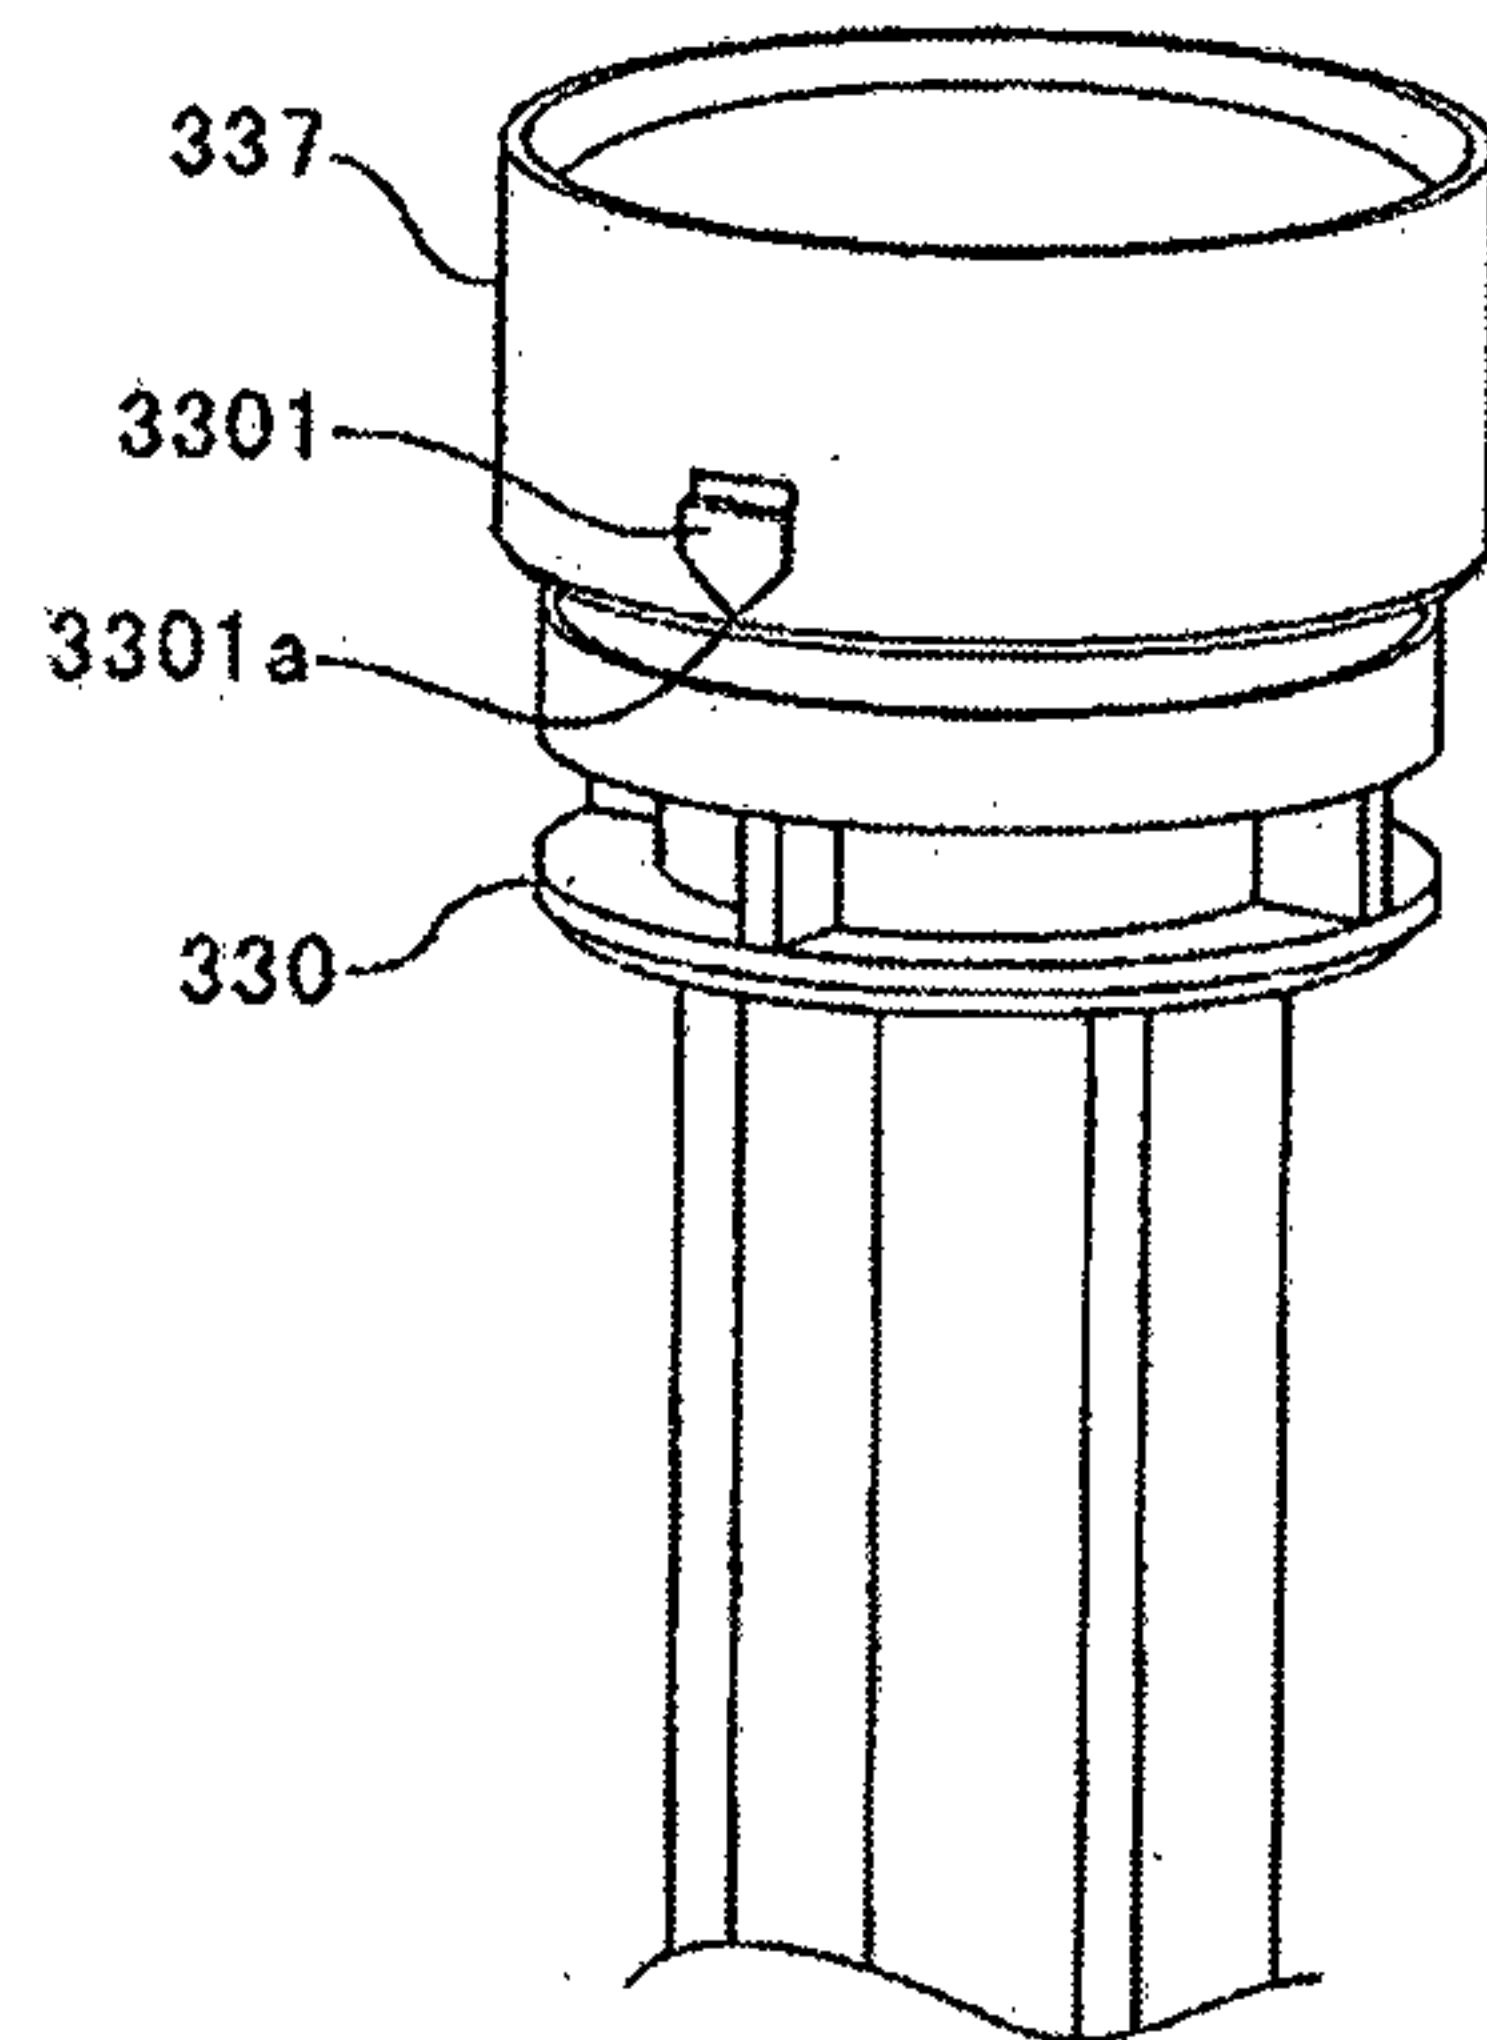


FIG.51B

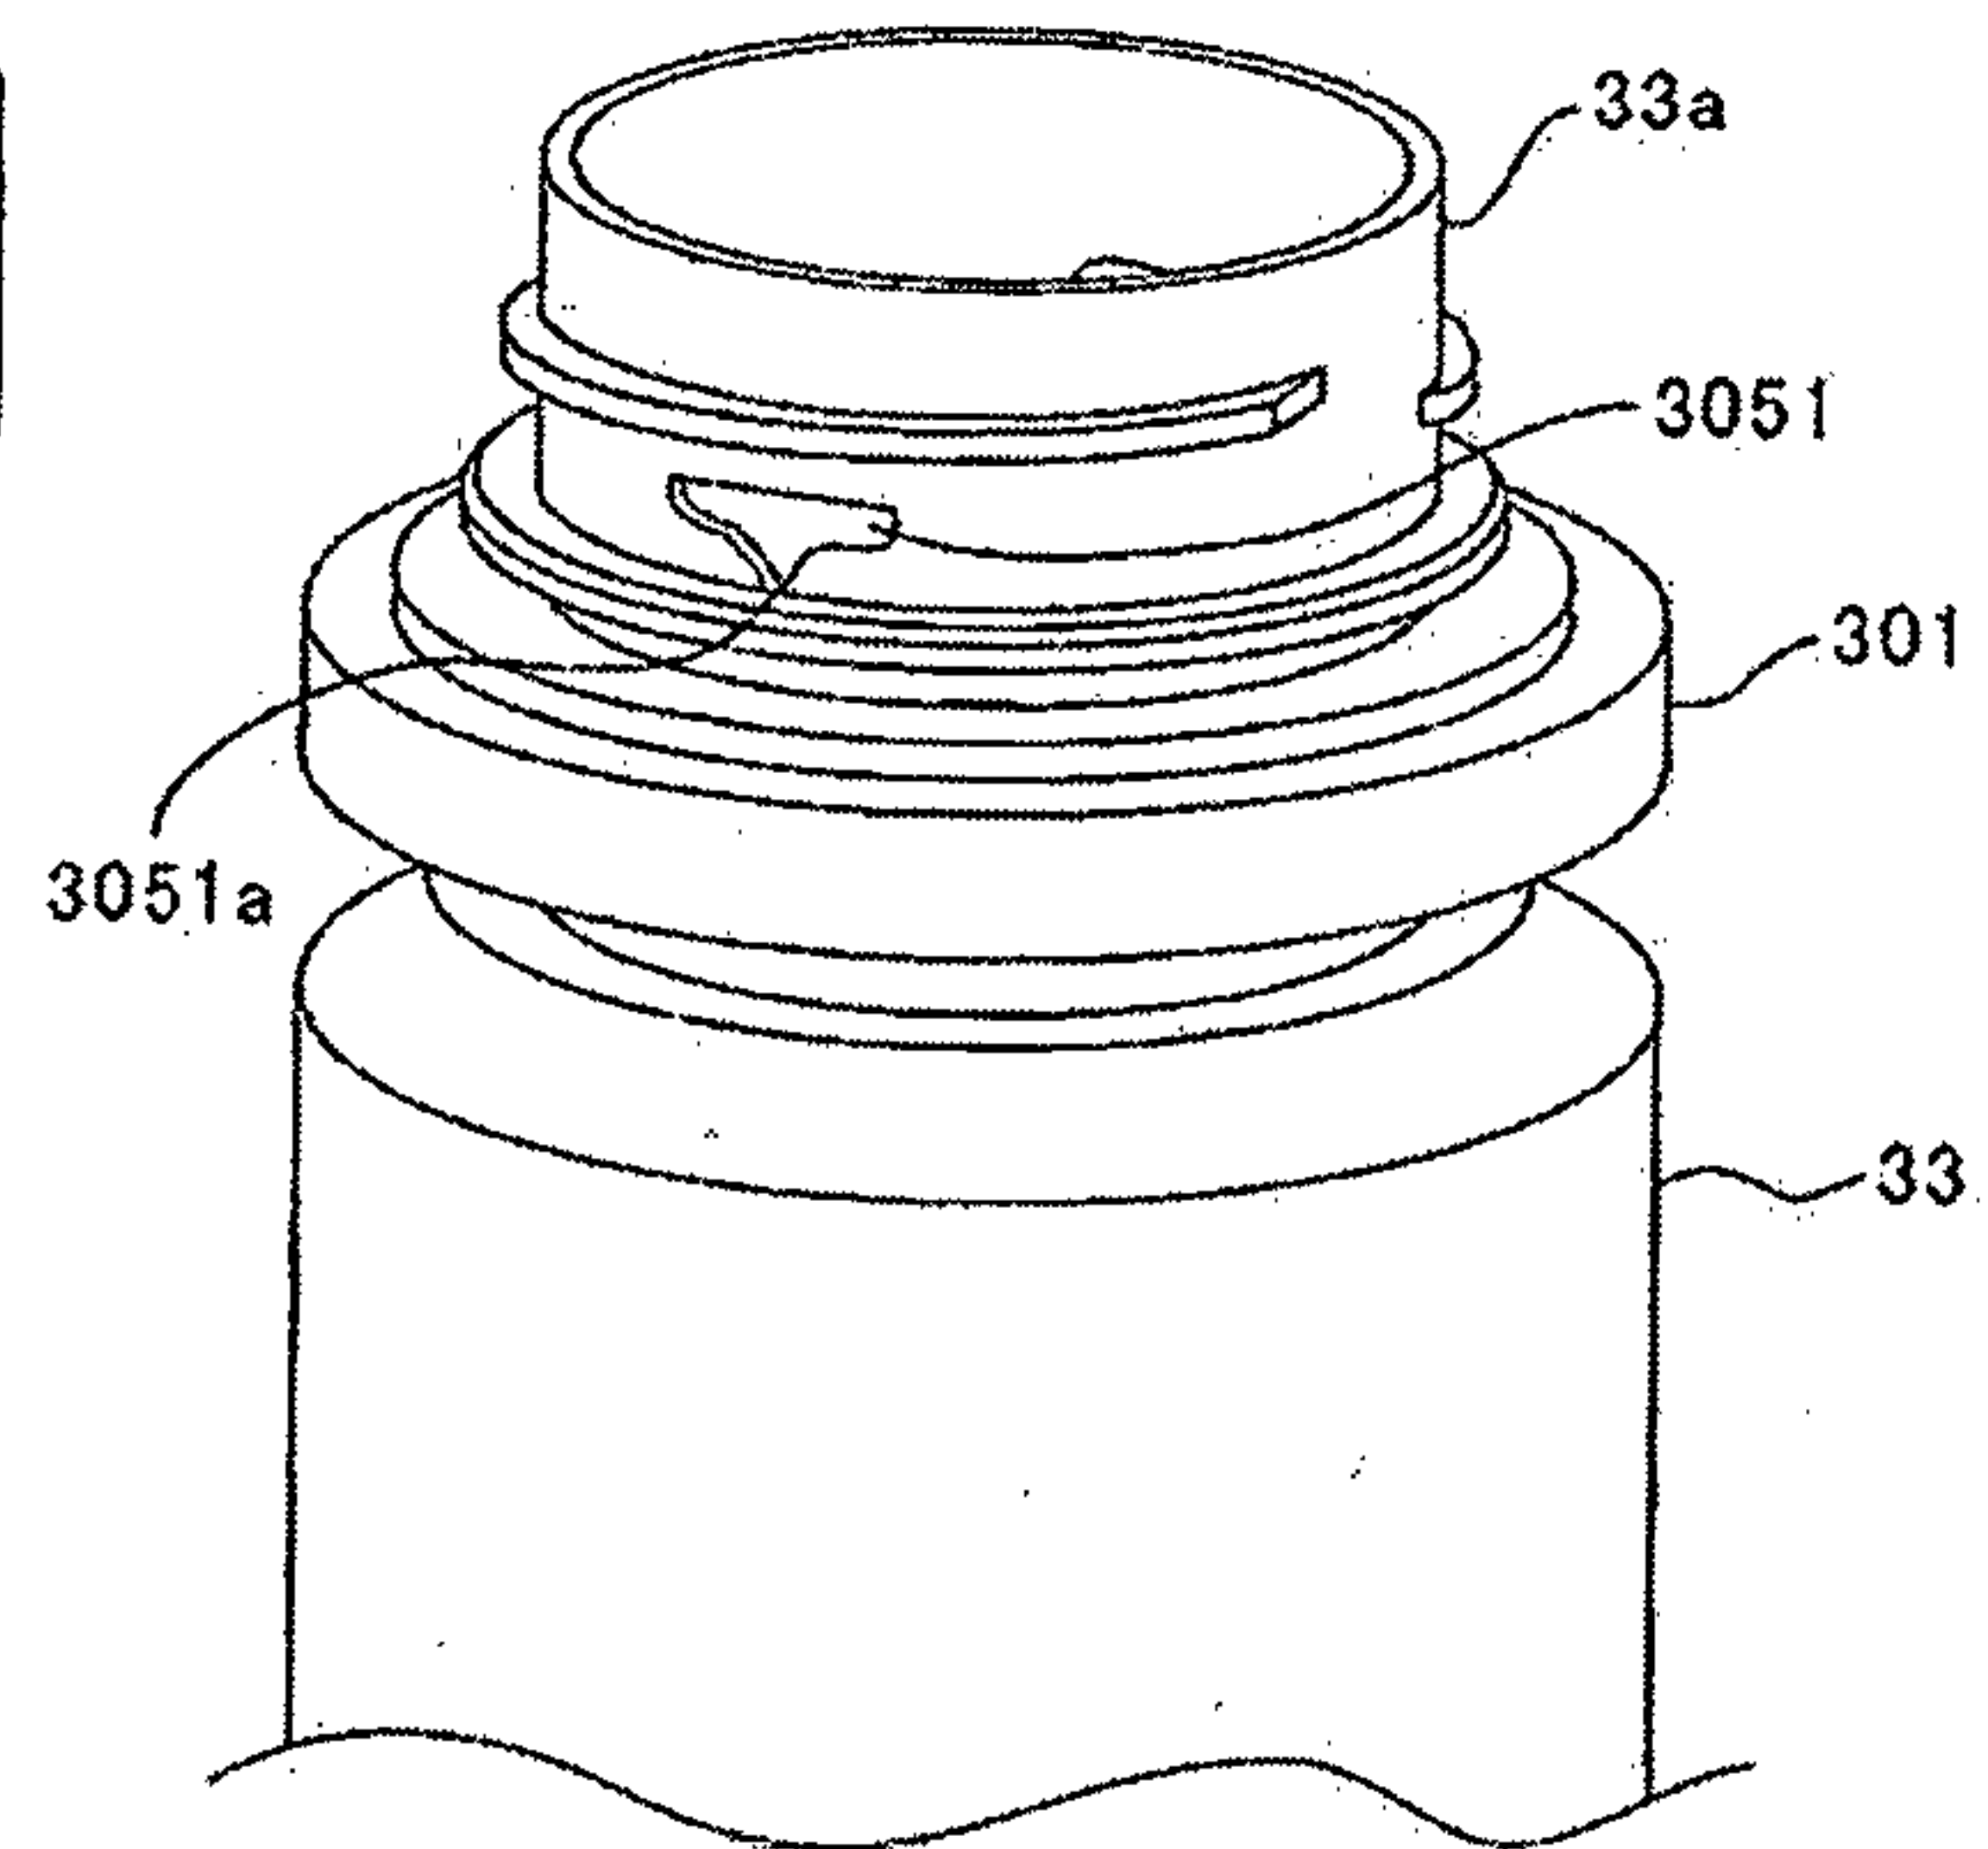


FIG.52A


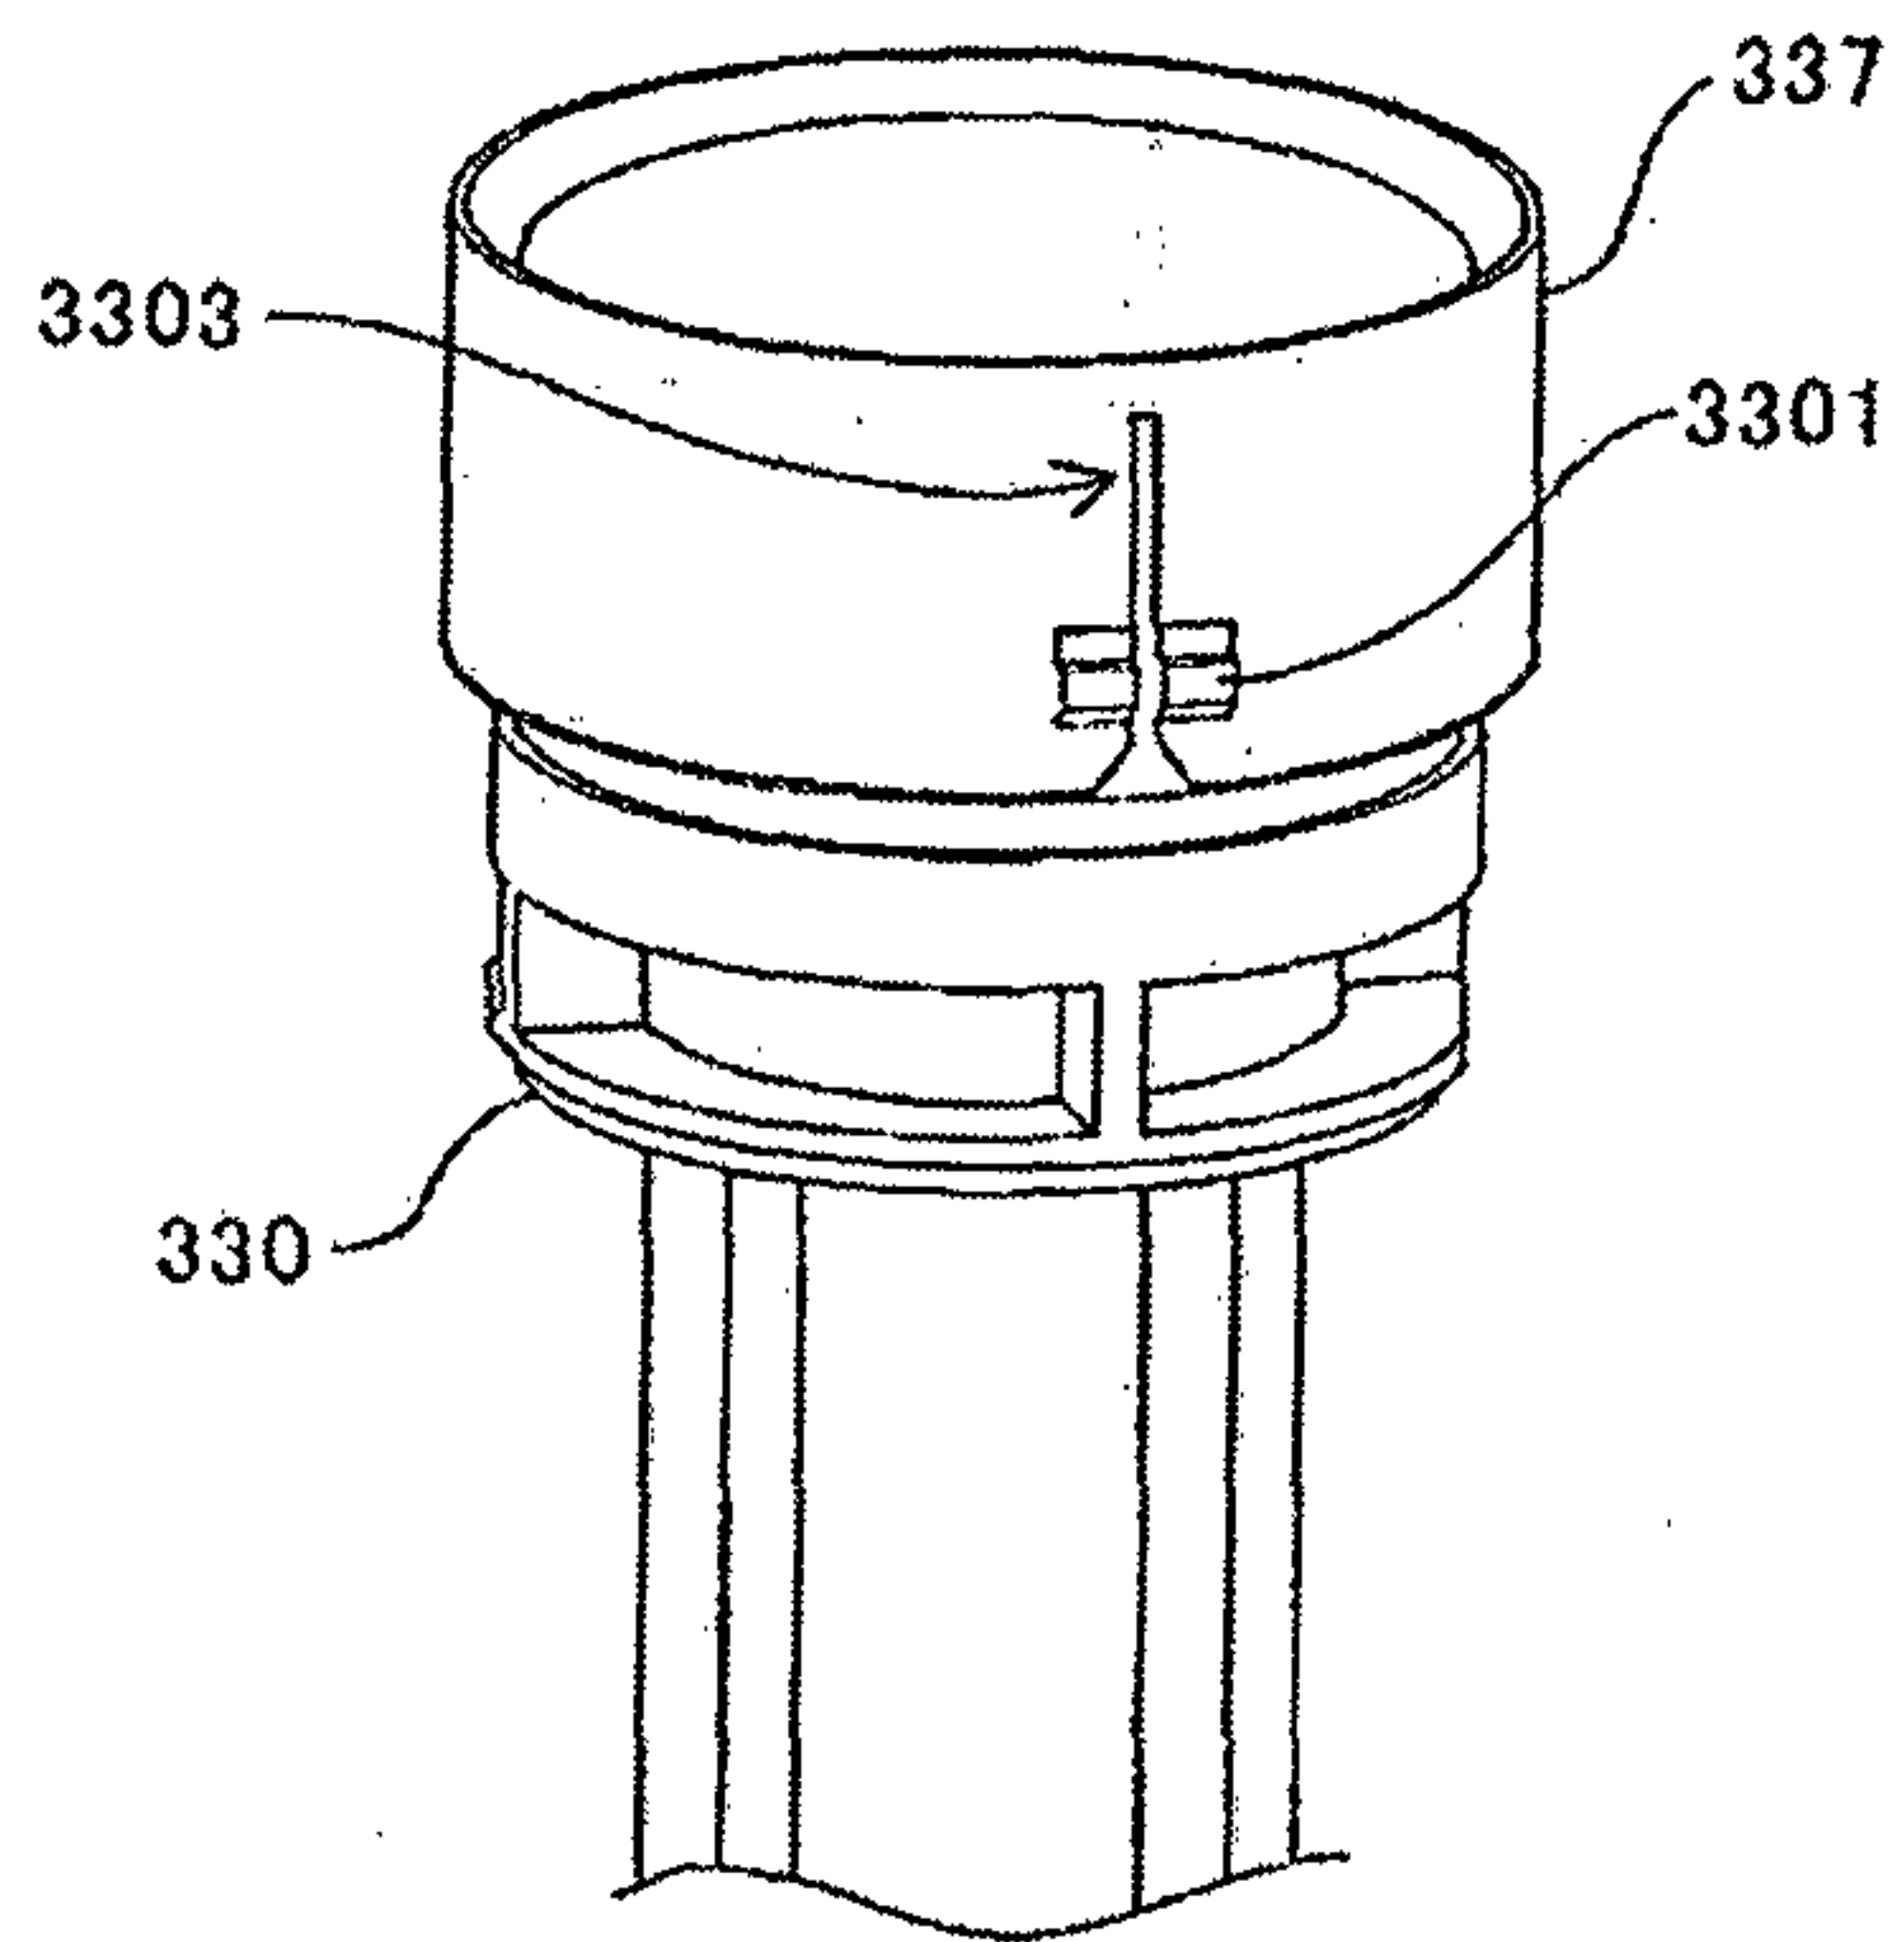


FIG.52B

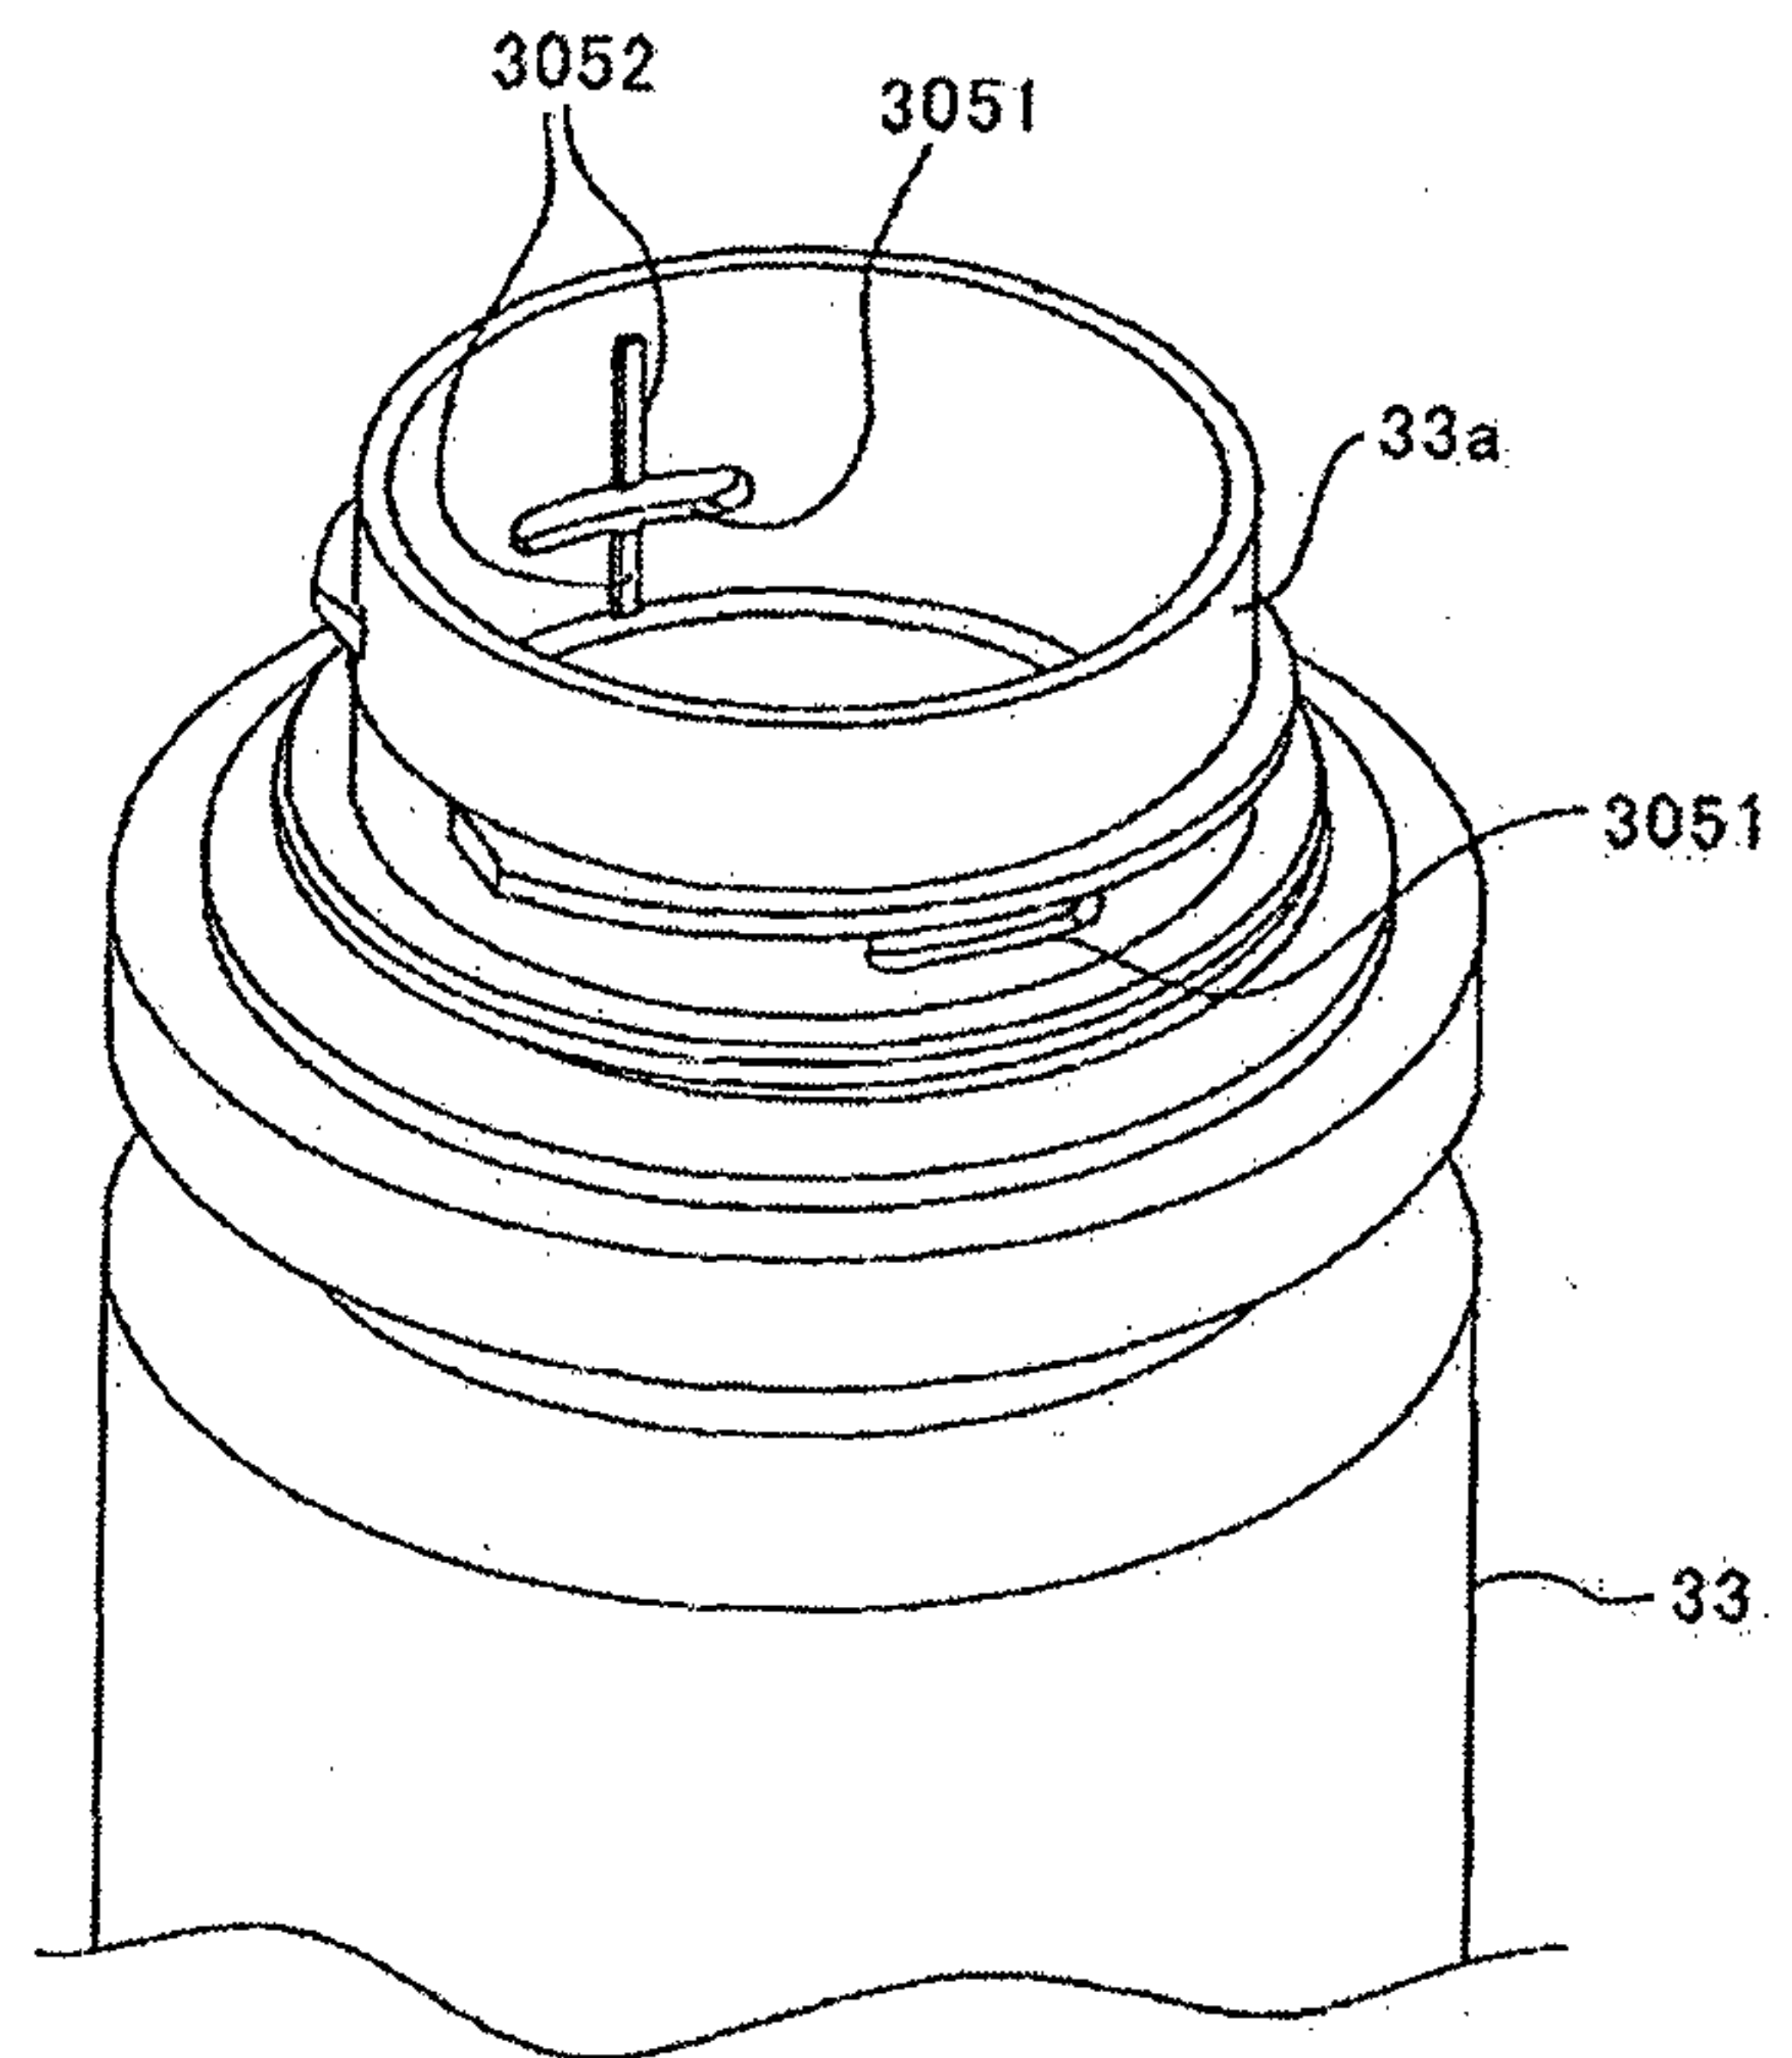

53/66

FIG.53A

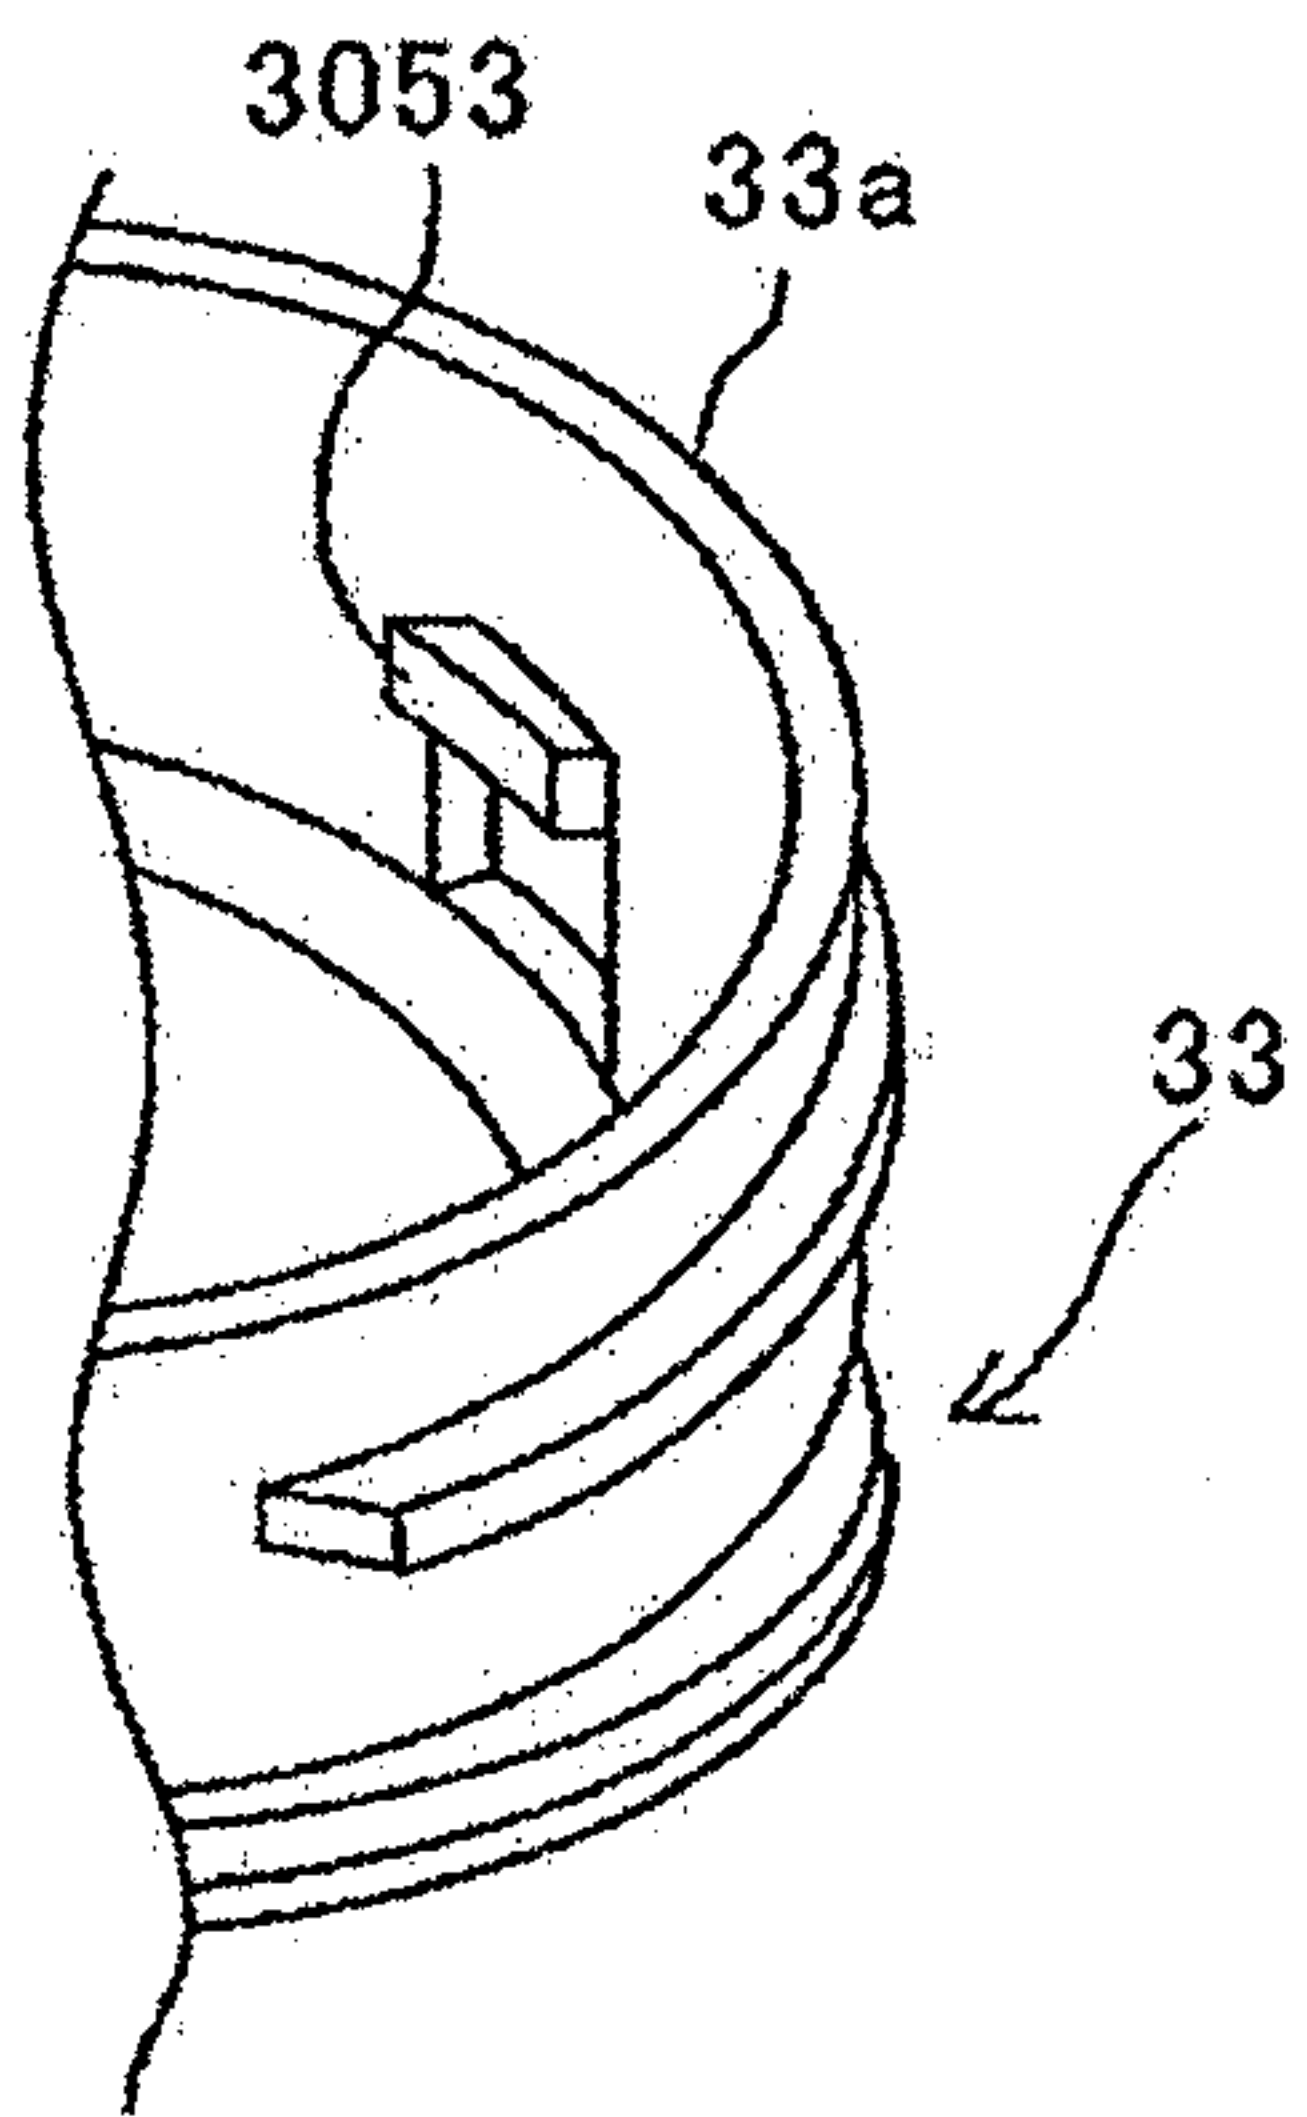


FIG.53B


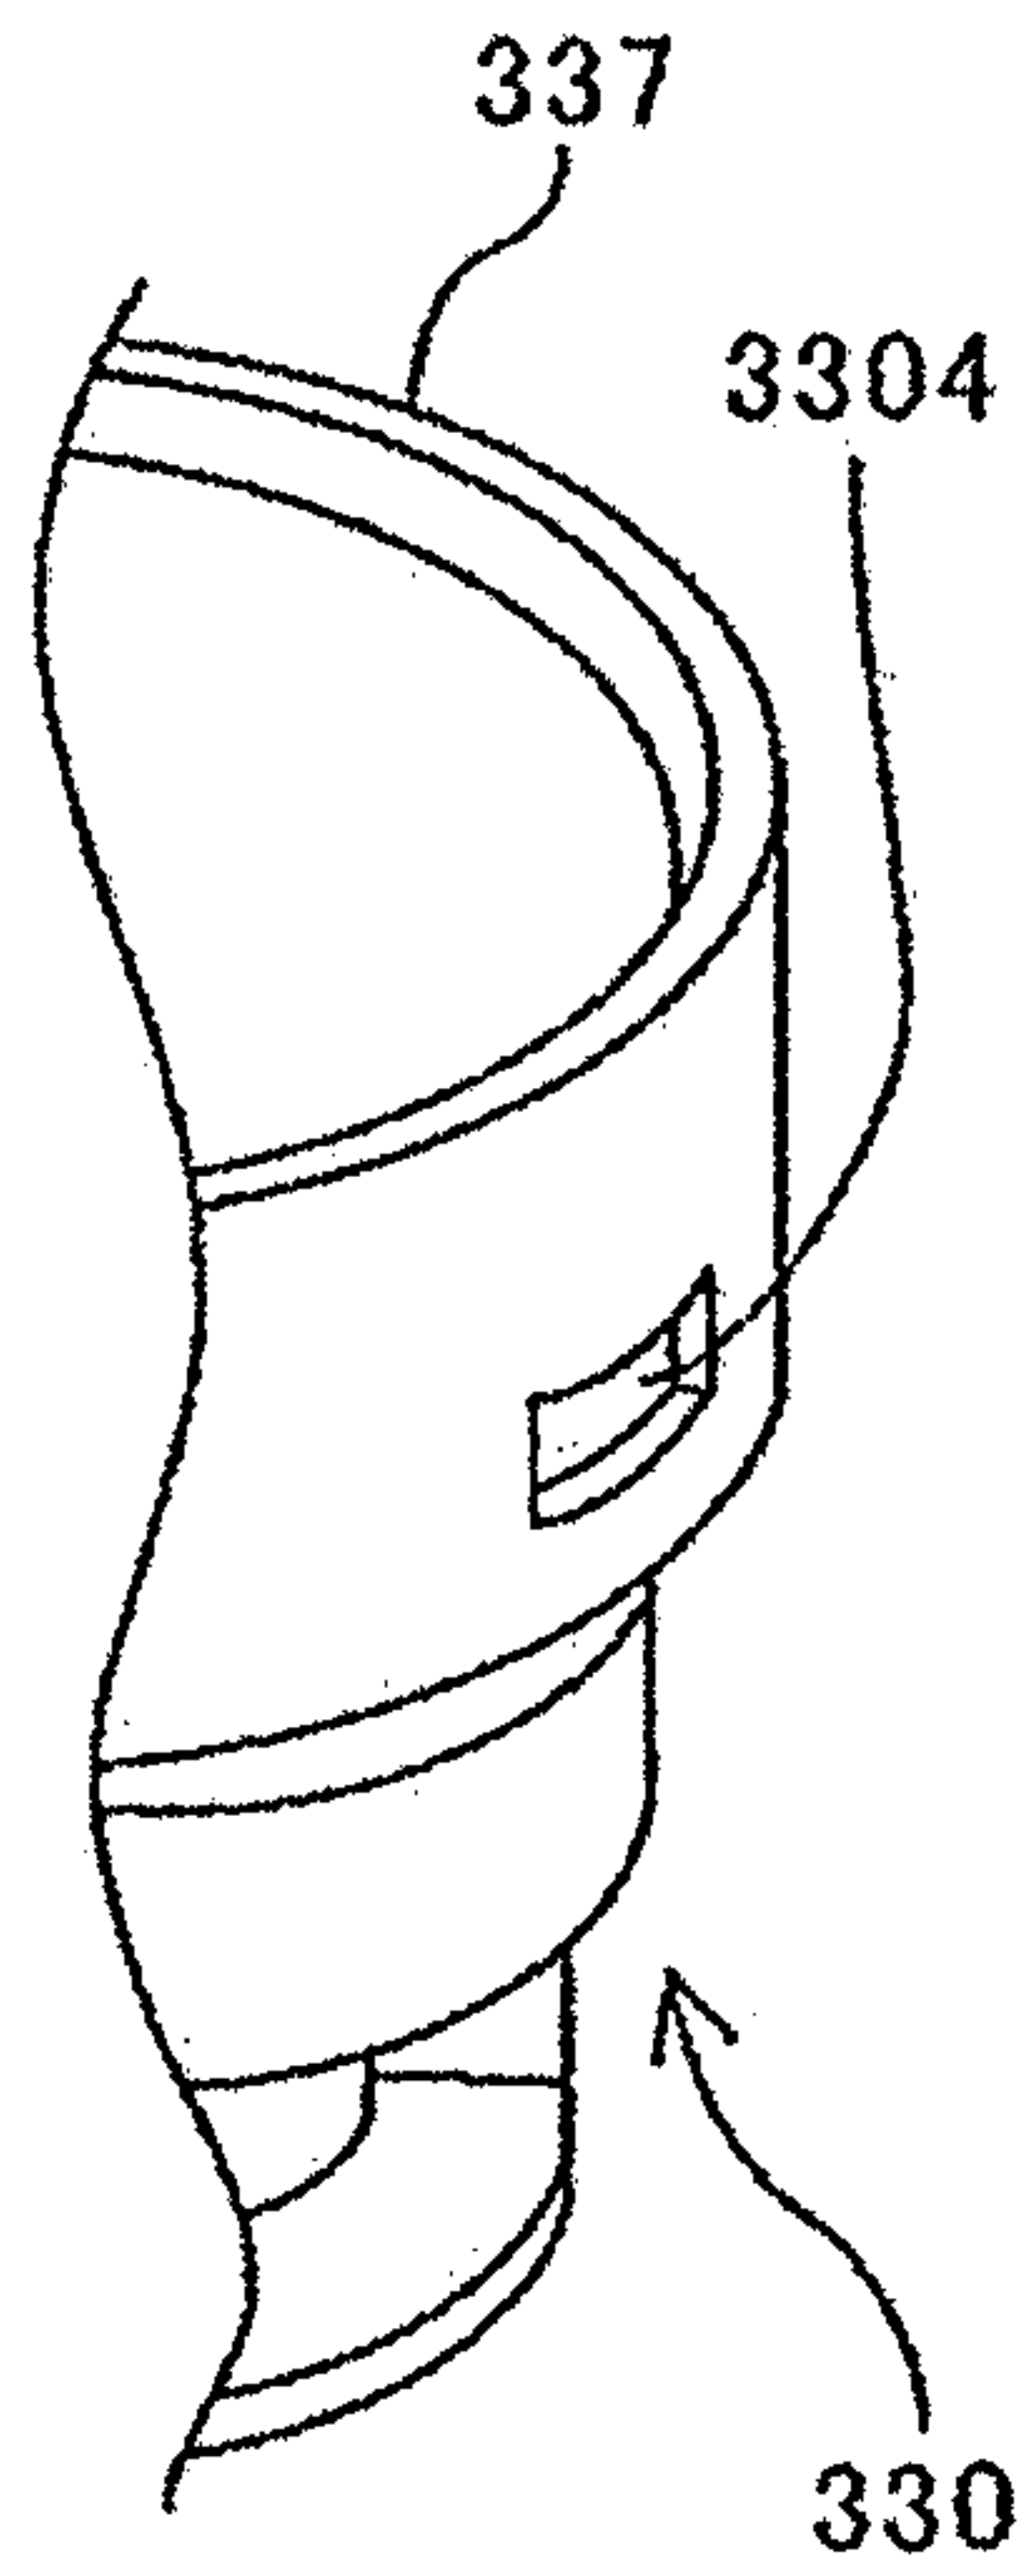


FIG.53C

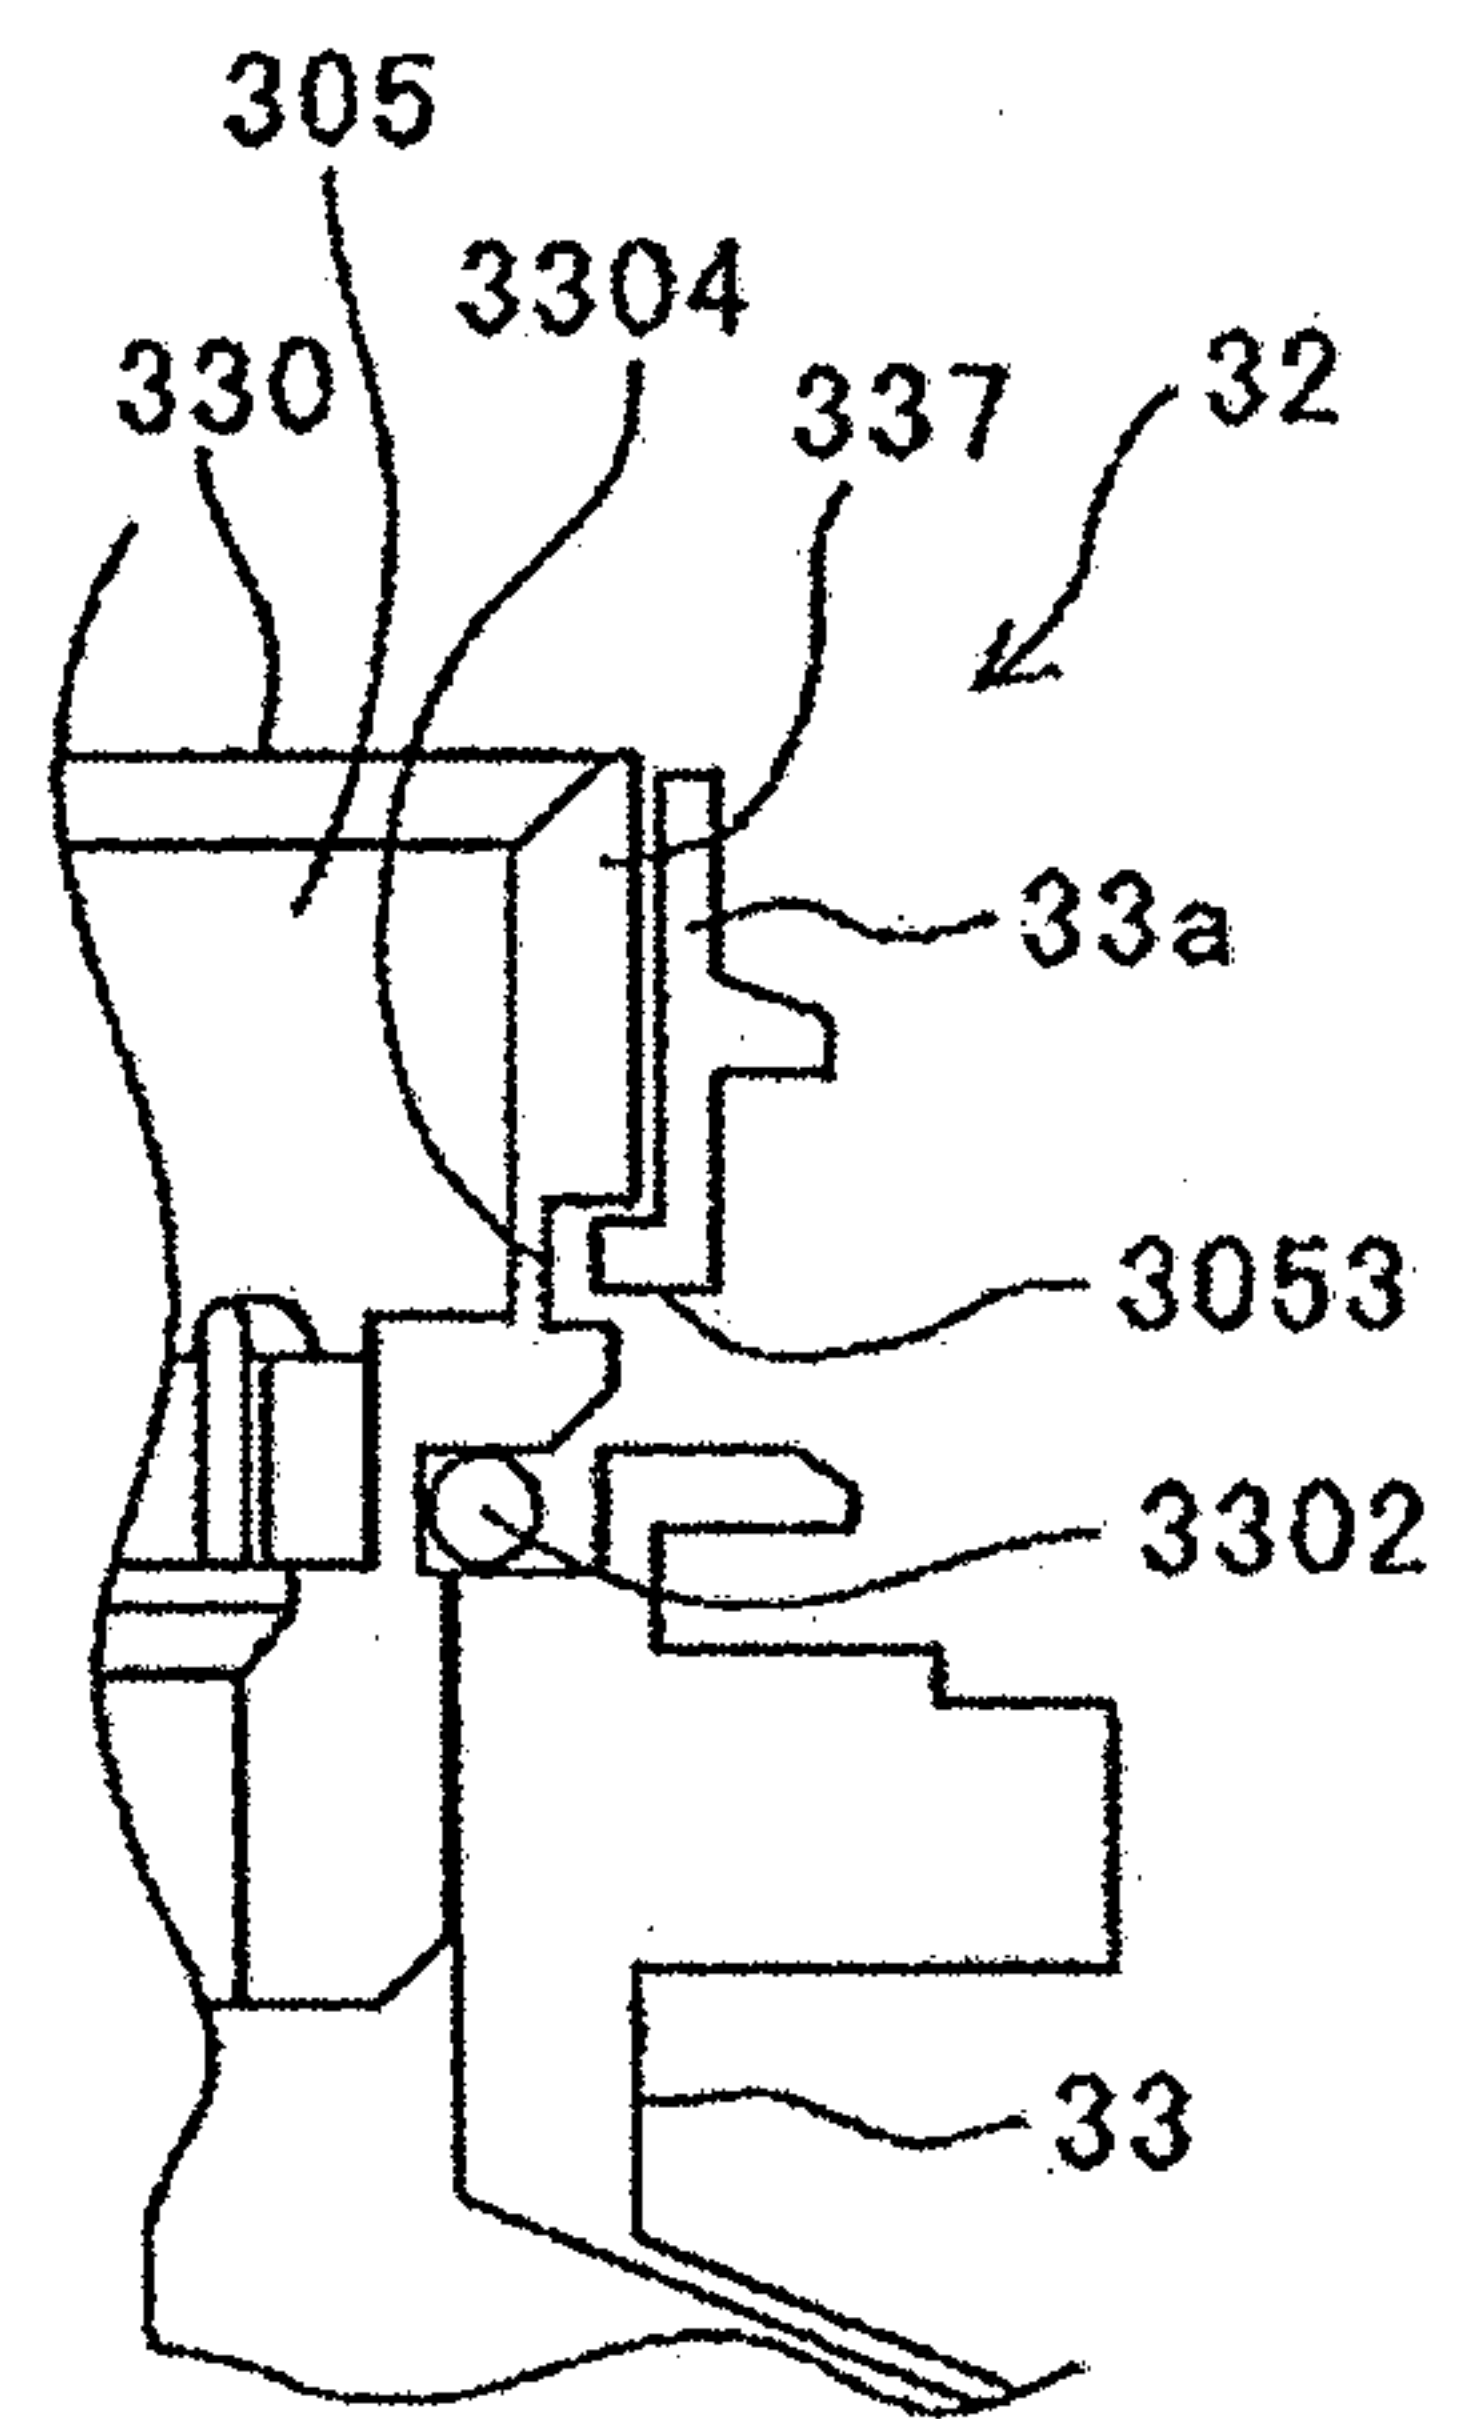

54/66

FIG.54A



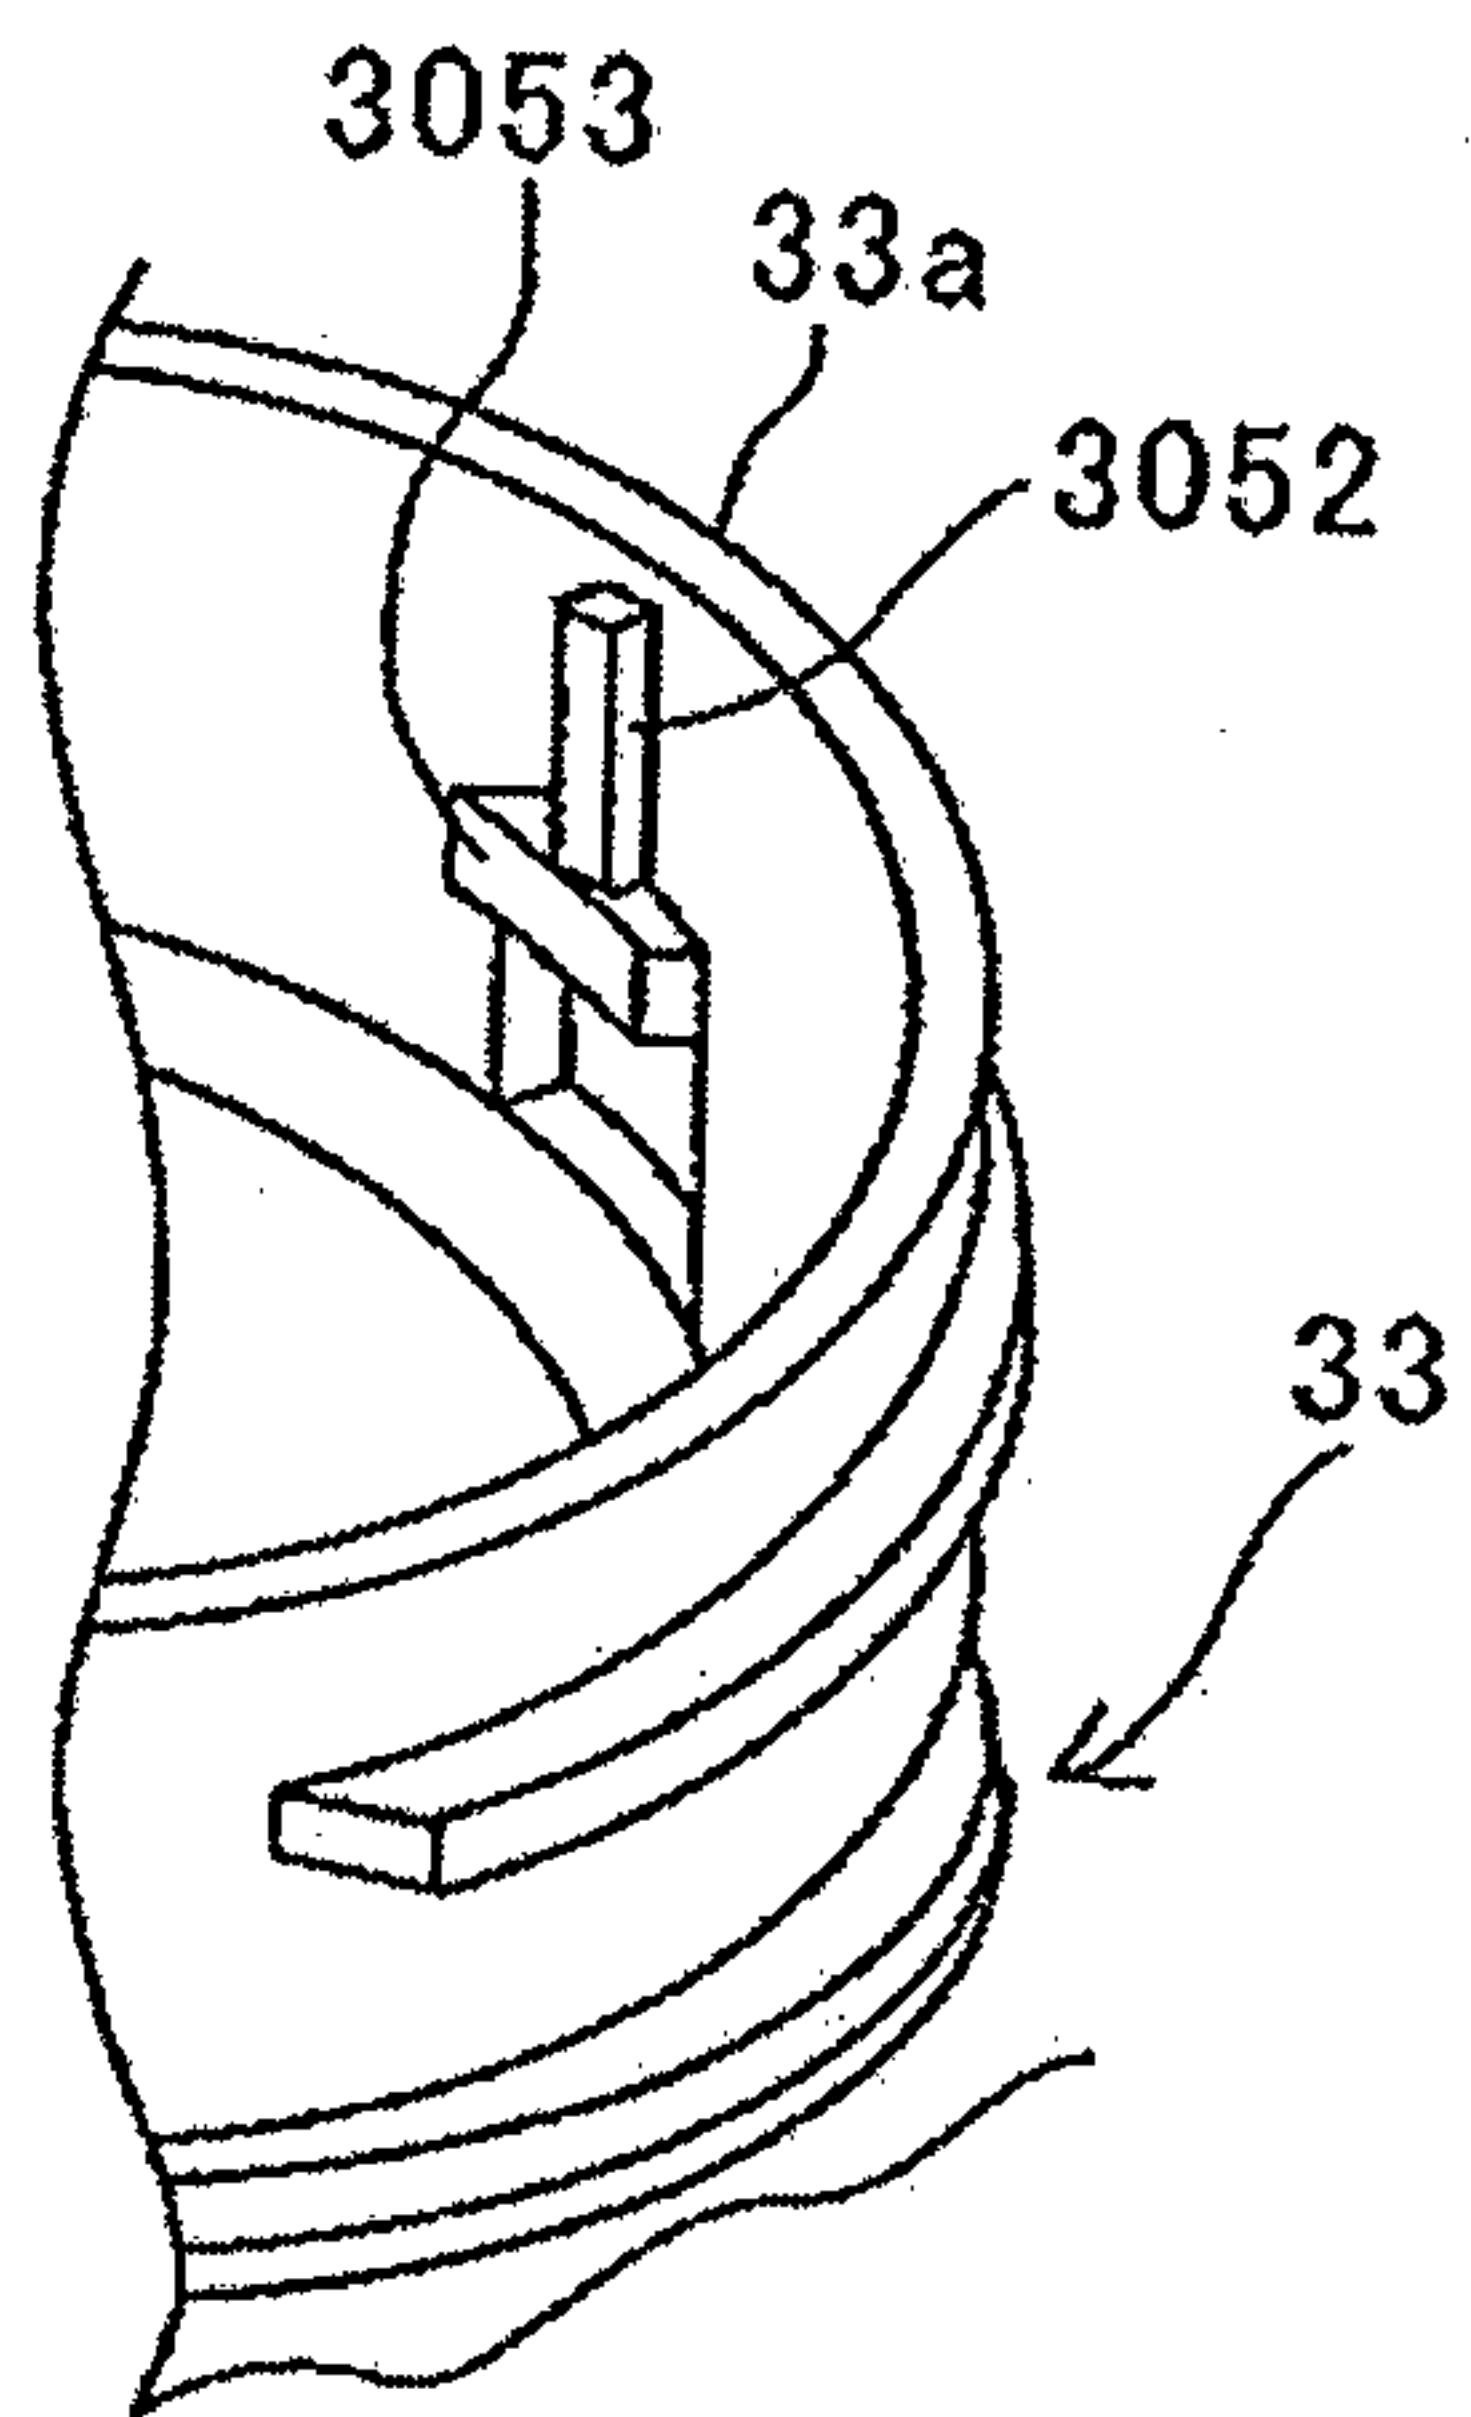


FIG.54B

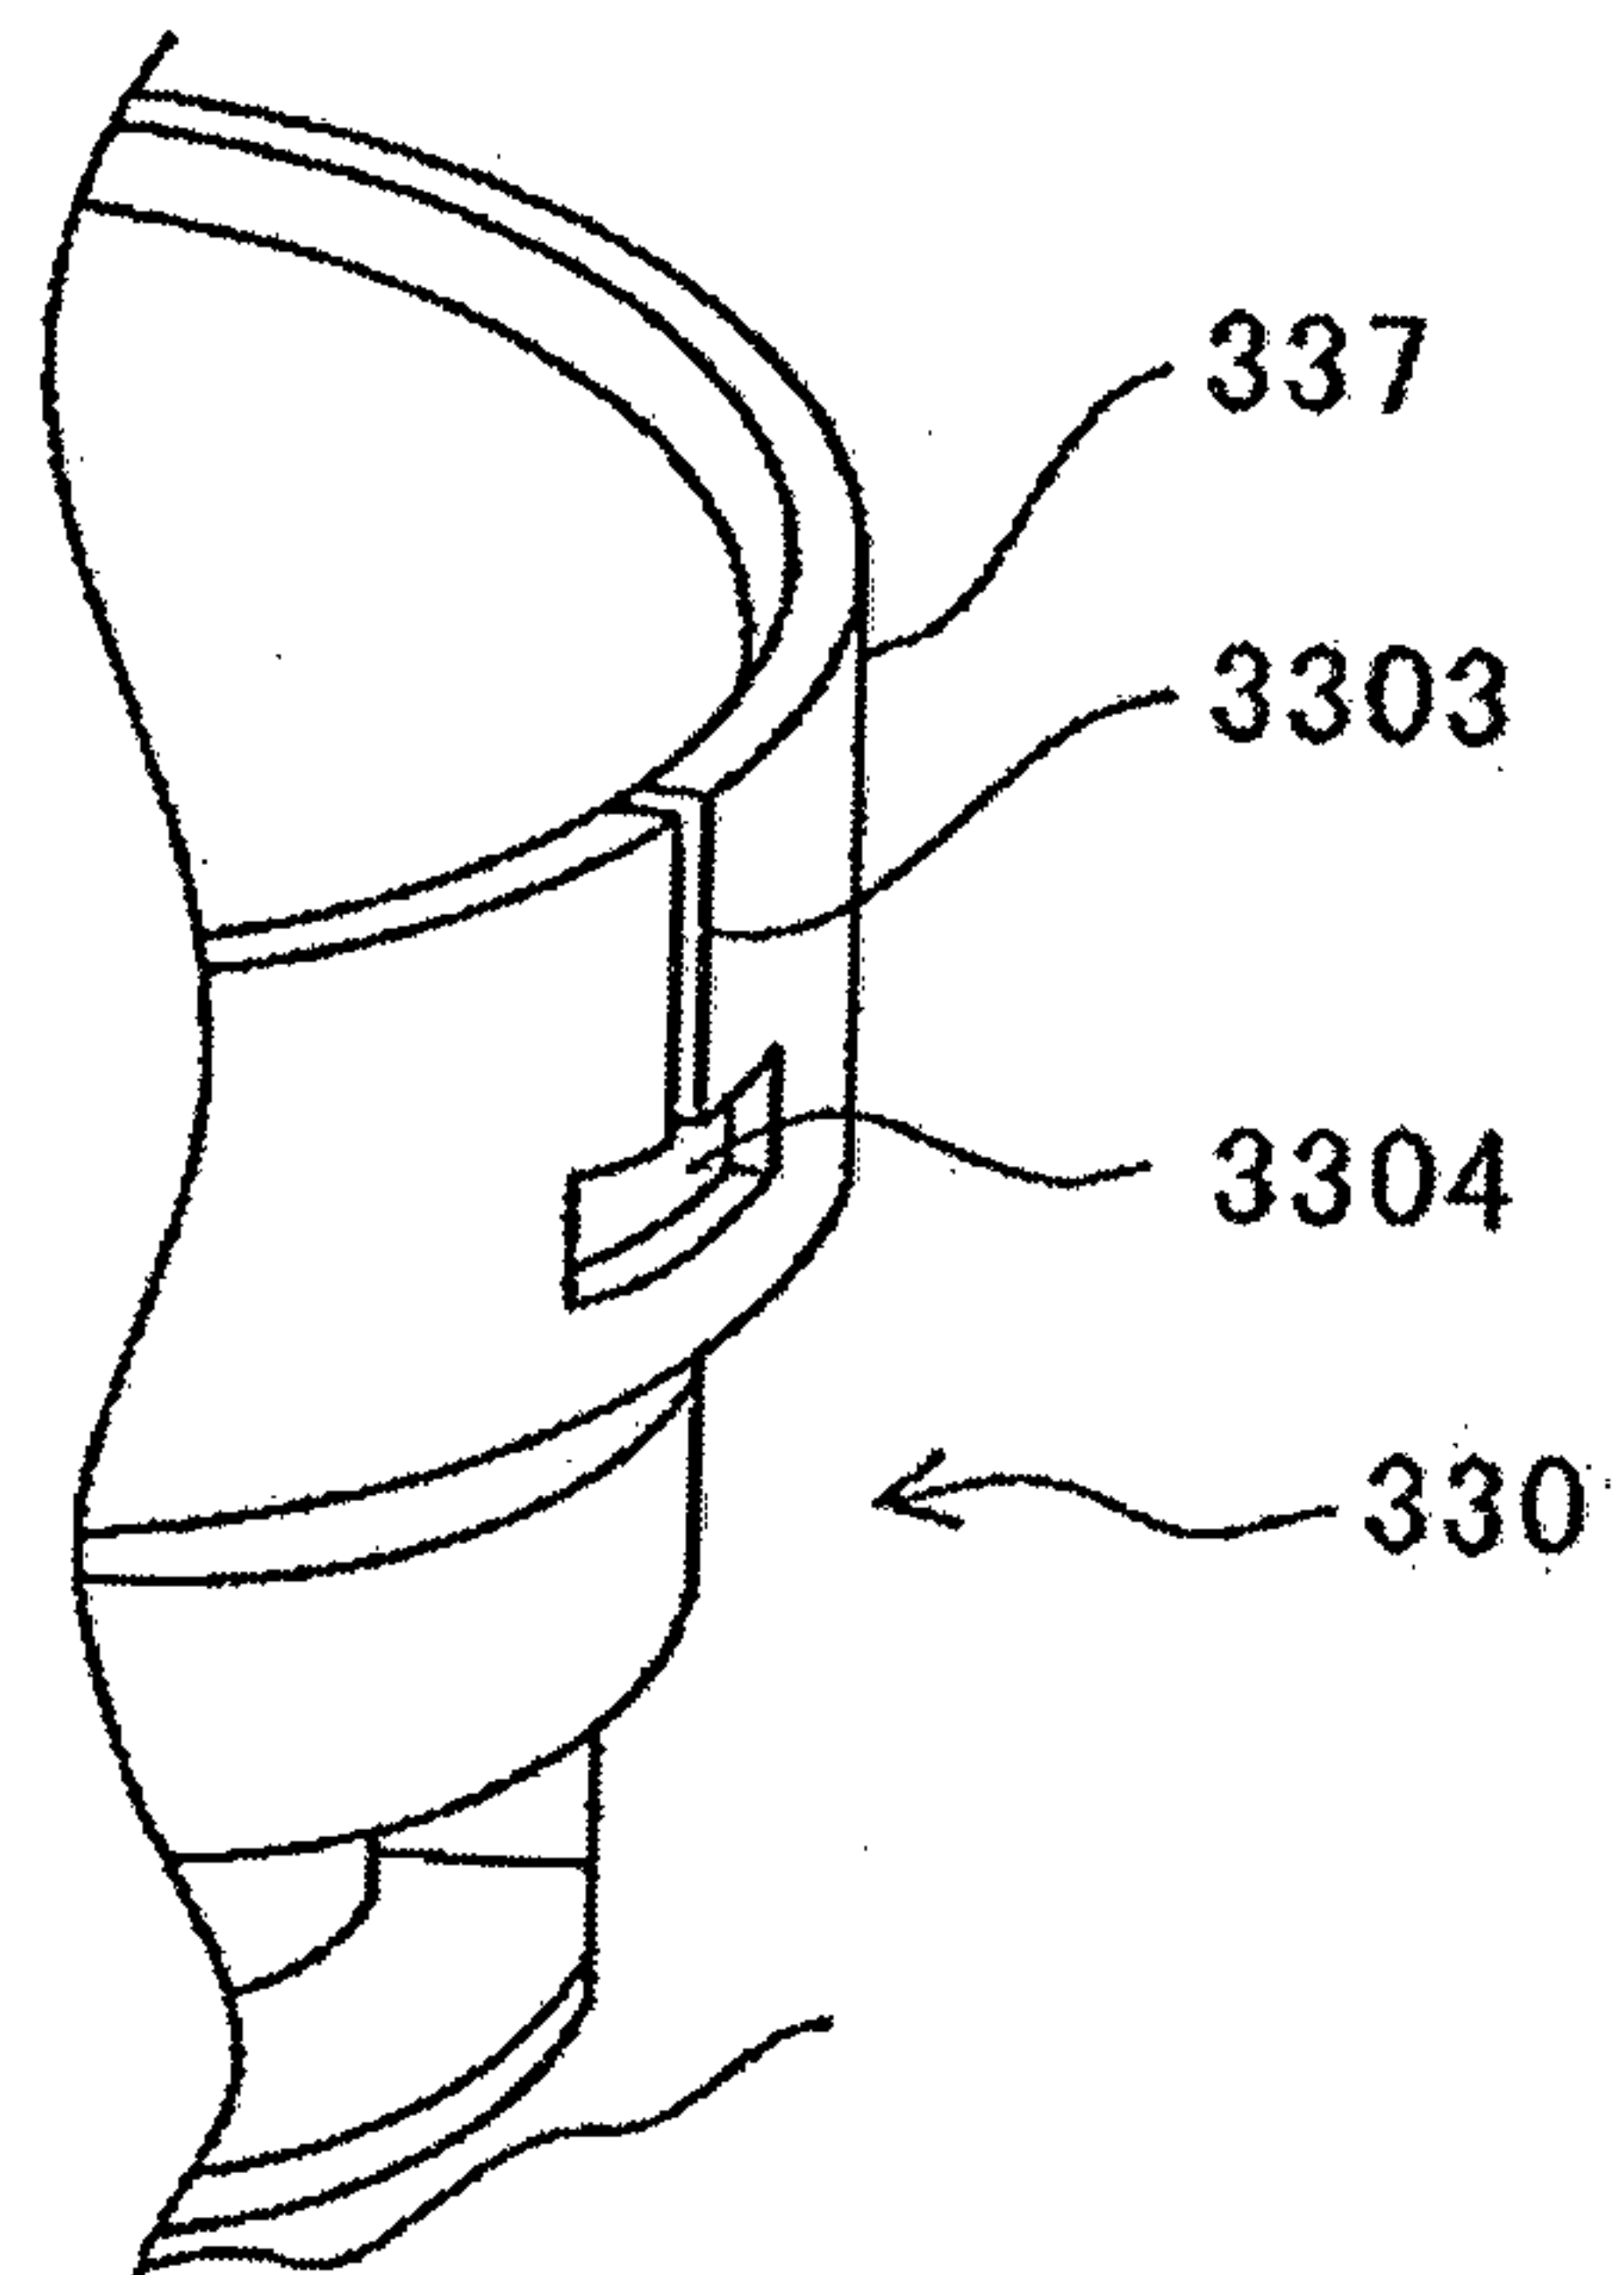


55/66

FIG.55

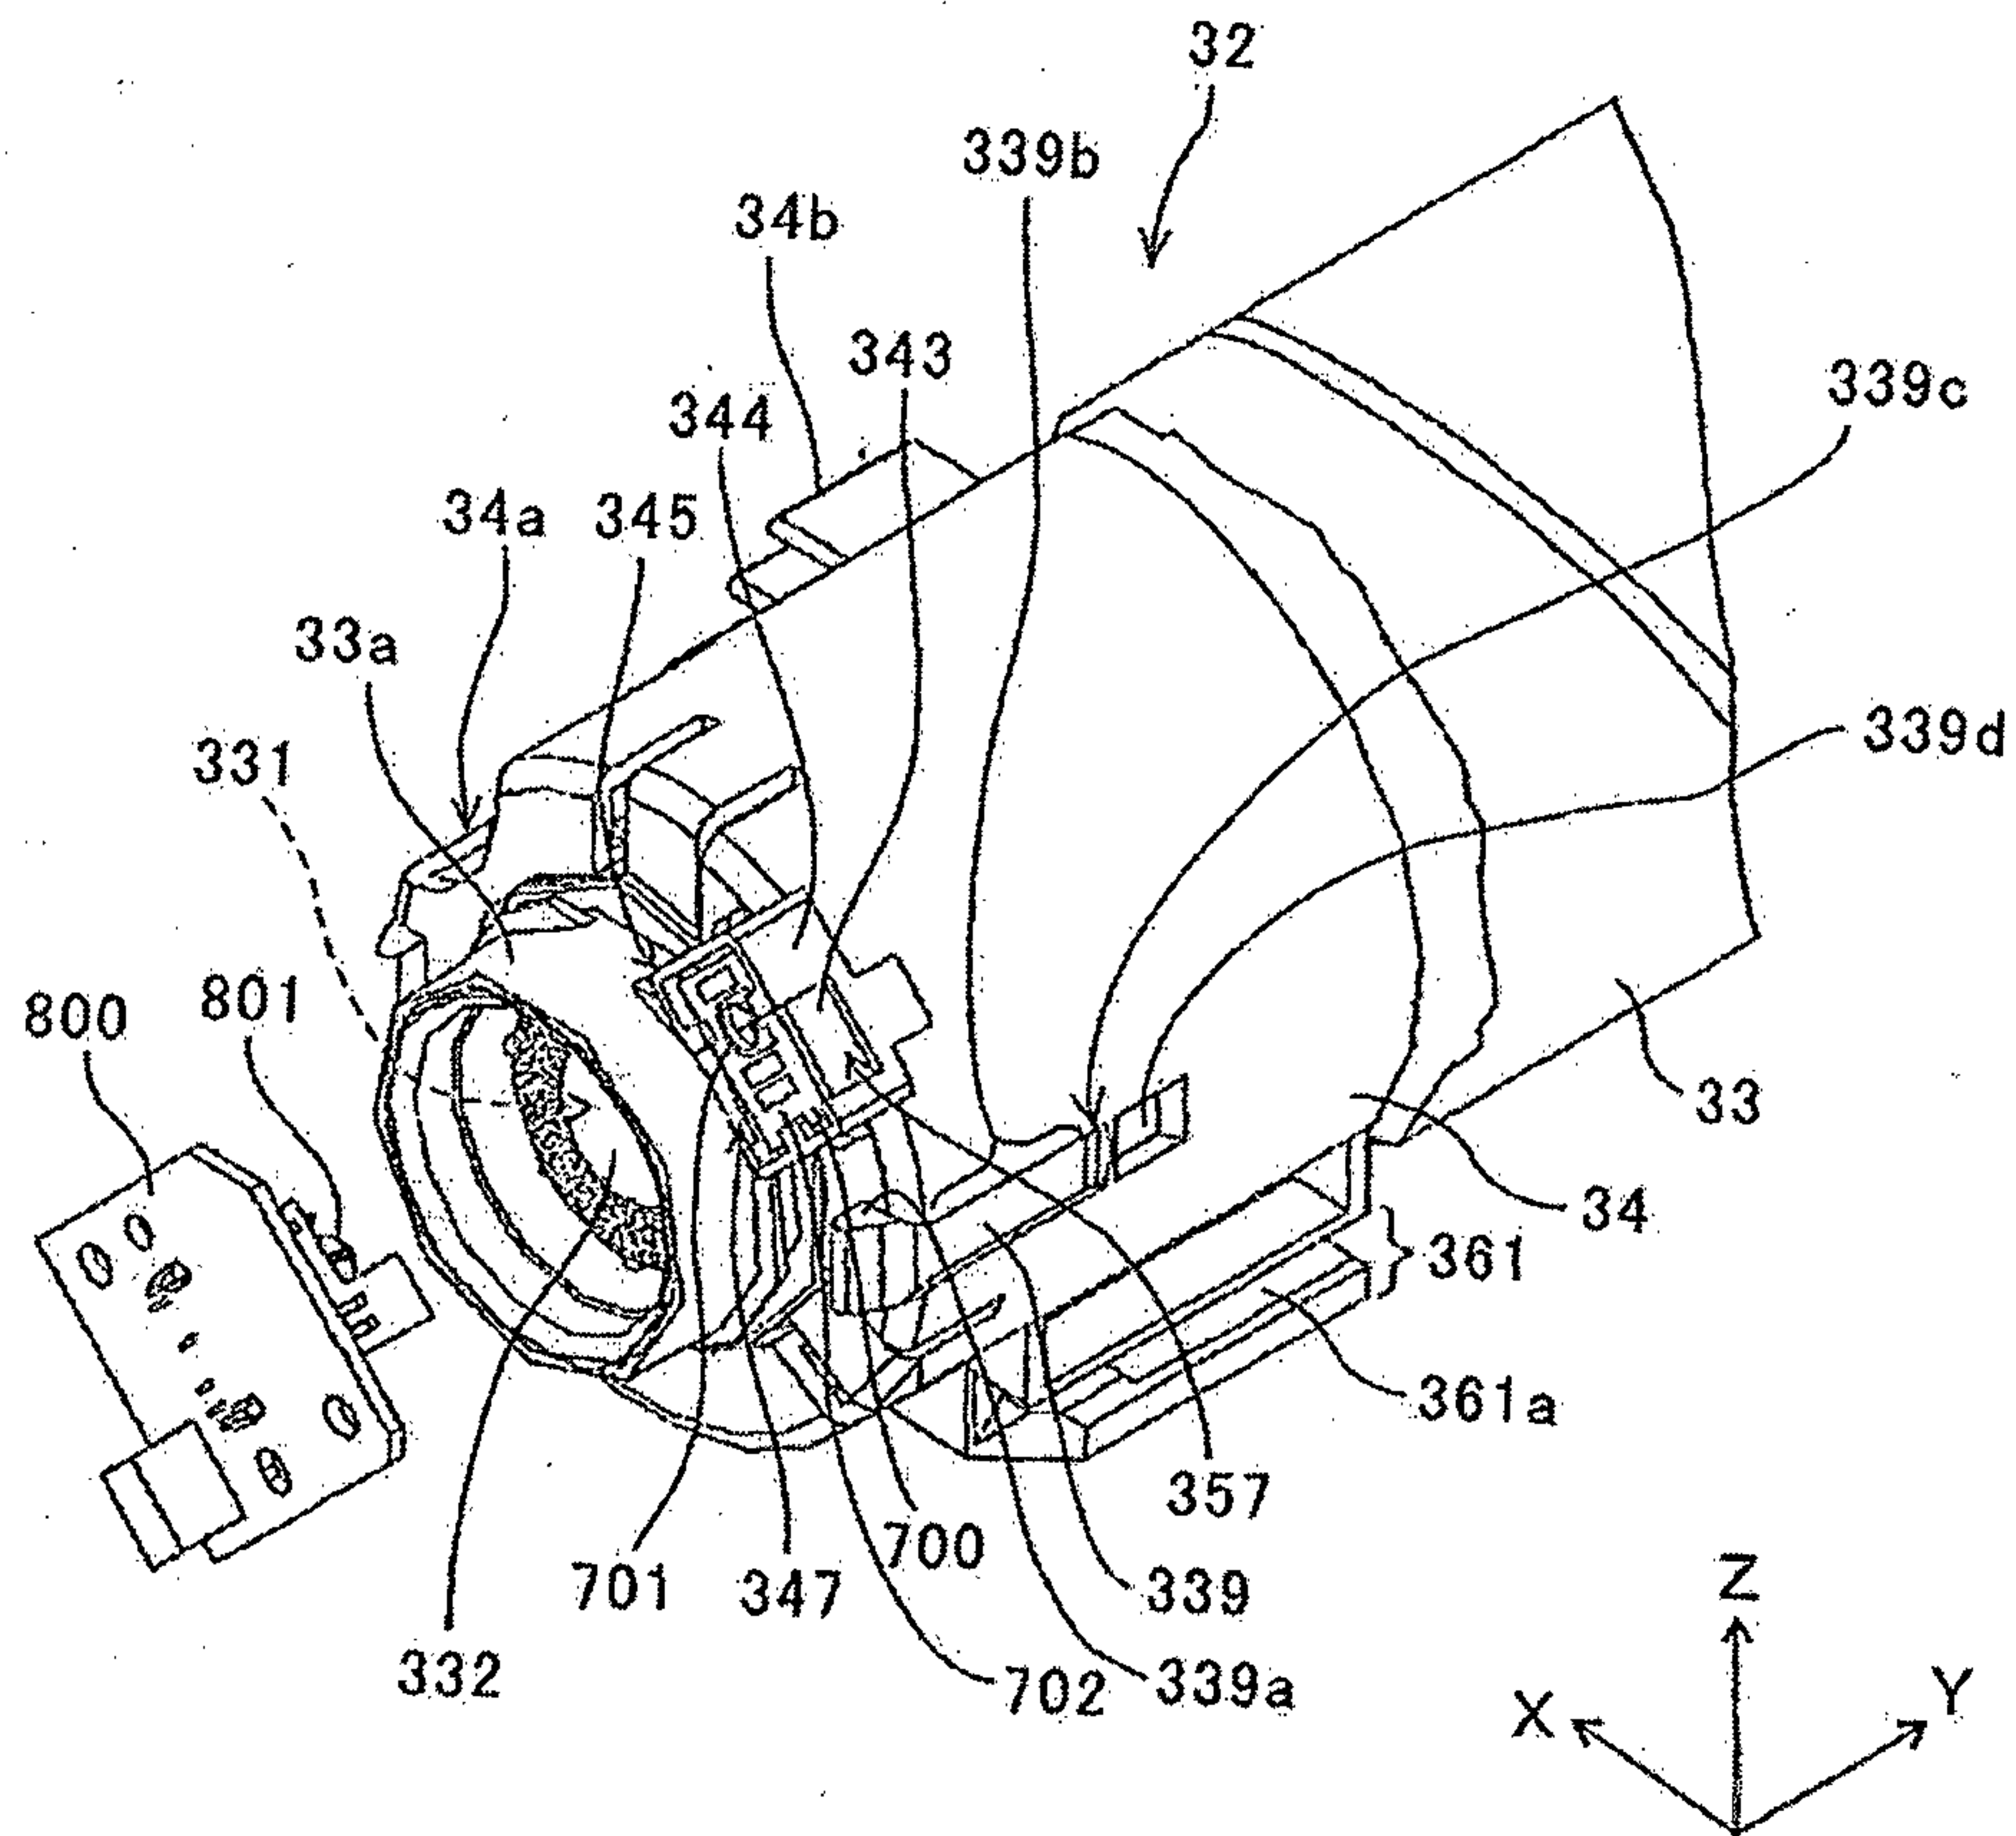


56/66

FIG.56

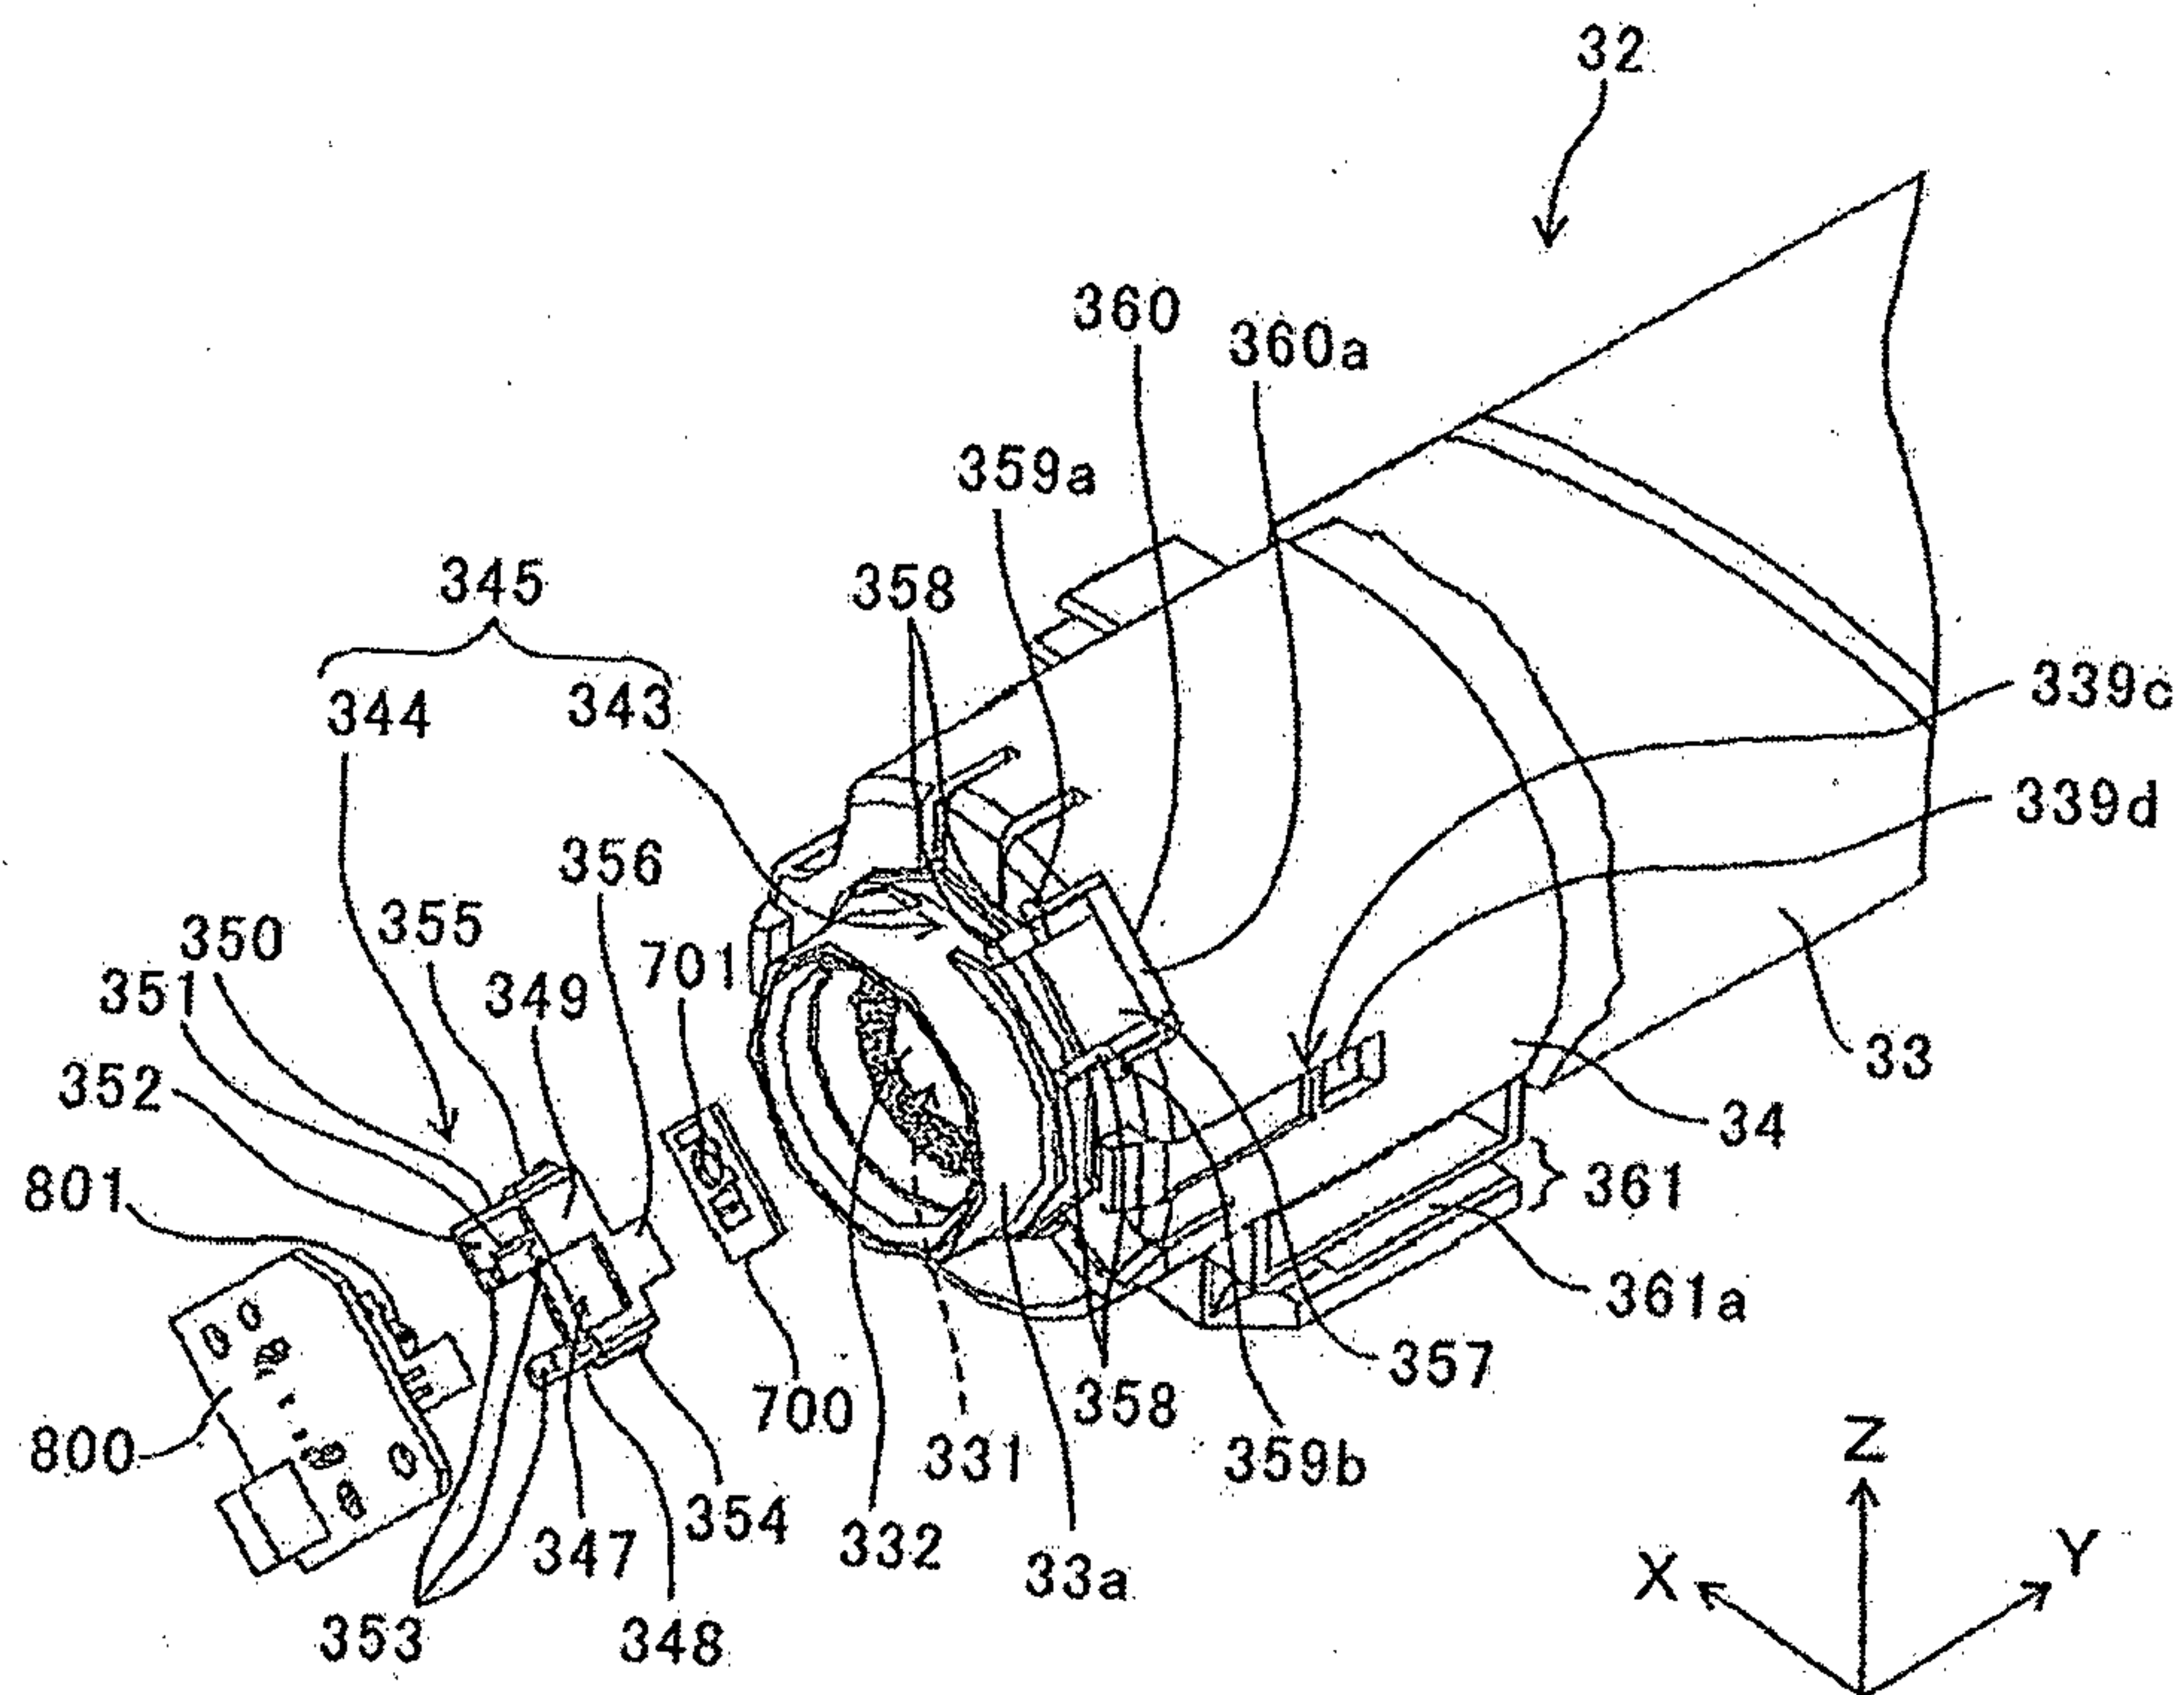

57/66

FIG.57

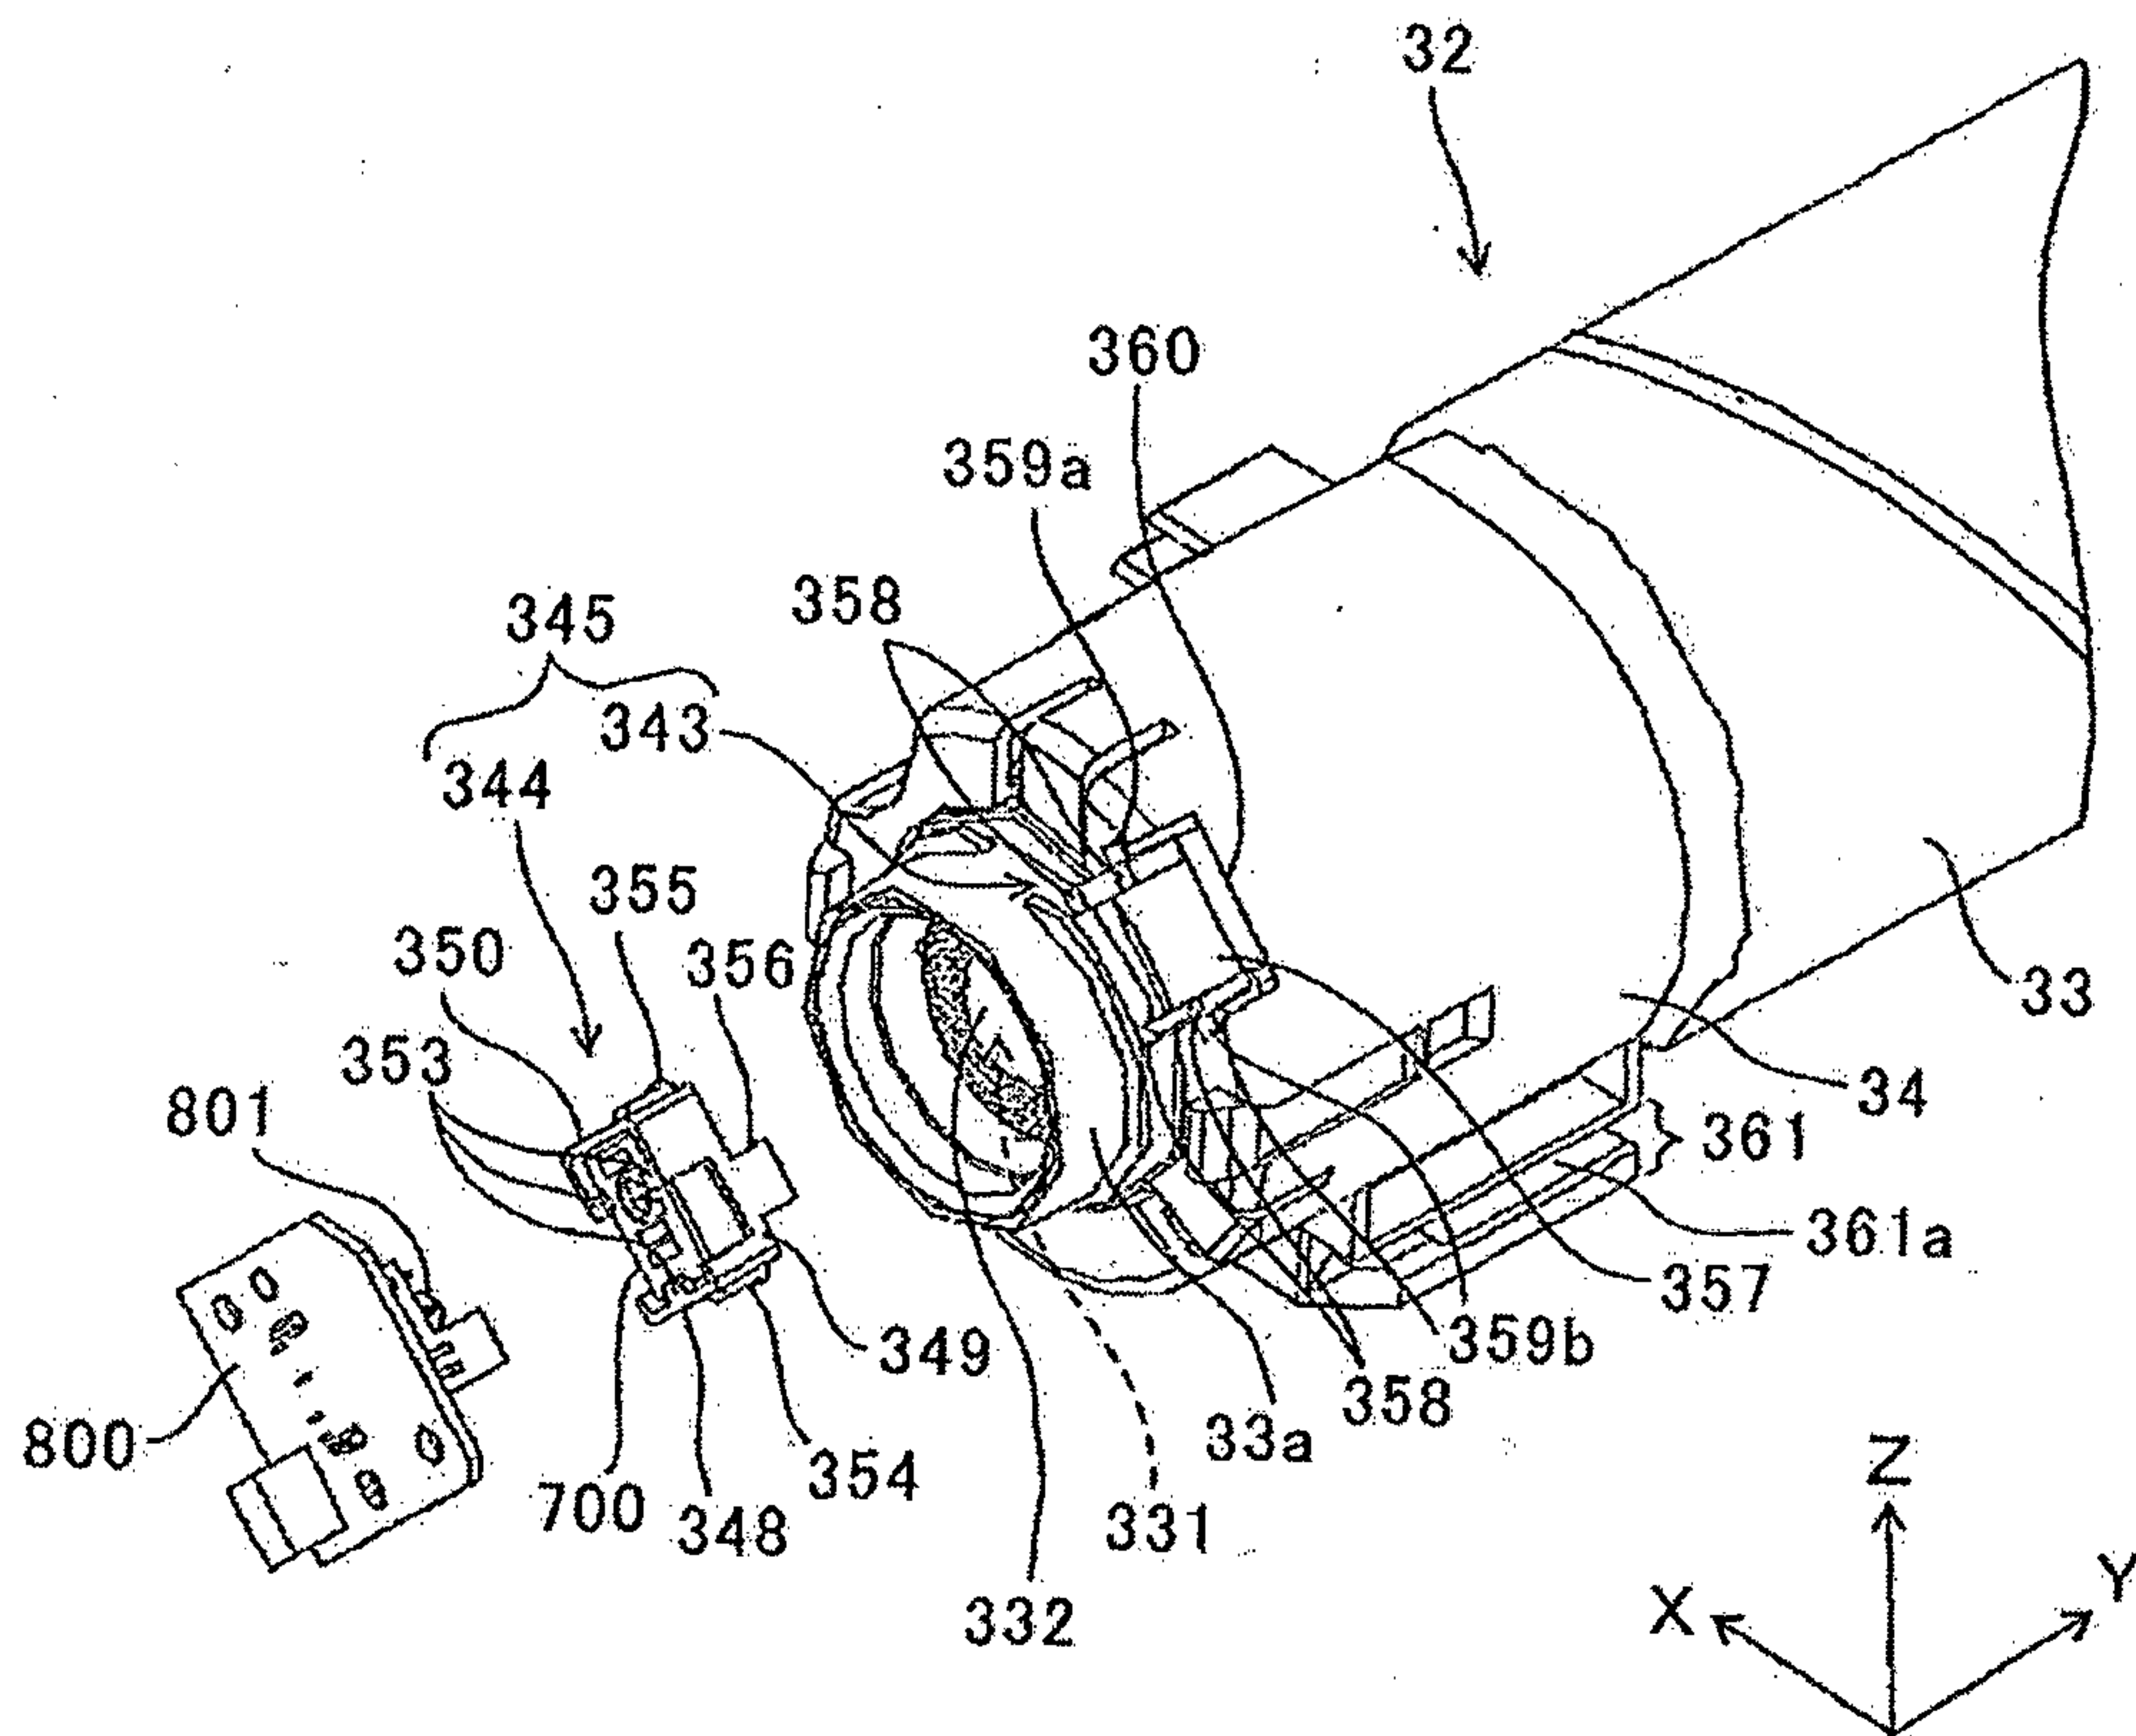

58/66

FIG.58A

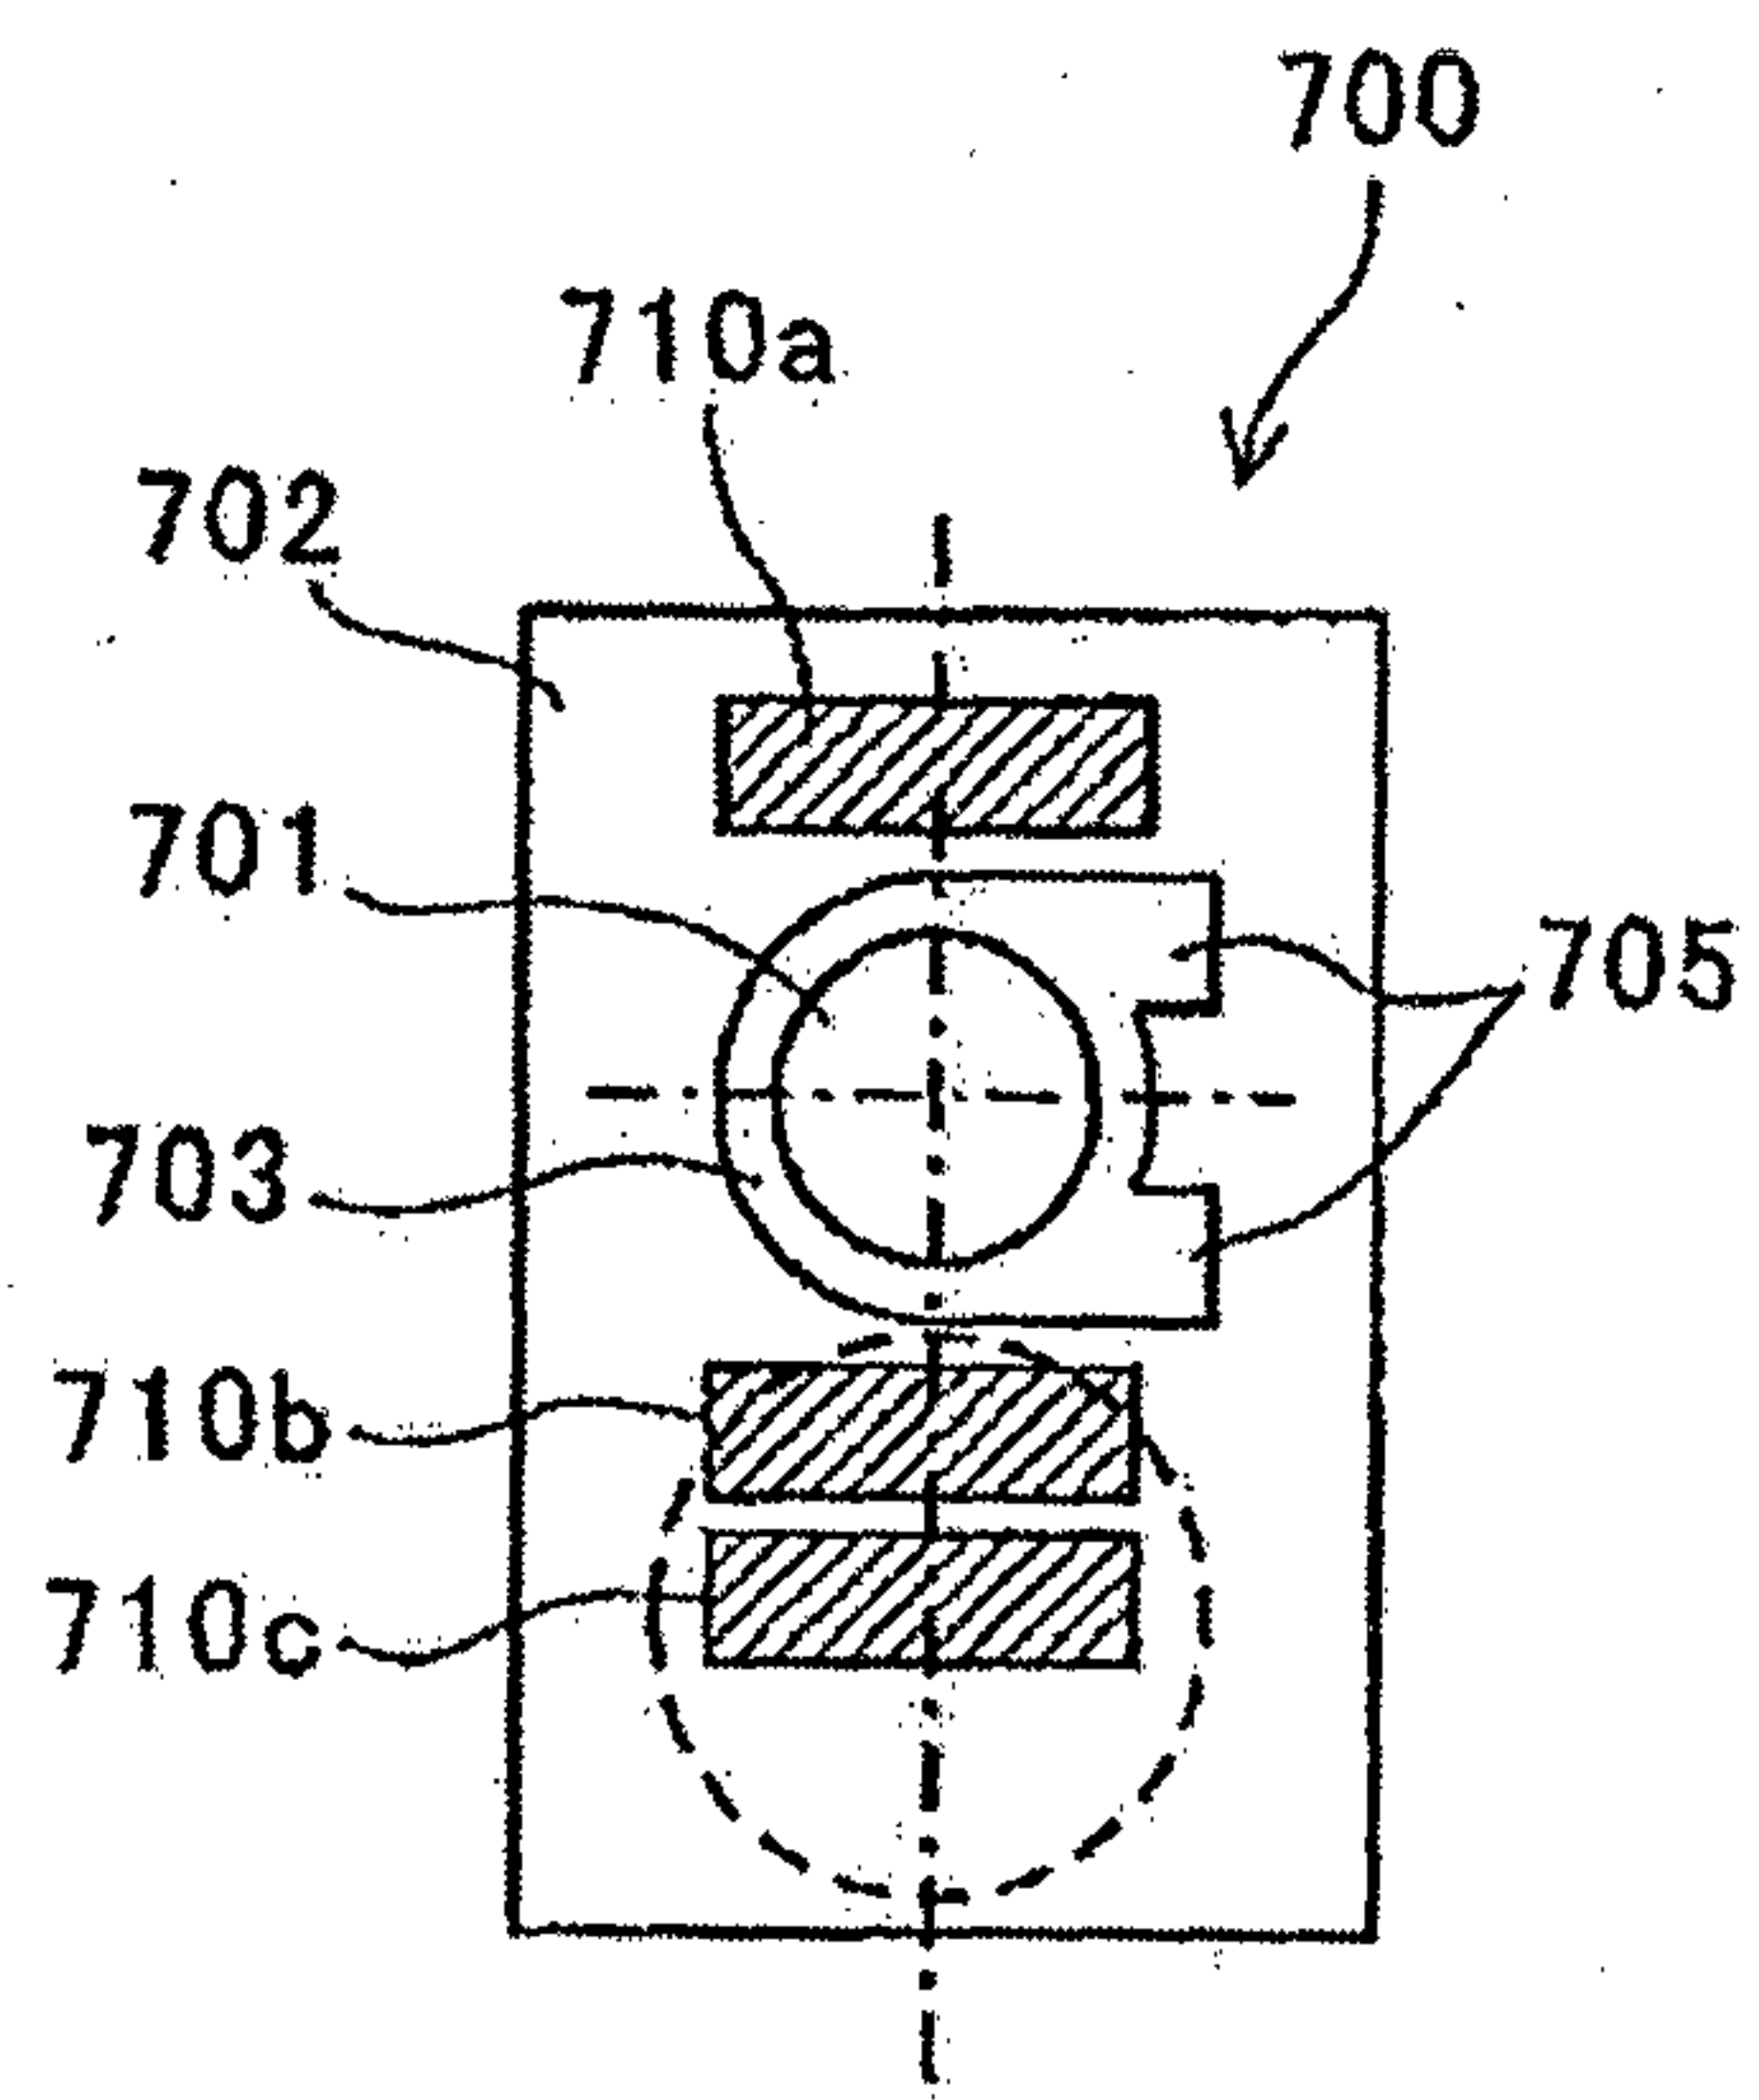


FIG.58B




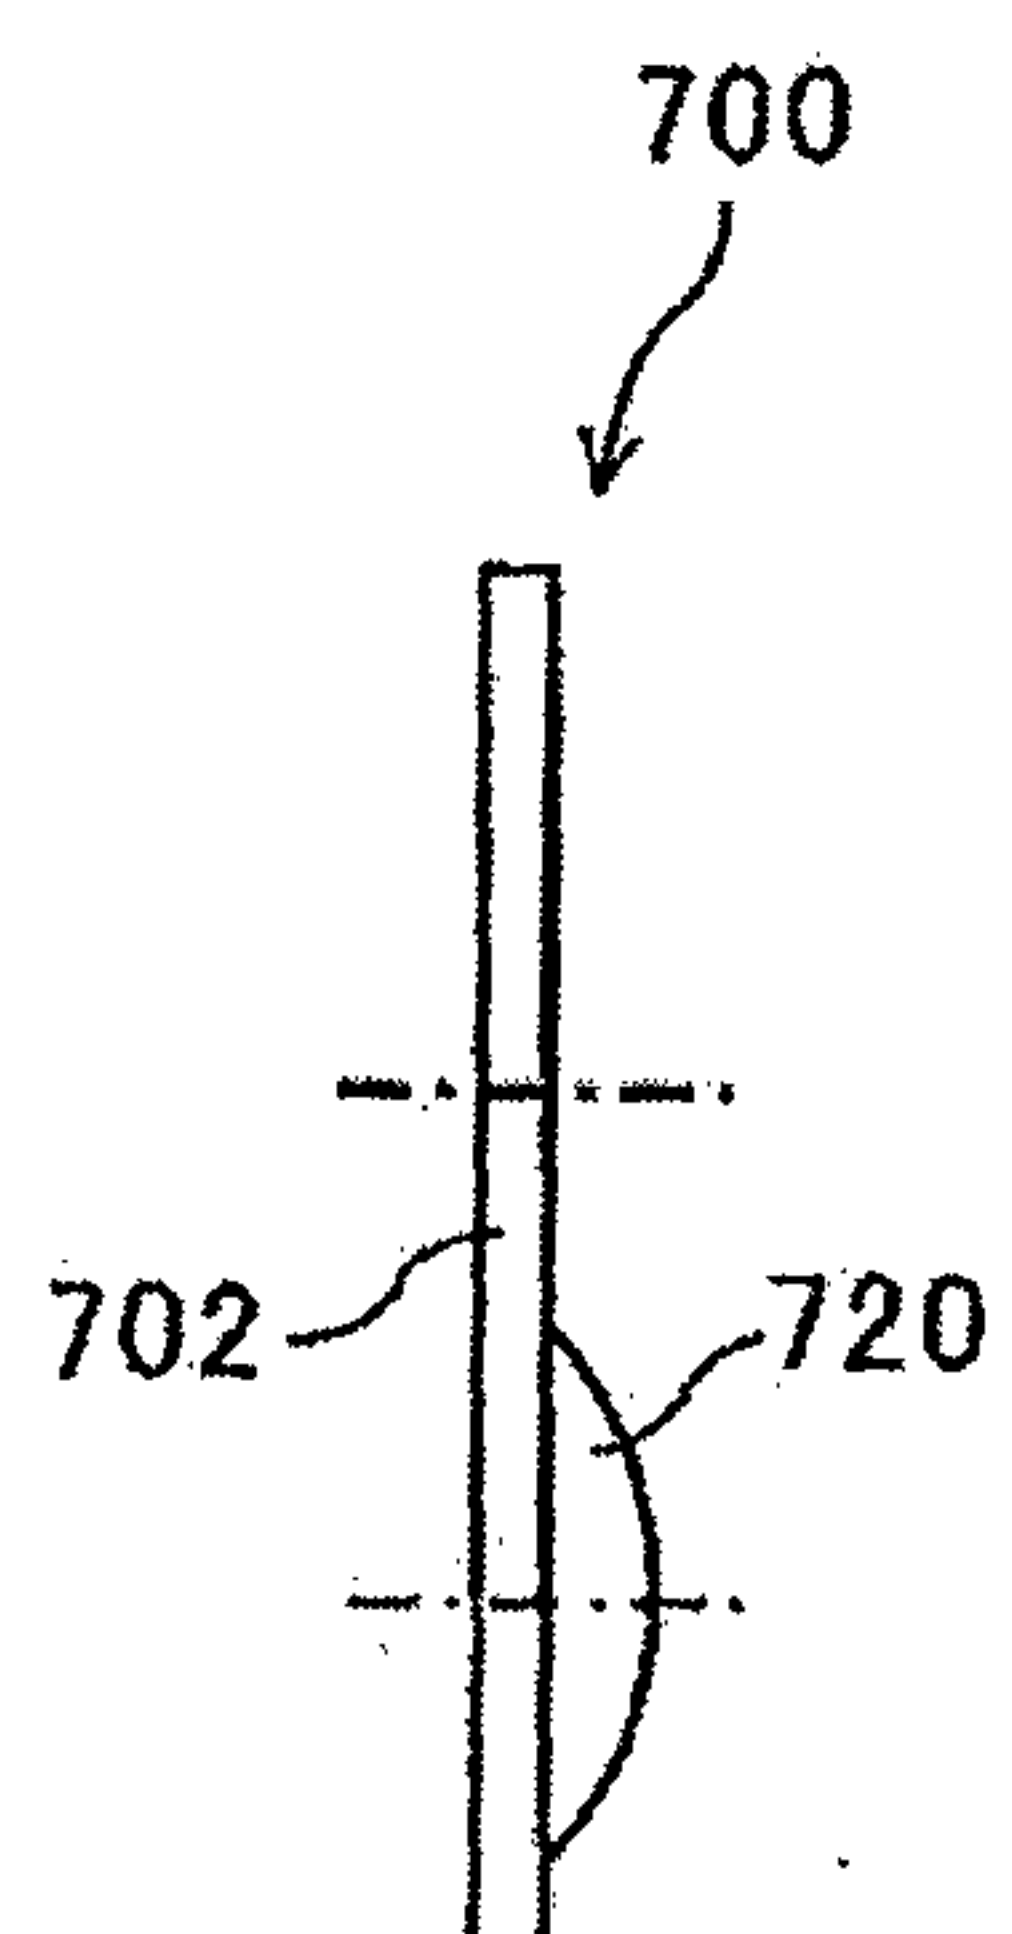


FIG.58C

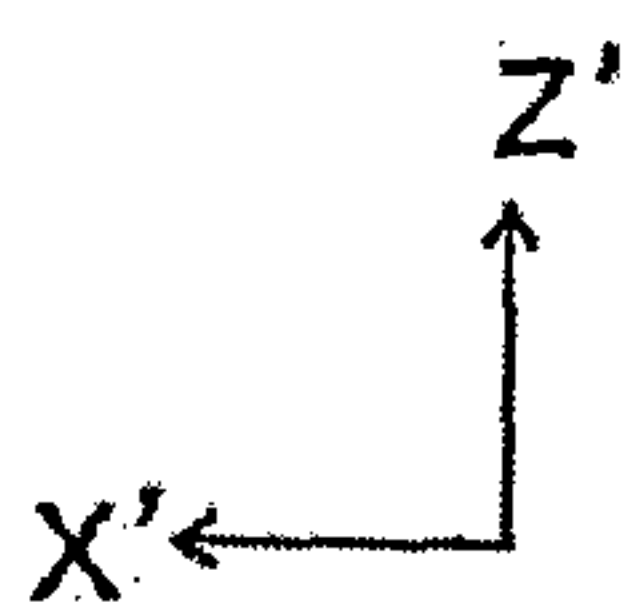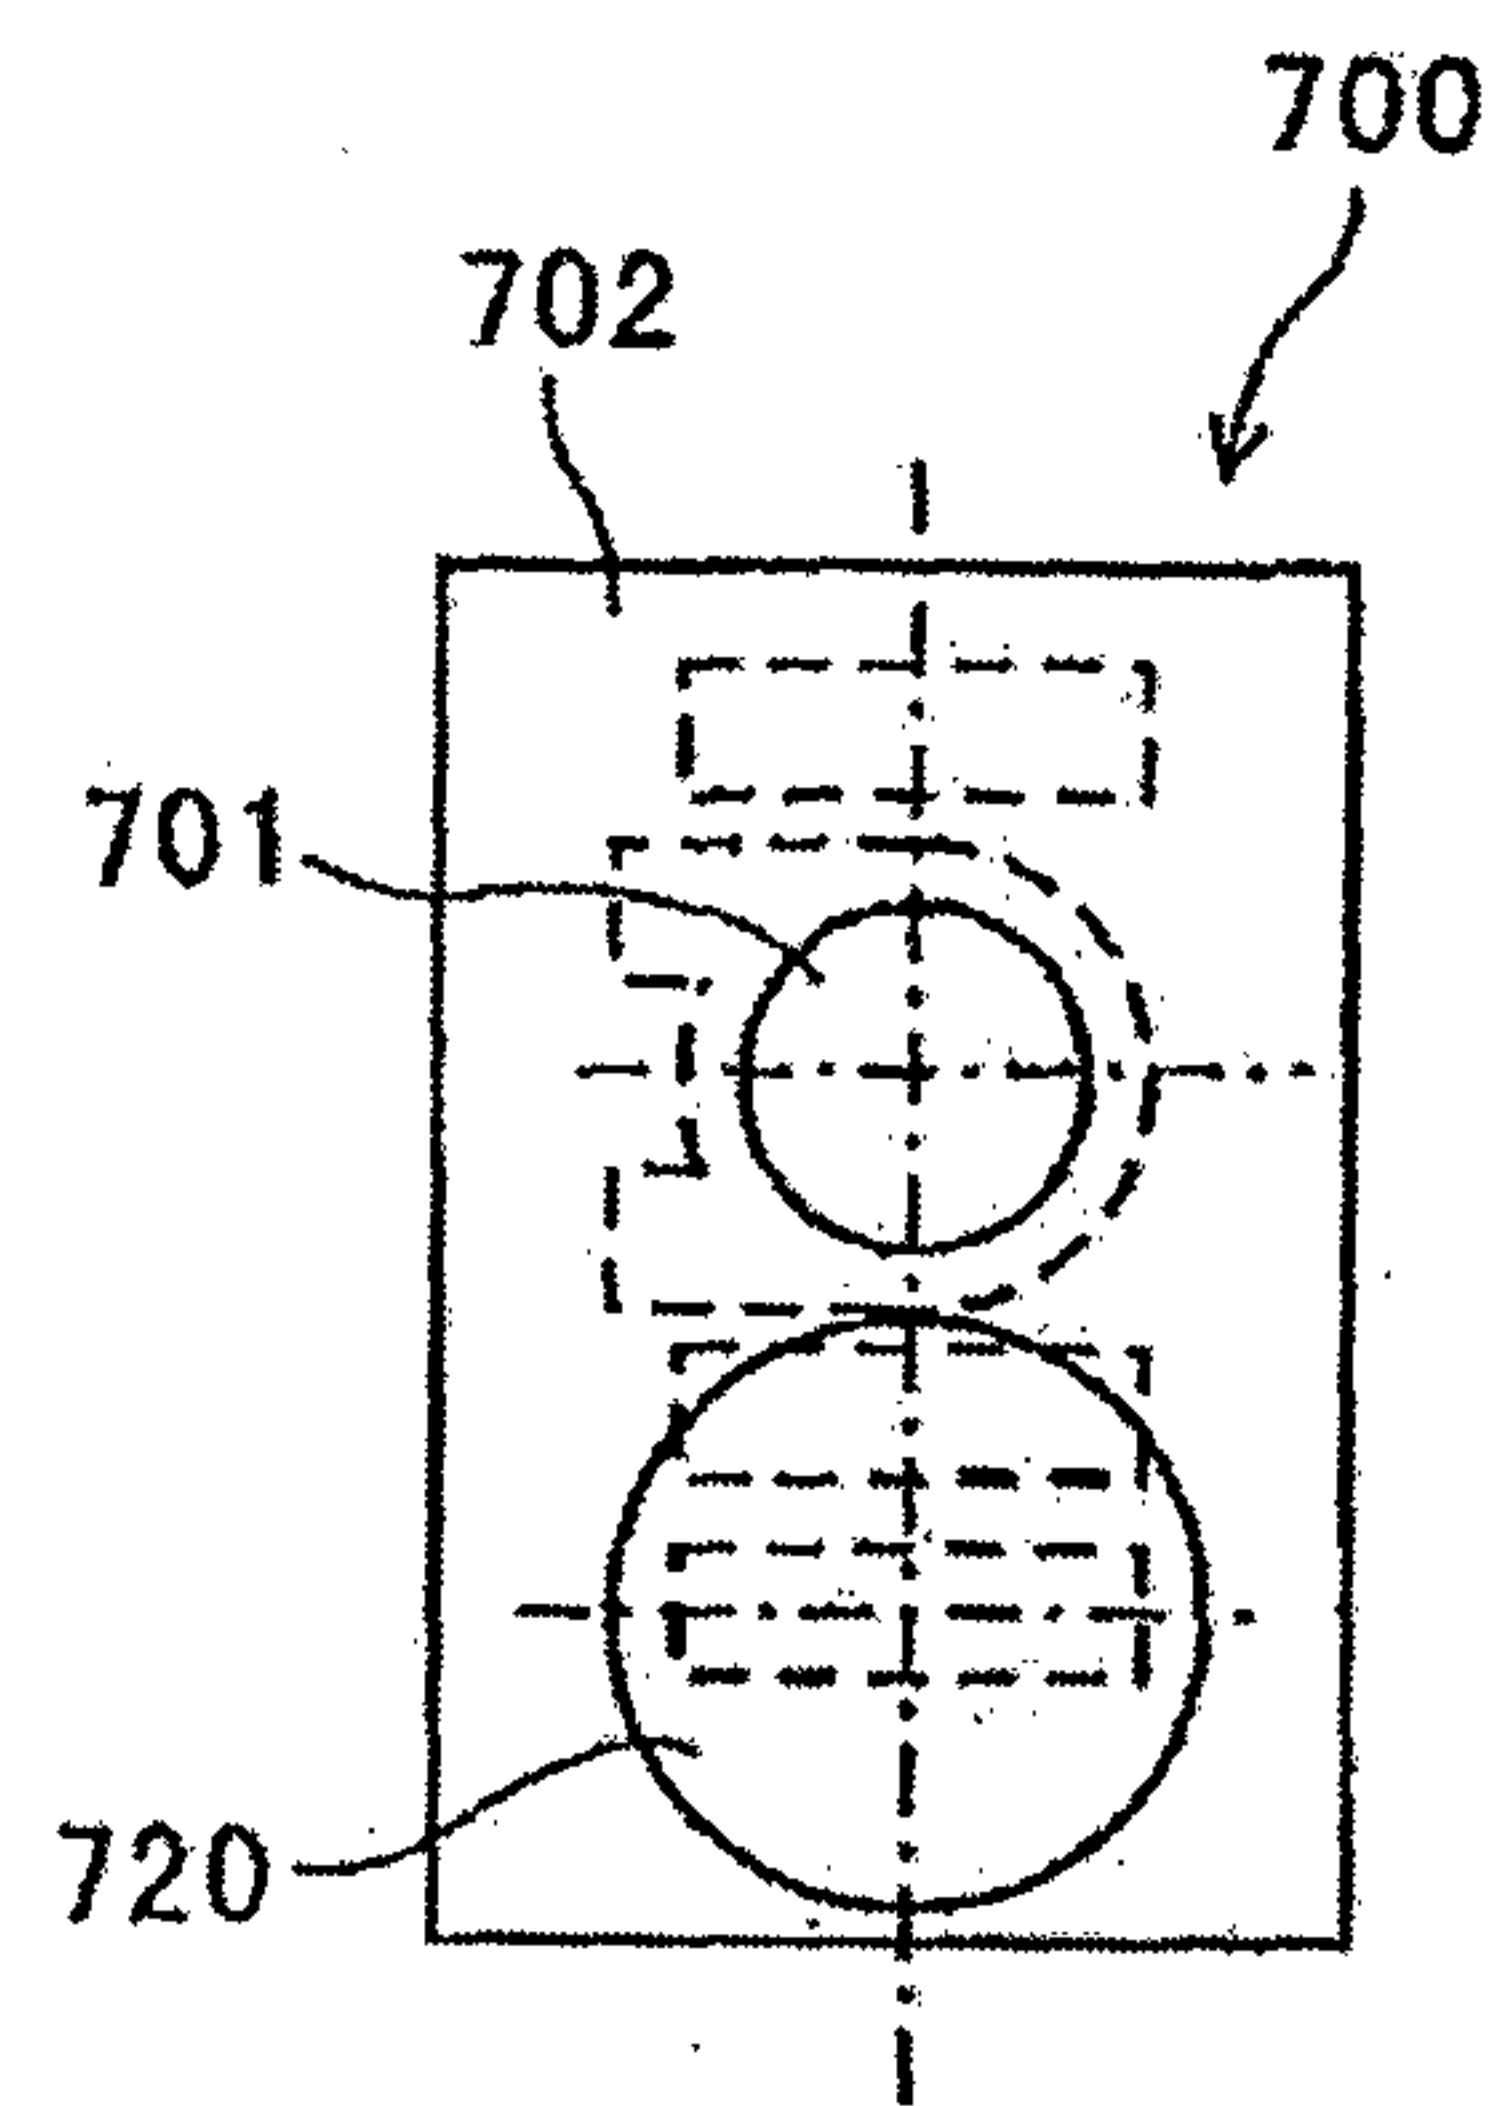


59/66

FIG.59

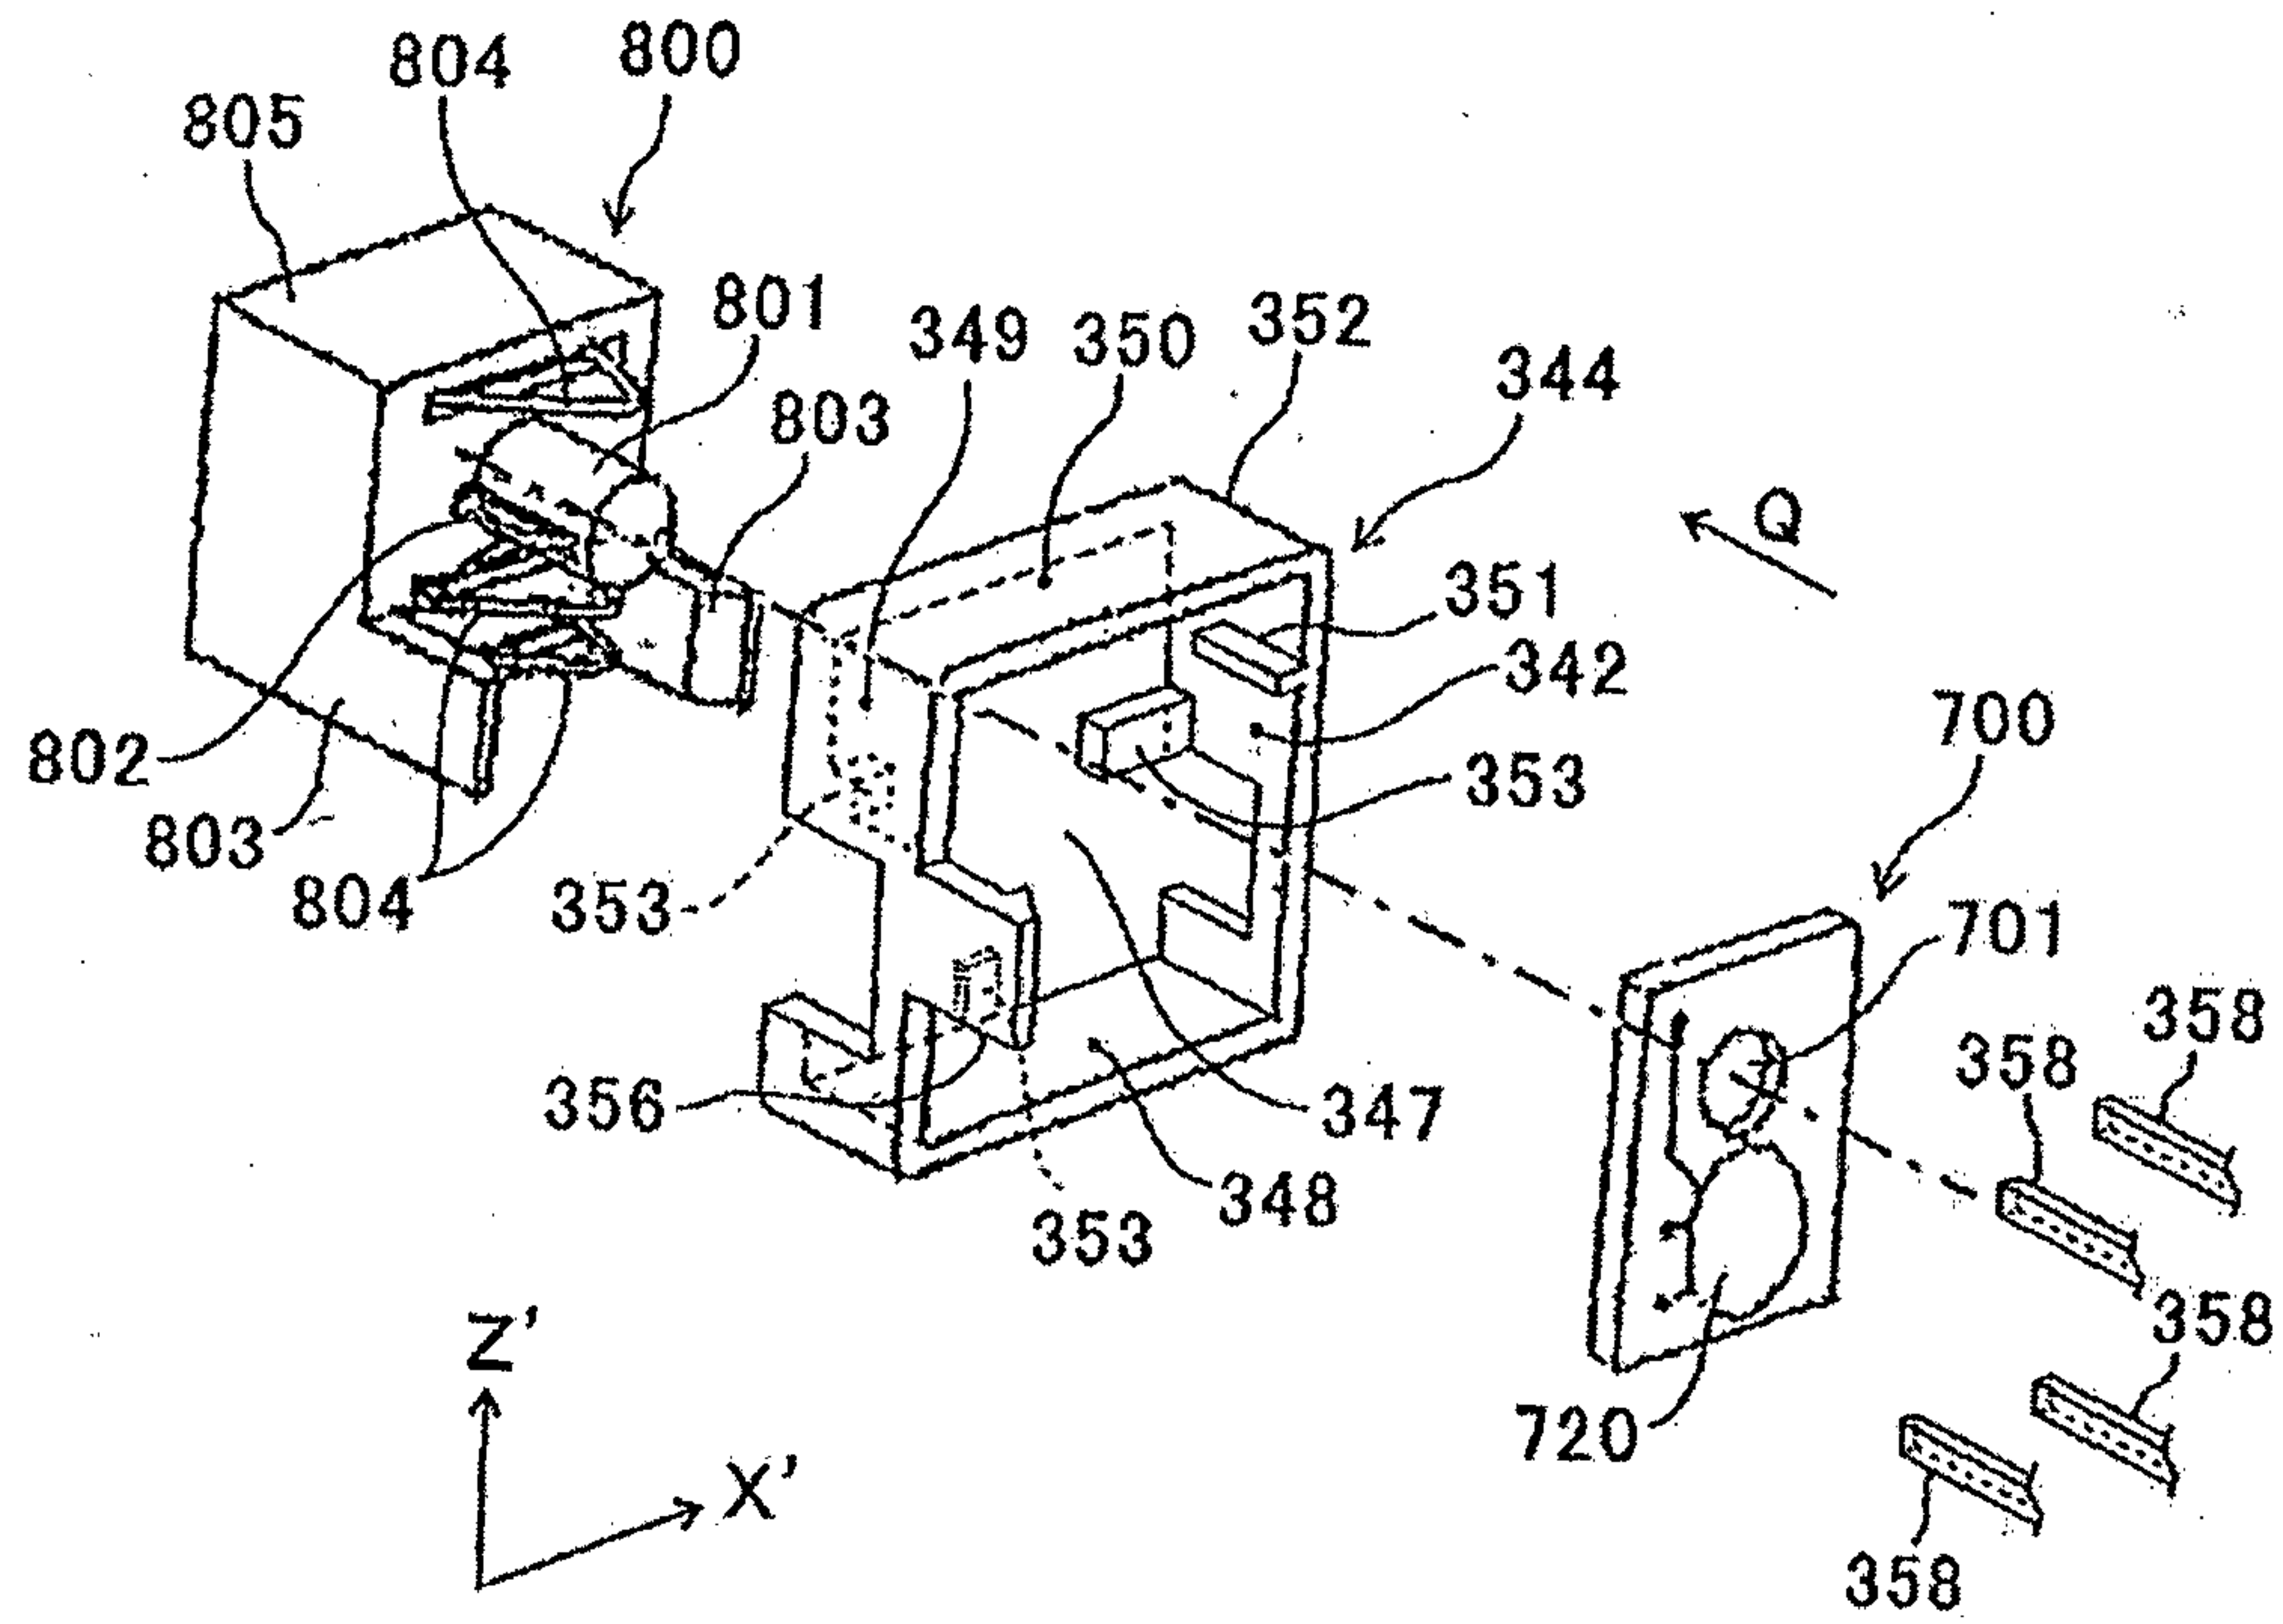

60/66

FIG.60

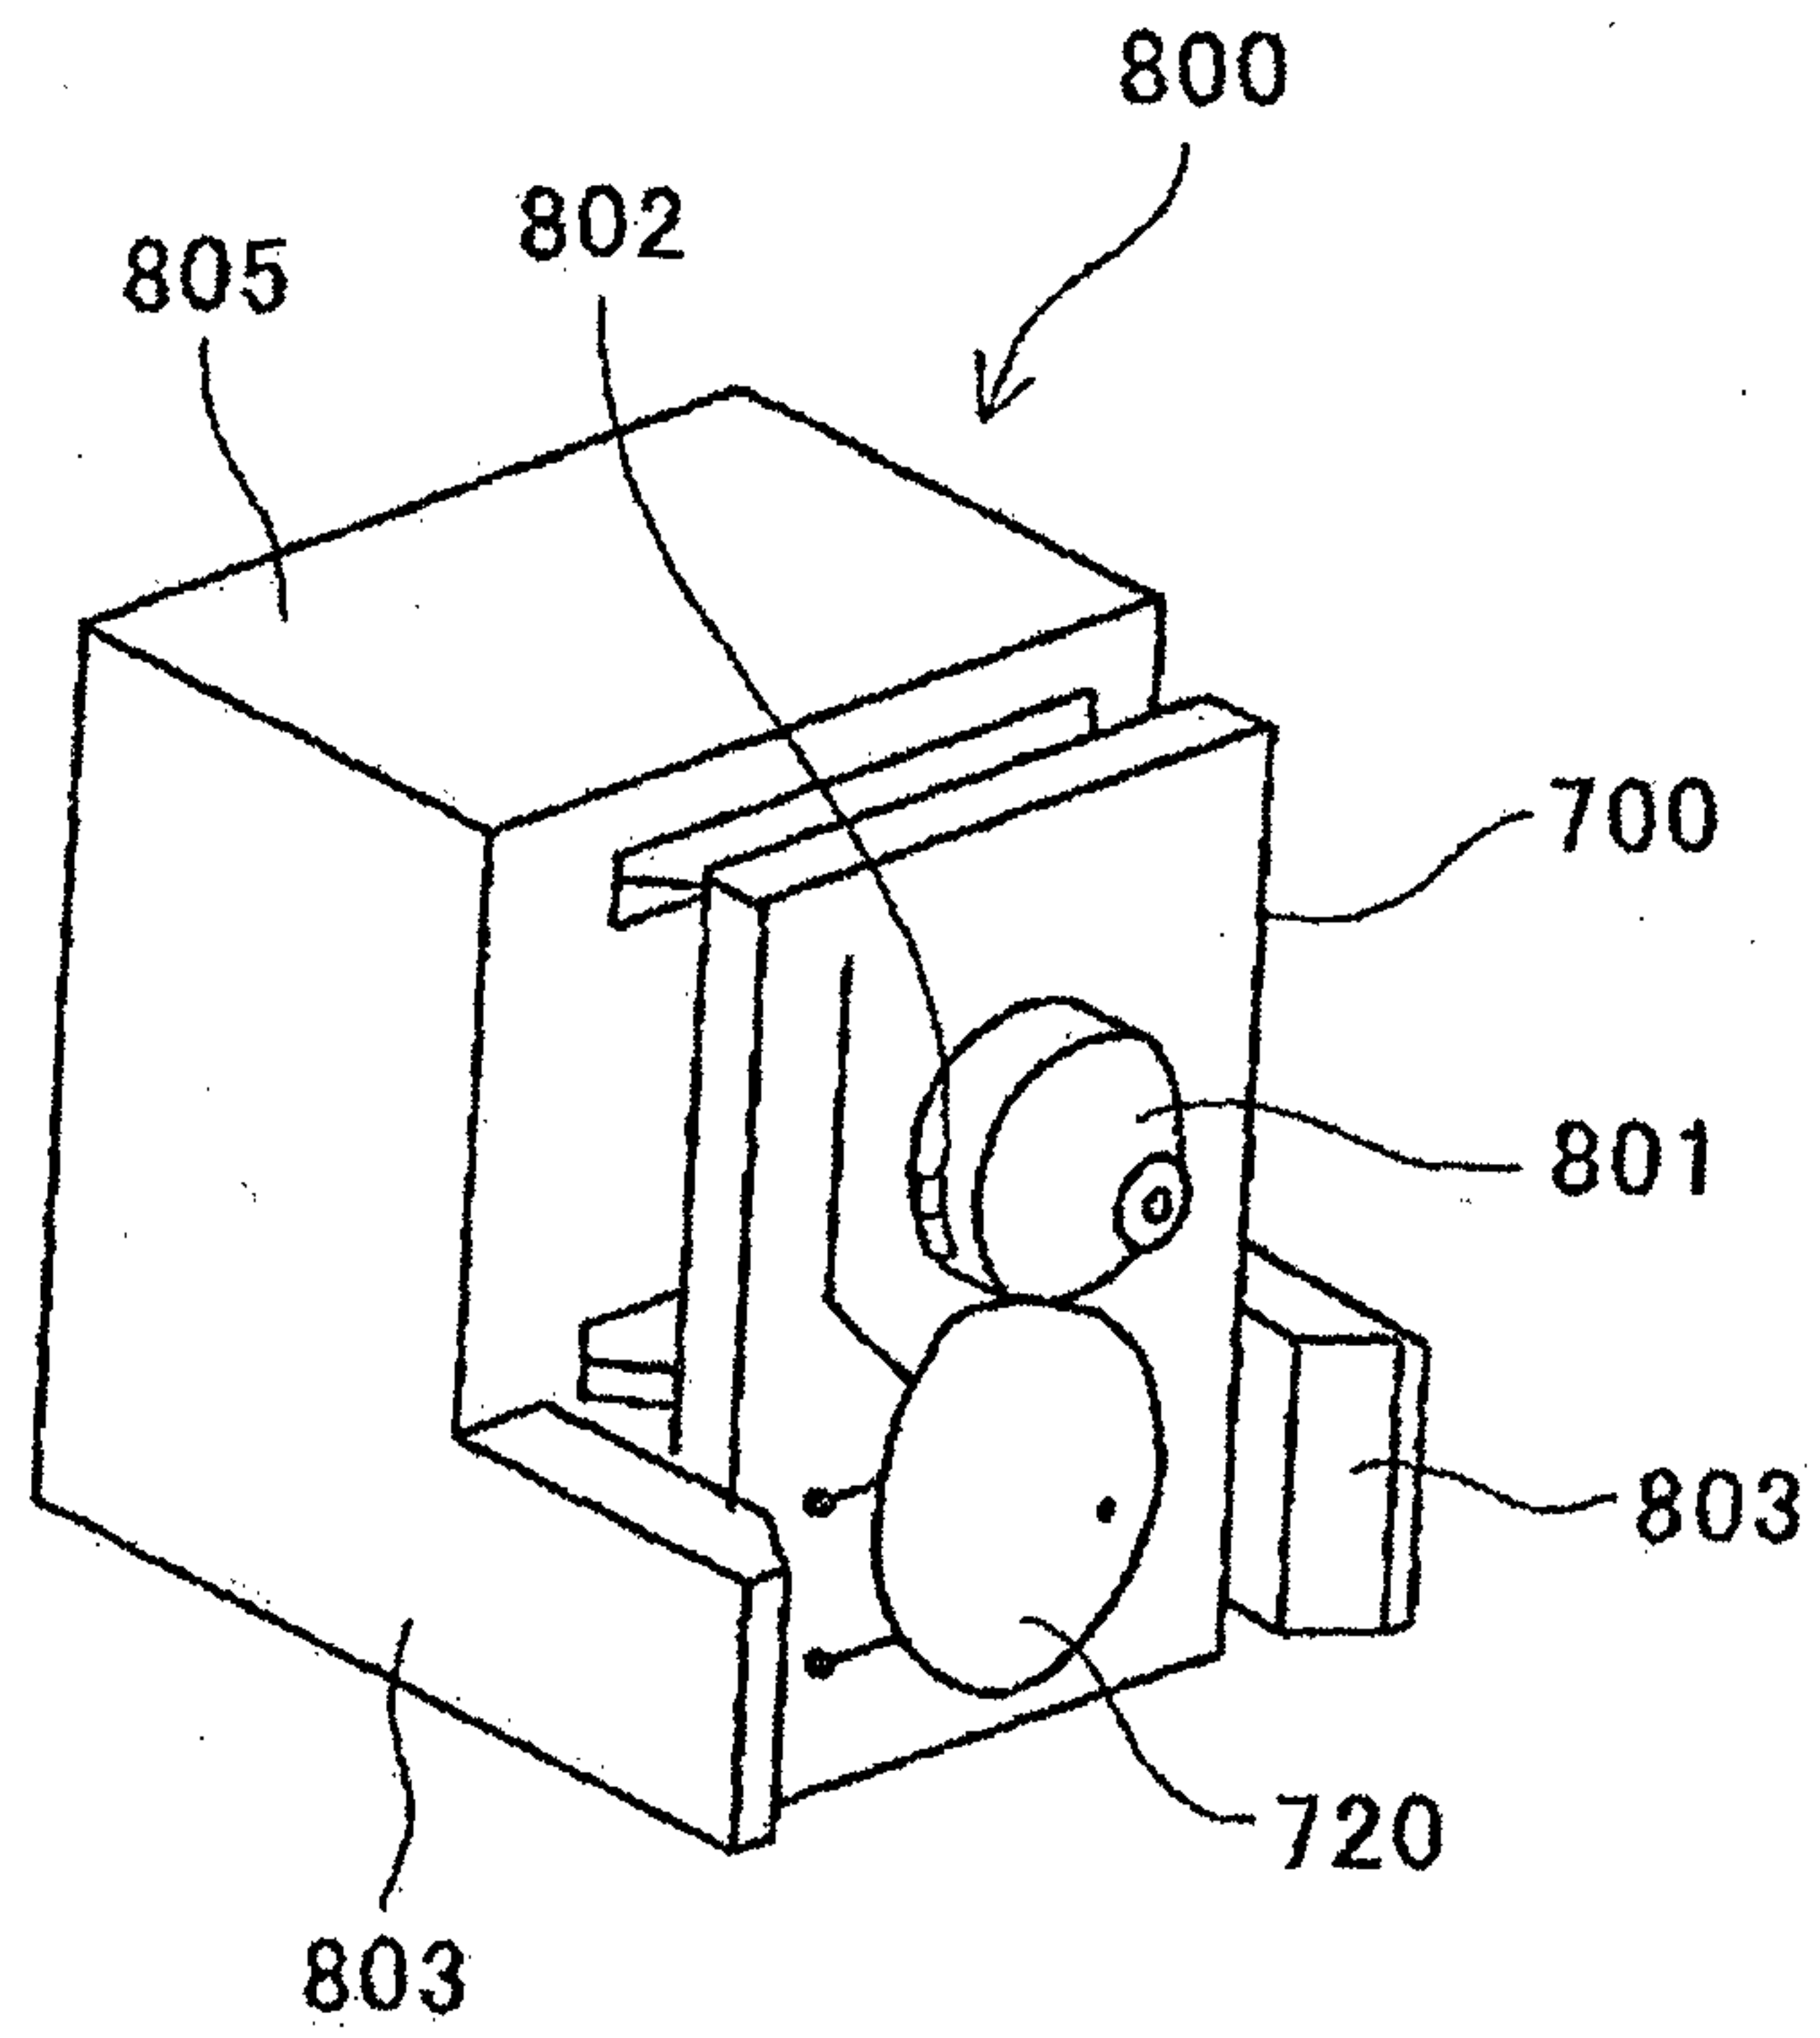

61/66

FIG.61A


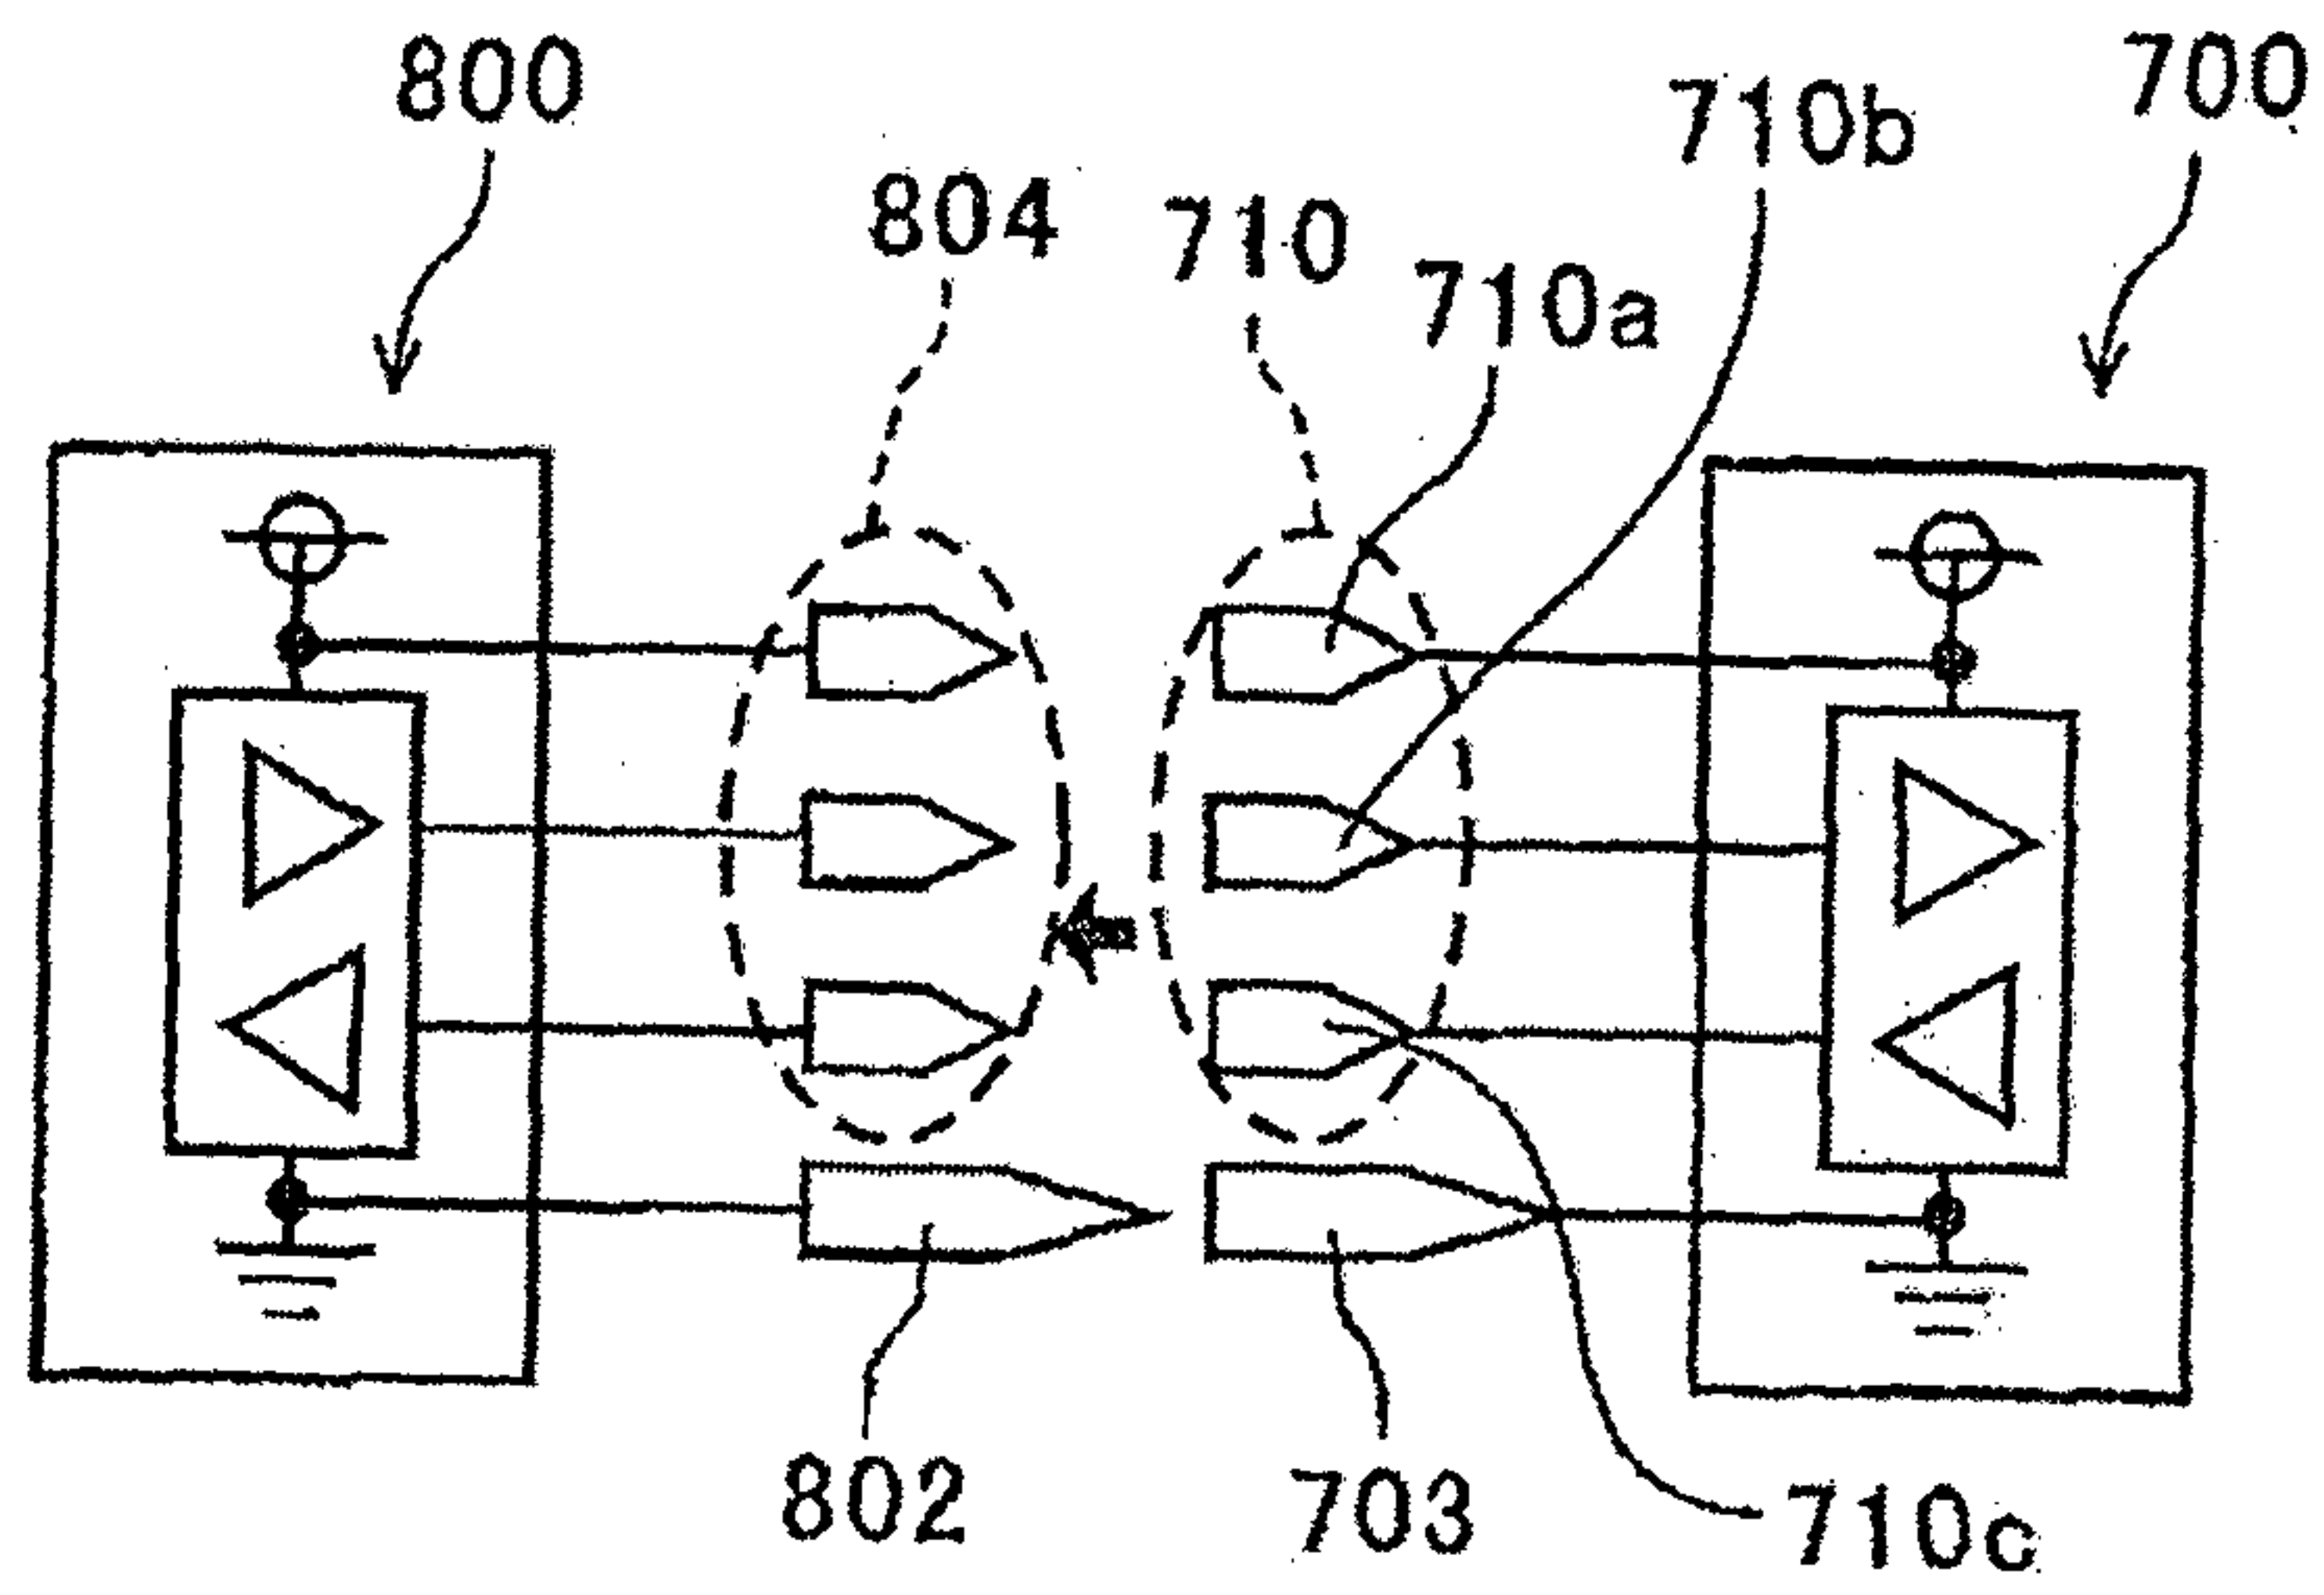


FIG.61B

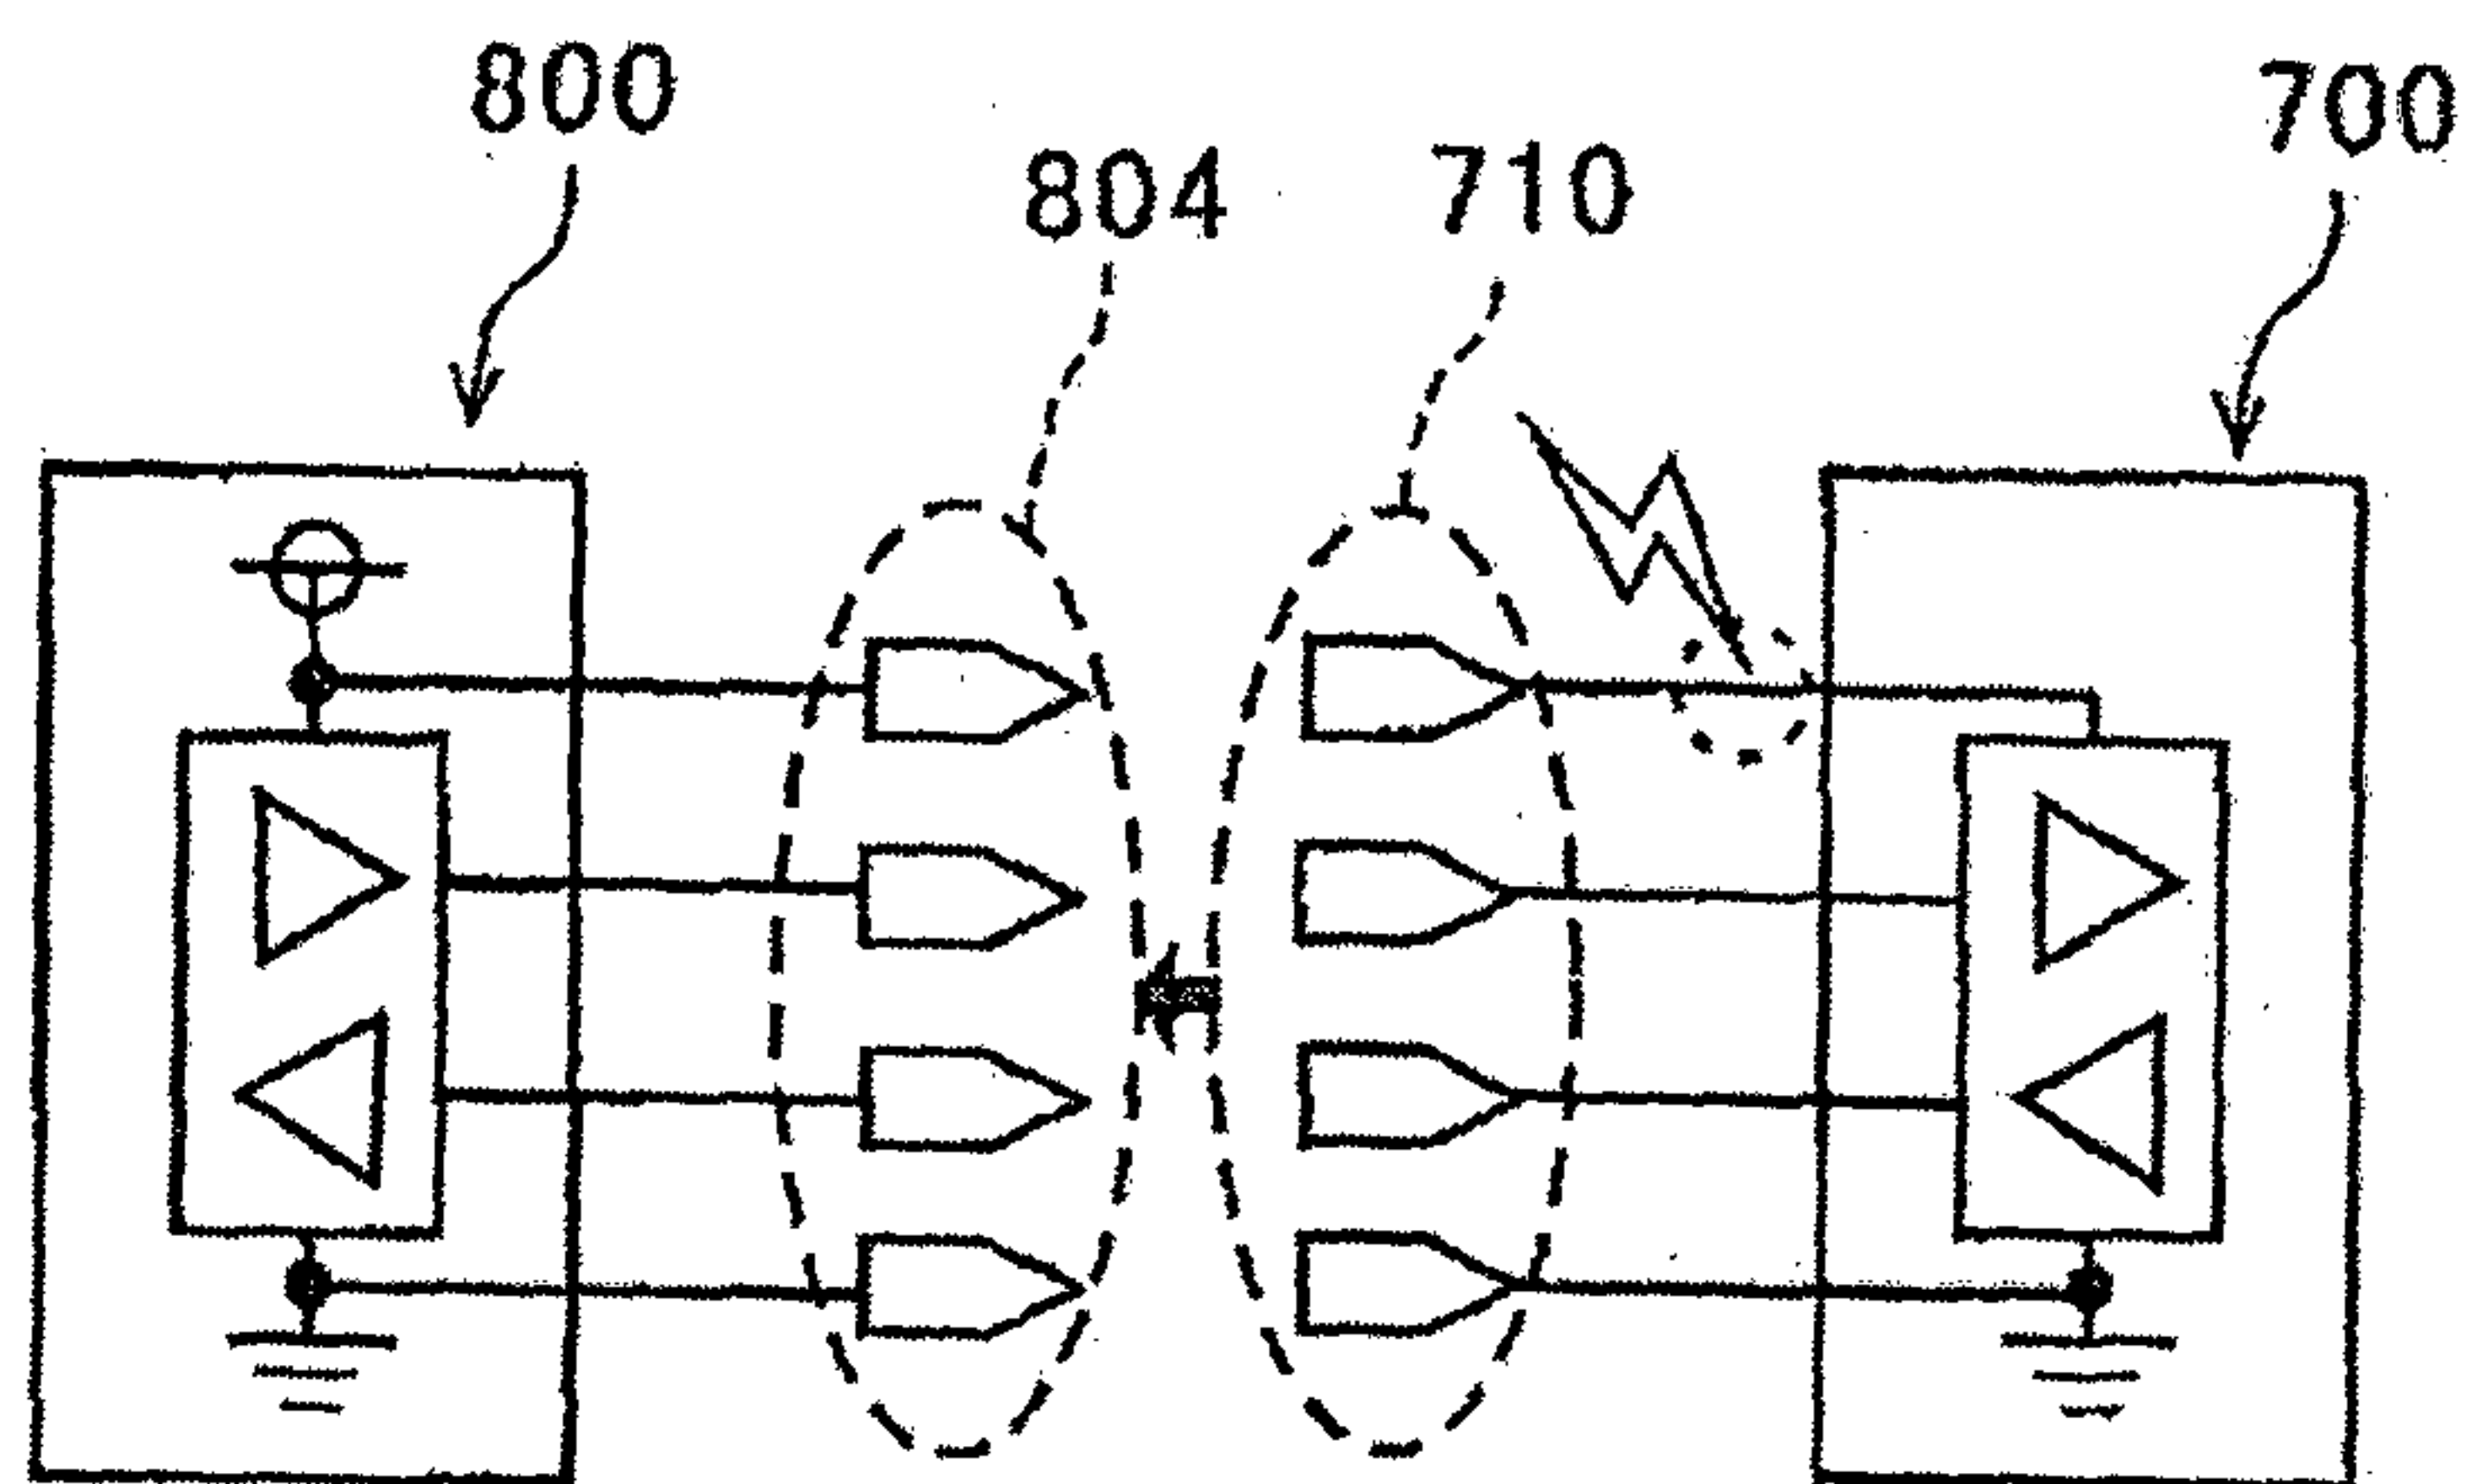

62/66

FIG.62A



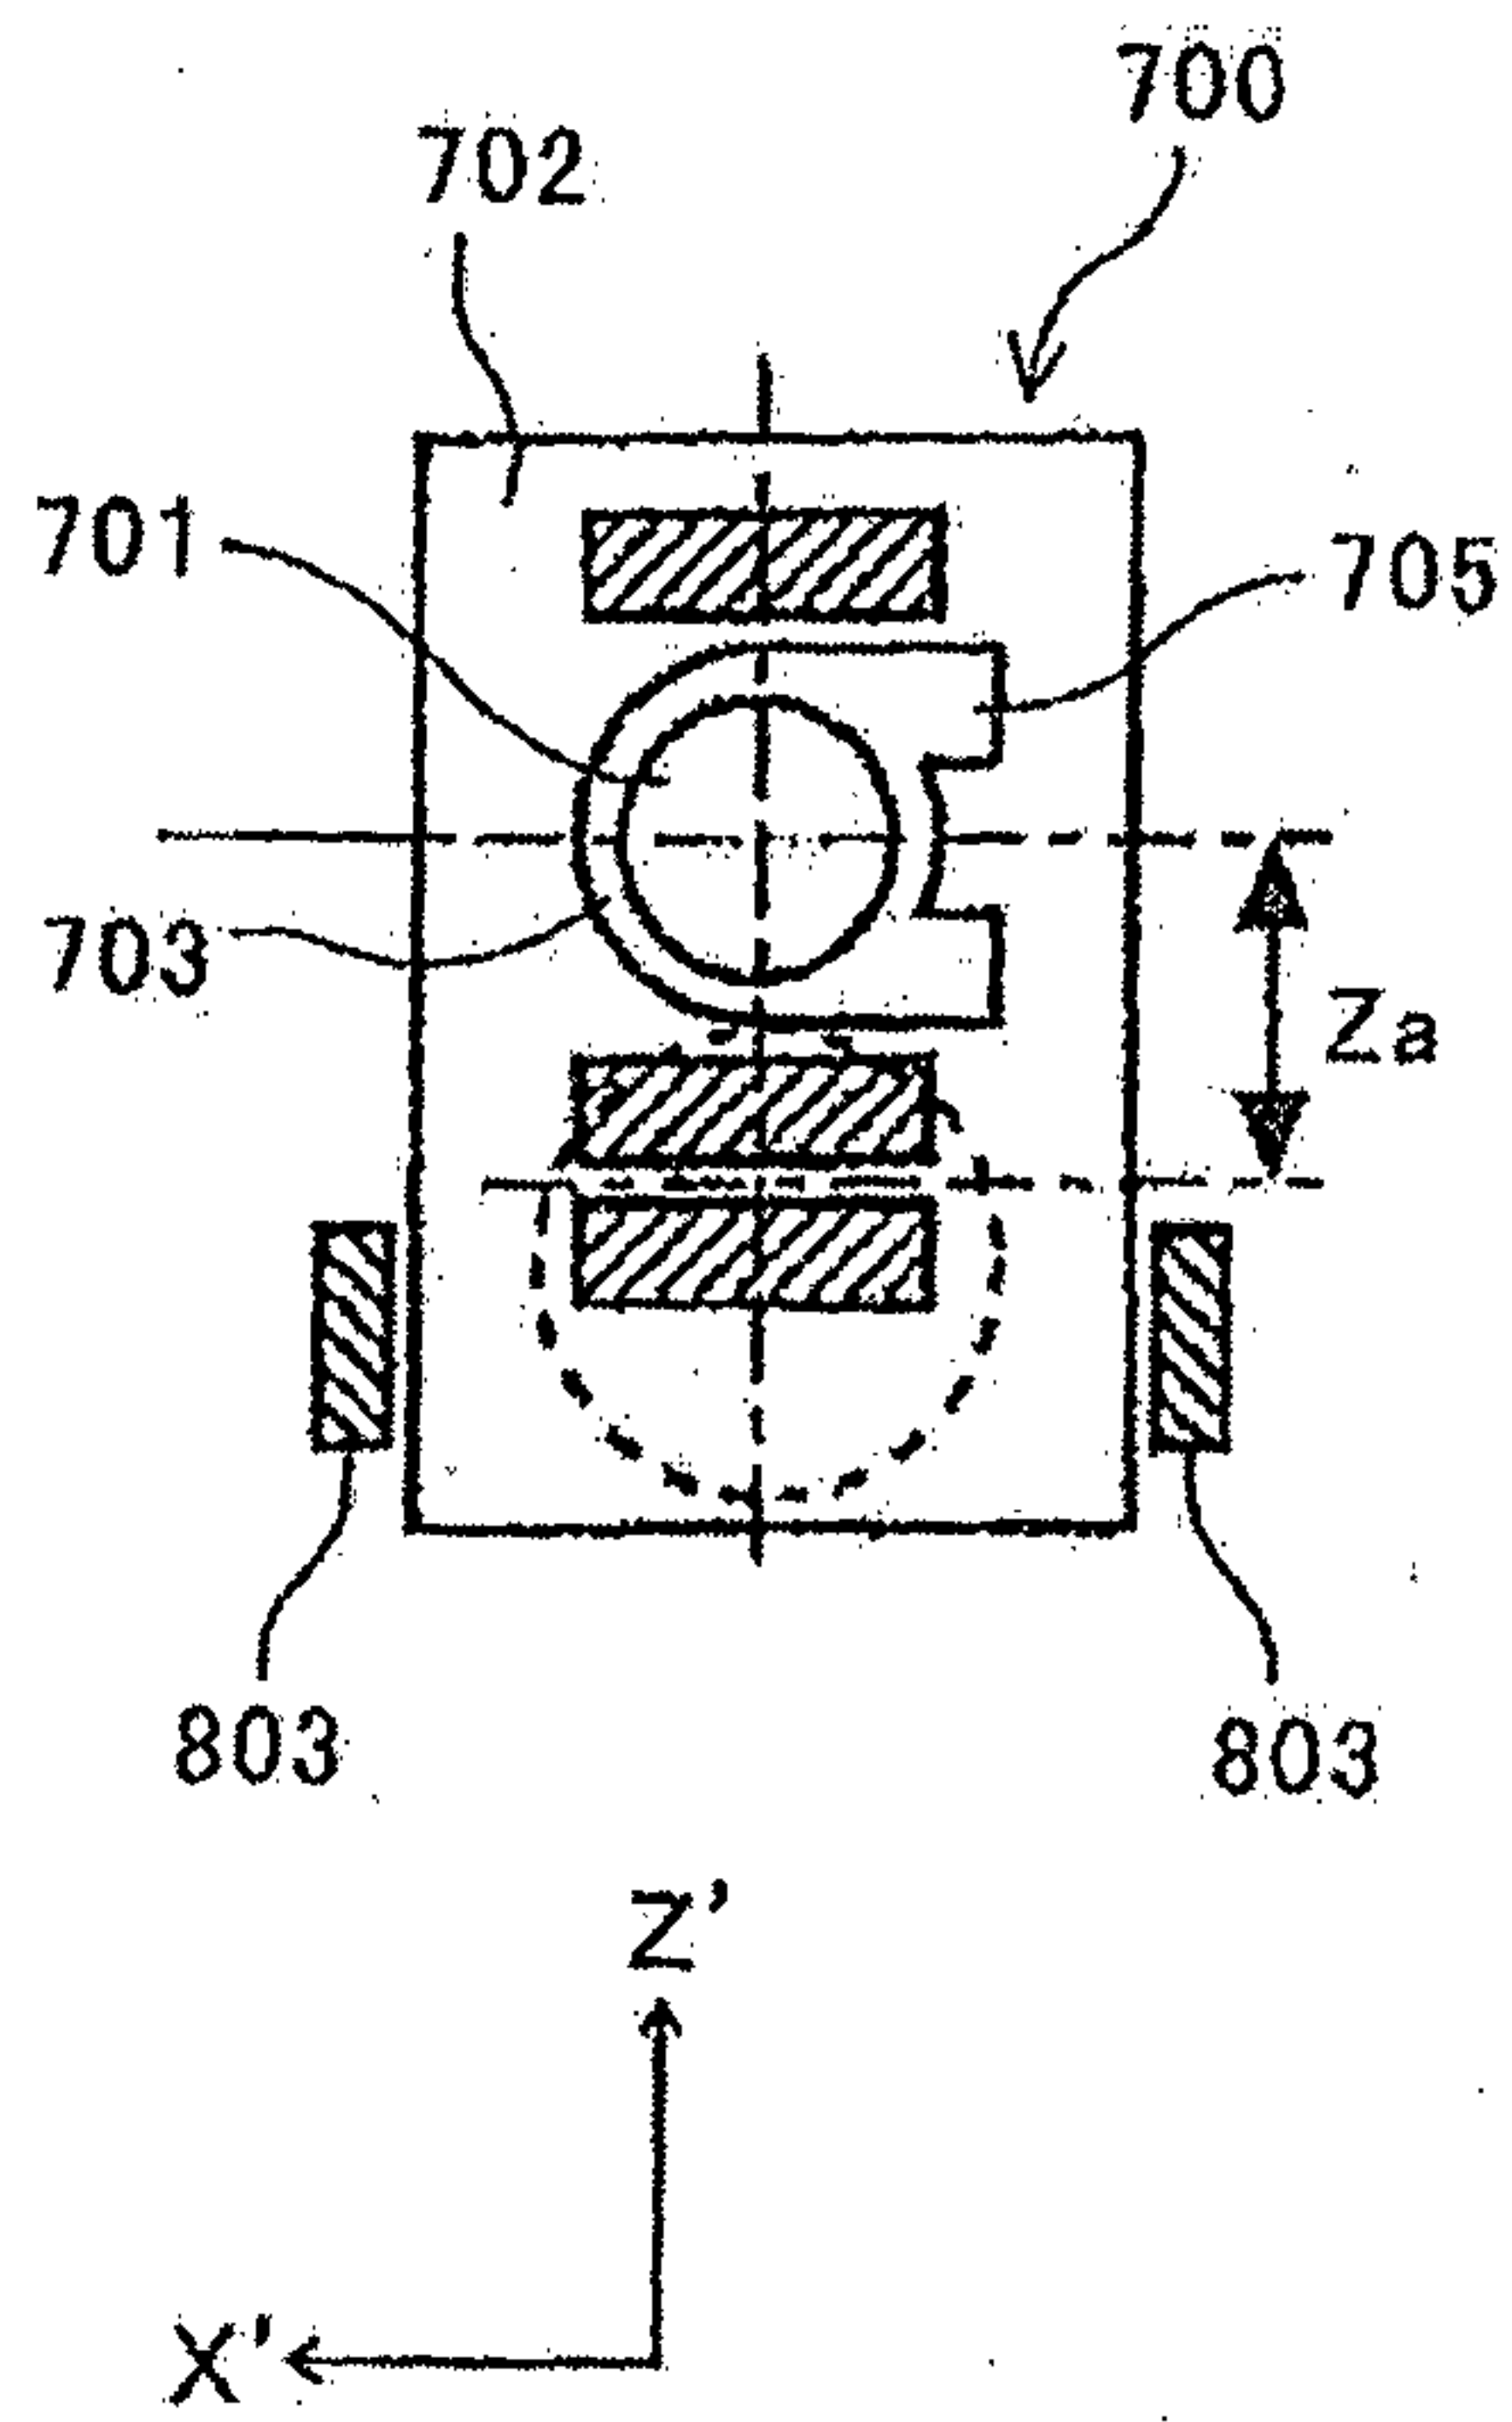


FIG.62B

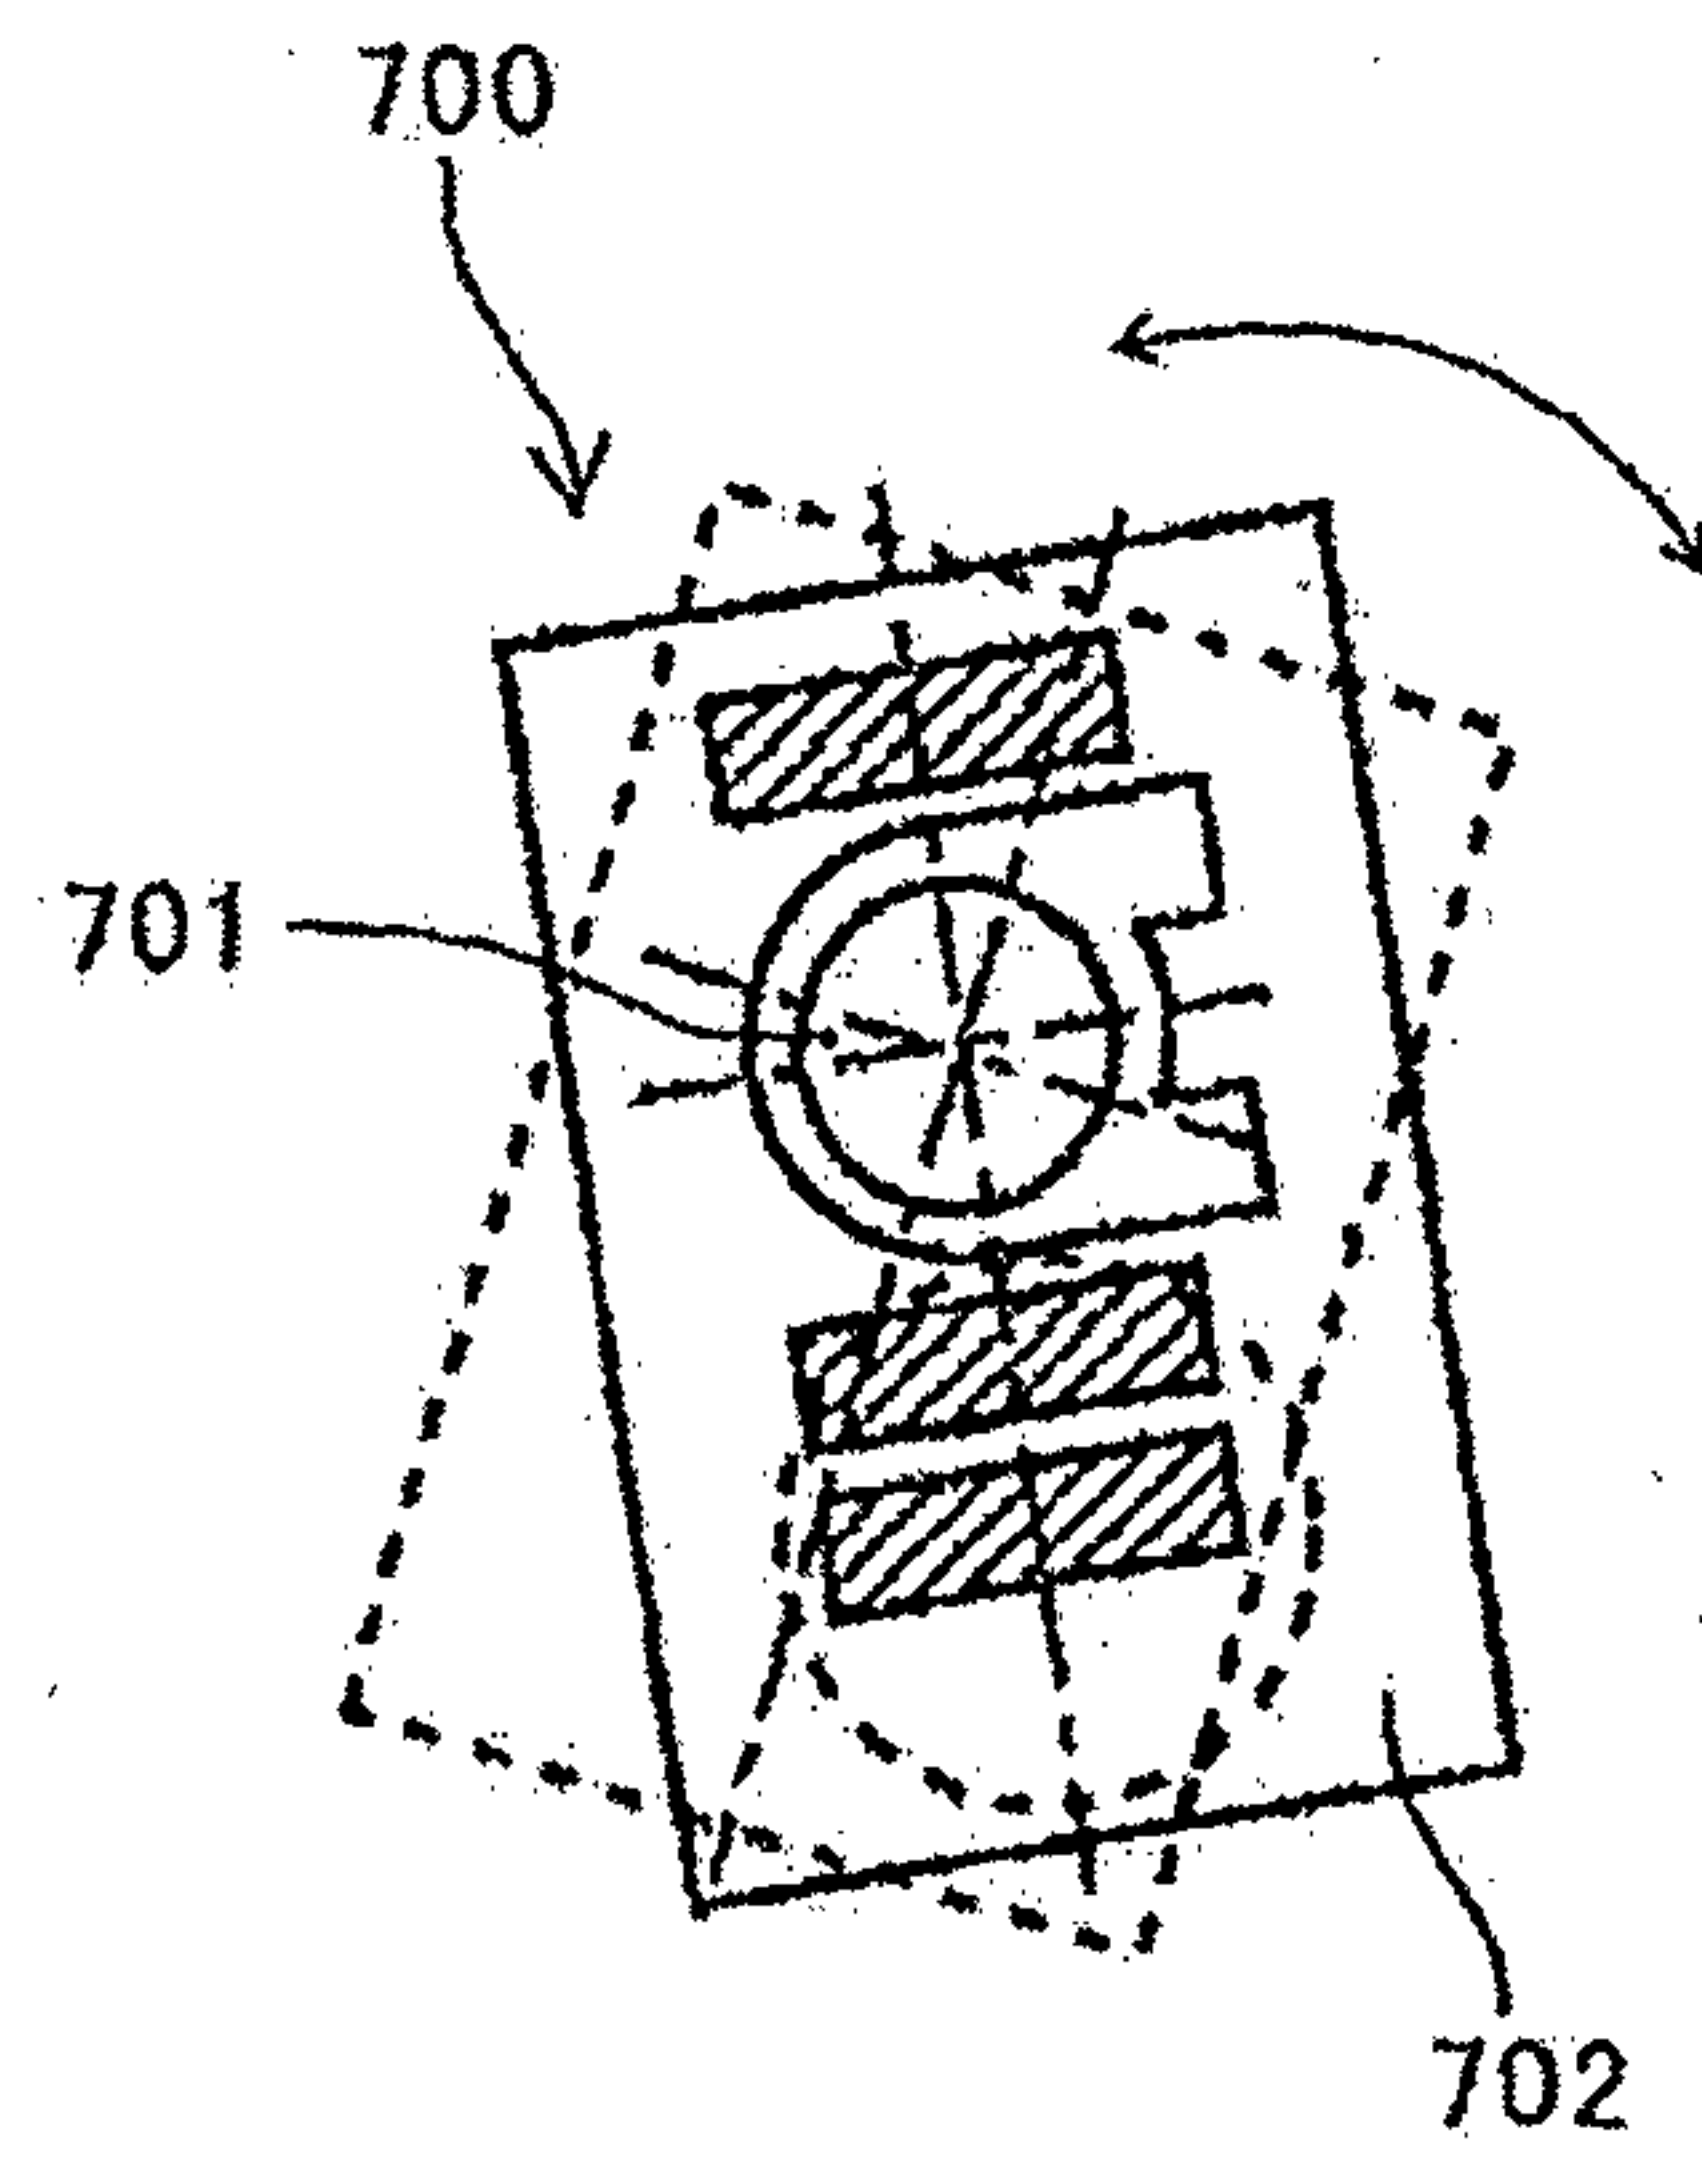

63/66

FIG.63

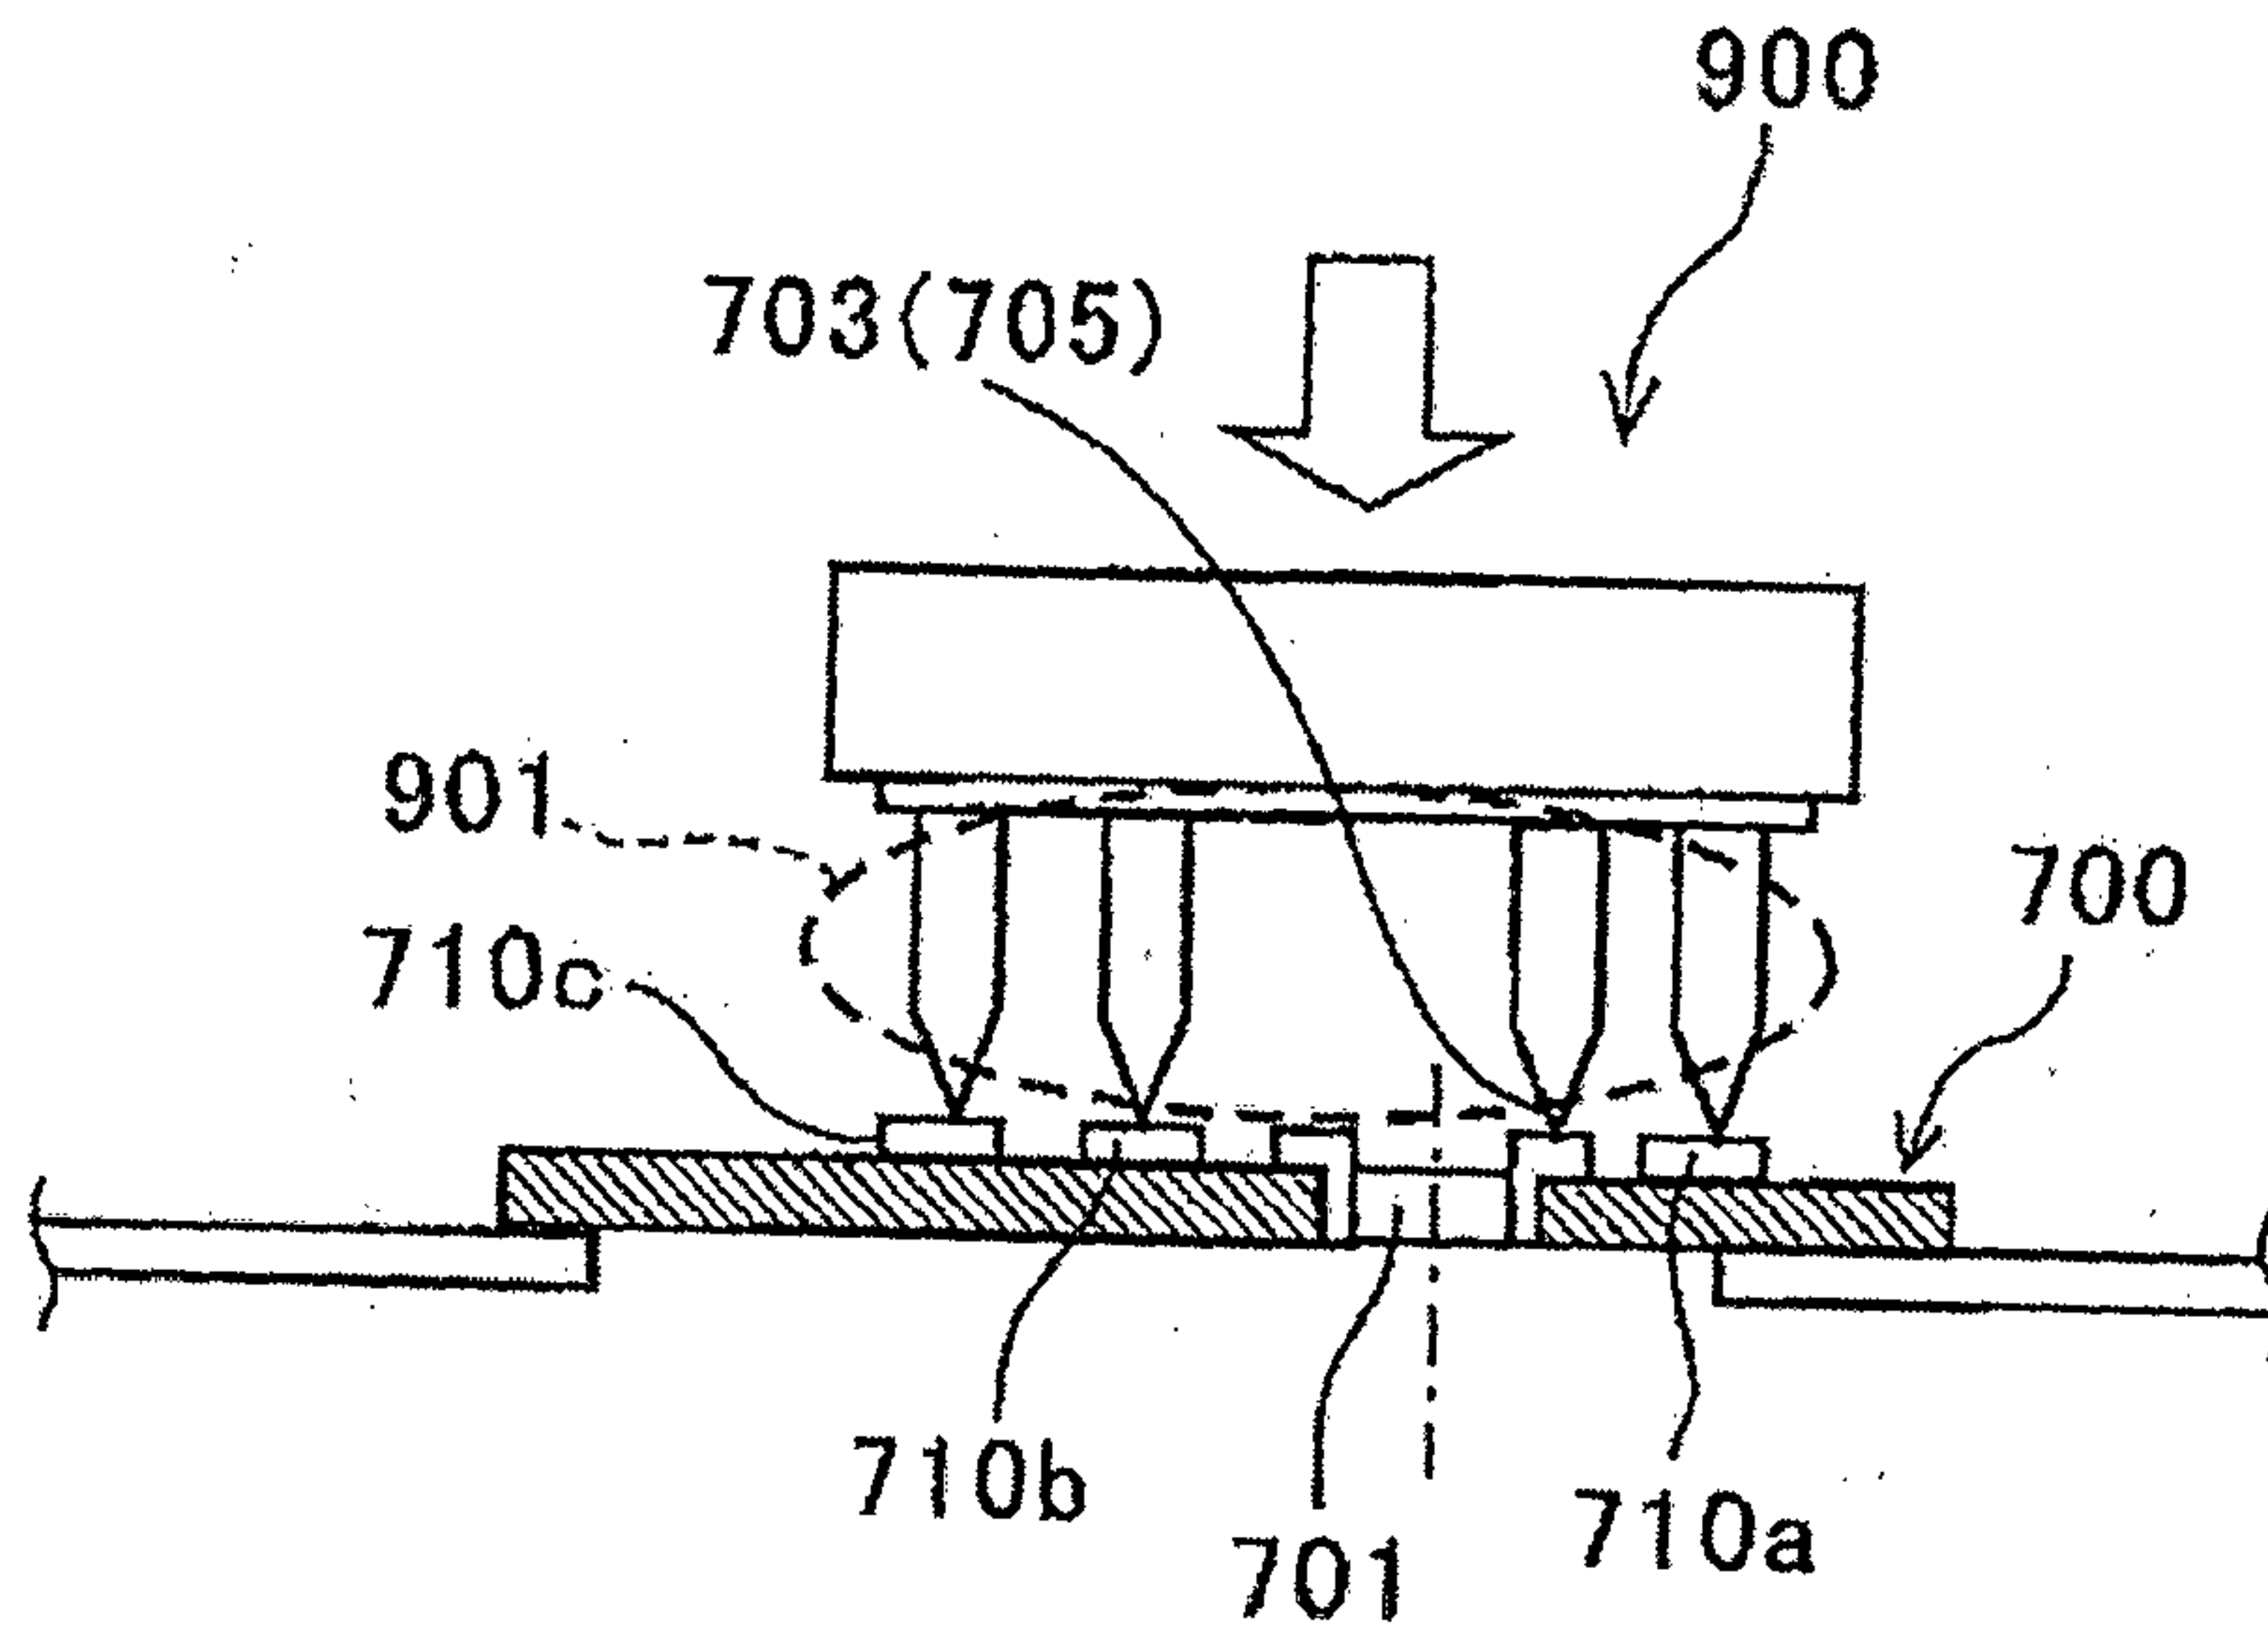

64/66

FIG.64A


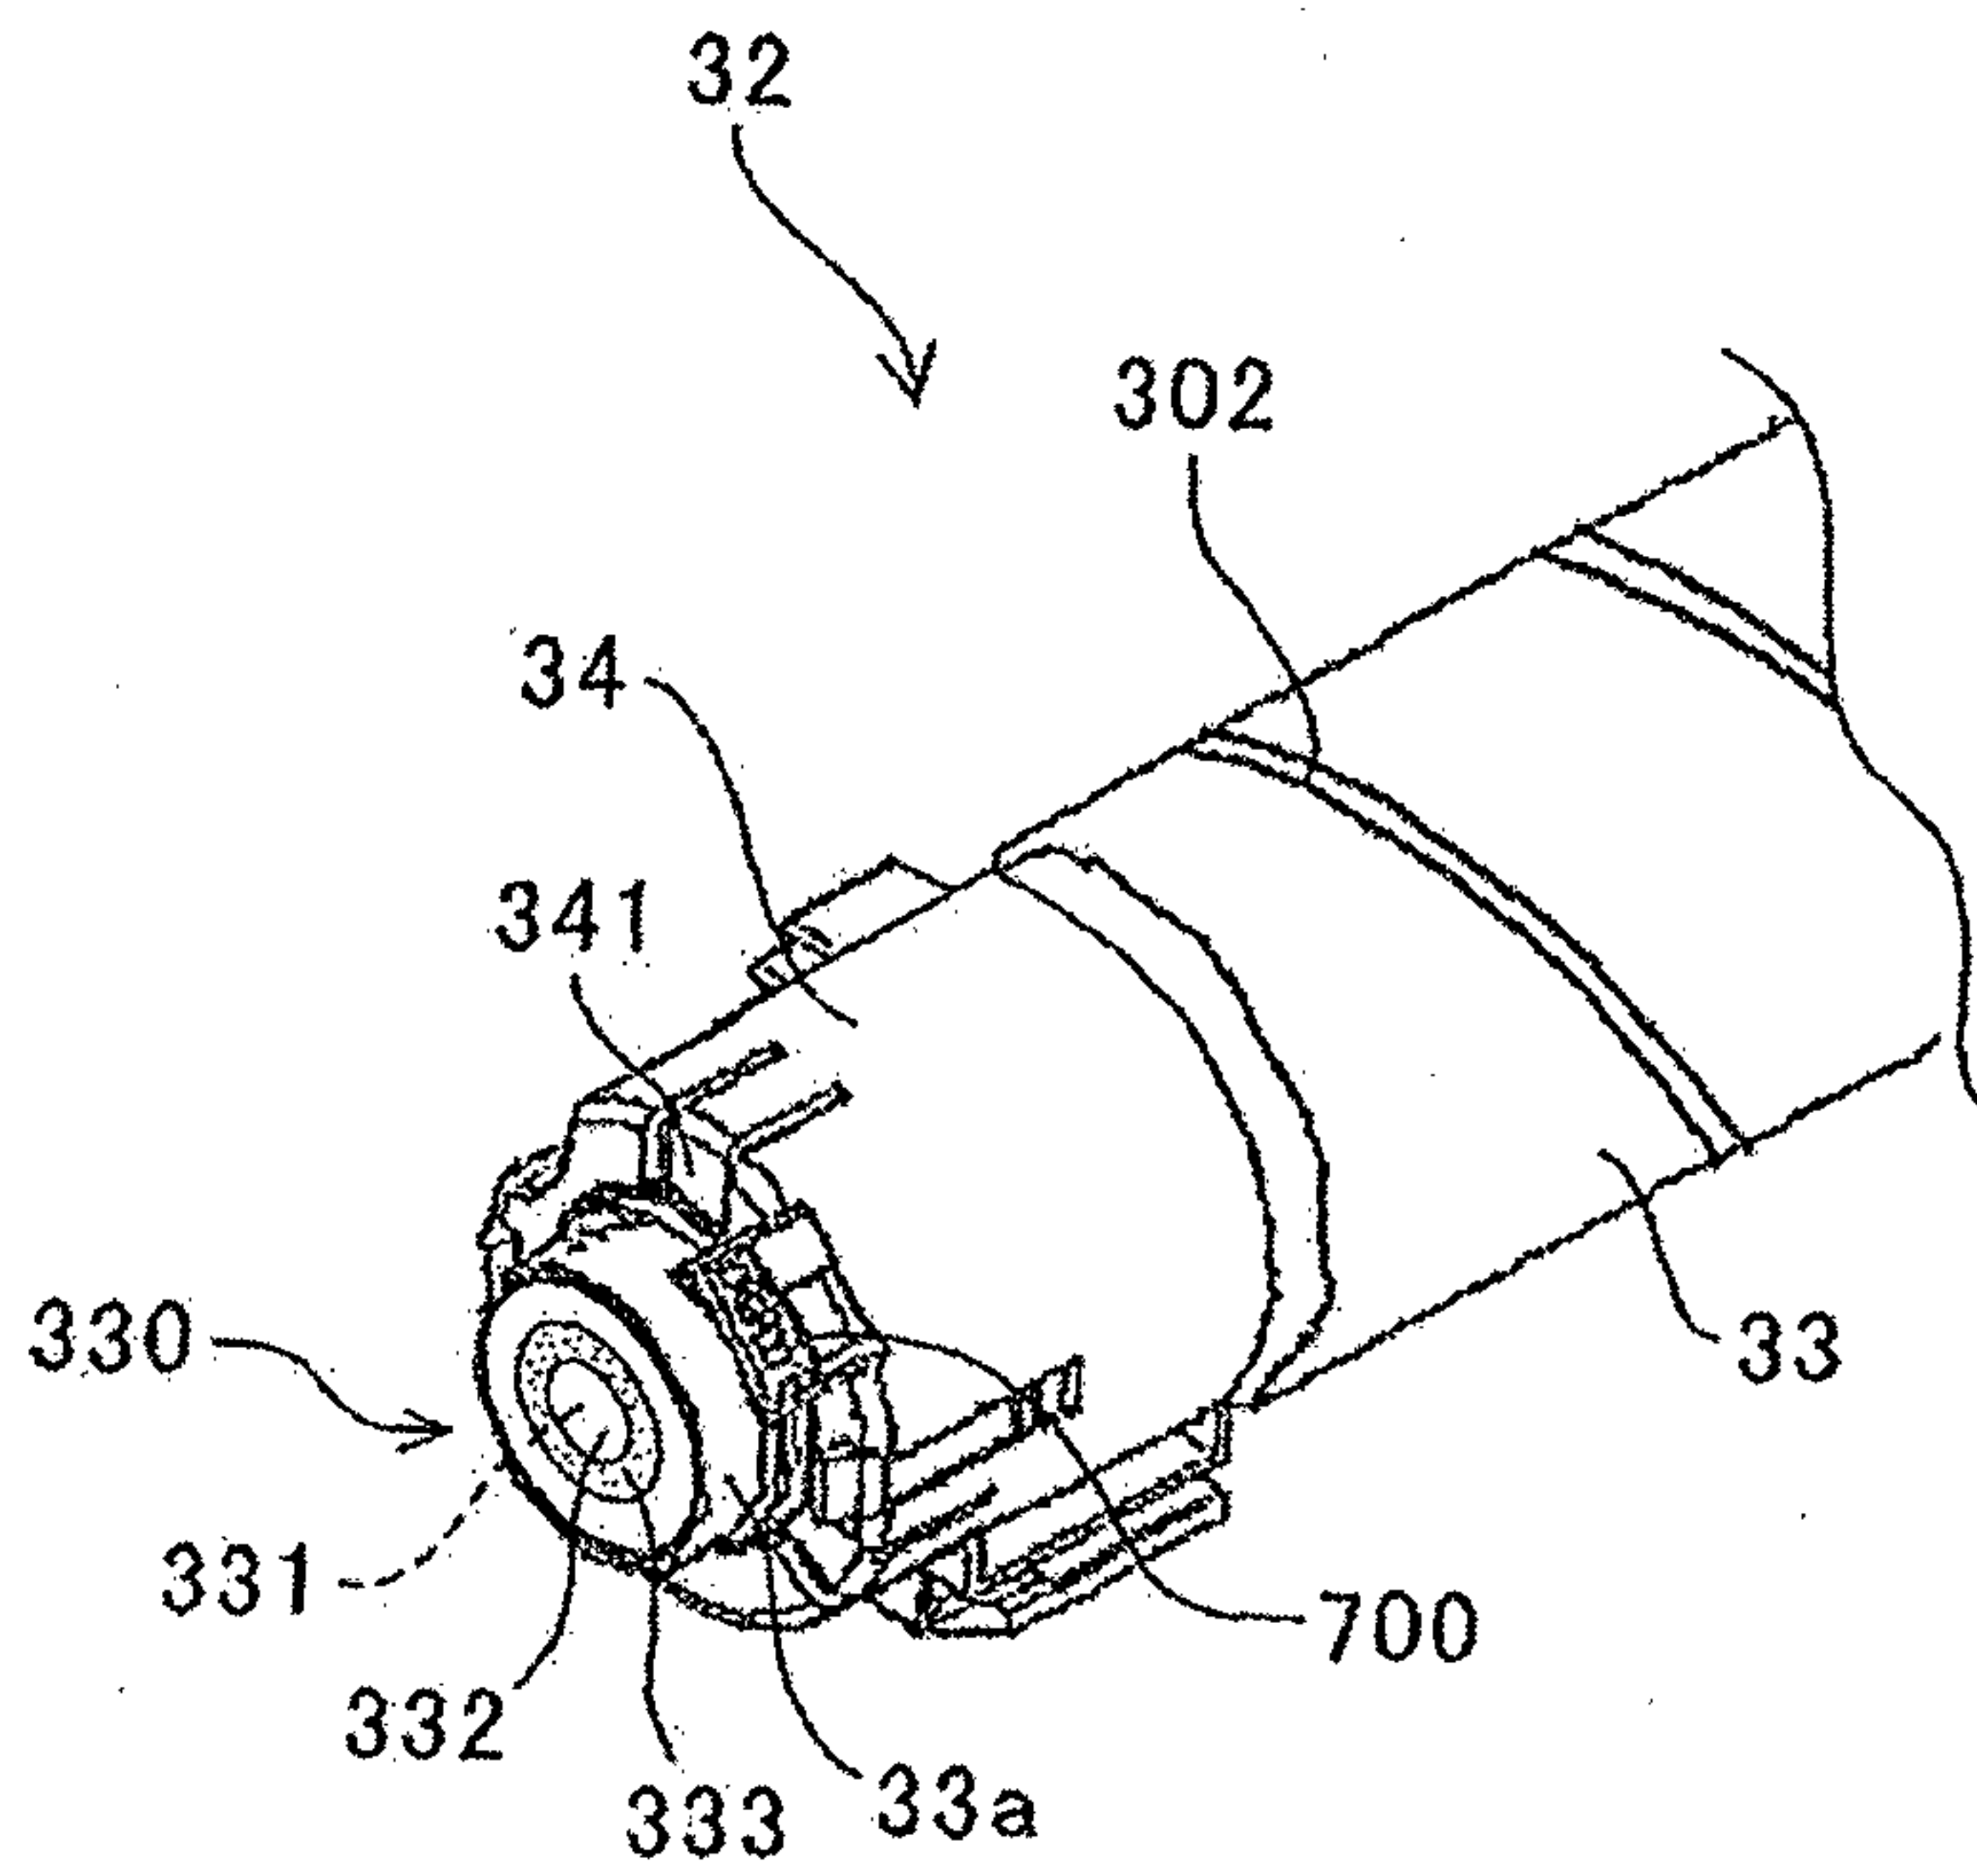


FIG.64B

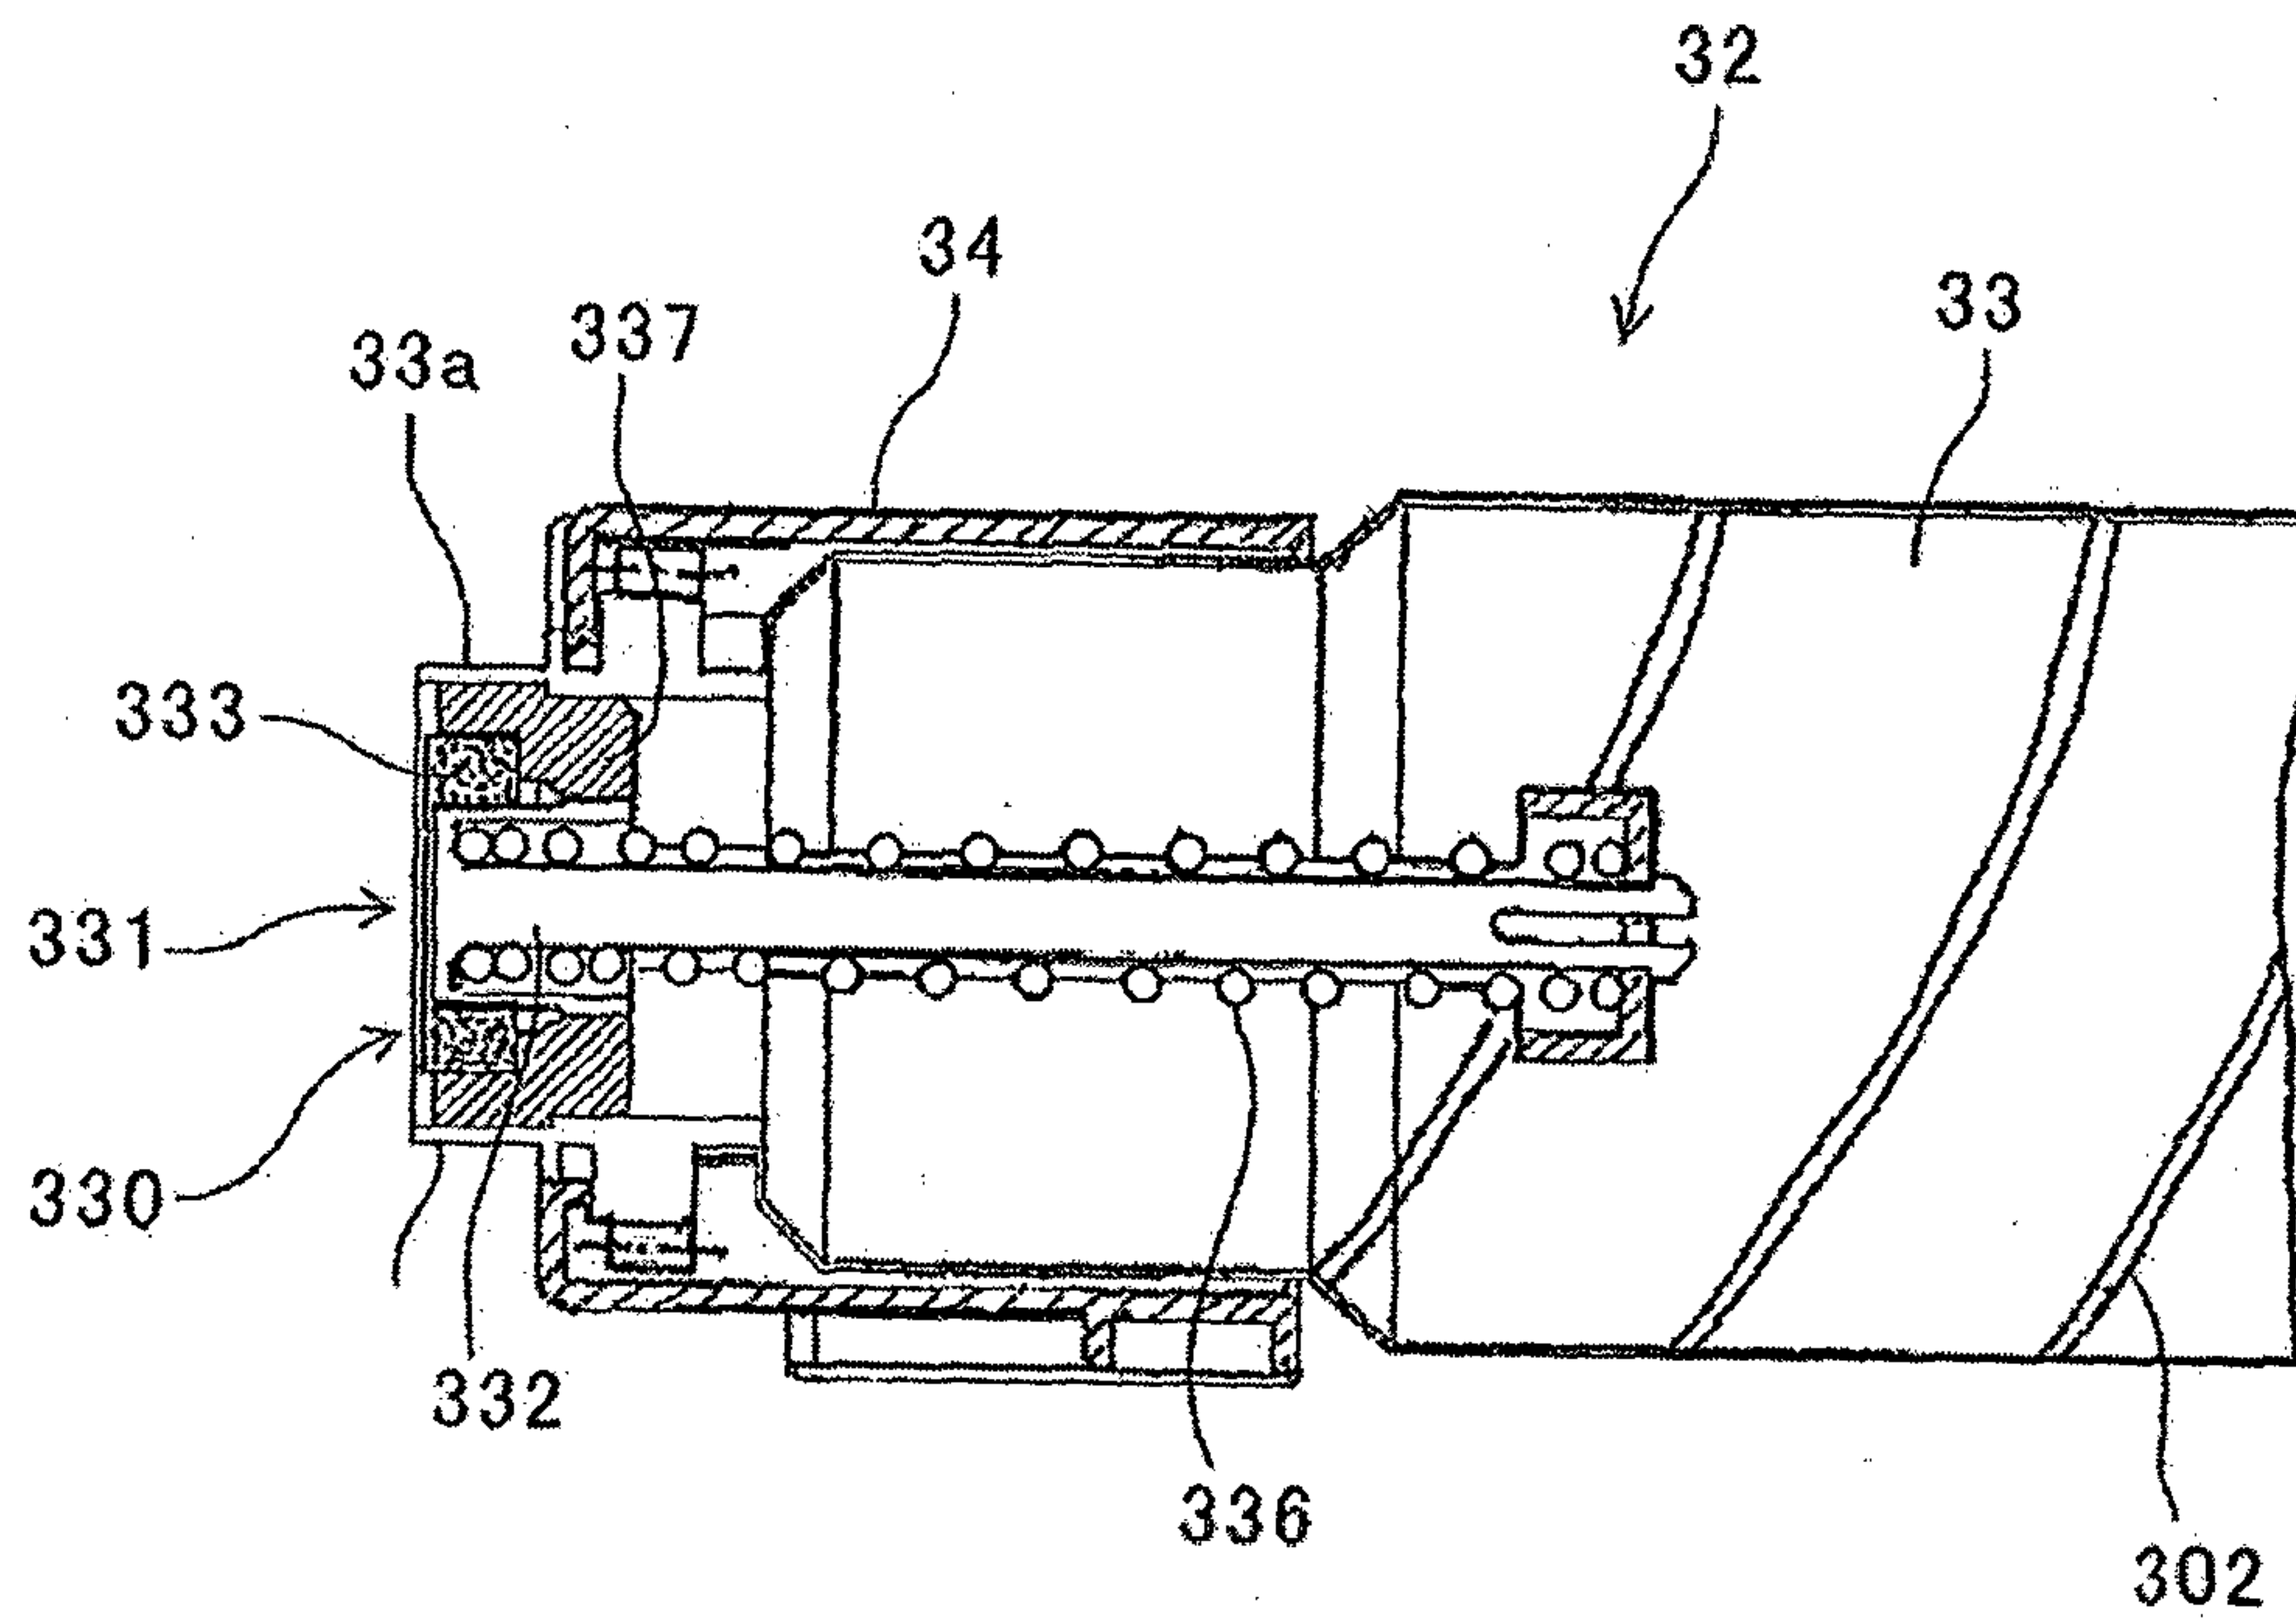

65/66

FIG.65A


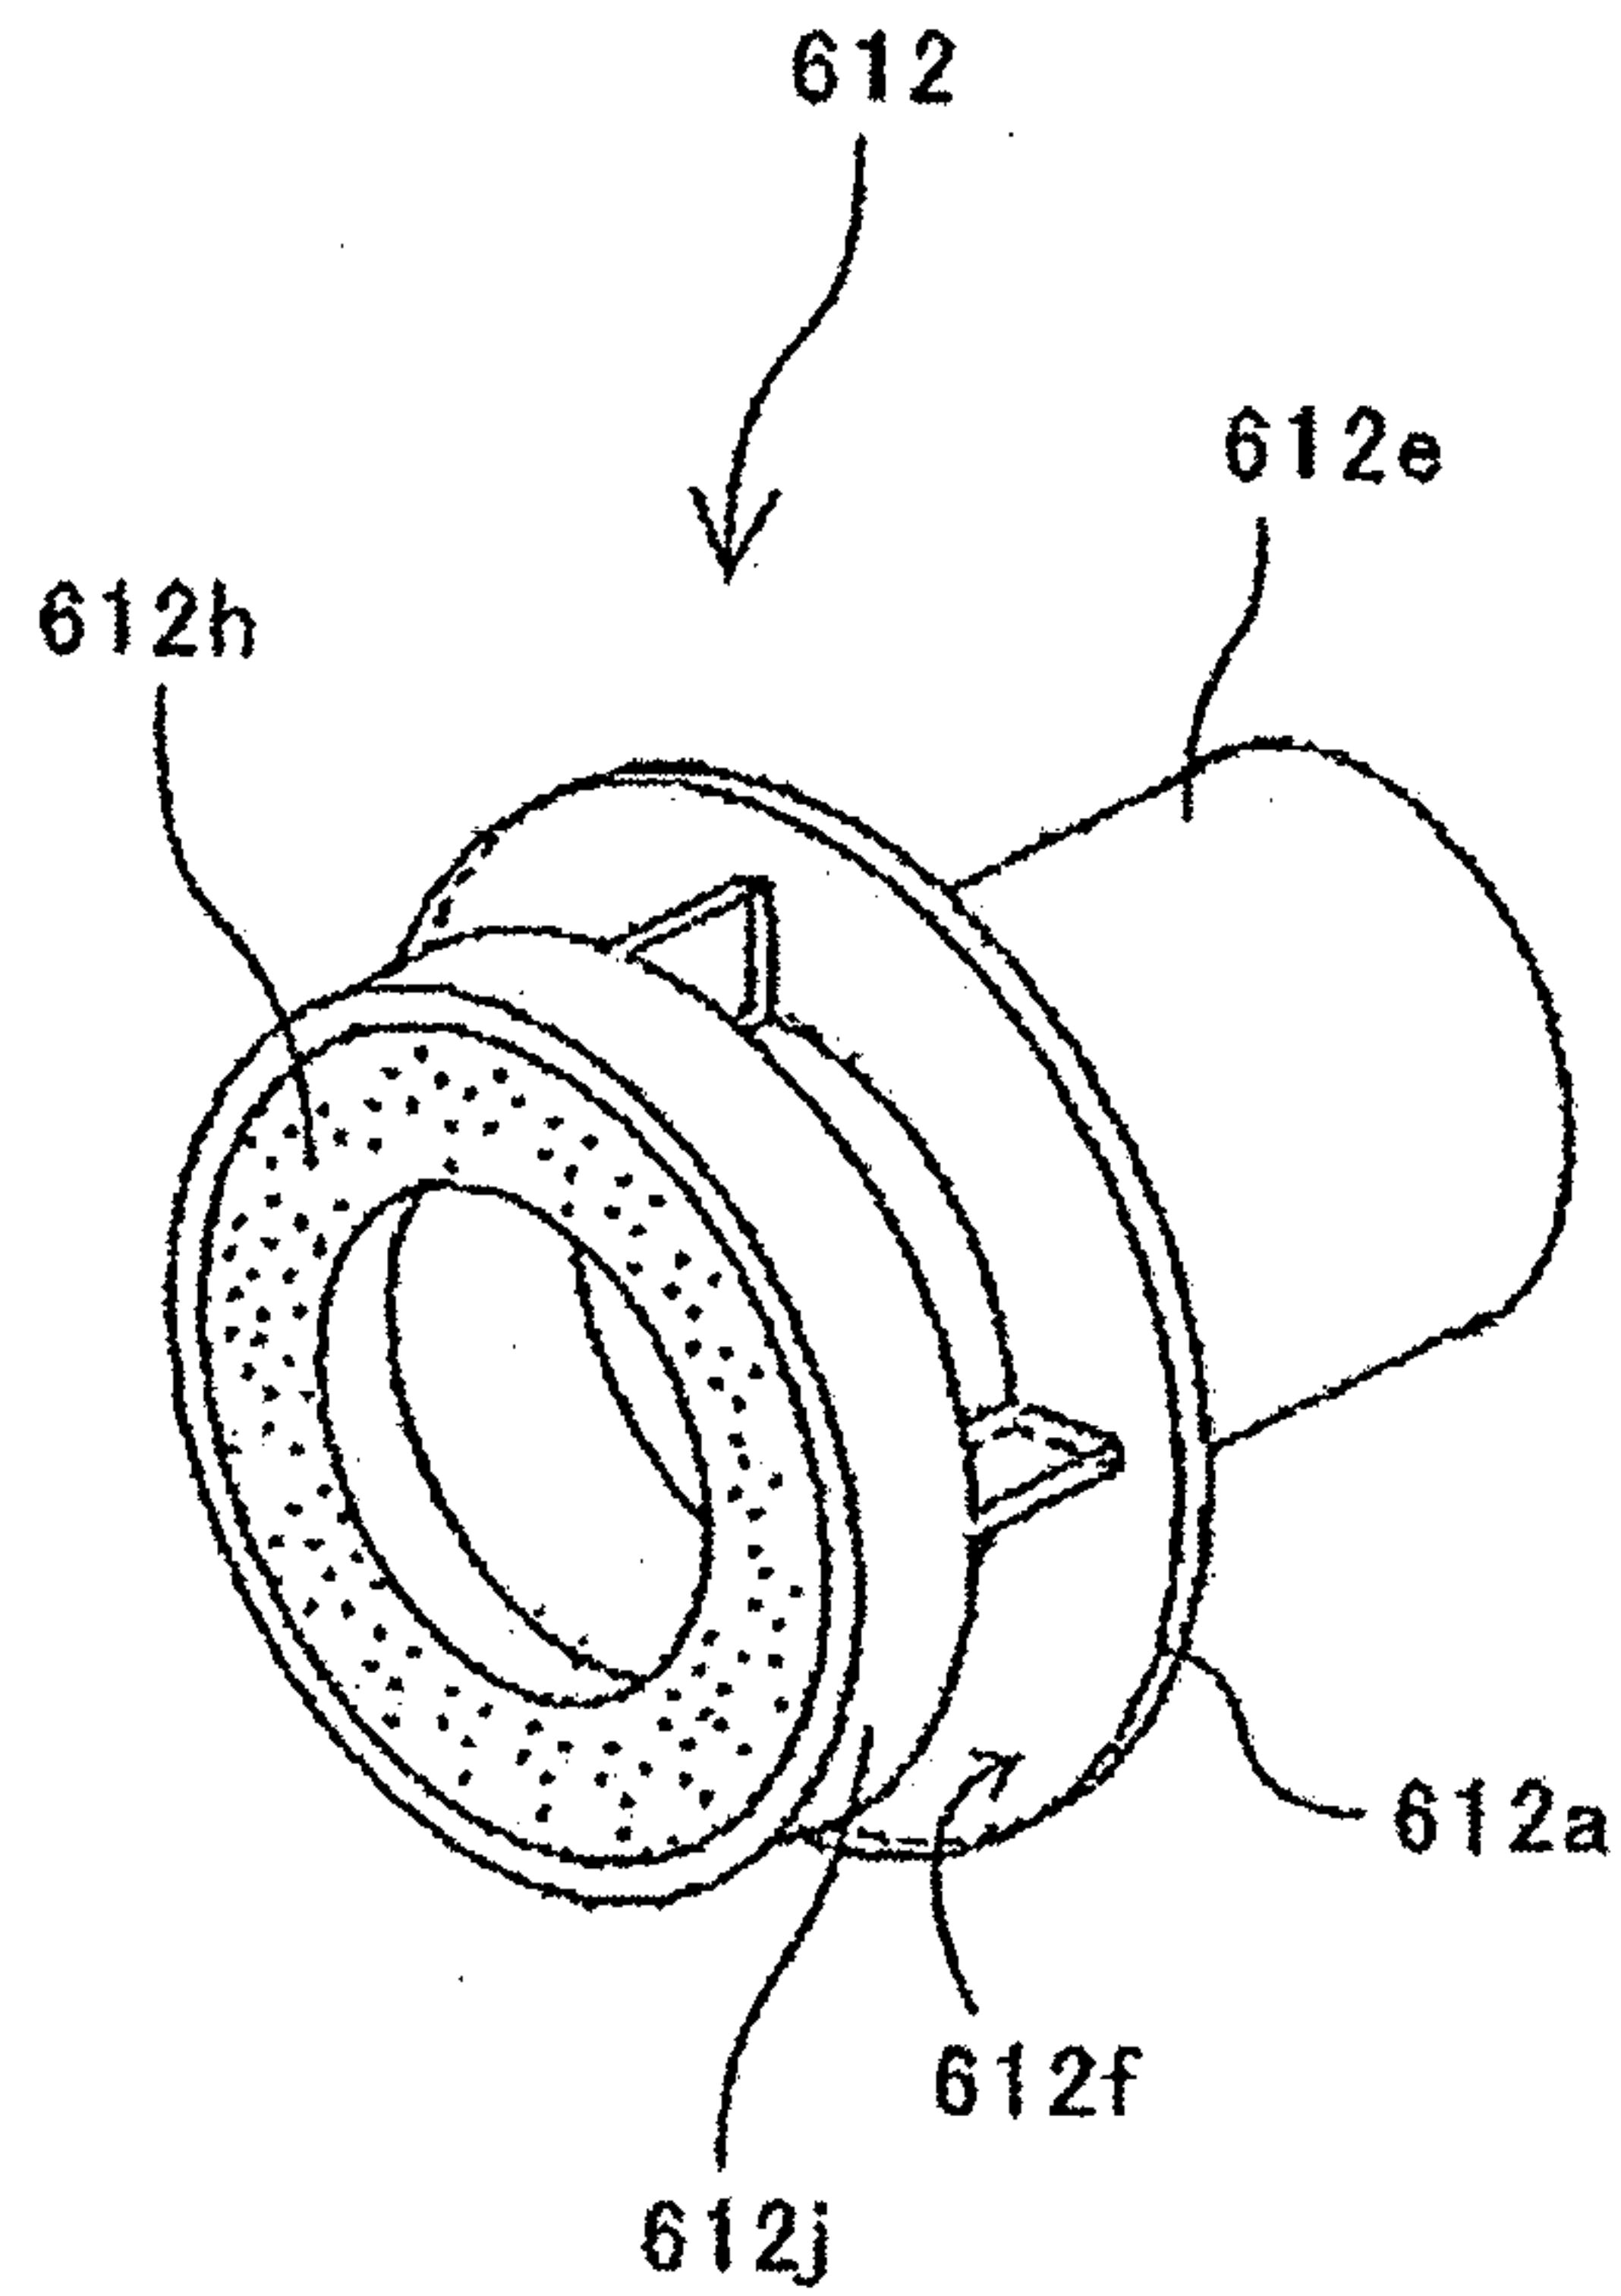


FIG.65B

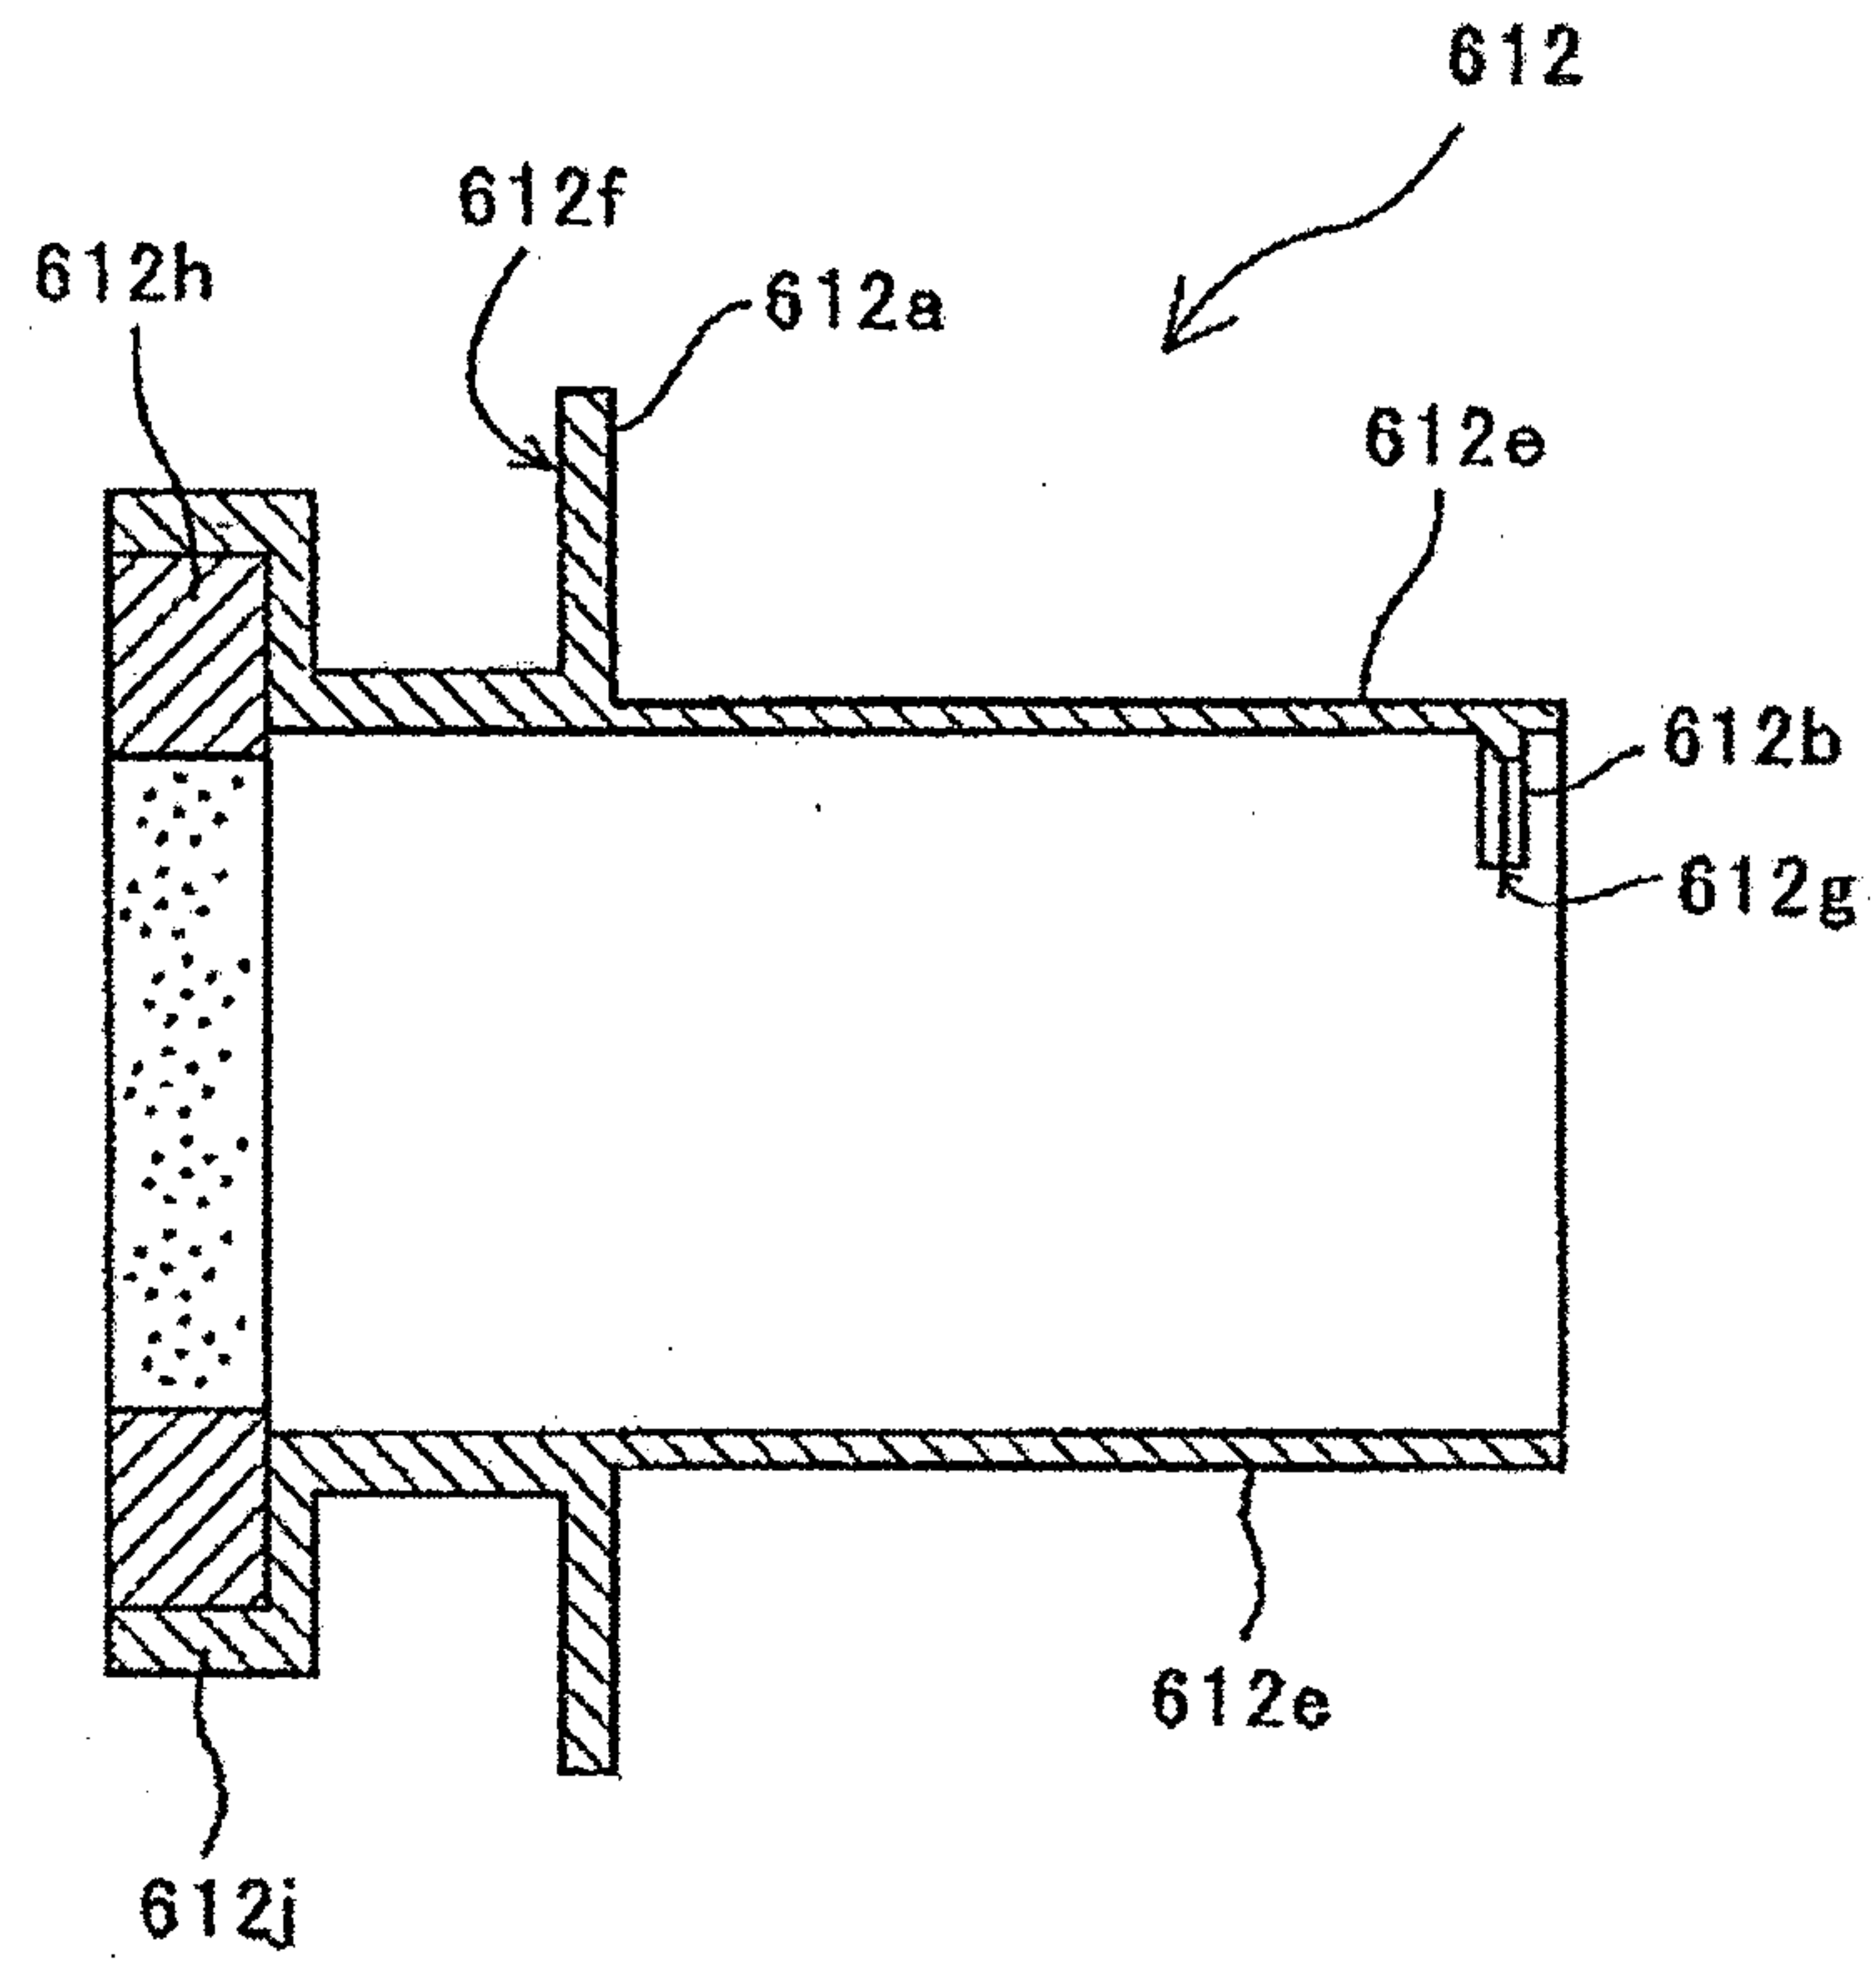

66/66

FIG.66

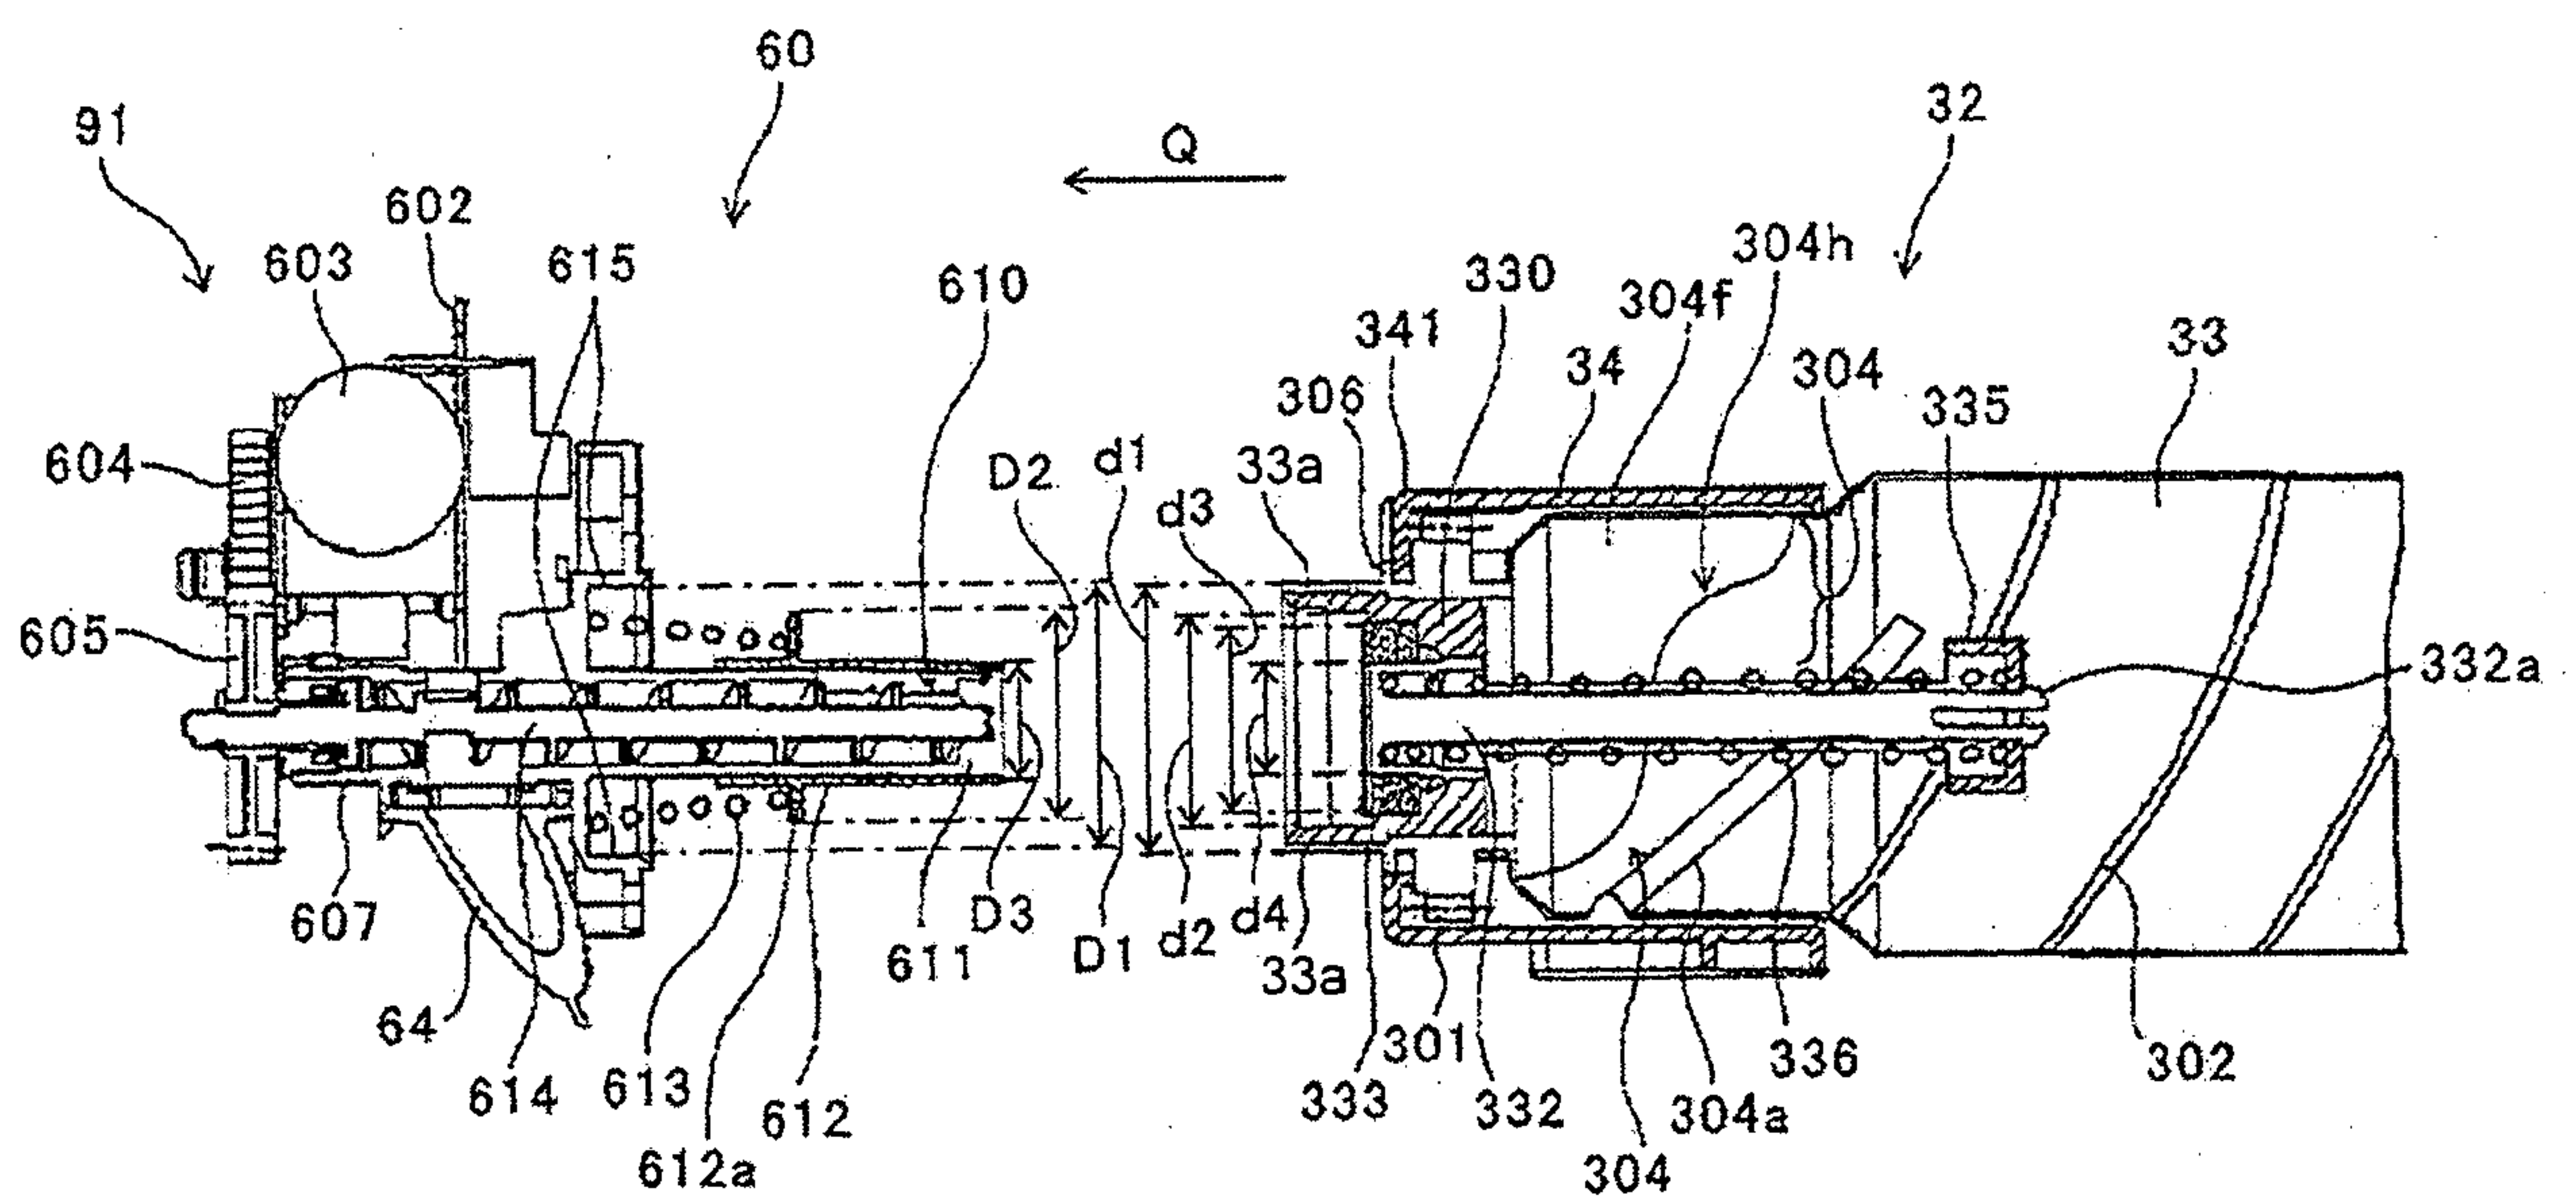


FIG. 1

